
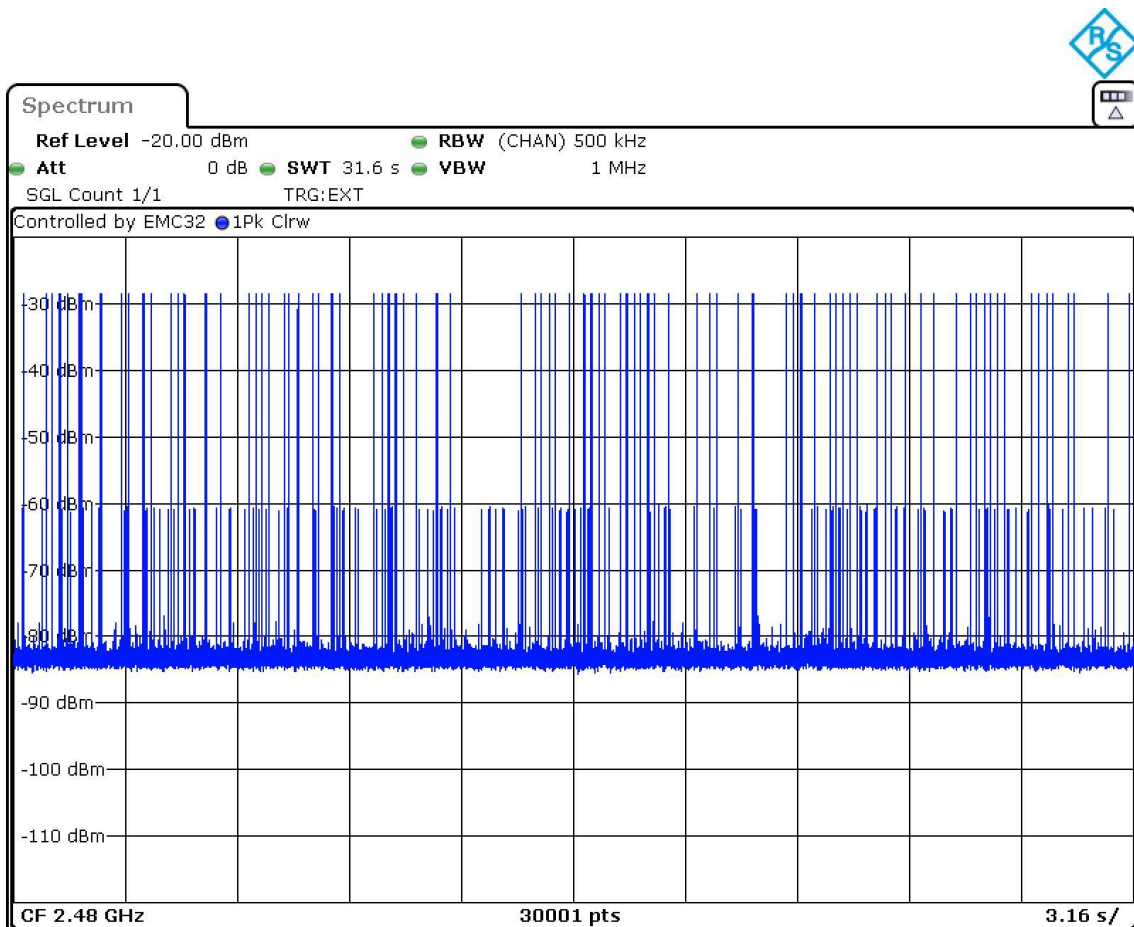




Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (GFSK 1-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

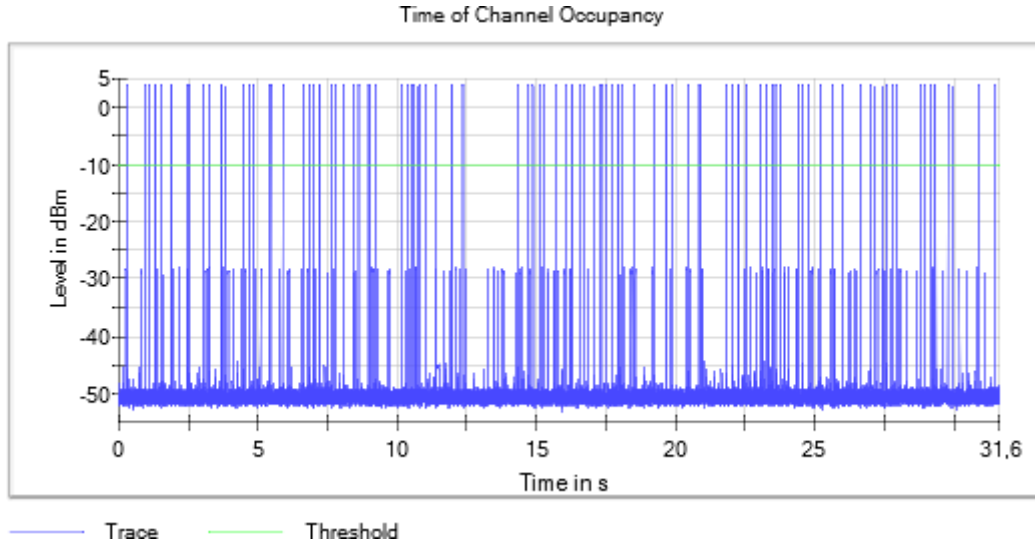



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

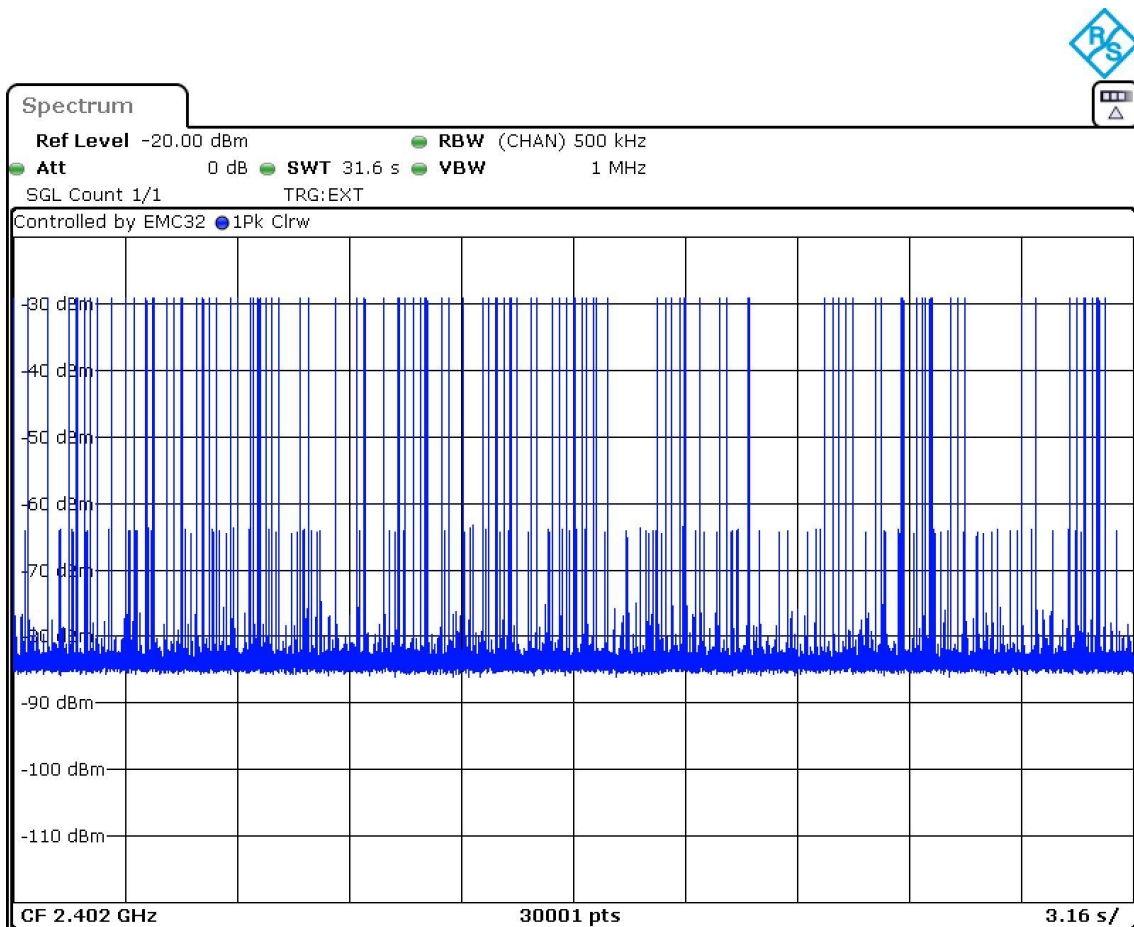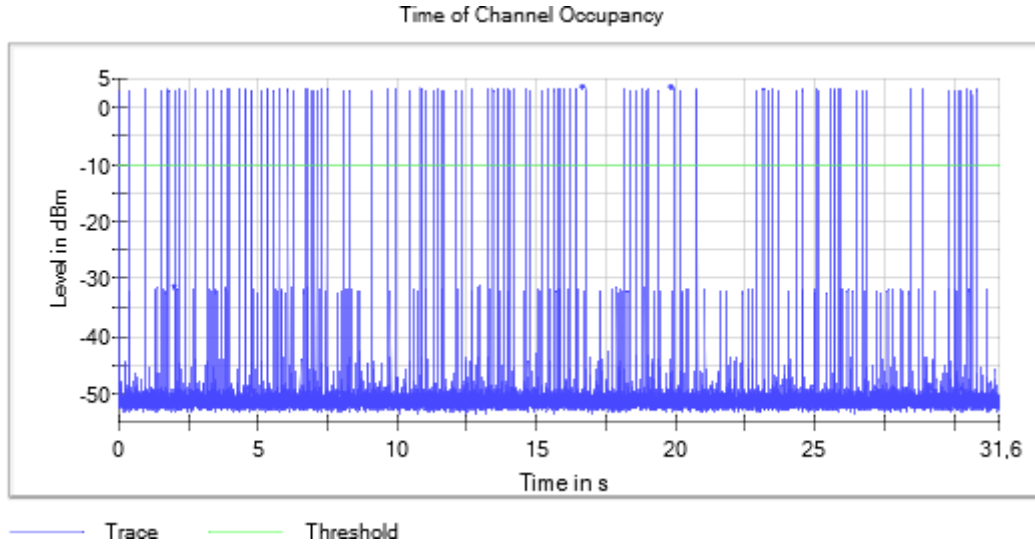



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

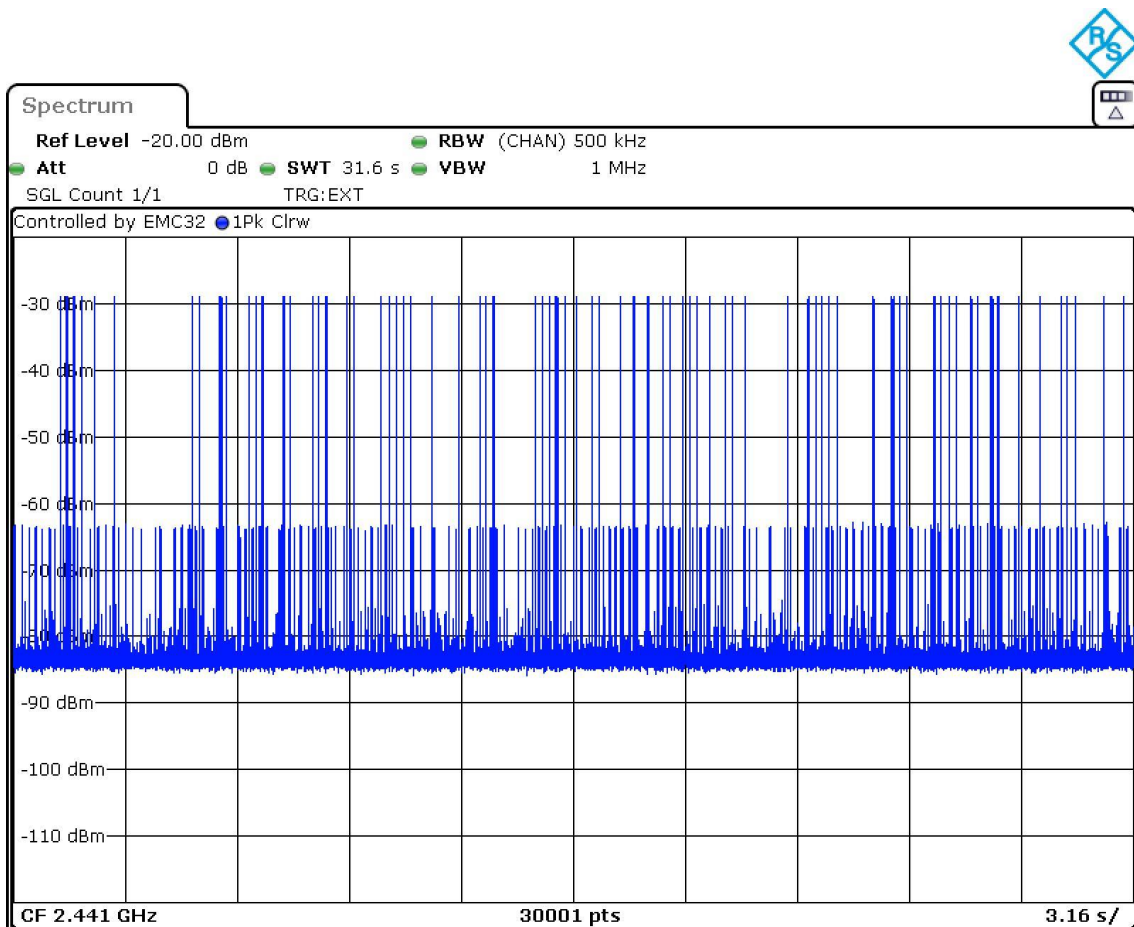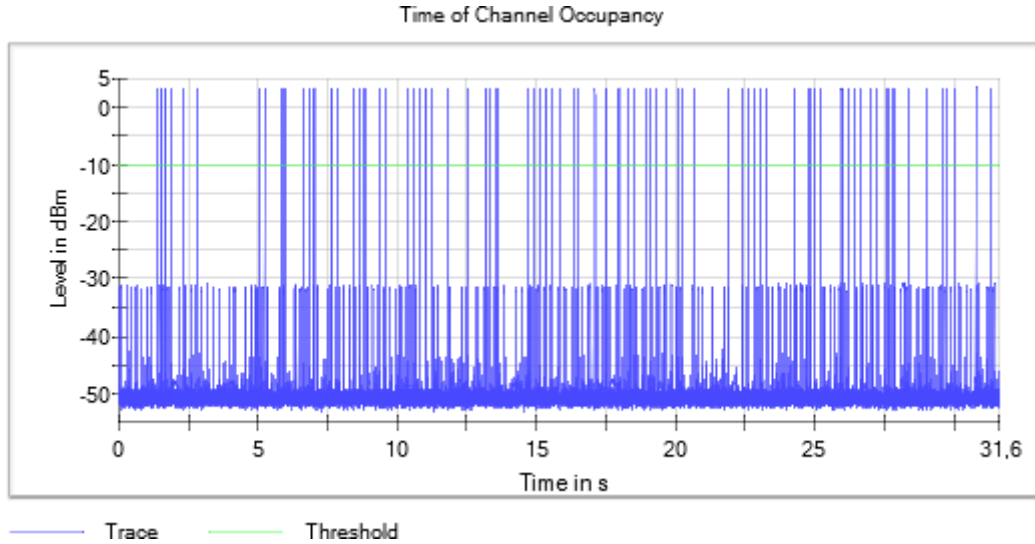



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

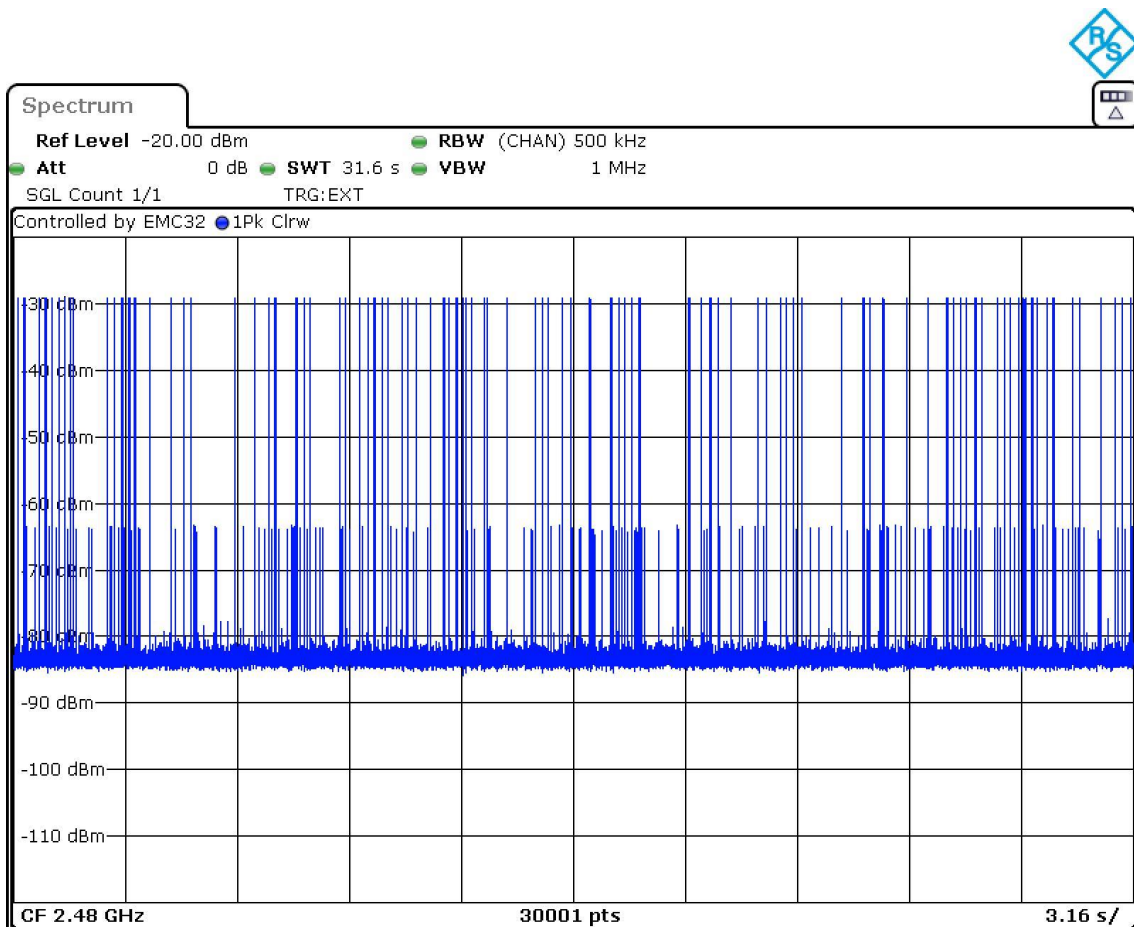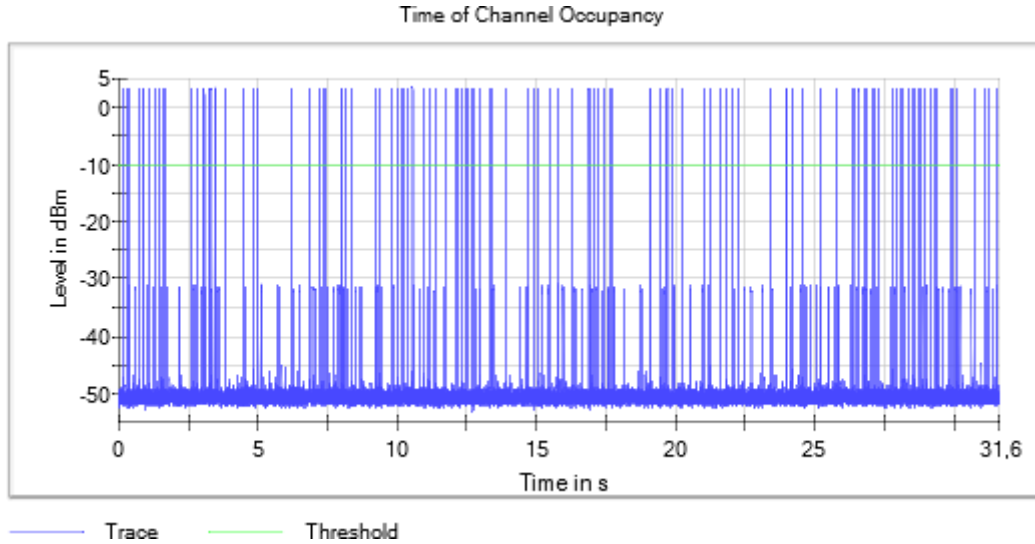



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

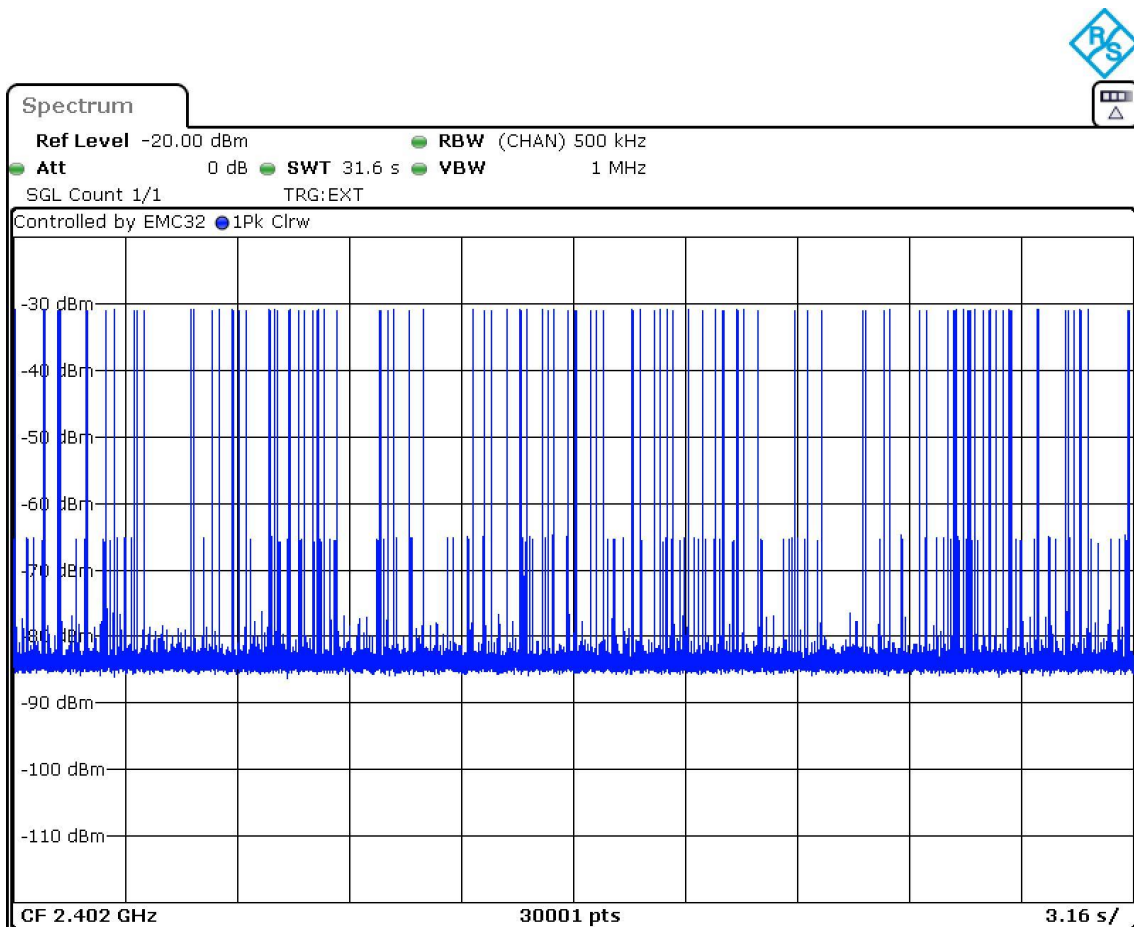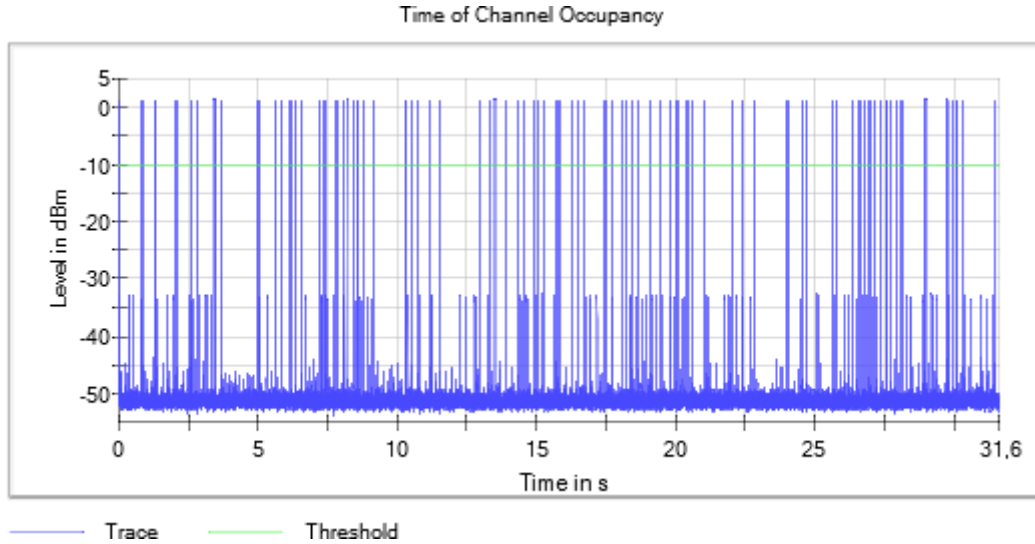



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

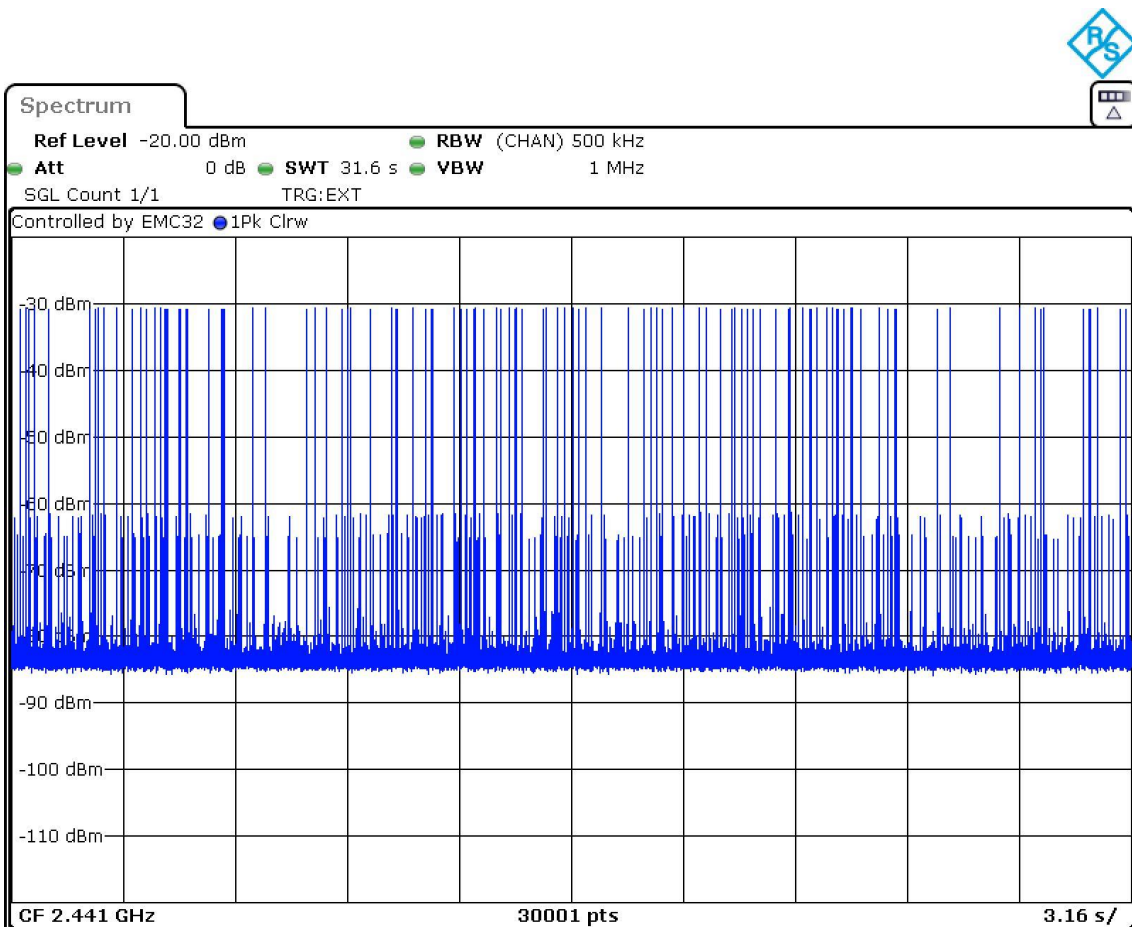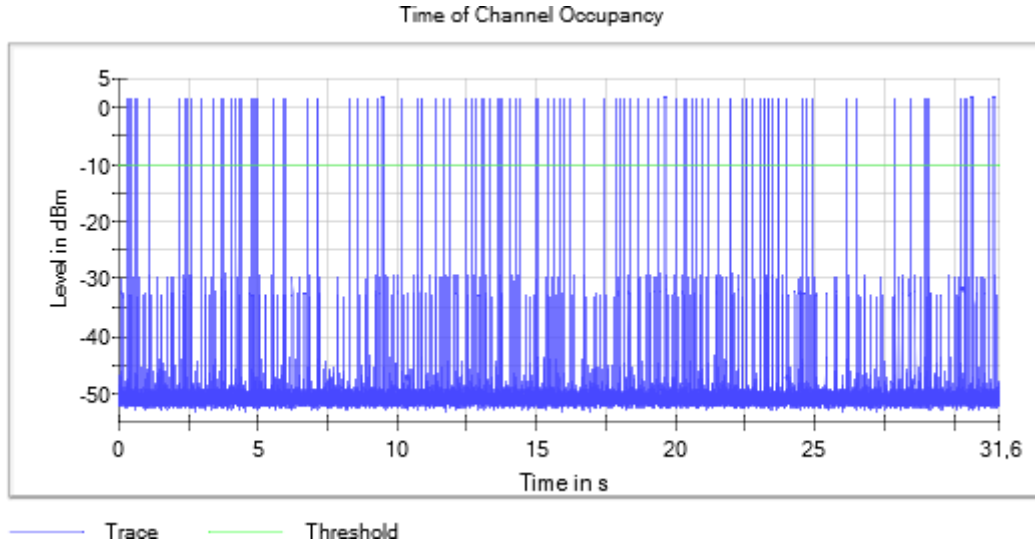

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

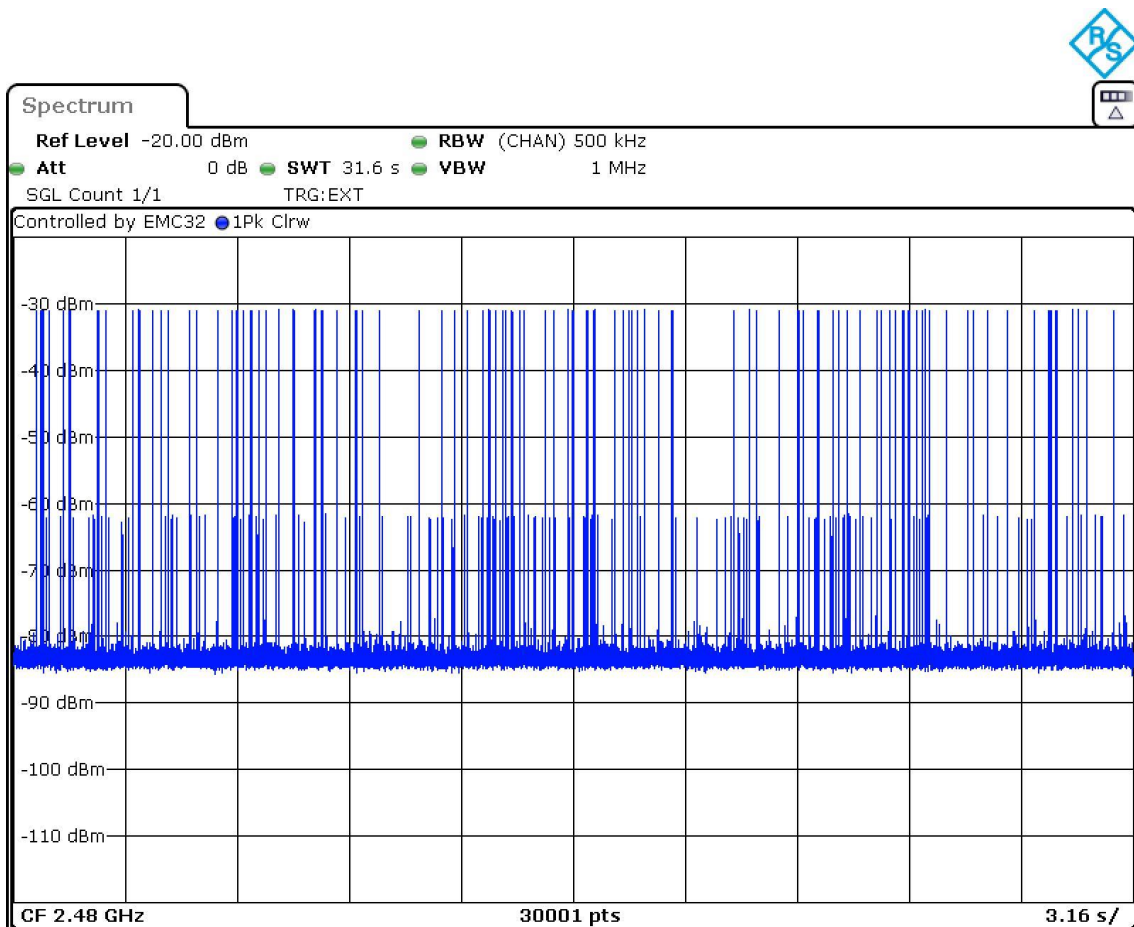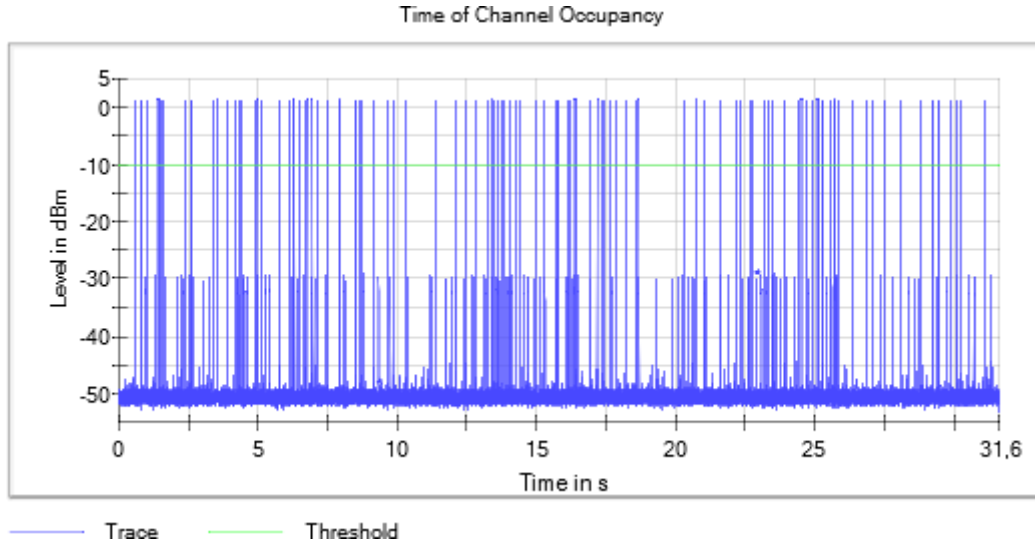

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Number of hopping channels

Limits

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.

Results

Modulation: BT (GFSK 1-DH5)

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	79

Modulation: BT (Pi/4 DQPSK 2-DH5)

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	79

Modulation: BT (8DPSK 3-DH5)

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	79



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) MIMO Mode = SISO
Active Port = 1

Images:

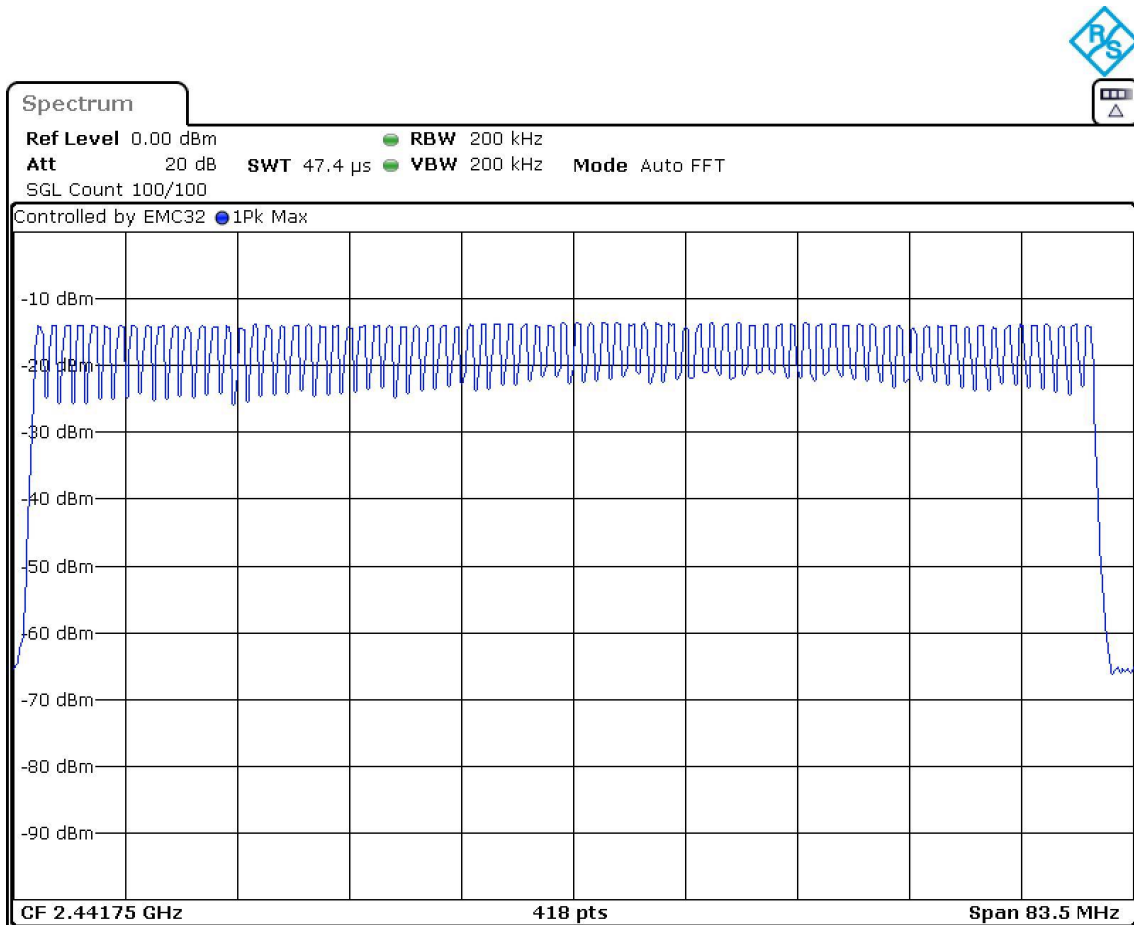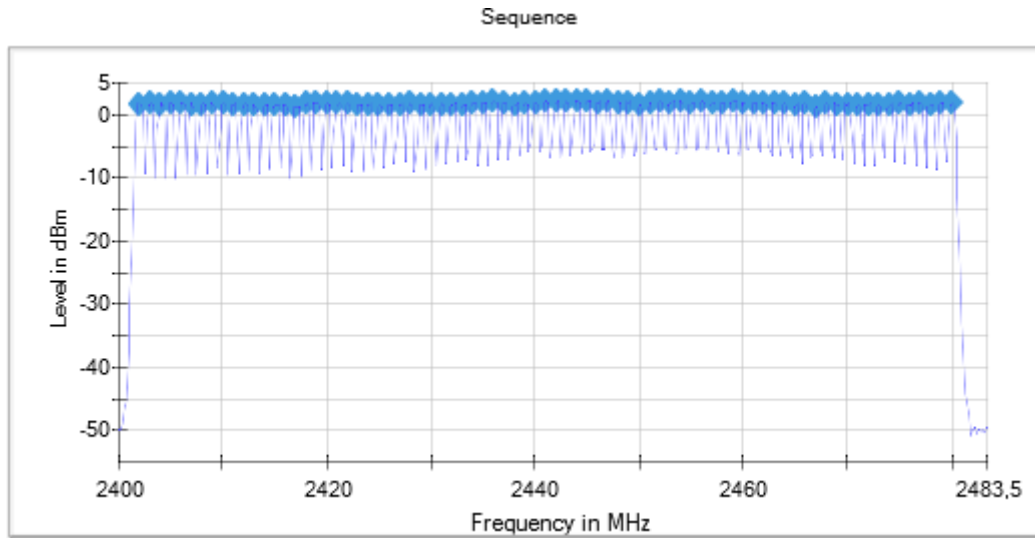



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

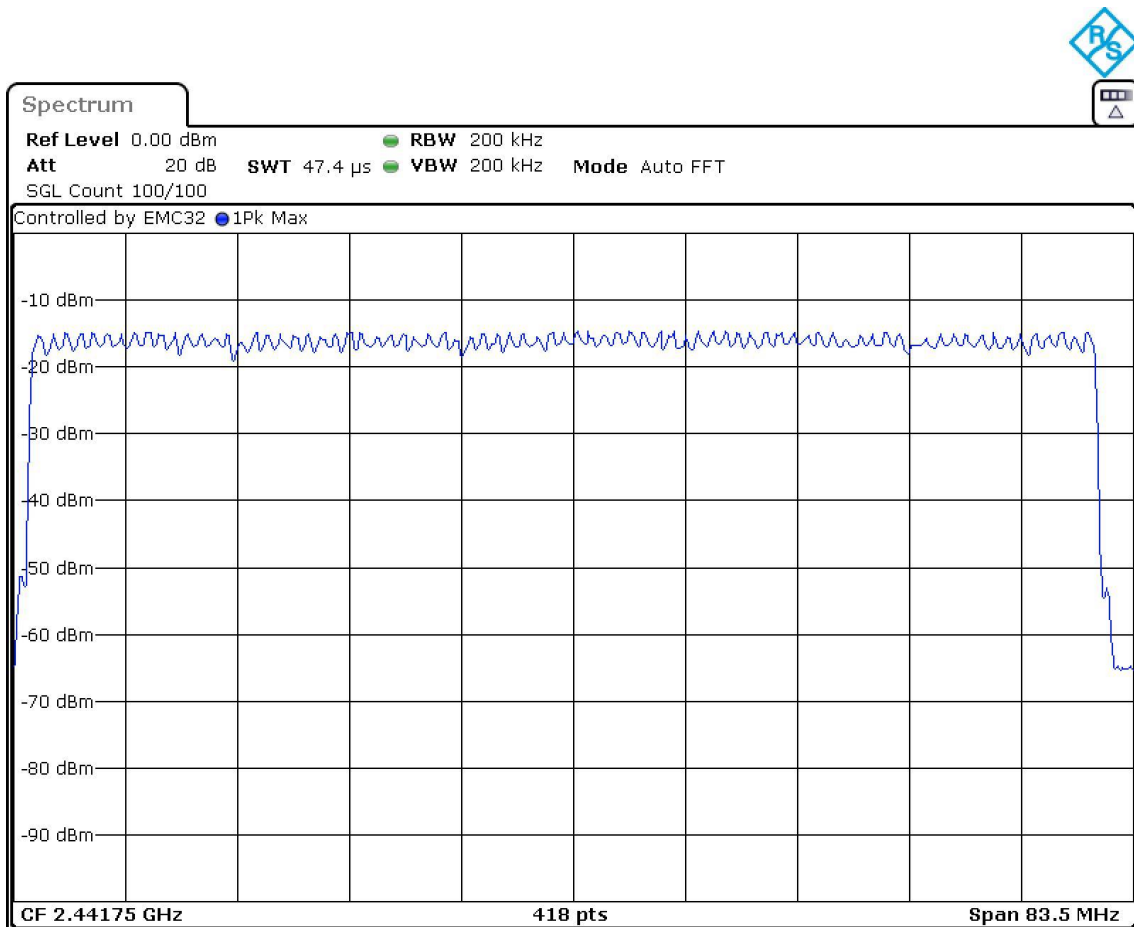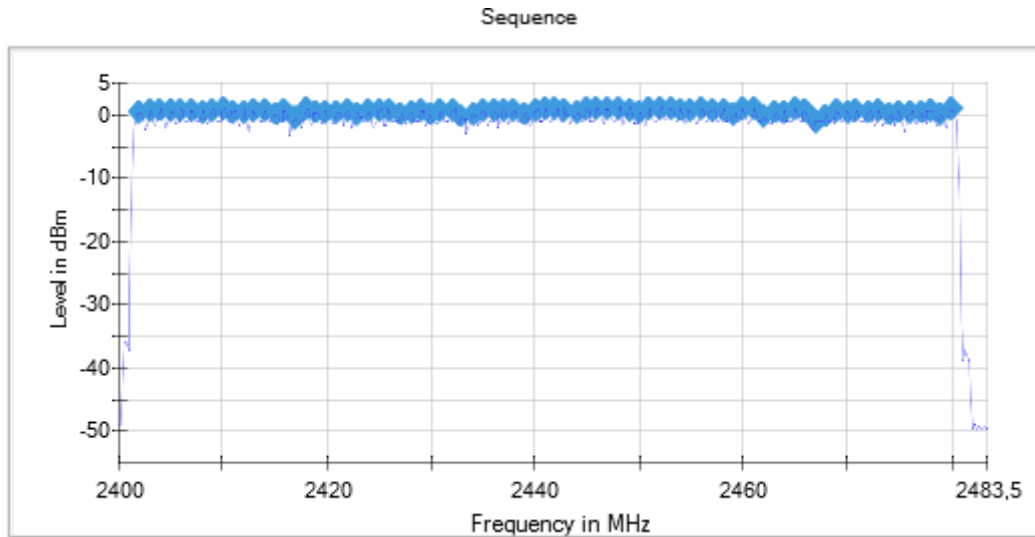

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) MIMO Mode = SISO
 Active Port = 1

Images:

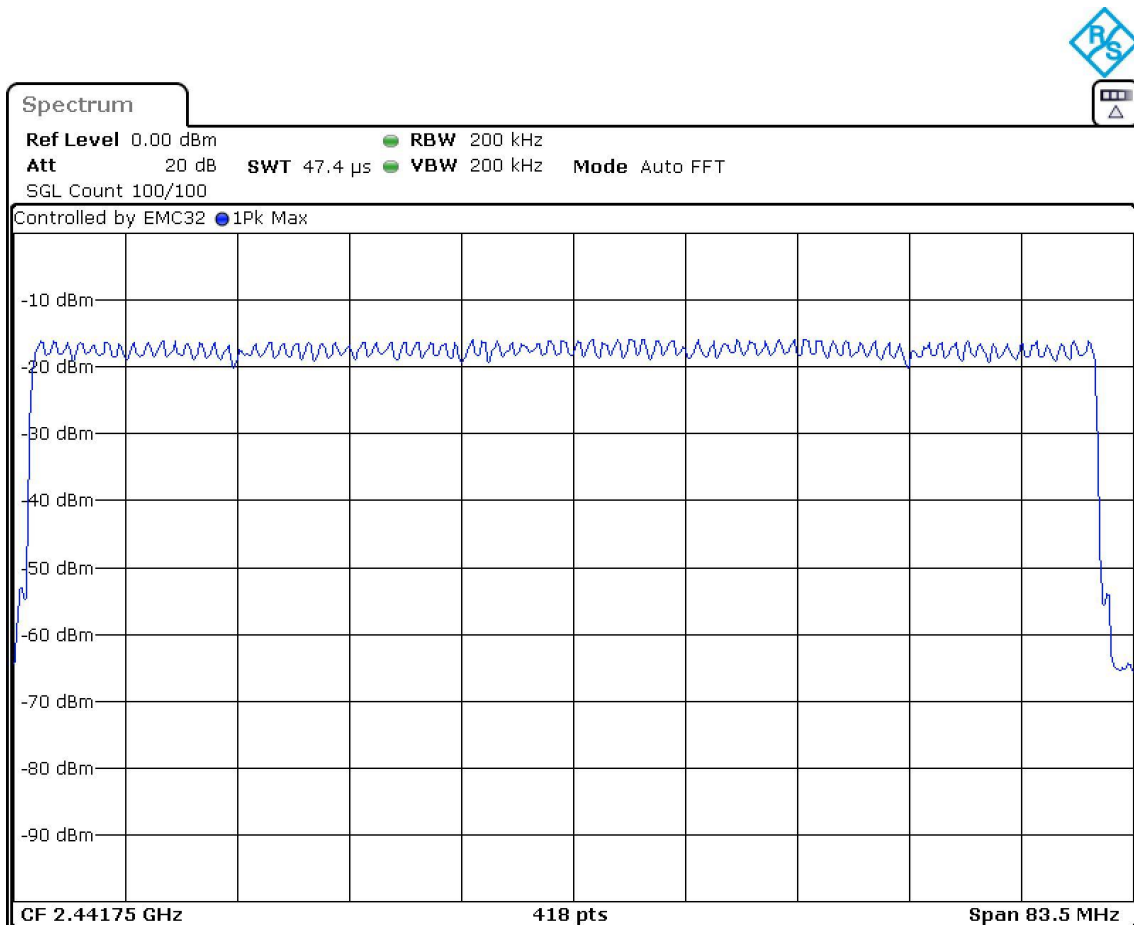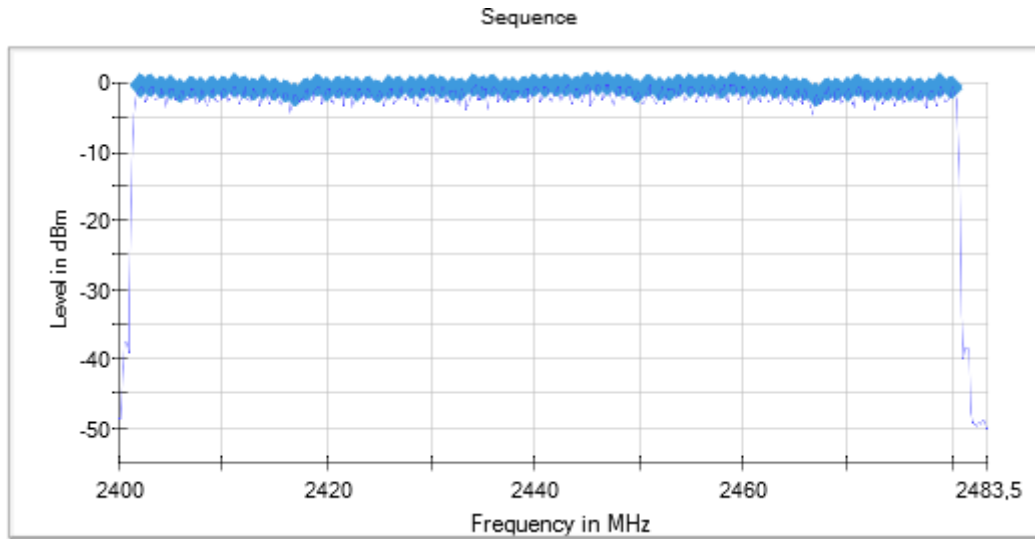

RSS-247 5.4 (b) / FCC 15.247 (b) (1) Maximum Peak Conducted output power and antenna gain

Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm). The e.i.r.p. shall not exceed 4 W (RSS-247).

Results

The maximum peak conducted output power level of the fundamental emission was measured according to clause 7.8.5 "Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices" of ANSI C63.10-2013.

The EIRP power (dBm) is calculated by adding the maximum declared antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: +2.8 dBi

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Modulation: BT (GFSK 1-DH5)

Equipment	BW (MHz)	Freq (MHz)	Port	PeakPower (dBm)	EIRP (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	2.0180	4.8180
		2441.00000		2.3010	5.1010
		2480.00000		2.1270	4.9270

Modulation: BT (GFSK 2-DH5)

Equipment	BW (MHz)	Freq (MHz)	Port	PeakPower (dBm)	EIRP (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	3.0020	5.8020
		2441.00000		2.8330	5.6330
		2480.00000		3.0210	5.8210

Modulation: BT (8DPSK 3-DH5)

Equipment	BW (MHz)	Freq (MHz)	Port	PeakPower (dBm)	EIRP (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	2.2920	5.0920
		2441.00000		2.7580	5.5580
		2480.00000		1.7510	4.5510



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
 MIMO Mode = SISO Active Port = 1

Images:

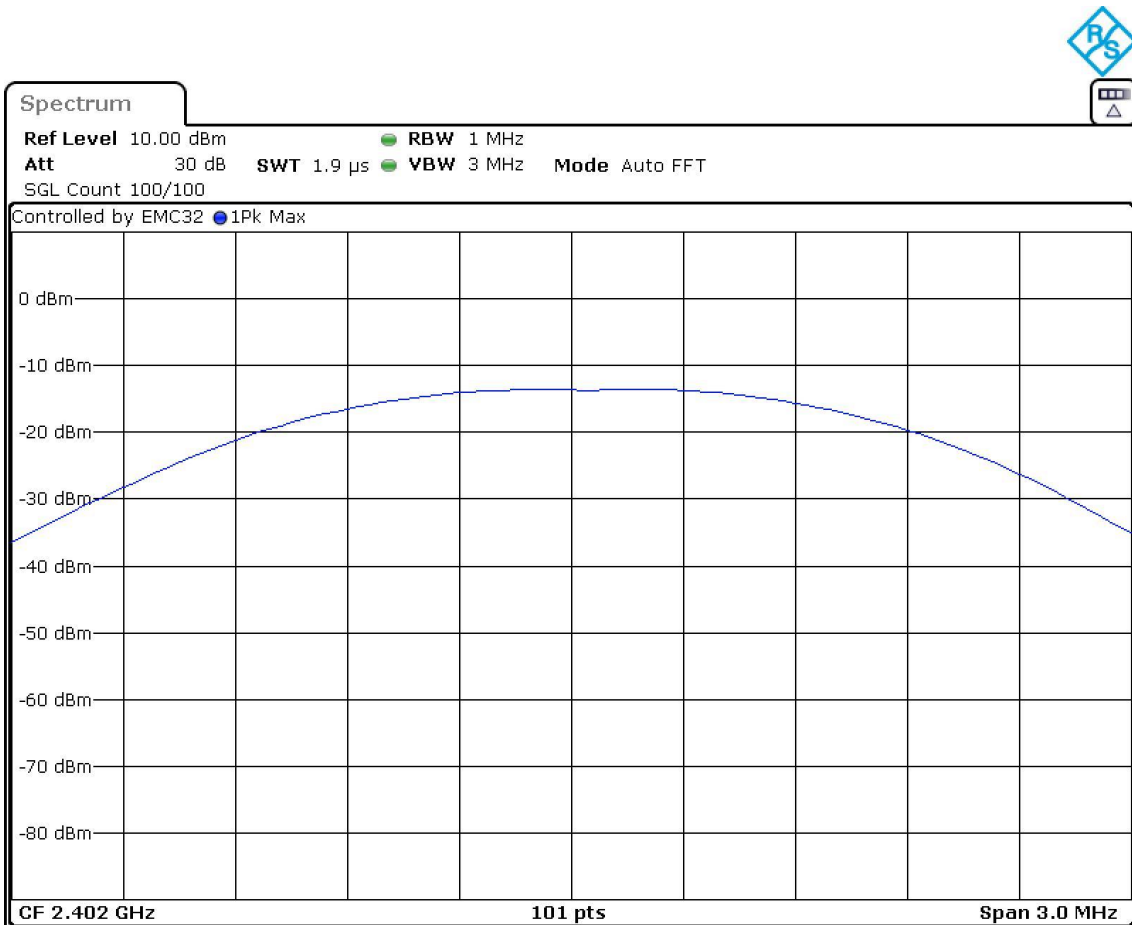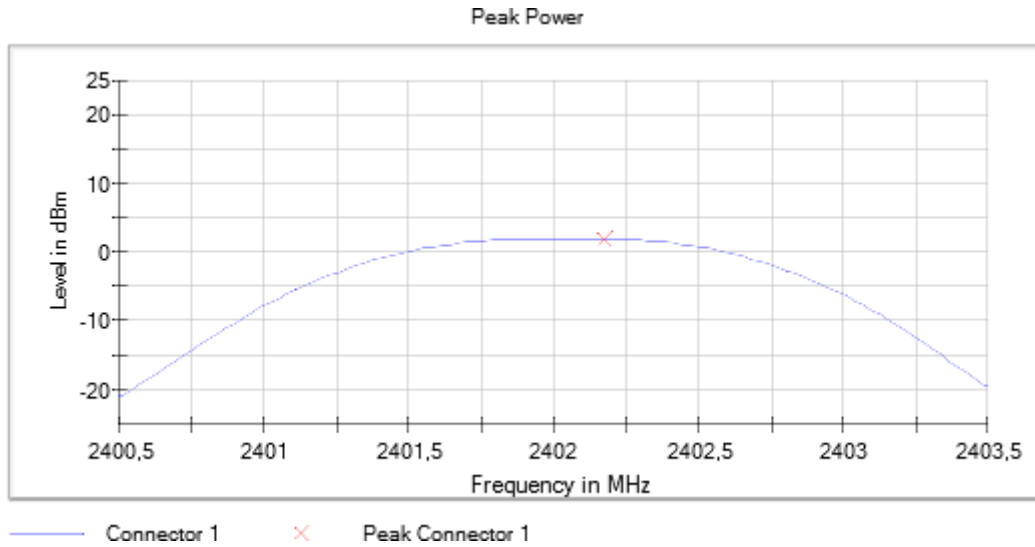



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (GFSK 1-DH5) Frequency MHz = 2441.00000
 MIMO Mode = SISO Active Port = 1

Images:

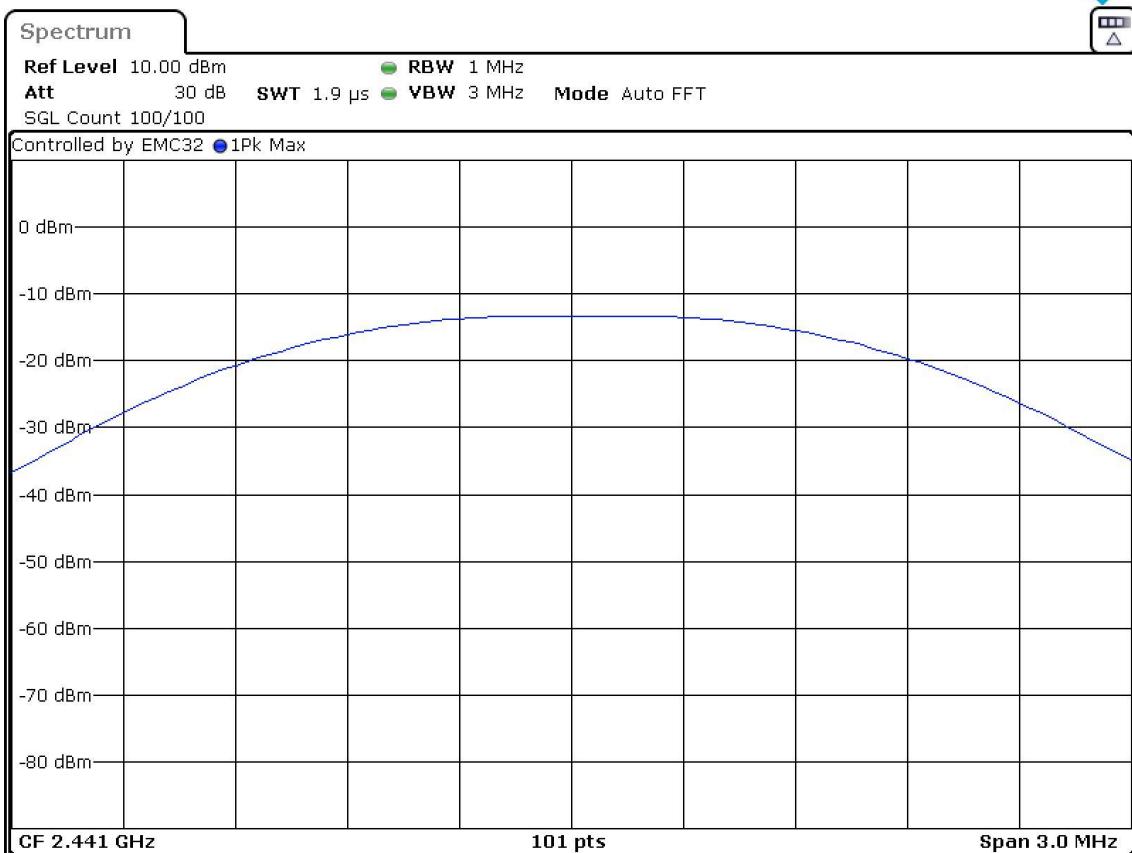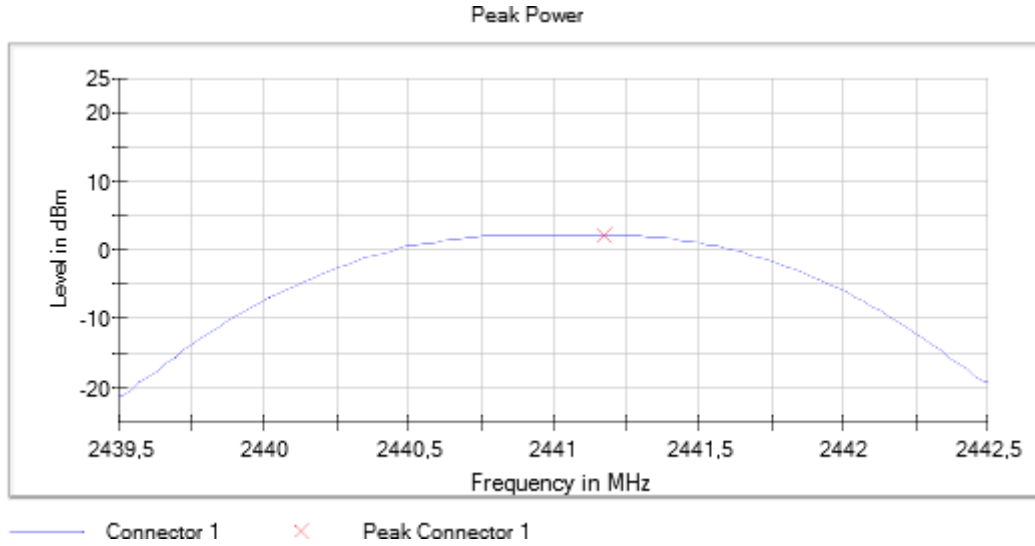



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000
 MIMO Mode = SISO Active Port = 1

Images:

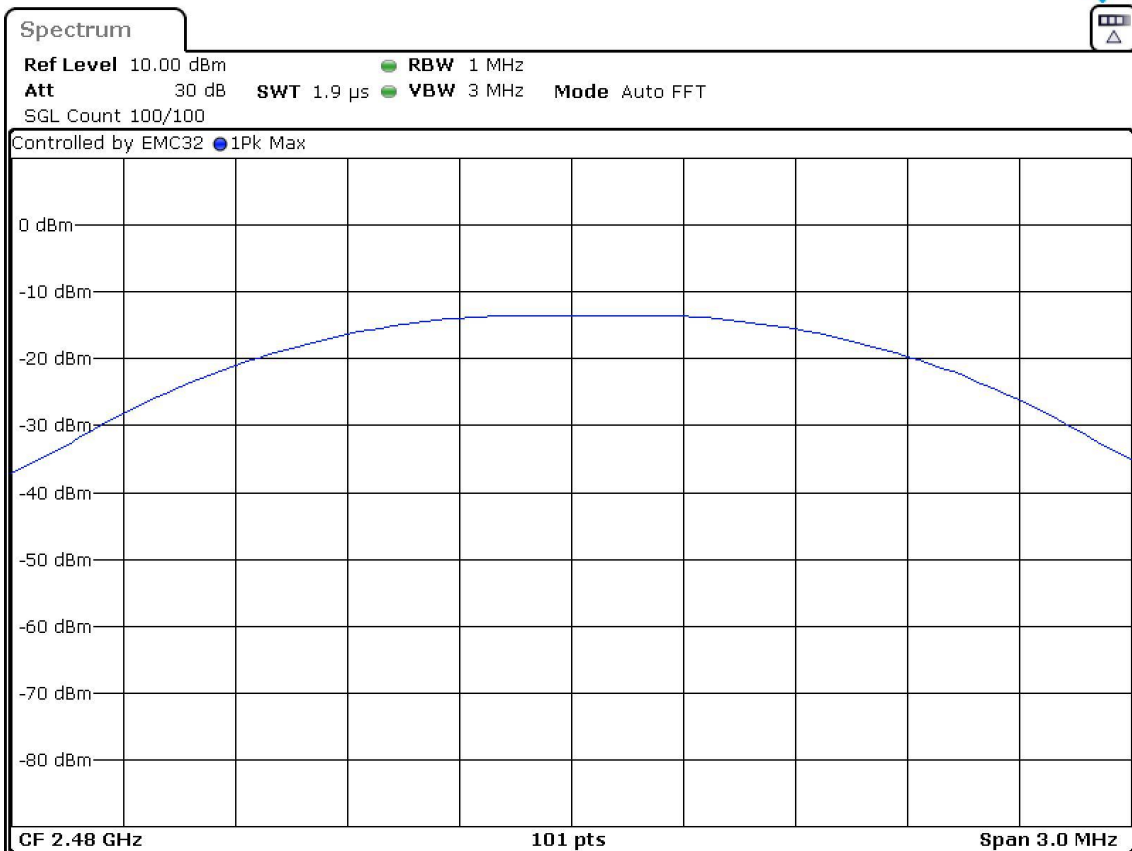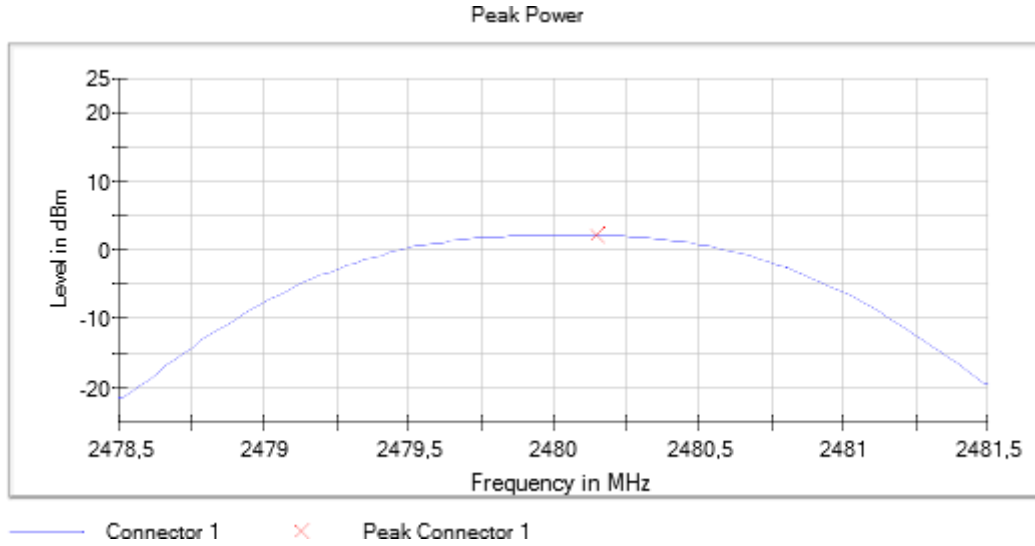



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2402.00000
 MIMO Mode = SISO Active Port = 1

Images:

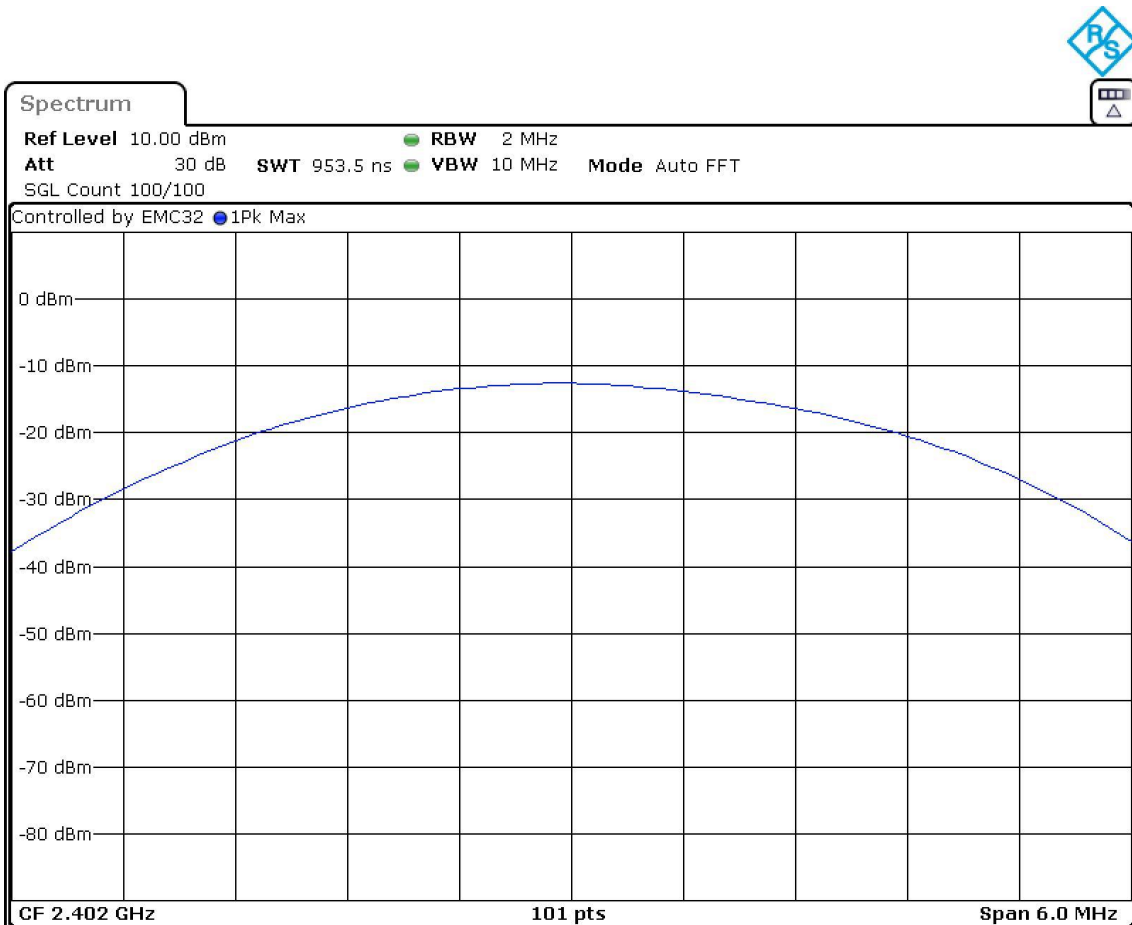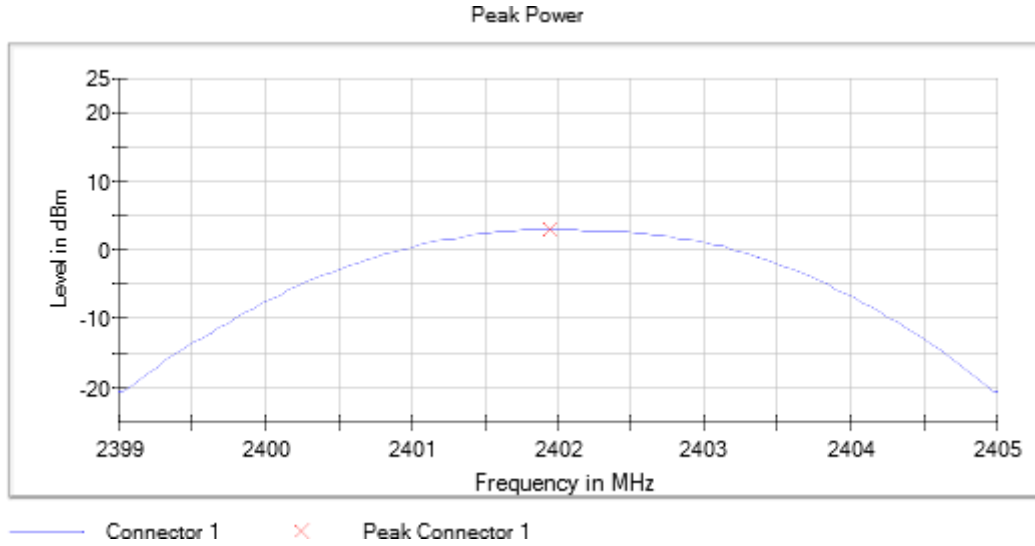



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2441.00000
 MIMO Mode = SISO Active Port = 1

Images:

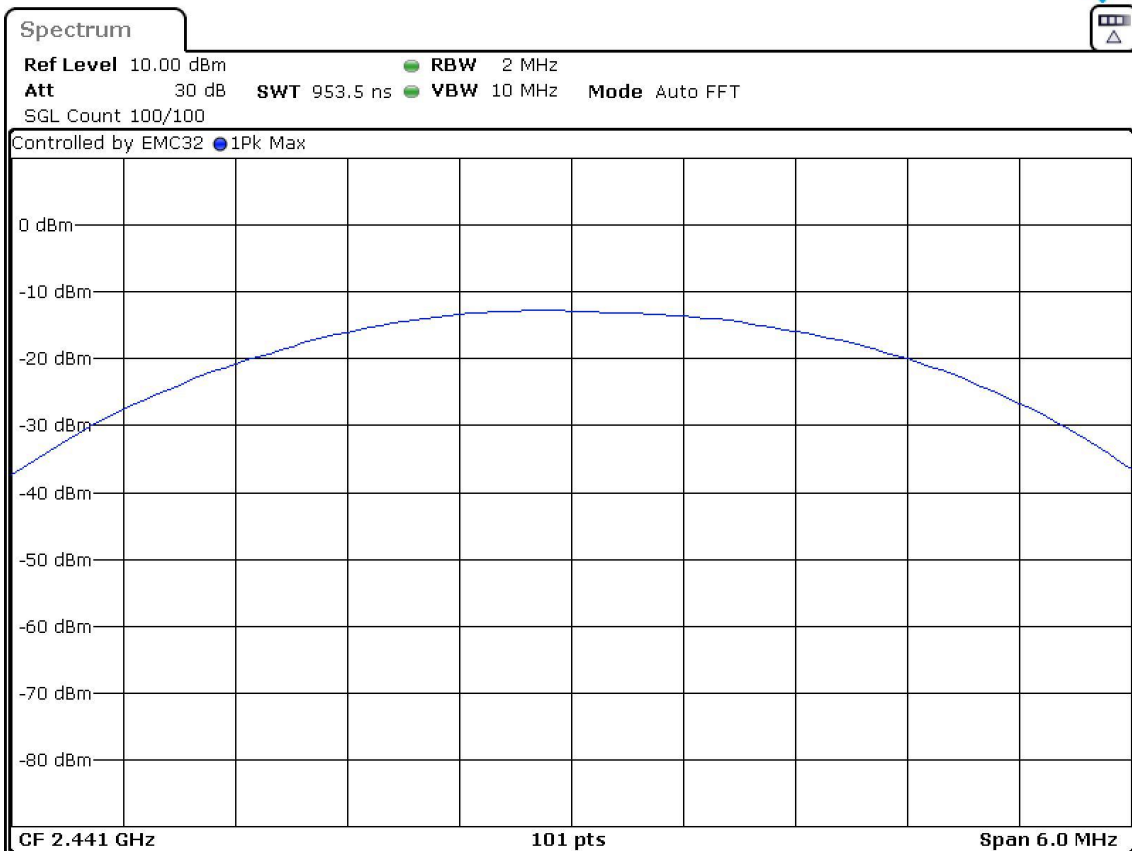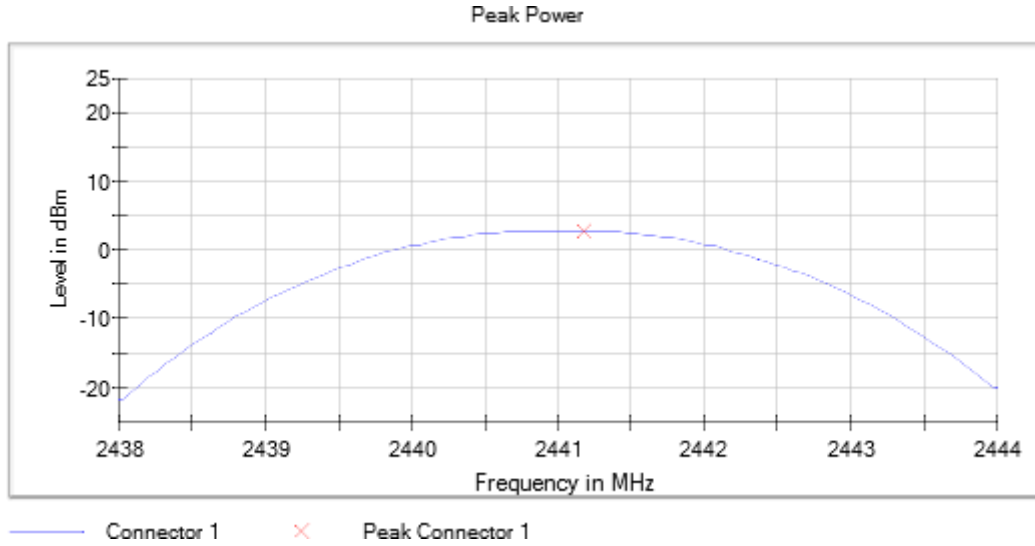



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2480.00000
 MIMO Mode = SISO Active Port = 1

Images:

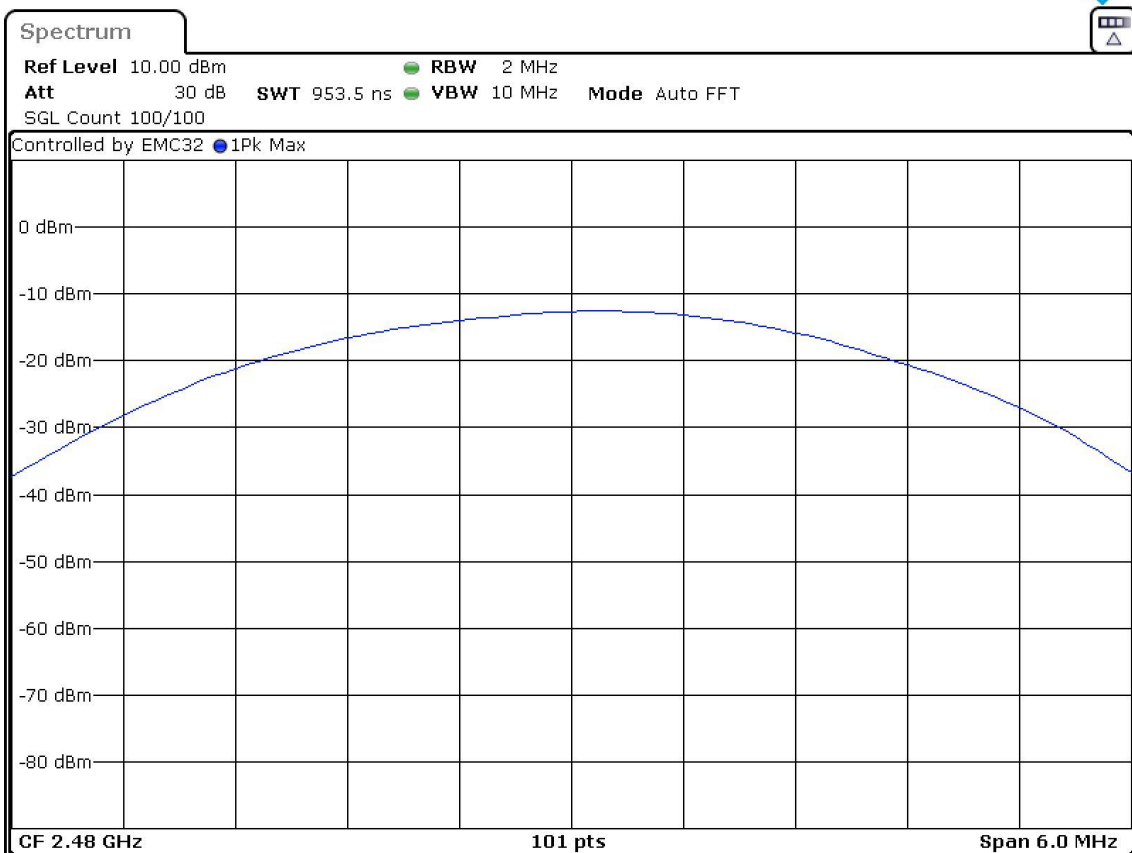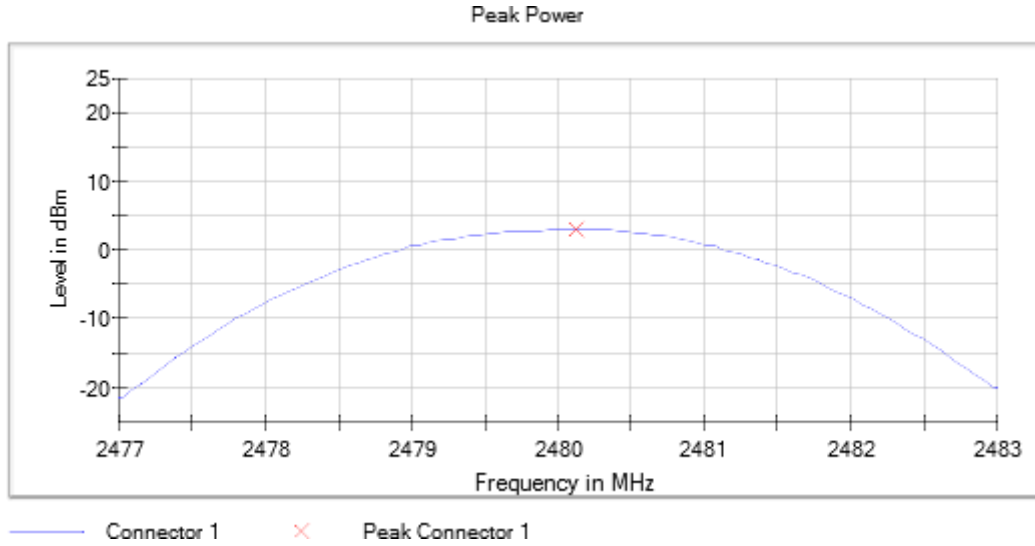



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000
 MIMO Mode = SISO Active Port = 1

Images:

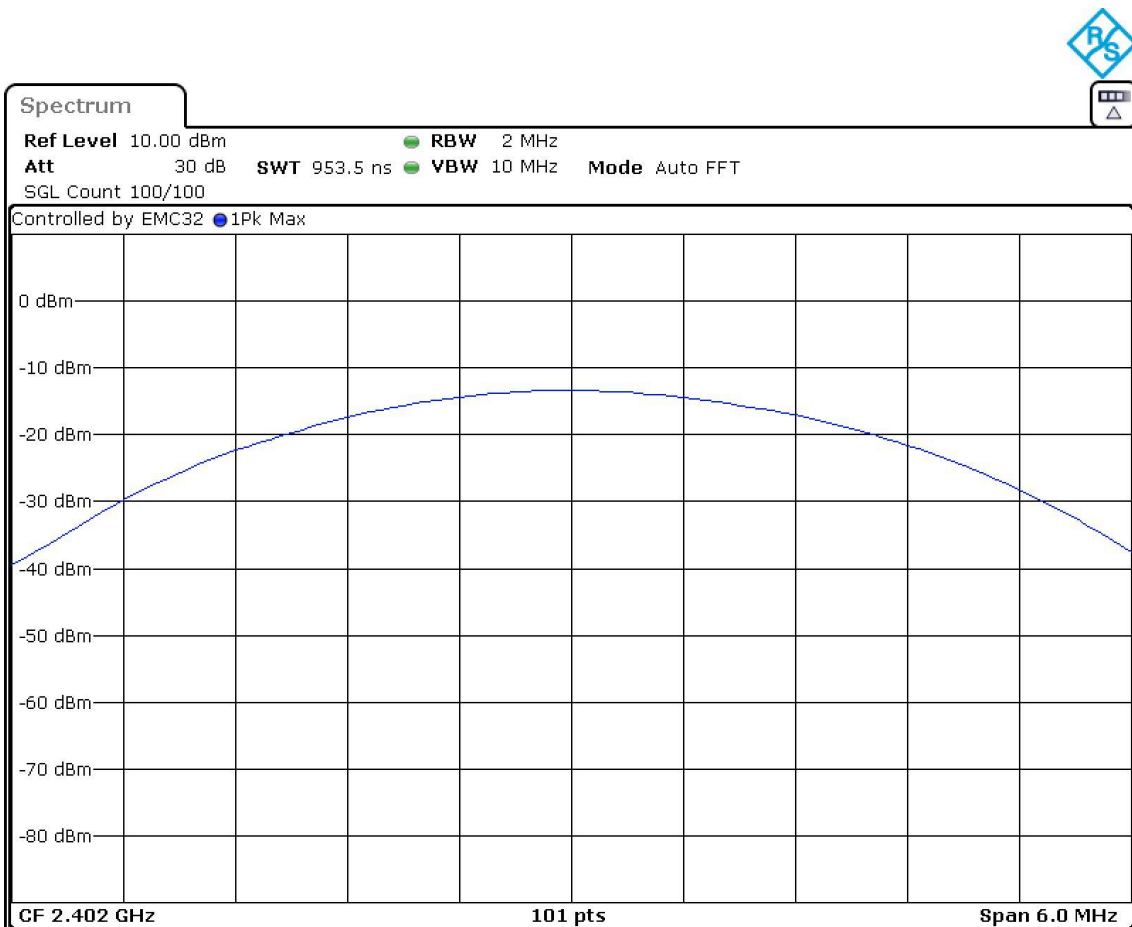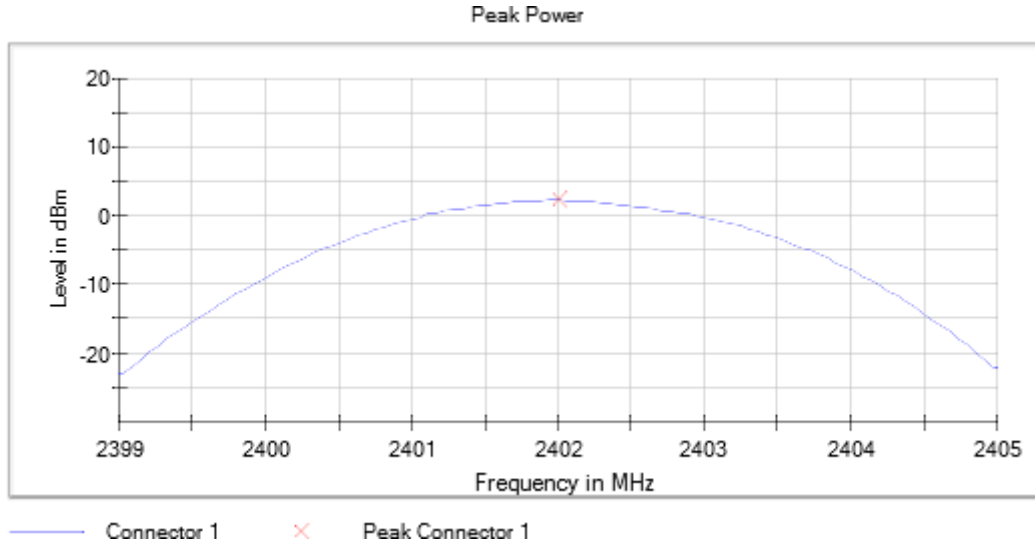



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2441.00000
 MIMO Mode = SISO Active Port = 1

Images:

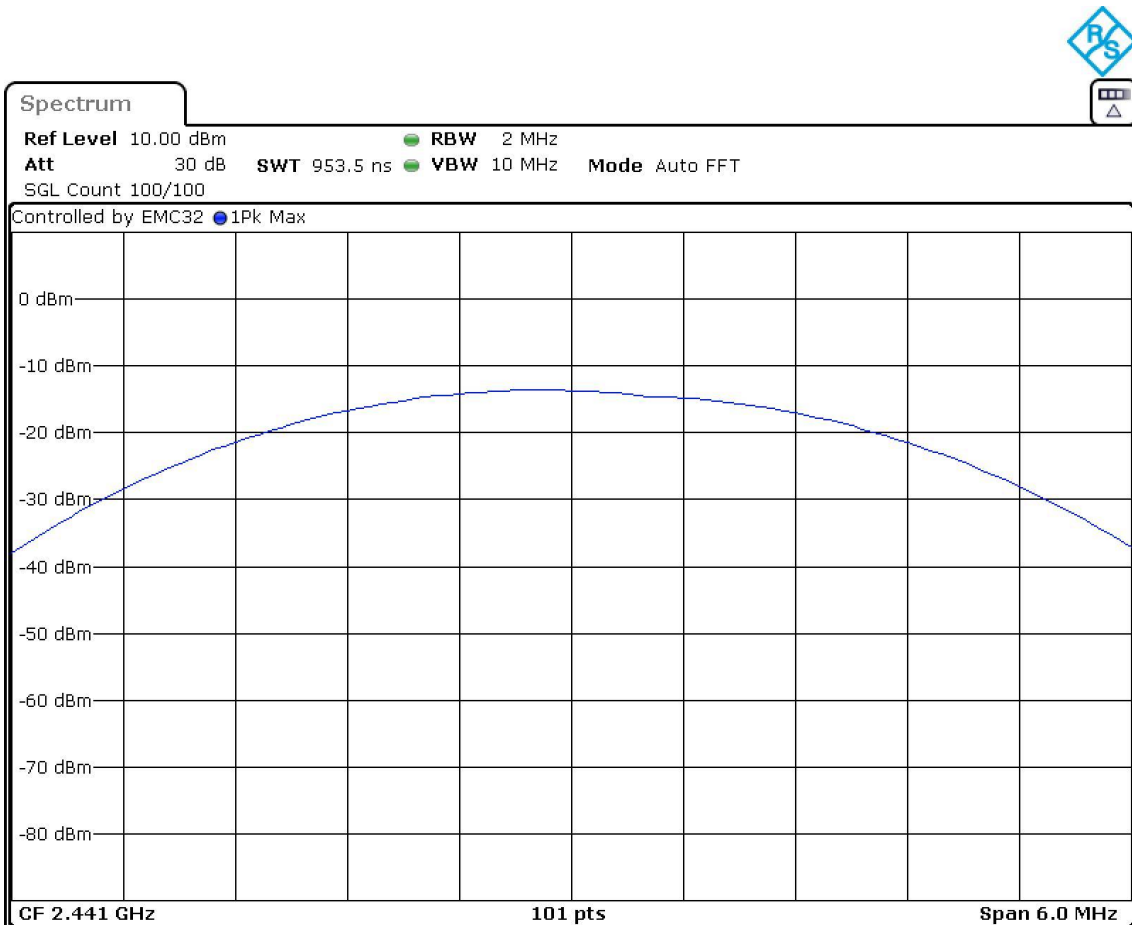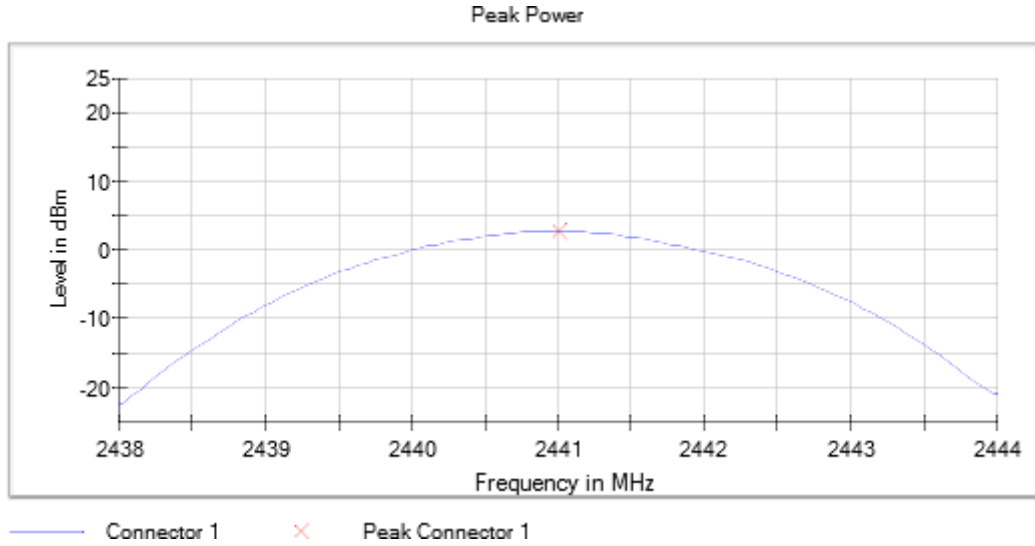

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000
 MIMO Mode = SISO Active Port = 1

Images:

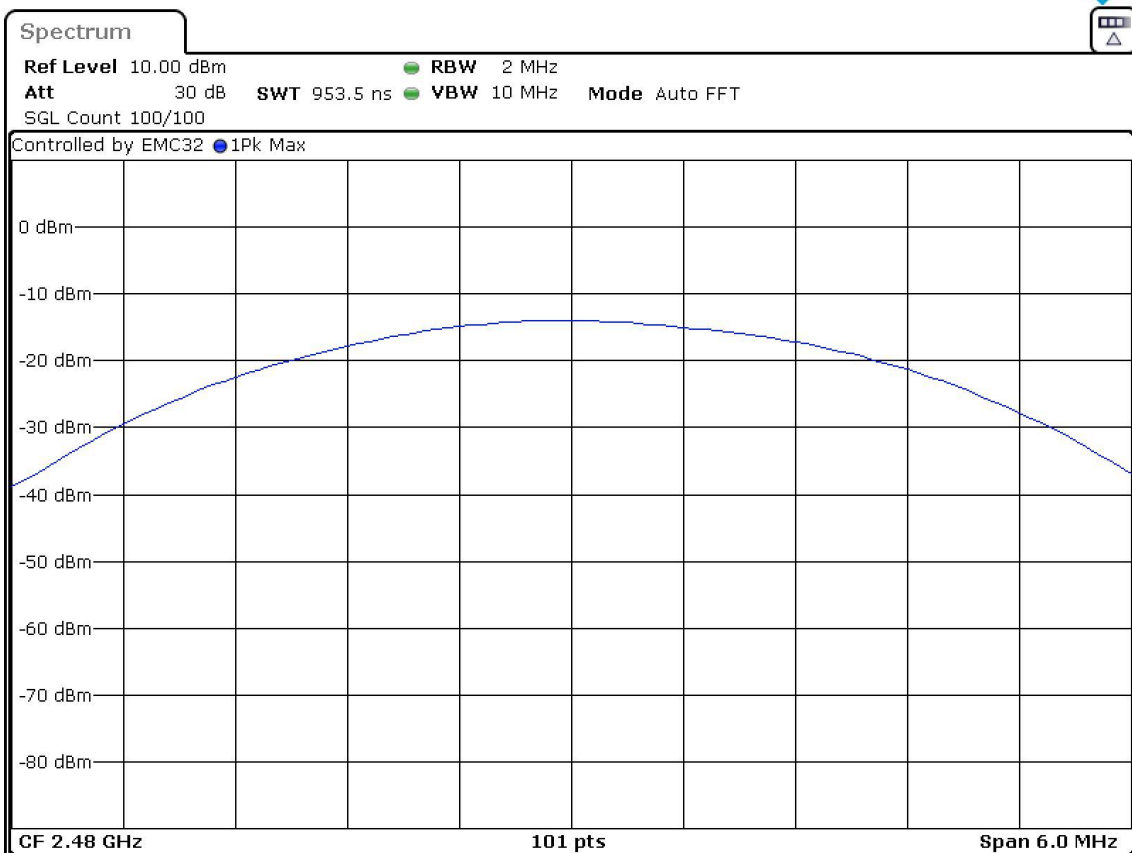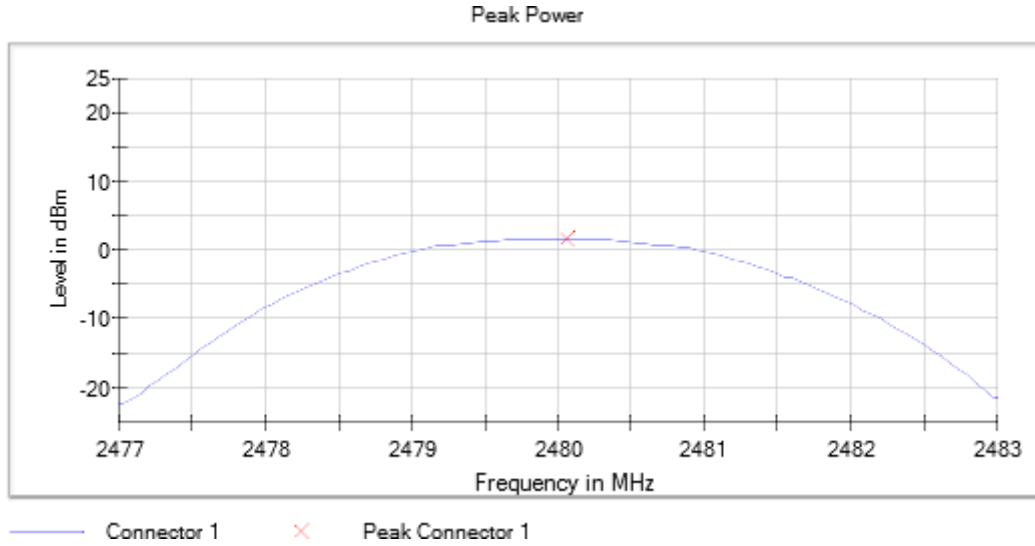

RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter)

Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.


Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (GFSK 1-DH5) Frequency MHz = Hopping ON
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

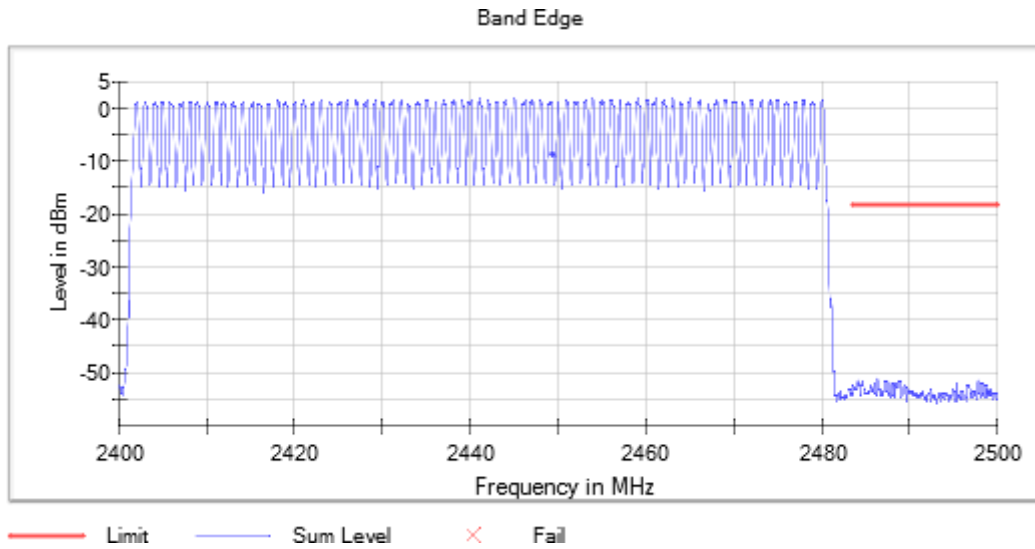

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	101 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (GFSK 1-DH5) Frequency MHz = Hopping ON
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

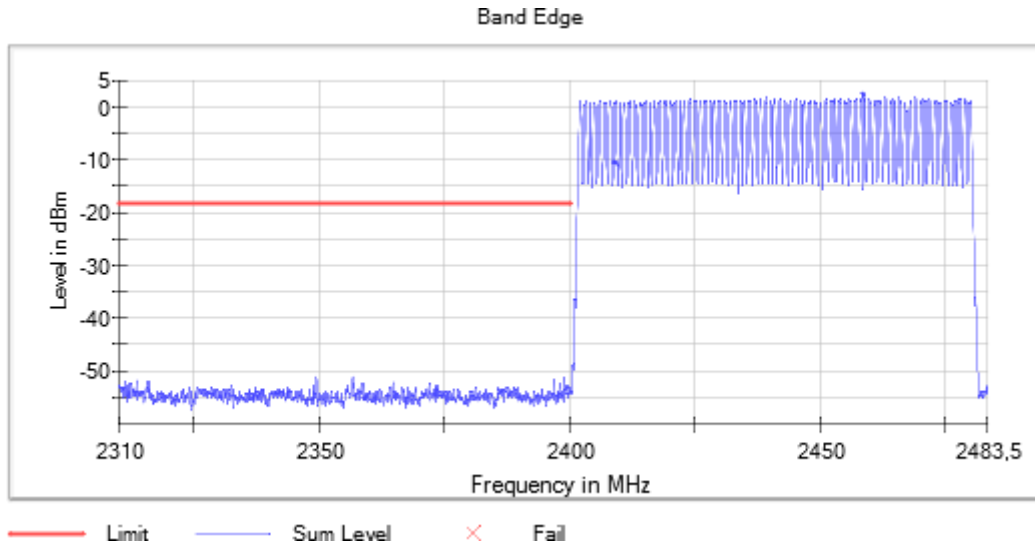

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	101 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (GFSK 1-DH5), Hopping Mode OFF Frequency MHz = 2402.00000
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

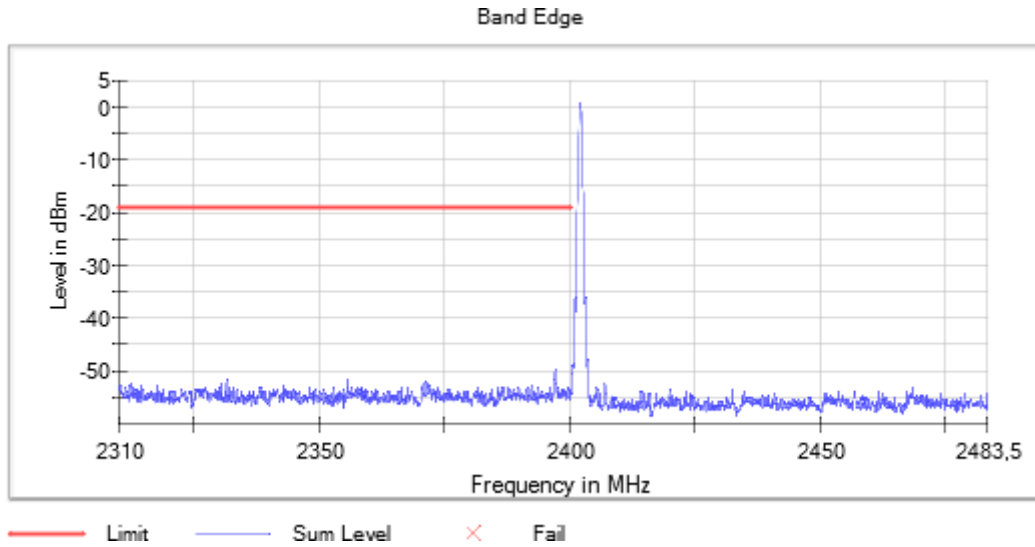

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	101 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (GFSK 1-DH5), Hopping Mode OFF Frequency MHz = 2480.00000
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

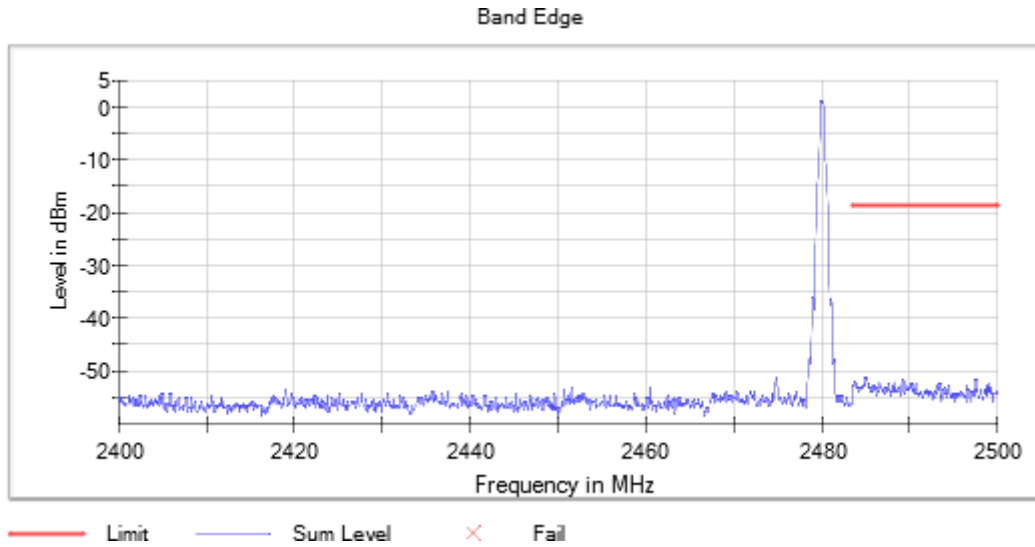

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	101 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = Hopping ON
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

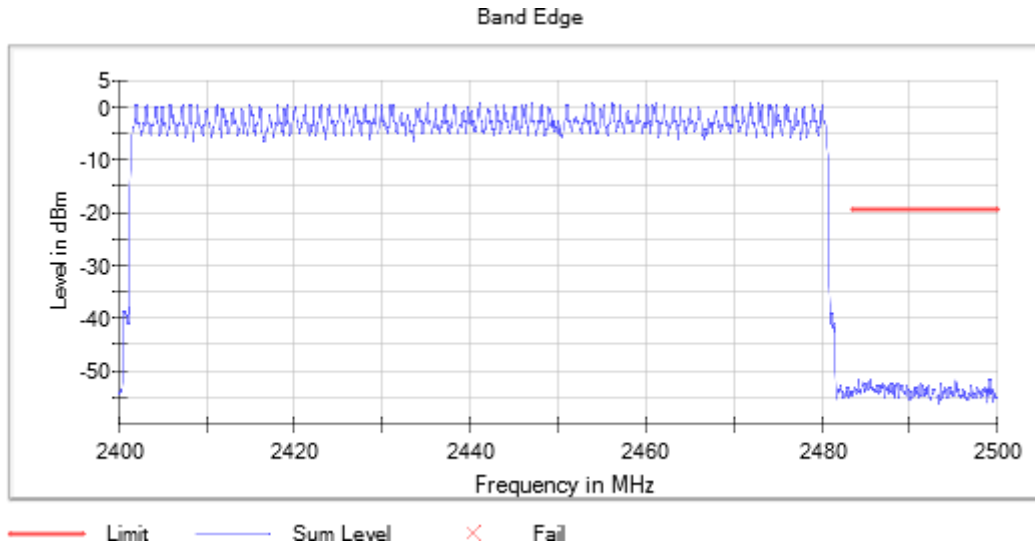

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	145 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = Hopping ON
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

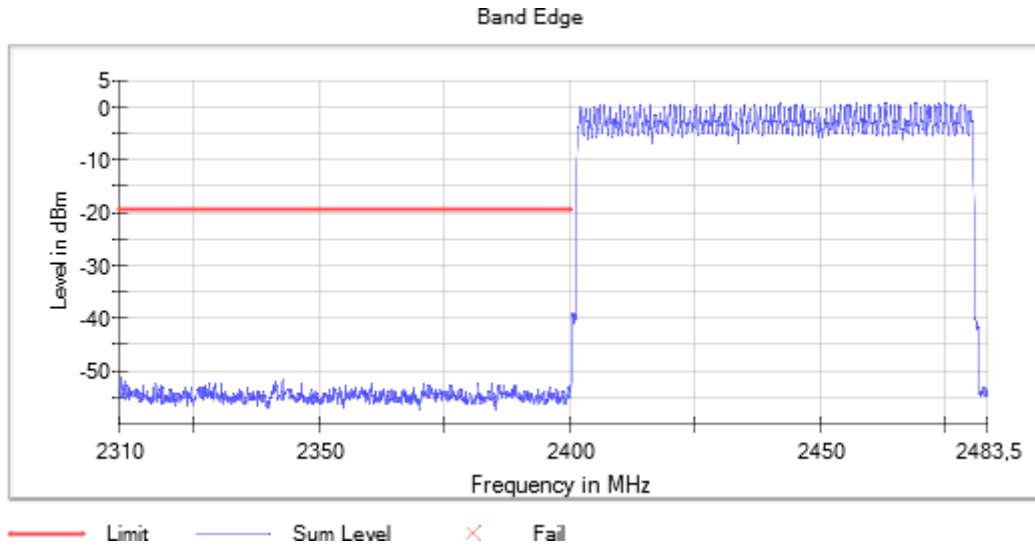

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	145 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5), Hopping Mode OFF Frequency MHz = 2402.00000
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

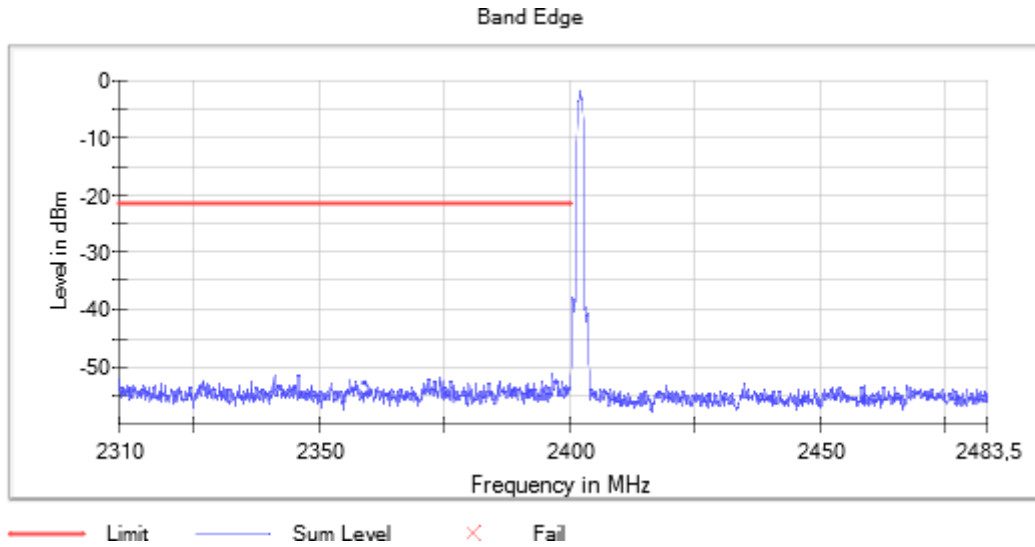

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	145 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (Pi/4 DQPSK 2-DH5), Hopping Mode OFF Frequency MHz = 2480.00000
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

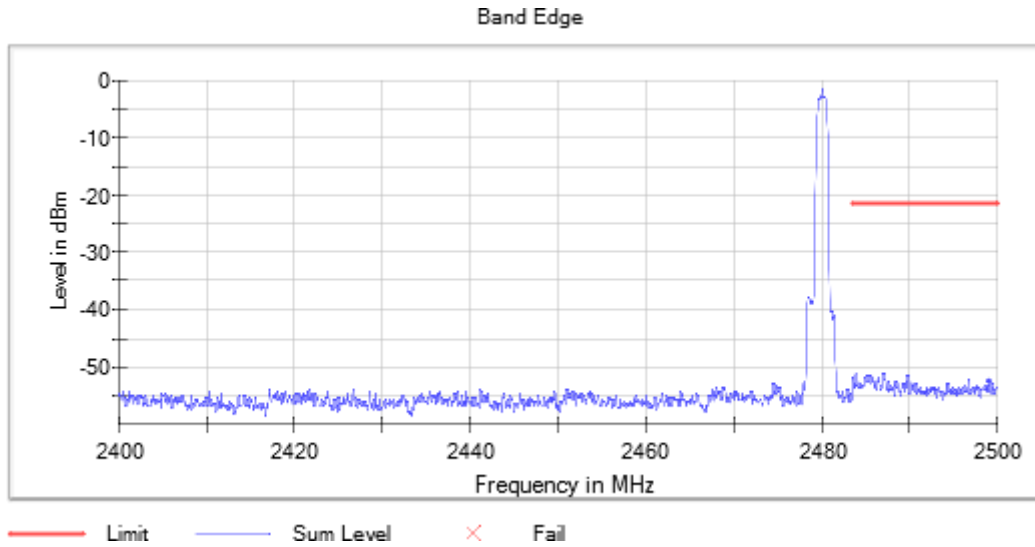

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	145 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) Frequency MHz = Hopping ON
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

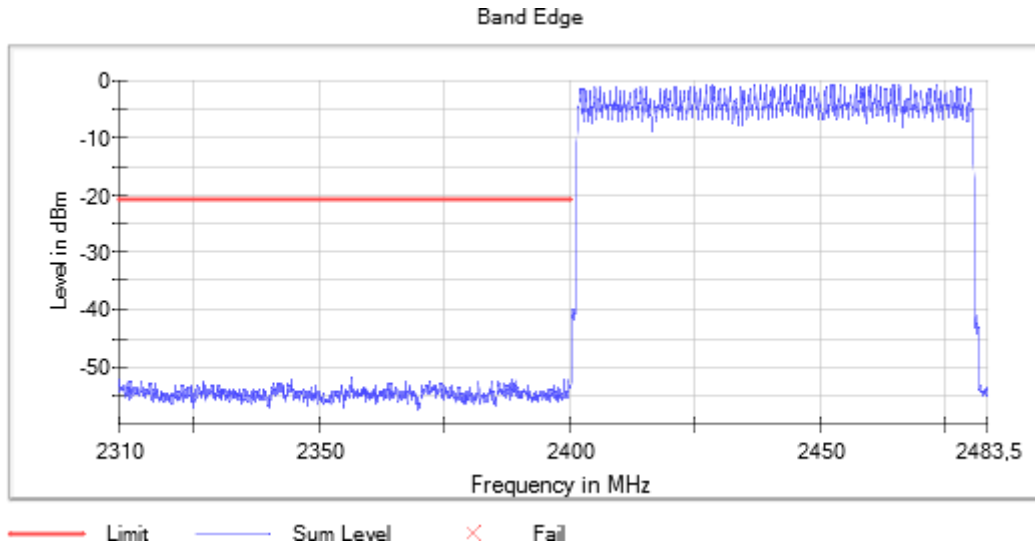

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	150 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5) Frequency MHz = Hopping ON
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

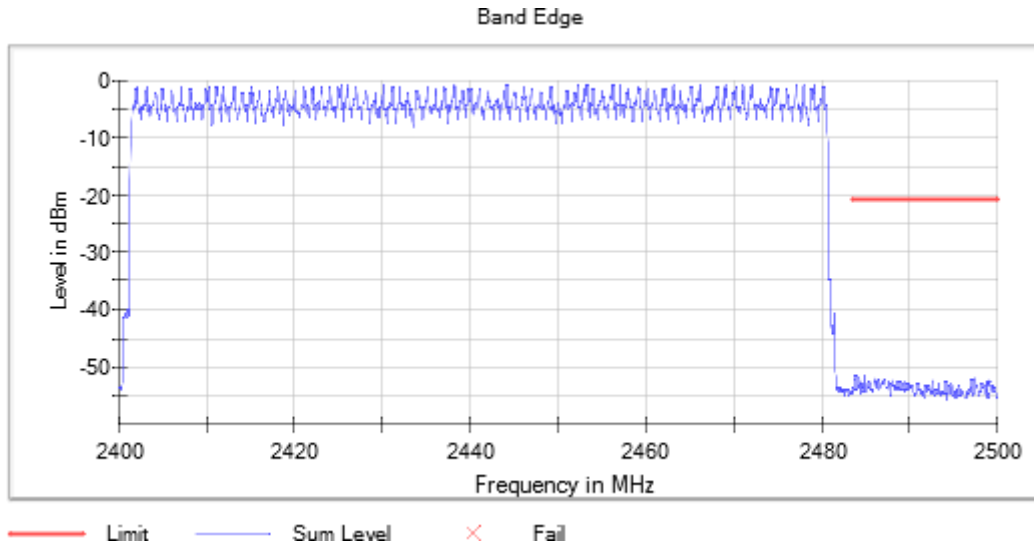

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	150 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5), Hopping Mode OFF Frequency MHz = 2402.00000
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

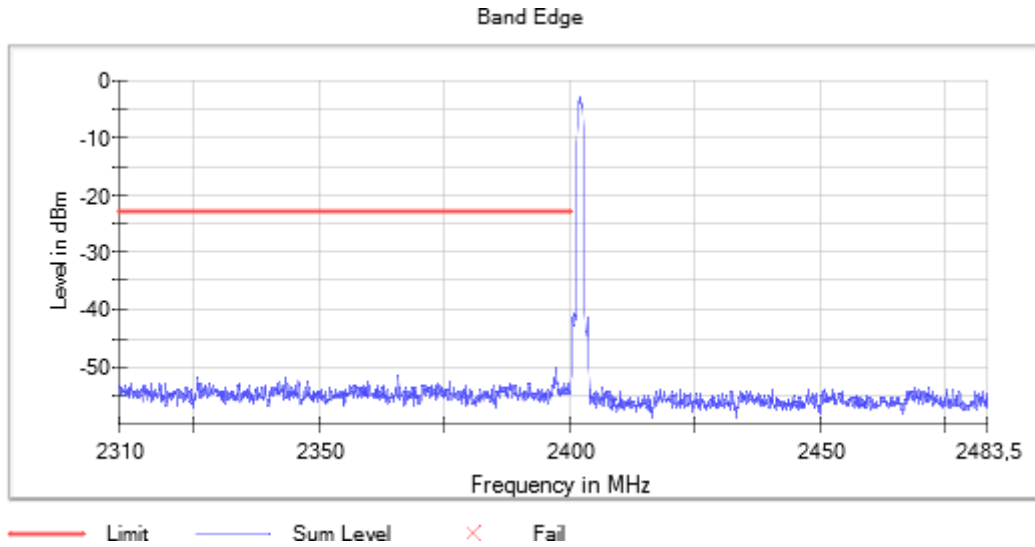

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	150 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (8DPSK 3-DH5), Hopping Mode OFF Frequency MHz = 2480.00000
 MIMO Mode = SISO Measurement Point = 1
 Active Port = 1

Images:

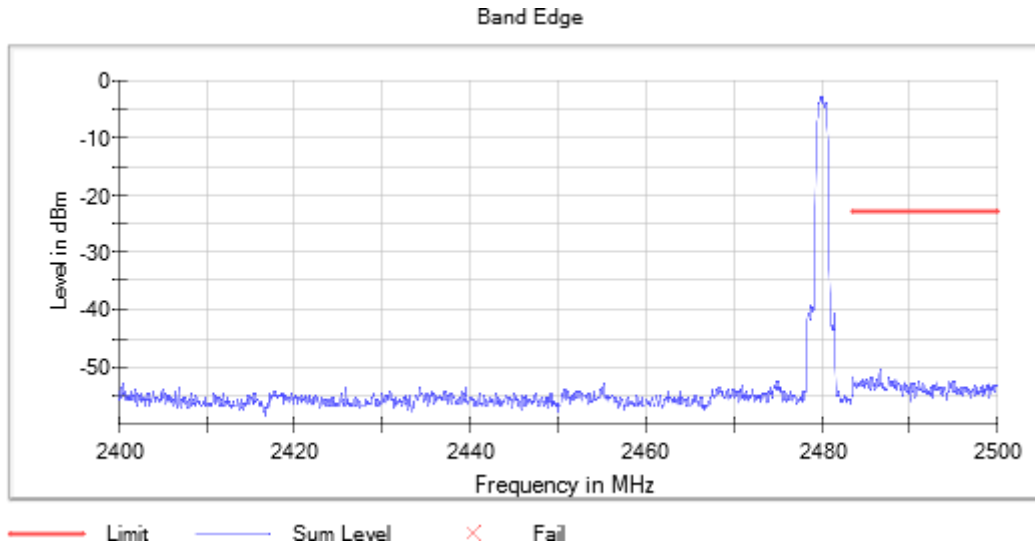

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	150 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

FCC 15.247 (d) / RSS-247 5.5 Emission limitations radiated (Transmitter)

Limits

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	-	300
0.490 - 1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table, specified when measuring with peak detector function.

RSS-247:

Attenuation below the general field strength limits specified in RSS-Gen is not required.

Results

The field strength is calculated by adding a correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss, pre-amplifiers gain and the distance correction factor for measurements above 17 GHz performed at 1.5-meter distance.

Frequency range 30 MHz - 1 GHz:

The spurious frequencies detected below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious frequencies at less than 20 dB below the limit:

Spurious frequency (MHz)	Emission Level ($\text{dB}\mu\text{V/m}$)	Polarization	Detector
46.035313	34.13	V	Quasi-peak
124.999375	27.54	V	Quasi-peak

Frequency range 1 - 26 GHz:

The results below show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Spurious frequencies with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

- **GFSK modulation (DH5):**

- Low Channel. Spurious frequencies closest to the limit:

Spurious frequency (MHz)	Emission Level (dB μ V/m)	Polarization	Detector
1535.261539	52.85	V	Peak

- Middle Channel. Spurious frequencies closest to the limit:

Spurious frequency (MHz)	Emission Level (dB μ V/m)	Polarization	Detector
1535.384615	54.52	H	Peak
	44.29		Average

- High Channel. Spurious frequencies closest to the limit:

Spurious frequency (MHz)	Emission Level (dB μ V/m)	Polarization	Detector
1535.015385	53.04	H	Peak

- **Pi/4-DQPSK modulation (2-DH5):**

- Low Channel. Spurious frequencies closest to the limit:

Spurious frequency (MHz)	Emission Level (dB μ V/m)	Polarization	Detector
1446.061539	53.79	V	Peak

- Middle Channel. Spurious frequencies closest to the limit:

Spurious frequency (MHz)	Emission Level (dB μ V/m)	Polarization	Detector
1535.384615	54.52	H	Peak
	42.64		Average

- High Channel. No spurious frequencies at less than 20 dB of the limit:

• **8-DPSK modulation (3-DH5):**

- Low Channel. No spurious frequencies found close to the limit.
- Middle Channel. Spurious frequencies closest to the limit:

Spurious frequency (MHz)	Emission Level (dB μ V/m)	Polarization	Detector
1535.292308	52.96	H	Peak

- High Channel. Spurious frequencies closest to the limit:

Spurious frequency (MHz)	Emission Level (dB μ V/m)	Polarization	Detector
1535.753846	54.52	V	Peak
	47.05		Average

Verdict

Pass

Attachments

Measurement settings:

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	30.312 kHz	PK+	100 kHz	1 s	0 dB
1 GHz - 3 GHz	30.769 kHz	PK+ ; AVG	1 MHz	1 s	0 dB
3 GHz - 17 GHz	140 kHz	PK+ ; AVG	1 MHz	1 s	0 dB
17 GHz - 26 GHz	300 kHz	PK+ ; AVG	1 MHz	1 s	0 dB