

CU21007 *Preliminary Product Specification Rev.04*

For Antenova					
Author	Signature	Date	Approved by	Signature	Date
Steve Bradburn	Stl/Man	23-MAR-2023			

For Leica			
	Approved by	Signature	Date



TABLE OF CONTENTS

TABLE OF CONTENTS	2
1. PART NUMBER	3
2. GENERAL DATA	3
3. RF CHARACTERISTICS SUMMARY	3
4. RF PERFORMANCE	4
4.1 Return Loss	4
4.2 Antenna Efficiency	4
4.3 Radiation Pattern	
5. ANTENNA DIMENSIONS	6
6. ELECTRICAL INTERFACE	7
7. HAZARDOUS MATERIAL REGULATION CONFORMANCE	7
8. STATEMENT ON INTELLECTUAL PROPERTY & DISCLAIMER	7

1. PART NUMBER

Antenova Part number

antenova®

CU21007

Leica Part number

957303

2. GENERAL DATA

Frequency	2.4-2.5GHZ	
Polarisation	Linear	
Operating Temperature	-40 to +85°C	
Impedance	50Ω	
Weight	<2g	
Antenna Type	FPC with UFL connector (I-PEX 20279-001E-03)	
Antenna Dimensions	30.0x6.0x1.35 mm	


3. RF CHARACTERISTICS SUMMARY

	2400-2500MHz
Return Loss	-5.1dB
Efficiency (Min)	20%
Efficiency (Avg)	25%
Gain (Peak)	2.8dBi
Gain (Avg)	-6.0dBi


4. RF PERFORMANCE



4.1 Return Loss

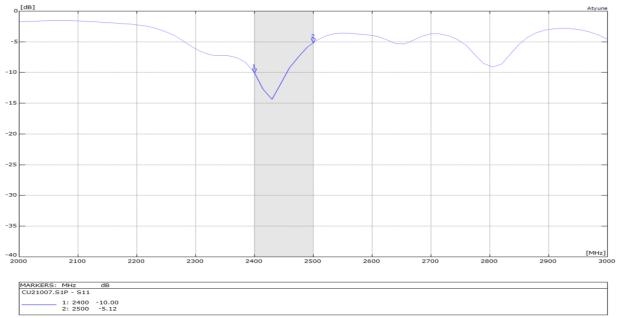


4.2 Antenna Efficiency

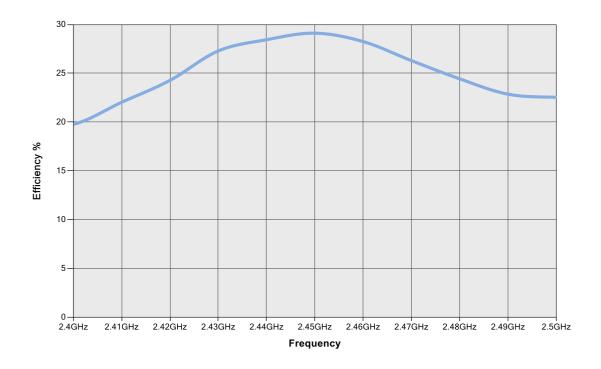



Page 4 of 7 CONFIDENTIALITY STATEMENT All the information contained in this document is commercially confidential and must not be copied or disclosed without the written consent of Antenova Ltd. Copyright © Antenova Ltd. 2021

antenova®

4.3 Radiation Pattern







Page 5 of 7 CONFIDENTIALITY STATEMENT All the information contained in this document is commercially confidential and must not be copied or disclosed without the written consent of Antenova Ltd. Copyright © Antenova Ltd. 2021

antenova®

5. ANTENNA DIMENSIONS

L	w	н
Length	Width	Height
30.0 ±0.1	6.0 ±0.1	1.35 nominal



All dimensions in mm

antenova

6. ELECTRICAL INTERFACE

The Host PCB should ensure that the transmission lines are designed to have a characteristic impedance of 50 Ω

• The length of the transmission lines should be kept to a minimum

- Any other parts of the RF system like transceivers, power amplifiers, etc., should also be designed to have an impedance of 50 Ω

Once the material for the PCB has been chosen (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the track so the characteristic impedance of the coplanar transmission line is 50Ω

7. HAZARDOUS MATERIAL REGULATION CONFORMANCE

Antenova's products conform to REACH and RoHS legislation worldwide. A certificate of conformance is available from Antenova's website.

8. STATEMENT ON INTELLECTUAL PROPERTY & DISCLAIMER

It is the policy of Antenova Ltd to file worldwide patents on all novel technology and exploitable ideas developed within the company. All information provided in this document is, and shall remain, the property of Antenova. Nothing herein shall be construed as granting or conferring any rights by license or otherwise in the Information except as expressly provided herein. A recipient acquires hereunder only a limited right to use the Information solely for the purpose of evaluation of the technology, subject to the terms and conditions set out in an associated Non Disclosure Agreement.

Disclaimer

Antenova accepts no responsibility for injury to the individual resulting from the use or misuse of this product.

End of Document