


**Carrier power (Field Strength)**

**FCC RULES PART 15, SUBPART C**


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 74  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.470GHz, Emax: 117.46dBµV/m, RBW: 100kHz

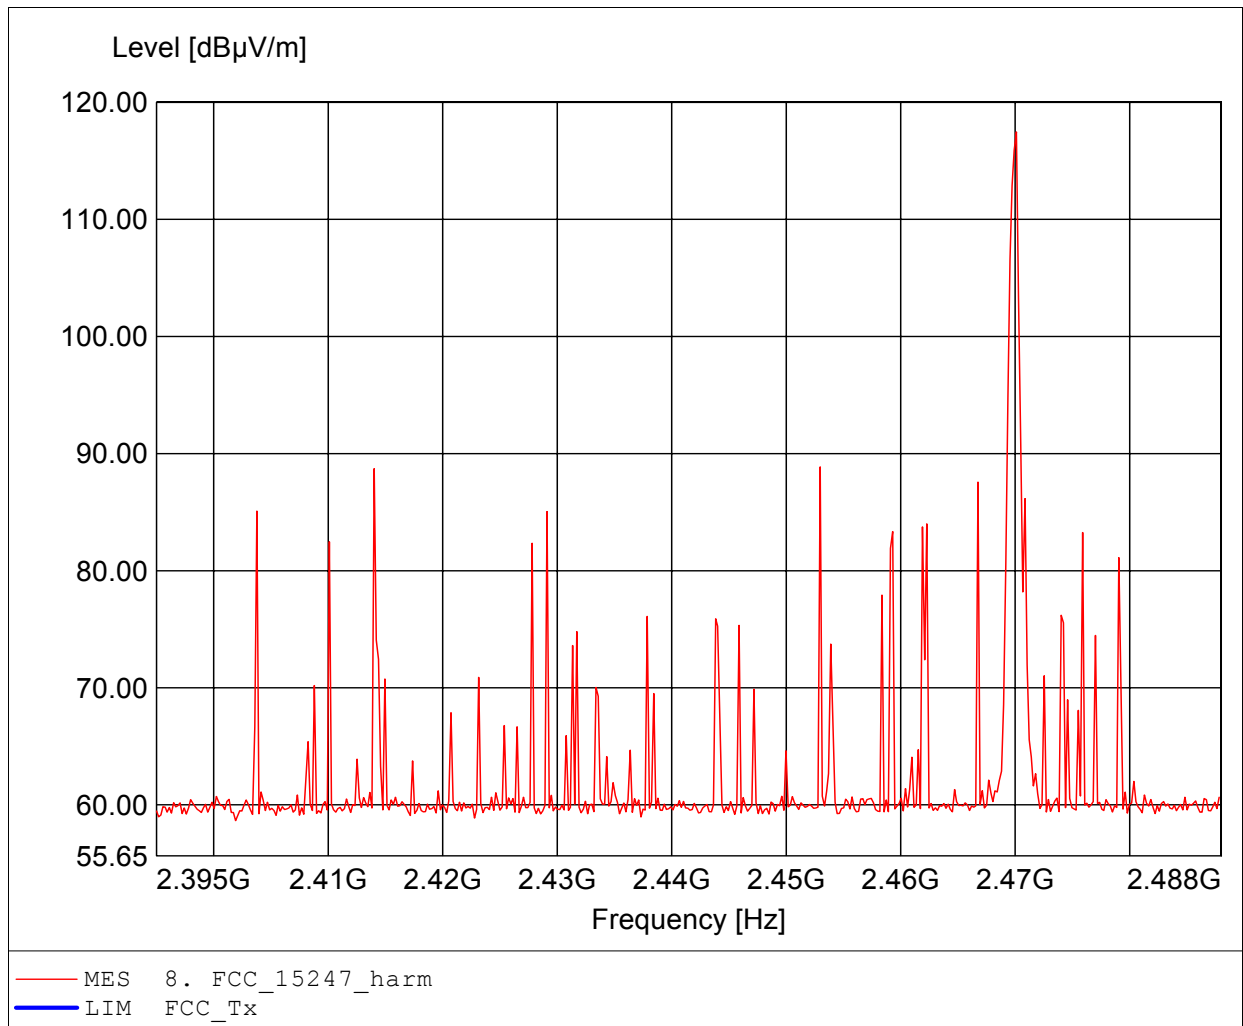

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 119.940MHz, Emax: 32.99dBµV/m, RBW: 100kHz

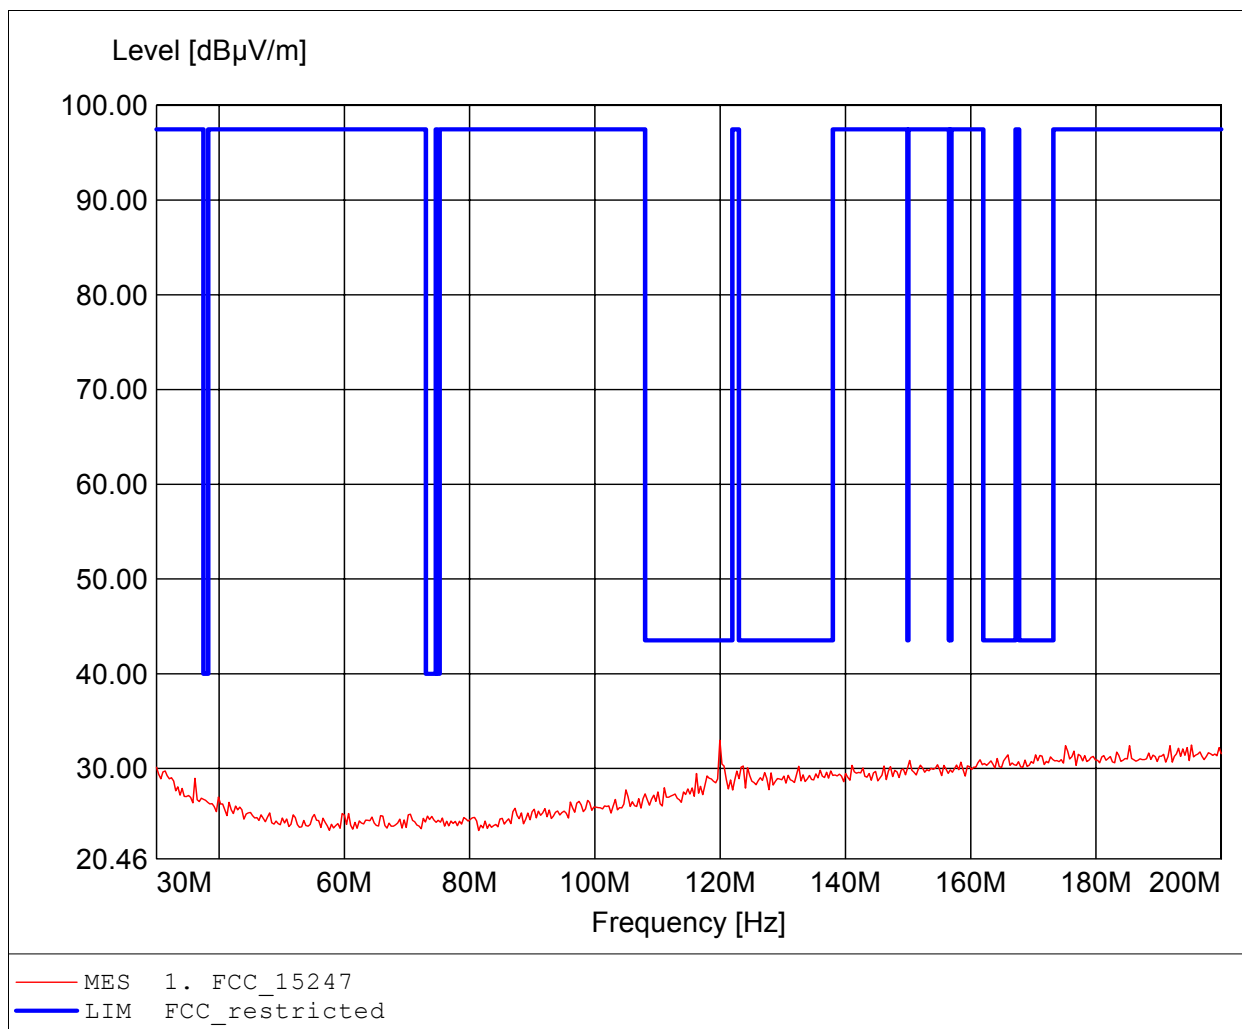

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 183.307MHz, Emax: 32.67dBµV/m, RBW: 100kHz

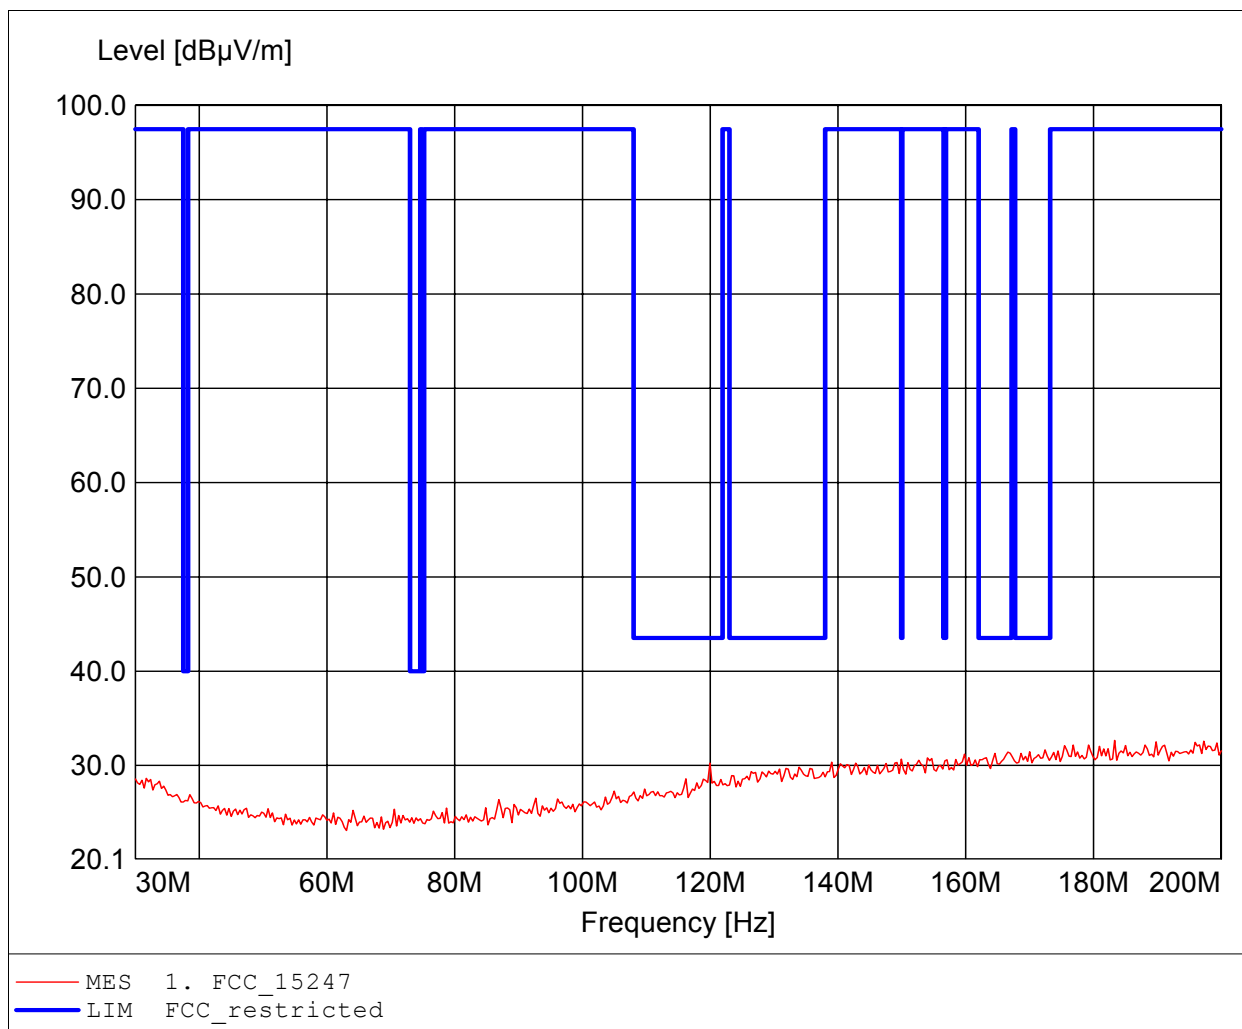

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 648.898MHz, Emax: 36.83dBµV/m, RBW: 100kHz

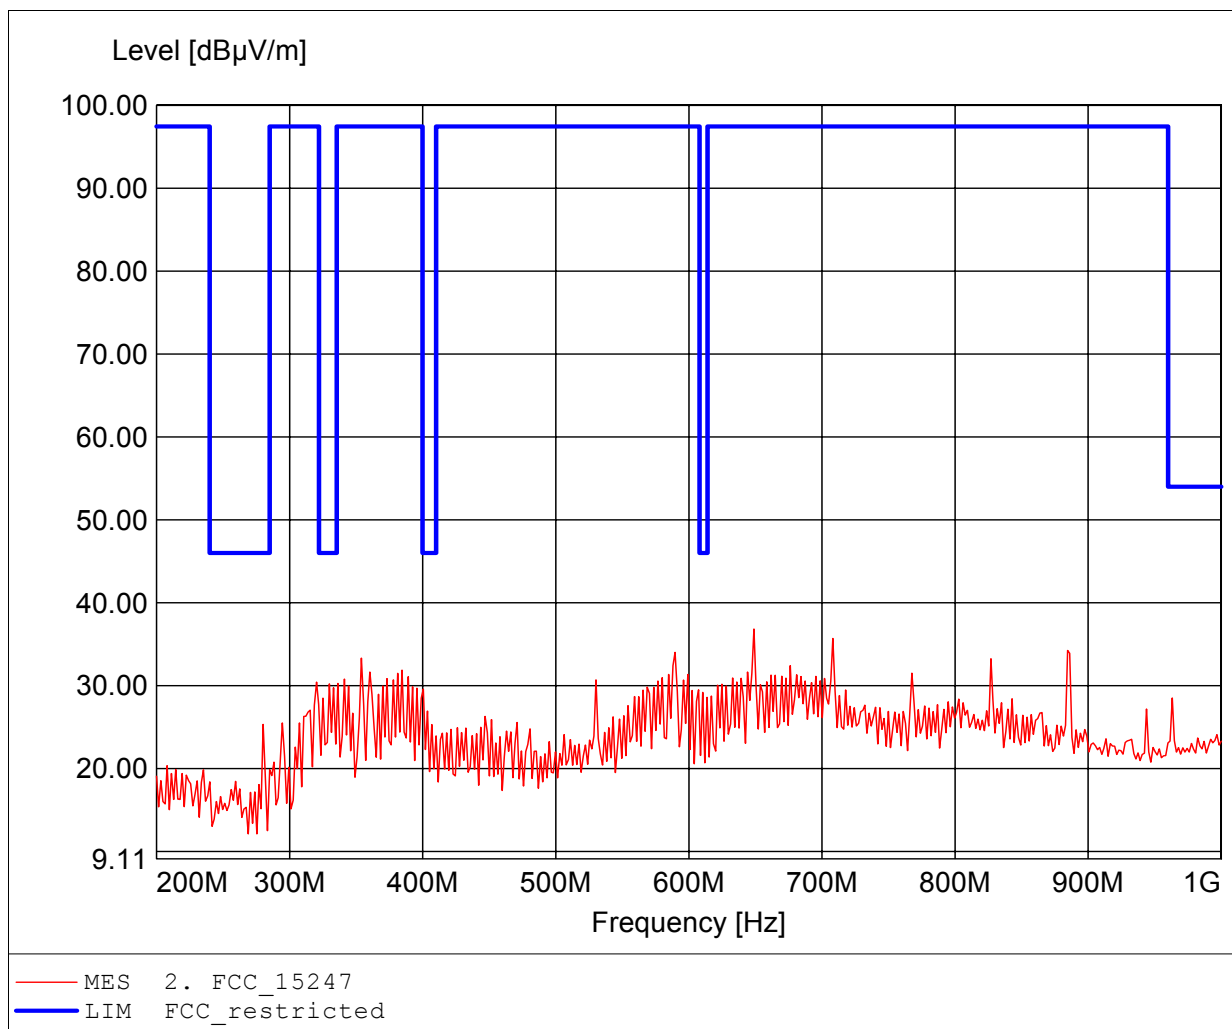

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 560.721MHz, Emax: 34.15dBµV/m, RBW: 100kHz

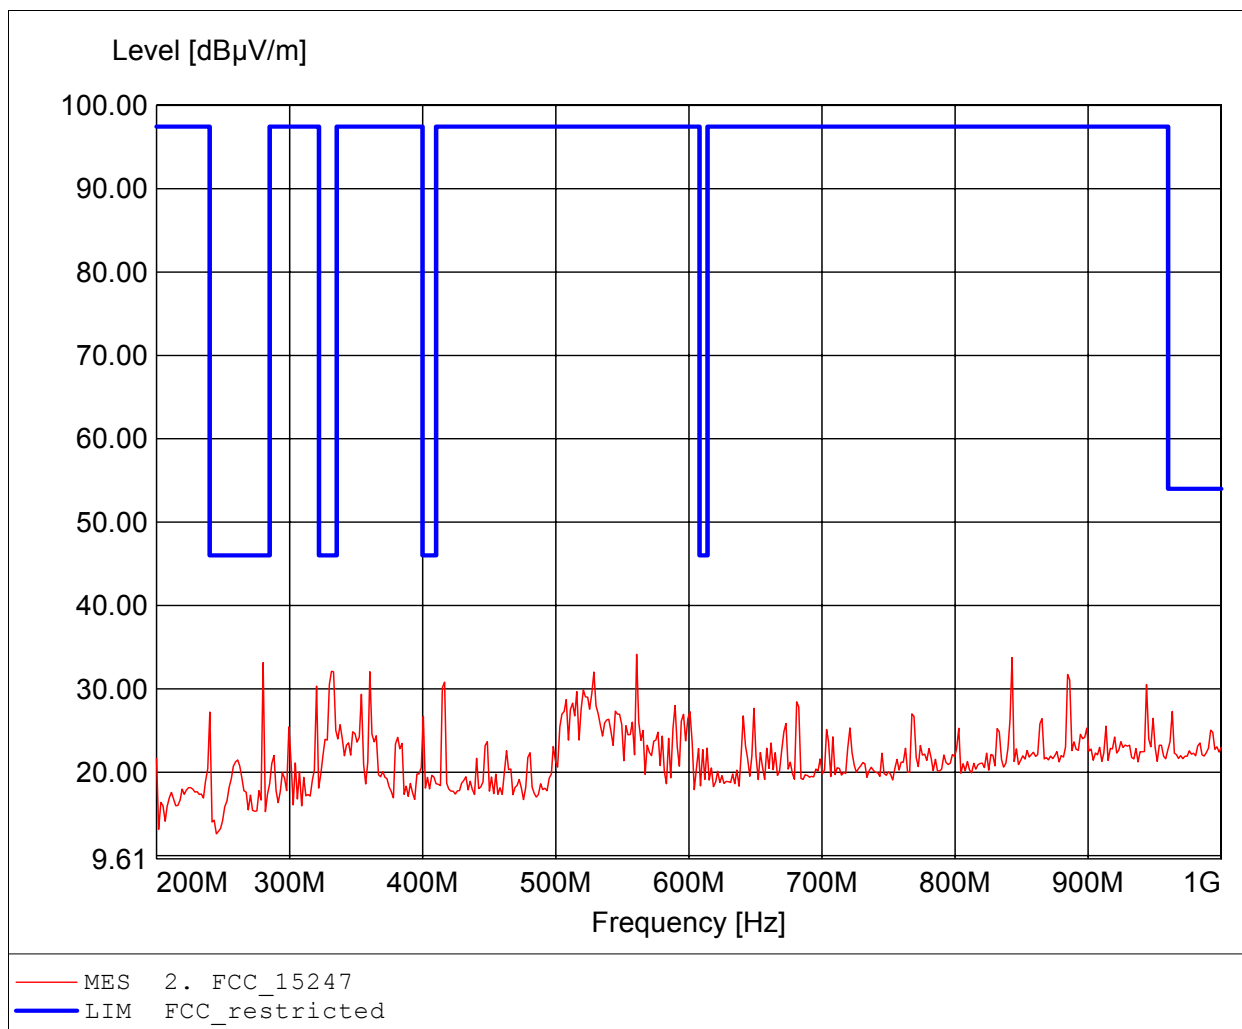

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.397GHz, Emax: 59.92dB $\mu$ V/m, RBW: 1MHz

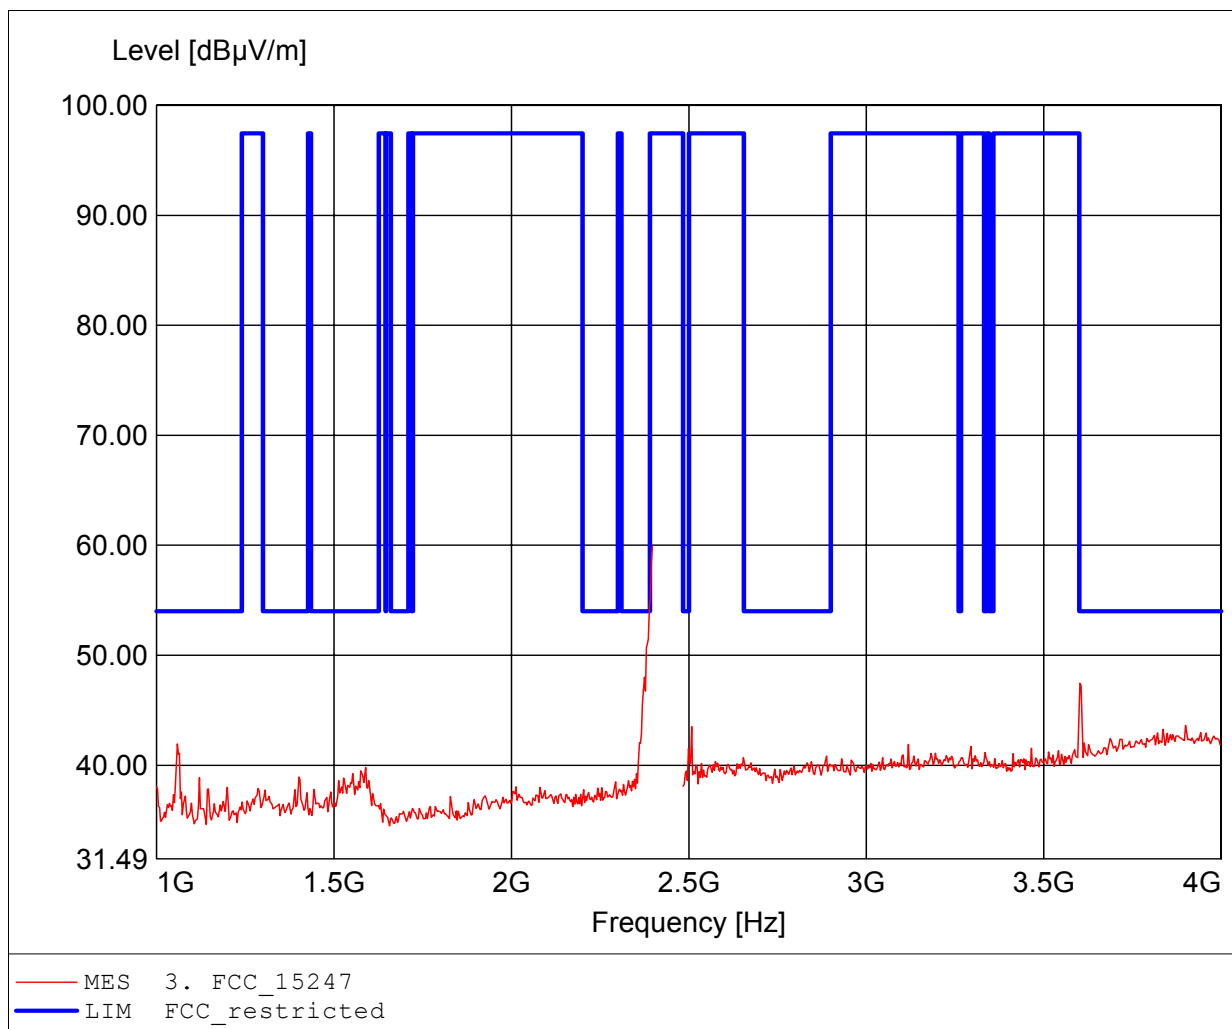

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 3.602GHz, Emax: 31.16dB $\mu$ V/m, RBW: 1MHz

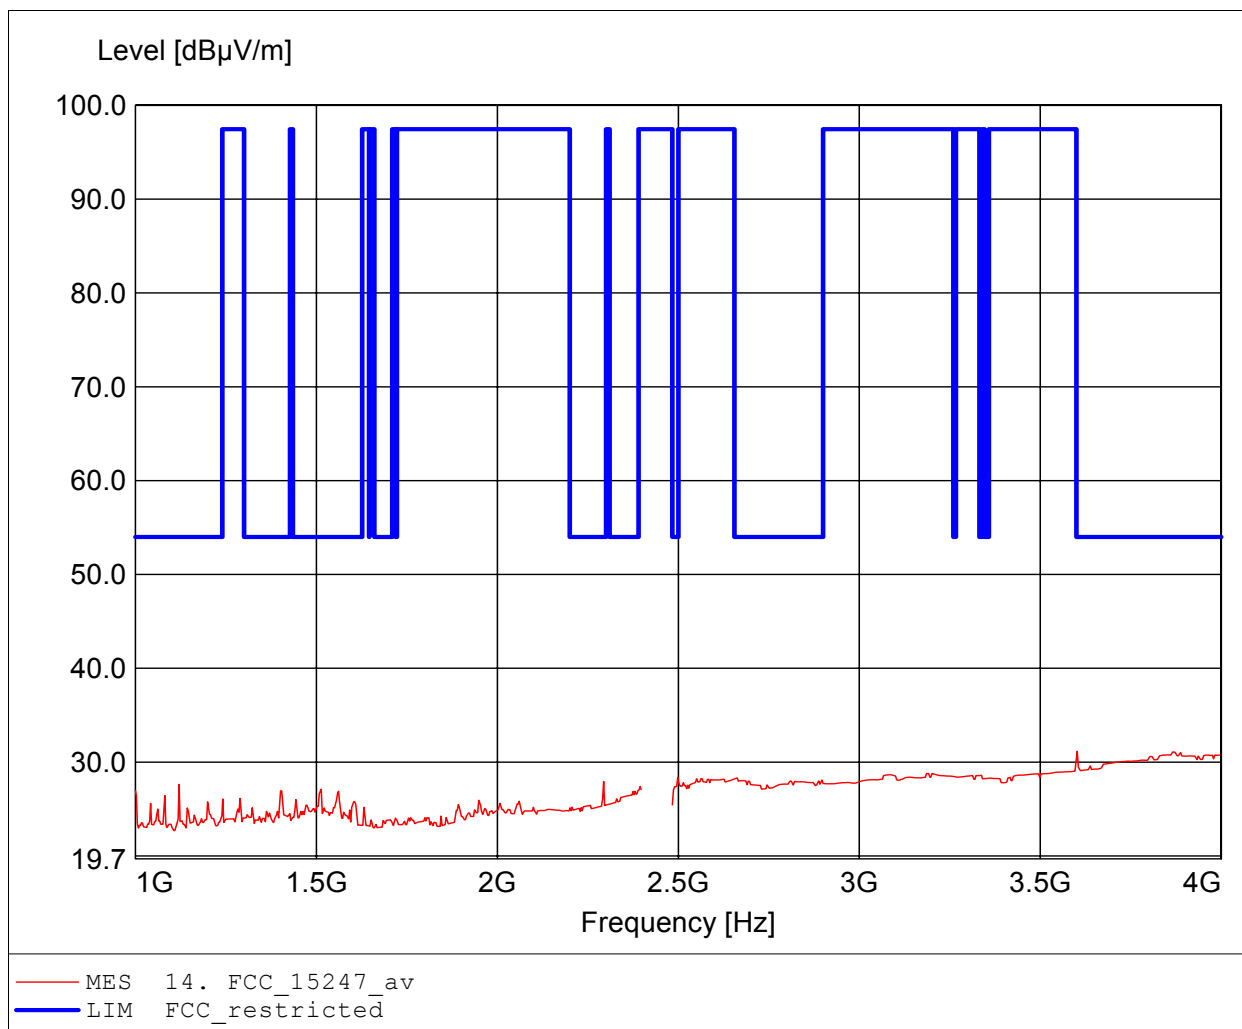

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.397GHz, Emax: 50.78dB $\mu$ V/m, RBW: 1MHz

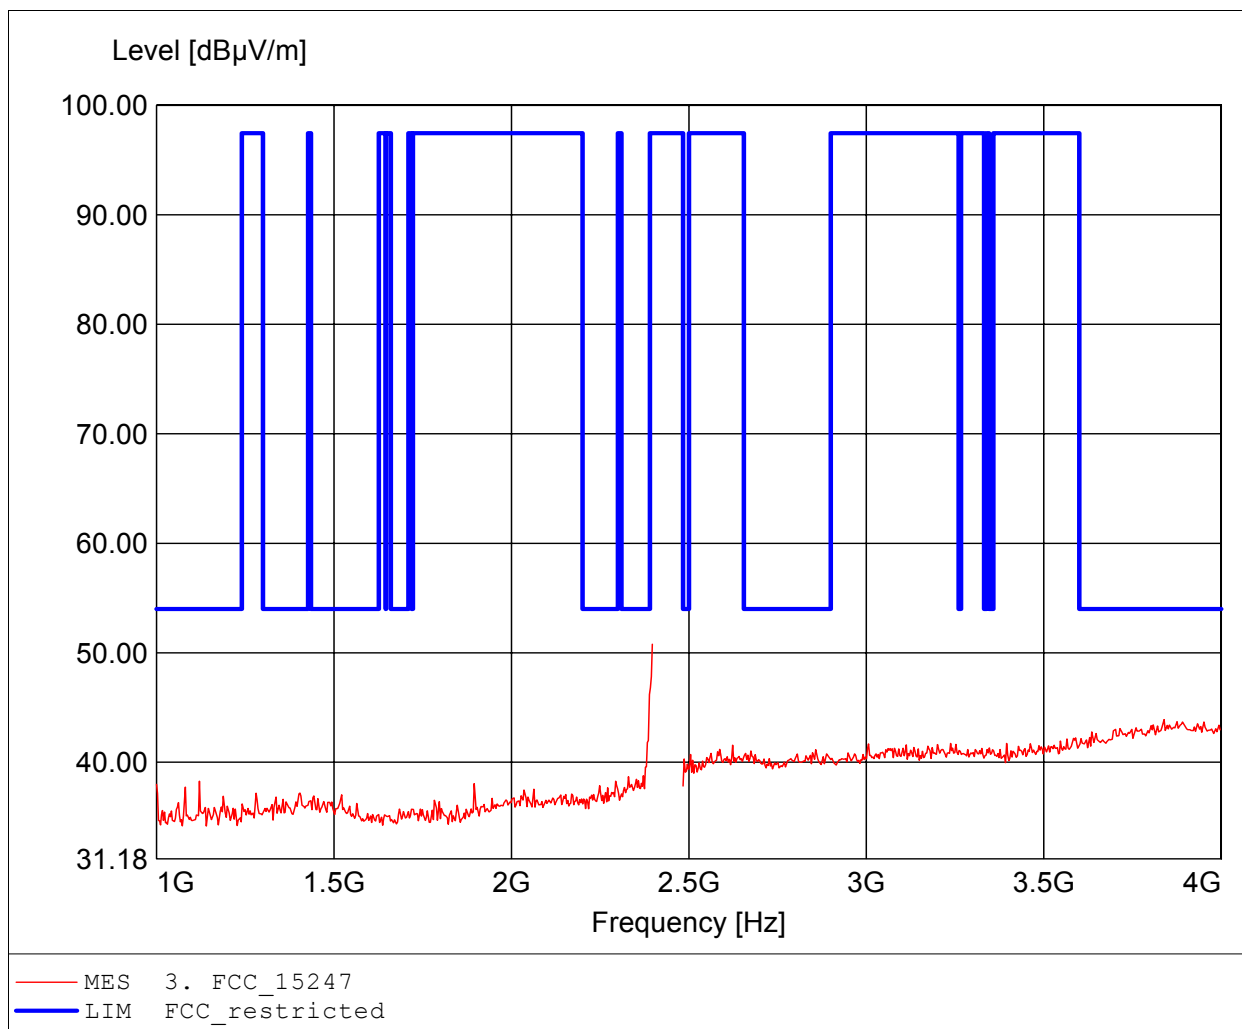




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 4.922GHz, Emax: 49.30dBµV/m, RBW: 1MHz

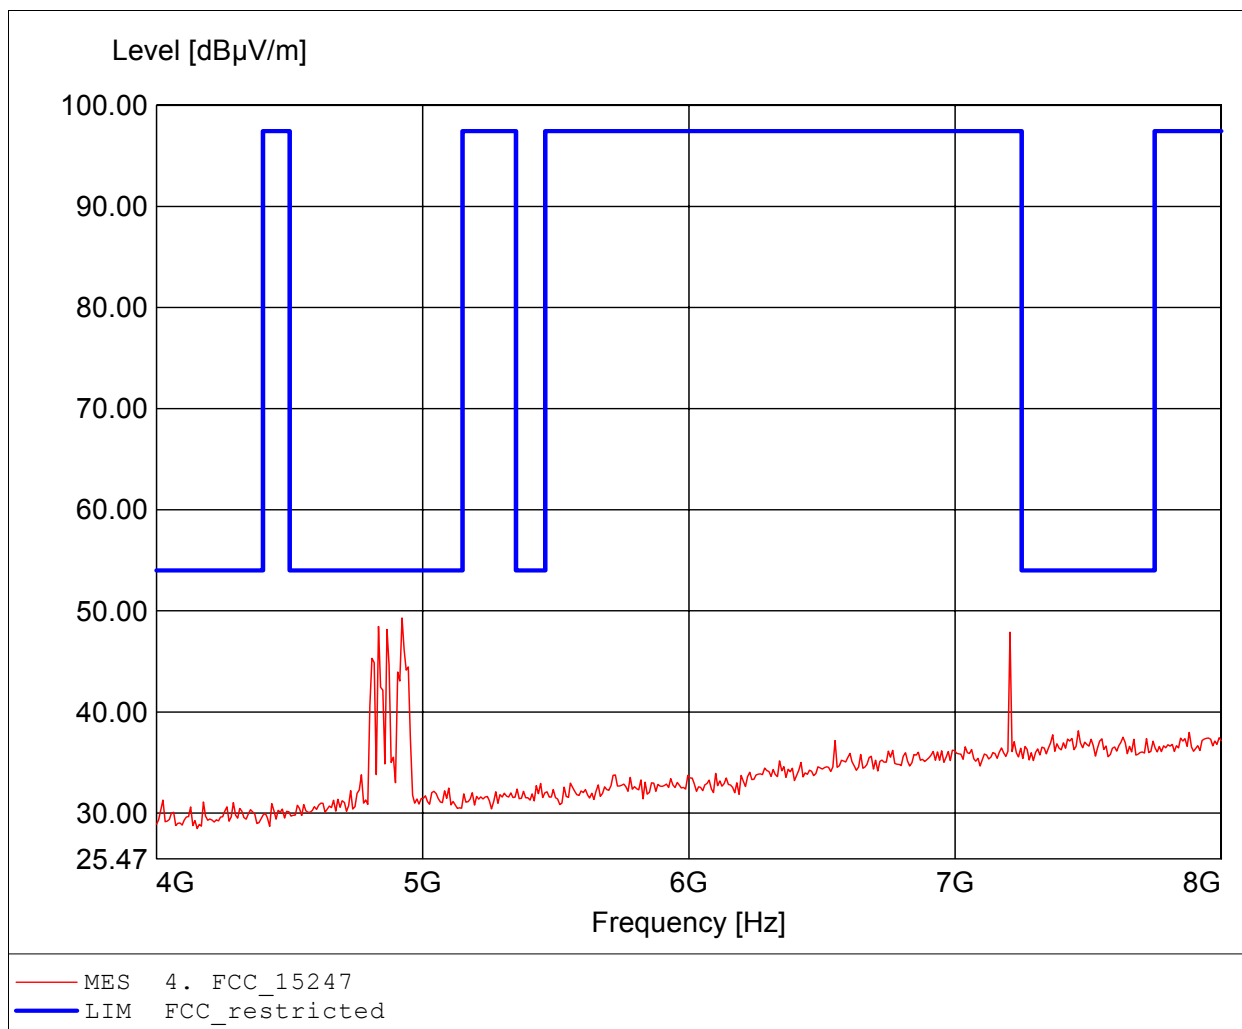

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.206GHz, Emax: 49.34dBuV/m, RBW: 1MHz

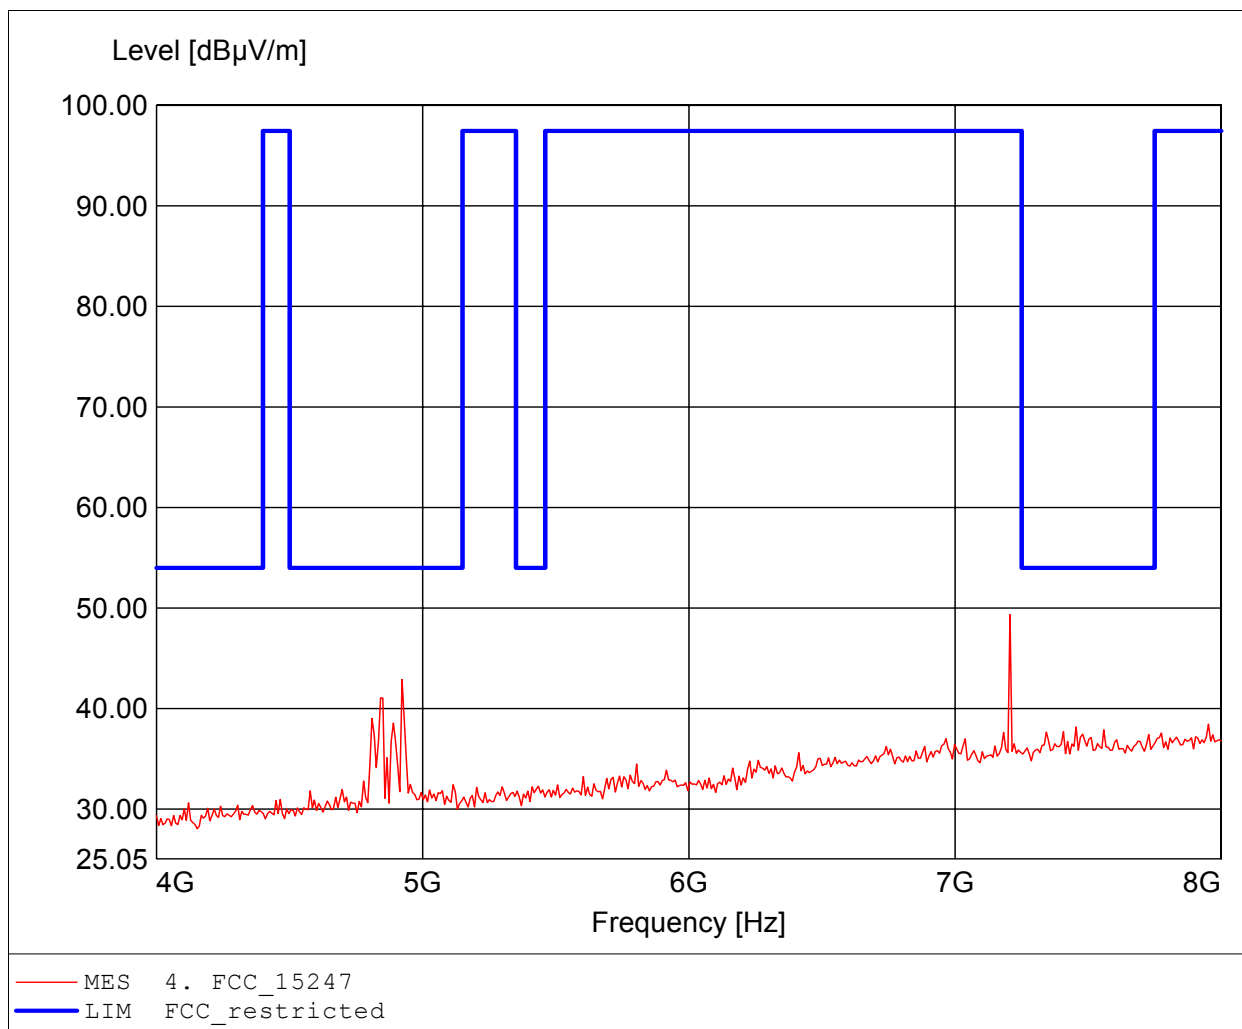

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 9.603GHz, Emax: 41.75dBµV/m, RBW: 1MHz

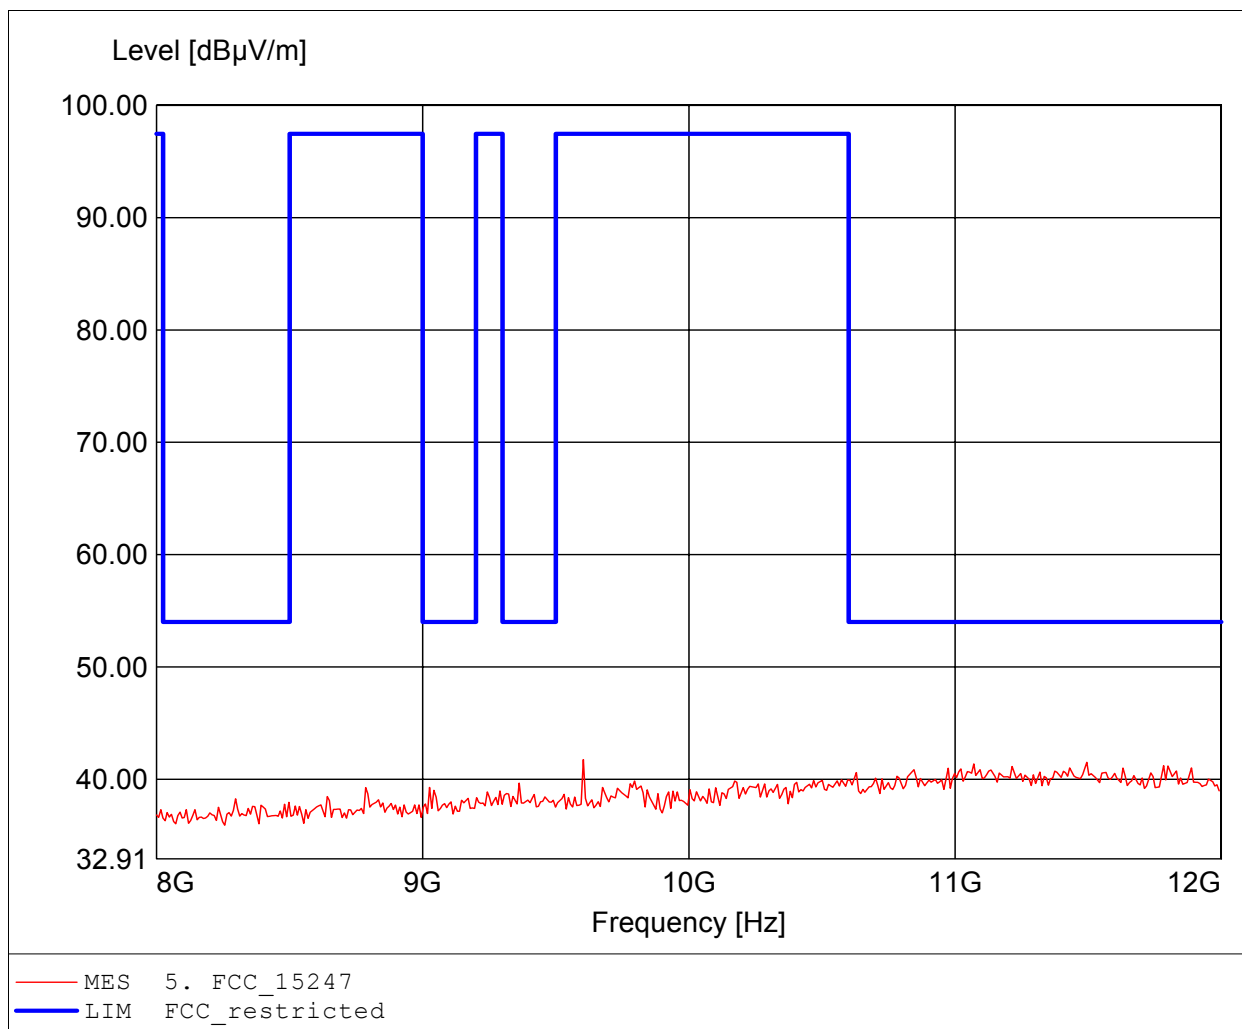

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.182GHz, Emax: 41.33dB $\mu$ V/m, RBW: 1MHz

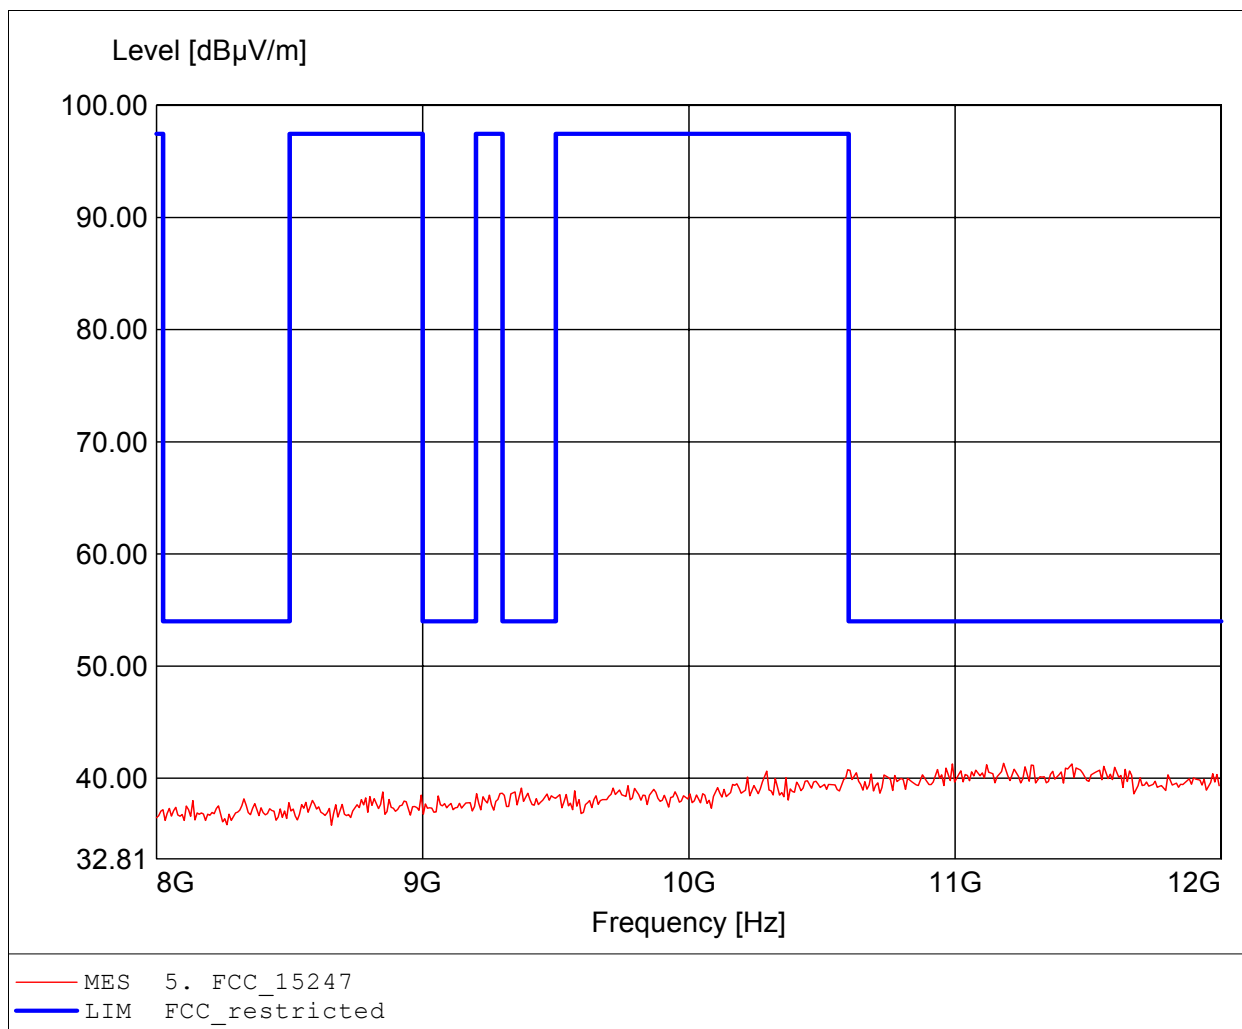

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 12.000GHz, Emax: 57.44dBµV/m, RBW: 1MHz

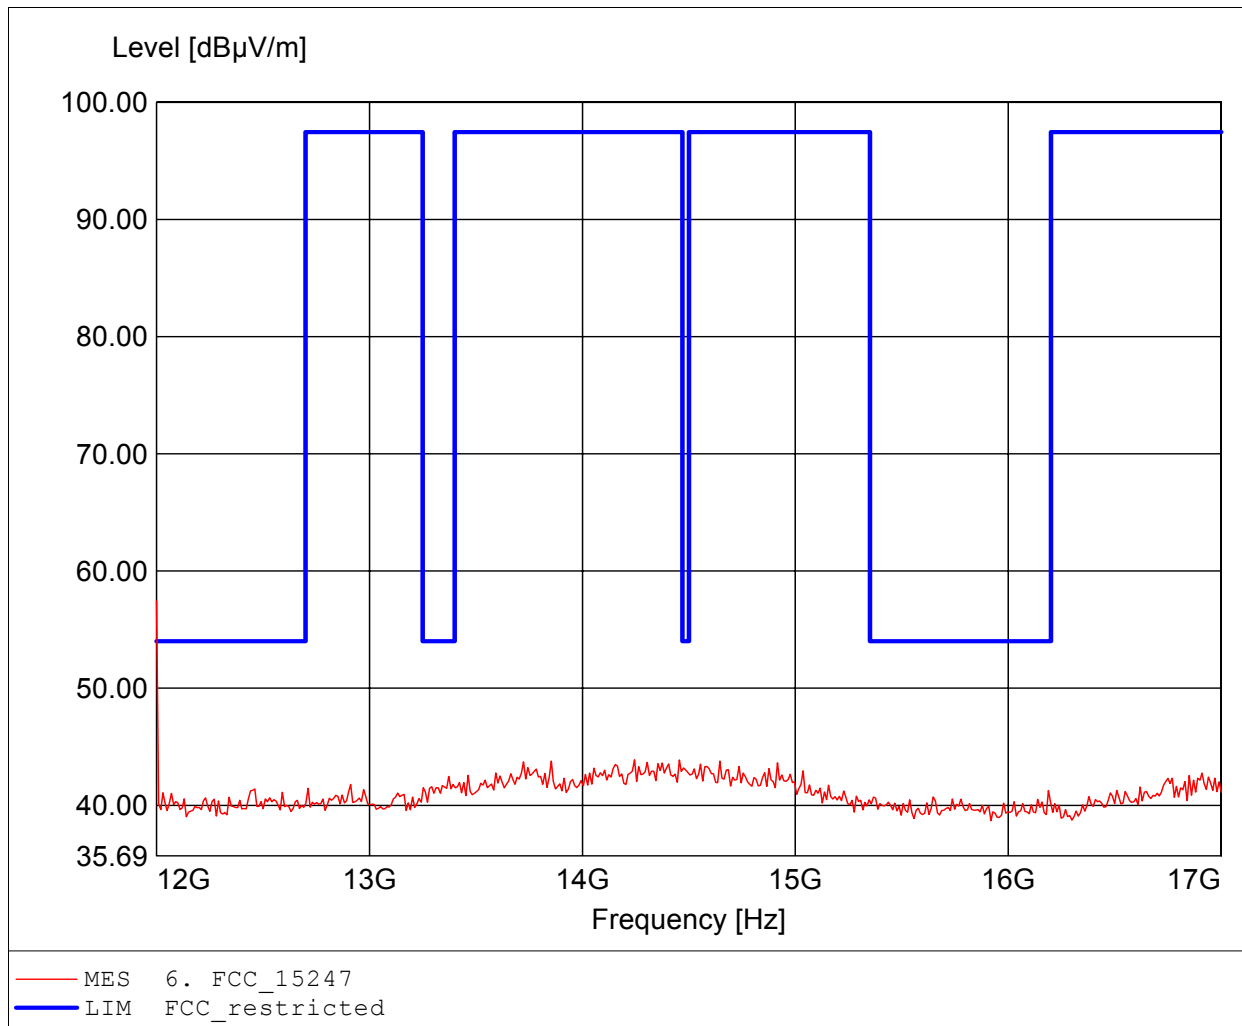

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, average detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.365GHz, Emax: 32.83dBµV/m, RBW: 1MHz

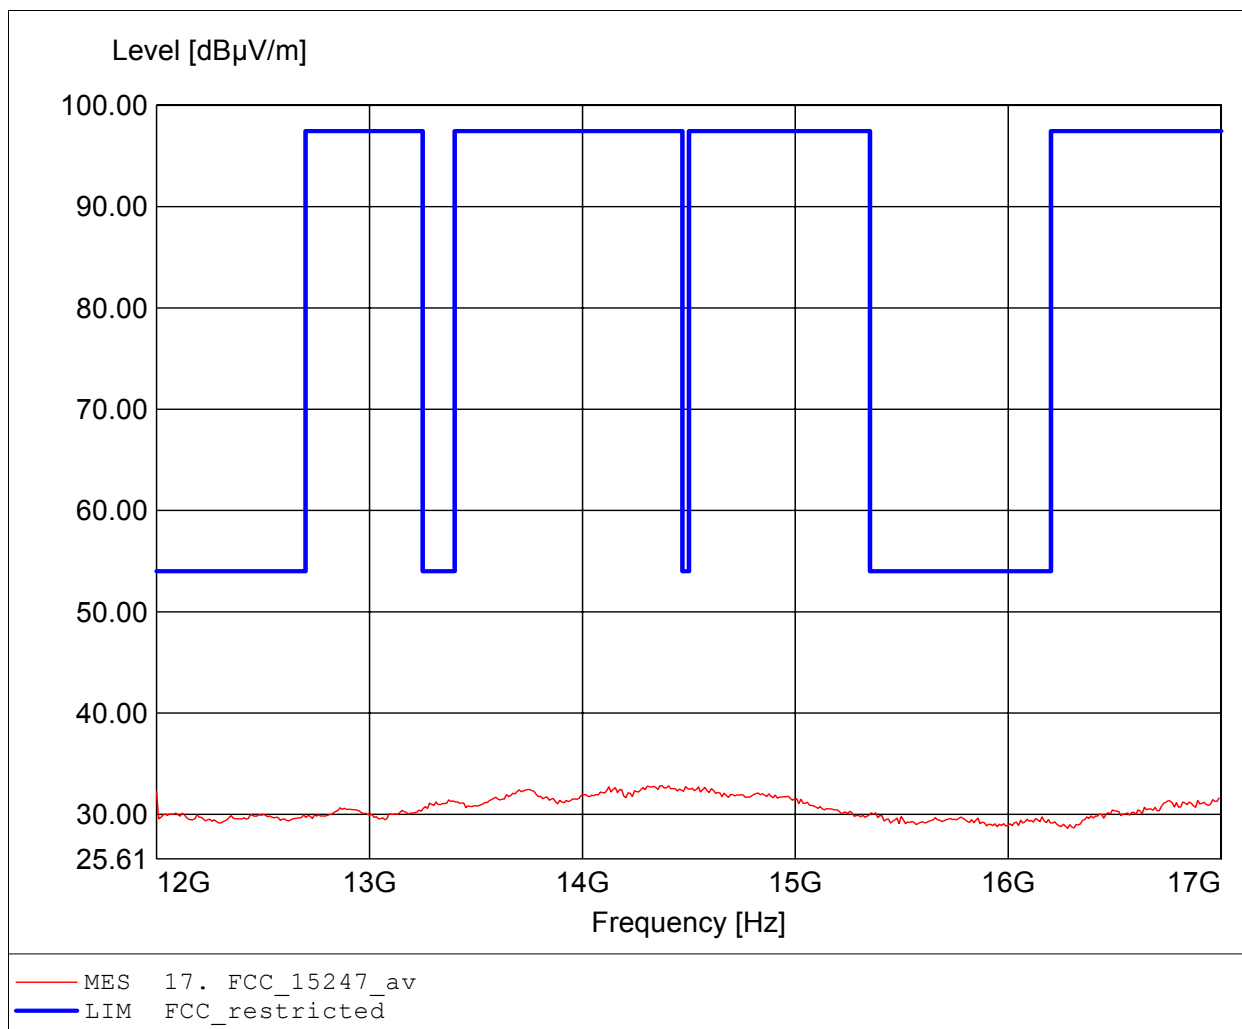

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 12.000GHz, Emax: 48.16dBµV/m, RBW: 1MHz

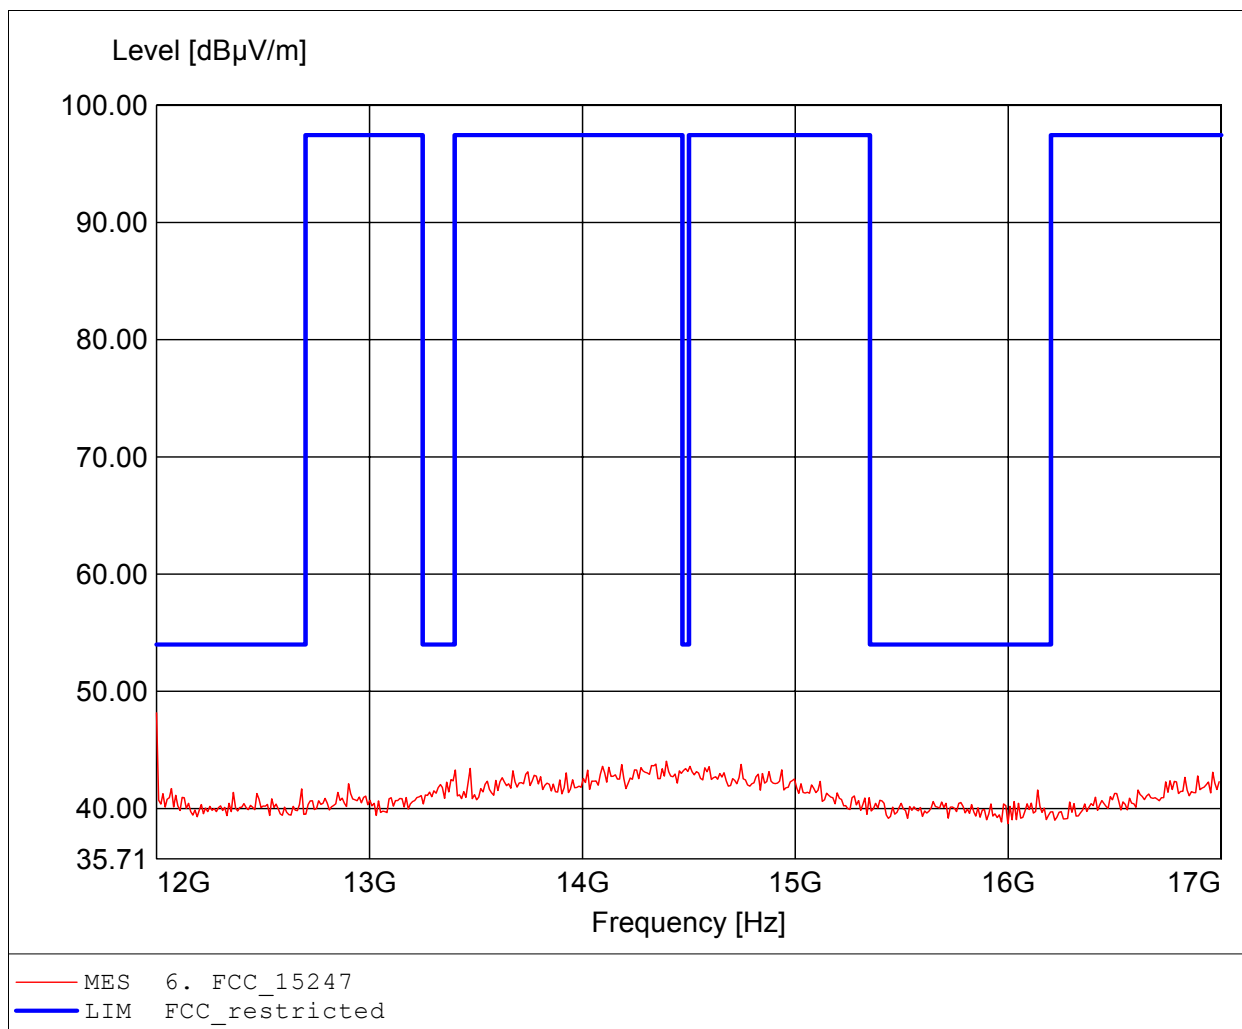

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.076GHz, Emax: 44.09dBµV/m, RBW: 1MHz

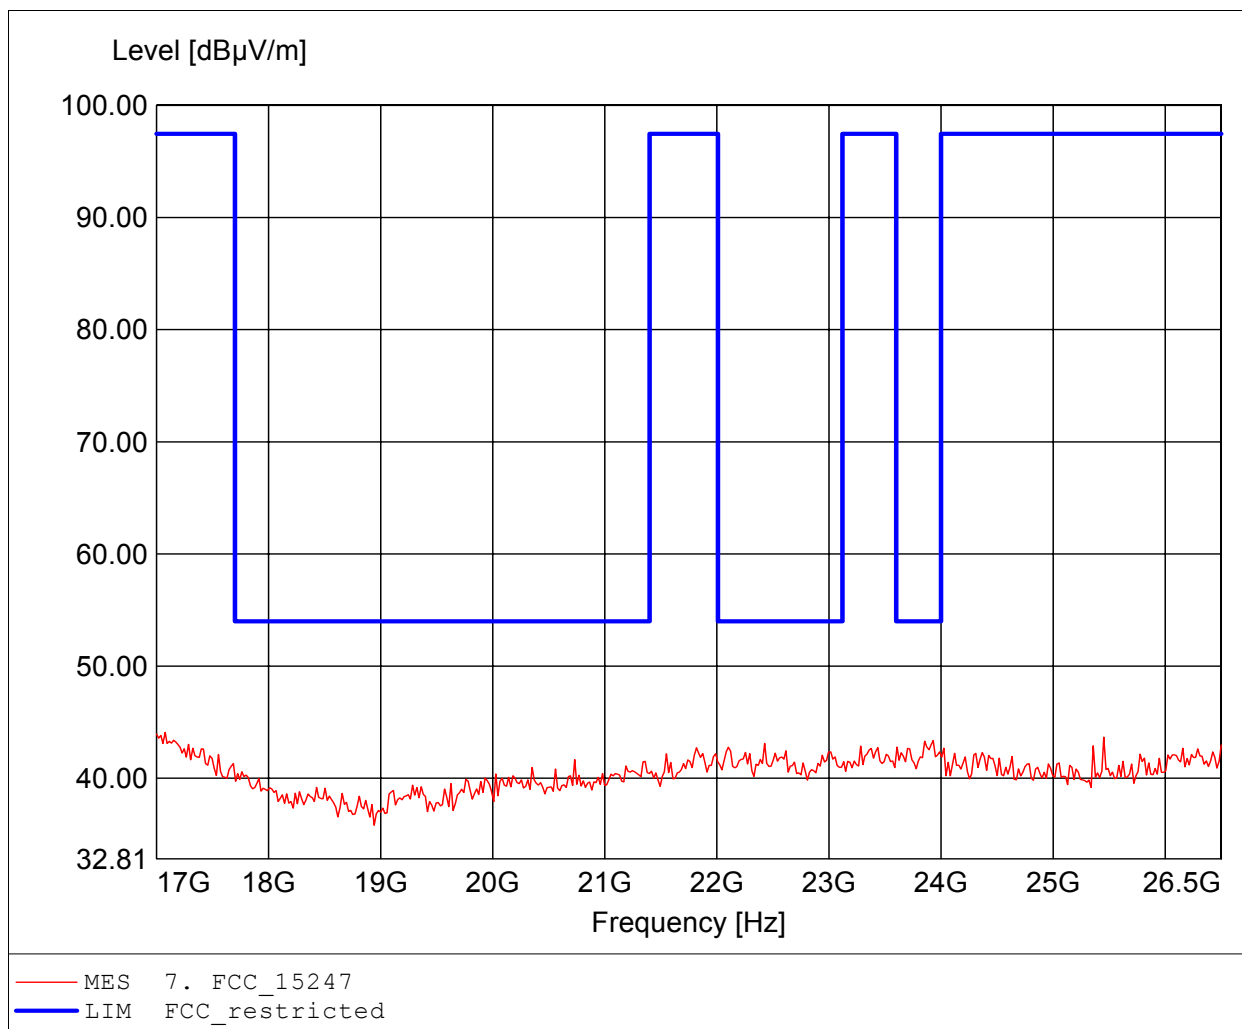




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 0  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.019GHz, Emax: 44.53dBµV/m, RBW: 1MHz

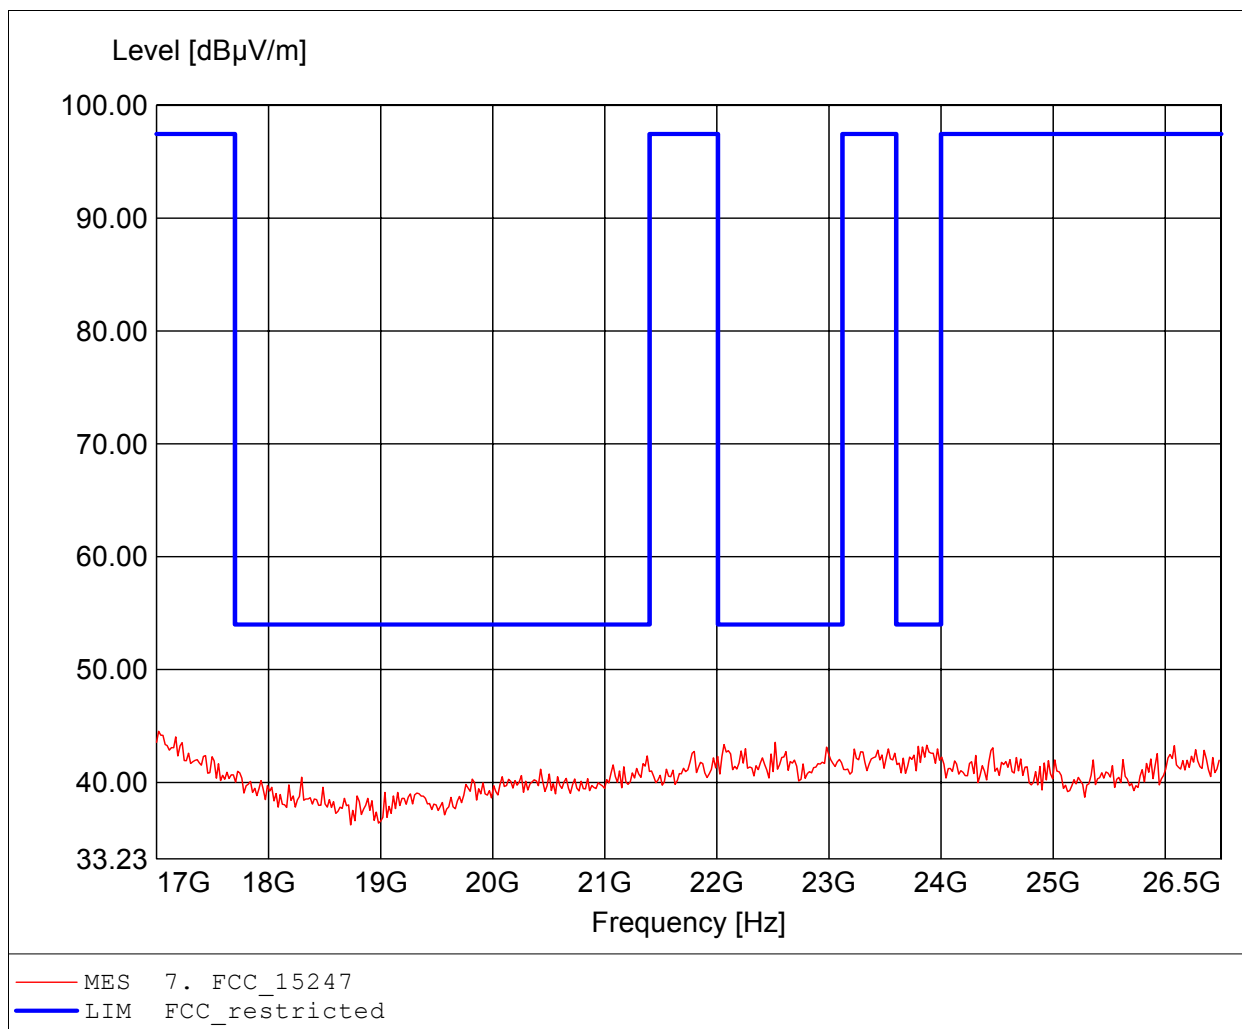

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 37  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 187.735MHz, Emax: 33.34dBµV/m, RBW: 100kHz

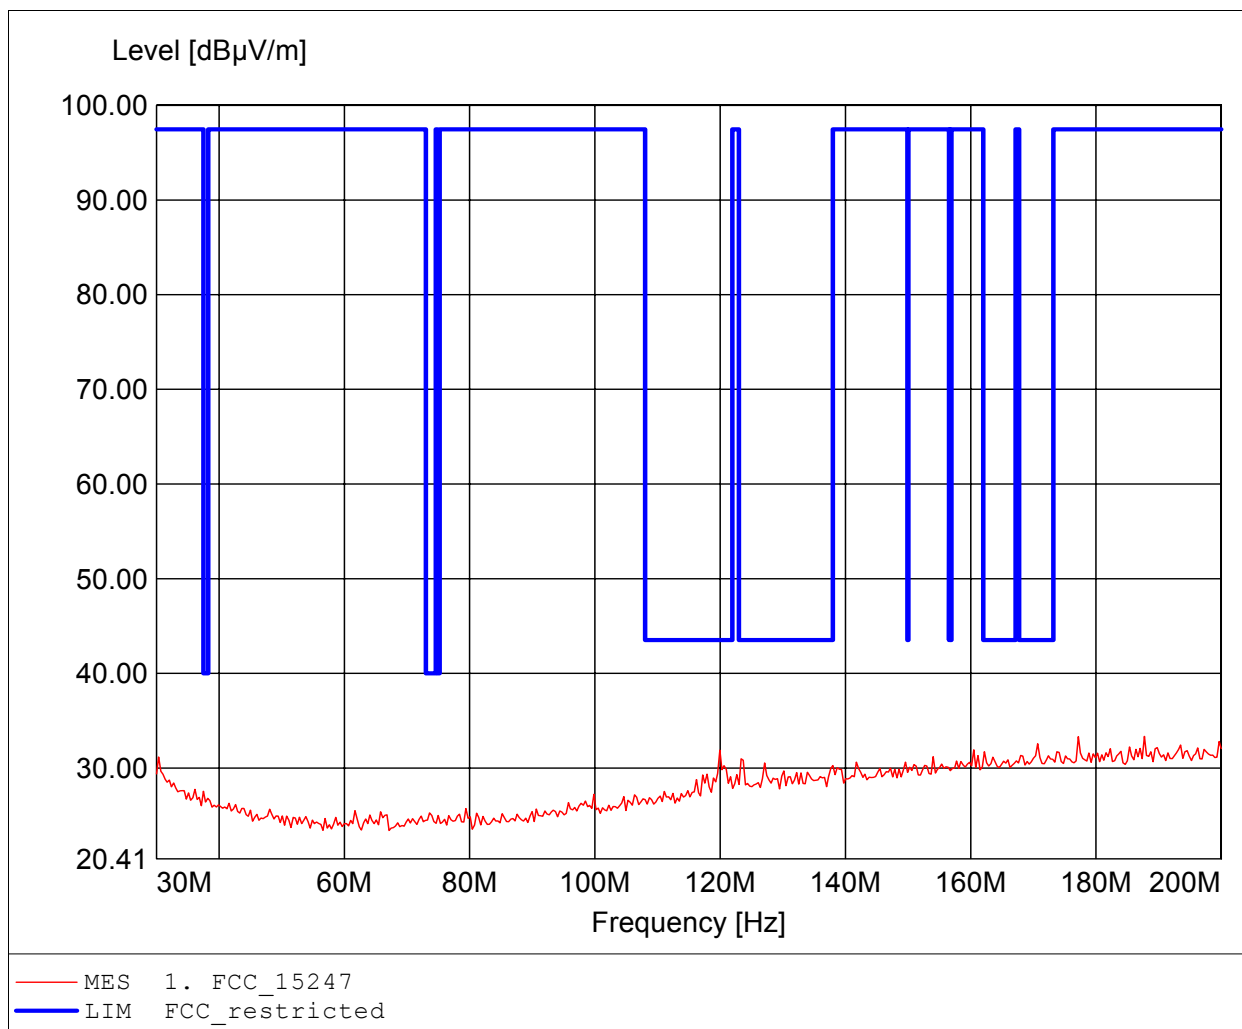

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 37  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 177.174MHz, Emax: 34.17dBµV/m, RBW: 100kHz

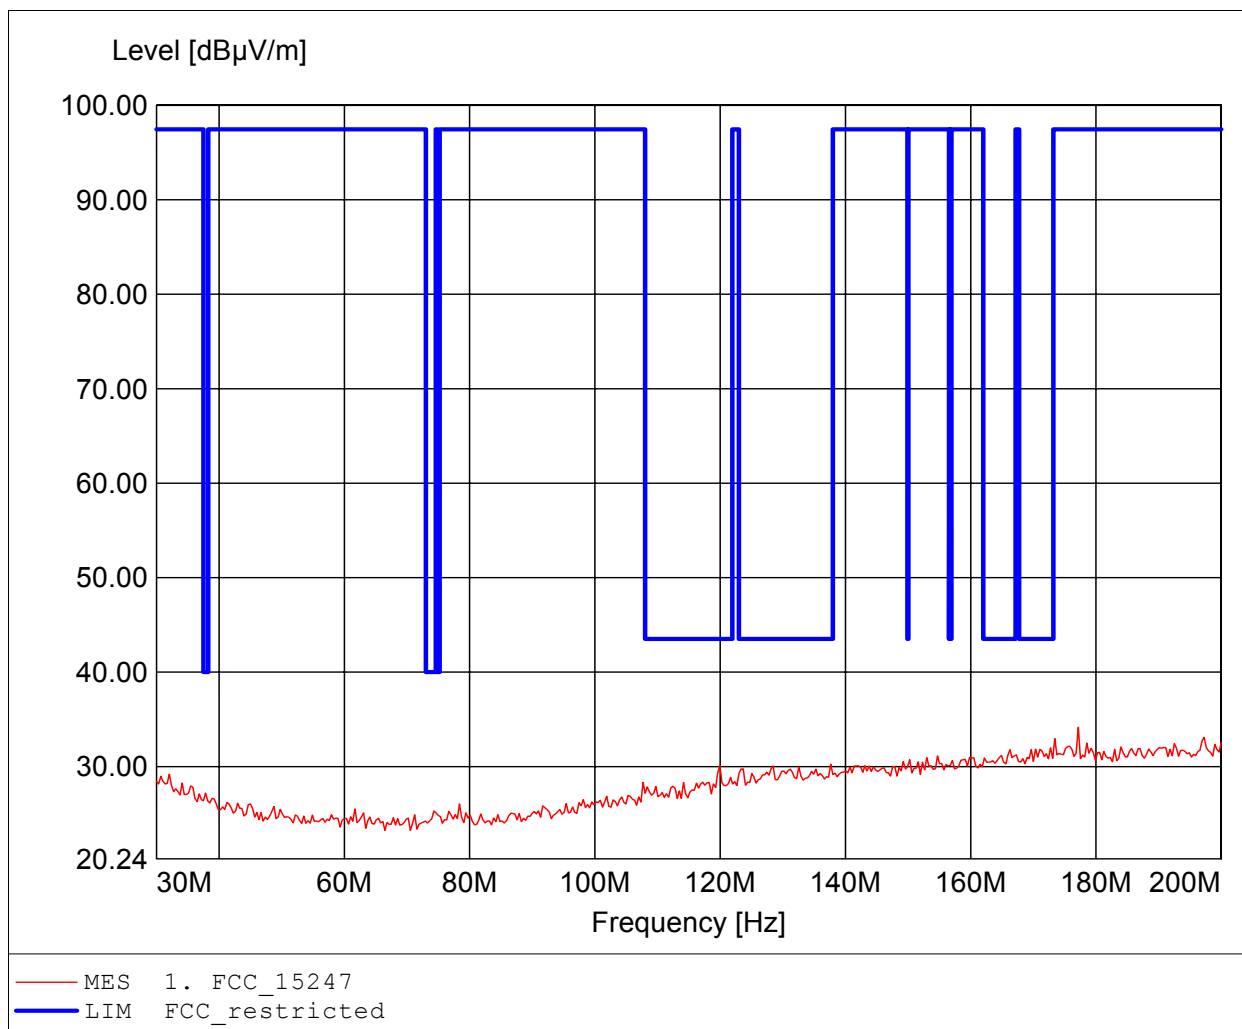

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 37  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 648.898MHz, Emax: 37.52dBµV/m, RBW: 100kHz

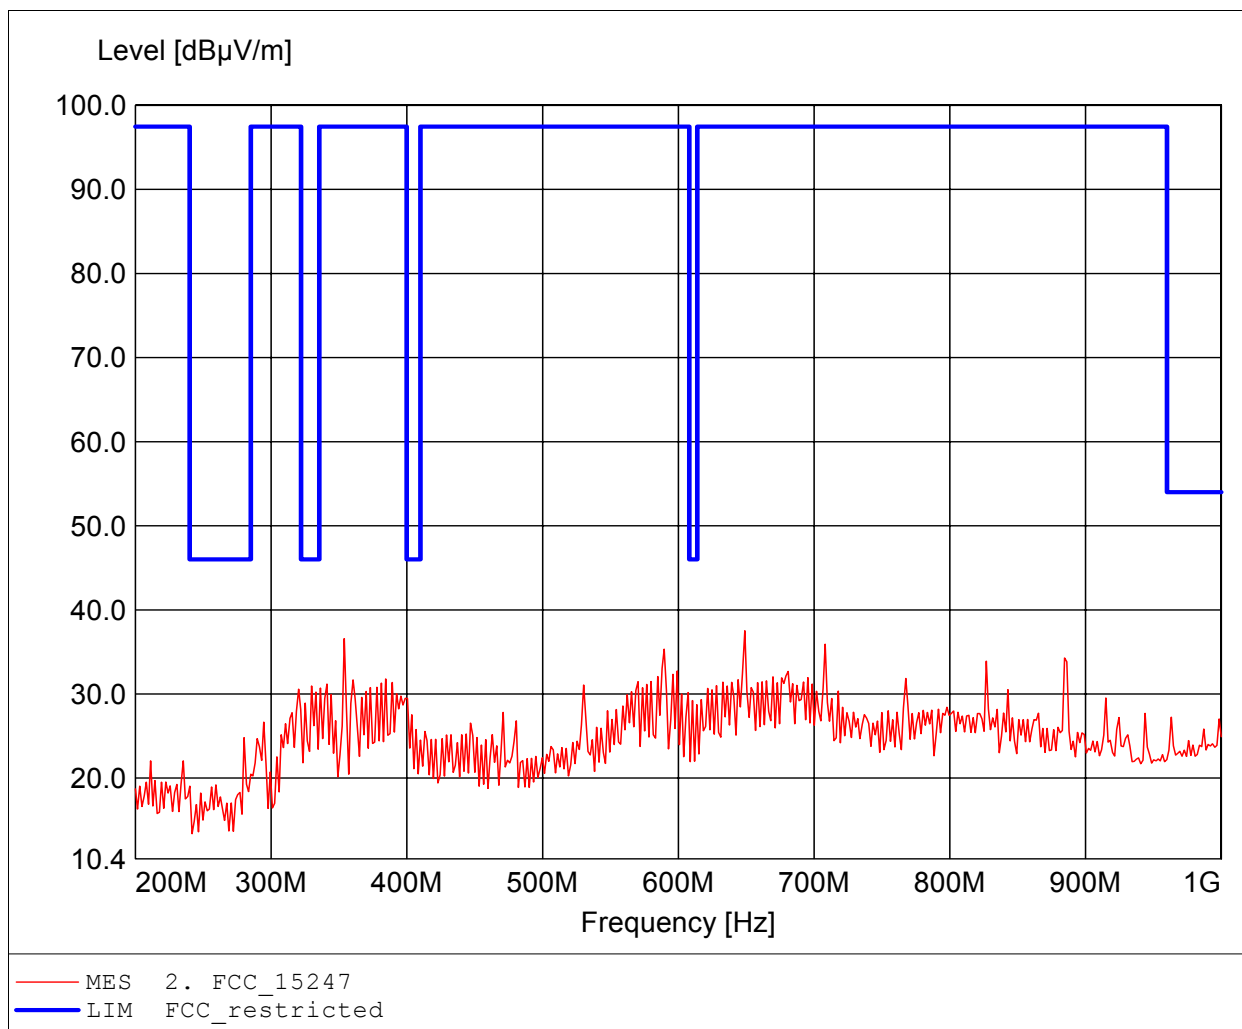

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 37  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 842.886MHz, Emax: 35.42dBµV/m, RBW: 100kHz

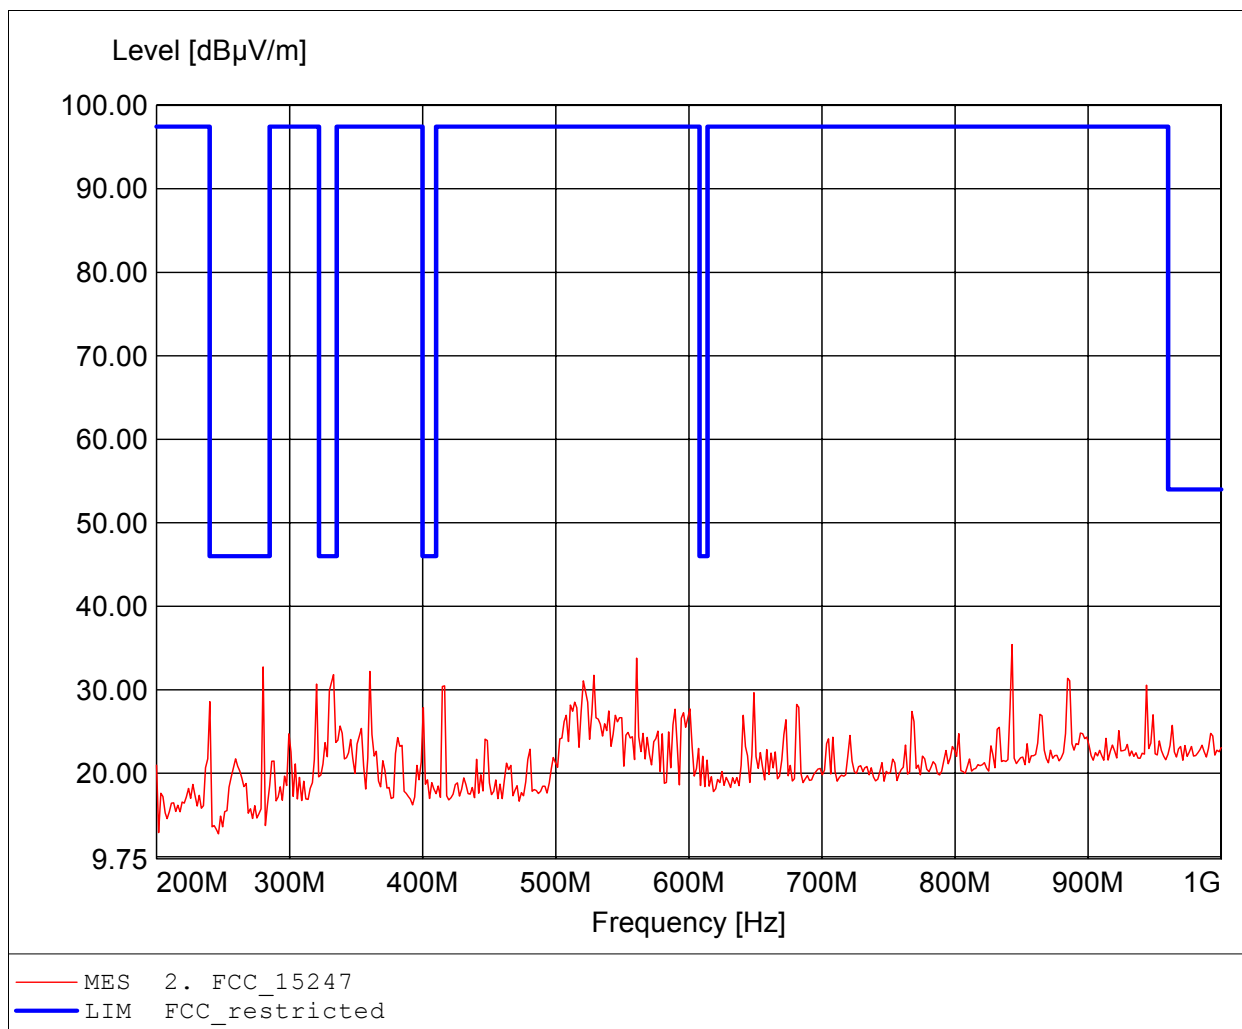

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 37  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 3.909GHz, Emax: 43.52dB $\mu$ V/m, RBW: 1MHz

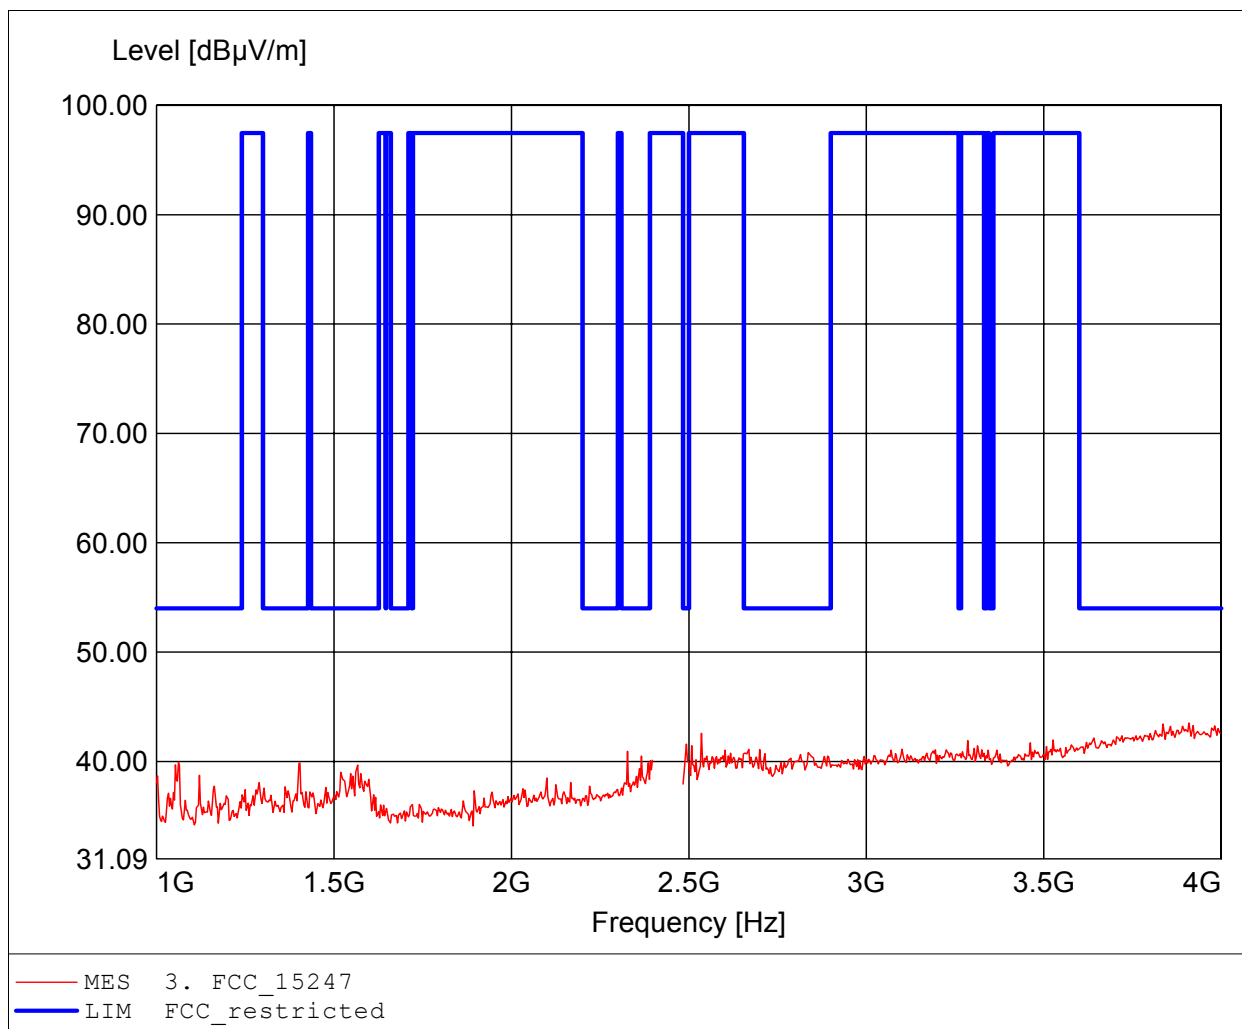

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 37  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 3.863GHz, Emax: 43.59dBµV/m, RBW: 1MHz

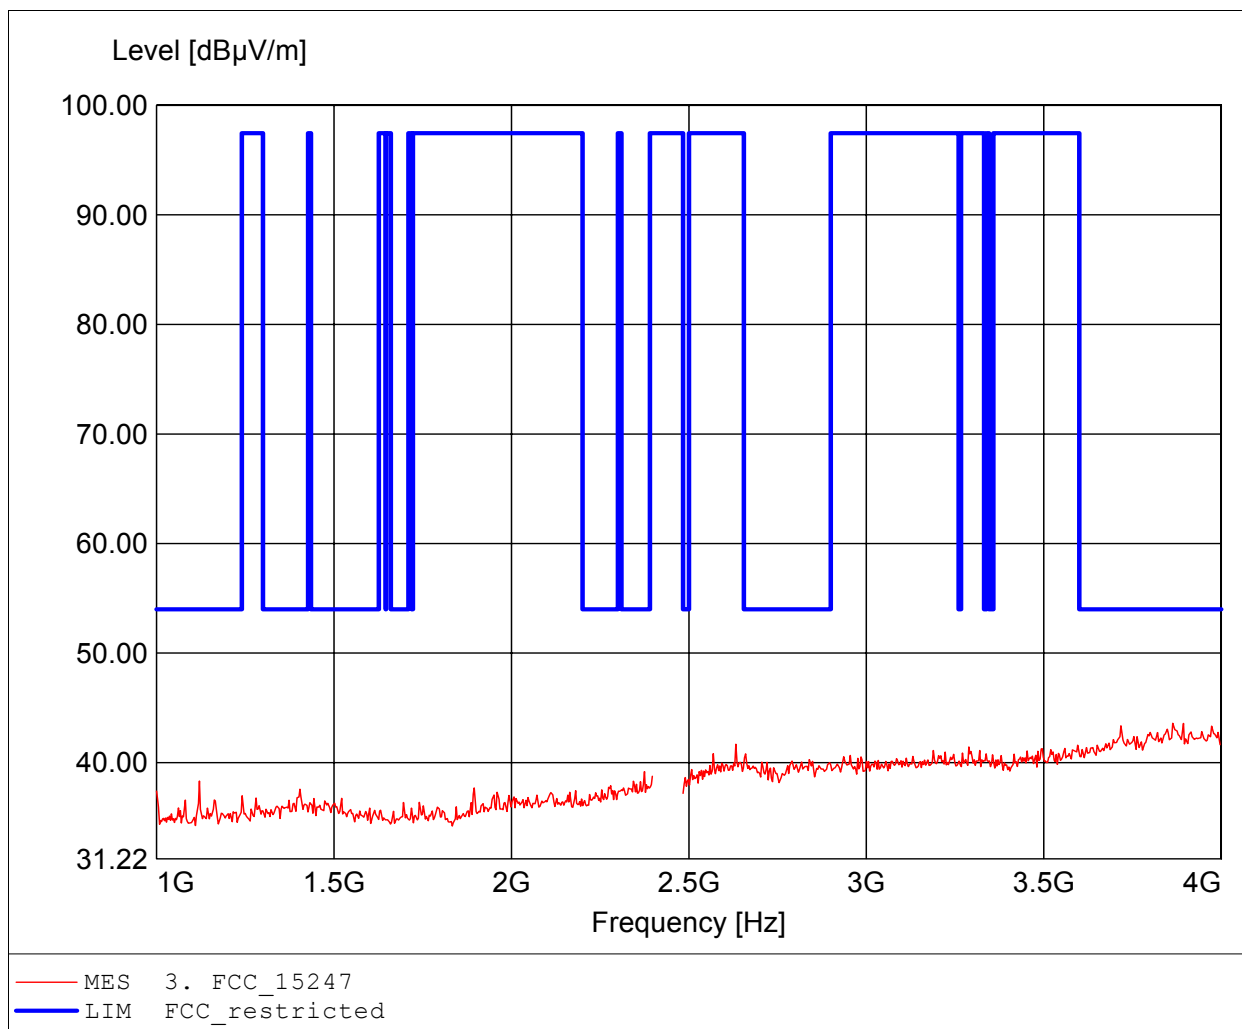

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

Approval Holder: Leica Geosystem AG  
EUT: Handheld Computer  
Model: RX1250T / Ch.: 37  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 7.4 V DC (battery)  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.311GHz, Emax: 56.11dB $\mu$ V/m, RBW: 1MHz

