


Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 37
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.311GHz, Emax: 33.82dB μ V/m, RBW: 1MHz

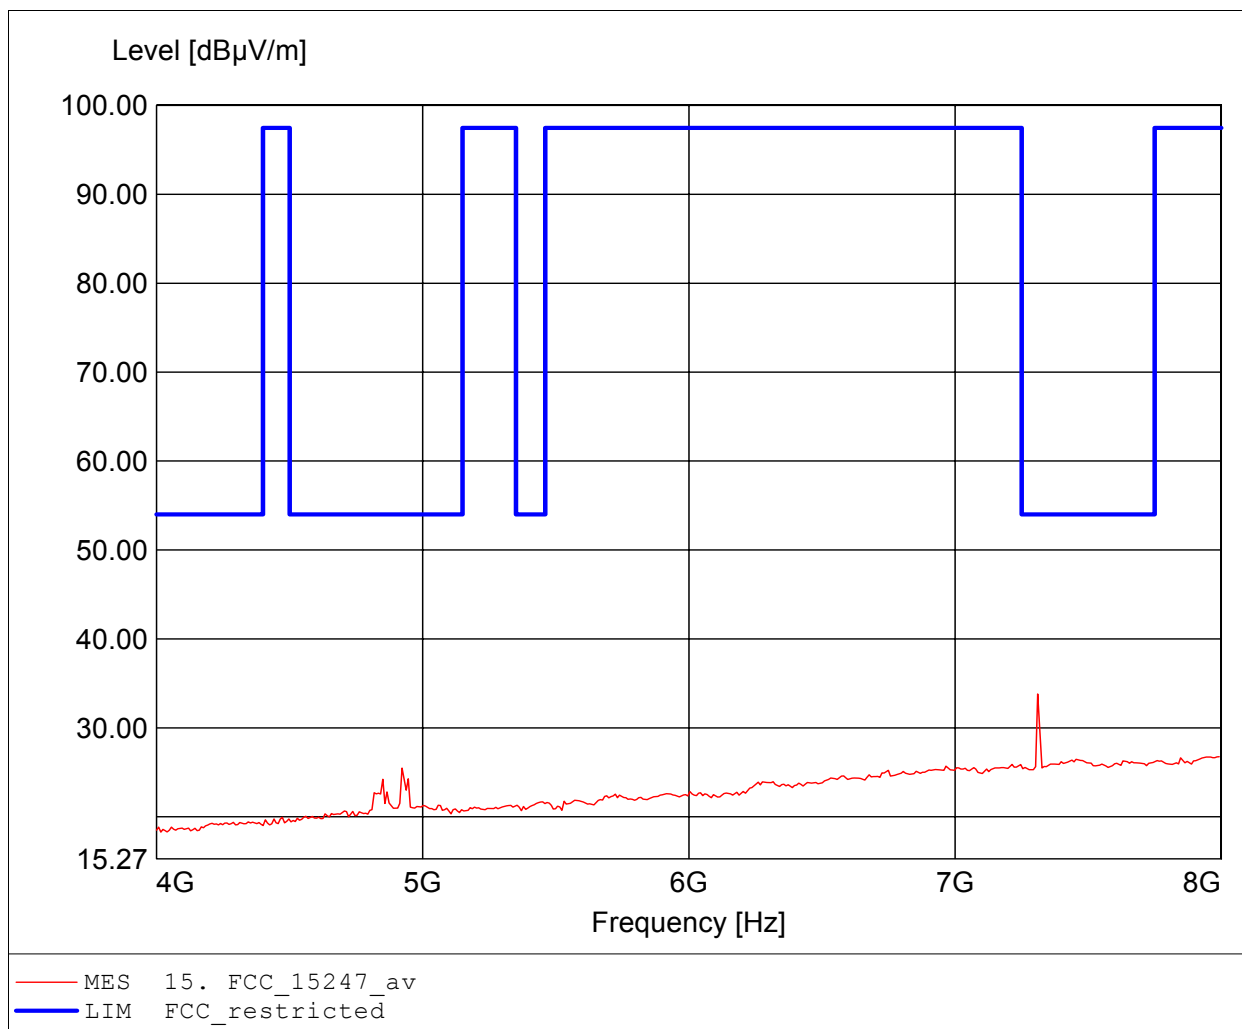

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 37
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.311GHz, Emax: 50.00dBµV/m, RBW: 1MHz

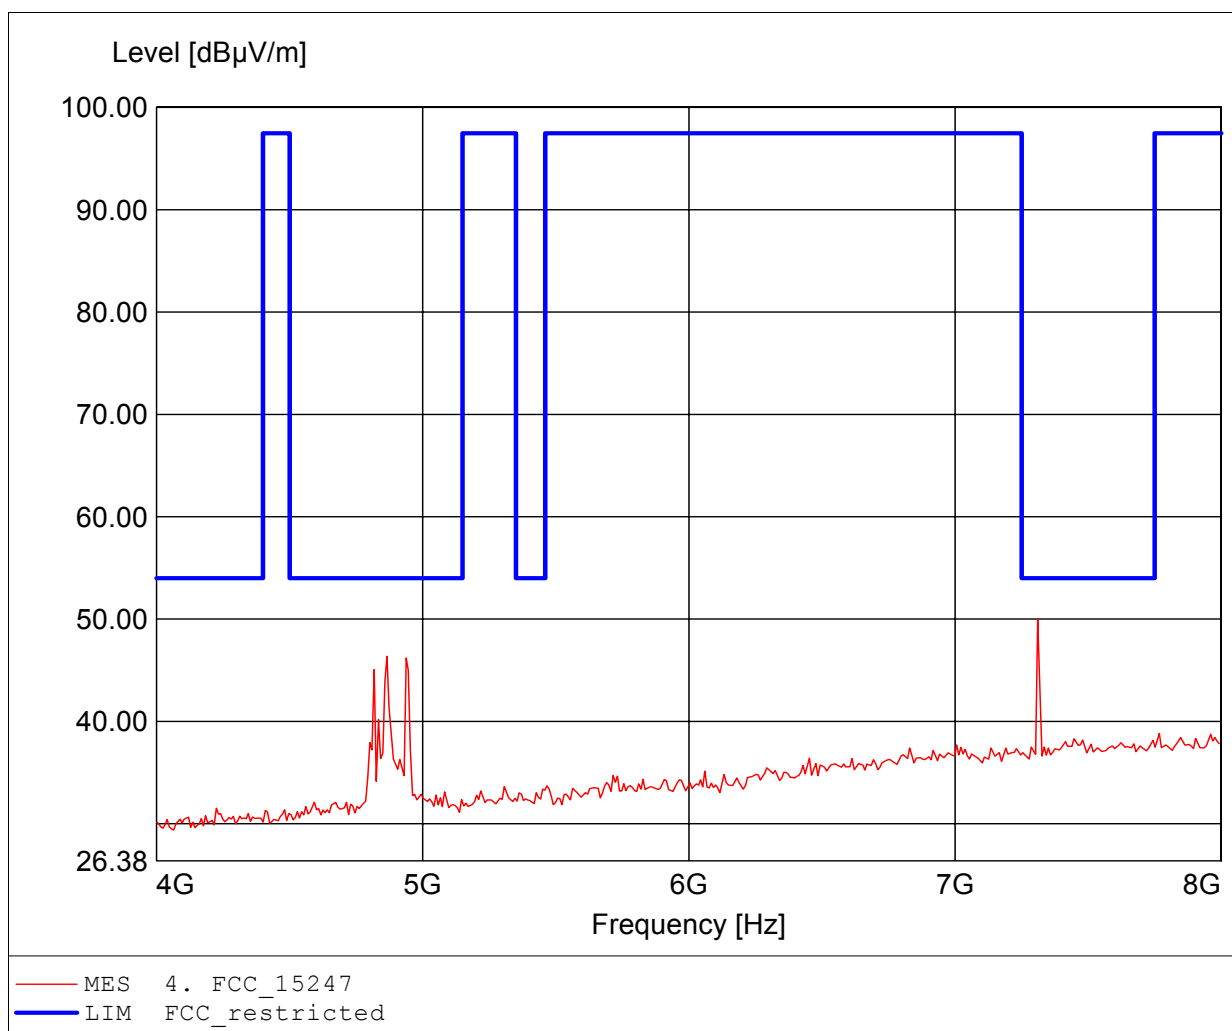

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 37
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.006GHz, Emax: 41.87dBµV/m, RBW: 1MHz

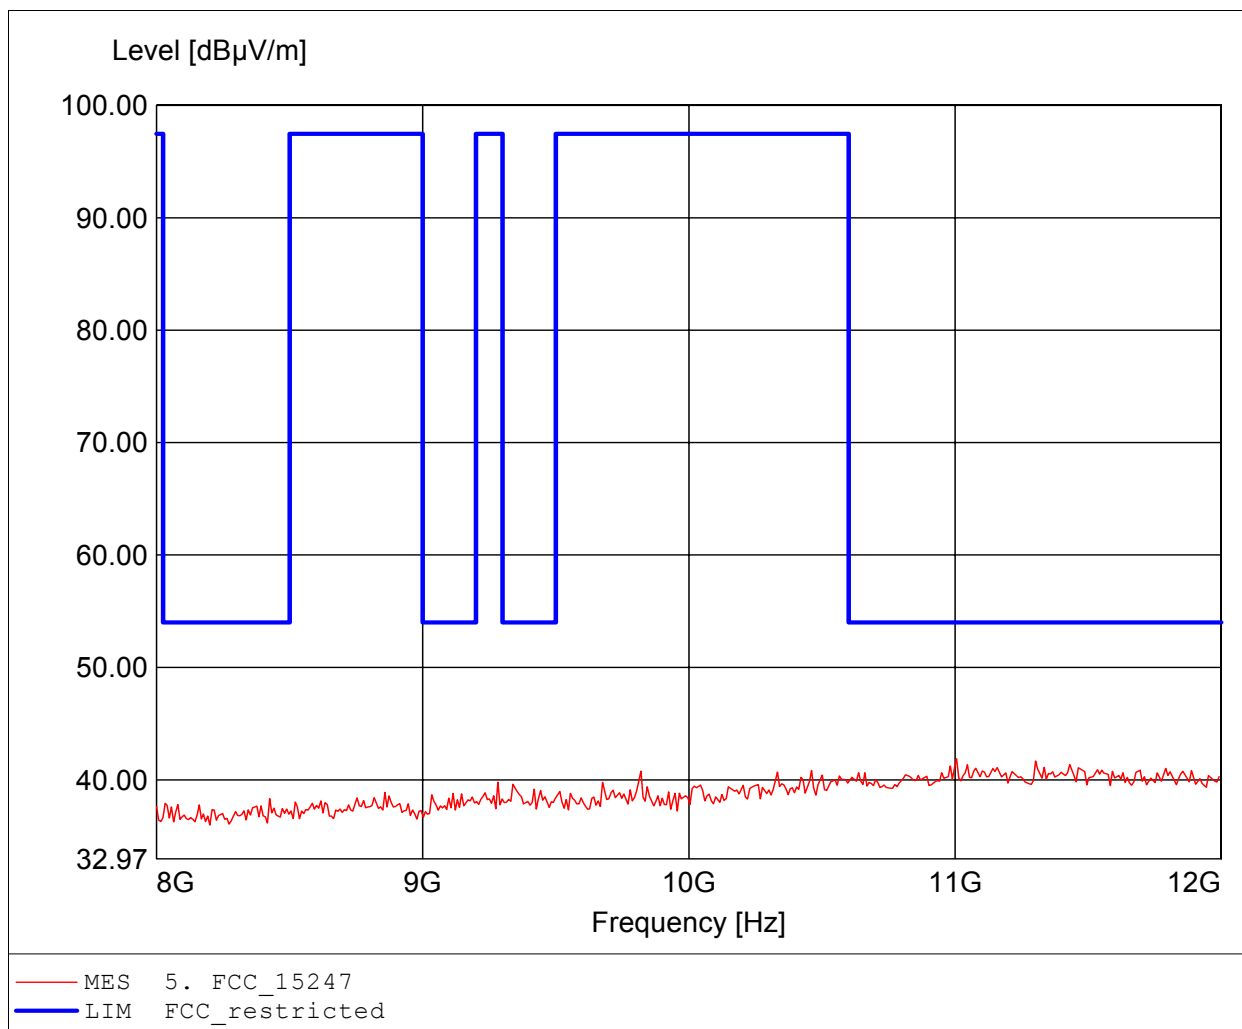

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 37
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.974GHz, Emax: 42.34dBµV/m, RBW: 1MHz

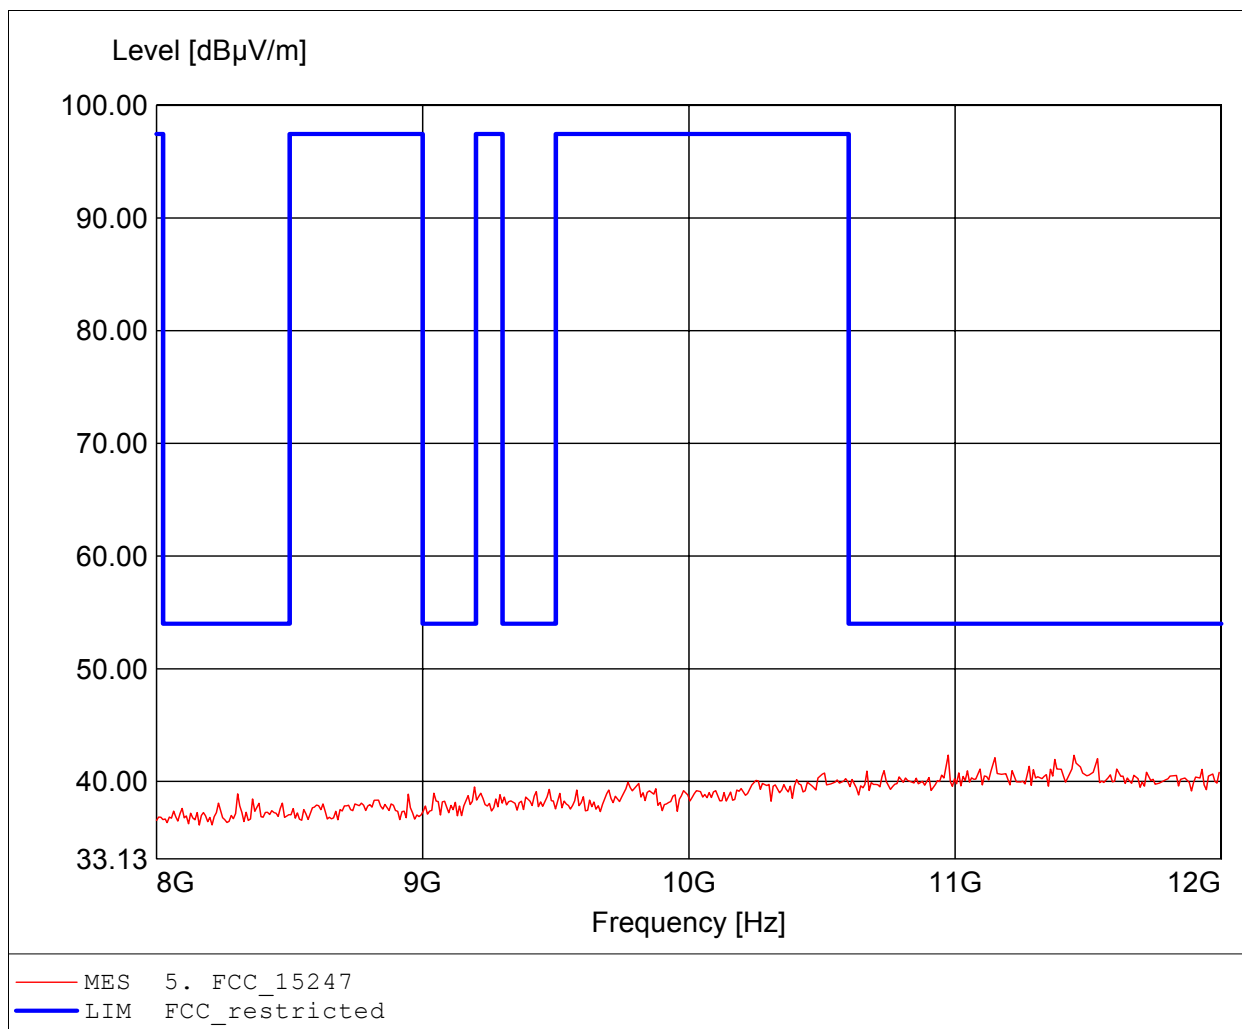

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 37
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.170GHz, Emax: 54.41dBµV/m, RBW: 1MHz

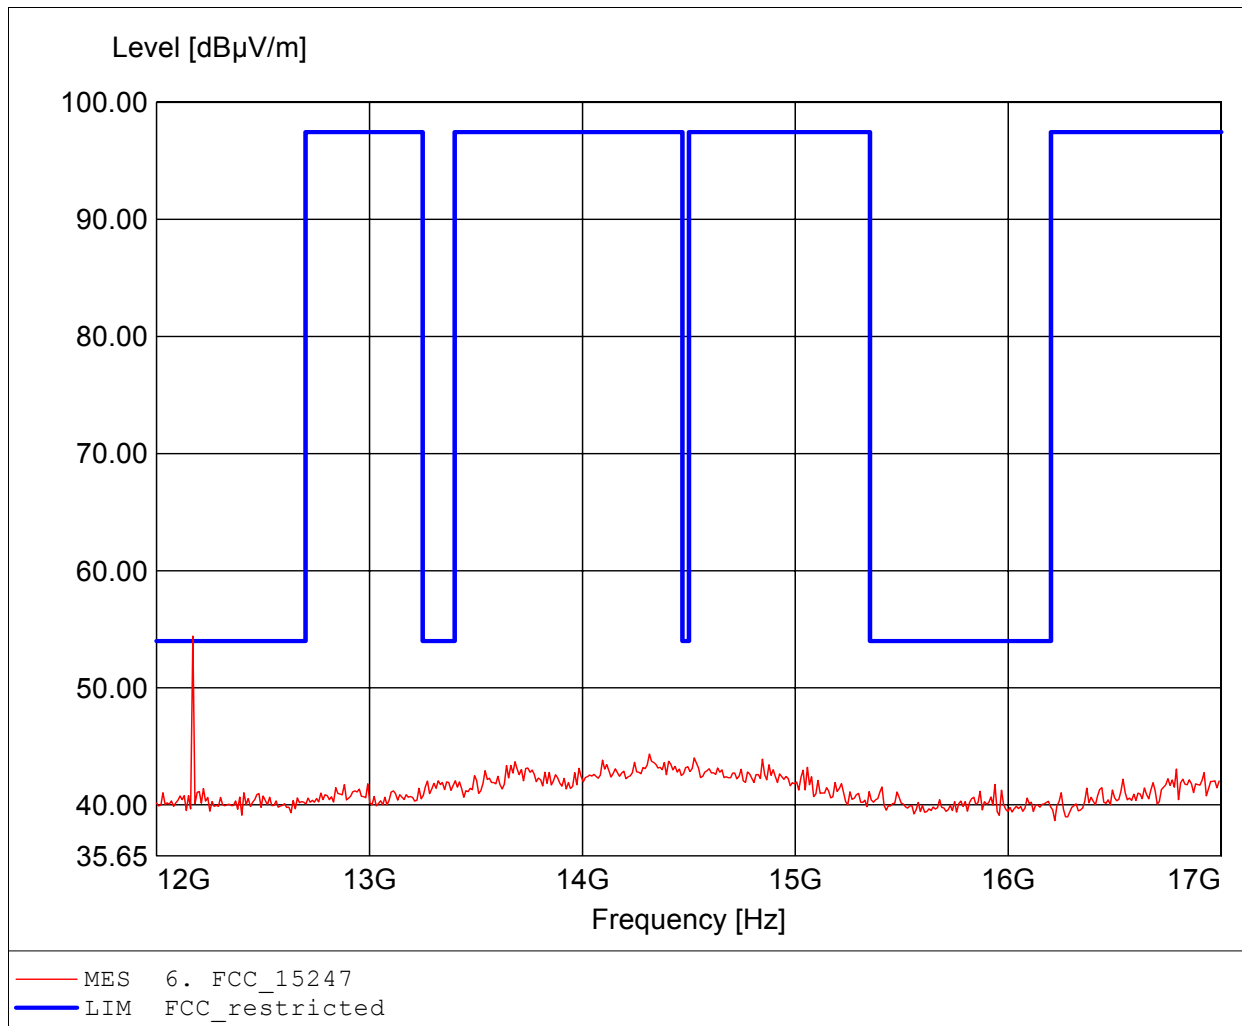

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 37
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.170GHz, Emax: 33.38dBµV/m, RBW: 1MHz

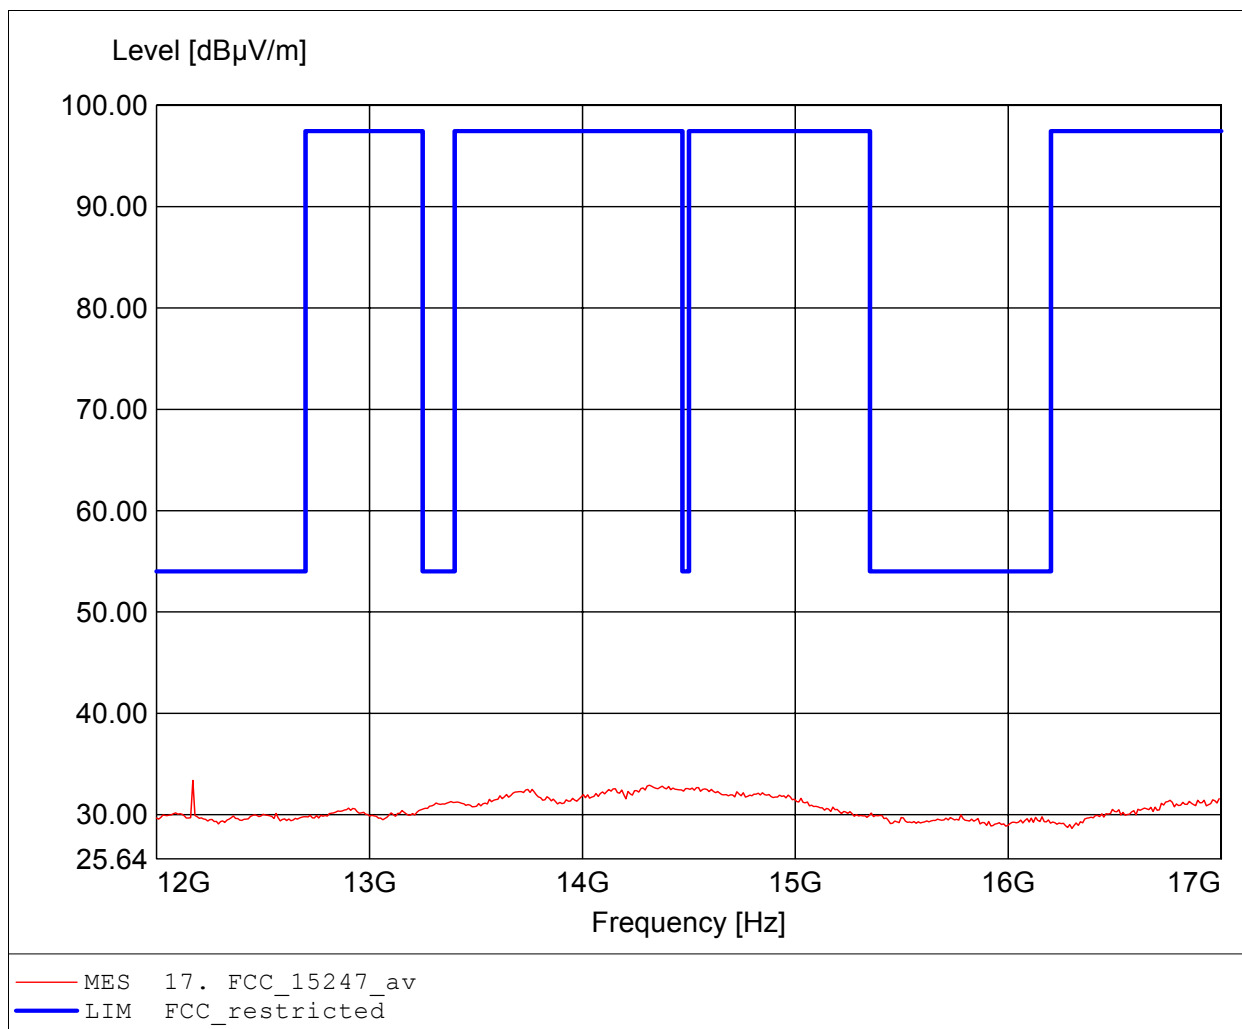

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 37
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 13.774GHz, Emax: 44.42dBµV/m, RBW: 1MHz

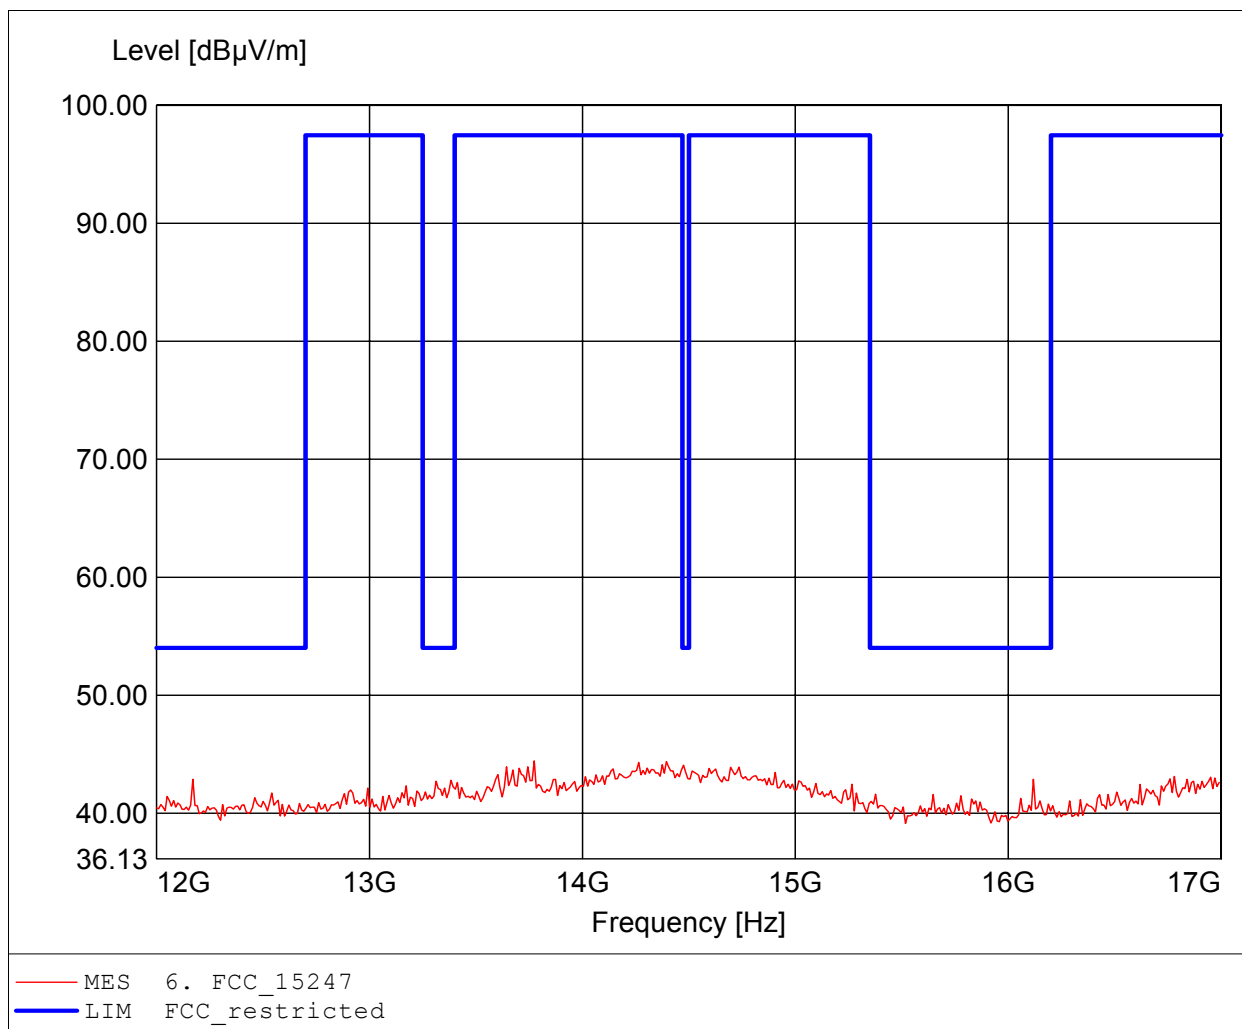

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 37
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.96dBµV/m, RBW: 1MHz

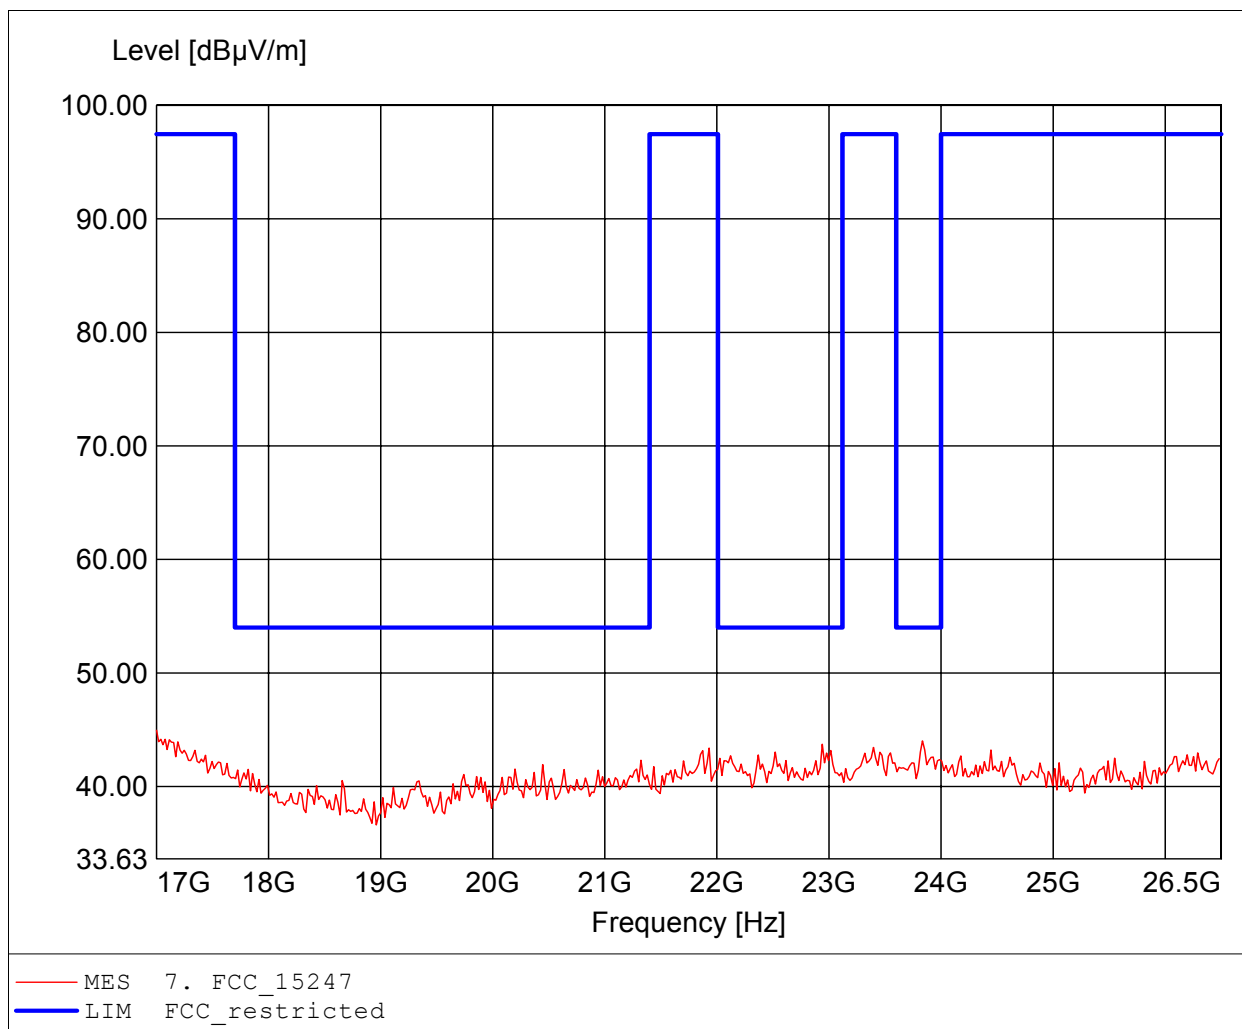

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 37
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 45.02dBµV/m, RBW: 1MHz

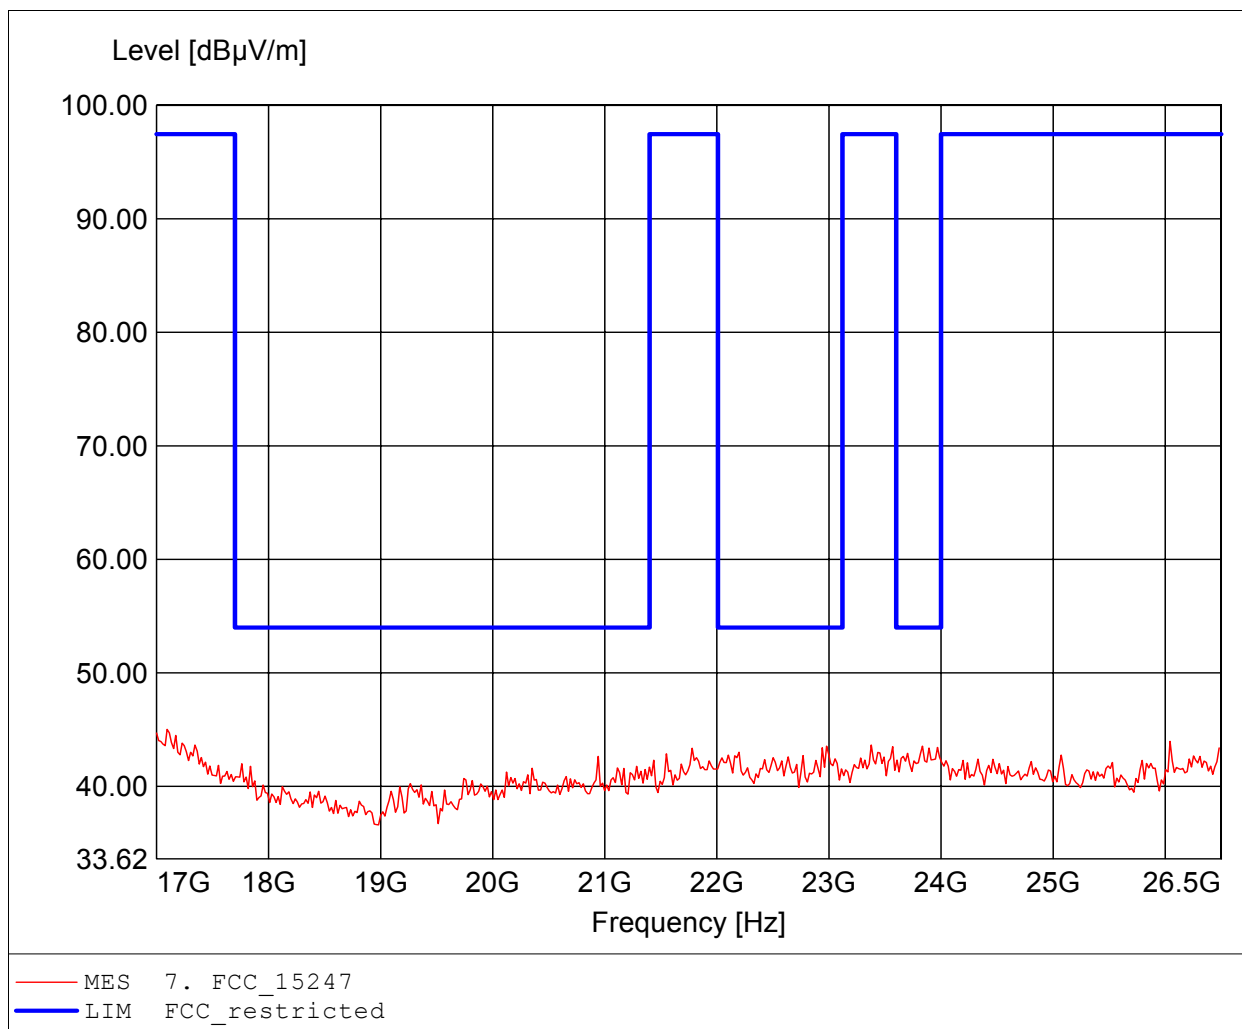

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 184.329MHz, Emax: 32.61dBµV/m, RBW: 100kHz

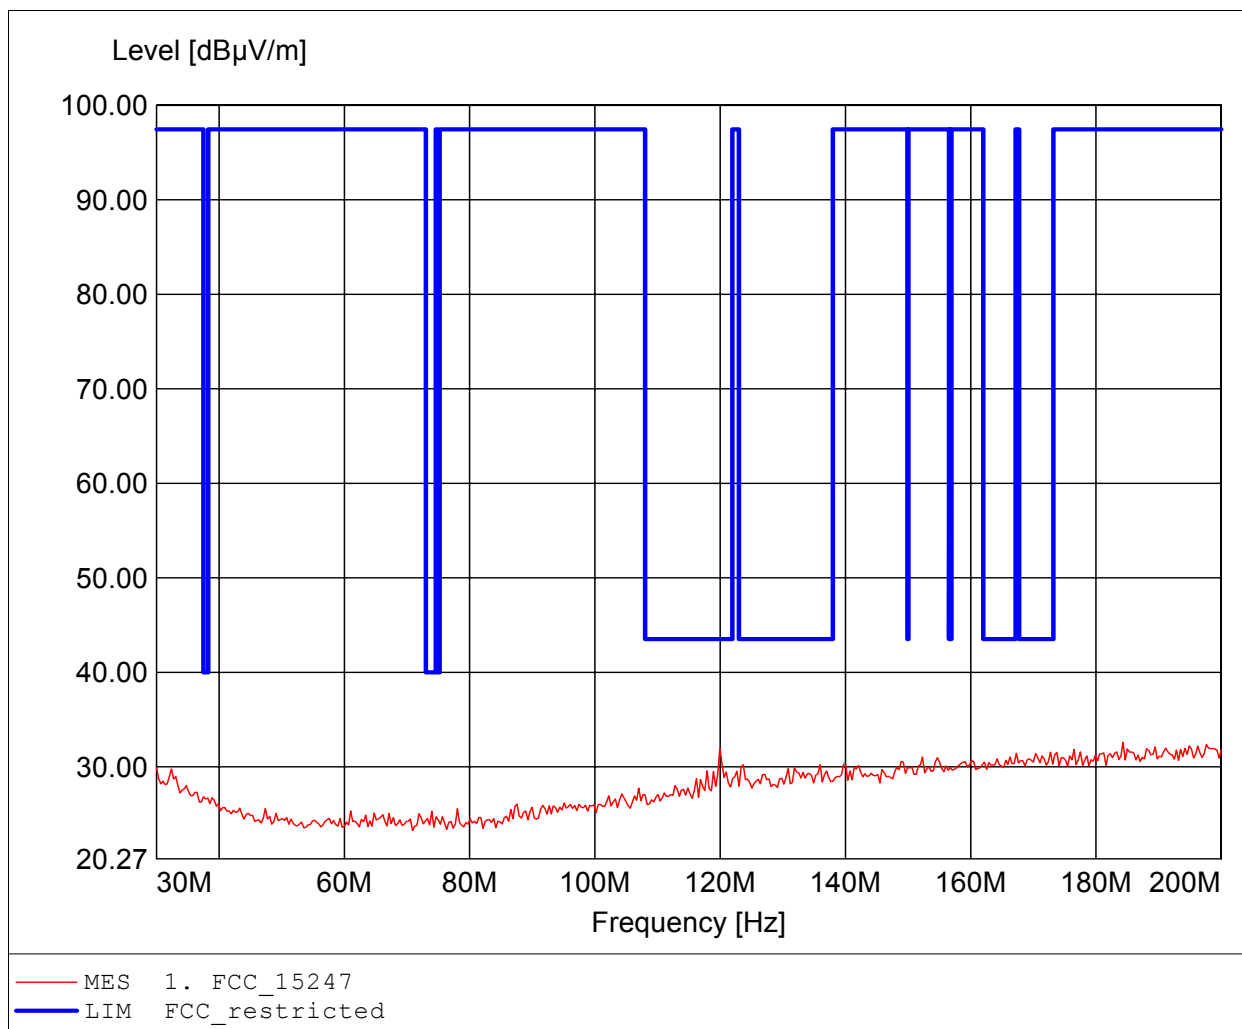

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.297MHz, Emax: 33.07dBµV/m, RBW: 100kHz

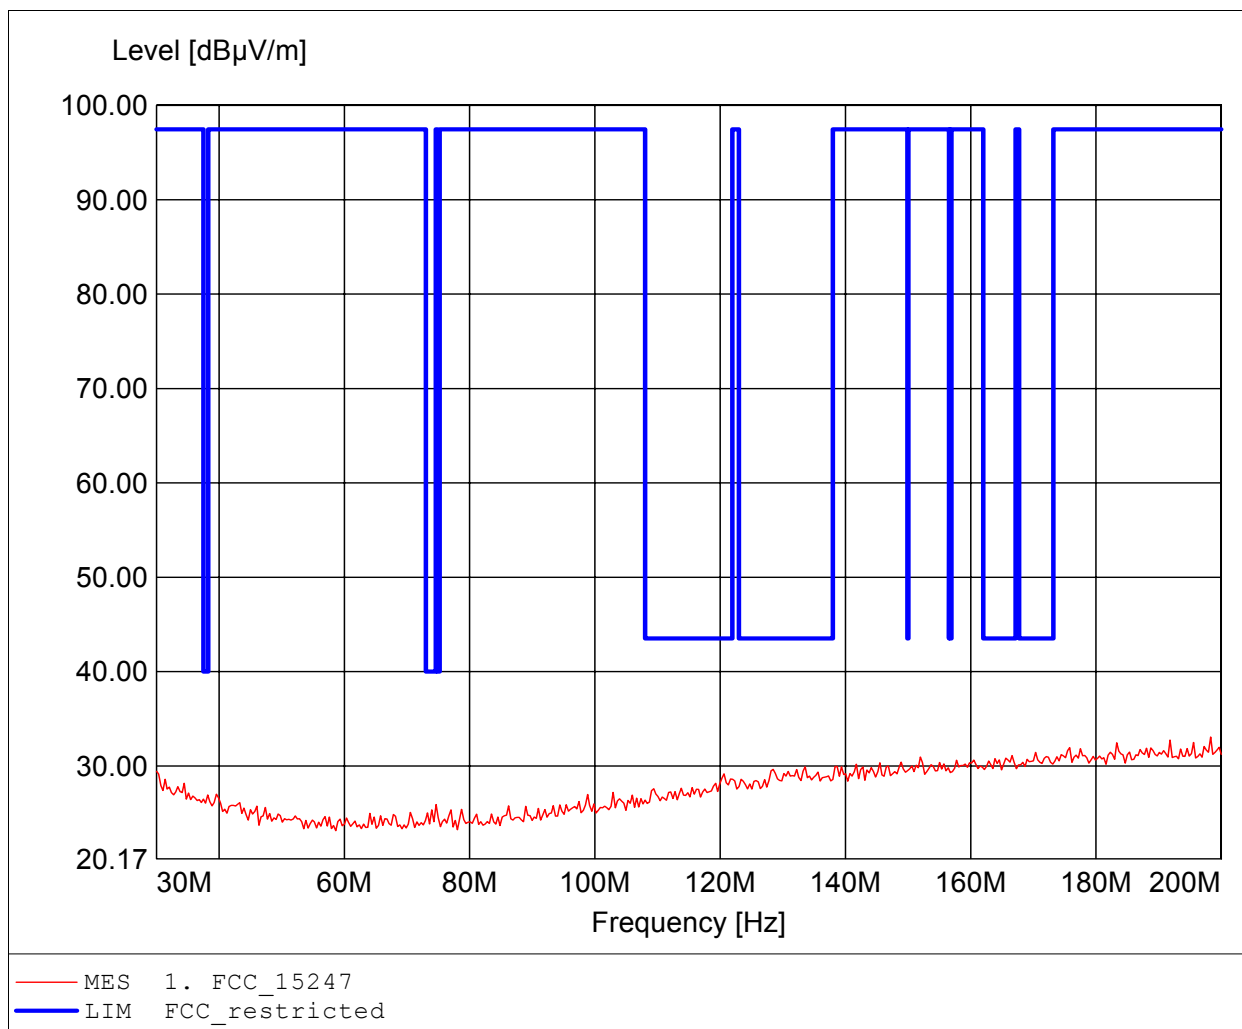

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 648.898MHz, Emax: 38.32dBµV/m, RBW: 100kHz

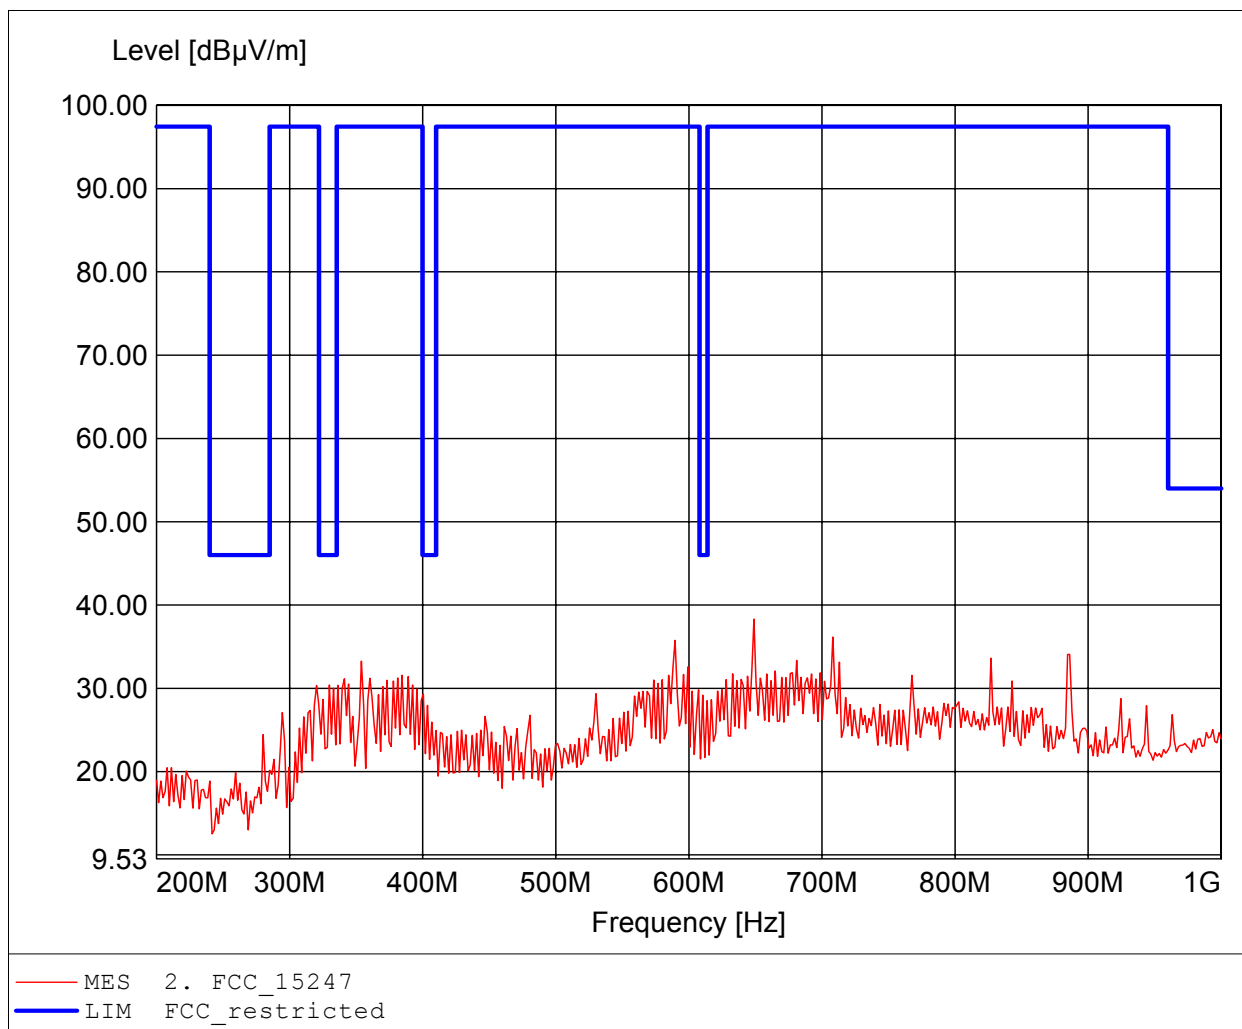

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 842.886MHz, Emax: 35.72dBµV/m, RBW: 100kHz

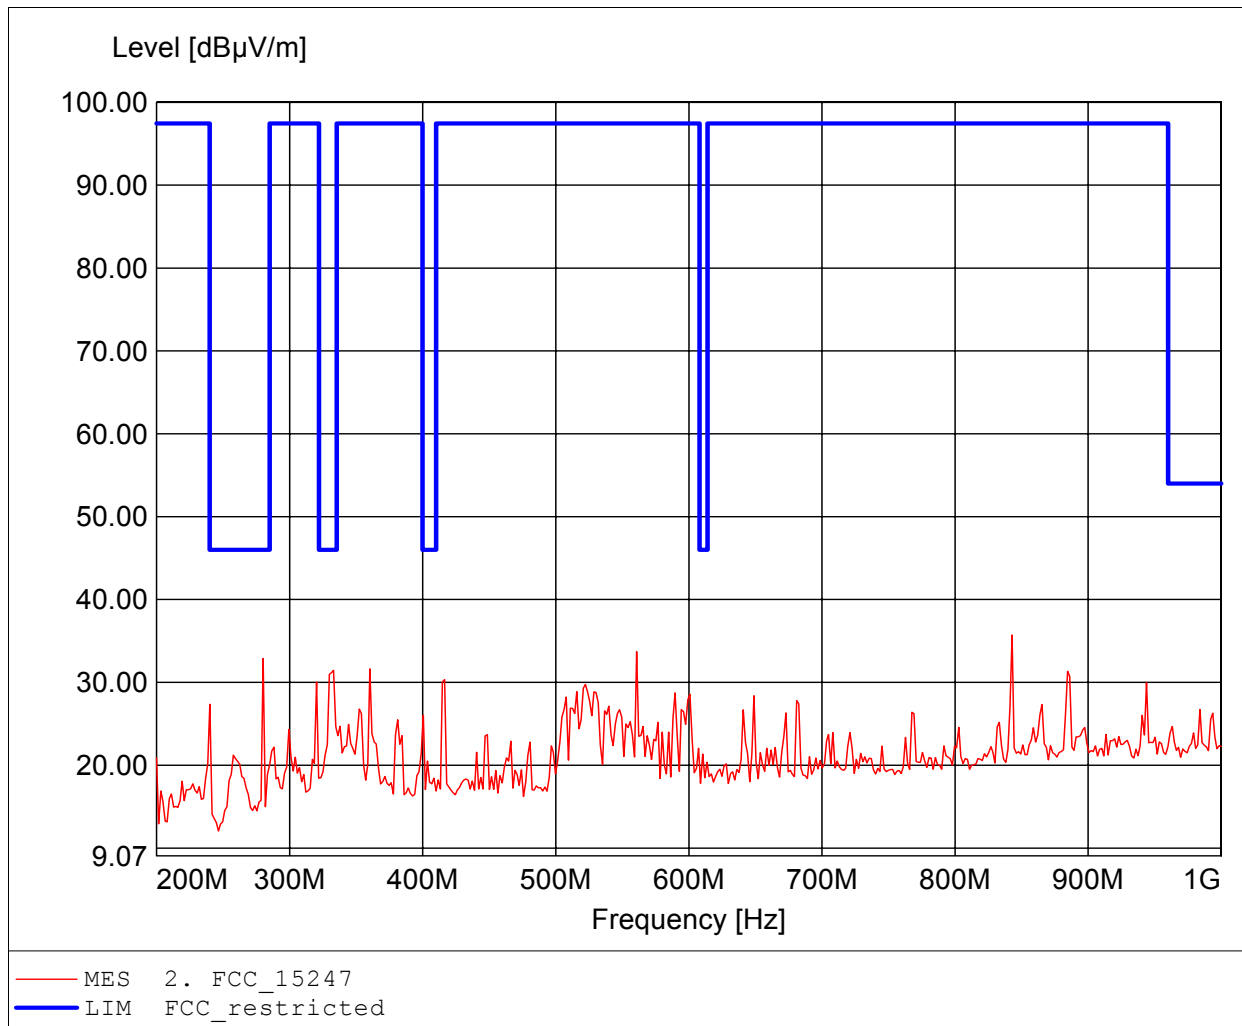

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.361GHz, Emax: 45.06dBµV/m, RBW: 1MHz

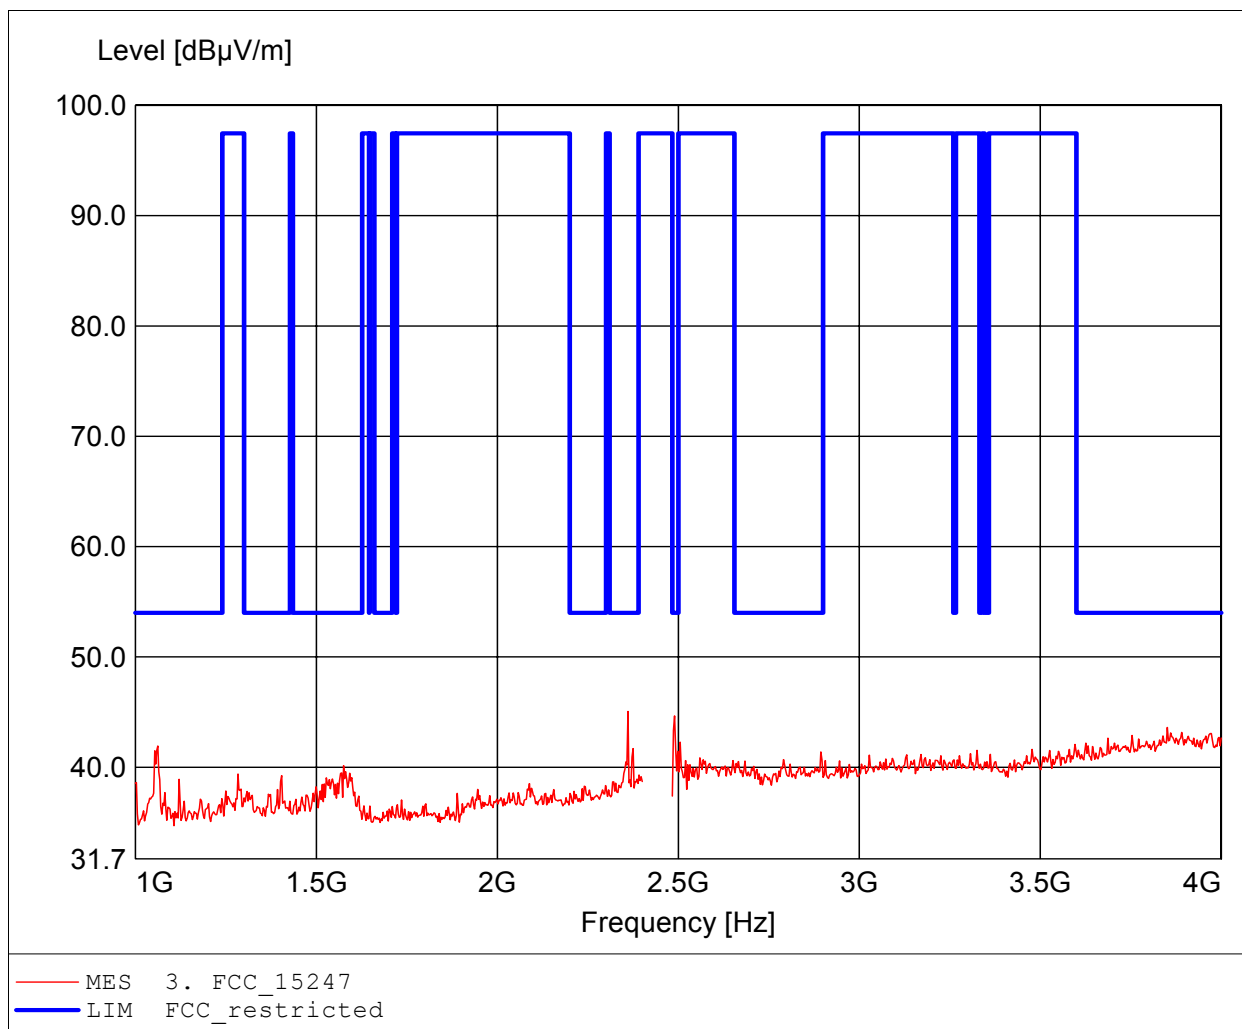

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.866GHz, Emax: 43.03dB μ V/m, RBW: 1MHz

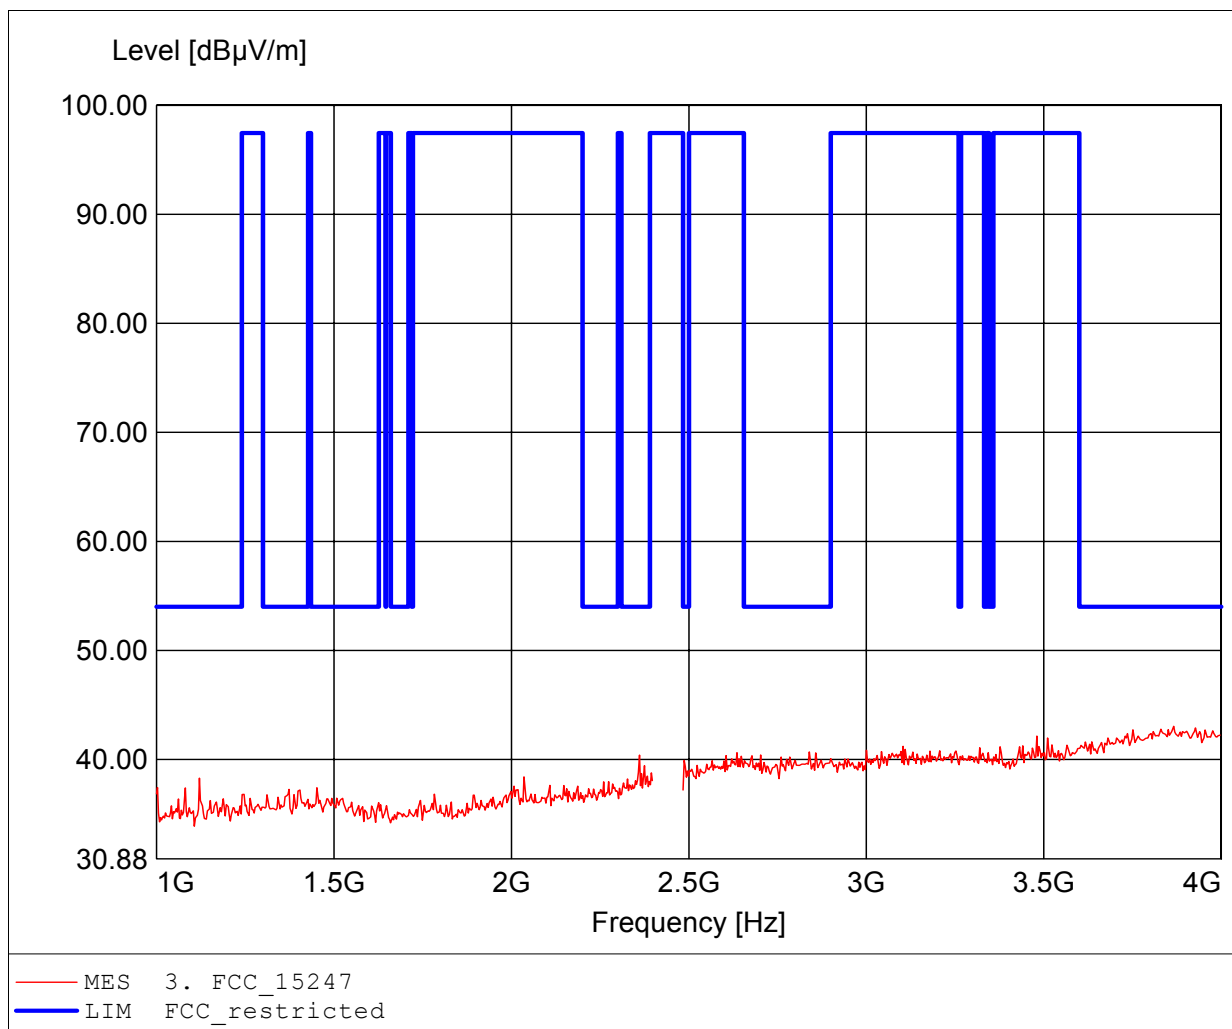

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.415GHz, Emax: 57.74dBuV/m, RBW: 1MHz

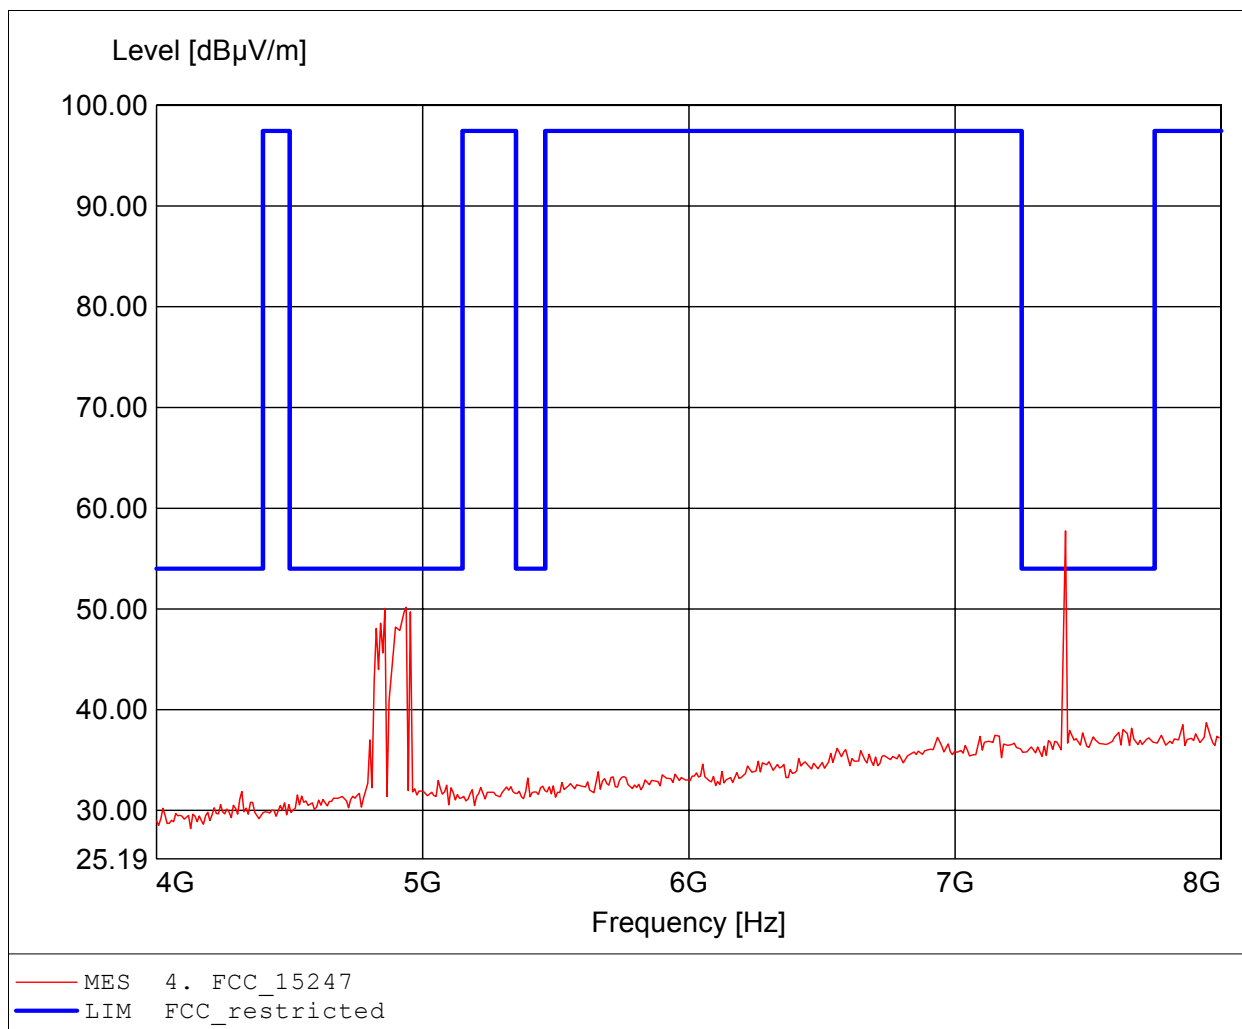

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.415GHz, Emax: 30.88dBµV/m, RBW: 1MHz

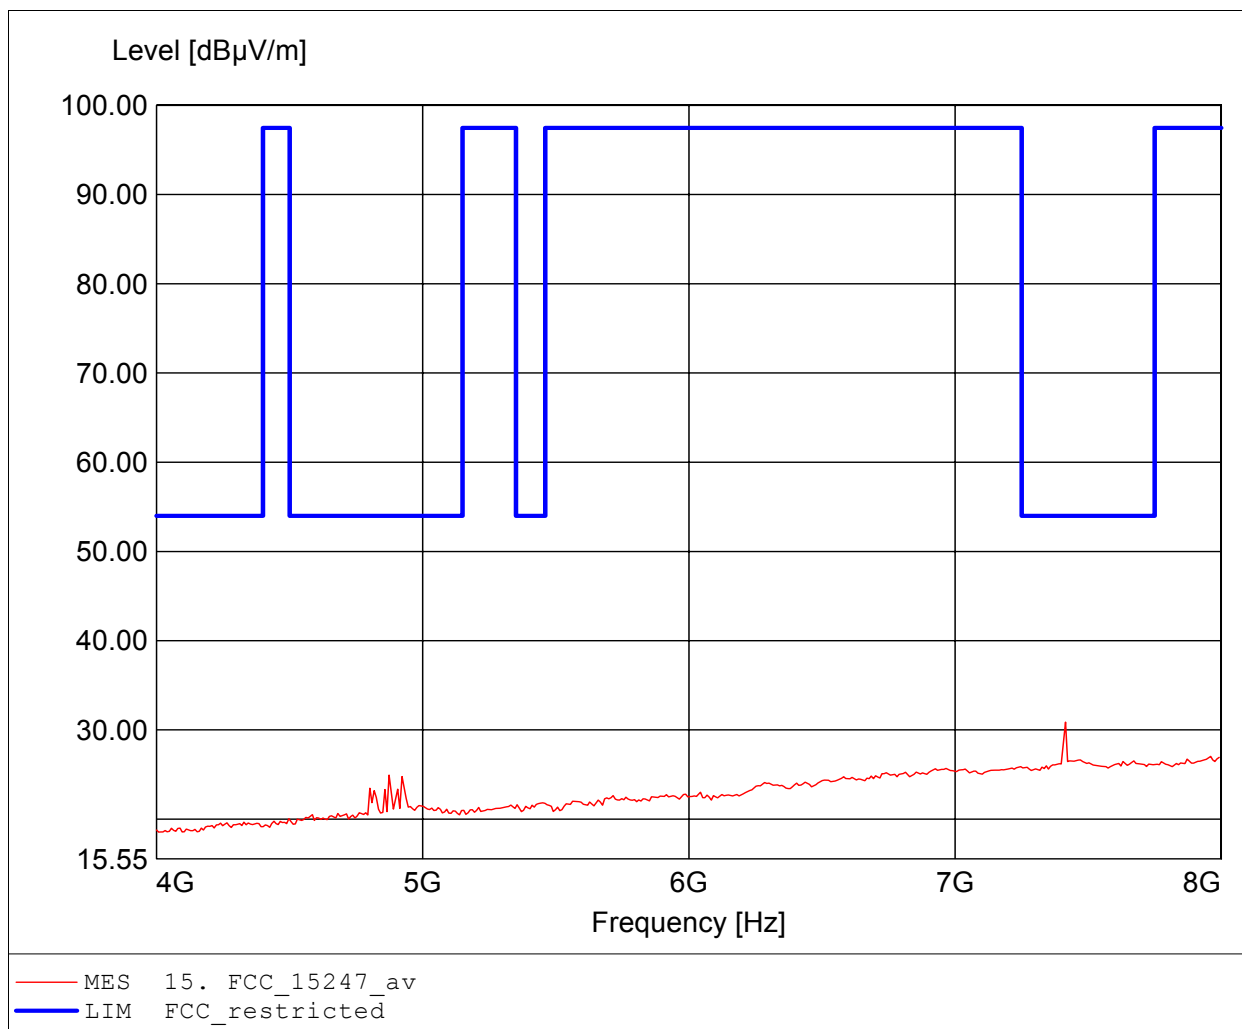

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.415GHz, Emax: 52.57dBµV/m, RBW: 1MHz

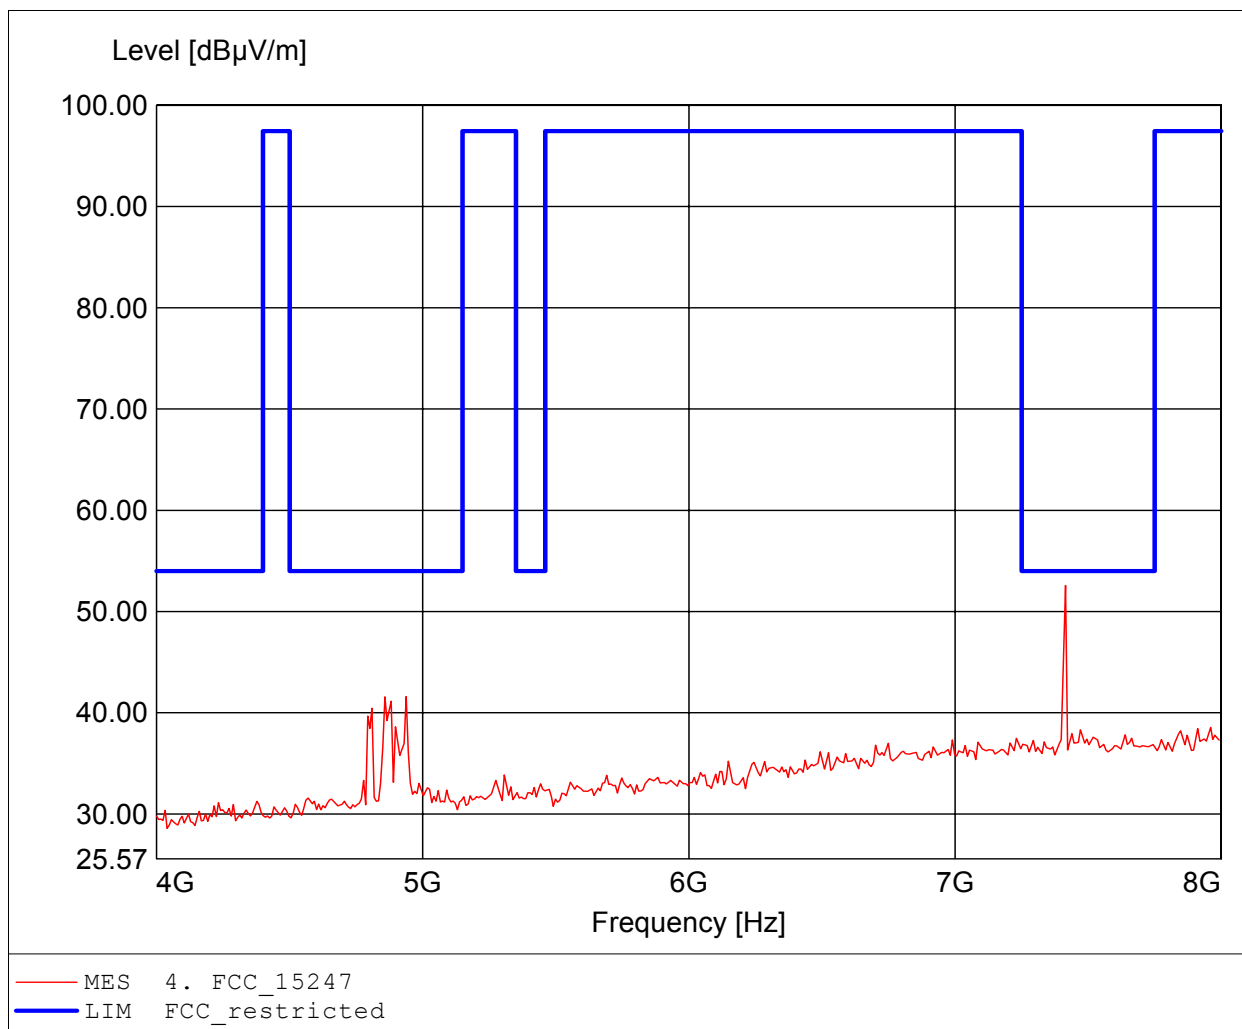

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.198GHz, Emax: 42.51dBµV/m, RBW: 1MHz

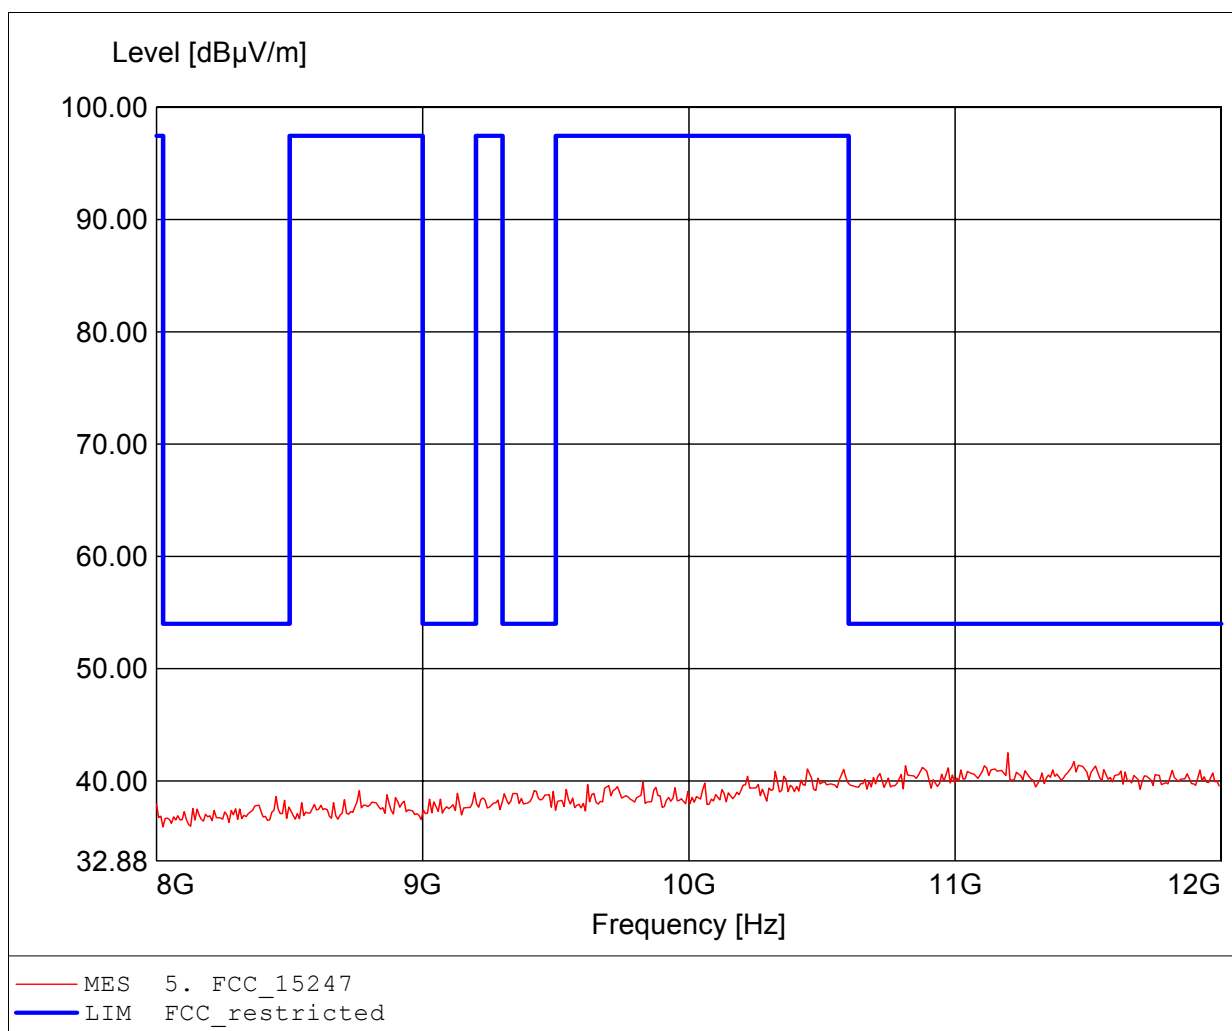

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.094GHz, Emax: 42.47dBµV/m, RBW: 1MHz

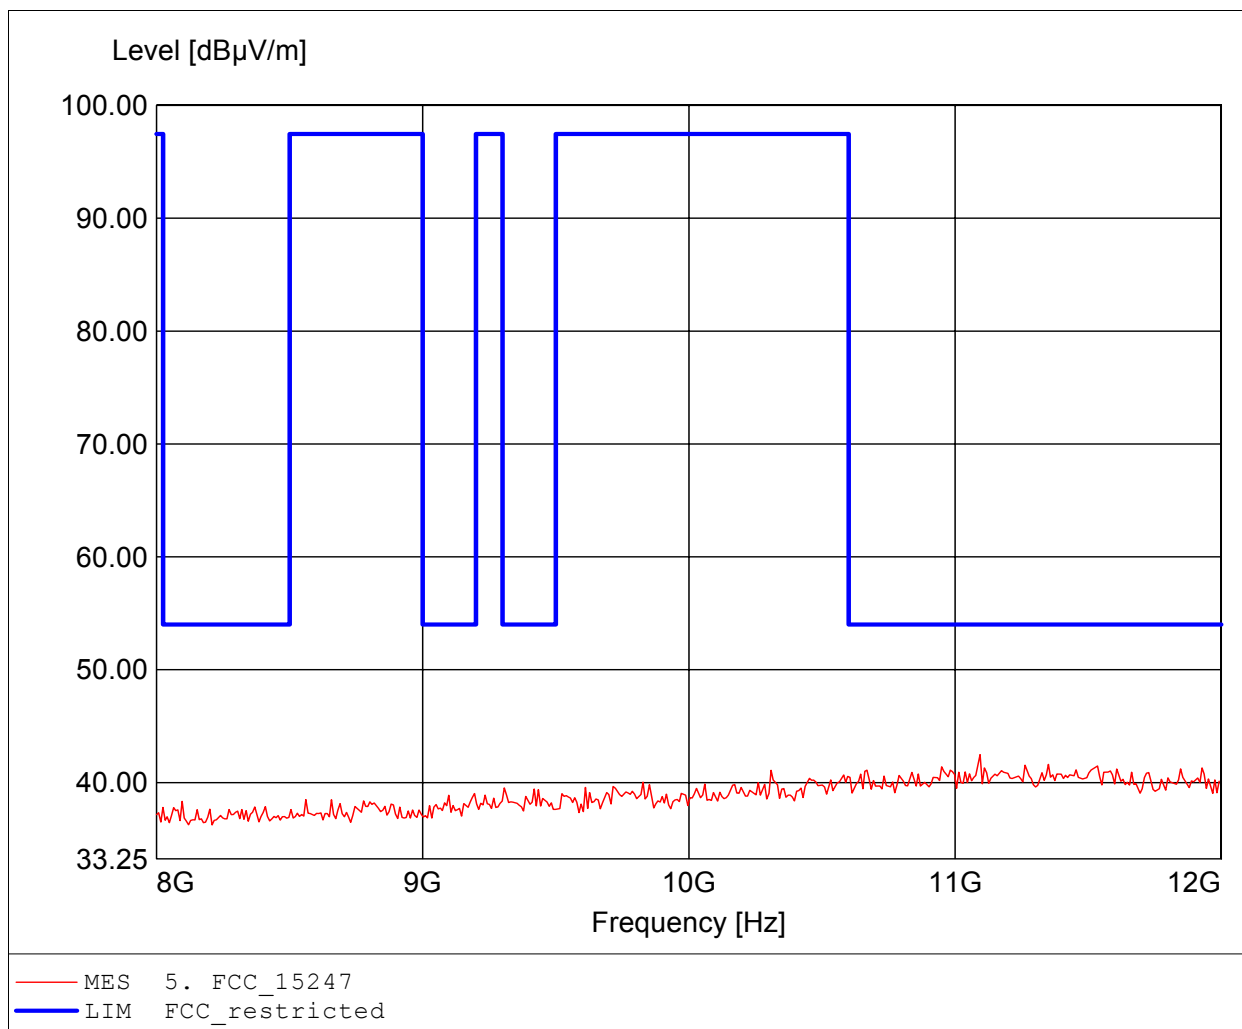

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.351GHz, Emax: 58.96dBµV/m, RBW: 1MHz

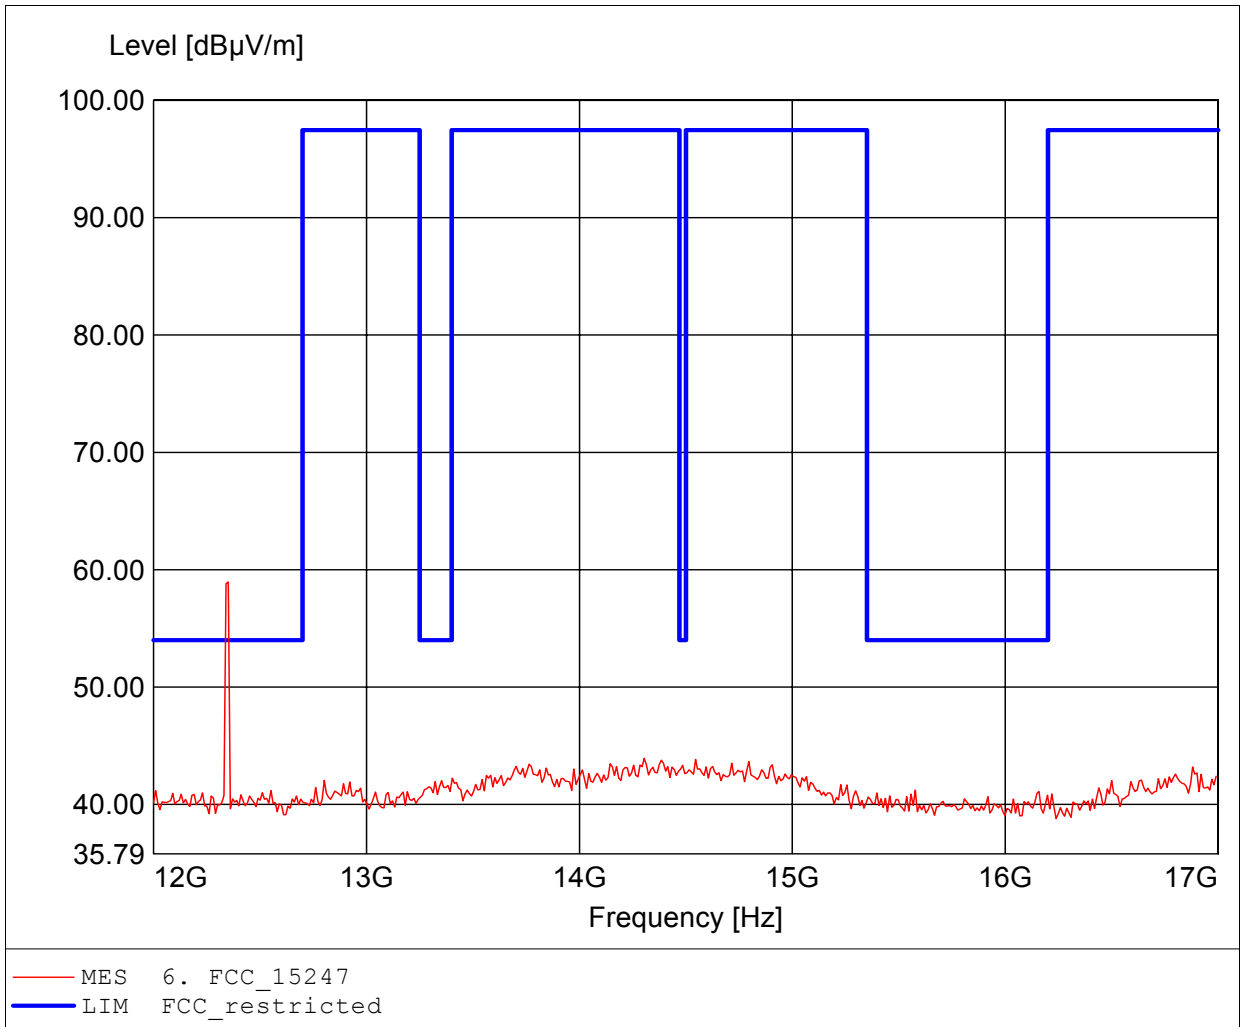

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.341GHz, Emax: 36.57dBµV/m, RBW: 1MHz

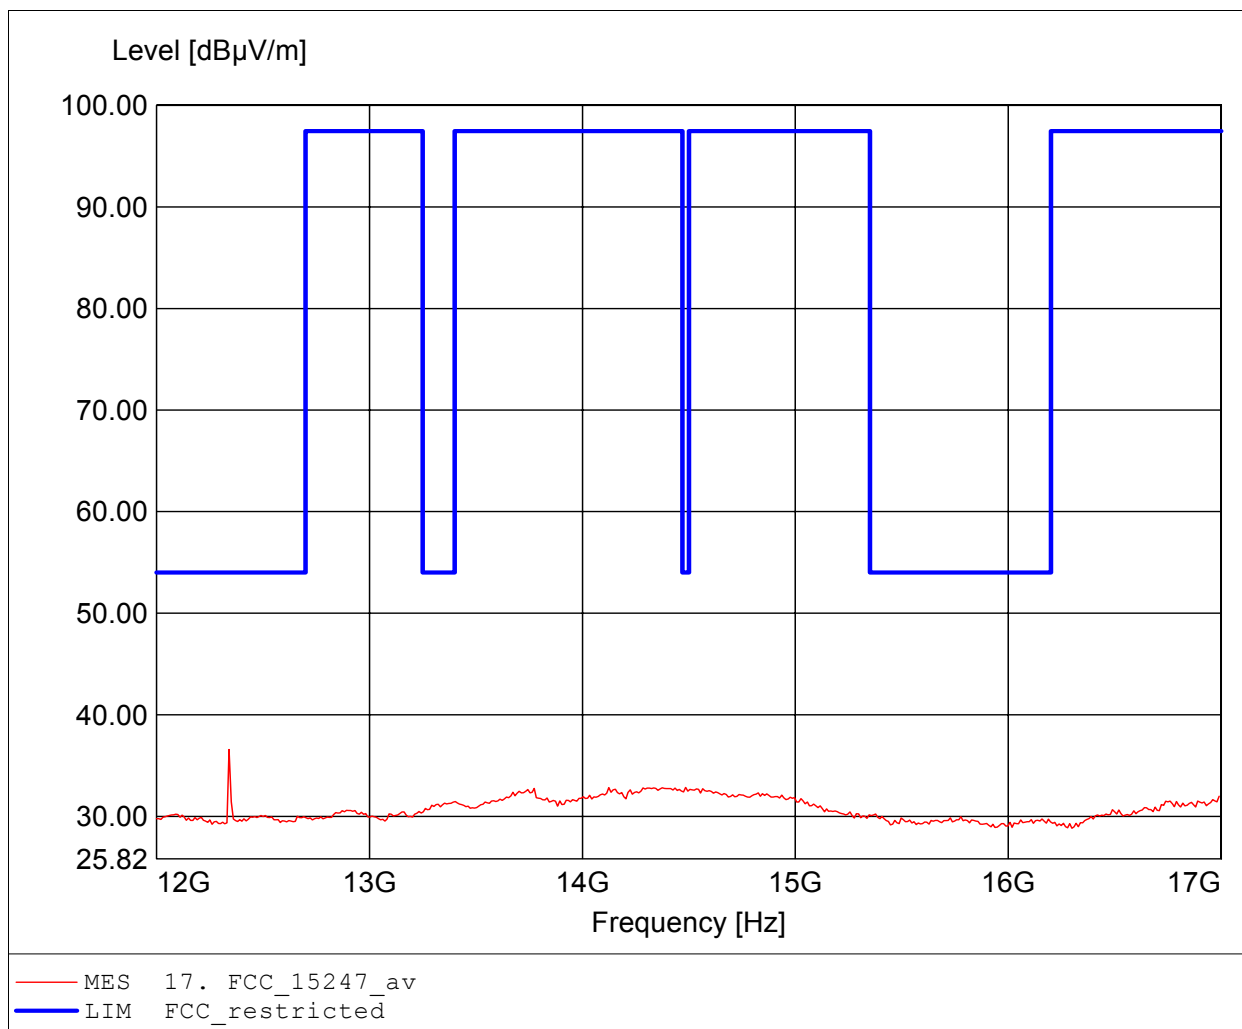

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.341GHz, Emax: 50.01dBµV/m, RBW: 1MHz

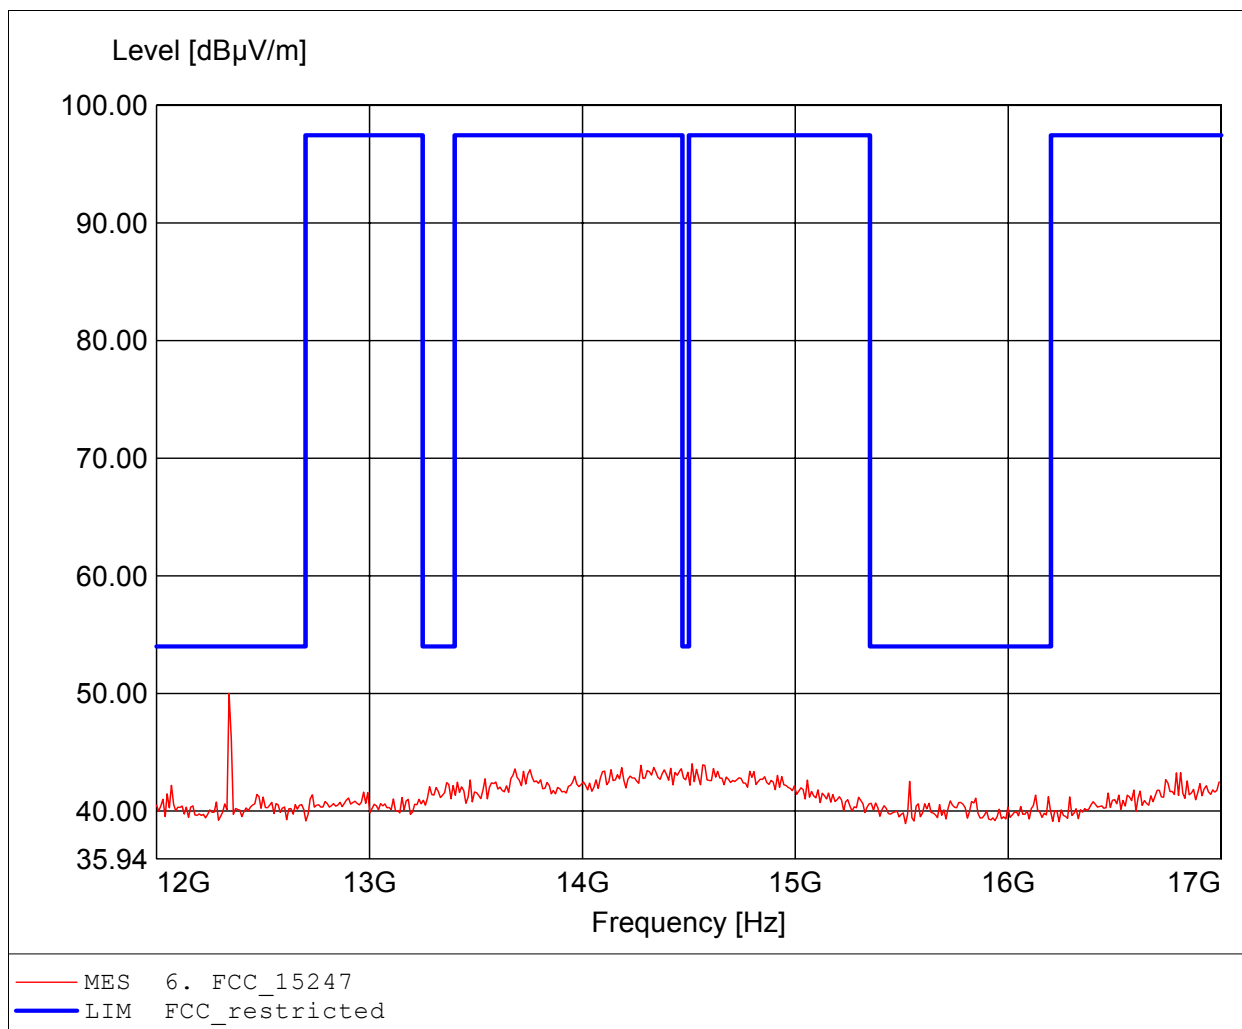

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.152GHz, Emax: 44.96dBµV/m, RBW: 1MHz

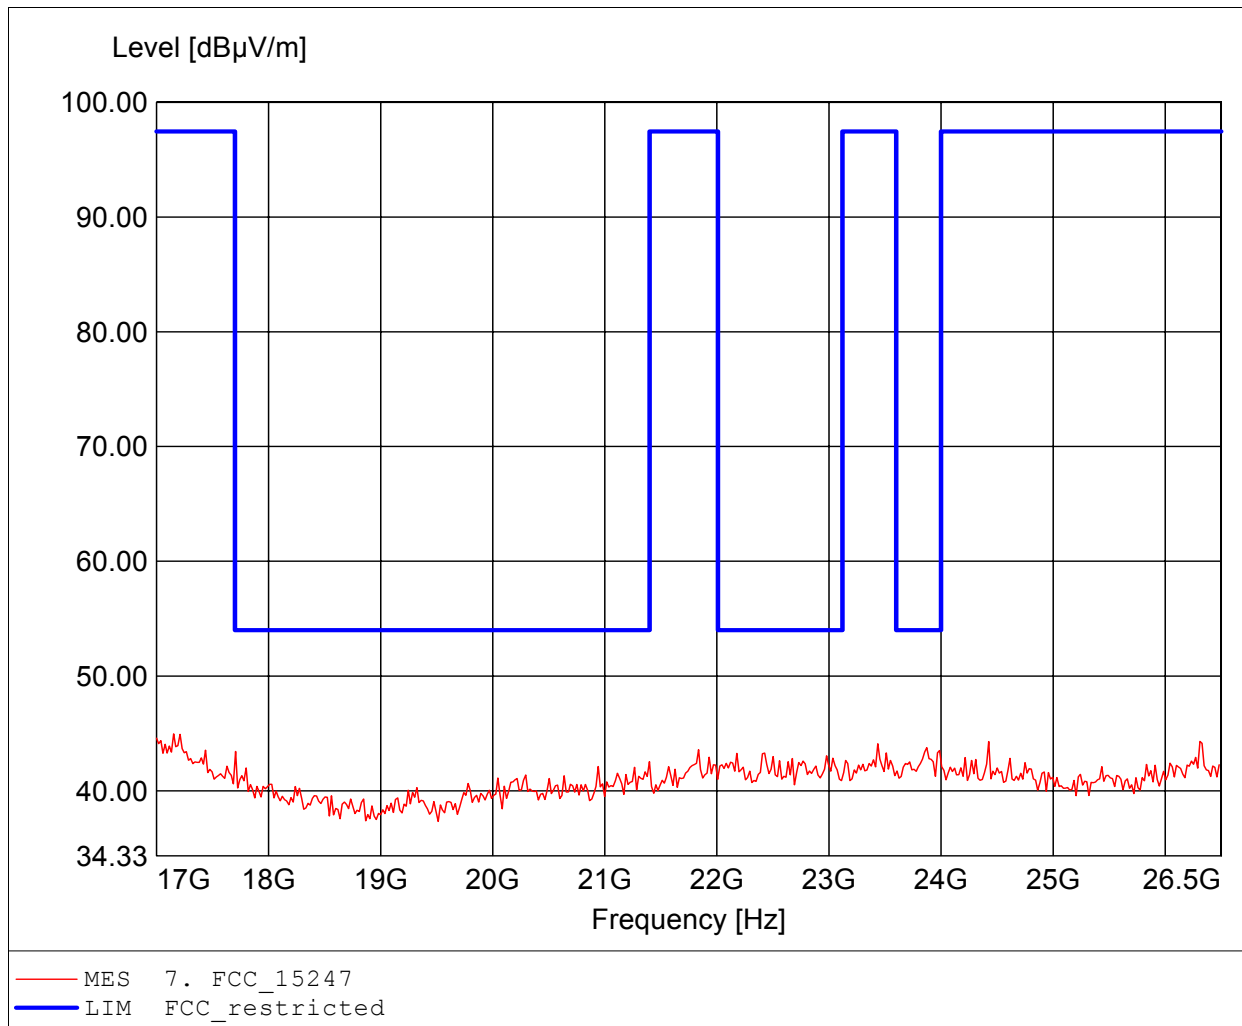

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: Leica Geosystem AG
EUT: Handheld Computer
Model: RX1250T / Ch.: 74
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 7.4 V DC (battery)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 45.17dBµV/m, RBW: 1MHz

