

| <b>FCC TEST REPORT</b><br><b>FCC 47 CFR Part 15C</b><br><b>Industry Canada RSS-210</b><br><b>Digital transmission systems operating within the 2400 – 2483.5 MHz band</b> |   |
|---|---|
| <b>Report Reference No.</b> .....   | G0M-1407-4002-TFC247BL-V01  |
| <b>Testing Laboratory</b> .....   | Eurofins Product Service GmbH   |
| Address.....  | Storkower Str. 38c<br>15526 Reichenwalde<br>Germany   |
| Accreditation .....   | <div style="display: flex; justify-content: center; align-items: center;">   </div> <p style="text-align: center; margin-top: 5px;"> A2LA Accredited Testing Laboratory, Certificate No.: 1983.01<br/> FCC Filed Test Laboratory, Reg.-No.: 96970<br/> IC OATS Filing assigned code: 3470A </p> |
| <b>Applicant's name</b> .....   | Leica Geosystems AG   |
| Address.....  | Heinrich Wild Strasse<br>9435 Heerbrugg<br>SWITZERLAND  |
| <b>Test specification:</b>  |   |
| Standard .....  | 47 CFR Part 15C<br>KDB Publication No. 558074<br>RSS-210, Issue 8, 2010-12<br>RSS-Gen, Issue 3, 2010-12<br>ANSI C63.4:2009  |
| <b>Equipment under test (EUT):</b>  |   |
| Product description   | Laser Distance Meter  |
| Model No.   | Leica DISTO S910  |
| Additional Model(s)   | None  |
| Brand Name(s)   | Leica DISTO   |
| Hardware version  | V15   |
| Firmware / Software version   | 2323  |
|   | FCC-ID: RFF-LD5PS                      IC: 3177A-LD5PS  |
| <b>Test result</b>  | <b>Passed</b>   |

**Possible test case verdicts:**

- neither assessed nor tested .....: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object .....: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

**Testing:**

Test Lab Temperature.....: 20 – 23 °C

Test Lab Humidity .....: 32 – 38 %

Date of receipt of test item .....: 2014-08-04

Date (s) of performance of tests .....: 2014-09-04 – 2014-09-11

Compiled by .....: Wilfried Treffke

Tested by (+ signature).....: Wilfried Treffke *W. Treffke*  
 (Responsible for Test) .....

Approved by (+ signature) .....: Christian Weber *C. Weber*  
 .....

Date of issue .....: 2014-12-05

Total number of pages .....: 83

**General remarks:**

**The test results presented in this report relate only to the object tested.**  
**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

---

## Version History

| Version | Issue Date | Remarks         | Revised by |
|---------|------------|-----------------|------------|
| 01      | 2014-09-30 | Initial Release |            |

---

## REPORT INDEX

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>                        | <b>5</b>  |
| 1.1      | Photos – Equipment External                                     | 6         |
| 1.2      | Photos – Equipment internal                                     | 8         |
| 1.3      | Photos – Test setup   | 13        |
| 1.4      | Supporting Equipment Used During Testing                        | 14        |
| 1.5      | Test Modes  | 15        |
| 1.6      | Test Equipment Used During Testing                              | 16        |
| 1.7      | Sample emission level calculation                               | 18        |
| <b>2</b> | <b>RESULT SUMMARY</b>   | <b>19</b> |
| <b>3</b> | <b>TEST CONDITIONS AND RESULTS</b>                              | <b>20</b> |
| 3.1      | Test Conditions and Results – Occupied Bandwidth                | 20        |
| 3.2      | Test Conditions and Results – 6 dB Bandwidth                    | 24        |
| 3.3      | Test Conditions and Results – Maximum peak conducted power      | 28        |
| 3.4      | Test Conditions and Results – Power spectral density            | 29        |
| 3.5      | Test Conditions and Results – AC power line conducted emissions | 30        |
| 3.6      | Test Conditions and Results – Band edge compliance              | 33        |
| 3.7      | Test Conditions and Results – Conducted spurious emissions      | 36        |
| 3.8      | Test Conditions and Results – Transmitter radiated emissions    | 40        |
| 3.9      | Test Conditions and Results – Receiver radiated emissions       | 42        |
| ANNEX A  | Transmitter radiated spurious emissions                         | 44        |
| ANNEX B  | Receiver radiated spurious emissions                            | 76        |

## 1 Equipment (Test item) Description

|                                    |  |                             |
|------------------------------------|--|-----------------------------|
| <b>Description</b>                 | Laser Distance Meter   |                             |
| <b>Model</b>                       | Leica DISTO S910   |                             |
| <b>Additional Model(s)</b>         | None   |                             |
| <b>Brand Name(s)</b>               | Leica DISTO  |                             |
| <b>Serial number</b>               | 4  |                             |
| <b>Hardware version</b>            | V15  |                             |
| <b>Software / Firmware version</b> | 2323   |                             |
| <b>FCC-ID</b>                      | RFF-LD5PS  |                             |
| <b>IC</b>                          | 3177A-LD5PS  |                             |
| <b>Equipment type</b>              | End product  |                             |
| <b>Radio type</b>                  | Transceiver  |                             |
| <b>Radio technology</b>            | Bluetooth 4.0 Low Energy   |                             |
| <b>Operating frequency range</b>   | 2402 - 2480 MHz  |                             |
| <b>Assigned frequency band</b>     | 2400 - 2483.5 MHz  |                             |
| <b>Main test frequencies</b>       | F <sub>LOW</sub>   | 2402 MHz                    |
|                                    | F <sub>MID</sub>   | 2442 MHz                    |
|                                    | F <sub>HIGH</sub>  | 2480 MHz                    |
| <b>Spreading</b>                   | Frequency Hopping  |                             |
| <b>Modulations</b>                 | GFSK   |                             |
| <b>Number of channels</b>          | 40   |                             |
| <b>Channel spacing</b>             | 2MHz   |                             |
| <b>Number of antennas</b>          | 1  |                             |
| <b>Antenna</b>                     | Type   | integrated                  |
|                                    | Model  | 2450AT18B100                |
|                                    | Manufacturer   | Johanson Technology         |
|                                    | Gain   | -0.5 dBi (from declaration) |
| <b>Manufacturer</b>                | Flextronics International GmbH<br>Friesacher Strasse 3<br>9330 Althofen<br>AUSTRIA |                             |
| <b>Power supply</b>                | V <sub>NOM</sub>   | 3.6VDC                      |
|                                    | V <sub>MIN</sub>   | 2.7VDC                      |
|                                    | V <sub>MAX</sub>   | 4.25VDC                     |
| <b>AC/DC-Adaptor</b>               | Model  | KS044067                    |
|                                    | Vendor   | Ktec                        |
|                                    | Input  | 100-240 VAC                 |
|                                    | Output   | 5 VDC                       |

#### 1.4 Supporting Equipment Used During Testing

| Product Type*   | Device | Manufacturer | Model No. | Comments |
|---|--------|--------------|-----------|----------|
| None  |        |              |           |          |
| <p><b>*Note:</b> Use the following abbreviations:</p> <p>AE : Auxiliary/Associated Equipment, or</p> <p>SIM : Simulator (Not Subjected to Test)</p> <p>CABL : Connecting cables</p> |        |              |           |          |

**1.5 Test Modes**

| Mode #       | Description         |   |
|--------------|---------------------|---|
| Transmit     | General conditions: | EUT powered by battery.   |
|              | Radio conditions:   | Mode = standalone transmit<br>Spreading = Hopping stopped (single hopping channel)<br>Modulation = GFSK<br>Data rate = 1 Mbps<br>Bandwidth = 2 MHz<br>Duty cycle = 100 %<br>Power level = Maximum |
| Receive      | General conditions: | EUT powered by battery.   |
|              | Radio conditions:   | Mode = standalone receive (scan mode)<br>Spreading = On<br>Modulation = GFSK  |
| AC-Powerline | General conditions: | EUT powered by AC/DC Adaptor  |
|              | Radio conditions:   | Mode = Transmit<br>Spreading = On   |

**1.6 Test Equipment Used During Testing**

| <b>Measurement Software</b> |                  |            |           |
|-----------------------------|------------------|------------|-----------|
| Description                 | Manufacturer     | Name       | Version   |
| EMC Test Software           | Dare Instruments | Radimation | 2014.1.15 |

| <b>Occupied Bandwidth</b> |              |        |            |           |          |
|---------------------------|--------------|--------|------------|-----------|----------|
| Description               | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer         | R&S          | FSP 30 | EF00312    | 2014-02   | 2015-02  |

| <b>6dB Bandwidth</b> |              |        |            |           |          |
|----------------------|--------------|--------|------------|-----------|----------|
| Description          | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer    | R&S          | FSP 30 | EF00312    | 2014-02   | 2015-02  |

| <b>Maximum peak conducted power</b> |              |        |            |           |          |
|-------------------------------------|--------------|--------|------------|-----------|----------|
| Description                         | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer                   | R&S          | FSP 30 | EF00312    | 2014-02   | 2015-02  |

| <b>Power spectral density</b> |              |        |            |           |          |
|-------------------------------|--------------|--------|------------|-----------|----------|
| Description                   | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer             | R&S          | FSP 30 | EF00312    | 2014-02   | 2015-02  |

| <b>Band edge compliance</b> |              |        |            |           |          |
|-----------------------------|--------------|--------|------------|-----------|----------|
| Description                 | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer           | R&S          | FSP 30 | EF00312    | 2014-02   | 2015-02  |

| <b>Conducted spurious emissions</b> |              |        |            |           |          |
|-------------------------------------|--------------|--------|------------|-----------|----------|
| Description                         | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer                   | R&S          | FSP 30 | EF00312    | 2014-02   | 2015-02  |

| <b>Radiated spurious emissions</b> |              |        |            |           |          |
|------------------------------------|--------------|--------|------------|-----------|----------|
| Description                        | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Semi-anechoic chamber              | Frankonia    | AC 1   | EF00062    | 2013-01   | 2015-01  |
| Spectrum Analyzer                  | R&S          | FSIQ26 | EF00242    | 2014-03   | 2015-03  |
| Biconical Antenna                  | R&S          | HK 116 | EF00012    | 2013-02   | 2016-02  |
| LPD Antenna                        | R&S          | HL 223 | EF00187    | 2014-03   | 2017-03  |
| LPD Antenna                        | R&S          | HL 025 | EF00327    | 2013-02   | 2016-02  |



| AC powerline conducted emissions |              |         |            |           |          |
|----------------------------------|--------------|---------|------------|-----------|----------|
| Description                      | Manufacturer | Model   | Identifier | Cal. Date | Cal. Due |
| AMN                              | R&S          | ESH2-Z5 | EF00182    | 2012-10   | 2014-10  |
| AMN                              | R&S          | ESH3-Z5 | EF00036    | 2012-11   | 2014-11  |
| EMI Test Receiver                | R&S          | ESCS 30 | EF00295    | 2013-10   | 2014-10  |

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:


$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

| FCC 47 CFR Part 15C, IC RSS-210  |   |  |        |                    |
|--|---|--|--------|--------------------|
| Product Specific Standard Section  | Requirement – Test                      | Reference Method                               | Result | Remarks            |
| RSS-Gen 4.6.1  | Occupied Bandwidth                      | RSS-Gen 4.6.1                                  | N/R    | Informational only |
| FCC § 15.247(a)(2)<br>IC RSS-210 § A8.2  | 6dB Bandwidth                           | KDB Publication<br>No. 558074                  | PASS   |                    |
| FCC § 15.247(b)(3)<br>IC RSS-210 § A8.4  | Maximum peak conducted power            | KDB Publication<br>No. 558074                  | PASS   |                    |
| FCC § 15.247(e)<br>IC RSS-210 § A8.2   | Power spectral density                  | KDB Publication<br>No. 558074                  | PASS   |                    |
| 47 CFR 15.207<br>RSS-Gen 7.2.4   | AC power line conducted emissions       | KDB Publication<br>No. 558074 /<br>ANSI C63.4  | PASS   |                    |
| FCC § 15.247(d)<br>IC RSS-210 § A8.5   | Band edge compliance                    | KDB Publication<br>No. 558074                  | PASS   |                    |
| FCC § 15.247(d)<br>IC RSS-210 § A8.5   | Conducted spurious emissions            | KDB Publication<br>No. 558074                  | PASS   |                    |
| FCC § 15.247(d)<br>FCC § 15.209<br>IC RSS-210 A8.5<br>IC RSS-Gen 4.9<br>IC RSS-Gen 7.2.5 | Transmitter radiated spurious emissions | KDB Publication<br>No. 558074 /<br>ANSI C 63.4 | PASS   |                    |
| IC RSS-Gen 4.10<br>IC RSS-Gen 6.1  | Receiver radiated spurious emissions    | ANSI C 63.4                                    | PASS   |                    |
| <b>Remarks:</b>  |   |  |        |                    |

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Occupied Bandwidth


| Occupied Bandwidth acc. IC RSS-Gen   |                                | Verdict: PASS |                          |
|--|--------------------------------|---------------|--------------------------|
| Test according to measurement reference  | Reference Method               |               |                          |
|  | RSS-Gen 4.6.1                  |               |                          |
| Test frequency range   | Tested frequencies             |               |                          |
|  | $F_{LOW} / F_{MID} / F_{HIGH}$ |               |                          |
| <b>Limits</b>  |                                |               |                          |
| None (Informational only)  |                                |               |                          |
| <b>Test setup</b>  |                                |               |                          |
|   |                                |               |                          |
| <b>Test procedure</b>  |                                |               |                          |
| <ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Resolution bandwidth set to 1 % of span</li> <li>4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function</li> </ol> |                                |               |                          |
| <b>Test results</b>  |                                |               |                          |
| Channel  | Frequency [MHz]                | Mode          | Occupied Bandwidth [kHz] |
| $F_{LOW}$  | 2402                           | Transmit      | 1075                     |
| $F_{MID}$  | 2442                           | Transmit      | 1177                     |
| $F_{HIGH}$   | 2480                           | Transmit      | 2647                     |
| Comments:  |                                |               |                          |

Occupied Bandwidth – F<sub>Low</sub>

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2402 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: A spectrum analyzer with an integrated 99% power bandwidth funktion is used  
 Note 2: conducted measurement

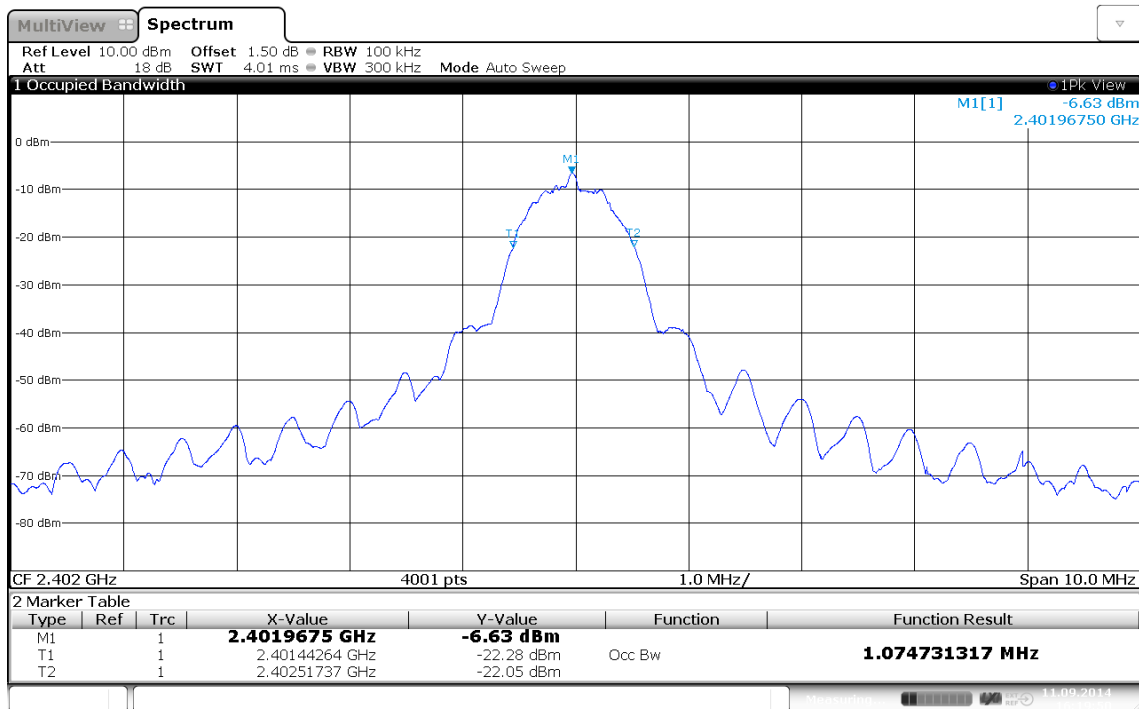


Occupied bandwidth: 1074.7 KHz  
 Date: 11.SEP.2014 16:19:50

Occupied Bandwidth – F<sub>MID</sub>

Occupied Bandwidth acc. to RSS-Gen

Project Number: G0M-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2440 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: A spectrum analyzer with an integrated 99% power bandwidth funktion is used  
 Note 2: conducted measurement

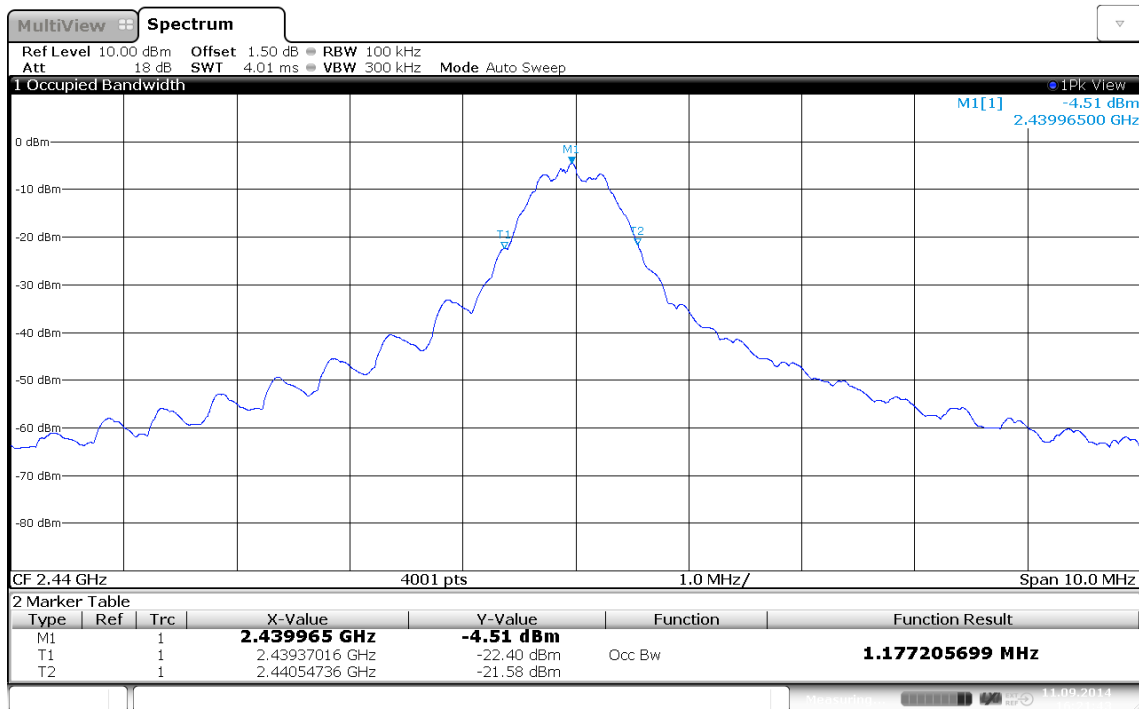

Occupied Bandwidth – F<sub>HIGH</sub>

Occupied Bandwidth acc. to RSS-Gen


Project Number: G0M-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2480 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: A spectrum analyzer with an integrated 99% power bandwidth funktion is used  
 Note 2: conducted measurement



Occupied bandwidth: 2646.8 KHz  
 Date: 11.SEP.2014 16:23:18

### 3.2 Test Conditions and Results – 6 dB Bandwidth

| 6dB Bandwidth acc. FCC 15.247 / IC RSS-210   |                                    |          |                      | Verdict: PASS |        |
|--|------------------------------------|----------|----------------------|---------------|--------|
| EUT requirement rule parts and clause  | Reference                          |          |                      |               |        |
|  | FCC 15.247(a)(2) / IC RSS-210 A8.2 |          |                      |               |        |
| Test according to measurement reference  | Reference Method                   |          |                      |               |        |
|  | FCC KDB Publication No. 558074     |          |                      |               |        |
| Test frequency range   | Tested frequencies                 |          |                      |               |        |
|  | $F_{LOW} / F_{MID} / F_{HIGH}$     |          |                      |               |        |
| <b>Limit</b>   |                                    |          |                      |               |        |
| ≥ 500kHz   |                                    |          |                      |               |        |
| <b>Test setup</b>  |                                    |          |                      |               |        |
|  <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]             </pre>   |                                    |          |                      |               |        |
| <b>Test procedure</b>  |                                    |          |                      |               |        |
| <ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Detector set to peak and max hold and RBW is set to 100 kHz</li> <li>4. Envelope peak value of emission spectrum is selected</li> <li>5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak</li> <li>6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak</li> <li>7. 6 dB Bandwidth is determined by marker frequency separation</li> </ol> |                                    |          |                      |               |        |
| <b>Test results</b>  |                                    |          |                      |               |        |
| Channel  | Frequency [MHz]                    | Mode     | 6 dB Bandwidth [kHz] | Limit [kHz]   | Result |
| $F_{LOW}$  | 2402                               | Transmit | 675.4                | 500           | PASS   |
| $F_{MID}$  | 2442                               | Transmit | 719.5                | 500           | PASS   |
| $F_{HIGH}$   | 2480                               | Transmit | 769.7                | 500           | PASS   |
| Comments:  |                                    |          |                      |               |        |




6 dB Bandwidth – F<sub>Low</sub>

**Minimum 6 dB Bandwidth acc. to FCC 15.247**

Project Number: G0M-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2402 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: PASS  
 Note 1: Procedure 8.1 DTS (558074 D01 Meas Guidance)  
 Note 2: Minimum 6 dB Bandwidth conducted

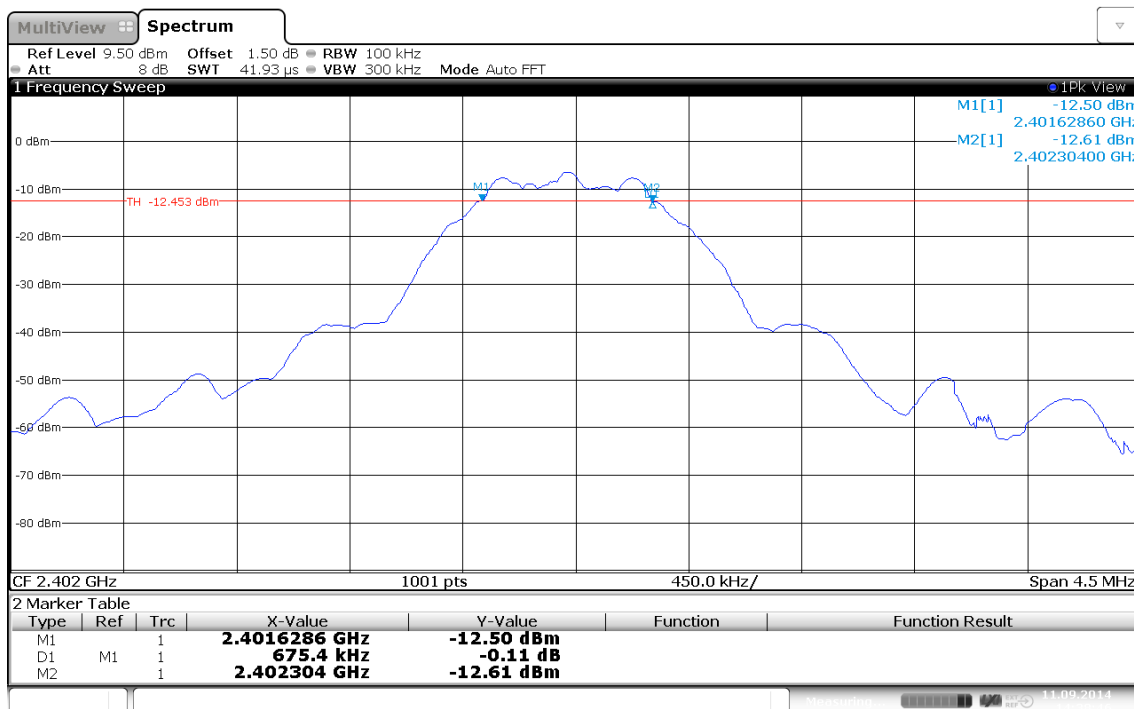


6 dB bandwidth: 675.4 kHz > 500 kHz; verdict: PASS  
 Date: 11.SEP.2014 14:38:46

**6 dB Bandwidth – F<sub>MID</sub>**
**Minimum 6 dB Bandwidth acc. to FCC 15.247**

Project Number: G0M-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2440 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: PASS  
 Note 1: Procedure 8.1 DTS (558074 D01 Meas Guidance)  
 Note 2: Minimum 6 dB Bandwidth conducted

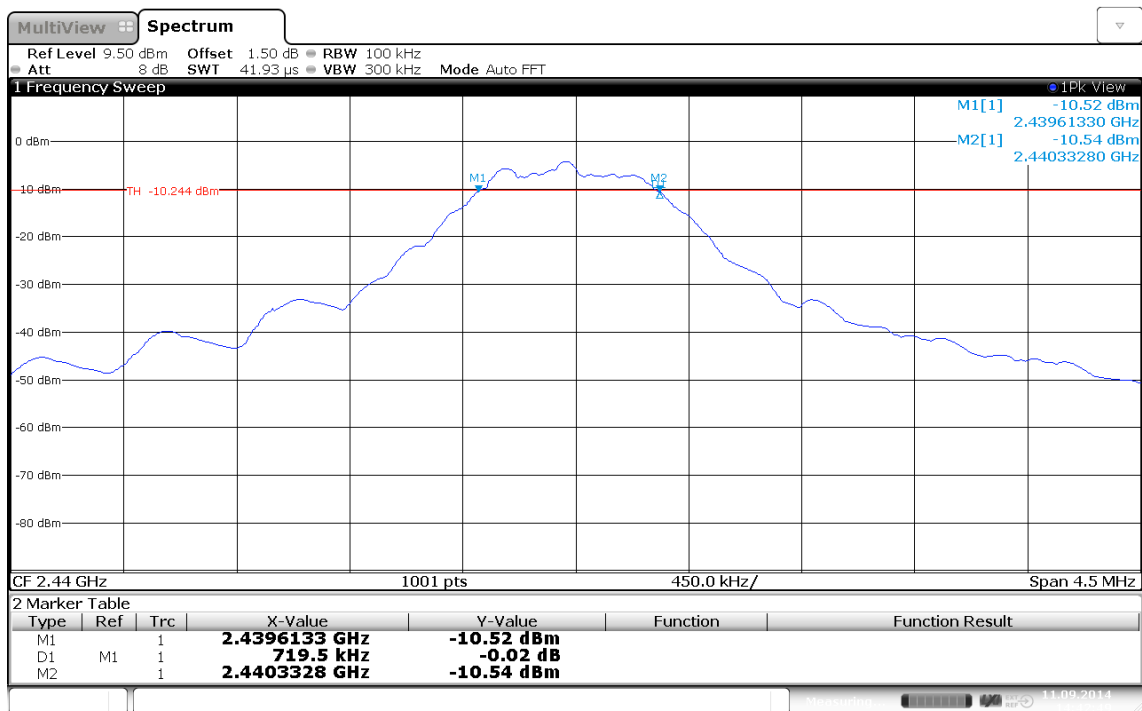


6 dB bandwidth: 719.5 kHz > 500 kHz; verdict: PASS  
 Date: 11.SEP.2014 14:42:48

6 dB Bandwidth – F<sub>HIGH</sub>

**Minimum 6 dB Bandwidth acc. to FCC 15.247**


Project Number: G0M-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2480 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: PASS  
 Note 1: Procedure 8.1 DTS (558074 D01 Meas Guidance)  
 Note 2: Minimum 6 dB Bandwidth conducted

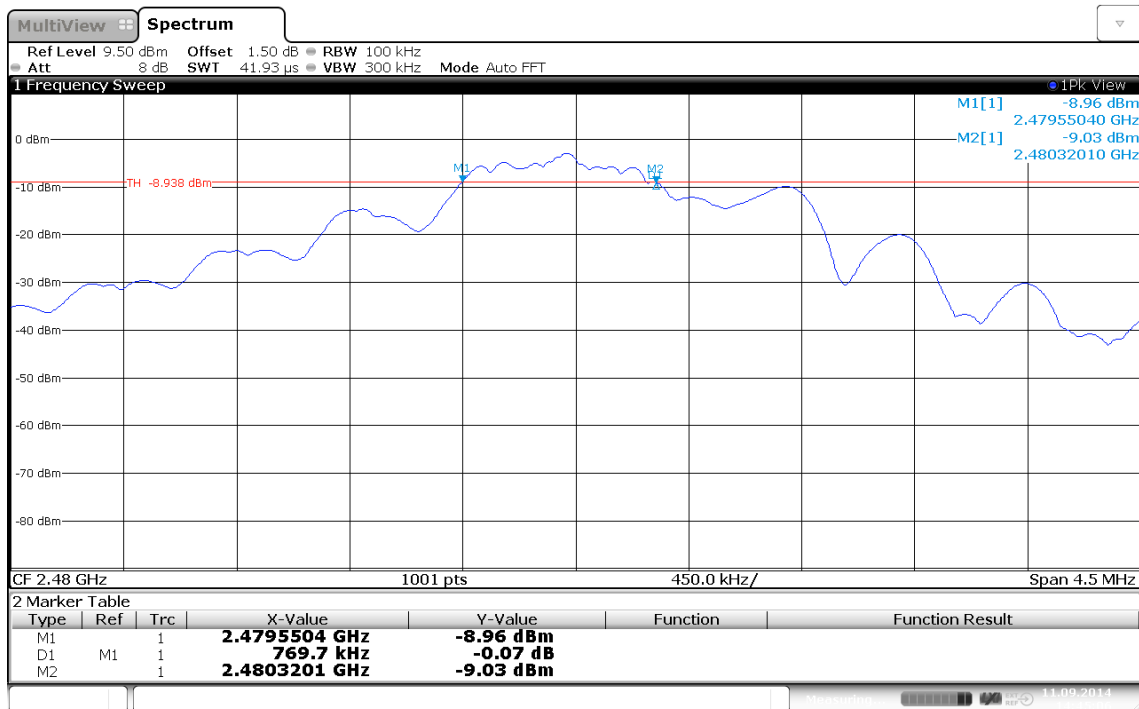


6 dB bandwidth: 769.7 KHz > 500 KHz; verdict: PASS  
 Date: 11.SEP.2014 14:45:05

**3.3 Test Conditions and Results – Maximum peak conducted power**

| <b>Maximum peak conducted power acc. FCC 15.247 / IC RSS-210</b>  |                 |  |          | <b>Verdict: PASS</b> |                |             |             |
|---|-----------------|--|----------|----------------------|----------------|-------------|-------------|
| EUT requirement rule parts and clause   |                 | Reference                                      |          |                      |                |             |             |
|   |                 | FCC 15.247(b)(3) / IC RSS-210 A8.4             |          |                      |                |             |             |
| Test according to measurement reference   |                 | Reference Method                               |          |                      |                |             |             |
|   |                 | FCC KDB Publication No. 558074                 |          |                      |                |             |             |
| Test frequency range  |                 | Tested frequencies                             |          |                      |                |             |             |
|   |                 | $F_{LOW} / F_{MID} / F_{HIGH}$                 |          |                      |                |             |             |
| Measurement mode  |                 | Peak   |          |                      |                |             |             |
| Maximum antenna gain  |                 | -0.5 dBi $\Rightarrow$ Limit correction = 0 dB |          |                      |                |             |             |
| <b>Limits</b>   |                 |  |          |                      |                |             |             |
| 1 W (30 dBm)  |                 |  |          |                      |                |             |             |
| The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. |                 |  |          |                      |                |             |             |
| <b>Test setup</b>   |                 |  |          |                      |                |             |             |
|   |                 |  |          |                      |                |             |             |
| <b>Test procedure</b>   |                 |  |          |                      |                |             |             |
| <ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Center frequency set to test channel center frequency</li> <li>3. Span set to twice the 20 dB bandwidth and detector to peak and max hold</li> <li>4. Resolution bandwidth is set to 3 MHz</li> <li>5. Peak conducted power is determined from peak of spectrum envelope</li> </ol>                 |                 |  |          |                      |                |             |             |
| <b>Test results</b>   |                 |  |          |                      |                |             |             |
| Channel   | Frequency [MHz] | Voltage  | Mode     | Peak power [dbm]     | Peak power [W] | Limit [dBm] | Margin [dB] |
| $F_{LOW}$   | 2402            | $V_{nom} = 3.6V$                               | Transmit | -6.68                | 0.001          | 30          | -36.64      |
| $F_{MID}$   | 2442            | $V_{nom} = 3.6V$                               | Transmit | -4.51                | 0.001          | 30          | -34.51      |
| $F_{HIGH}$  | 2480            | $V_{nom} = 3.6V$                               | Transmit | -3.70                | 0.001          | 30          | -33.10      |
| Comment:  |                 |  |          |                      |                |             |             |

3.4 Test Conditions and Results – Power spectral density
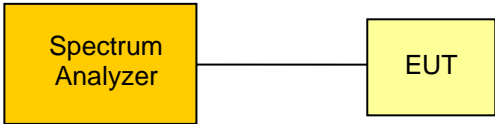
| Power spectral density acc. FCC 15.247 / IC RSS-210  |                                 |           |                      |                                 | Verdict: PASS    |        |
|--|---------------------------------|-----------|----------------------|---------------------------------|------------------|--------|
| EUT requirement rule parts and clause  | Reference                       |           |                      |                                 |                  |        |
|  | FCC 15.247(e) / IC RSS-210 A8.2 |           |                      |                                 |                  |        |
| Test according to measurement reference  | Reference Method                |           |                      |                                 |                  |        |
|  | FCC KDB Publication No. 558074  |           |                      |                                 |                  |        |
| Test frequency range   | Tested frequencies              |           |                      |                                 |                  |        |
|  | $F_{LOW} / F_{MID} / F_{HIGH}$  |           |                      |                                 |                  |        |
| Measurement mode   | Peak                            |           |                      |                                 |                  |        |
| <b>Limits</b>  |                                 |           |                      |                                 |                  |        |
| 8 dBm / 3 kHz  |                                 |           |                      |                                 |                  |        |
| <b>Test setup</b>  |                                 |           |                      |                                 |                  |        |
|  <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]             </pre>   |                                 |           |                      |                                 |                  |        |
| <b>Test procedure</b>  |                                 |           |                      |                                 |                  |        |
| <ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Center frequency set to test channel center frequency</li> <li>3. Span is set large enough to capture maximum emissions in passband, RBW is set to 3kHz</li> <li>4. Peak power density is determined from peak emission of envelope</li> </ol> |                                 |           |                      |                                 |                  |        |
| <b>Test results</b>  |                                 |           |                      |                                 |                  |        |
| Channel  | Frequency [MHz]                 | Test mode | Peak frequency [MHz] | Peak power density [dBm/100kHz] | Limit [dBm/3kHz] | Result |
| $F_{LOW}$  | 2402                            | Transmit  | 2.401966             | -6.6                            | 8.0              | Pass   |
| $F_{MID}$  | 2442                            | Transmit  | 2.439962             | -4.48                           | 8.0              | Pass   |
| $F_{HIGH}$   | 2480                            | Transmit  | 2.479959             | -3.19                           | 8.0              | Pass   |
| Comments:  |                                 |           |                      |                                 |                  |        |

**3.5 Test Conditions and Results – AC power line conducted emissions**


| <b>Power line conducted emissions acc. FCC 47 CFR 15.207 / IC RSS-Gen</b>    |                         | <b>Verdict: PASS</b> |                      |        |
|--|-------------------------|----------------------|----------------------|--------|
| Test according referenced standards  | Reference Method        |                      |                      |        |
|  | ANSI C63.4              |                      |                      |        |
| Fully configured sample scanned over the following frequency range           | Frequency range         |                      |                      |        |
|  | 0.15 MHz to 30 MHz      |                      |                      |        |
| Points of Application  | Application Interface   |                      |                      |        |
| AC Mains   | LISN                    |                      |                      |        |
| EUT test mode  | AC power line           |                      |                      |        |
| <b>Limits and results</b>  |                         |                      |                      |        |
| Frequency [MHz]  | Quasi-Peak [dB $\mu$ V] | Result               | Average [dB $\mu$ V] | Result |
| 0.15 to 5  | 66 to 56*               | PASS                 | 56 to 46*            | PASS   |
| 0.5 to 5   | 56                      | PASS                 | 46                   | PASS   |
| 5 to 30  | 60                      | PASS                 | 50                   | PASS   |
| Comments:<br>* Limit decreases linearly with the logarithm of the frequency. |                         |                      |                      |        |

**Conducted Emissions**
**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1407-4002

Manufacturer: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Zunke  
 Test Conditions: Tnom: 25°C, Unom: 120 VAC  
 LISN: ESH2-Z5 N  
 Mode: measure mode, charging, WLAN active  
 Test Date: 2014-09-09  
 Note:

Index 15

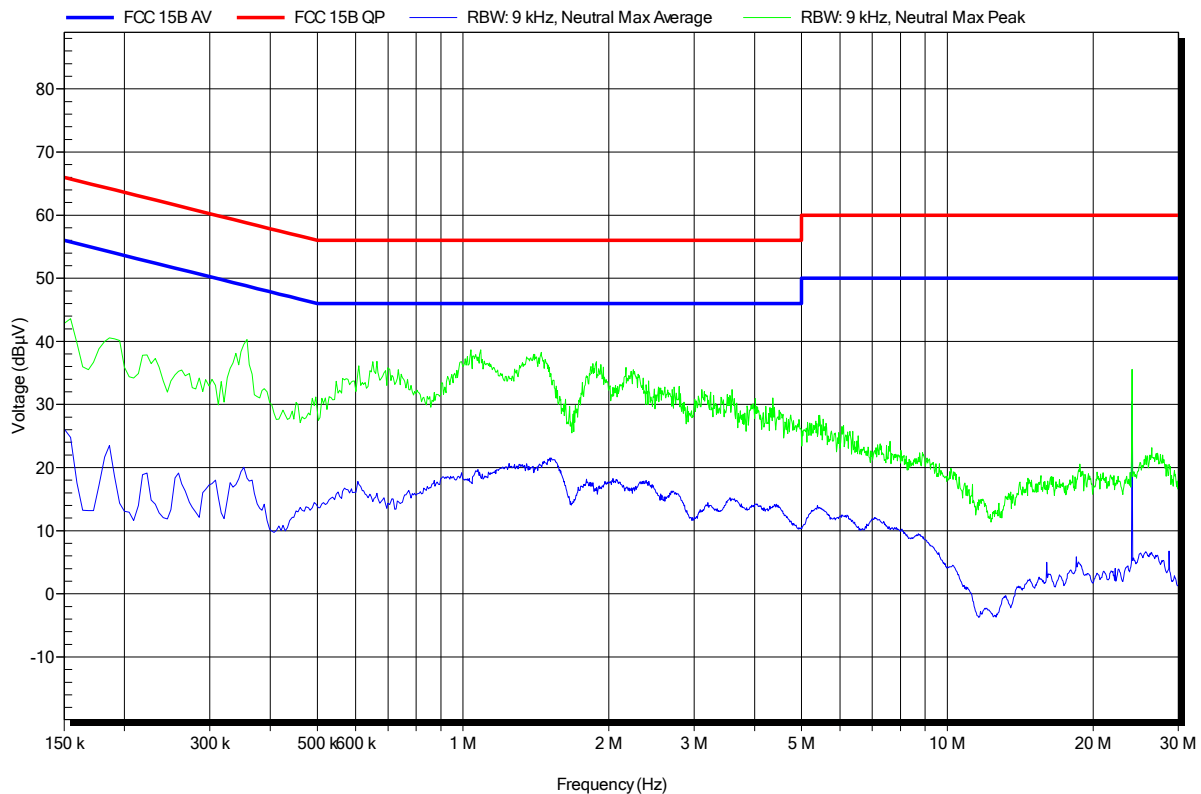

Test Report No.: G0M-1407-4002-TFC247BL-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Conducted Emissions**
**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1407-4002


Manufacturer: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Zunke  
 Test Conditions: Tnom: 25°C, Unom: 120 VAC  
 LISN: ESH2-Z5 L  
 Mode: measure mode, charging, WLAN active  
 Test Date: 2014-09-09  
 Note:

Index 16

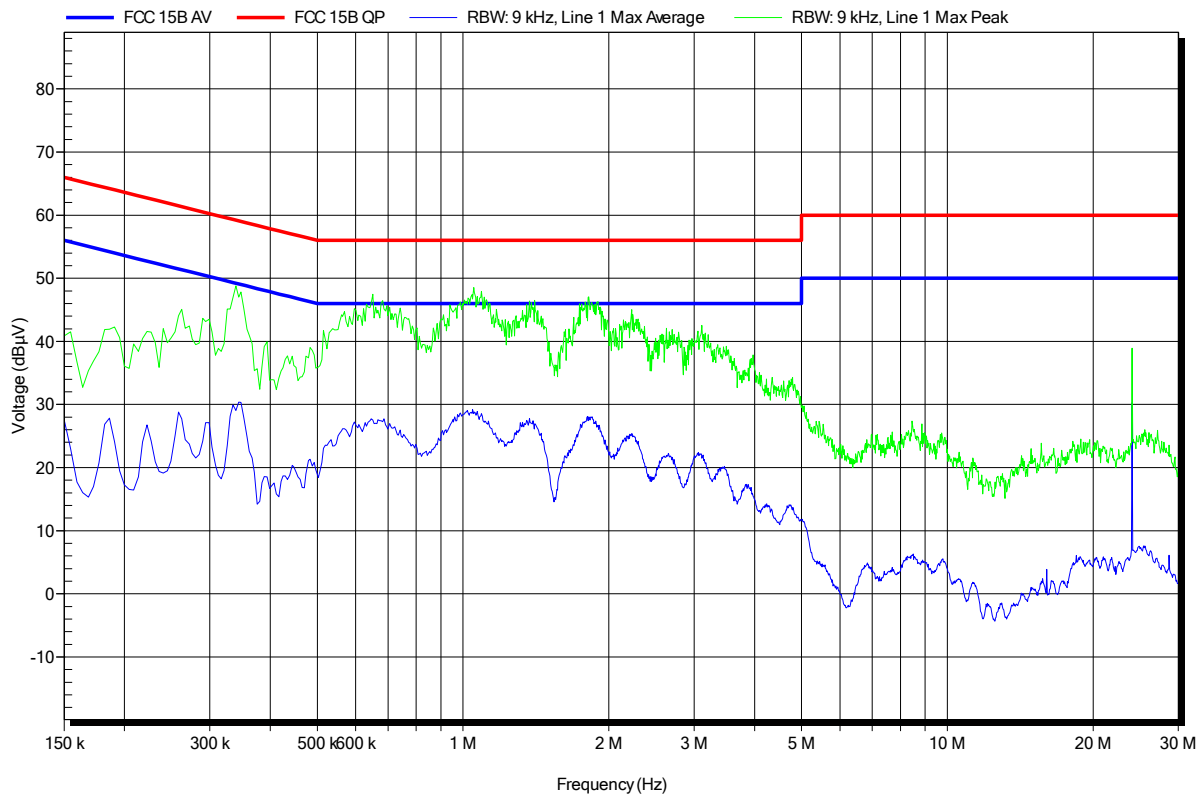




**3.6 Test Conditions and Results – Band edge compliance**

| Band-edge compliance acc. FCC 15.247 / IC RSS-210  |                 |                                 |  | Verdict: PASS |             |
|--|-----------------|---------------------------------|--|---------------|-------------|
| EUT requirement rule parts and clause  |                 | Reference                       |  |               |             |
|  |                 | FCC 15.247(d) / IC RSS-210 A8.5 |  |               |             |
| Test according to measurement reference  |                 | Reference Method                |  |               |             |
|  |                 | FCC KDB Publication No. 558074  |  |               |             |
| Test frequency range   |                 | Tested frequencies              |  |               |             |
|  |                 | $F_{LOW} / F_{HIGH}$            |  |               |             |
| Measurement mode   |                 | Peak                            |  |               |             |
| Limits   |                 |                                 |  |               |             |
| Limit  |                 |                                 | Condition                              |               |             |
| $\leq -20$ dB / 100 kHz  |                 |                                 | Peak power measurement detector = Peak |               |             |
| $\leq -30$ dB / 100 kHz  |                 |                                 | Peak power measurement detector = RMS  |               |             |
| Test setup   |                 |                                 |  |               |             |
|    |                 |                                 |  |               |             |
| Test procedure   |                 |                                 |  |               |             |
| <ol style="list-style-type: none"> <li>EUT set to test mode (Communication tester is used if needed)</li> <li>Span set around lower band edge and detector is set to peak and max hold</li> <li>Resolution bandwidth is set to 100 kHz</li> <li>Markers are set to peak emission levels within frequency band and outside frequency band</li> <li>Band edge attenuation is determined from level difference</li> </ol> |                 |                                 |  |               |             |
| Test results   |                 |                                 |  |               |             |
| Channel  | Frequency [MHz] | Mode                            | Level [dBc]                            | Limit [dBc]   | Margin [dB] |
| $F_{LOW}$  | 2402            | Transmit                        | -47.8                                  | -20           | -27.80      |
| $F_{HIGH}$   | 2480            | Transmit                        | -44.4                                  | -20           | -24.40      |
| Comments:  |                 |                                 |  |               |             |

**Band-edge compliance – lower band edge**
**Band-edge compliance acc. to FCC 15.247**

Project Number: G0M-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2402 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: PASS  
 Note 1: Procedure 13.2 Marker-delta method (558074 D01 Meas Guidance)  
 Note 2: lower Band-edge, conducted measurement

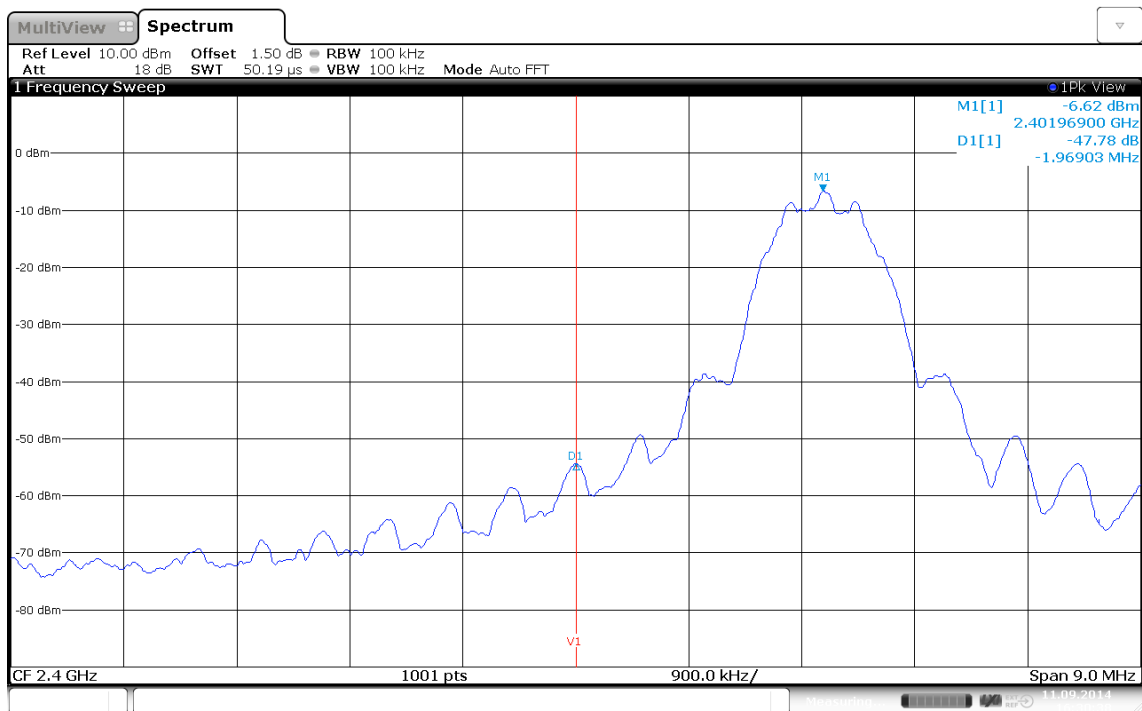


Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 11.SEP.2014 16:30:38

**Band-edge compliance – upper band edge**
**Band-edge compliance acc. to FCC 15.247**


Project Number: G0M-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2480 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: PASS  
 Note 1: Procedure 13.2 Marker-delta method (558074 D01 Meas Guidance)  
 Note 2: upper Band-edge, conducted measurement

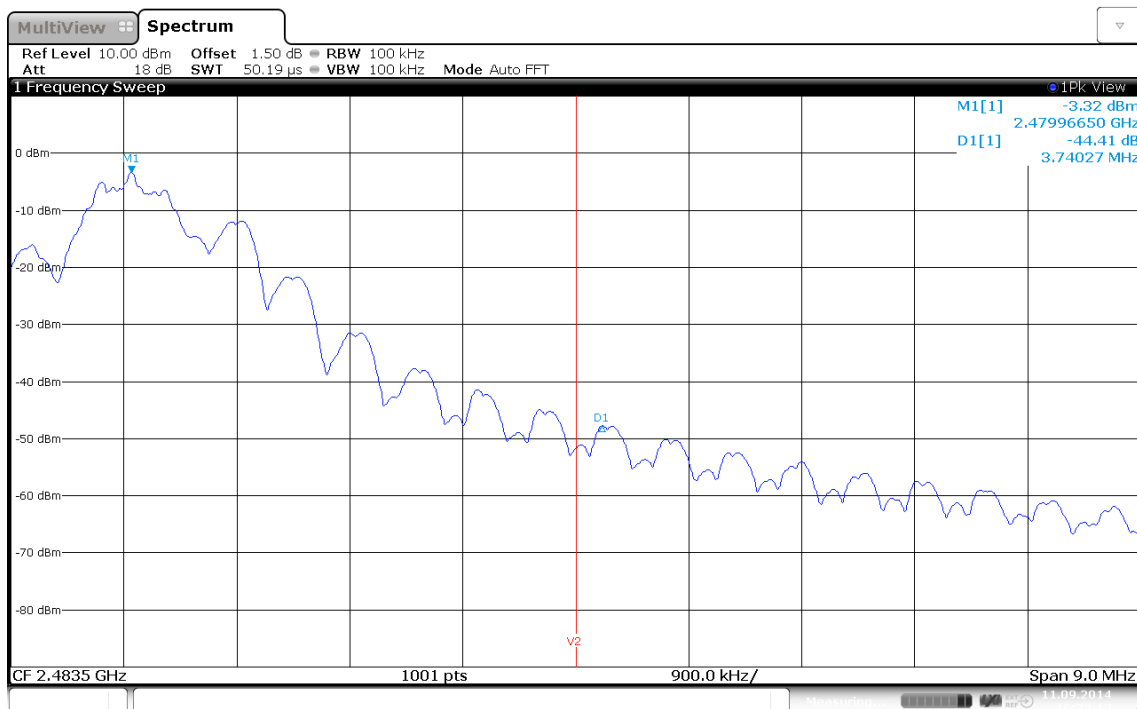

Limit: Marker Delta value >20 dB; Result: PASS  
 Date: 11.SEP.2014 16:33:13


**3.7 Test Conditions and Results – Conducted spurious emissions**

| <b>Conducted spurious emissions acc. FCC 15.247 / IC RSS-210</b>  |                 |      |                                    |  |                  | <b>Verdict: PASS</b> |             |
|---|-----------------|------|------------------------------------|--|------------------|----------------------|-------------|
| EUT requirement<br>rule parts and clause  |                 |      | Reference                          |  |                  |                      |             |
|   |                 |      | FCC 15.247(d) / IC RSS-210 A8.5    |  |                  |                      |             |
| Test according to<br>measurement reference  |                 |      | Reference Method                   |  |                  |                      |             |
|   |                 |      | FCC KDB Publication No. 558074     |  |                  |                      |             |
| Test frequency range  |                 |      | Tested frequencies                 |  |                  |                      |             |
|   |                 |      | 10 MHz – 10 <sup>th</sup> Harmonic |  |                  |                      |             |
| Measurement mode  |                 |      | Peak                               |  |                  |                      |             |
| <b>Limits</b>   |                 |      |                                    |  |                  |                      |             |
| Limit   |                 |      |                                    | Condition                              |                  |                      |             |
| ≤ -20 dB / 100 kHz  |                 |      |                                    | Peak power measurement detector = Peak |                  |                      |             |
| ≤ -30 dB /100 kHz   |                 |      |                                    | Peak power measurement detector = RMS  |                  |                      |             |
| <b>Test setup</b>   |                 |      |                                    |  |                  |                      |             |
|   |                 |      |                                    |  |                  |                      |             |
| <b>Test procedure</b>   |                 |      |                                    |  |                  |                      |             |
| <ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span it set according to measurement range</li> <li>3. Resolution bandwidth is set to 100 kHz and detector to peak and max hold</li> <li>4. Markers are set to peak emission levels within frequency band</li> <li>5. Emission level is determined by second marker on emission peak</li> <li>6. Attenuation is determined from level difference</li> </ol> |                 |      |                                    |  |                  |                      |             |
| <b>Test results</b>   |                 |      |                                    |  |                  |                      |             |
| Channel   | Frequency [MHz] | Mode | Emission [MHz]                     | Emission Level [dbm]                   | Peak power [dBm] | Limit [dBm]          | Margin [dB] |
| F <sub>LOW</sub>  | 2402            | Tx   | 4804.0                             | -47.84                                 | -6.7             | -26.7                | -21.14      |
| F <sub>MID</sub>  | 2440            | Tx   | 4899.2                             | -48.63                                 | -4.5             | -24.5                | -24.13      |
| F <sub>HIGH</sub>   | 2480            | Tx   | 4959.5                             | -51.42                                 | -3.7             | -23.7                | -27.72      |
| Comments:   |                 |      |                                    |  |                  |                      |             |

**Conducted spurious emissions – F<sub>Low</sub>**
**Spurious Emissions acc. to FCC 15.247**

Project Number: G0M-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2402 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: PASS  
 Note 1: Spurious in non-restricted frequency bands (558074 D01 Meas.Guidance)  
 Note 2: conducted measurement

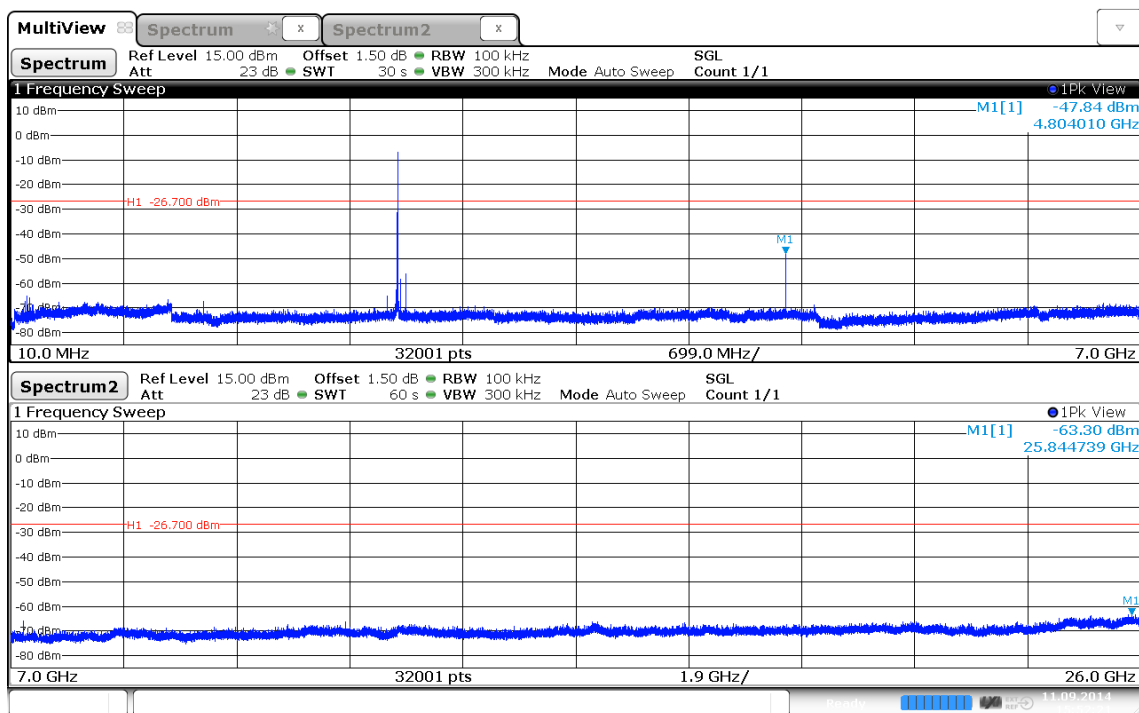


Date: 11.SEP.2014 15:52:21

Conducted spurious emissions – F<sub>MID</sub>

**Spurious Emissions acc. to FCC 15.247**

Project Number: G0M-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2440 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: PASS  
 Note 1: Spurious in non-restricted frequency bands (558074 D01 Meas. Guidance)  
 Note 2: conducted measurement

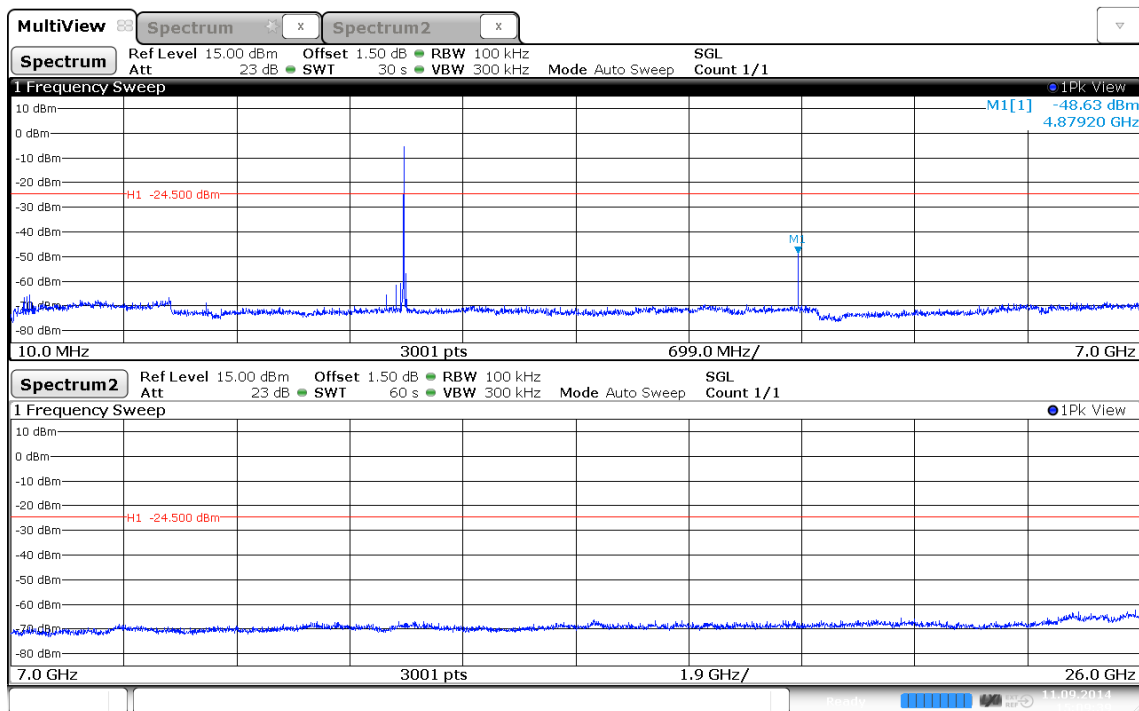


Date: 11.SEP.2014 15:09:39

Conducted spurious emissions – F<sub>HIGH</sub>

**Spurious Emissions acc. to FCC 15.247**


Project Number: GOM-1407-4002

Applicant: Leica Geosystems  
 EUT Name: Laser Distance Meter  
 Model: Leica Disto S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Wilfried Treffke  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2480 MHz, modulated  
 Test Date: 2014-09-11  
 Verdict: PASS  
 Note 1: Spurious in non-restricted frequency bands (558074 D01 Meas Guidance)  
 Note 2: conducted measurement

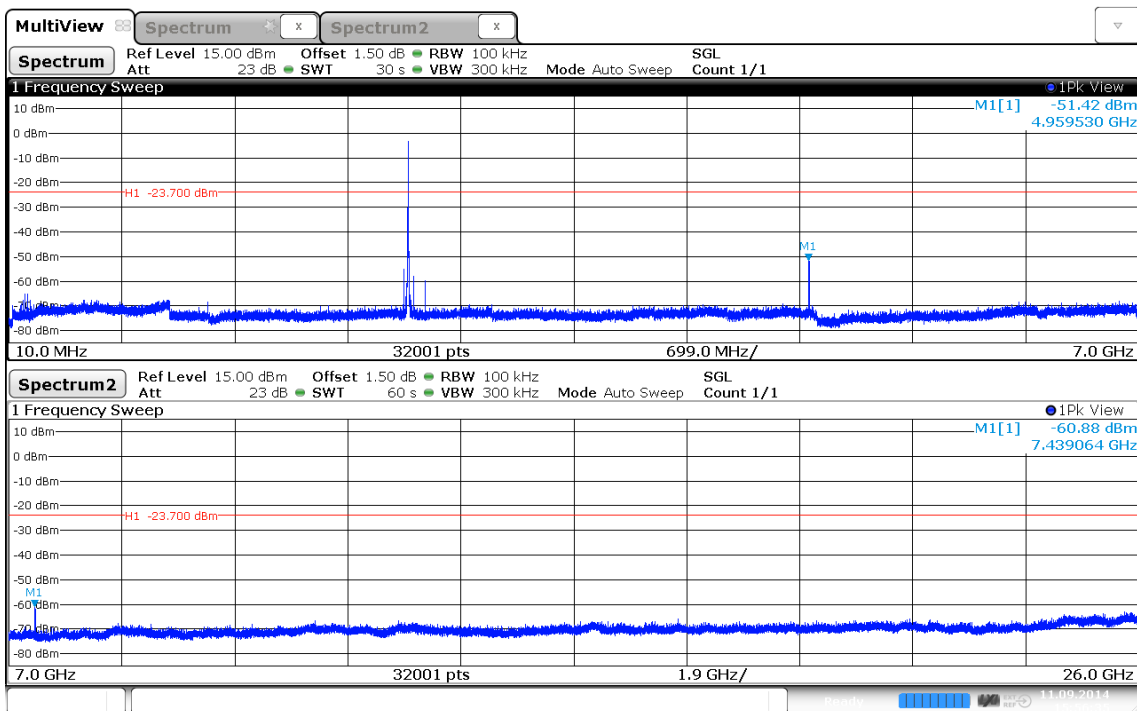

Date: 11.SEP.2014 15:56:35

3.8 Test Conditions and Results – Transmitter radiated emissions
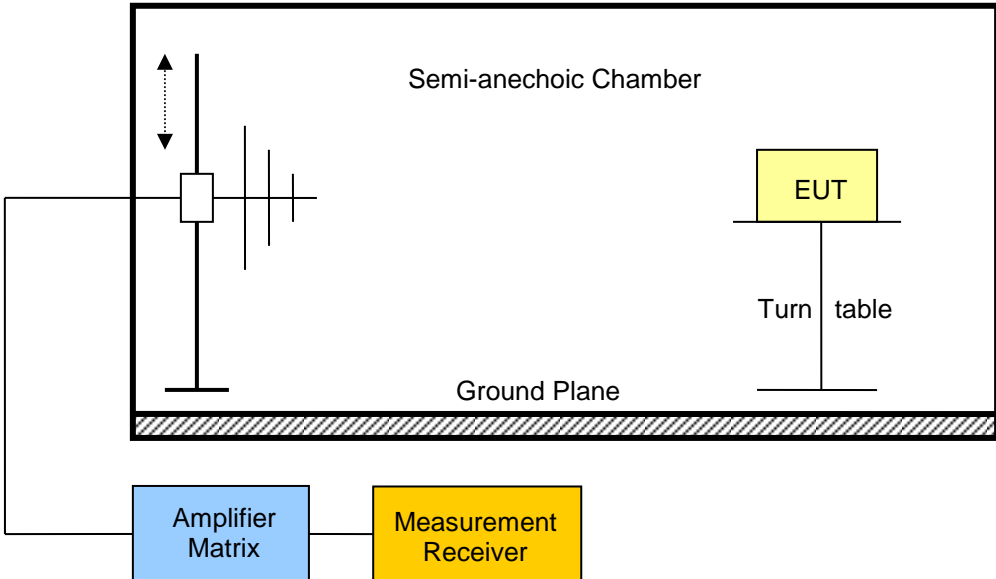
| Transmitter radiated emissions acc. FCC 47 CFR 15.247 / IC RSS-210  |            |   |                      | Verdict: PASS      |  |
|---|------------|---|----------------------|--------------------|--|
| Test according referenced standards   |            | Reference Method                            |                      |                    |  |
|   |            | FCC 15.247(d) / IC RSS-210 A8.5             |                      |                    |  |
| Test according to measurement reference   |            | Reference Method                            |                      |                    |  |
|   |            | FCC KDB Publication No. 558074 / ANSI C63.4 |                      |                    |  |
| Test frequency range  |            | Tested frequencies                          |                      |                    |  |
|   |            | 30 MHz – 10 <sup>th</sup> Harmonic          |                      |                    |  |
| Limits  |            |   |                      |                    |  |
| Frequency range [MHz]   | Detector   | Limit [ $\mu$ V/m]                          | Limit [dB $\mu$ V/m] | Limit Distance [m] |  |
| 30 – 88   | Quasi-Peak | 100   | 40                   | 3                  |  |
| 88 – 216  | Quasi-Peak | 150   | 43.5                 | 3                  |  |
| 216 – 960   | Quasi-Peak | 200   | 46                   | 3                  |  |
| 960 – 1000  | Quasi-Peak | 500   | 54                   | 3                  |  |
| > 1000  | Average    | 500   | 54                   | 3                  |  |
| <p>Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).</p> <p>When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.</p> |            |   |                      |                    |  |
| Test setup  |            |   |                      |                    |  |
|  <p>The diagram illustrates the test setup. A Semi-anechoic Chamber is shown with a Ground Plane at the bottom. Inside the chamber, an Amplifier Matrix is connected to a Measurement Receiver. The Equipment Under Test (EUT) is placed on a Turn table within the chamber. The chamber walls are represented by vertical lines with diagonal hatching, indicating its anechoic properties.</p>  |            |   |                      |                    |  |



**Test procedure**


1. EUT set to test mode (Communication tester is used if needed)
2. Span it set according to measurement range
3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz
4. Markers are set to peak emission levels within restricted bands

**Test results**

| Channel           | Frequency [MHz] | Mode     | Emission [MHz] | Level [dB $\mu$ V/m] | Det. | Pol. | Limit [dB $\mu$ V/m] | Limit dist. [m]* | Margin [dB] |
|-------------------|-----------------|----------|----------------|----------------------|------|------|----------------------|------------------|-------------|
| F <sub>LOW</sub>  | 2402            | Transmit | 265.6          | 28.96                | pk   | hor  | 46.00                | 3                | -17.04      |
| F <sub>LOW</sub>  | 2402            | Transmit | 324.8          | 33.44                | pk   | hor  | 46.00                | 3                | -12.56      |
| F <sub>LOW</sub>  | 2402            | Transmit | 612.8          | 30.08                | pk   | hor  | 46.00                | 3                | -15.92      |
| F <sub>LOW</sub>  | 2402            | Transmit | 2369           | 39.51                | pk   | hor  | 74.00                | 3                | -34.49      |
| F <sub>LOW</sub>  | 2402            | Transmit | 2369           | 24.72                | RMS  | hor  | 54.00                | 3                | -29.28      |
| F <sub>LOW</sub>  | 2402            | Transmit | 2371           | 41.06                | pk   | ver  | 74.00                | 3                | -32.94      |
| F <sub>LOW</sub>  | 2402            | Transmit | 2371           | 25.37                | RMS  | ver  | 54.00                | 3                | -28.63      |
| F <sub>LOW</sub>  | 2402            | Transmit | 4800           | 51.69                | pk   | hor  | 74.00                | 3                | -22.31      |
| F <sub>LOW</sub>  | 2402            | Transmit | 4800           | 48.01                | pk   | ver  | 74.00                | 3                | -25.99      |
| F <sub>LOW</sub>  | 2402            | Transmit | 4880           | 48.72                | pk   | hor  | 74.00                | 3                | -25.28      |
| F <sub>MID</sub>  | 2440            | Transmit | 4880           | 49.30                | pk   | ver  | 74.00                | 3                | -24.70      |
| F <sub>HIGH</sub> | 2480            | Transmit | 2483.5         | 59.32                | pk   | hor  | 74.00                | 3                | -14.68      |
| F <sub>HIGH</sub> | 2480            | Transmit | 2483.5         | 35.87                | RMS  | hor  | 54.00                | 3                | -18.13      |
| F <sub>HIGH</sub> | 2480            | Transmit | 2483.5         | 57.51                | pk   | ver  | 74.00                | 3                | -16.49      |
| F <sub>HIGH</sub> | 2480            | Transmit | 2483.5         | 34.51                | RMS  | ver  | 54.00                | 3                | -19.49      |
| F <sub>HIGH</sub> | 2480            | Transmit | 4952           | 49.91                | pk   | ver  | 74.00                | 3                | -24.09      |
| F <sub>HIGH</sub> | 2480            | Transmit | 4960           | 47.47                | pk   | hor  | 74.00                | 3                | -26.53      |

Comments: \* Physical distance between EUT and measurement antenna.

**3.9 Test Conditions and Results – Receiver radiated emissions**
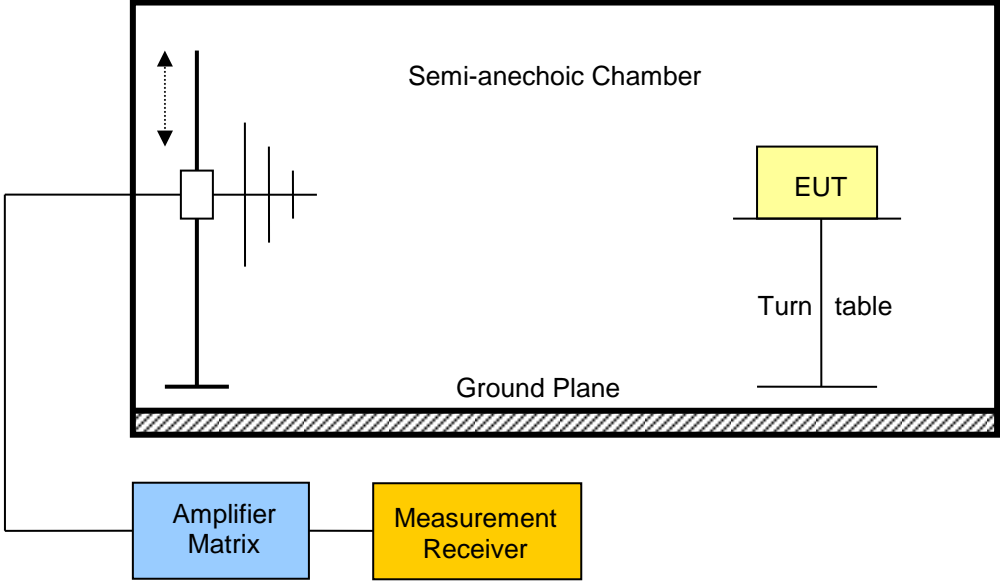
| Receiver radiated emissions acc. IC RSS-210   |                                   |                                  | Verdict: PASS                             |                    |
|---|-----------------------------------|----------------------------------|---|--------------------|
| Test according referenced standards   | Reference Method                  |                                  |   |                    |
|   | IC RSS-210 A8.5                   |                                  |   |                    |
| Test according to measurement reference   | Reference Method                  |                                  |   |                    |
|   | ANSI C63.4                        |                                  |   |                    |
| Test frequency range  | Tested frequencies                |                                  |   |                    |
|   | 30 MHz – 3 <sup>th</sup> Harmonic |                                  |   |                    |
| EUT test mode   | Receive                           |                                  |   |                    |
| Limits  |                                   |                                  |   |                    |
| Frequency range [MHz]   | Detector                          | Limit [ $\mu\text{V}/\text{m}$ ] | Limit [ $\text{dB}\mu\text{V}/\text{m}$ ] | Limit Distance [m] |
| 30 – 88   | Quasi-Peak                        | 100                              | 40  | 3                  |
| 88 – 216  | Quasi-Peak                        | 150                              | 43.5                                      | 3                  |
| 216 – 960   | Quasi-Peak                        | 200                              | 46  | 3                  |
| 960 – 1000  | Quasi-Peak                        | 500                              | 54  | 3                  |
| > 1000  | Average                           | 500                              | 54  | 3                  |
| Test setup  |                                   |                                  |   |                    |
|  <p>The diagram illustrates the test setup within a Semi-anechoic Chamber. The chamber sits on a Ground Plane. An EUT (Equipment Under Test) is placed on a Turn table. A probe antenna is positioned above the chamber, connected to an Amplifier Matrix and a Measurement Receiver outside the chamber.</p> |                                   |                                  |   |                    |

**Test procedure**

1. EUT set to receive mode (Communication tester is used if needed)
2. Span it set according to measurement range
3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz
4. Markers are set to peak emission levels

**Test results**

| Channel          | Frequency [MHz] | Emission [MHz] | Emission Level [dB $\mu$ V/m] | Pol. | Det. | Limit [ $\mu$ V/m] | Margin [ $\mu$ V/m] |
|------------------|-----------------|----------------|-------------------------------|------|------|--------------------|---------------------|
| F <sub>MID</sub> | 2442            | 531.2          | 34.63                         | hor  | pk   | 46                 | -11.37 dB           |
| F <sub>MID</sub> | 2442            | 611.2          | 34.42                         | hor  | pk   | 46                 | -11.58 dB           |
| F <sub>MID</sub> | 2442            | 664            | 40.03                         | hor  | pk   | 46                 | -05.97 dB           |
| F <sub>MID</sub> | 2442            | 929.6          | 36.20                         | hor  | pk   | 46                 | -09.80 dB           |
| F <sub>MID</sub> | 2442            | 958.4          | 34.15                         | hor  | pk   | 46                 | -11.85 dB           |
| F <sub>MID</sub> | 2442            | 1858           | 43.74                         | hor  | pk   | 54                 | -10.24 dB           |
| F <sub>MID</sub> | 2442            | 1990           | 41.49                         | ver  | pk   | 54                 | -12.49 dB           |

Comments:


## ANNEX A Transmitter radiated spurious emissions

### Spurious emissions according to FCC 15.247

Project number: G0M-1407-4002

|                       |   |
|-----------------------|---|
| Applicant:            | Leica                                     |
| EUT Name:             | Laser Distance Meter                      |
| Model:                | Leica DISTO S910                          |
| Test Site:            | Eurofins Product Service GmbH             |
| Operator:             | Mr. Treffke                               |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6V DC lithium battery |
| Antenna:              | Rohde & Schwarz HK 116, Horizontal        |
| Measurement distance: | 3 m                                       |
| Mode:                 | TX; BTLE; GFSK; 2402 MHz                  |
| Test Date:            | 2014-09-05                                |
| Note:                 | worst case                                |

Index 89

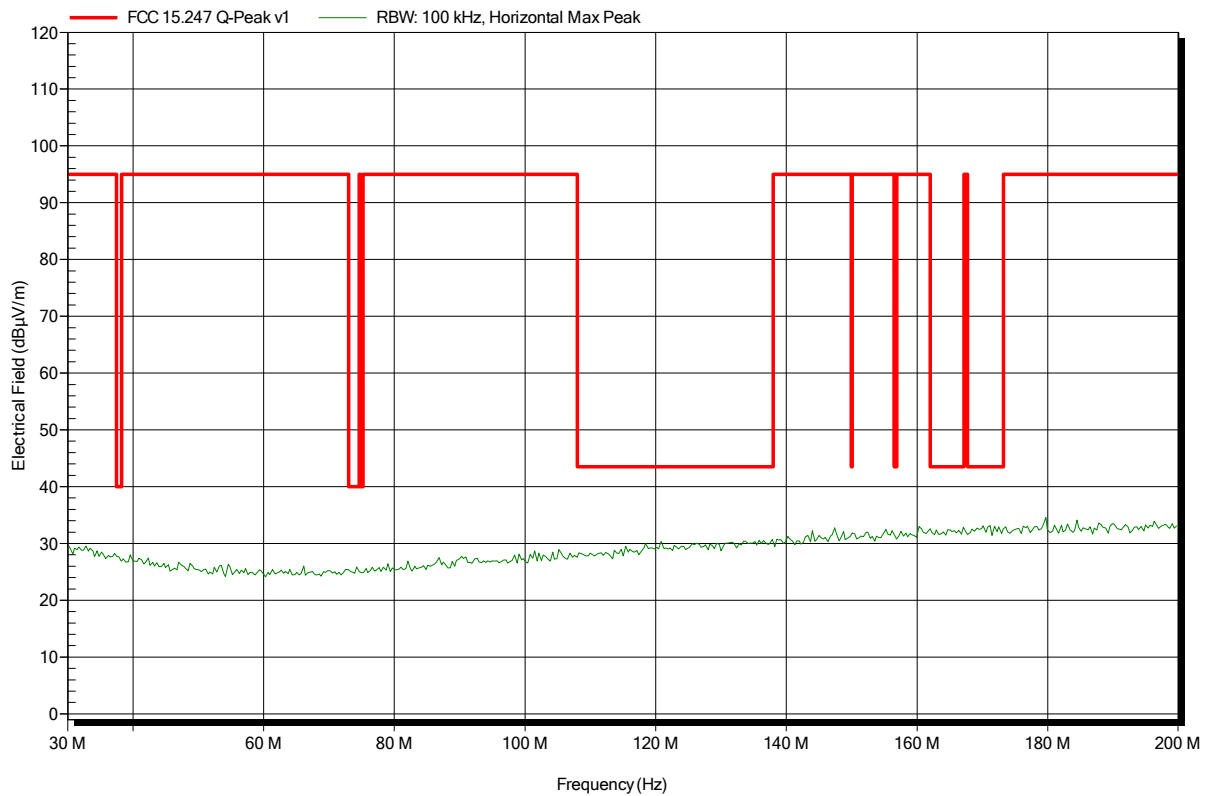


**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

|                       |   |
|-----------------------|---|
| Applicant:            | Leica                                     |
| EUT Name:             | Laser Distance Meter                      |
| Model:                | Leica DISTO S910                          |
| Test Site:            | Eurofins Product Service GmbH             |
| Operator:             | Mr. Treffke                               |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6V DC lithium battery |
| Antenna:              | Rohde & Schwarz HK 116, Vertical          |
| Measurement distance: | 3 m                                       |
| Mode:                 | TX; BTLE; GFSK; 2402 MHz                  |
| Test Date:            | 2014-09-05                                |
| Note:                 | worst case                                |

Index 90

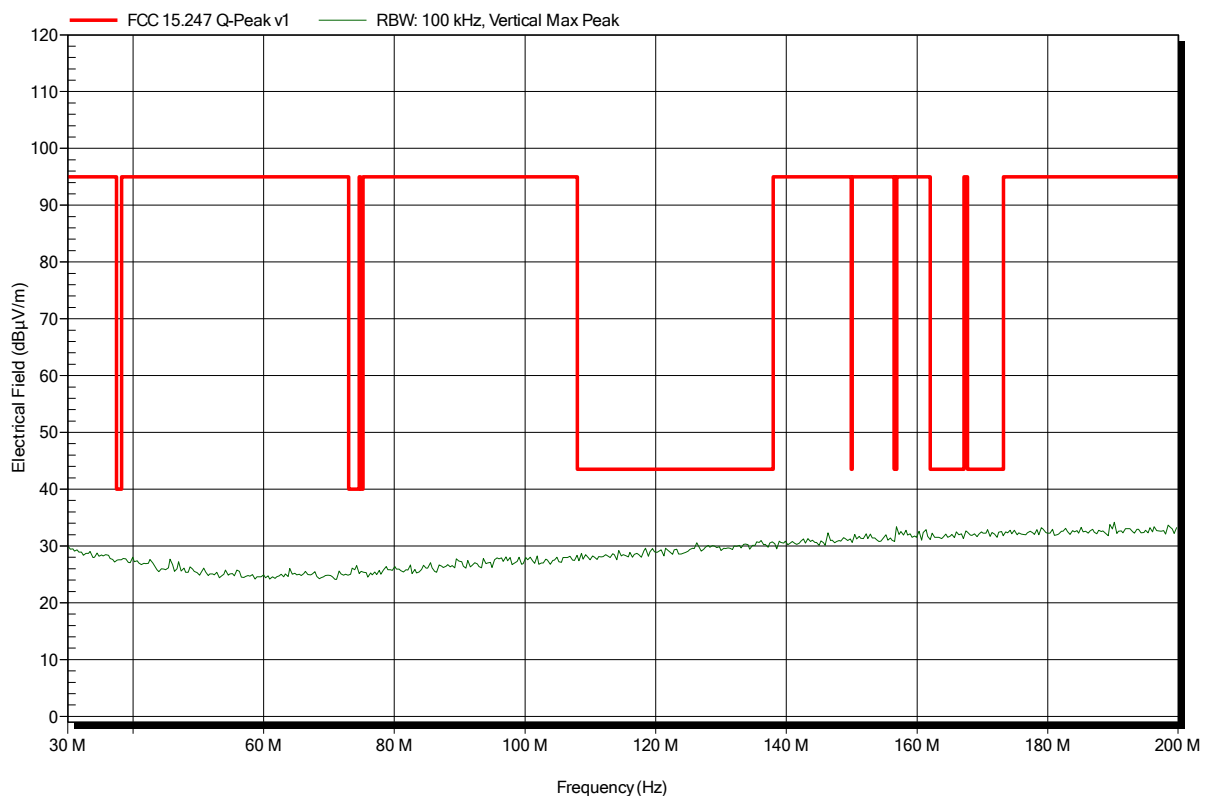


**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2402 MHz  
 Test Date: 2014-09-05  
 Note: worst case

Index 87

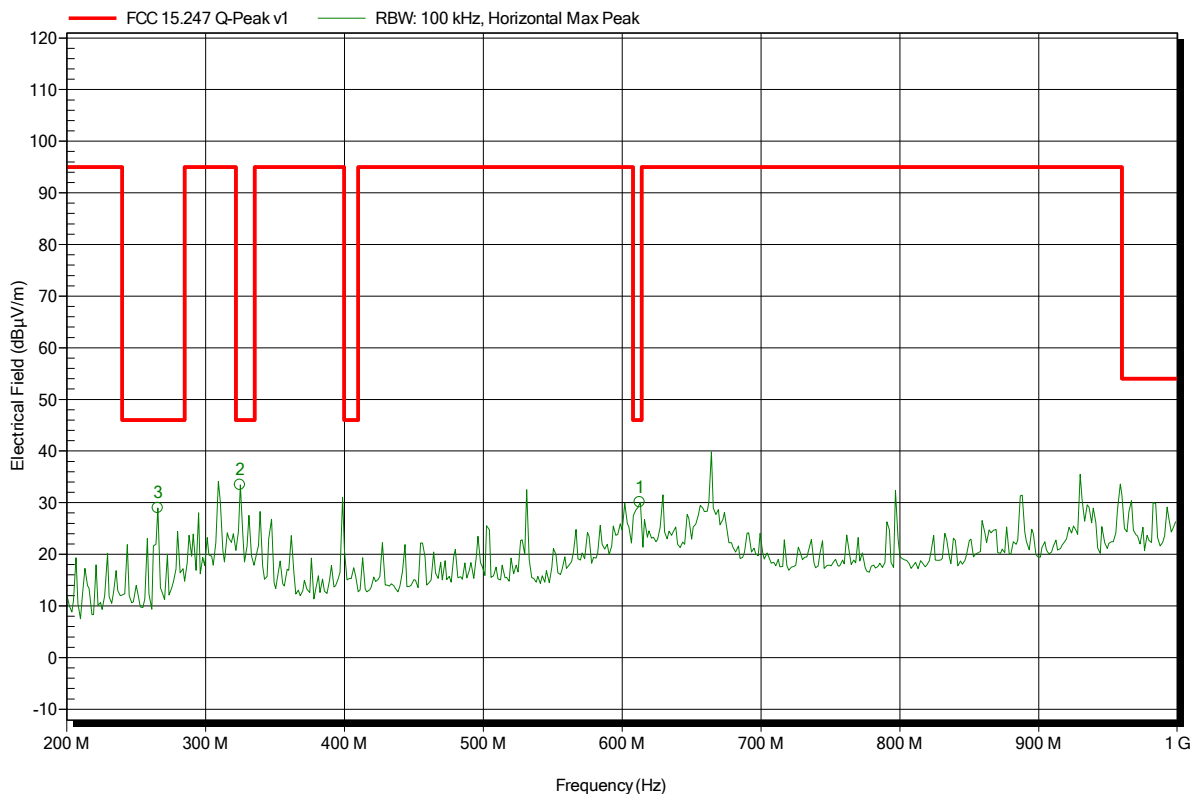


| Frequency | Peak         | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|------------|-----------------|-------------|
| 265.6 MHz | 28.96 dBµV/m | 46 dBµV/m  | -17.04 dB       | Pass        |
| 324.8 MHz | 33.44 dBµV/m | 46 dBµV/m  | -12.56 dB       | Pass        |
| 612.8 MHz | 30.08 dBµV/m | 46 dBµV/m  | -15.92 dB       | Pass        |

**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

|                       |   |
|-----------------------|---|
| Applicant:            | Leica                                     |
| EUT Name:             | Laser Distance Meter                      |
| Model:                | Leica DISTO S910                          |
| Test Site:            | Eurofins Product Service GmbH             |
| Operator:             | Mr. Treffke                               |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6V DC lithium battery |
| Antenna:              | Rohde & Schwarz HL 223, Vertical          |
| Measurement distance: | 3 m                                       |
| Mode:                 | TX; BTLE; GFSK; 2402 MHz                  |
| Test Date:            | 2014-09-05                                |
| Note:                 | worst case                                |

Index 88

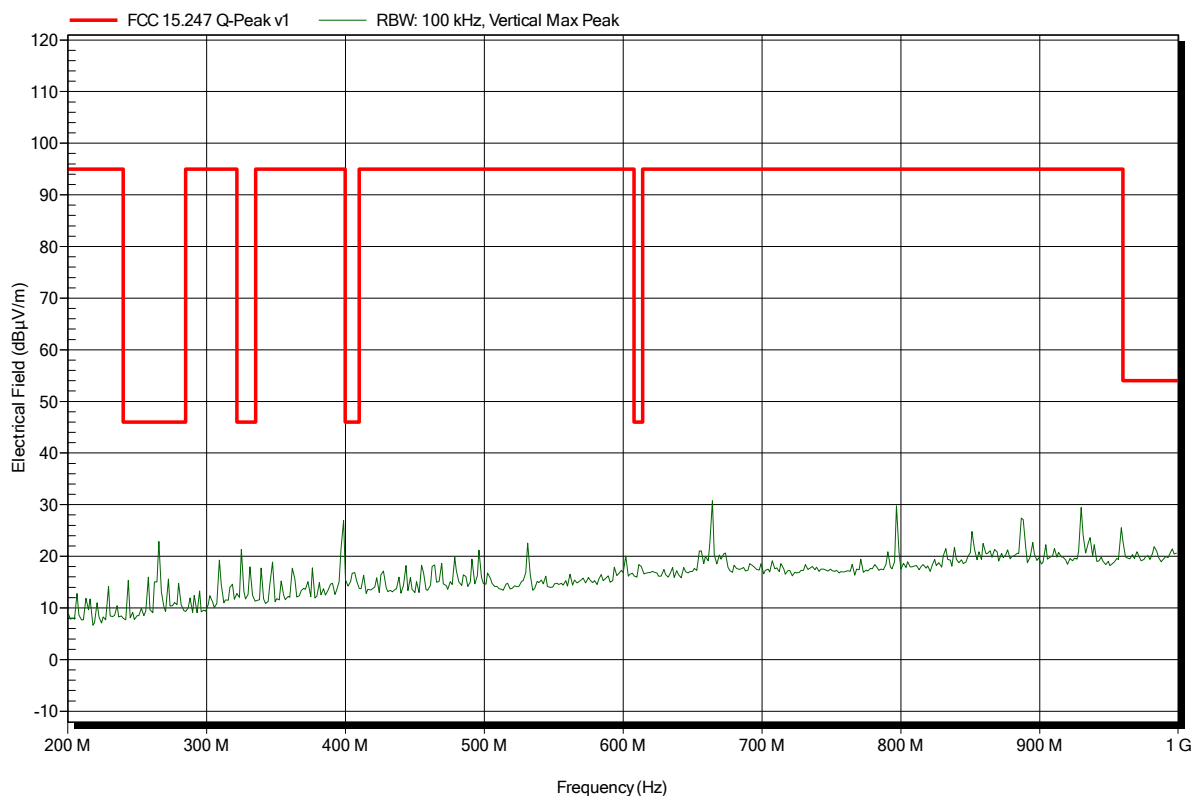


**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2402 MHz  
 Test Date: 2014-09-04  
 Note:

Index 59

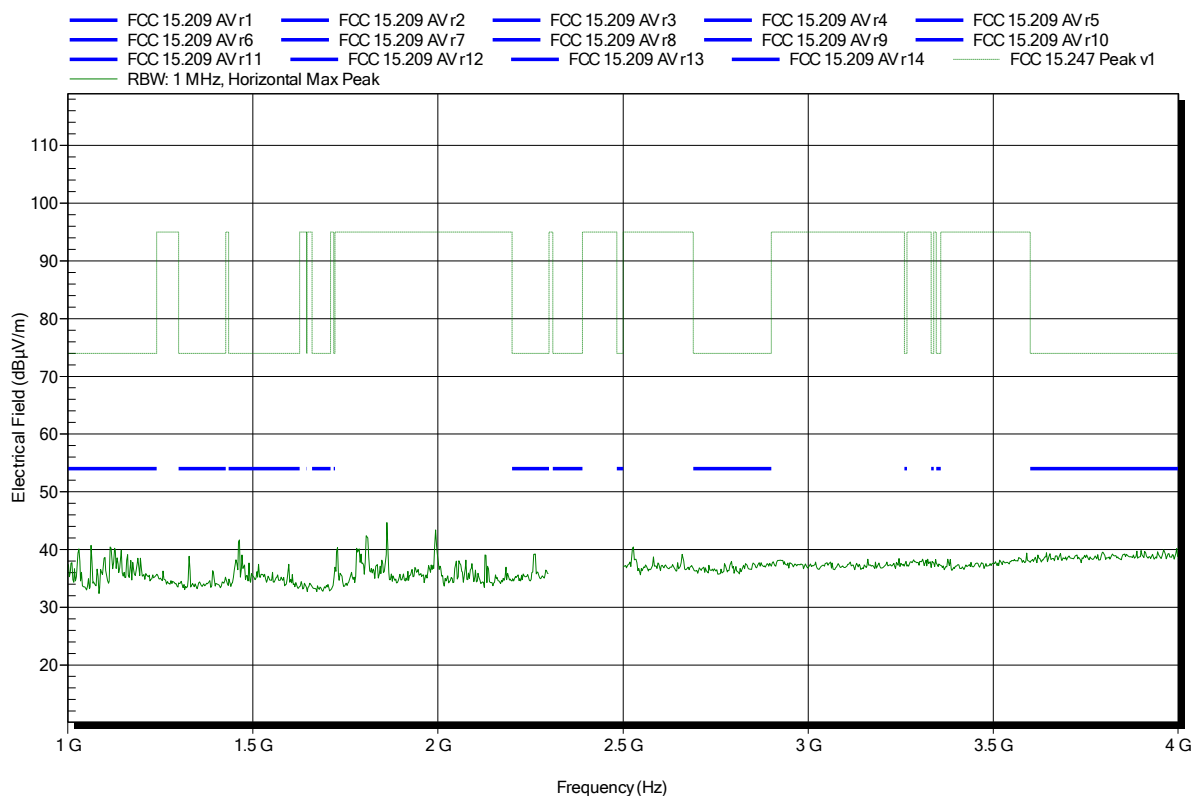




**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2402 MHz  
 Test Date: 2014-09-05  
 Note:

Index 62

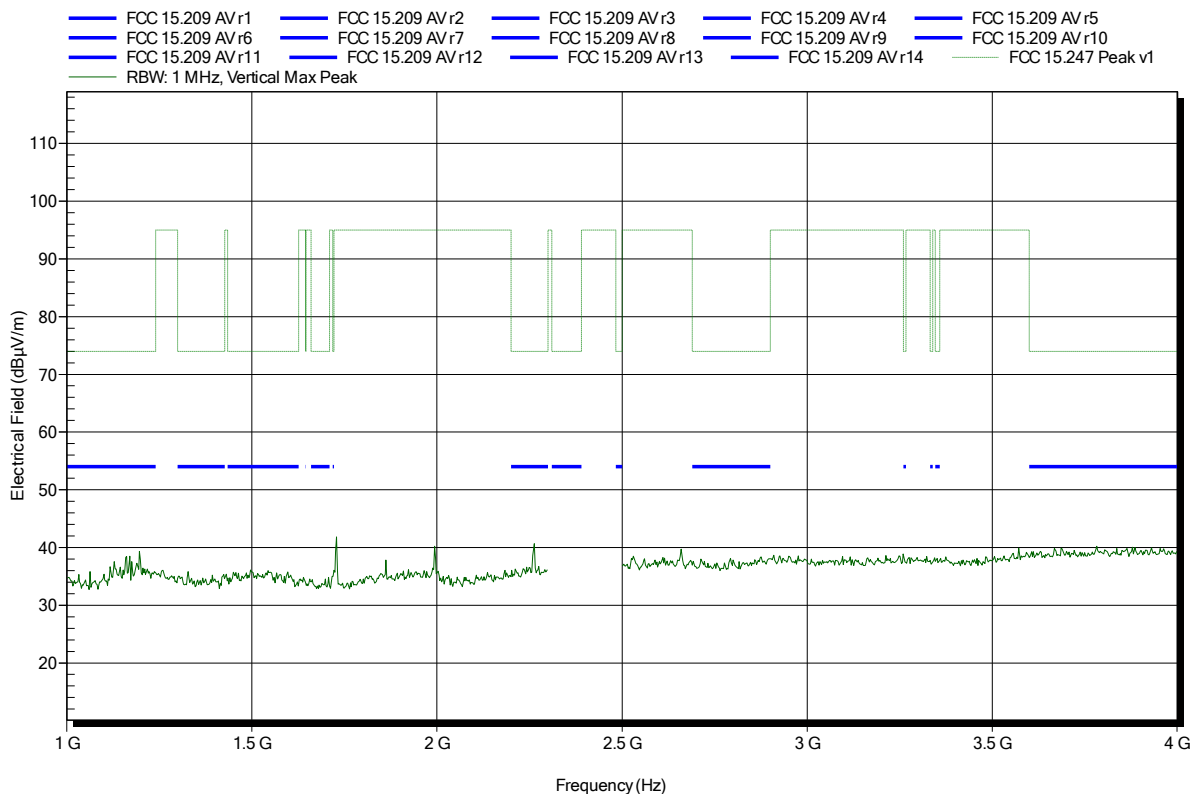


**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2402 MHz  
 Test Date: 2014-09-04  
 Note: lower bandedge

Index 60

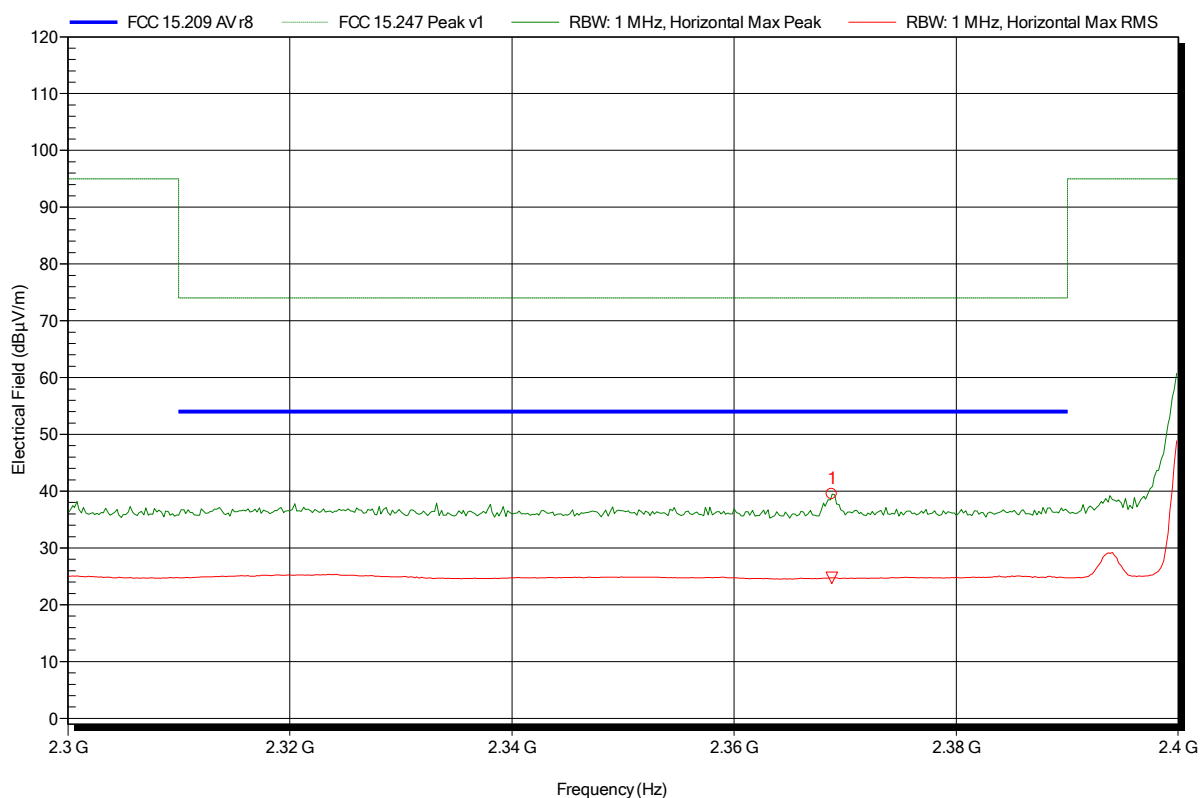


|           |              |            |                 |             |
|-----------|--------------|------------|-----------------|-------------|
| Frequency | Peak         | Peak Limit | Peak Difference | Peak Status |
| 2.369 GHz | 39.51 dBµV/m | 74 dBµV/m  | -34.49 dB       | Pass        |
| Frequency | RMS          | RMS Limit  | RMS Difference  | RMS Status  |
| 2.369 GHz | 24.72 dBµV/m | 54 dBµV/m  | -29.28 dB       | Pass        |

**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2402 MHz  
 Test Date: 2014-09-05  
 Note: lower bandedge

Index 63

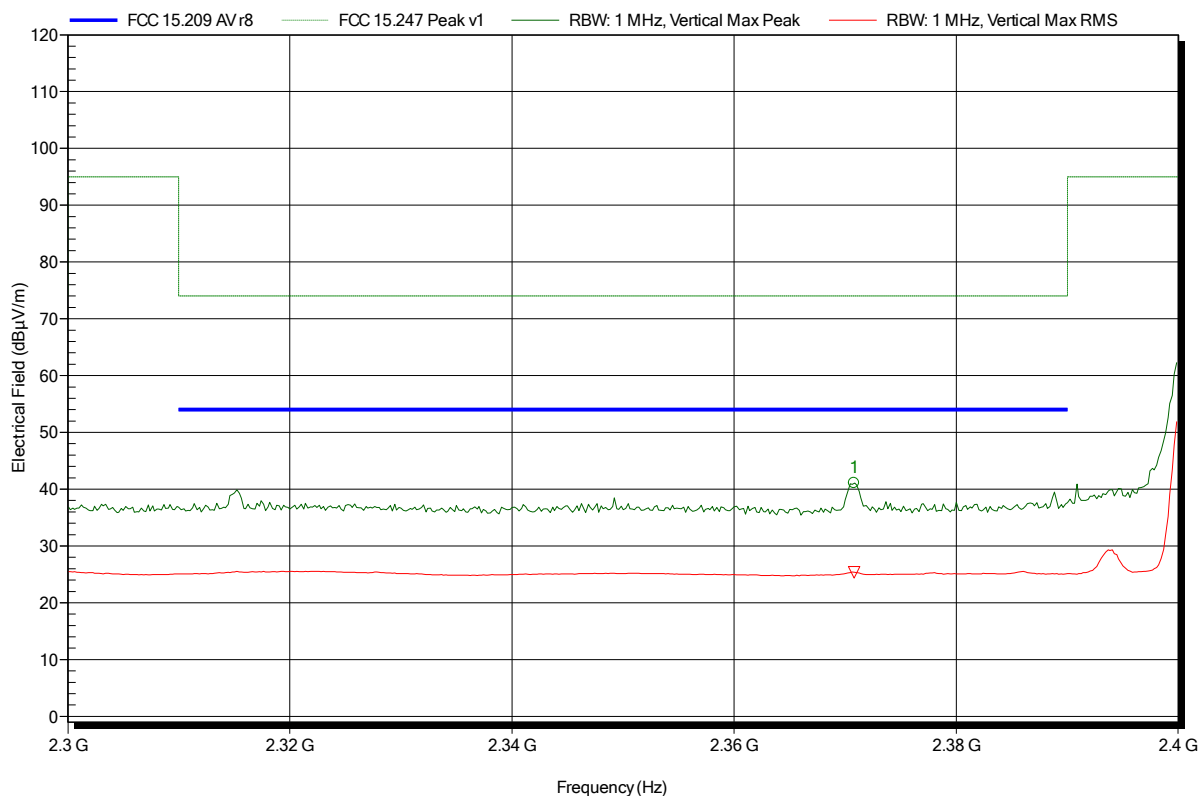


| Frequency | Peak         | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|------------|-----------------|-------------|
| 2.371 GHz | 41.06 dBµV/m | 74 dBµV/m  | -32.94 dB       | Pass        |
| Frequency | RMS          | RMS Limit  | RMS Difference  | RMS Status  |
| 2.371 GHz | 25.37 dBµV/m | 54 dBµV/m  | -28.63 dB       | Pass        |

**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2402 MHz  
 Test Date: 2014-09-04  
 Note:

Index 61

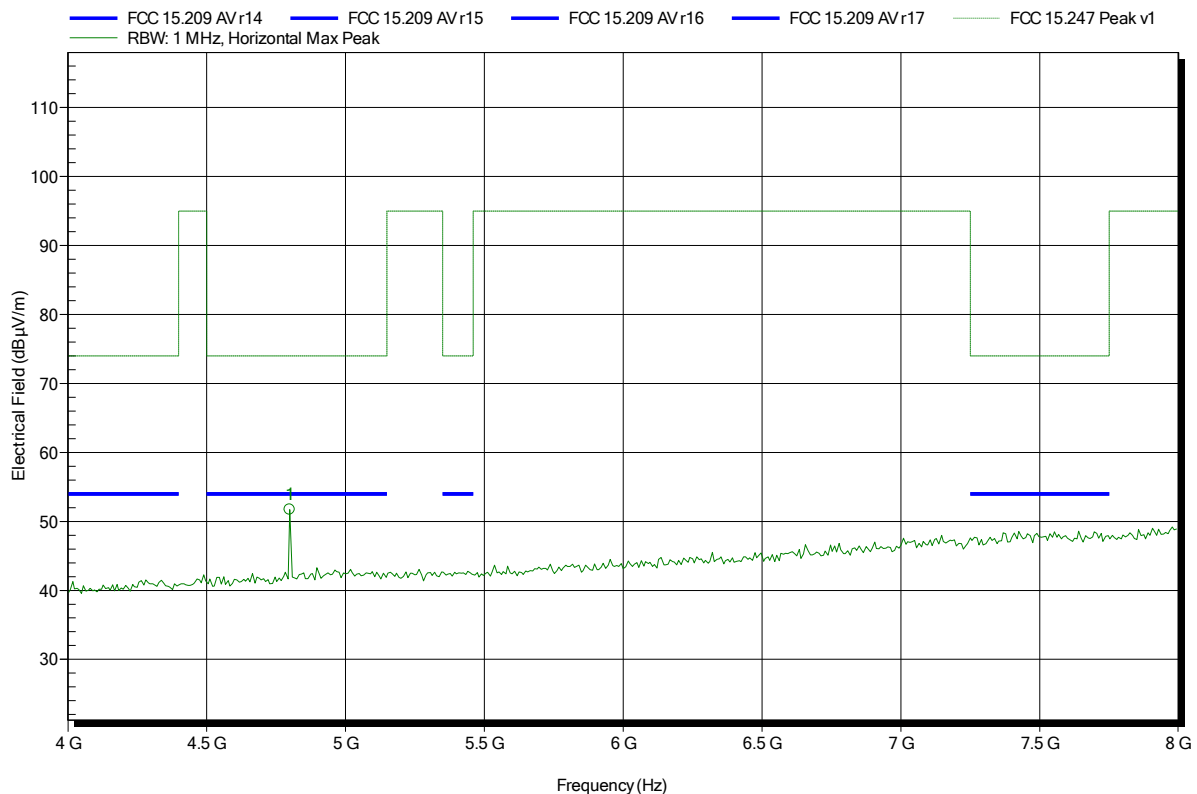


| Frequency | Peak         | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|------------|-----------------|-------------|
| 4.8 GHz   | 51.69 dBµV/m | 74 dBµV/m  | -22.31 dB       | Pass        |

**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2402 MHz  
 Test Date: 2014-09-05  
 Note:

Index 64

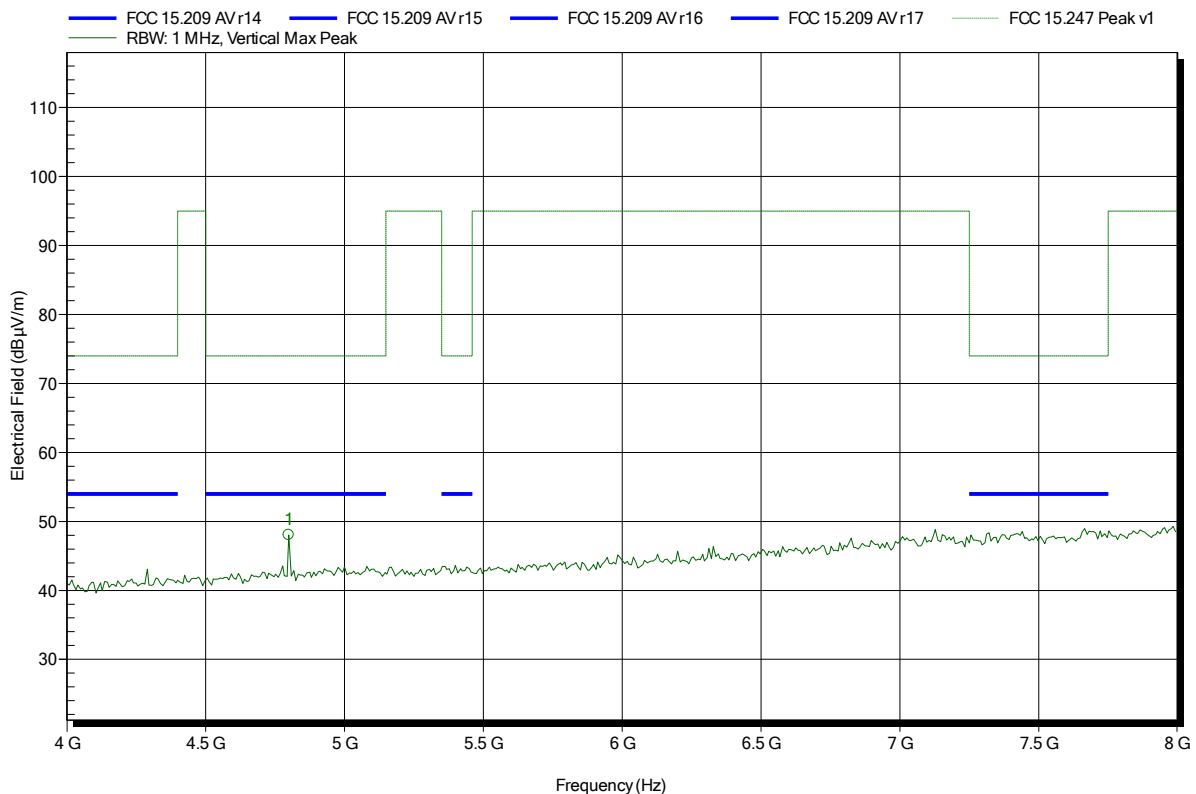


| Frequency | Peak         | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|------------|-----------------|-------------|
| 4.8 GHz   | 48.01 dBµV/m | 74 dBµV/m  | -25.99 dB       | Pass        |

**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTLE; GFSK; 2402 MHz  
 Test Date: 2014-09-05  
 Note:

Index 75

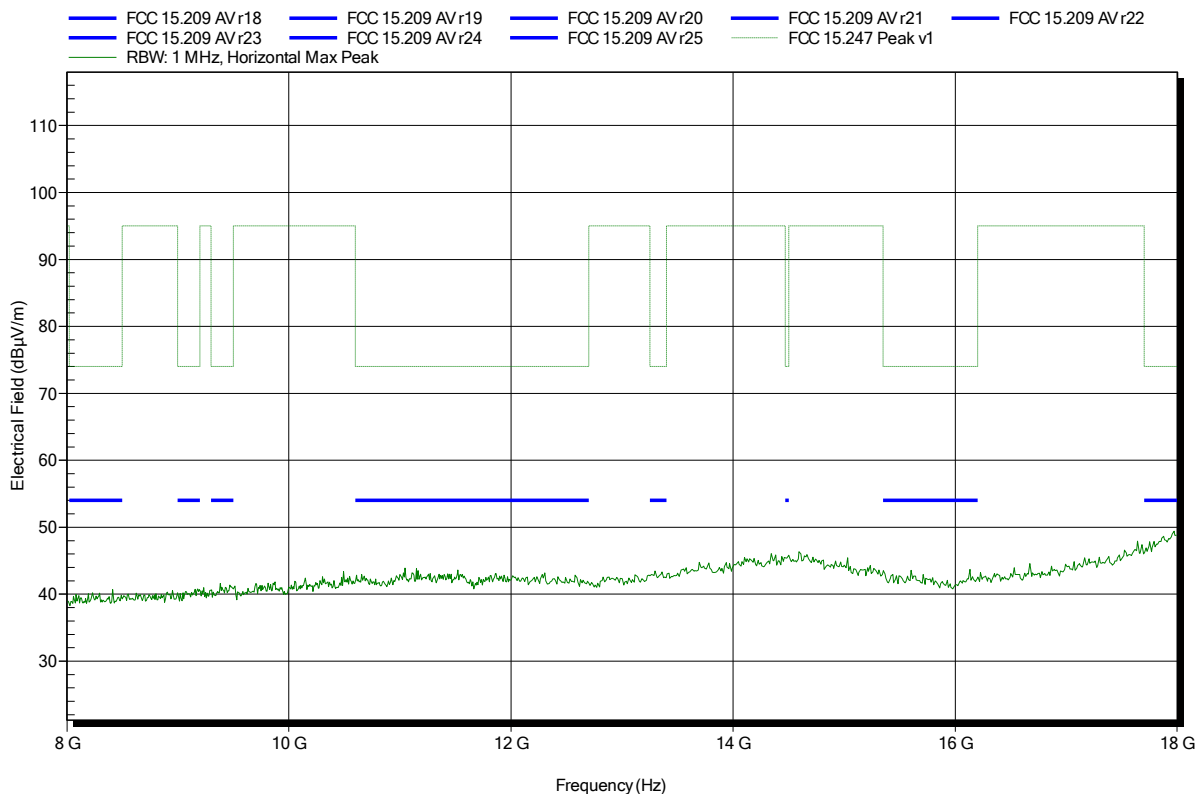


**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTLE; GFSK; 2402 MHz  
 Test Date: 2014-09-05  
 Note:

Index 77

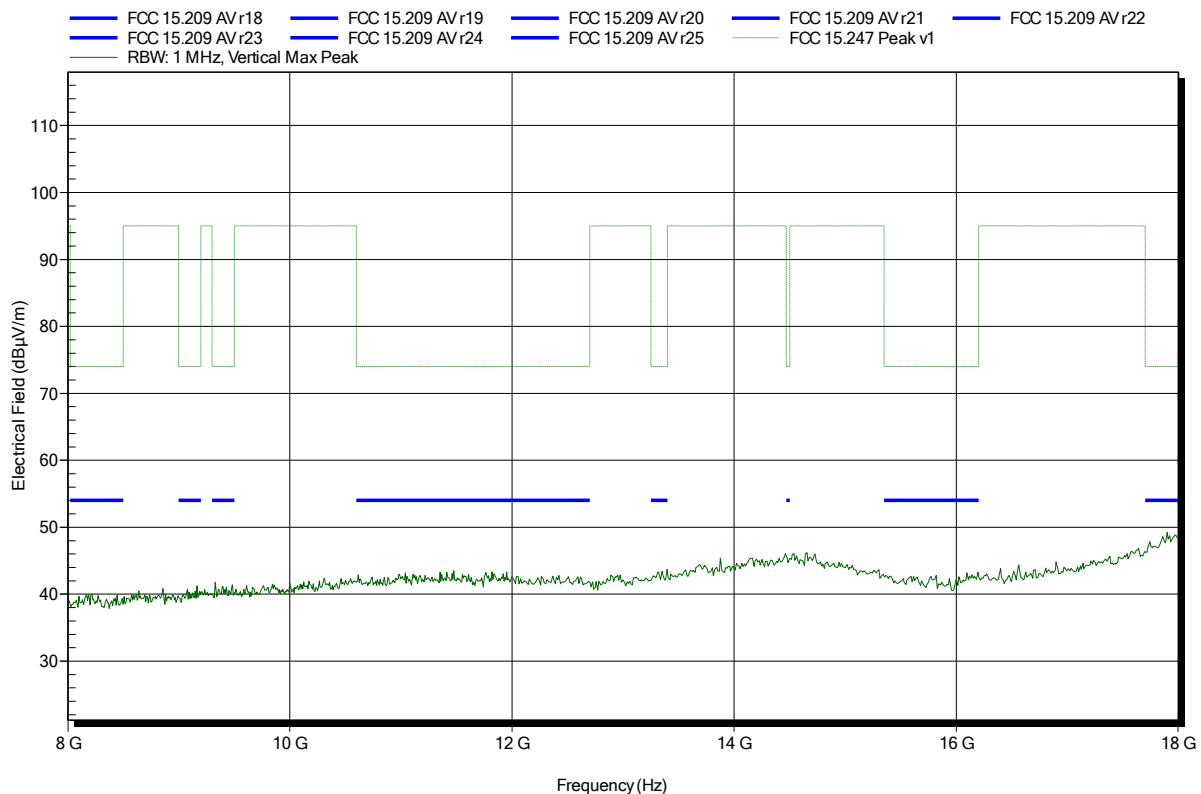


**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

|                       |   |
|-----------------------|---|
| Applicant:            | Leica                                     |
| EUT Name:             | Laser Distance Meter                      |
| Model:                | Leica DISTO S910                          |
| Test Site:            | Eurofins Product Service GmbH             |
| Operator:             | Mr. Treffke                               |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6V DC lithium battery |
| Antenna:              | Rohde & Schwarz HL 025, Horizontal        |
| Measurement distance: | 1 m                                       |
| Mode:                 | TX; BTLE; GFSK; 2402 MHz                  |
| Test Date:            | 2014-09-05                                |
| Note:                 |   |

Index 76

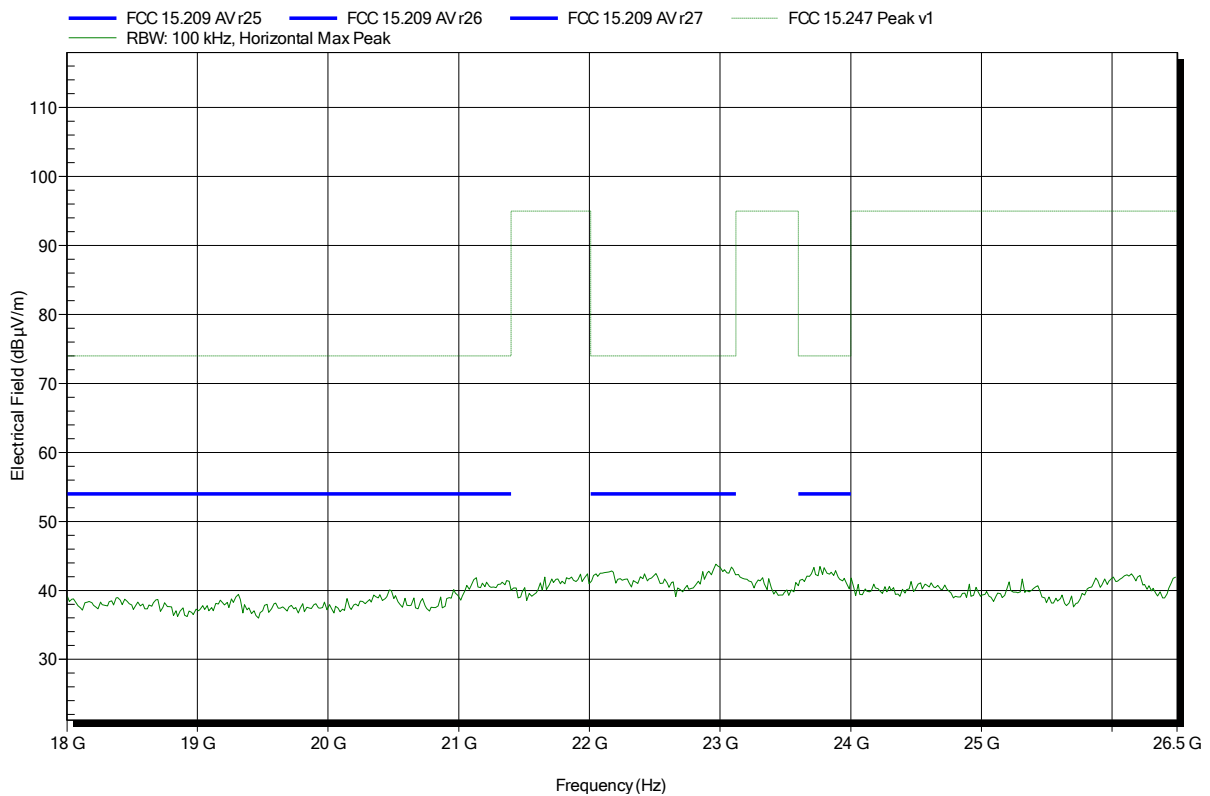




**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

|                       |   |
|-----------------------|---|
| Applicant:            | Leica                                     |
| EUT Name:             | Laser Distance Meter                      |
| Model:                | Leica DISTO S910                          |
| Test Site:            | Eurofins Product Service GmbH             |
| Operator:             | Mr. Treffke                               |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6V DC lithium battery |
| Antenna:              | Rohde & Schwarz HL 025, Vertical          |
| Measurement distance: | 1 m                                       |
| Mode:                 | TX; BTLE; GFSK; 2402 MHz                  |
| Test Date:            | 2014-09-05                                |
| Note:                 |   |

Index 78

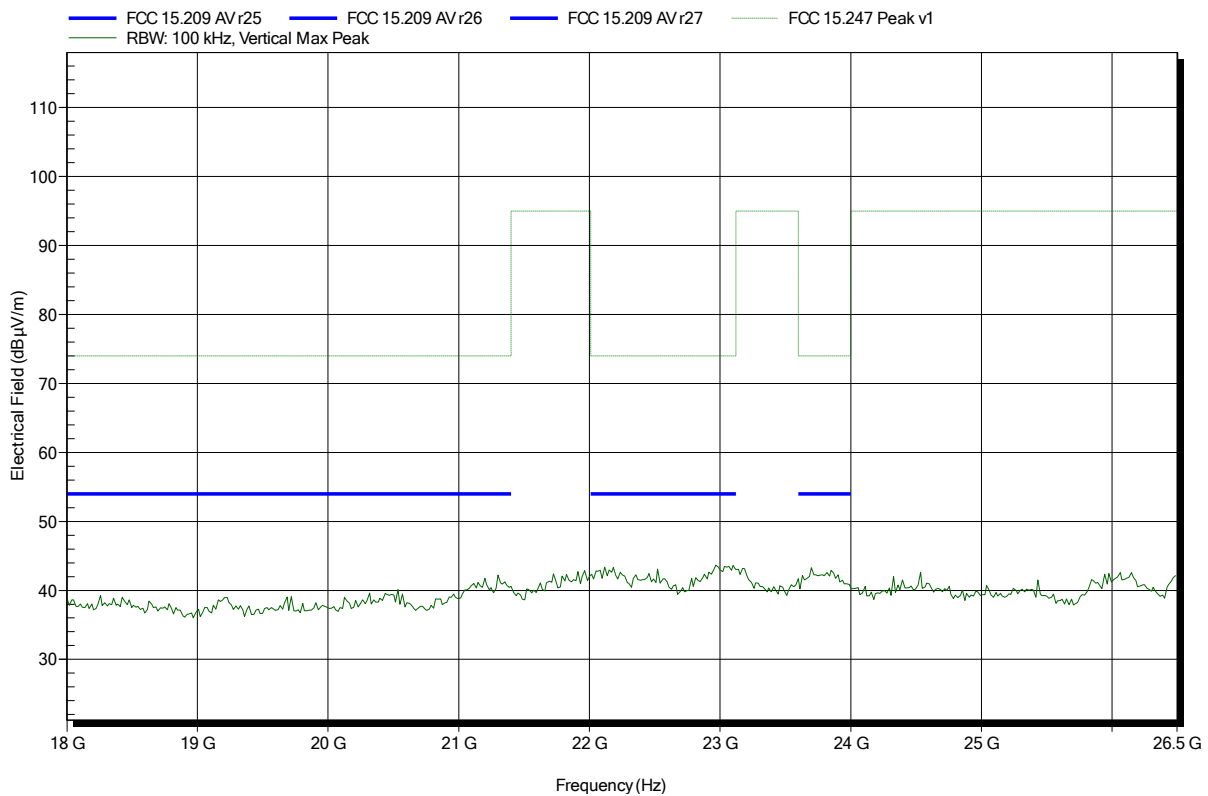


**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2440 MHz  
 Test Date: 2014-09-05  
 Note:

Index 65

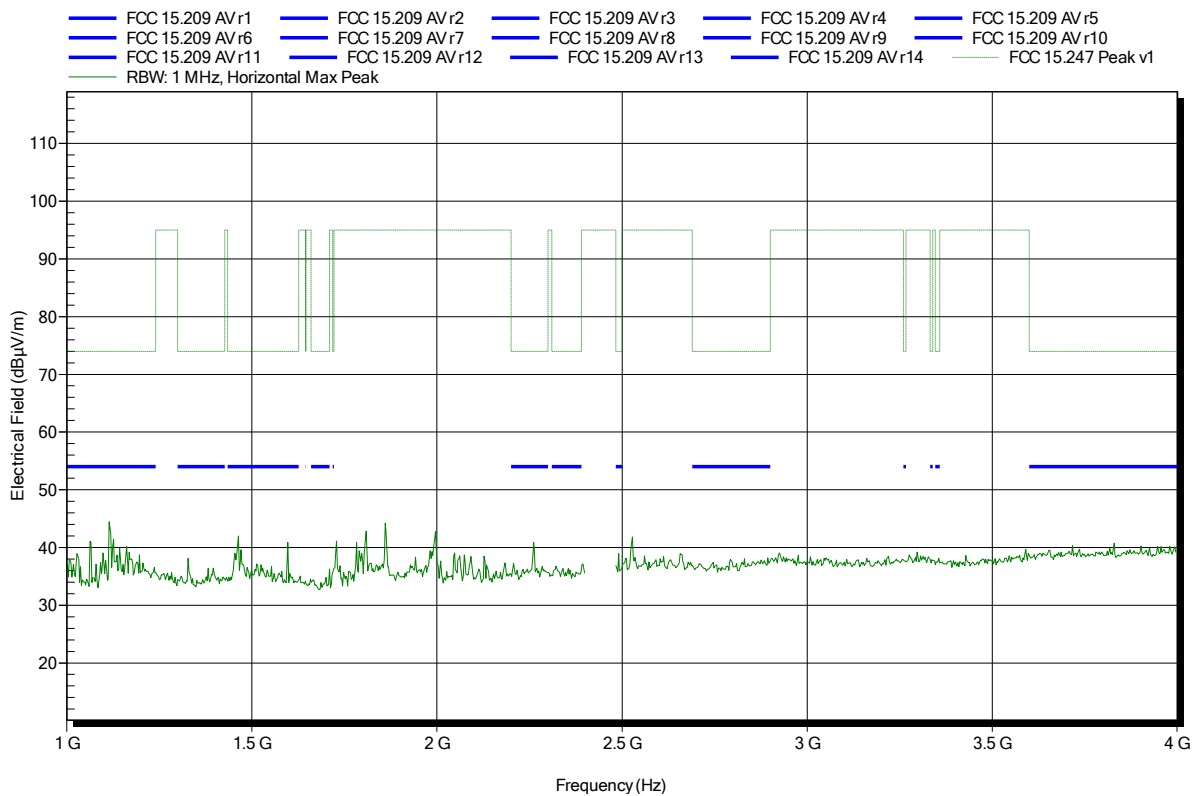


**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2440 MHz  
 Test Date: 2014-09-05  
 Note:

Index 67

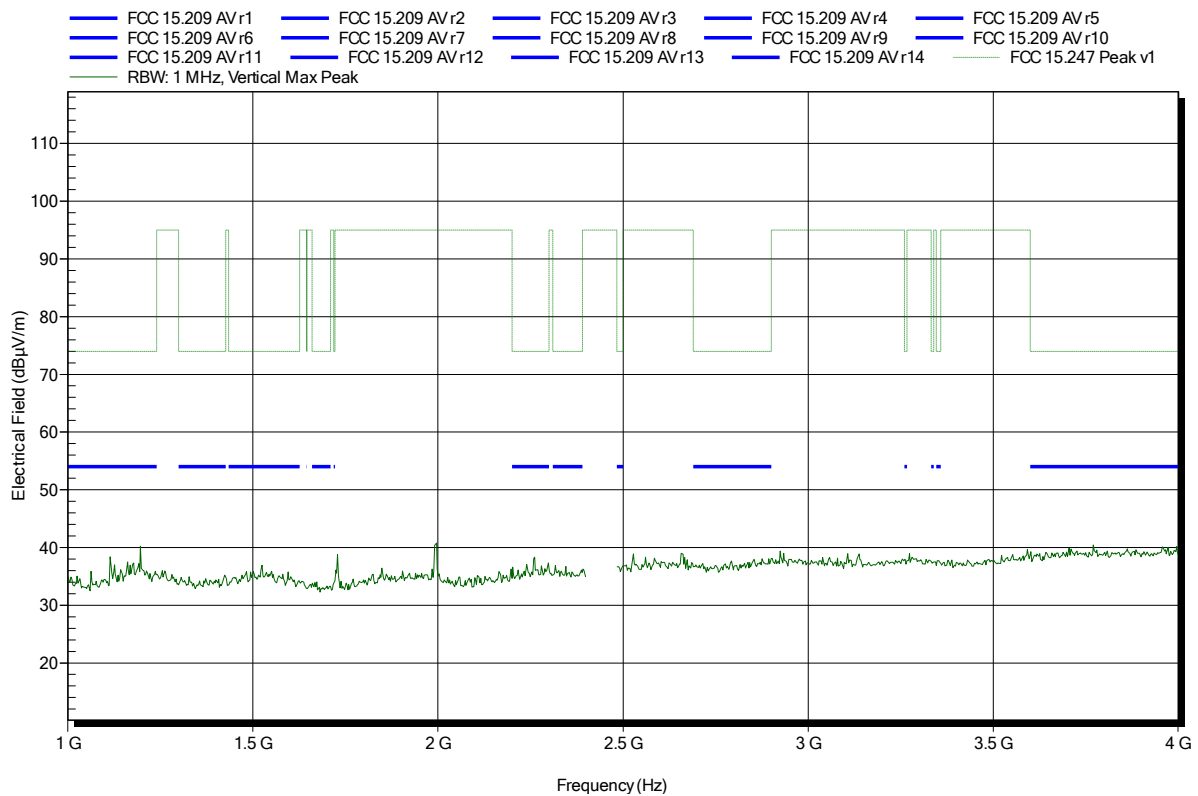


**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2440 MHz  
 Test Date: 2014-09-05  
 Note:

Index 66

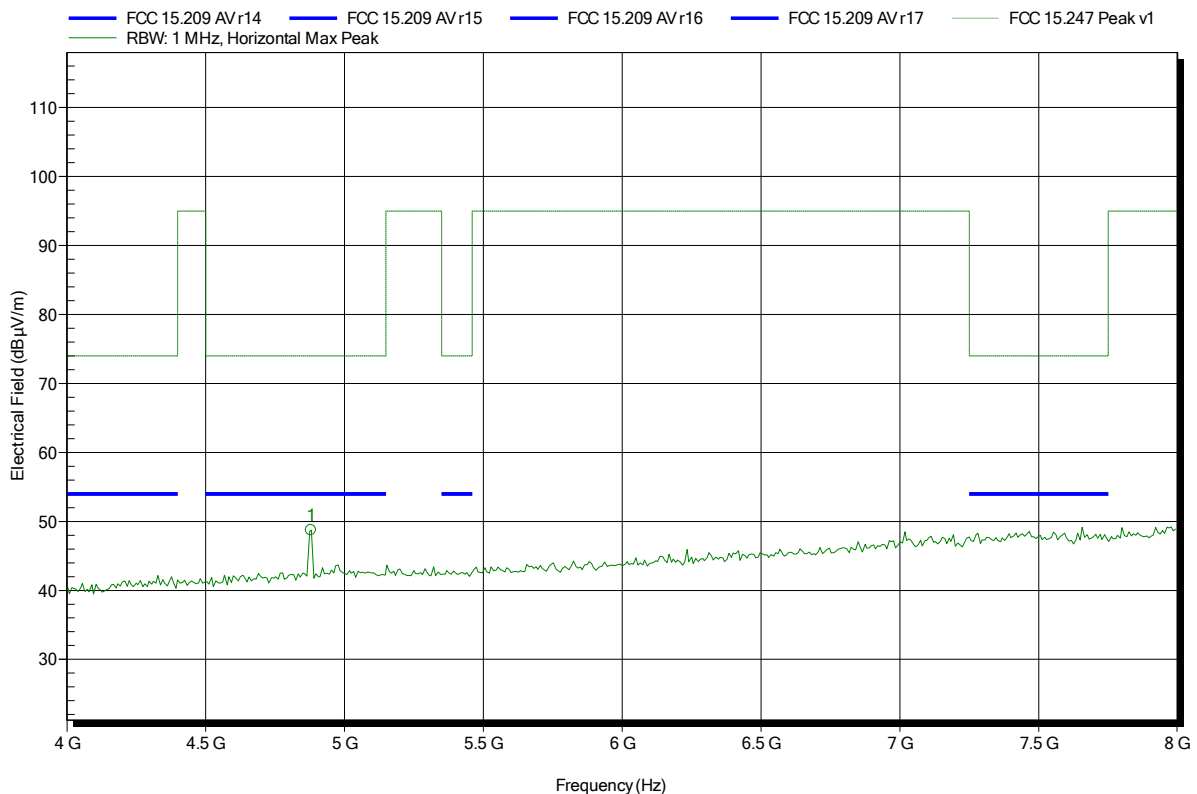


| Frequency | Peak         | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|------------|-----------------|-------------|
| 4.88 GHz  | 48.72 dBµV/m | 74 dBµV/m  | -25.28 dB       | Pass        |

**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2440 MHz  
 Test Date: 2014-09-05  
 Note:

Index 68

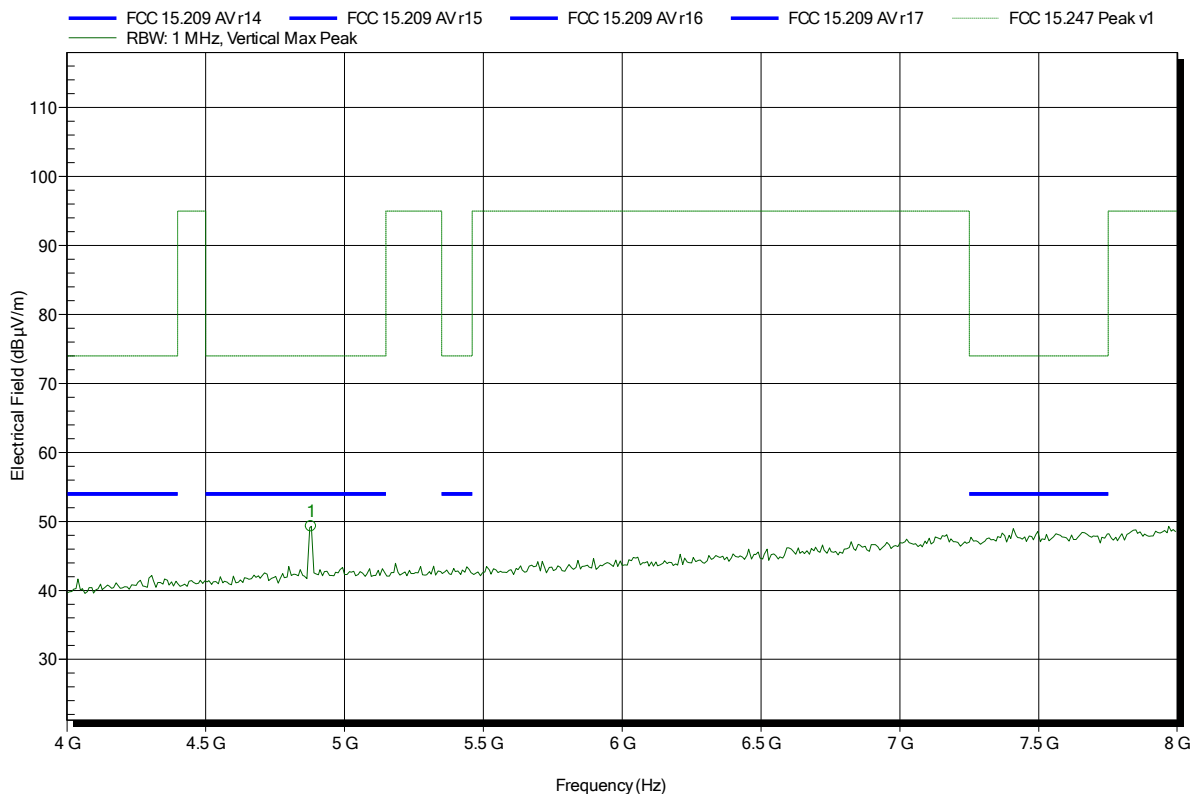


| Frequency | Peak        | Peak Limit | Peak Difference | Peak Status |
|-----------|-------------|------------|-----------------|-------------|
| 4.88 GHz  | 49.3 dBµV/m | 74 dBµV/m  | -24.7 dB        | Pass        |

**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTLE; GFSK; 2440 MHz  
 Test Date: 2014-09-05  
 Note:

Index 79

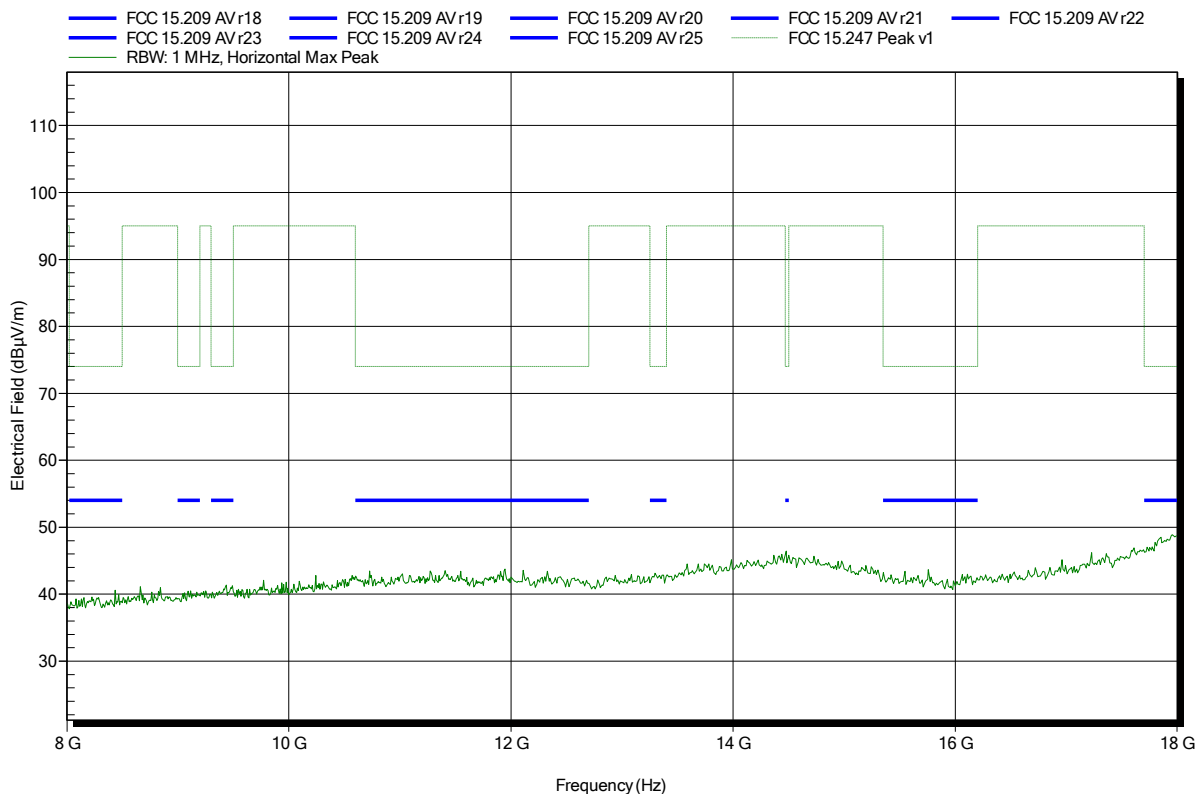


**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTLE; GFSK; 2440 MHz  
 Test Date: 2014-09-05  
 Note:

Index 81

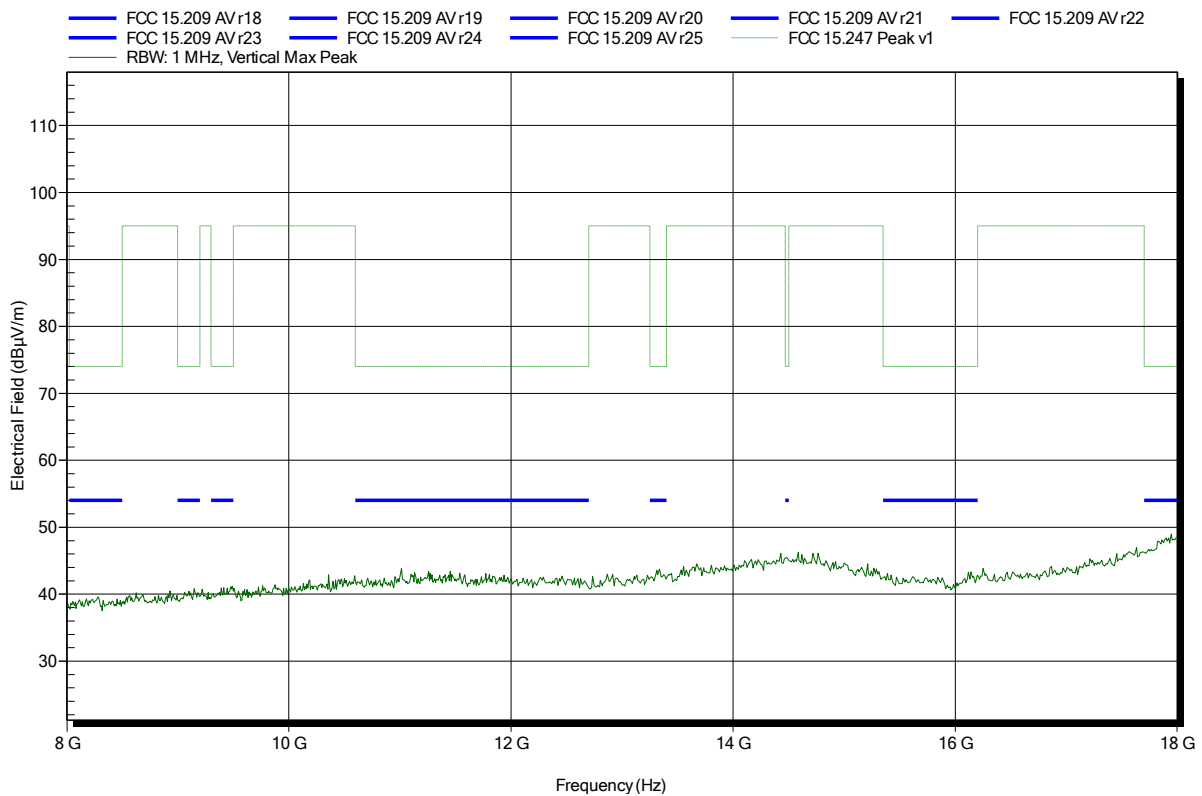


**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

|                       |   |
|-----------------------|---|
| Applicant:            | Leica                                     |
| EUT Name:             | Laser Distance Meter                      |
| Model:                | Leica DISTO S910                          |
| Test Site:            | Eurofins Product Service GmbH             |
| Operator:             | Mr. Treffke                               |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6V DC lithium battery |
| Antenna:              | Rohde & Schwarz HL 025, Horizontal        |
| Measurement distance: | 1 m                                       |
| Mode:                 | TX; BTLE; GFSK; 2440 MHz                  |
| Test Date:            | 2014-09-05                                |
| Note:                 |   |

Index 80

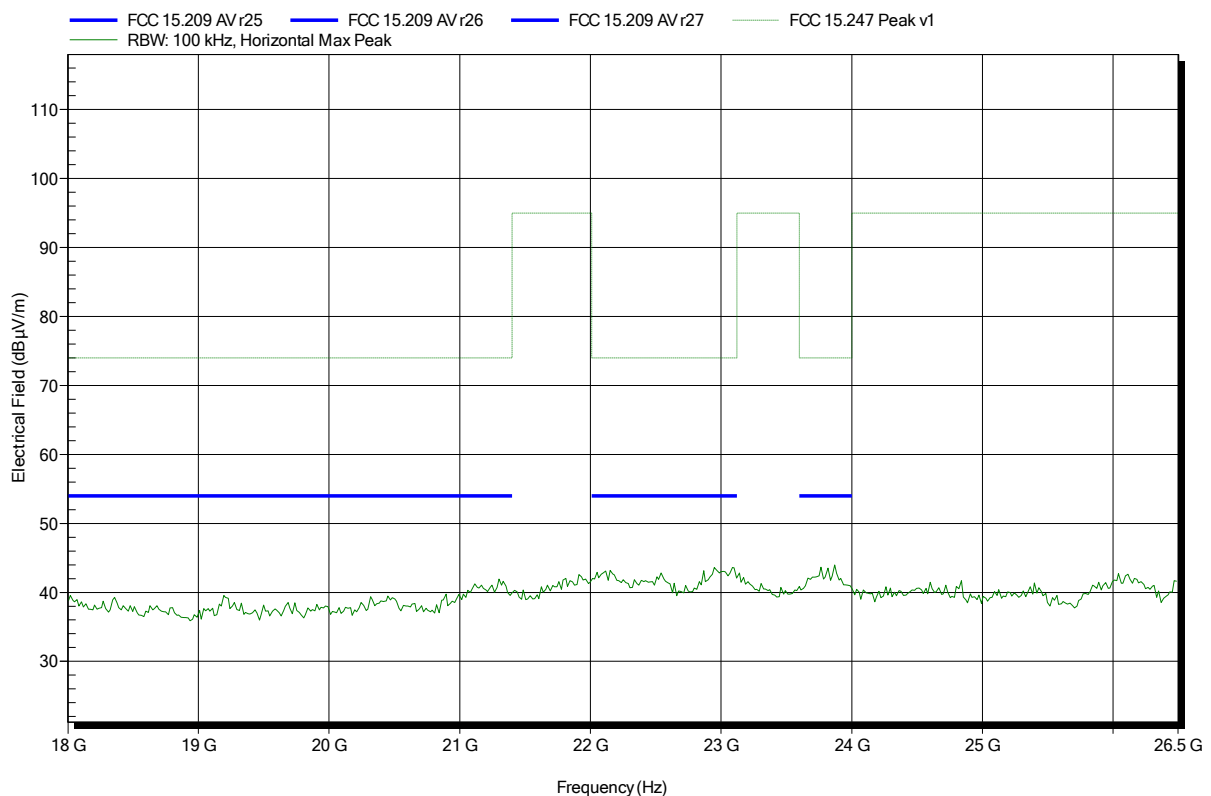




**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

|                       |   |
|-----------------------|---|
| Applicant:            | Leica                                     |
| EUT Name:             | Laser Distance Meter                      |
| Model:                | Leica DISTO S910                          |
| Test Site:            | Eurofins Product Service GmbH             |
| Operator:             | Mr. Treffke                               |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6V DC lithium battery |
| Antenna:              | Rohde & Schwarz HL 025, Vertical          |
| Measurement distance: | 1 m                                       |
| Mode:                 | TX; BTLE; GFSK; 2440 MHz                  |
| Test Date:            | 2014-09-05                                |
| Note:                 |   |

Index 82

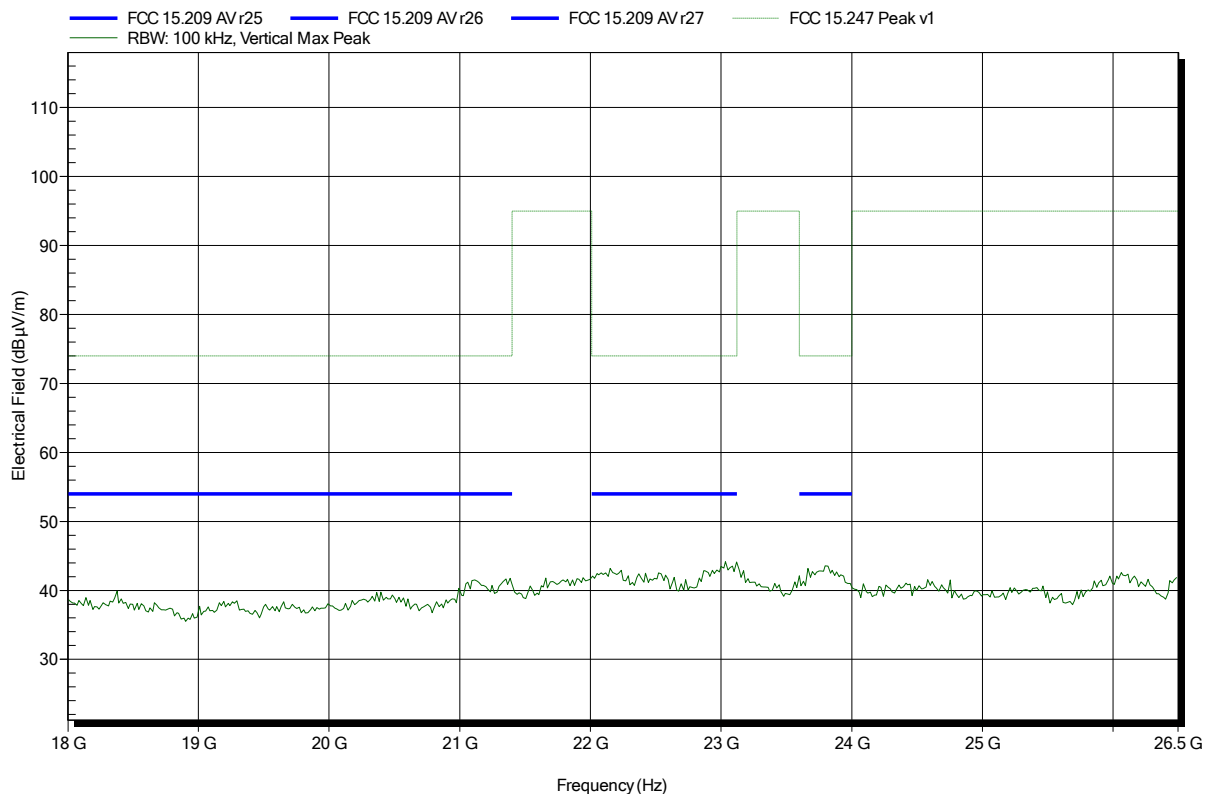


**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2480 MHz  
 Test Date: 2014-09-05  
 Note:

Index 69

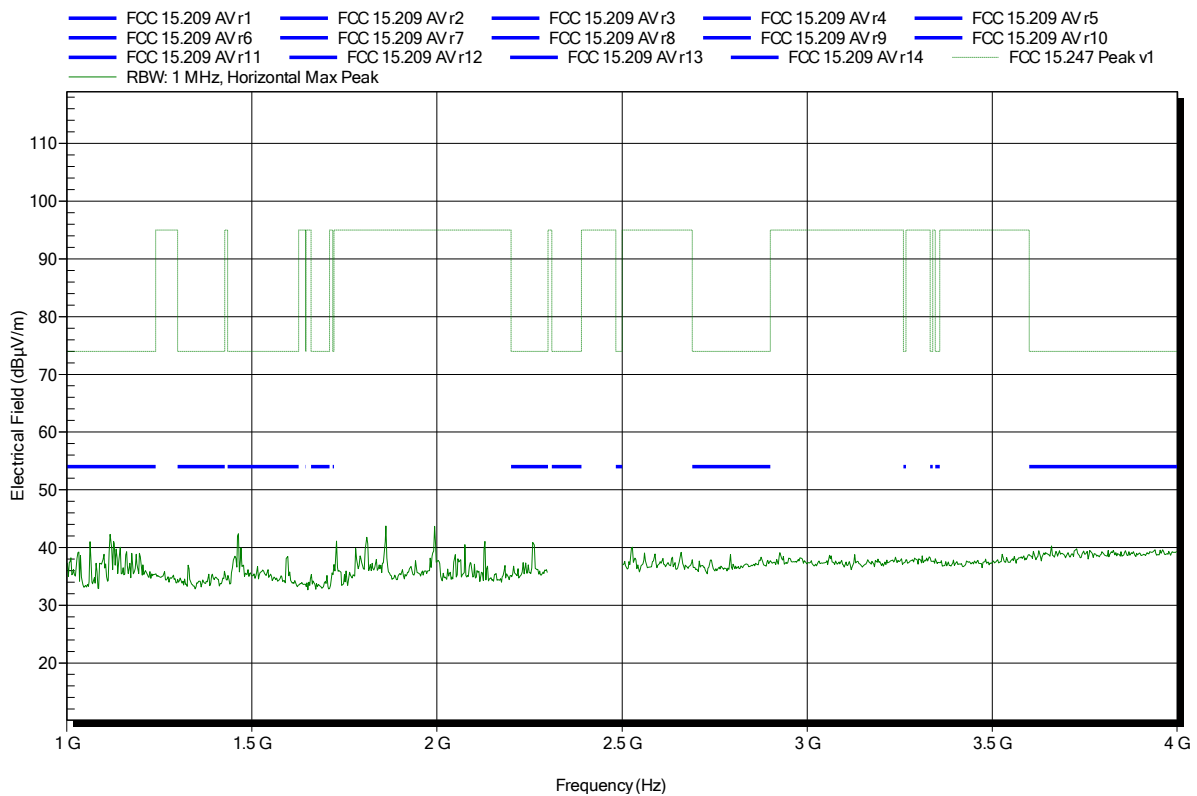


**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2480 MHz  
 Test Date: 2014-09-05  
 Note:

Index 72

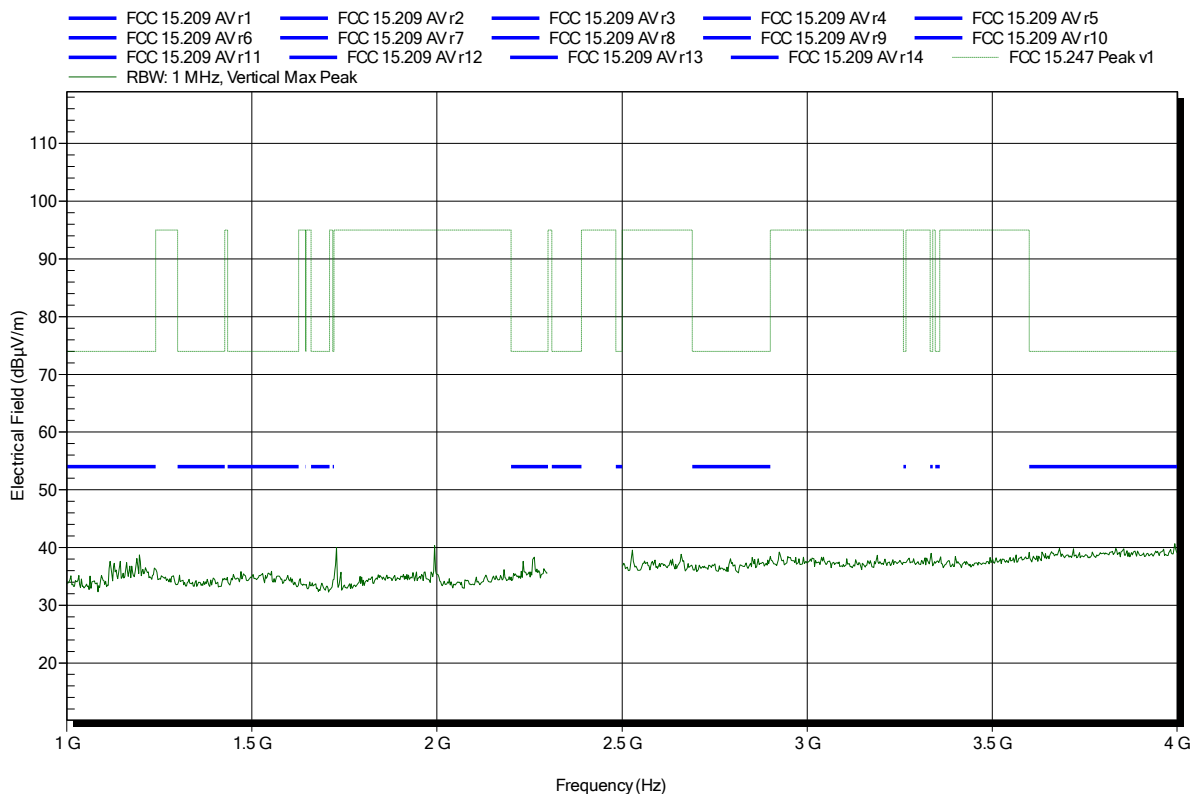


**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2480 MHz  
 Test Date: 2014-09-05  
 Note: upper bandedge

Index 70

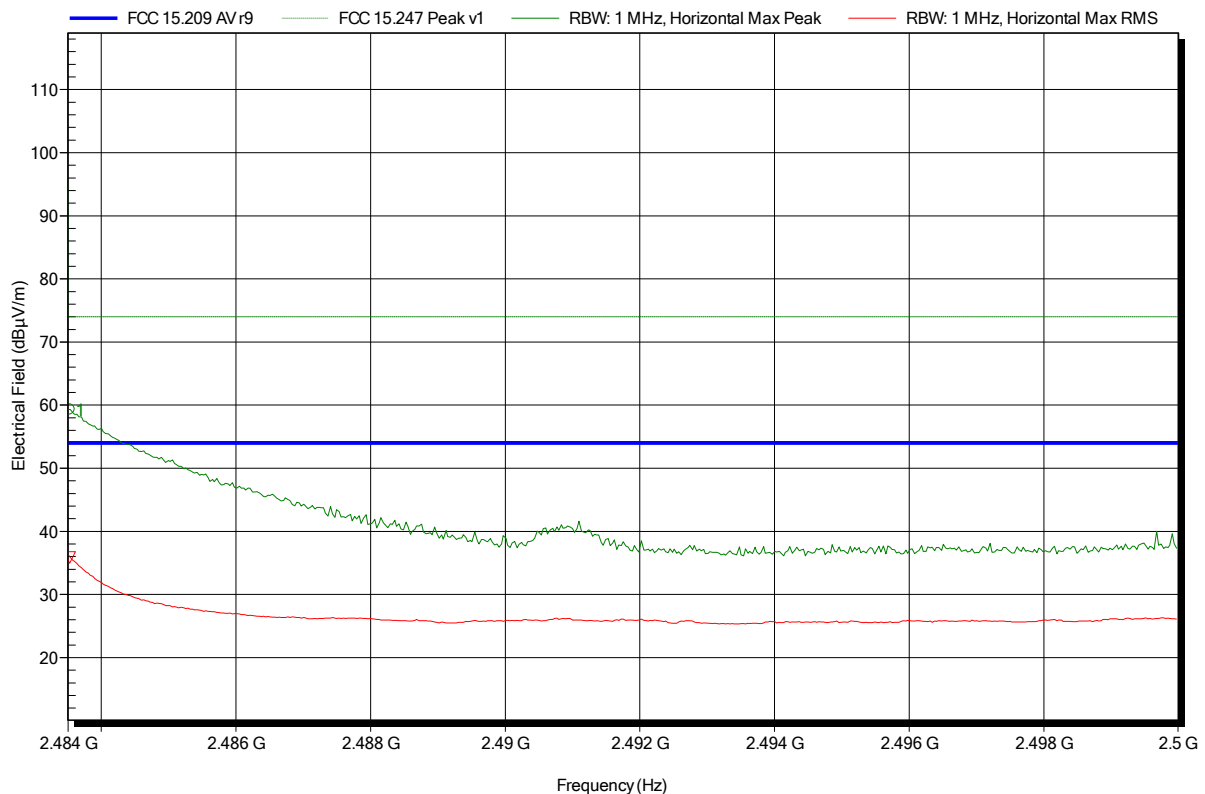

| Frequency  | Peak         | Peak Limit | Peak Difference | Peak Status |
|------------|--------------|------------|-----------------|-------------|
| 2.4835 GHz | 59.32 dBµV/m | 74 dBµV/m  | -14.68 dB       | Pass        |


| Frequency  | RMS          | RMS Limit | RMS Difference | RMS Status |
|------------|--------------|-----------|----------------|------------|
| 2.4835 GHz | 35.87 dBµV/m | 54 dBµV/m | -18.13 dB      | Pass       |

**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2480 MHz  
 Test Date: 2014-09-05  
 Note: upper bandedge

Index 73

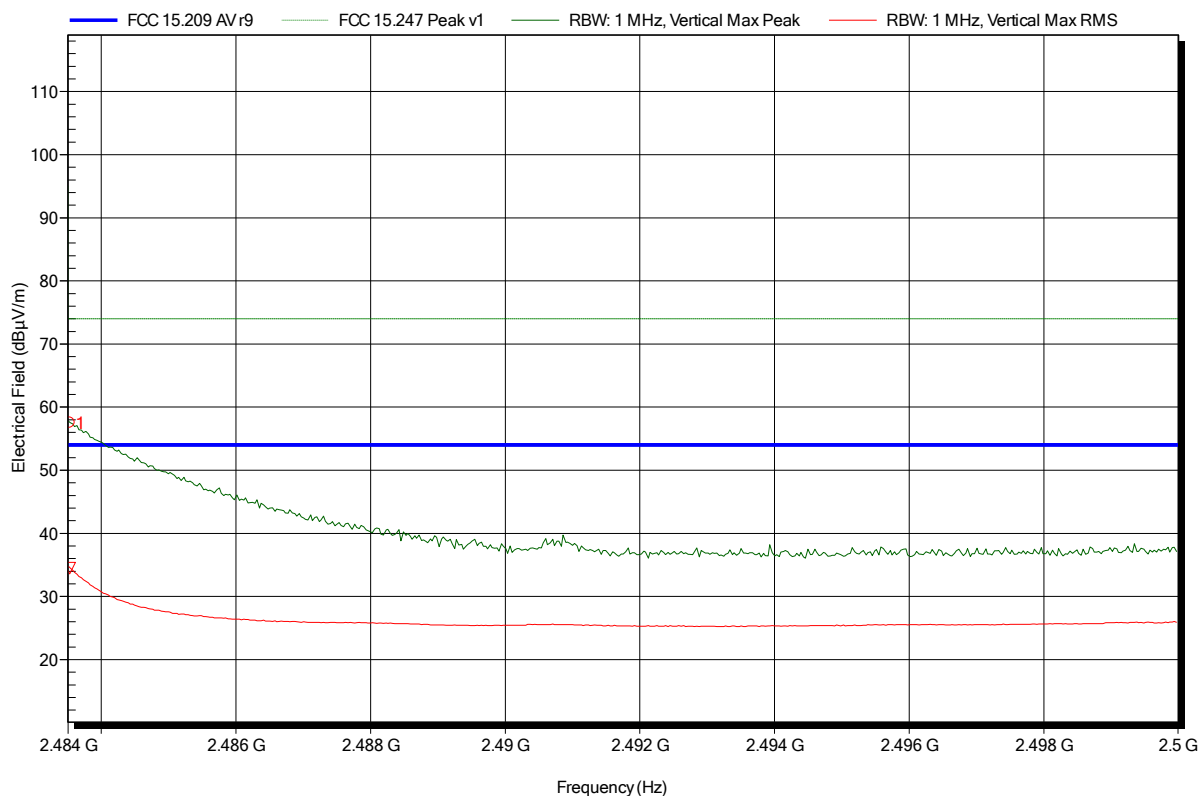


| Frequency  | Peak         | Peak Limit | Peak Difference | Peak Status |
|------------|--------------|------------|-----------------|-------------|
| 2.4835 GHz | 57.51 dBµV/m | 74 dBµV/m  | -16.49 dB       | Pass        |
| Frequency  | RMS          | RMS Limit  | RMS Difference  | RMS Status  |
| 2.4835 GHz | 34.51 dBµV/m | 54 dBµV/m  | -19.49 dB       | Pass        |

**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2480 MHz  
 Test Date: 2014-09-05  
 Note:

Index 71

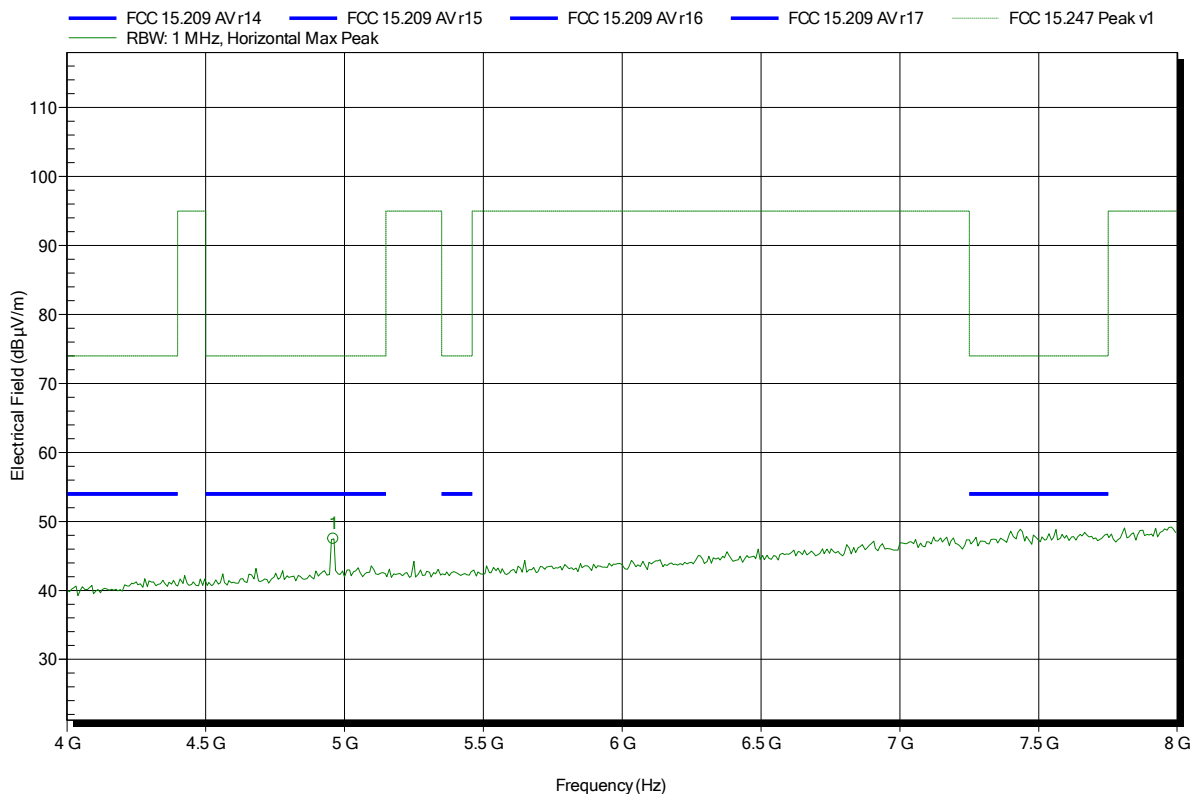


| Frequency | Peak         | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|------------|-----------------|-------------|
| 4.96 GHz  | 47.47 dBµV/m | 74 dBµV/m  | -26.53 dB       | Pass        |

**Spurious emissions according to FCC 15.247**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BTLE; GFSK; 2480 MHz  
 Test Date: 2014-09-05  
 Note:

Index 74

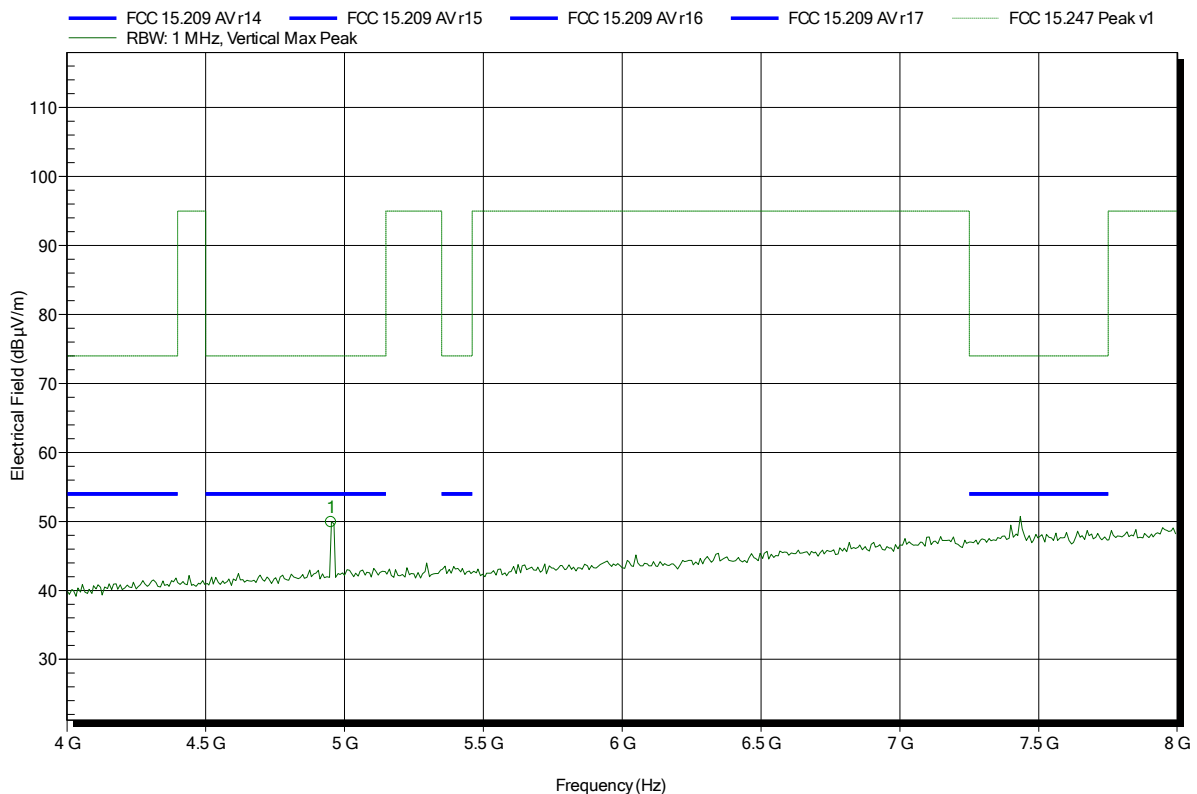


| Frequency | Peak         | Peak Limit | Peak Difference | Peak Status |
|-----------|--------------|------------|-----------------|-------------|
| 4.952 GHz | 49.91 dBµV/m | 74 dBµV/m  | -24.09 dB       | Pass        |

**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTLE; GFSK; 2480 MHz  
 Test Date: 2014-09-05  
 Note:

Index 83

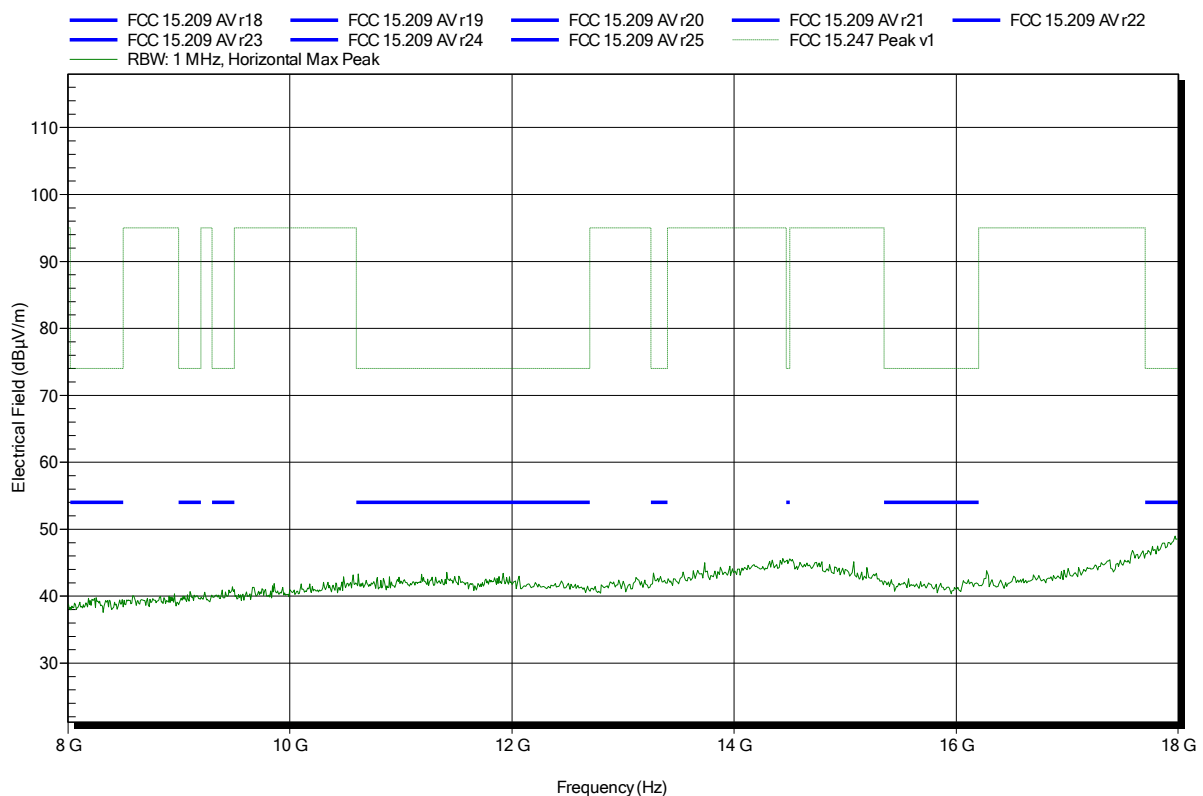




**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BTLE; GFSK; 2480 MHz  
 Test Date: 2014-09-05  
 Note:

Index 85

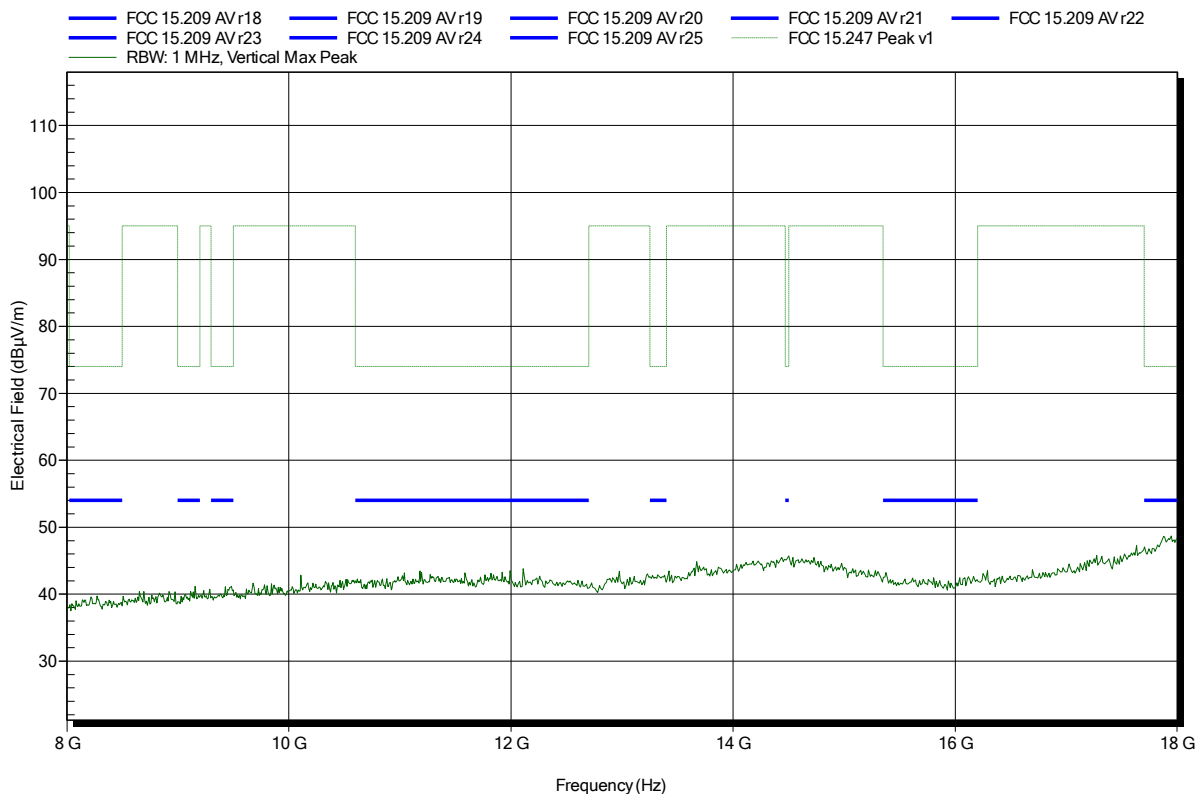


**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

|                       |   |
|-----------------------|---|
| Applicant:            | Leica                                     |
| EUT Name:             | Laser Distance Meter                      |
| Model:                | Leica DISTO S910                          |
| Test Site:            | Eurofins Product Service GmbH             |
| Operator:             | Mr. Treffke                               |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6V DC lithium battery |
| Antenna:              | Rohde & Schwarz HL 025, Horizontal        |
| Measurement distance: | 1 m                                       |
| Mode:                 | TX; BTLE; GFSK; 2480 MHz                  |
| Test Date:            | 2014-09-05                                |
| Note:                 |   |

Index 84

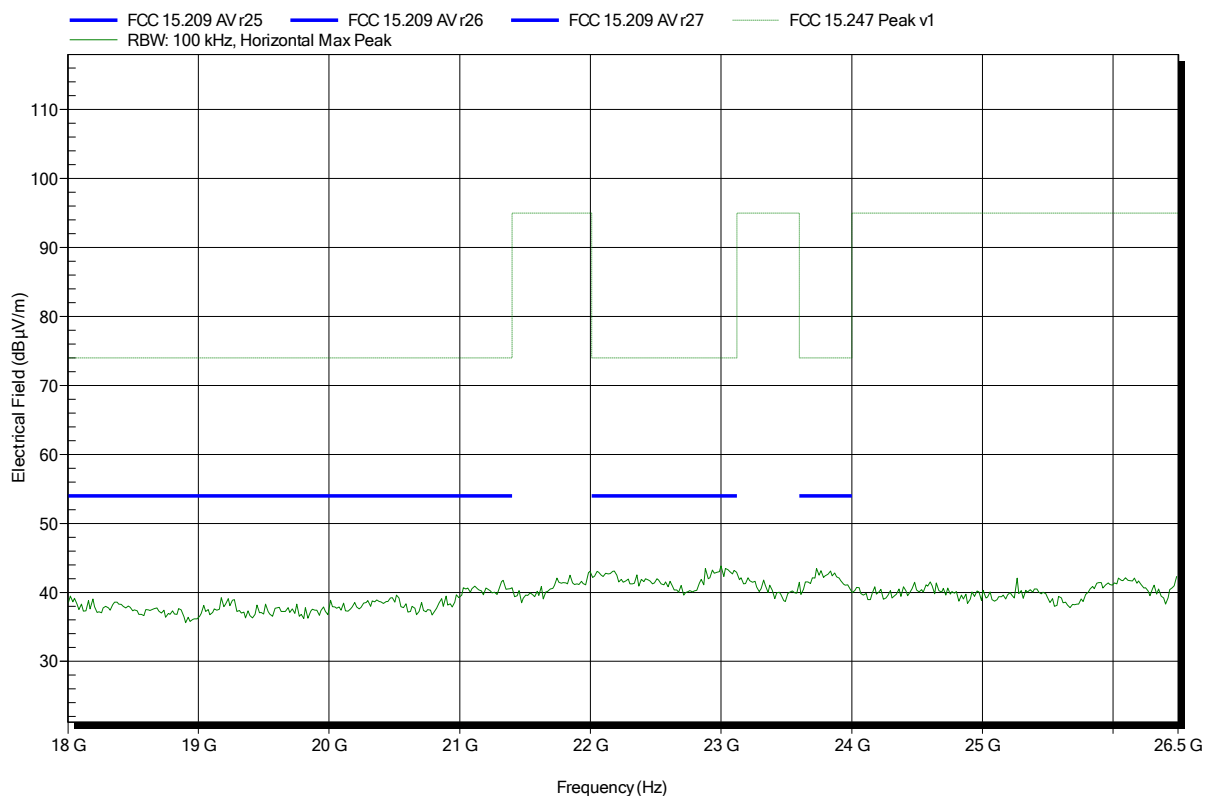


**Spurious emissions according to FCC 15.247**

Project number: G0M-1407-4002

|                       |   |
|-----------------------|---|
| Applicant:            | Leica                                     |
| EUT Name:             | Laser Distance Meter                      |
| Model:                | Leica DISTO S910                          |
| Test Site:            | Eurofins Product Service GmbH             |
| Operator:             | Mr. Treffke                               |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6V DC lithium battery |
| Antenna:              | Rohde & Schwarz HL 025, Vertical          |
| Measurement distance: | 1 m                                       |
| Mode:                 | TX; BTLE; GFSK; 2480 MHz                  |
| Test Date:            | 2014-09-05                                |
| Note:                 |   |

Index 86

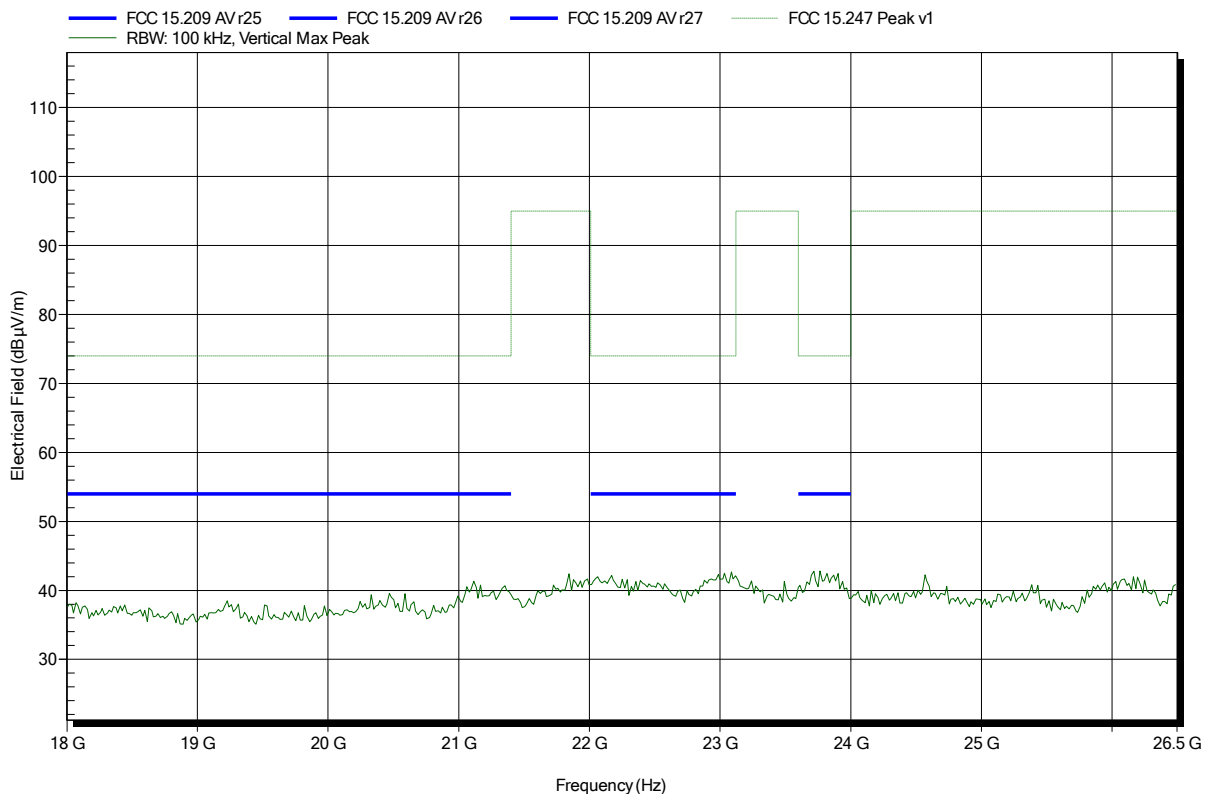


## ANNEX B Receiver radiated spurious emissions

### Spurious emissions according to RSS-GEN

Project number: G0M-1407-4002

|                       |  |
|-----------------------|--|
| Applicant:            | Leica                                      |
| EUT Name:             | Laser Distance Meter                       |
| Model:                | Leica DISTO S910                           |
| Test Site:            | Eurofins Product Service GmbH              |
| Operator:             | Mr. Treffke                                |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6 V DC lithium battery |
| Antenna:              | Rohde & Schwarz HK 116, Horizontal         |
| Measurement distance: | 3 m  |
| Mode:                 | RX; BTLE; 2440 MHz                         |
| Test Date:            | 2014-09-05                                 |
| Note:                 |  |

Index 91

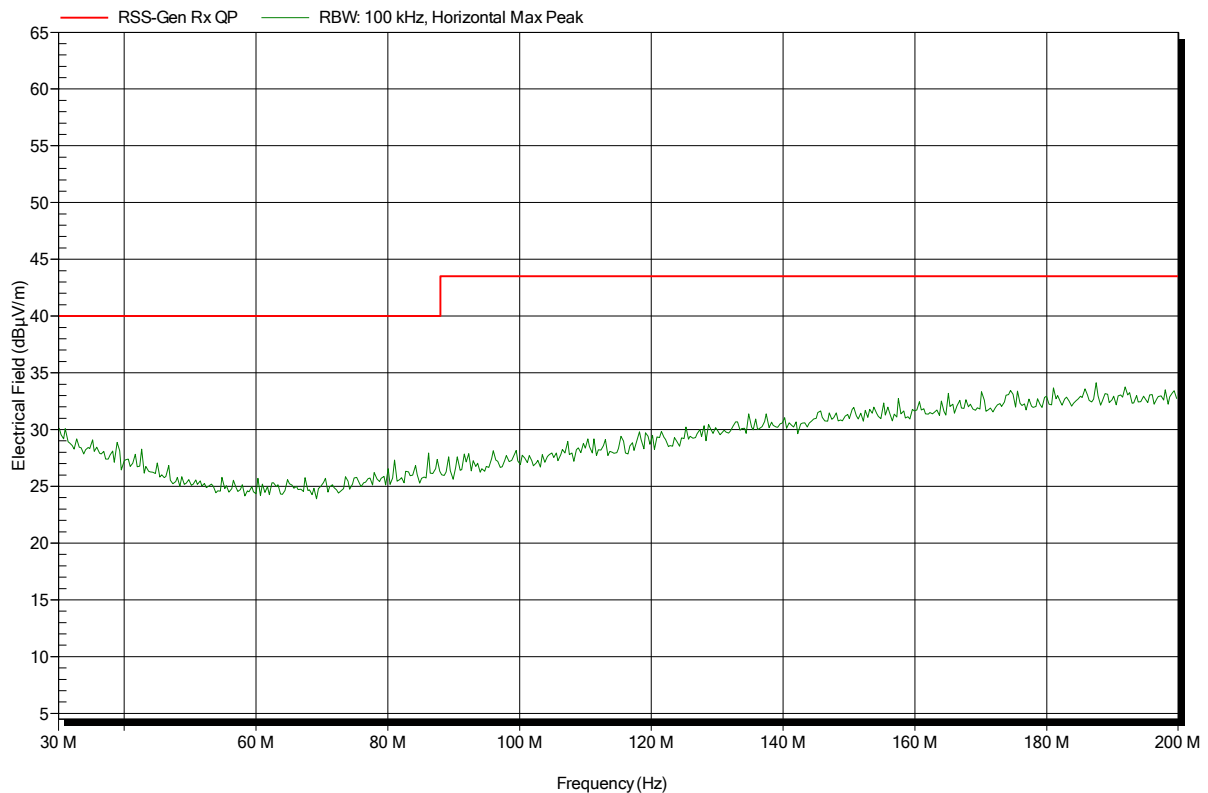


**Spurious emissions according to RSS-GEN**

Project number: G0M-1407-4002

|                       |  |
|-----------------------|--|
| Applicant:            | Leica                                      |
| EUT Name:             | Laser Distance Meter                       |
| Model:                | Leica DISTO S910                           |
| Test Site:            | Eurofins Product Service GmbH              |
| Operator:             | Mr. Treffke                                |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6 V DC lithium battery |
| Antenna:              | Rohde & Schwarz HK 116, Vertical           |
| Measurement distance: | 3 m  |
| Mode:                 | RX; BTLE; 2440 MHz                         |
| Test Date:            | 2014-09-05                                 |
| Note:                 |  |

Index 92

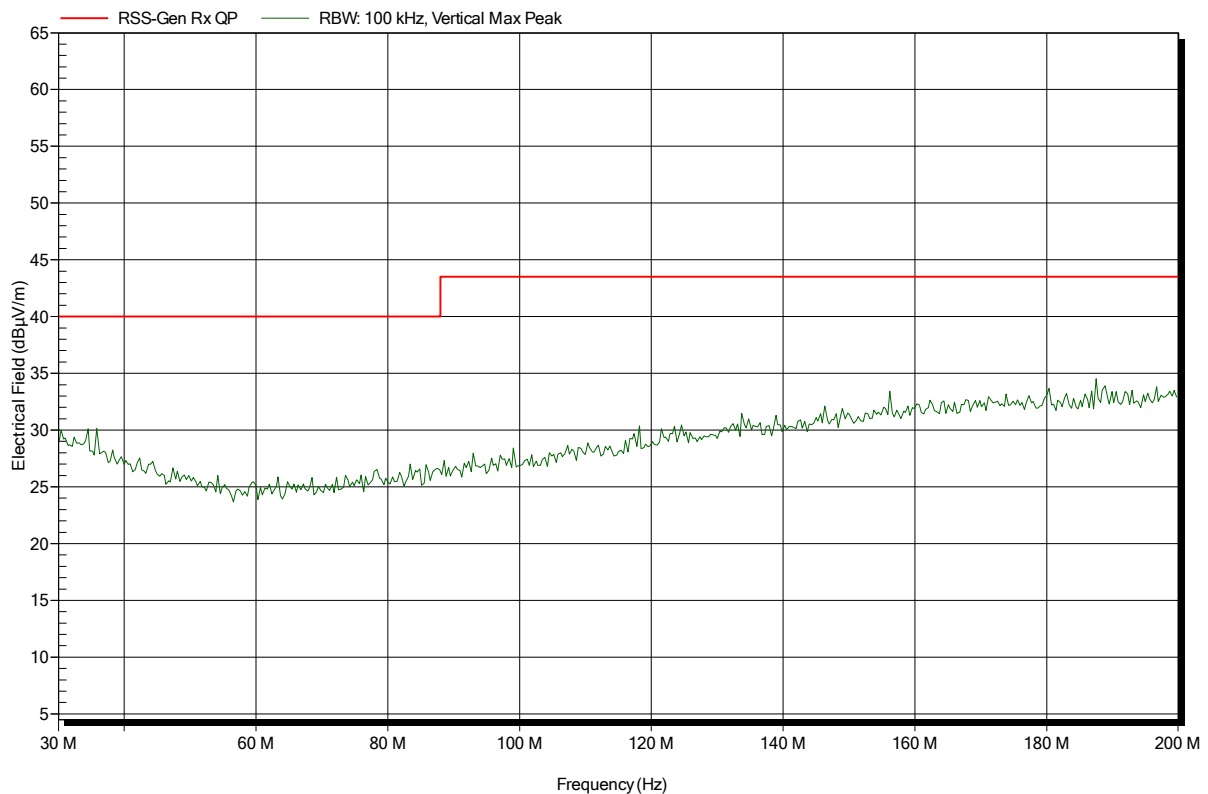


**Spurious emissions according to RSS-GEN**

Project number: GOM-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6 V DC lithium battery  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; BTLE; 2440 MHz  
 Test Date: 2014-09-05  
 Note:

Index 93

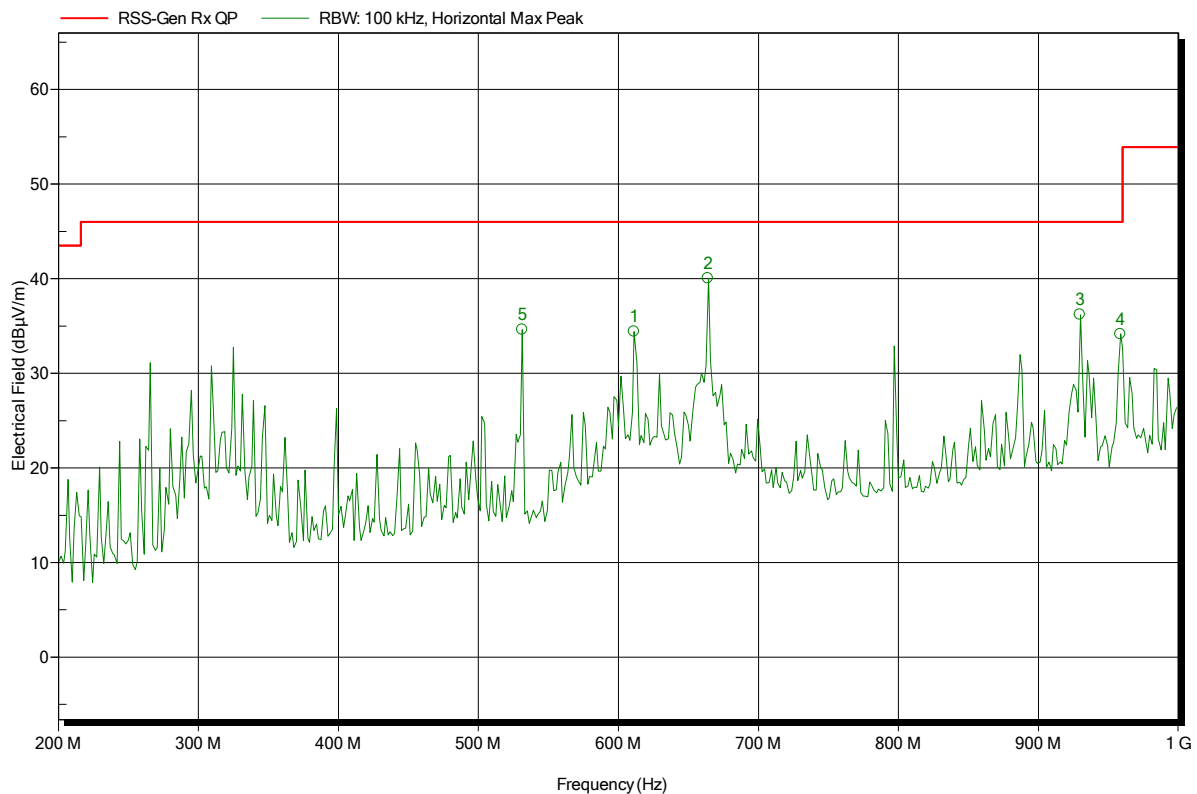


| Frequency | Peak         | Peak Limit | Peak Difference | Status |
|-----------|--------------|------------|-----------------|--------|
| 531.2 MHz | 34.63 dBµV/m | 46 dBµV/m  | -11.37 dB       | Pass   |
| 611.2 MHz | 34.42 dBµV/m | 46 dBµV/m  | -11.58 dB       | Pass   |
| 664 MHz   | 40.03 dBµV/m | 46 dBµV/m  | -5.97 dB        | Pass   |
| 929.6 MHz | 36.2 dBµV/m  | 46 dBµV/m  | -9.8 dB         | Pass   |
| 958.4 MHz | 34.15 dBµV/m | 46 dBµV/m  | -11.85 dB       | Pass   |

**Spurious emissions according to RSS-GEN**

Project number: G0M-1407-4002

|                       |  |
|-----------------------|--|
| Applicant:            | Leica                                      |
| EUT Name:             | Laser Distance Meter                       |
| Model:                | Leica DISTO S910                           |
| Test Site:            | Eurofins Product Service GmbH              |
| Operator:             | Mr. Treffke                                |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6 V DC lithium battery |
| Antenna:              | Rohde & Schwarz HL 223, Vertical           |
| Measurement distance: | 3 m  |
| Mode:                 | RX; BTLE; 2440 MHz                         |
| Test Date:            | 2014-09-05                                 |
| Note:                 |  |

Index 94

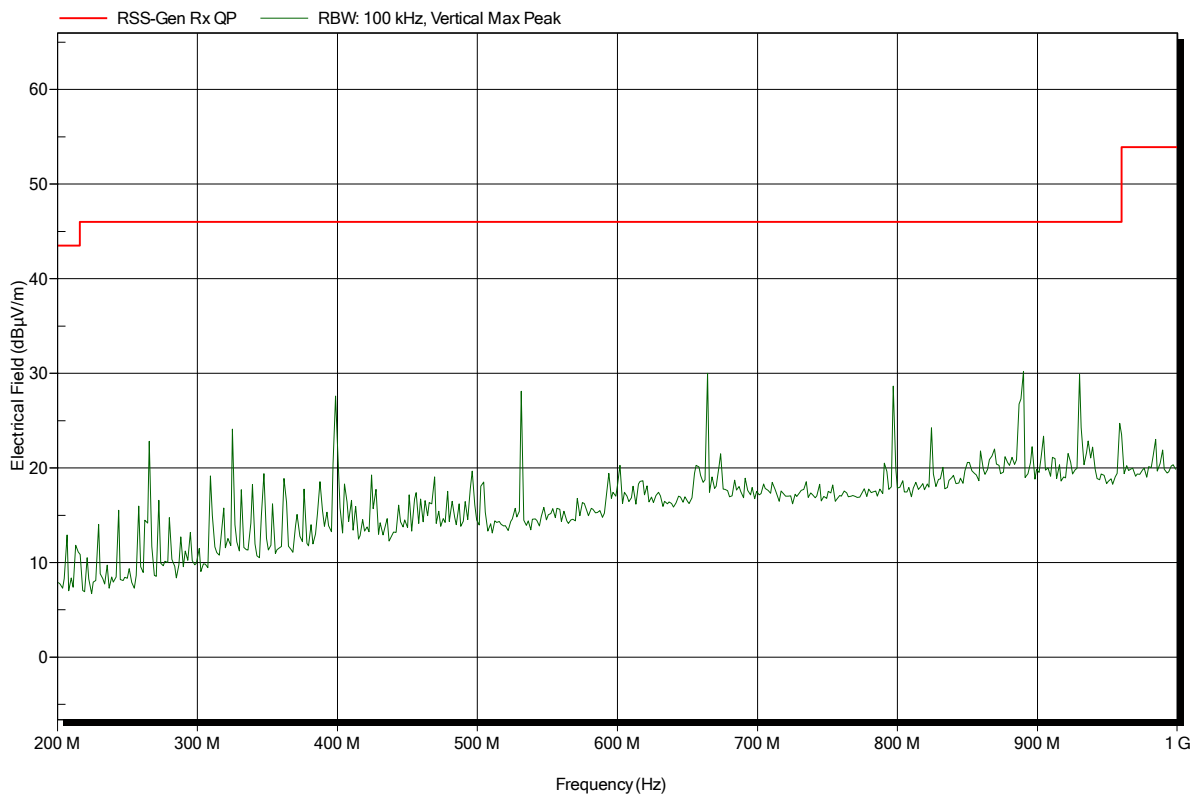


**Spurious emissions according to RSS-GEN**

Project number: G0M-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6 V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; BTLE; 2440 MHz  
 Test Date: 2014-09-05  
 Note:

Index 95

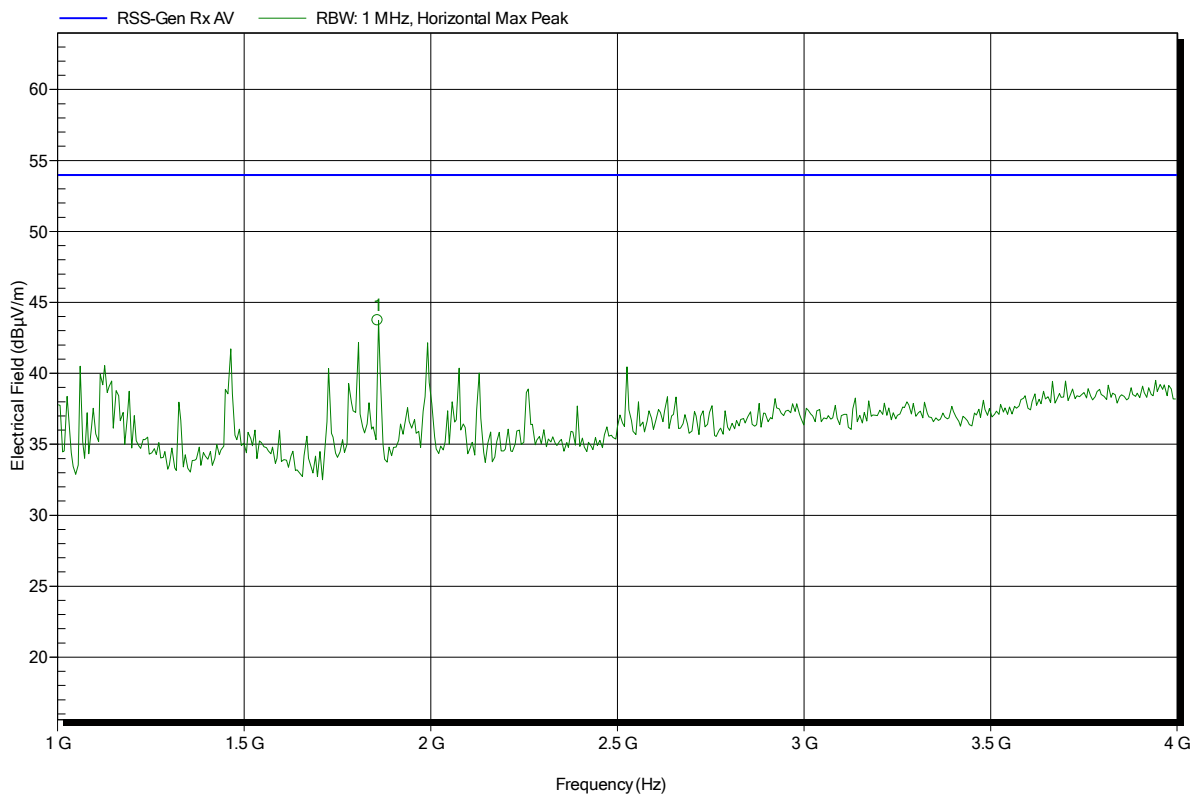

| Frequency | Peak         | Peak Limit   | Peak Difference | Status |
|-----------|--------------|--------------|-----------------|--------|
| 1.858 GHz | 43.74 dBµV/m | 53.98 dBµV/m | -10.24 dB       | Pass   |




**Spurious emissions according to RSS-GEN**

Project number: G0M-1407-4002

Applicant: Leica  
 EUT Name: Laser Distance Meter  
 Model: Leica DISTO S910  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.6 V DC lithium battery  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BTLE; 2440 MHz  
 Test Date: 2014-09-05  
 Note:

Index 97

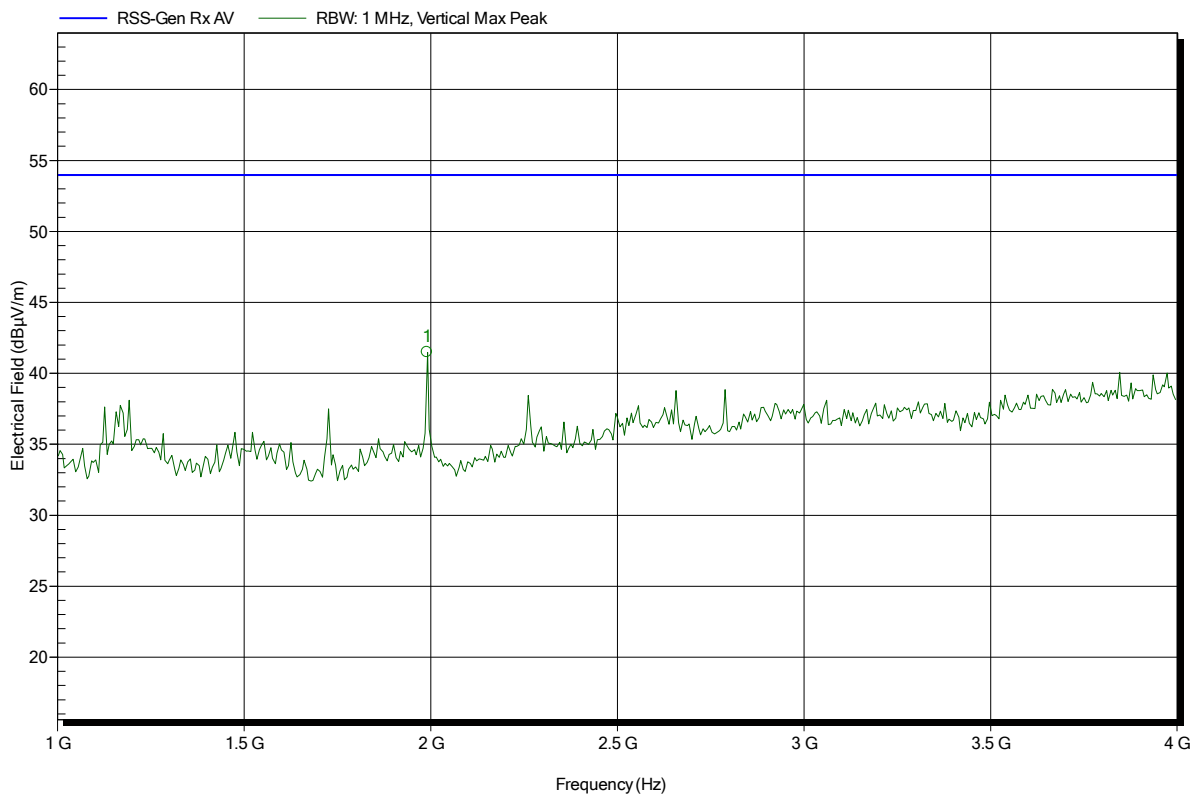


| Frequency | Peak         | Peak Limit   | Peak Difference | Status |
|-----------|--------------|--------------|-----------------|--------|
| 1.99 GHz  | 41.49 dBµV/m | 53.98 dBµV/m | -12.49 dB       | Pass   |

**Spurious emissions according to RSS-GEN**

Project number: GOM-1407-4002

|                       |  |
|-----------------------|--|
| Applicant:            | Leica                                      |
| EUT Name:             | Laser Distance Meter                       |
| Model:                | Leica DISTO S910                           |
| Test Site:            | Eurofins Product Service GmbH              |
| Operator:             | Mr. Treffke                                |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6 V DC lithium battery |
| Antenna:              | Schwarzbeck BBHA 9120D, Horizontal         |
| Measurement distance: | 3 m  |
| Mode:                 | RX; BTLE; 2440 MHz                         |
| Test Date:            | 2014-09-05                                 |
| Note:                 |  |

Index 96

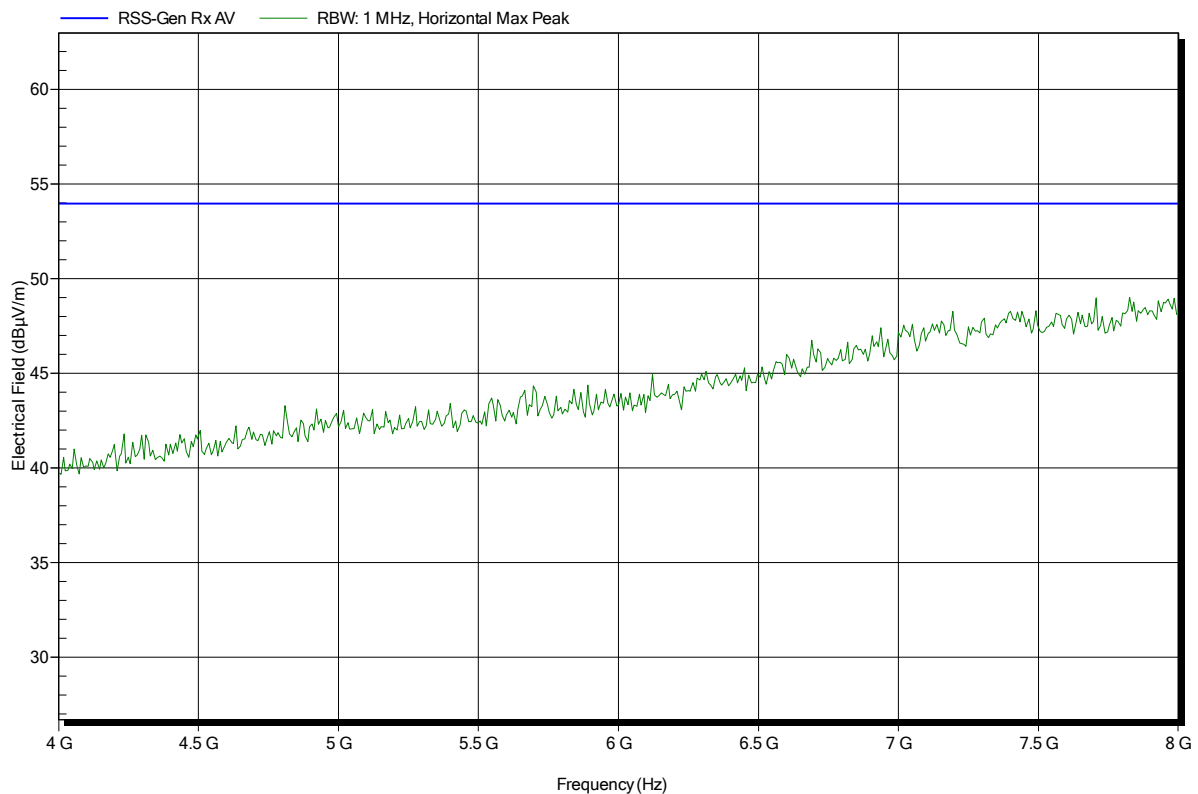

**Spurious emissions according to RSS-GEN**

Project number: GOM-1407-4002

|                       |  |
|-----------------------|--|
| Applicant:            | Leica                                      |
| EUT Name:             | Laser Distance Meter                       |
| Model:                | Leica DISTO S910                           |
| Test Site:            | Eurofins Product Service GmbH              |
| Operator:             | Mr. Treffke                                |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.6 V DC lithium battery |
| Antenna:              | Schwarzbeck BBHA 9120D, Vertical           |
| Measurement distance: | 3 m  |
| Mode:                 | RX; BTLE; 2440 MHz                         |
| Test Date:            | 2014-09-05                                 |
| Note:                 |  |

Index 98

