



FCC RF Test Report

APPLICANT : IEI Intagration Corp
EQUIPMENT : Tablet PC
BRAND NAME : iEi
MODEL NAME : TRN-3200T
FCC ID : RFH-TRN3200T
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Sep. 02, 2016 and testing was completed on Sep. 30, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : RFH-TRN3200T

Page Number : 1 of 35

Report Issued Date : Oct. 04, 2016

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.4



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Modification of EUT 6

 1.6 Testing Location 7

 1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example 12

3 TEST RESULT 13

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 13

 3.2 Maximum Conducted Output Power Measurement 16

 3.3 Power Spectral Density Measurement 17

 3.4 Unwanted Emissions Measurement 20

 3.5 AC Conducted Emission Measurement 25

 3.6 Frequency Stability Measurement 31

 3.7 Automatically Discontinue Transmission 32

 3.8 Antenna Requirements 33

4 LIST OF MEASURING EQUIPMENT 34

5 UNCERTAINTY OF EVALUATION 35

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 5.24 dB at 194.700 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.70 dB at 2.470 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

IEI Intagrations Corp

No.29, Zhongxing Rd., Xizhi Dist., New Taipei City 221. Taiwan (R.O.C)

1.2 Manufacturer

IEI Intagrations Corp

No.29, Zhongxing Rd., Xizhi Dist., New Taipei City 221. Taiwan (R.O.C)

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	iEi
Model Name	TRN-3200T
FCC ID	RFH-TRN3200T
EUT supports Radios application	WLAN 11 a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	1.01
SW Version	1.00
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 12.99 dBm / 0.0199 W 802.11n HT20 : 11.94 dBm / 0.0156 W 802.11n HT40 : 11.54 dBm / 0.0143 W 802.11ac VHT20: 11.96 dBm / 0.0157 W 802.11ac VHT40: 11.64 dBm / 0.0146 W 802.11ac VHT80: 10.00 dBm / 0.0100 W
99% Occupied Bandwidth	802.11a : 18.70 MHz 802.11ac VHT20 : 18.65 MHz 802.11ac VHT40 : 36.90 MHz 802.11ac VHT80 : 75.36 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	PCB Antenna with gain 2.00 dBi

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH02-HY	CO05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	-

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#n" were 802.11ac VHT80.



2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0


AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + TC + TF
Remark:	
<ol style="list-style-type: none"> 1. TF stands for Test Function, and consists of H-Pattern, MPEG4, and Camera. 2. TC stands for Test Configuration, and consists of SD Card, Earphone, LCD Monitor (Mini HDMI Out), USB HD, RJ-45 Link, Ultrasound Probe (Load), and Adapter. 	

Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159


Ch. #		Band IV : 5725-5850 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

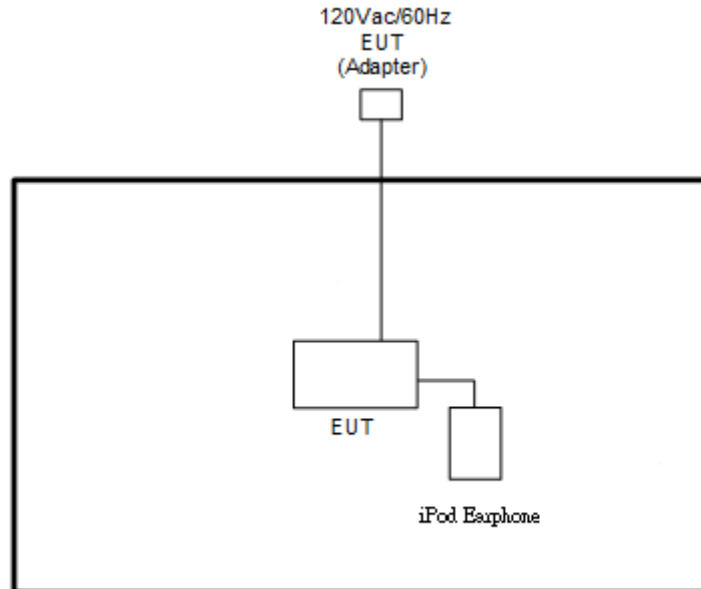

<AC Conducted Emission Mode>

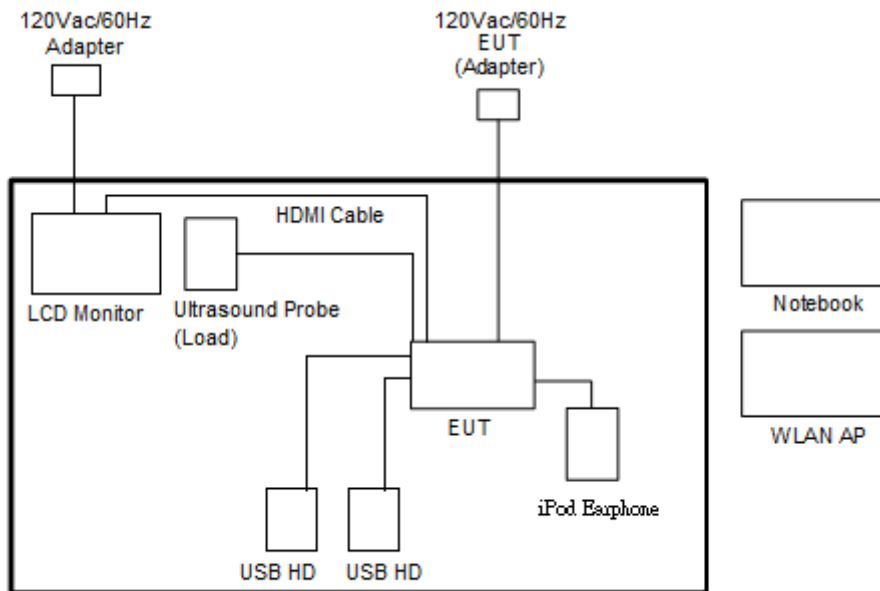



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	LCD Monitor	DELL	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
5.	Ultrasound Probe	Terason	5C2A	N/A	Shielded, 2.0 m	N/A
6.	USB HD	WD	WDBAAR3200A BK-PESN	FCC DoC	Unshielded, 0.5 m	N/A
7.	USB HD	lenovo	F310S	FCC DoC	Unshielded, 0.5 m	N/A
8.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
9.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

The programmed RF utility “TX Tool”, is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

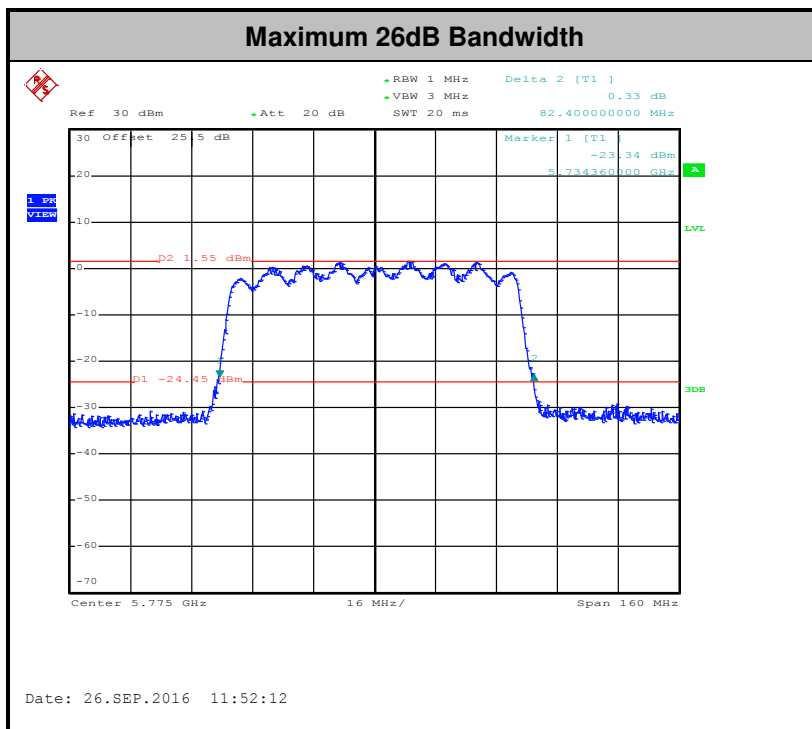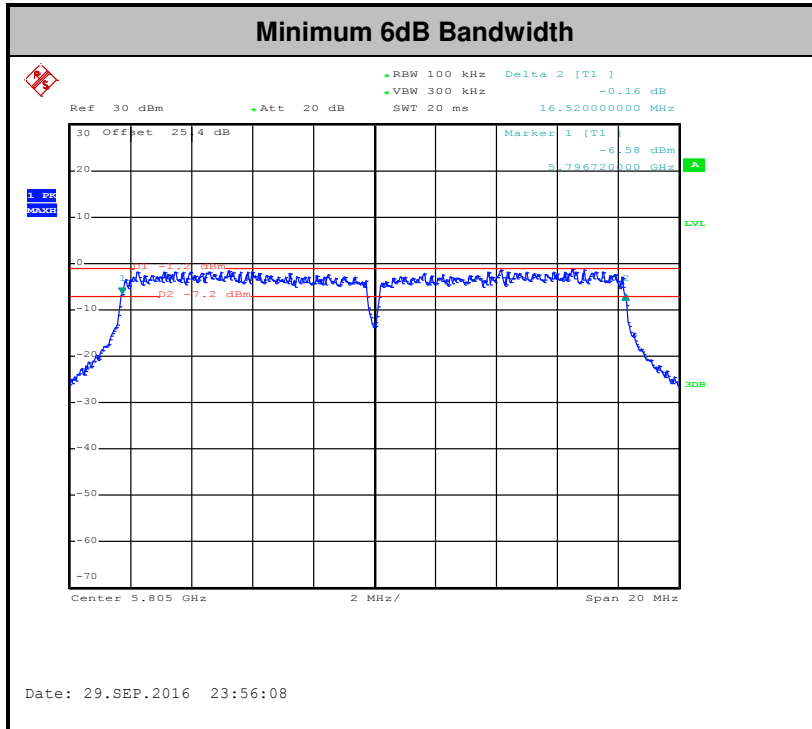

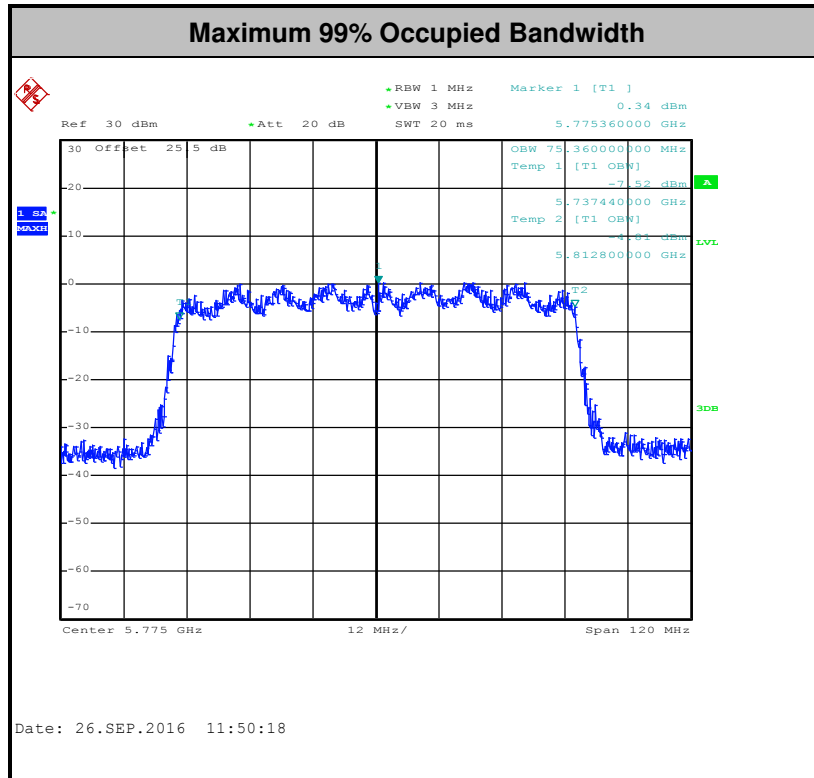

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

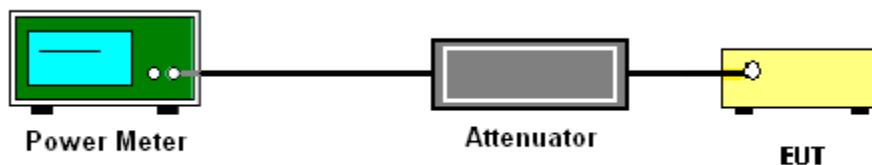

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{ANT})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{ANT})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}^{th}$ of the PSD limit.


3.3.4 Test Setup

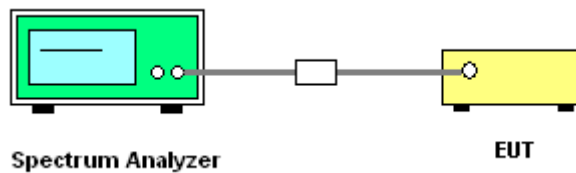



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

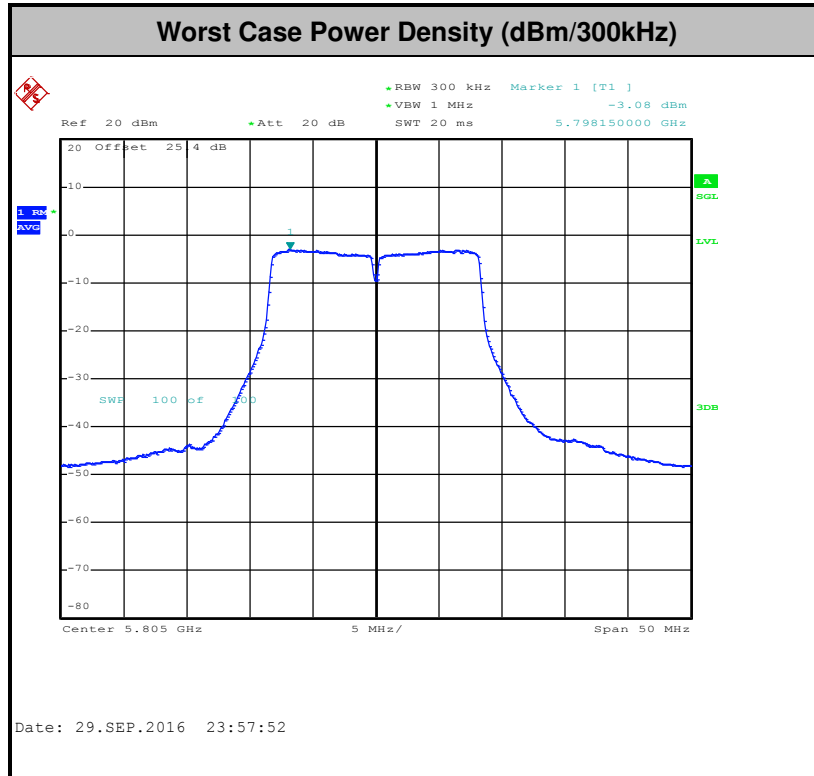



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBµV/m)
-17	78.3
- 27	68.3

(3) KDB 789033 D02 General UNII Test Procedures New Rules v01r03 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

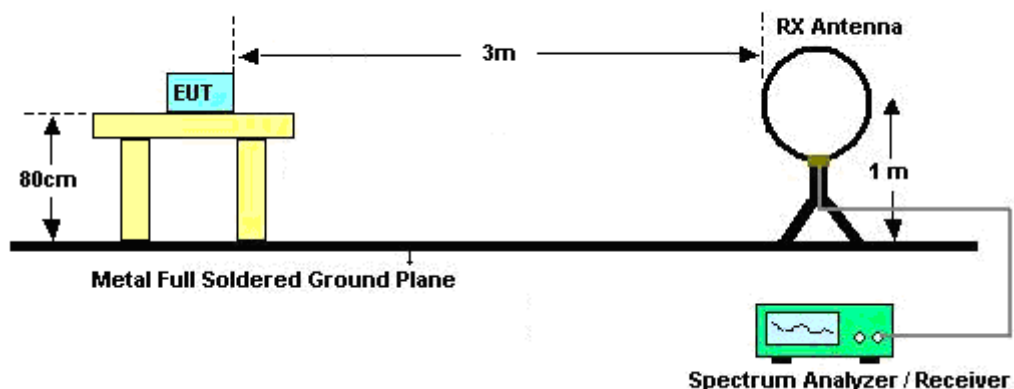

For radiated emissions from 30MHz to 1GHz

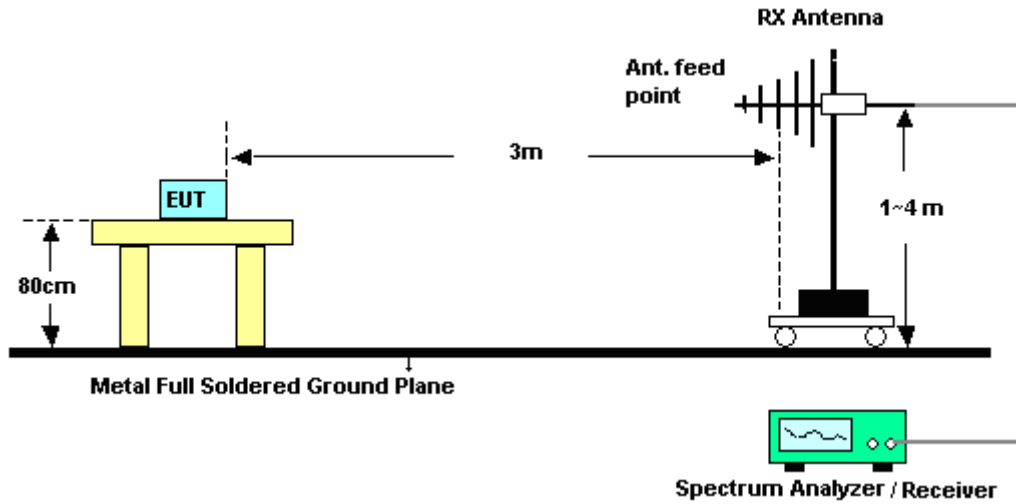

For radiated emissions above 1GHz

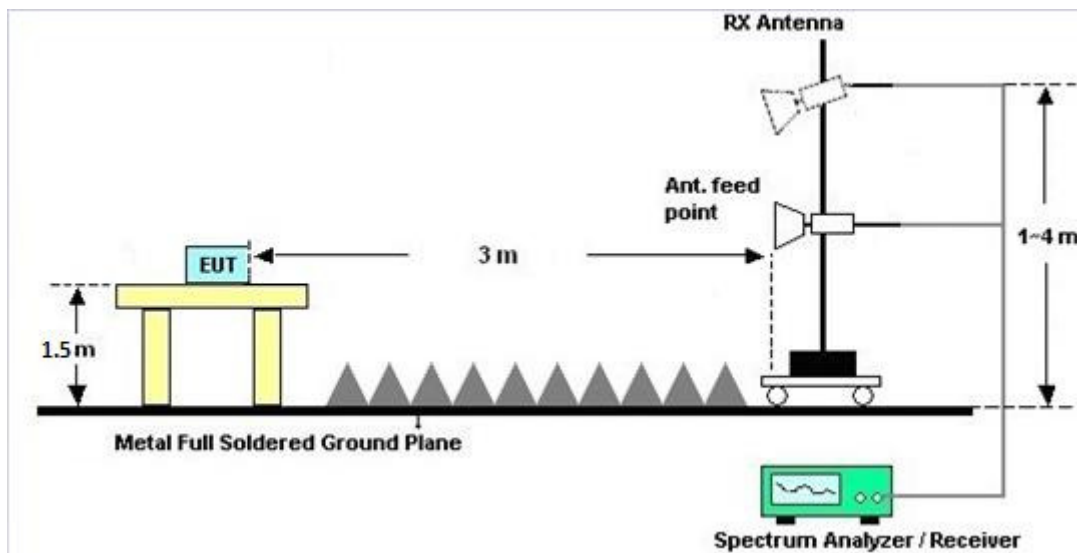



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.5.4 Test Setup

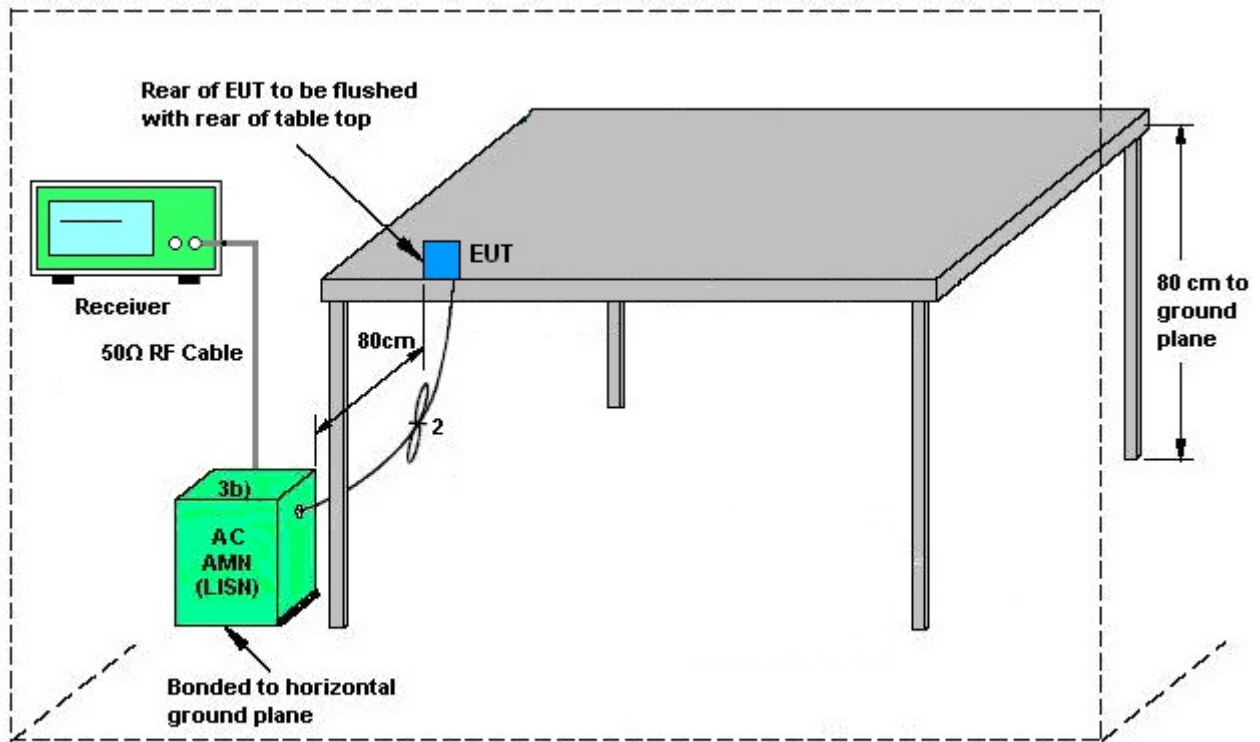

AMN = Artificial mains network (LISH)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	23~25°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN (5GHz) Link + TC + TF		

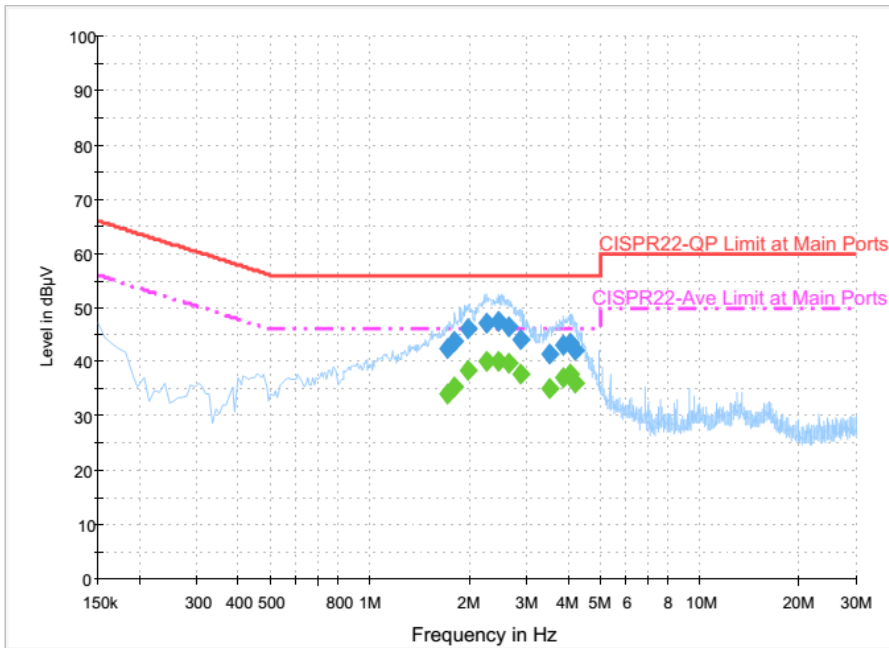


Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.718000	42.4	Off	L1	19.6	13.6	56.0
1.814000	43.7	Off	L1	19.6	12.3	56.0
1.998000	46.3	Off	L1	19.6	9.7	56.0
2.270000	47.3	Off	L1	18.4	8.7	56.0
2.470000	47.4	Off	L1	19.0	8.6	56.0
2.630000	46.6	Off	L1	19.2	9.4	56.0
2.862000	44.0	Off	L1	19.4	12.0	56.0
3.510000	41.3	Off	L1	19.6	14.7	56.0
3.862000	43.0	Off	L1	19.7	13.0	56.0
4.078000	43.6	Off	L1	19.7	12.4	56.0
4.230000	42.0	Off	L1	19.7	14.0	56.0



Test Mode :	Mode 1	Temperature :	23~25°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN (5GHz) Link + TC + TF		

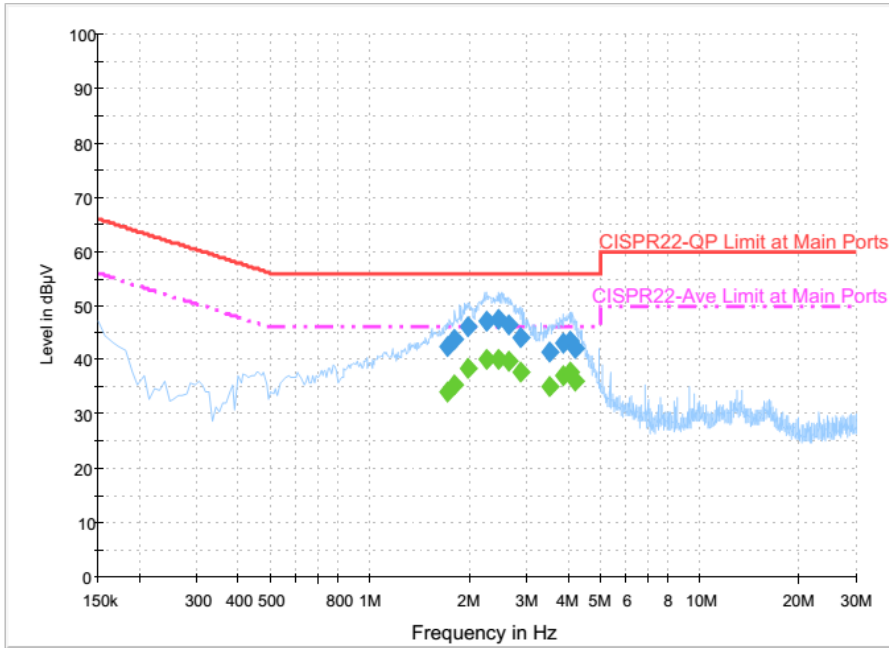


Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.718000	34.3	Off	L1	19.6	11.7	46.0
1.814000	35.5	Off	L1	19.6	10.5	46.0
1.998000	38.4	Off	L1	19.6	7.6	46.0
2.270000	40.2	Off	L1	18.4	5.8	46.0
2.470000	40.3	Off	L1	19.0	5.7	46.0
2.630000	39.7	Off	L1	19.2	6.3	46.0
2.862000	37.9	Off	L1	19.4	8.1	46.0
3.510000	35.3	Off	L1	19.6	10.7	46.0
3.862000	37.1	Off	L1	19.7	8.9	46.0
4.078000	37.7	Off	L1	19.7	8.3	46.0
4.230000	36.2	Off	L1	19.7	9.8	46.0



Test Mode :	Mode 1	Temperature :	23~25°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN (5GHz) Link + TC + TF		

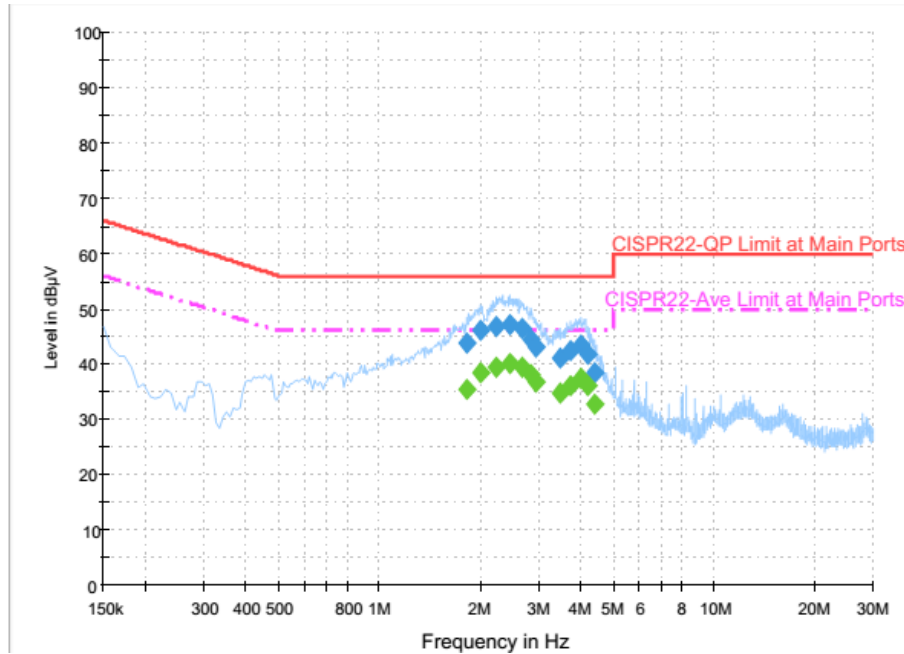


Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.822000	43.7	Off	N	19.6	12.3	56.0
2.014000	46.2	Off	N	19.6	9.8	56.0
2.238000	46.9	Off	N	18.3	9.1	56.0
2.462000	47.1	Off	N	19.0	8.9	56.0
2.686000	46.4	Off	N	19.3	9.6	56.0
2.854000	44.6	Off	N	19.4	11.4	56.0
2.958000	43.3	Off	N	19.5	12.7	56.0
3.462000	41.0	Off	N	19.6	15.0	56.0
3.734000	42.4	Off	N	19.6	13.6	56.0
4.022000	43.4	Off	N	19.6	12.6	56.0
4.206000	41.9	Off	N	19.7	14.1	56.0
4.398000	38.5	Off	N	19.7	17.5	56.0



Test Mode :	Mode 1	Temperature :	23~25°C
Test Engineer :	Arthur Hsieh	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN (5GHz) Link + TC + TF		

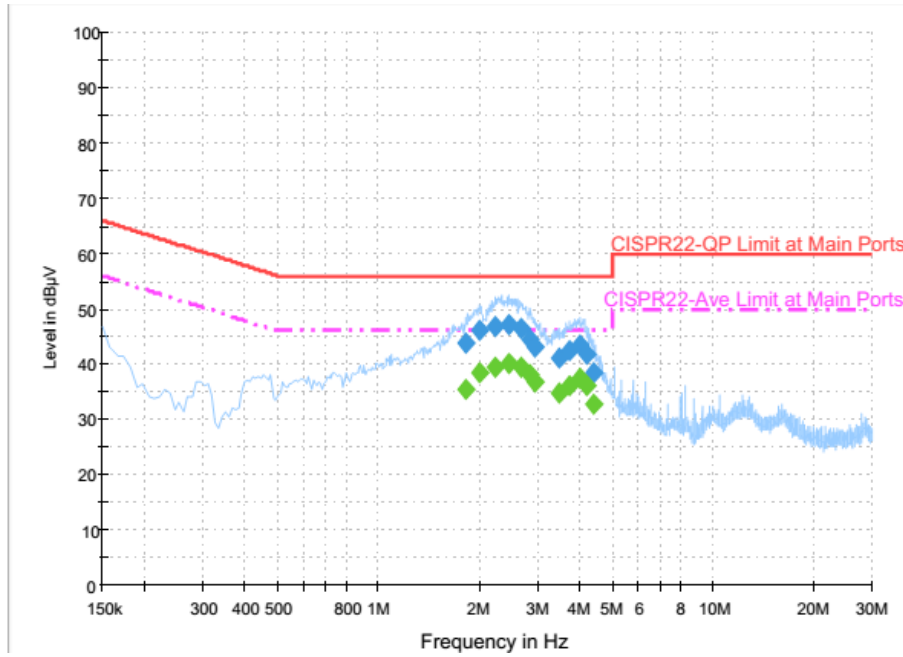

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.822000	35.6	Off	N	19.6	10.4	46.0
2.014000	38.4	Off	N	19.6	7.6	46.0
2.238000	39.6	Off	N	18.3	6.4	46.0
2.462000	40.1	Off	N	19.0	5.9	46.0
2.686000	39.5	Off	N	19.3	6.5	46.0
2.854000	38.1	Off	N	19.4	7.9	46.0
2.958000	36.8	Off	N	19.5	9.2	46.0
3.462000	34.8	Off	N	19.6	11.2	46.0
3.734000	36.2	Off	N	19.6	9.8	46.0
4.022000	37.4	Off	N	19.6	8.6	46.0
4.206000	36.0	Off	N	19.7	10.0	46.0
4.398000	32.7	Off	N	19.7	13.3	46.0

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

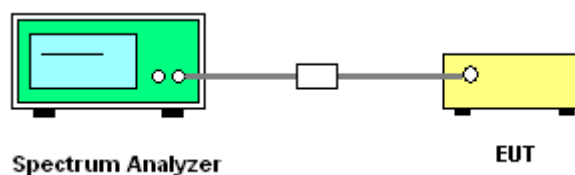

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Jul. 28, 2016	Sep. 18, 2016 ~ Sep. 30, 2016	Jul. 27, 2017	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 28, 2016	Sep. 18, 2016 ~ Sep. 30, 2016	Jul. 27, 2017	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 17, 2016	Sep. 18, 2016 ~ Sep. 30, 2016	Jun. 16, 2017	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 11, 2016	Sep. 18, 2016 ~ Sep. 30, 2016	Jul. 10, 2017	Conducted (TH02-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~4A	Oct. 05, 2015	Sep. 18, 2016 ~ Sep. 30, 2016	Oct. 04, 2016	Conducted (TH02-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Sep. 26, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Sep. 26, 2016	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Sep. 26, 2016	Dec. 01, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 14, 2015	Sep. 26, 2016	Dec. 13, 2016	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 08, 2016	Sep. 26, 2016	Jan. 07, 2017	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Sep. 19, 2016 ~ Sep. 23, 2016	Sep. 01, 2017	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D	35419	30MHz to 1GHz	Jan. 13, 2016	Sep. 19, 2016 ~ Sep. 23, 2016	Jan. 12, 2017	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2016	Sep. 19, 2016 ~ Sep. 23, 2016	Aug. 18, 2017	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 02, 2015	Sep. 19, 2016 ~ Sep. 23, 2016	Nov. 01, 2016	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 18, 2016	Sep. 19, 2016 ~ Sep. 23, 2016	Mar. 17, 2017	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 15, 2016	Sep. 19, 2016 ~ Sep. 23, 2016	Apr. 14, 2017	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 19, 2015	Sep. 19, 2016 ~ Sep. 23, 2016	Oct. 18, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-1800400 0-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	Sep. 19, 2016 ~ Sep. 23, 2016	Jun. 13, 2017	Radiation (03CH07-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20Hz ~ 8.4GHz	Nov. 04, 2015	Sep. 19, 2016 ~ Sep. 23, 2016	Nov. 03, 2016	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Feb. 27, 2016	Sep. 19, 2016 ~ Sep. 23, 2016	Feb. 26, 2017	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Sep. 19, 2016 ~ Sep. 23, 2016	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Sep. 19, 2016 ~ Sep. 23, 2016	N/A	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.70
---	------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50
---	------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
---	------



Appendix A. Conducted Test Results

Test Engineer:	AC Chang	Temperature:	21~25	°C
Test Date:	2016/9/18~2016/9/30	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	18.70	23.80	17.64	0.5	Pass
11a	6Mbps	1	157	5785	18.55	23.70	17.64	0.5	Pass
11a	6Mbps	1	161	5805	17.70	23.00	16.52	0.5	Pass
VHT20	MCS 0	1	149	5745	18.65	23.70	17.72	0.5	Pass
VHT20	MCS 0	1	157	5785	18.55	23.60	17.70	0.5	Pass
VHT20	MCS 0	1	161	5805	18.55	23.55	17.64	0.5	Pass
VHT40	MCS 0	1	151	5755	36.80	45.90	36.48	0.5	Pass
VHT40	MCS 0	1	159	5795	36.90	45.63	36.52	0.5	Pass
VHT80	MCS 0	1	155	5775	75.36	82.40	75.12	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.00	12.92	30.00	2.00		Pass
11a	6Mbps	1	157	5785	0.00	12.76	30.00	2.00		Pass
11a	6Mbps	1	161	5805	0.00	12.99	30.00	2.00		Pass
HT20	MCS 0	1	149	5745	0.00	11.68	30.00	2.00		Pass
HT20	MCS 0	1	157	5785	0.00	11.74	30.00	2.00		Pass
HT20	MCS 0	1	161	5805	0.00	11.94	30.00	2.00		Pass
HT40	MCS 0	1	151	5755	0.00	11.54	30.00	2.00		Pass
HT40	MCS 0	1	159	5795	0.00	11.52	30.00	2.00		Pass
VHT20	MCS 0	1	149	5745	0.00	11.69	30.00	2.00		Pass
VHT20	MCS 0	1	157	5785	0.00	11.75	30.00	2.00		Pass
VHT20	MCS 0	1	161	5805	0.00	11.96	30.00	2.00		Pass
VHT40	MCS 0	1	151	5755	0.00	11.63	30.00	2.00		Pass
VHT40	MCS 0	1	159	5795	0.00	11.64	30.00	2.00		Pass
VHT80	MCS 0	1	155	5775	0.00	10.00	30.00	2.00		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.00	2.22	-2.12	30.00	2.00	Pass
11a	6Mbps	1	157	5785	0.00	2.22	-2.47	30.00	2.00	Pass
11a	6Mbps	1	161	5805	0.00	2.22	-0.86	30.00	2.00	Pass
VHT20	MCS 0	1	149	5745	0.00	2.22	-2.89	30.00	2.00	Pass
VHT20	MCS 0	1	157	5785	0.00	2.22	-3.35	30.00	2.00	Pass
VHT20	MCS 0	1	161	5805	0.00	2.22	-2.71	30.00	2.00	Pass
VHT40	MCS 0	1	151	5755	0.00	2.22	-5.97	30.00	2.00	Pass
VHT40	MCS 0	1	159	5795	0.00	2.22	-6.55	30.00	2.00	Pass
VHT80	MCS 0	1	155	5775	0.00	2.22	-9.57	30.00	2.00	Pass

TEST RESULTS DATA
Frequency Stability

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6M bps	1	149	5745	5745.000	0.000	0.00	50	19	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	-30	19	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	19.95	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	18.05	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	19	



WiFi Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 161 5805MHz		5632.6	49.49	-18.71	68.2	38.21	34.6	11.95	35.27	319	182	P	H	
		5667.2	50.55	-30.41	80.96	39.22	34.6	12	35.27	319	182	P	H	
		5709.8	49.39	-58.56	107.95	38.01	34.6	12.06	35.28	319	182	P	H	
		5724.4	49.15	-71.68	120.83	37.77	34.6	12.06	35.28	319	182	P	H	
	*	5805	102.17	-	-	90.7	34.6	12.17	35.3	319	182	P	H	
	*	5805	94.68	-	-	83.21	34.6	12.17	35.3	319	182	A	H	
		5852	50.87	-66.77	117.64	39.3	34.6	12.28	35.31	319	182	P	H	
		5875	50.18	-55.02	105.2	38.51	34.6	12.39	35.32	319	182	P	H	
		5885.2	50.6	-47.03	97.63	38.93	34.6	12.39	35.32	319	182	P	H	
		5935.8	49.38	-18.82	68.2	37.6	34.6	12.51	35.33	319	182	P	H	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	42.8	-31.2	74	43.71	39.27	17.16	57.34	100	0	P	H
		17232	45.51	-22.69	68.2	38.21	42.43	20.76	55.89	100	0	P	H
													H
													H
		11490	41.71	-32.29	74	42.62	39.27	17.16	57.34	100	0	P	V
		17232	45.95	-22.25	68.2	38.65	42.43	20.76	55.89	100	0	P	V
													V
802.11a CH 157 5785MHz		11570	42.69	-31.31	74	43.52	39.2	17.16	57.19	100	0	P	H
		17352	46.34	-21.86	68.2	39.2	42.24	20.84	55.94	100	0	P	H
													H
													H
		11570	43.01	-30.99	74	43.84	39.2	17.16	57.19	100	0	P	V
		17352	45.22	-22.98	68.2	38.08	42.24	20.84	55.94	100	0	P	V
													V
802.11a CH 161 5805MHz		11610	42.21	-31.79	74	43.02	39.16	17.16	57.13	100	0	P	H
		17412	45.59	-22.61	68.2	38.52	42.16	20.87	55.96	100	0	P	H
													H
													H
		11610	42.68	-31.32	74	43.49	39.16	17.16	57.13	100	0	P	V
		17412	45.6	-22.6	68.2	38.53	42.16	20.87	55.96	100	0	P	V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



WiFi Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5649.8	49.49	-18.71	68.2	38.21	34.6	11.95	35.27	307	182	P	H
		5683	49.71	-42.95	92.66	38.39	34.6	12	35.28	307	182	P	H
		5707.4	48.84	-58.43	107.27	37.46	34.6	12.06	35.28	307	182	P	H
		5721	49.64	-63.44	113.08	38.26	34.6	12.06	35.28	307	182	P	H
	*	5805	101.75	-	-	90.28	34.6	12.17	35.3	307	182	P	H
	*	5805	94.04	-	-	82.57	34.6	12.17	35.3	307	182	A	H
		5850	49.29	-72.91	122.2	37.72	34.6	12.28	35.31	307	182	P	H
		5860.2	49.51	-59.83	109.34	37.83	34.6	12.39	35.31	307	182	P	H
		5885.4	51.49	-45.99	97.48	39.82	34.6	12.39	35.32	307	182	P	H
		5939	50.29	-17.91	68.2	38.51	34.6	12.51	35.33	307	182	P	H
802.11ac													H
VHT20													H
CH 161		5608.2	49.97	-18.23	68.2	38.74	34.6	11.89	35.26	100	163	P	V
5805MHz		5665.2	49.6	-29.88	79.48	38.27	34.6	12	35.27	100	163	P	V
		5711.2	49.63	-58.71	108.34	38.25	34.6	12.06	35.28	100	163	P	V
		5722.2	50.34	-65.48	115.82	38.96	34.6	12.06	35.28	100	163	P	V
	*	5805	100.18	-	-	88.71	34.6	12.17	35.3	100	163	P	V
	*	5805	92.63	-	-	81.16	34.6	12.17	35.3	100	163	A	V
		5851.6	50.02	-68.53	118.55	38.45	34.6	12.28	35.31	100	163	P	V
		5857	50.84	-59.4	110.24	39.27	34.6	12.28	35.31	100	163	P	V
		5885.2	50.91	-46.72	97.63	39.24	34.6	12.39	35.32	100	163	P	V
		5934.6	50.41	-17.79	68.2	38.63	34.6	12.51	35.33	100	163	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 149 5745MHz		11490	42.09	-31.91	74	43	39.27	17.16	57.34	100	0	P	H	
		17232	45.11	-23.09	68.2	37.81	42.43	20.76	55.89	100	0	P	H	
													H	
													H	
			11490	43.19	-30.81	74	44.1	39.27	17.16	57.34	100	0	P	V
			17232	45.49	-22.71	68.2	38.19	42.43	20.76	55.89	100	0	P	V
														V
802.11ac VHT20 CH 157 5785MHz		11570	42.76	-31.24	74	43.59	39.2	17.16	57.19	100	0	P	H	
		17352	45.11	-23.09	68.2	37.97	42.24	20.84	55.94	100	0	P	H	
													H	
													H	
			11570	41.96	-32.04	74	42.79	39.2	17.16	57.19	100	0	P	V
			17352	46.45	-21.75	68.2	39.31	42.24	20.84	55.94	100	0	P	V
														V
802.11ac VHT20 CH 161 5805MHz		11610	42.22	-31.78	74	43.03	39.16	17.16	57.13	100	0	P	H	
		17415	45.75	-22.45	68.2	38.72	42.13	20.87	55.97	100	0	P	H	
													H	
													H	
			11610	41.63	-32.37	74	42.44	39.16	17.16	57.13	100	0	P	V
			17415	46.44	-21.76	68.2	39.41	42.13	20.87	55.97	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5635.6	50.51	-17.69	68.2	39.23	34.6	11.95	35.27	209	179	P	H
		5671.6	50.62	-33.6	84.22	39.29	34.6	12	35.27	209	179	P	H
		5711	49.19	-59.09	108.28	37.81	34.6	12.06	35.28	209	179	P	H
		5723.8	49.8	-69.66	119.46	38.42	34.6	12.06	35.28	209	179	P	H
	*	5795	98.85	-	-	87.38	34.6	12.17	35.3	209	179	P	H
	*	5795	91.2	-	-	79.73	34.6	12.17	35.3	209	179	A	H
		5850.6	49.38	-71.45	120.83	37.81	34.6	12.28	35.31	209	179	P	H
		5861.2	50.73	-58.33	109.06	39.05	34.6	12.39	35.31	209	179	P	H
		5890.6	51.17	-42.45	93.62	39.5	34.6	12.39	35.32	209	179	P	H
		5932.2	49.79	-18.41	68.2	38.01	34.6	12.51	35.33	209	179	P	H
802.11ac													H
VHT40													H
CH 159		5649.4	49.71	-18.49	68.2	38.43	34.6	11.95	35.27	100	163	P	V
5795MHz		5665	49.1	-30.23	79.33	37.77	34.6	12	35.27	100	163	P	V
		5717.4	50.35	-59.72	110.07	38.97	34.6	12.06	35.28	100	163	P	V
		5720.4	49.34	-62.37	111.71	37.96	34.6	12.06	35.28	100	163	P	V
	*	5795	97.21	-	-	85.74	34.6	12.17	35.3	100	163	P	V
	*	5795	89.51	-	-	78.04	34.6	12.17	35.3	100	163	A	V
		5855	50.61	-60.19	110.8	39.04	34.6	12.28	35.31	100	163	P	V
		5855	50.61	-60.19	110.8	39.04	34.6	12.28	35.31	100	163	P	V
		5902.8	50.35	-34.24	84.59	38.56	34.6	12.51	35.32	100	163	P	V
		5936.2	51.1	-17.1	68.2	39.32	34.6	12.51	35.33	100	163	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT40 CH 151 5755MHz		11510	42.7	-31.3	74	43.54	39.3	17.16	57.3	100	0	P	H	
		17265	46.16	-22.04	68.2	38.91	42.37	20.79	55.91	100	0	P	H	
													H	
													H	
			11510	42.58	-31.42	74	43.42	39.3	17.16	57.3	100	0	P	V
			17265	46.07	-22.13	68.2	38.82	42.37	20.79	55.91	100	0	P	V
														V
802.11ac VHT40 CH 159 5795MHz		11590	42.69	-31.31	74	43.51	39.18	17.16	57.16	100	0	P	H	
		17385	45.41	-22.79	68.2	38.3	42.19	20.87	55.95	100	0	P	H	
													H	
													H	
			11590	43.03	-30.97	74	43.85	39.18	17.16	57.16	100	0	P	V
			17385	45.64	-22.56	68.2	38.53	42.19	20.87	55.95	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5614.6	50.45	-17.75	68.2	39.22	34.6	11.89	35.26	210	179	P	H
		5693	51.15	-48.89	100.04	39.83	34.6	12	35.28	210	179	P	H
		5710.8	52.31	-55.92	108.23	40.93	34.6	12.06	35.28	210	179	P	H
		5725	53.27	-68.93	122.2	41.89	34.6	12.06	35.28	210	179	P	H
	*	5775	95.32	-	-	83.91	34.6	12.11	35.3	210	179	P	H
	*	5775	87.28	-	-	75.87	34.6	12.11	35.3	210	179	A	H
		5855	51.02	-59.78	110.8	39.45	34.6	12.28	35.31	210	179	P	H
		5868.4	51.7	-55.35	107.05	40.02	34.6	12.39	35.31	210	179	P	H
		5905.8	50.18	-32.19	82.37	38.39	34.6	12.51	35.32	210	179	P	H
		5936	50.83	-17.37	68.2	39.05	34.6	12.51	35.33	210	179	P	H
													H
													H
802.11ac VHT80 CH 155 5775MHz		5626.4	48.99	-19.21	68.2	37.71	34.6	11.95	35.27	100	163	P	V
		5692.4	50.1	-49.5	99.6	38.78	34.6	12	35.28	100	163	P	V
		5717.8	51.22	-58.96	110.18	39.84	34.6	12.06	35.28	100	163	P	V
		5724.2	50.95	-69.43	120.38	39.57	34.6	12.06	35.28	100	163	P	V
	*	5775	93.12	-	-	81.71	34.6	12.11	35.3	100	163	P	V
	*	5775	85.47	-	-	74.06	34.6	12.11	35.3	100	163	A	V
		5854.6	50.56	-61.15	111.71	38.99	34.6	12.28	35.31	100	163	P	V
		5860.4	50.53	-58.76	109.29	38.85	34.6	12.39	35.31	100	163	P	V
		5884.6	50.57	-47.5	98.07	38.9	34.6	12.39	35.32	100	163	P	V
		5927	50.72	-17.48	68.2	38.94	34.6	12.51	35.33	100	163	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 155 5775MHz		11550	43.05	-30.95	74	43.88	39.23	17.16	57.22	100	0	P	H	
		17325	45.62	-22.58	68.2	38.45	42.29	20.81	55.93	100	0	P	H	
													H	
													H	
			11550	44.21	-29.79	74	45.04	39.23	17.16	57.22	100	0	P	V
			17325	44.57	-23.63	68.2	37.4	42.29	20.81	55.93	100	0	P	V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
5GHz 802.11a LF		30.54	27.19	-12.81	40	32.12	25.46	1.07	31.46	-	-	P	H	
		76.44	33.16	-6.84	40	49.62	13.46	1.28	31.2	-	-	P	H	
		194.7	38.26	-5.24	43.5	51.74	15.75	1.87	31.1	200	92	P	H	
		307	33.61	-12.39	46	42.18	20.02	2.41	31	-	-	P	H	
		518.4	34.7	-11.3	46	37.88	24.35	3.14	30.67	-	-	P	H	
		759.2	36.74	-9.26	46	36	27.3	3.82	30.38	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30	28.53	-11.47	40	32.96	26	1.07	31.5	-	-	P	V
			77.25	31.9	-8.1	40	48.25	13.57	1.28	31.2	100	72	P	V
			122.88	27.67	-15.83	43.5	39.2	18.02	1.55	31.1	-	-	P	V
			518.4	32.75	-13.25	46	35.93	24.35	3.14	30.67	-	-	P	V
			791.4	32.07	-13.93	46	30.88	27.61	3.9	30.32	-	-	P	V
			958.7	33.76	-12.24	46	29.83	30.22	4.07	30.36	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots



Test Engineer :	Jesse Wang and James Chiu and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

Band 4 - 5725~5850MHz




WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 3008T BY Condition : PCAN_30204_16.04_3m HF ANT_15000 HORIZONTAL Detector : Peak Mask : 4802T Modu : IS</p>	<p>Site : 3008T BY Condition : PCAN30204_16.04_3m HF ANT_15000 HORIZONTAL Detector : Peak Mask : 4802T Modu : IS</p>


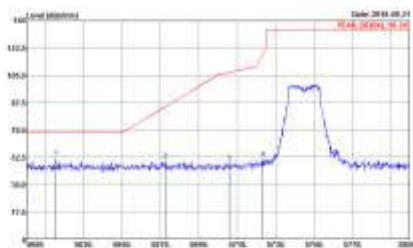
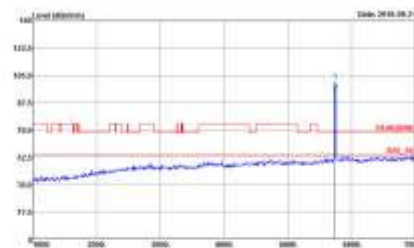


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	 <p> Date: 20081107 Condition: 20081107, 15.24, 3m HP ANT, 15000 VERTICAL Extensor: Peak Preamp: 60001 Mode: IS </p>	 <p> Date: 20081107 Condition: 20081107, 15.24, 3m HP ANT, 15000 VERTICAL Extensor: Peak Preamp: 60001 Mode: IS </p>

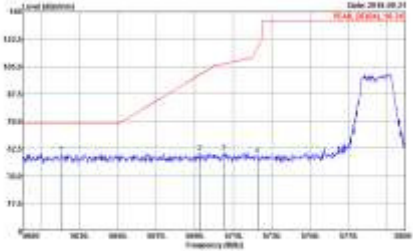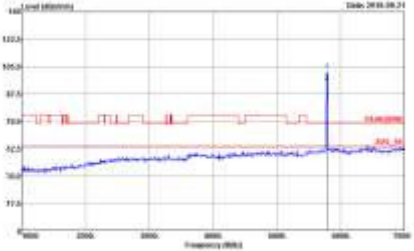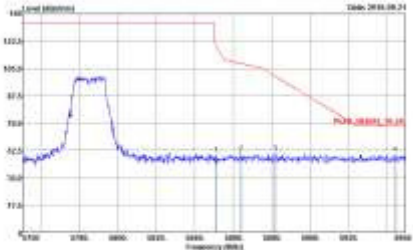

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 <p> <small>Date: 20081107 Condition: 2004W_08204_15.04 3m HF ANT 15000 HORIZONTAL Reference: REF: 1000 dBm/Hz VSW 2000 6000Hz SW1 Axis Detector: Peak Preamp: ENOC21 Mode: Off</small> </p>	 <p> <small>Date: 20081107 Condition: 2004W08 3m HF ANT 15000 HORIZONTAL Reference: REF: 1000 dBm/Hz VSW 2000 6000Hz SW1 Axis Detector: Peak Preamp: ENOC21 Mode: Off</small> </p>
Peak	 <p> <small>Date: 20081107 Condition: 2004W_08204_15.04 3m HF ANT 15000 HORIZONTAL Reference: REF: 1000 dBm/Hz VSW 2000 6000Hz SW1 Axis Detector: Peak Preamp: ENOC21 Mode: Off</small> </p>	Left blank

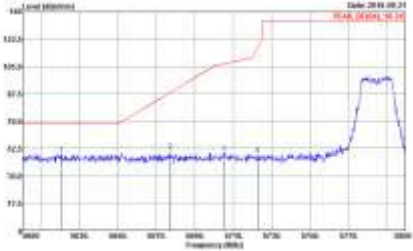
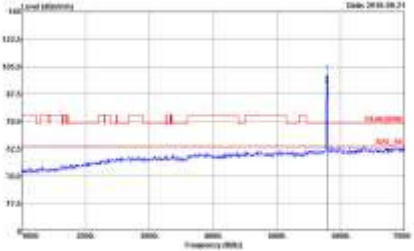
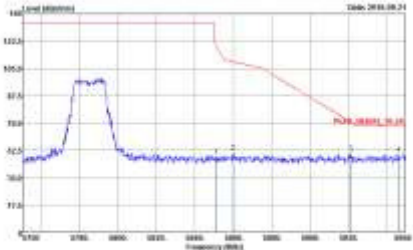


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
Peak	 <p> <small> Date: 20081107 Condition: 200MHz, 20dB, 10.04 Jm HF AMP, 15000 VERTICAL Detector: Peak Preamp: ENOC21 Mode: Off </small> </p>	 <p> <small> Date: 20081107 Condition: 200MHz, 20dB, 10.04 Jm HF AMP, 15000 VERTICAL Detector: Peak Preamp: ENOC21 Mode: Off </small> </p>
Peak	 <p> <small> Date: 20081107 Condition: 200MHz, 20dB, 10.04 Jm HF AMP, 15000 VERTICAL Detector: Peak Preamp: ENOC21 Mode: Off </small> </p>	Left blank





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH161 5805MHz	
1	Horizontal	Fundamental
Peak	<p>File: ISO047147 Comment: PEAK_080525_16.25_5805_80211a_110000_HZP020000 HW: 3001.200000 3001.200000 20VY_Ant Dir: Peak Project: ISO021 Mode: IS</p>	<p>File: ISO047147 Comment: PEAK_080525_16.25_5805_80211a_110000_HZP020000 HW: 3001.200000 3001.200000 20VY_Ant Dir: Peak Project: ISO021 Mode: IS</p>
Peak	<p>File: ISO047147 Comment: PEAK_080525_16.25_5805_80211a_110000_HZP020000 HW: 3001.200000 3001.200000 20VY_Ant Dir: Peak Project: ISO021 Mode: IS</p>	Left blank

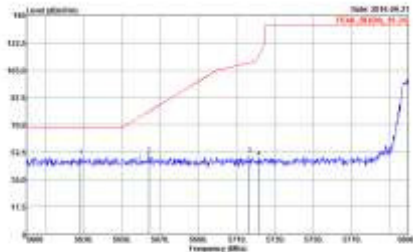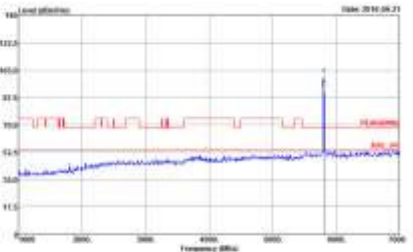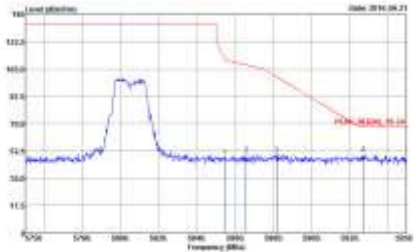

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH161 5805MHZ	
1	Vertical	Fundamental
Peak	 <p>File: 80211a_V161_5805_VERTICAL Date: 2016-08-21 Comb: PEAK (RFL) 16.25 3e-07 JST 13000 VERTICAL Chan: 802.11a CH161 5805 5805 5805 5805 Detect: Peak Project: 80211a Mode: II</p>	 <p>File: 80211a_V161_5805_VERTICAL Date: 2016-08-21 Comb: PEAK (RFL) 16.25 3e-07 JST 13000 VERTICAL Chan: 802.11a CH161 5805 5805 5805 5805 Detect: Peak Project: 80211a Mode: II</p>
Peak	 <p>File: 80211a_V161_5805_VERTICAL Date: 2016-08-21 Comb: PEAK (RFL) 16.25 3e-07 JST 13000 VERTICAL Chan: 802.11a CH161 5805 5805 5805 5805 Detect: Peak Project: 80211a Mode: II</p>	Left blank






Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

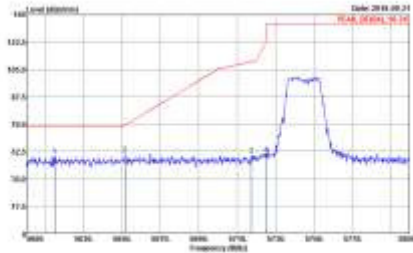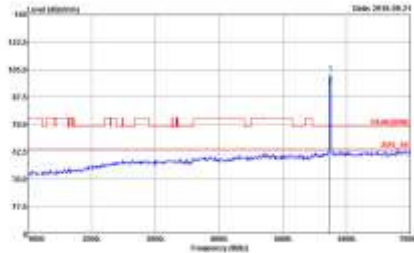WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 <p> <small> Date: 2008T-07 Condition: PCAN_30204_15-04_3m HF-AMF_13000 HORIZONTAL Detector: Peak Preprod: EN021 Mark: 02 </small> </p>	 <p> <small> Date: 2008T-07 Condition: PCAN30204_15-04_3m HF-AMF_13000 HORIZONTAL Detector: Peak Preprod: EN021 Mark: 02 </small> </p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1	Vertical	Fundamental
<p>Peak Avg.</p>	<p> <small> Date: 2018.08.24 Condition: PCAR_20204_18-04_3m RF-AMP_10000 VERTICAL Detector: Peak Project: EN021 Mode: C </small> </p>	<p> <small> Date: 2018.08.24 Condition: PCAR20204_3m RF-AMP_10000 VERTICAL Detector: Peak Project: EN021 Mode: C </small> </p>

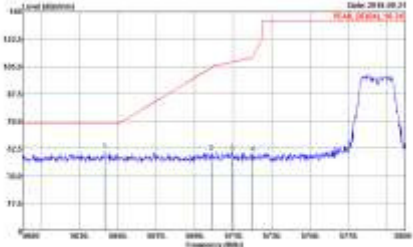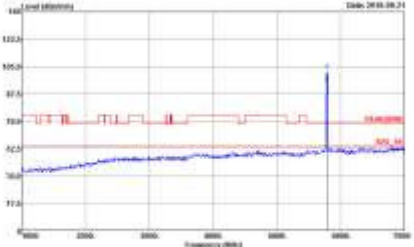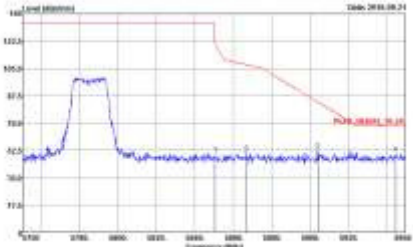

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 30081-WF Condition : PCAN_30204_15-04_3m HF AMF_15000 HORIZONTAL Detector : Peak Project : 680221 Mark : 0</p>	 <p>Site : 30081-WF Condition : PCAN30204_15-04_3m HF AMF_15000 HORIZONTAL Detector : Peak Project : 680221 Mark : 0</p>
Peak	 <p>Site : 30081-WF Condition : PCAN_30204_15-04_3m HF AMF_15000 HORIZONTAL Detector : Peak Project : 680221 Mark : 0</p>	Left blank

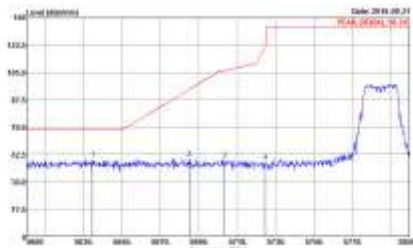
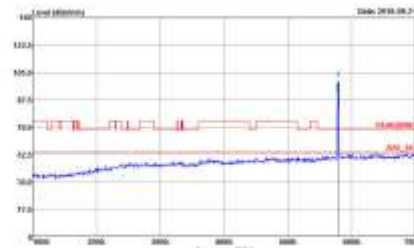
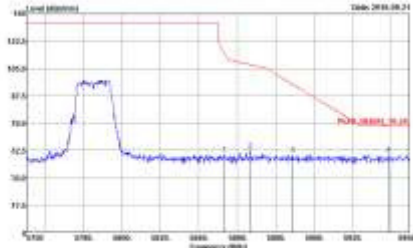


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	 <p>File : 200817-01 Condition : PCAR_20204_15-04_3m RF-AMP_15000 VERTICAL Reference : 1000 dBm/Hz VSW 2000 6000Hz SWT-Amb Detector : Peak Prepset : EN021 Mark : 00</p>	 <p>File : 200817-01 Condition : PCAR20204_15-04_3m RF-AMP_15000 VERTICAL Reference : 1000 dBm/Hz VSW 2000 6000Hz SWT-Amb Detector : Peak Prepset : EN021 Mark : 00</p>
Peak	 <p>File : 200817-01 Condition : PCAR_20204_15-04_3m RF-AMP_15000 VERTICAL Reference : 1000 dBm/Hz VSW 2000 6000Hz SWT-Amb Detector : Peak Prepset : EN021 Mark : 00</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH161 5805MHz	
1	Horizontal	Fundamental
Peak	<p>File: 15042147 Comment: PEAK_5805_16.26_5m-8F-JUST_138831-H3PQ23216 Frequency: 5805.000000 Sensitivity: Peak Project: 580221 Mode: 31</p>	<p>File: 15042147 Comment: PEAK_5805_16.26_5m-8F-JUST_138831-H3PQ23216 Frequency: 5805.000000 Sensitivity: Peak Project: 580221 Mode: 31</p>
Peak	<p>File: 15042147 Comment: PEAK_5805_16.26_5m-8F-JUST_138831-H3PQ23216 Frequency: 5805.000000 Sensitivity: Peak Project: 580221 Mode: 31</p>	Left blank

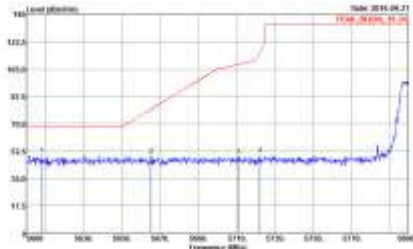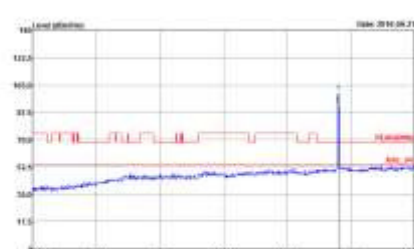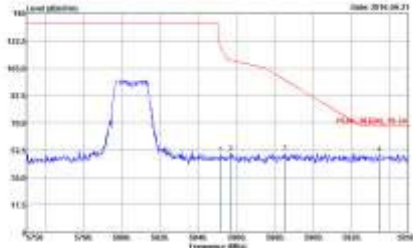




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH161 5805MHz	
1	<p style="text-align: center;">Vertical</p>  <p>File: 15042147 Comment: PEAK_80211ac_VHT20_CH161_VERTICAL Date: 2016-08-21 User: [redacted] Project: 80021 Mode: 20</p>	<p style="text-align: center;">Fundamental</p>  <p>File: 15042147 Comment: PEAK_80211ac_VHT20_CH161_VERTICAL Date: 2016-08-21 User: [redacted] Project: 80021 Mode: 20</p>
Peak Avg.	 <p>File: 15042147 Comment: PEAK_80211ac_VHT20_CH161_VERTICAL Date: 2016-08-21 User: [redacted] Project: 80021 Mode: 20</p>	<p style="text-align: center;">Left blank</p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1	Horizontal	Fundamental
Peak	<p>File: :300817.WV Condition: :PCAN_30204_19_04_3m_HF_ANT_15000_HORIZONTAL Detector: :Peak Project: :690221 Mask: :R</p>	<p>File: :300817.WV Condition: :PCAN30204_19_04_3m_HF_ANT_15000_HORIZONTAL Detector: :Peak Project: :690221 Mask: :R</p>
Peak	<p>File: :300817.WV Condition: :PCAN_30204_19_04_3m_HF_ANT_15000_HORIZONTAL Detector: :Peak Project: :690221 Mask: :R</p>	Left blank

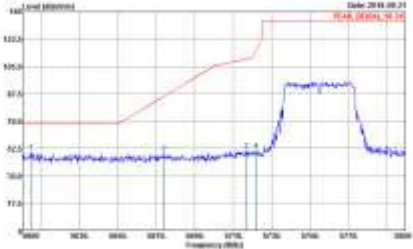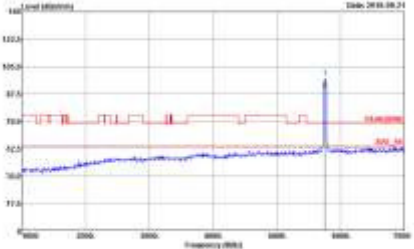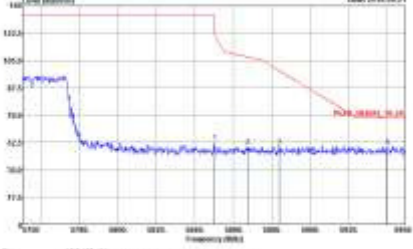

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	 <p> <small> Date : 20081104 Condition : PCAN_20204_15-24 3m HF-AMP_15000 VERTICAL Detector : Peak Project : 68021 Mode : 96 </small> </p>	 <p> <small> Date : 20081104 Condition : PCAN20204 3m HF-AMP_15000 VERTICAL Detector : Peak Project : 68021 Mode : 96 </small> </p>
Peak	 <p> <small> Date : 20081104 Condition : PCAN_20204_15-24 3m HF-AMP_15000 VERTICAL Detector : Peak Project : 68021 Mode : 96 </small> </p>	Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	<p> <small>Date: 2018.08.21</small> <small>Condition: PEAK (5795.15.15)</small> <small>File: 20180821_15.14_1141F_110203_HORIZONTAL</small> <small>Frequency (MHz): 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785 5790 5795 5800 5805 5810 5815 5820 5825 5830 5835 5840 5845 5850</small> <small>File: 20180821_15.14_1141F_110203_HORIZONTAL</small> <small>Condition: PEAK (5795.15.15)</small> <small>File: 20180821_15.14_1141F_110203_HORIZONTAL</small> <small>Frequency (MHz): 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785 5790 5795 5800 5805 5810 5815 5820 5825 5830 5835 5840 5845 5850</small> </p>	<p> <small>Date: 2018.08.21</small> <small>Condition: PEAK (5795.15.15)</small> <small>File: 20180821_15.14_1141F_110203_FUNDAMENTAL</small> <small>Frequency (MHz): 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785 5790 5795 5800 5805 5810 5815 5820 5825 5830 5835 5840 5845 5850</small> <small>File: 20180821_15.14_1141F_110203_FUNDAMENTAL</small> <small>Condition: PEAK (5795.15.15)</small> <small>File: 20180821_15.14_1141F_110203_FUNDAMENTAL</small> <small>Frequency (MHz): 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785 5790 5795 5800 5805 5810 5815 5820 5825 5830 5835 5840 5845 5850</small> </p>
Peak	<p> <small>Date: 2018.08.21</small> <small>Condition: PEAK (5795.15.15)</small> <small>File: 20180821_15.14_1141F_110203_HORIZONTAL</small> <small>Frequency (MHz): 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785 5790 5795 5800 5805 5810 5815 5820 5825 5830 5835 5840 5845 5850</small> <small>File: 20180821_15.14_1141F_110203_HORIZONTAL</small> <small>Condition: PEAK (5795.15.15)</small> <small>File: 20180821_15.14_1141F_110203_HORIZONTAL</small> <small>Frequency (MHz): 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785 5790 5795 5800 5805 5810 5815 5820 5825 5830 5835 5840 5845 5850</small> </p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	<p>File: 200817.rtf Condition: PCAN_20204_15-24_3m HF AMP_15000 VERTICAL Detector: Peak Project: 680221 Mark: 07</p>	<p>File: 200817.rtf Condition: PCAN20204_15-24_3m HF AMP_15000 VERTICAL Detector: Peak Project: 680221 Mark: 07</p>
Peak	<p>File: 200817.rtf Condition: PCAN_20204_15-24_3m HF AMP_15000 VERTICAL Detector: Peak Project: 680221 Mark: 07</p>	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

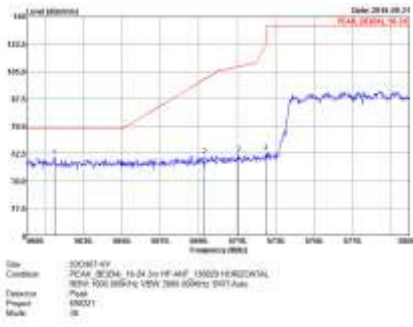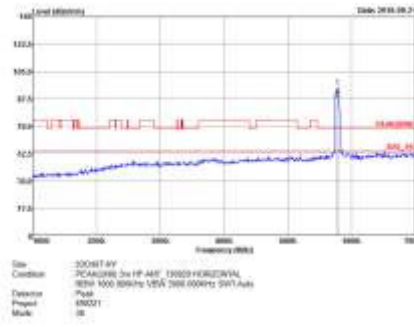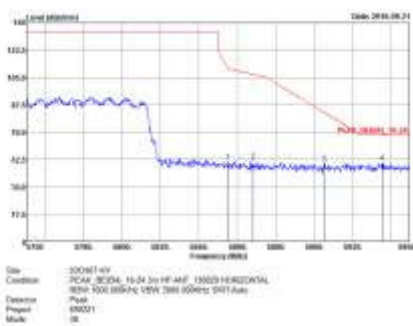WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Fundamental
Peak	 <p>File : 200817.rtf Condition : FCAN_20204_19-04_3m HF-4M 15000 HORIZONTAL Ref: 1000 dBm/Hz VSW 2000 6000Hz SW1 Auto Detector : Peak Project : 690221 Mark : 08</p>	 <p>File : 200817.rtf Condition : FCAN2004_19-04_3m HF-4M 15000 HORIZONTAL Ref: 1000 dBm/Hz VSW 2000 6000Hz SW1 Auto Detector : Peak Project : 690221 Mark : 08</p>
Peak	 <p>File : 200817.rtf Condition : FCAN_20204_19-04_3m HF-4M 15000 HORIZONTAL Ref: 1000 dBm/Hz VSW 2000 6000Hz SW1 Auto Detector : Peak Project : 690221 Mark : 08</p>	Left blank





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Vertical	Fundamental
Peak	<p> <small> Date: 2018.08.21 Title: 802.11ac VHT80 CH155 5775MHz Condition: 300MHz, 30dB, 10.24 us RF Amp, 1000 VERTICAL Detector: Peak Preamp: 60021 Mode: IS </small> </p>	<p> <small> Date: 2018.08.21 Title: 802.11ac VHT80 CH155 5775MHz Condition: 300MHz, 30dB, 10.24 us RF Amp, 1000 VERTICAL Detector: Peak Preamp: 60021 Mode: IS </small> </p>
Peak	<p> <small> Date: 2018.08.21 Title: 802.11ac VHT80 CH155 5775MHz Condition: 300MHz, 30dB, 10.24 us RF Amp, 1000 VERTICAL Detector: Peak Preamp: 60021 Mode: IS </small> </p>	Left blank





Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

Table with 3 columns: WIFI, ANT, and measurement results for Horizontal and Vertical orientations. Includes spectral plots and metadata like Site, Condition, Detector, Project, and Mode.

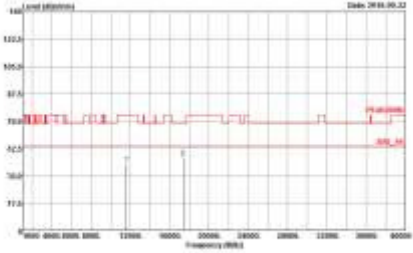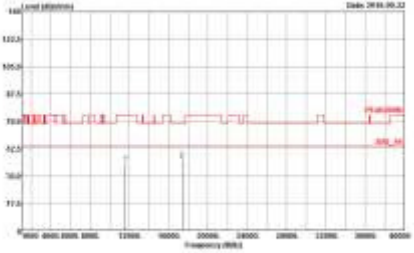

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : SPORTON LAB Condition : PCAL0196 3m 5M CH157_0152H HORIZONTAL Detector : Peak Project : FR690221 Mode : IS</p>	 <p>Site : SPORTON LAB Condition : PCAL0196 3m 5M CH157_0152V VERTICAL Detector : Peak Project : FR690221 Mode : IS</p>

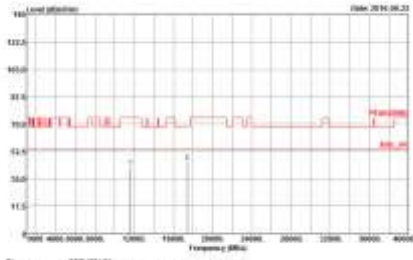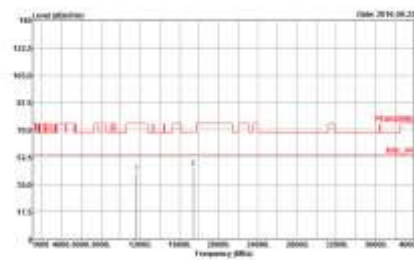

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH161 5805MHZ	
1	Horizontal	Vertical
Peak Avg.	 <p> Date : 20240821 Customer : PERKINS Am-24-EMF-STUDY-HOSPITAL Detector : Peak Project : 69021 Mode : 32 </p>	 <p> Date : 20240821 Customer : PERKINS Am-24-EMF-STUDY-HOSPITAL Detector : Peak Project : 69021 Mode : 32 </p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1	Horizontal	Vertical
<p>Peak Avg.</p>		





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.		



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH161 5805MHz	
1	Horizontal	Vertical
Peak Avg.		



Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

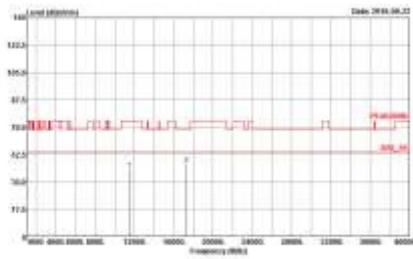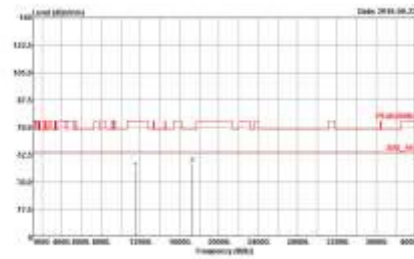WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 3008T.RY Condition : PCA0296 3m 5W CH151 HORIZONTAL Detector : Peak Project : 58221 Mode : 30</p>	 <p>Site : 3008T.RY Condition : PCA0296 3m 5W CH151 VERTICAL Detector : Peak Project : 58221 Mode : 30</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 300817 BY Condition : 7CA40196 3m SIF CVF_01529 HORIZONTAL Channel : Full Project : 580211 Mode : IC</p>	<p>Site : 300817 BY Condition : 7CA40196 3m SIF CVF_01529 VERTICAL Channel : Full Project : 580211 Mode : IC</p>





Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Vertical
<p>Peak Avg.</p>	<p>File: 20081117 Condition: 2CA40196_0a_5M-CDF_0152HORIZONTAL Detector: Peak Program: 490211 Mode: IS</p>	<p>File: 20081117 Condition: 2CA40196_0a_5M-CDF_0152VERTICAL Detector: Peak Program: 490211 Mode: IS</p>



Emission below 1GHz
5GHz WIFI 802.11a (LF)

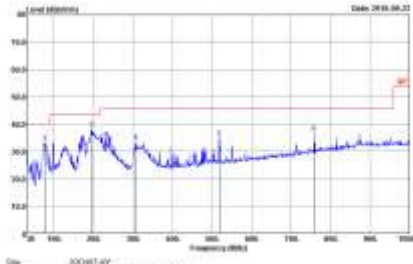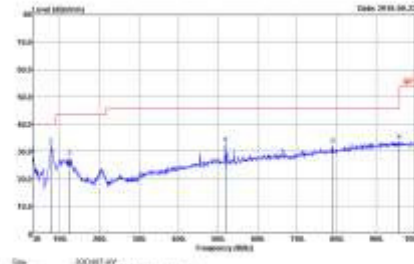WIFI	5GHz 5725~5850MHz	
ANT	802.11a LF	
1	Horizontal	Vertical
QP / Peak		




Appendix D Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11a	100	-	-	10Hz
5GHz 802.11n VHT20	100	-	-	10Hz
5GHz 802.11n VHT40	100	-	-	10Hz
5GHz 802.11n VHT80	100	-	-	10Hz




802.11a

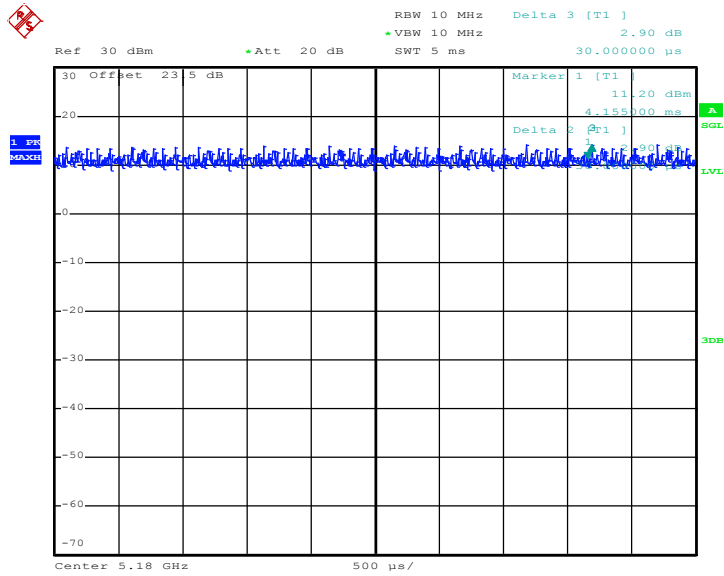

Date: 18.SEP.2016 08:51:22


5GHz 802.11n VHT20

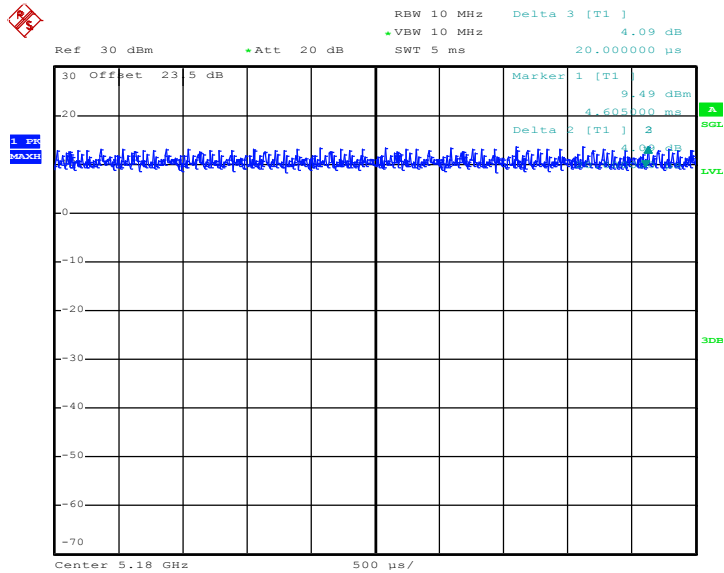

Date: 18.SEP.2016 08:52:03




5GHz 802.11n VHT40

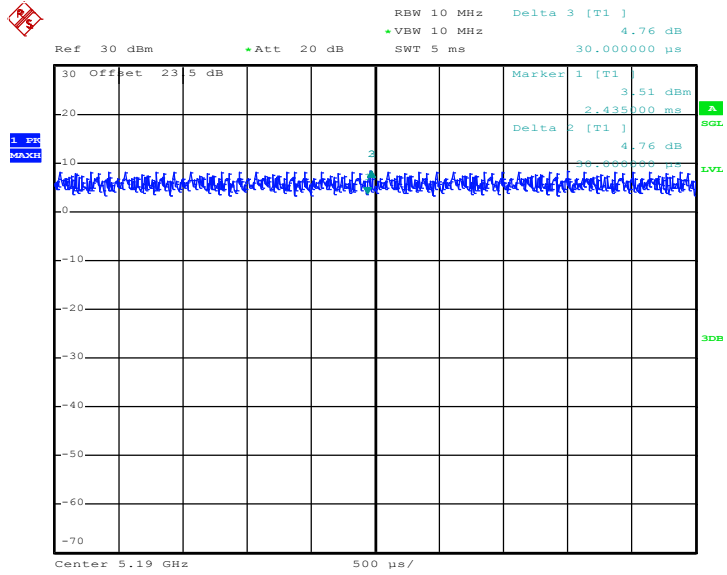

Date: 18.SEP.2016 08:52:16

5GHz 802.11n VHT80

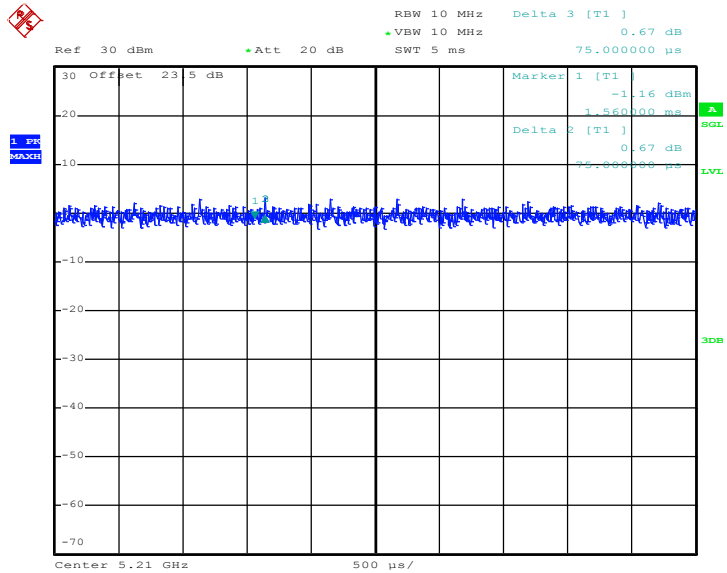

Date: 18.SEP.2016 08:53:09