



Report No:040945 rev.05
FCC ID: RFM-ACCESS-ONE-IE



NVLAP LAB CODE: 200413-



Test Firm Registration Number:90720
FRN: 0010502672



Industry Canada
Industrie Canada

IC LAB Code: 3695A

June 6, 2005

Test Record

Product Verification
According to FCC Part 15 Subparts B,C,E

for

Strix Systems, Inc
MODEL: ACCESS/ONE NETWORK:
WM11Ae, WM11Ge

This report contains confidential information. The owner of this report may make duplicates of it, provided **all** pages are copied.

Table of Contents

CERTIFICATION.....	6
SUMMARY OF TEST RESULTS.....	7
GENERAL INFORMATION.....	10
3.1 GENERAL DESCRIPTION OF EUT.....	10
3.2 DESCRIPTION OF TEST MODES.....	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	13
3.4 DESCRIPTION OF SUPPORT UNITS.....	14
4 TEST TYPES AND RESULTS (FOR PART 802.11B & 802.11G).....	15
4.1 CONDUCTED EMISSION MEASUREMENT.....	15
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	15
4.1.2 TEST INSTRUMENTS.....	15
4.1.3 TEST PROCEDURES.....	16
4.1.4 DEVIATION FROM TEST STANDARDS.....	16
4.1.5 TEST SETUP.....	17
4.1.6 EUT OPEARTING CONDITIONS.....	18
4.1.7 TEST RESULTS.....	19
4.2 RADIATED EMISSION MEASUREMENT.....	23
4.2.1 LIMITS OF RADIATED EMISSIONT MEASUREMENT.....	23
4.2.2 TEST INSTRUMENTS.....	24
4.2.3 TEST PROCEDURES.....	25
4.2.4 DEVIATION FROM TEST STANDARD.....	25
4.2.5 TEST SETUP.....	26
4.2.6 EUT OPERATING CONDITIONS.....	28
4.2.7 TEST RESULTS.....	29
4.2.8 TEST RESULTS (A).....	35
4.2.9 TEST RESULTS (B).....	51
4.3 6dB BANDWIDTH MEASUREMENT.....	67
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	67
4.3.2 TEST INSTRUMENTS.....	67
4.3.3 TEST PROCEDURE.....	68
4.3.4 DEVIATION FROM TEST STANDARD.....	68
4.3.5 TEST SETUP.....	68
4.3.6 EUT OPERATING CONDITIONS.....	68
4.3.7 TEST RESULTS (A).....	69

4.4	MAXIMUM PEAK OUTPUT POWER.....	70
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	70
4.4.2	INSTRUMENTS.....	70
4.4.3	TEST PROCEDURES.....	70
4.4.4	DEVIATION FROM TEST STANDARD.....	70
4.4.5	TEST SETUP.....	71
4.4.6	EUT OPEARTING CONDITIONS.....	71
4.4.7	TEST RESULTS (A).....	72
4.4.8	TEST RESULTS (B).....	73
4.4.9	TEST RESULTS (C).....	74
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	75
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	75
4.5.2	TEST INSTRUMENTS.....	75
4.5.3	TEST PROCEDURE.....	75
4.5.4	DEVIATION FROM TEST STANDARD.....	75
4.5.5	TEST SETUP.....	76
4.5.6	EUT OPERATING CONDITION.....	76
4.5.7	TEST RESULTS (A).....	77
4.5.8	TEST RESULTS (B).....	84
4.5.9	TEST RESULTS (C).....	86
4.6	BAND EDGES MEASUREMENT.....	89
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	89
4.6.2	TEST INSTRUMENTS.....	89
4.6.3	TEST PROCEDURE.....	89
4.6.4	DEVIATION FROM TEST STANDARD.....	89
4.6.5	EUT OPERATING CONDITION.....	90
4.6.6	TEST RESULTS (A).....	90
4.7	RESTRICTED BANDS OF OPERATION.....	104
4.7.1	LIMITS OF RESTRICTED BANDS OF OPERATION	104
4.7.2	TEST INSTRUMENTS.....	104
4.7.3	TEST PROCEDURES.....	104
4.7.4	DEVIATION FROM TEST STANDARD.....	104
4.7.5	EUT OPERATING CONDITION.....	105
4.7.6	TEST RESULTS (A).....	105
4.7.7	TEST RESULTS (B).....	110
4.7.8	TEST RESULTS (C).....	115
4.7.9	TEST RESULTS (D).....	118
4.7.10	TEST RESULTS (E).....	123
4.7.11	TEST RESULTS (F).....	128
5	TEST TYPES AND RESULTS (FOR PART 802.11A).....	131
5.1	CONDUCTED EMISSION MEASUREMENT.....	131
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	131
5.1.2	TEST INSTRUMENTS.....	131
5.1.3	TEST PROCEDURES.....	131
5.1.4	DEVIATION FROM TEST STANDARD.....	132
5.1.5	TEST SETUP.....	133
5.1.6	EUT OPERATING CONDITIONS.....	134
5.1.7	TEST RESULTS.....	135

5.2	RADIATED EMISSION MEASUREMENT.....	139
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	139
5.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	139
5.2.3	TEST INSTRUMENTS.....	140
5.2.4	TEST PROCEDURES.....	141
5.2.5	DEVIATION FROM TEST STANDARD.....	141
5.2.6	TEST SETUP.....	142
5.2.7	EUT OPERATING CONDITIONS.....	144
5.2.8	TEST RESULTS.....	145
5.2.9	TEST RESULTS (A).....	151
5.2.10	TEST RESULTS (B).....	182
5.3	PEAK TRANSMIT POWER MEASUREMENT.....	209
5.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT.....	209
5.3.2	TEST INSTRUMENTS.....	209
5.3.3	TEST PROCEDURE.....	210
5.3.4	DEVIATION FROM TEST STANDARD.....	210
5.3.5	TEST SETUP.....	210
5.3.6	EUT OPERATING CONDITIONS.....	211
5.3.7	TEST RESULTS.....	212
5.4	PEAK POWER EXCURSION MEASUREMENT.....	223
5.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT.....	223
5.4.2	TEST INSTRUMENTS.....	223
5.4.3	TEST PROCEDURE.....	224
5.4.4	DEVIATION FROM TEST STANDARD.....	224
5.4.5	TEST SETUP.....	224
5.4.6	EUT OPERATING CONDITIONS.....	224
5.4.7	TEST RESULTS.....	225
5.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	232
5.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	232
5.5.2	TEST INSTRUMENTS.....	232
5.5.3	TEST PROCEDURES.....	233
5.5.4	DEVIATION FROM TEST STANDARD.....	233
5.5.5	TEST SETUP.....	233
5.5.6	EUT OPERATING CONDITIONS.....	233
5.5.7	TEST RESULTS.....	234
5.6	BAND EDGES MEASUREMENT.....	245
5.6.1	TEST INSTRUMENTS.....	245
5.6.2	TEST PROCEDURE.....	245
5.6.3	EUT OPERATING CONDITION.....	245
5.6.4	TEST RESULTS.....	245
5.7	RESTRICTED BANDS OF OPERATION	250
5.7.1	LIMITS OF RESTRICTED BANDS OF OPERATION	250
5.7.2	TEST INSTRUMENTS.....	250
5.7.3	TEST PROCEDURES.....	250
5.7.4	DEVIATION FROM TEST STANDARD.....	251
5.7.5	EUT OPERATING CONDITION.....	251
5.7.6	TEST RESULTS.....	251

5.8	6dB BANDWIDTH MEASUREMENT.....	270
5.8.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	270
5.8.2	TEST INSTRUMENTS.....	270
5.8.3	TEST PROCEDURE.....	271
5.8.4	DEVIATION FROM TEST STANDARD.....	271
5.8.5	TEST SETUP.....	271
5.8.6	EUT OPERATING CONDITIONS.....	272
5.8.7	TEST RESULTLS.....	273
5.9	MAXIMUM PEAK OUTPUT POWER.....	275
5.9.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	275
5.9.2	INSTRUMENTS.....	275
5.9.3	TEST PROCEDURES.....	276
5.9.4	DEVIATION FROM TEST STANDARD.....	276
5.9.5	TEST SETUP.....	277
5.9.6	EUT OPERATING CONDITONS.....	277
5.9.7	TEST RESULTS.....	278
5.10	POWER SPECTRAL DENSITY MEASUREMENT.....	284
5.10.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	284
5.10.2	TEST INSTRUMENTS.....	284
5.10.3	TEST PROCEDURE.....	285
5.10.4	DEVIATION FROM TEST STANDARD.....	285
5.10.5	TEST SETUP.....	285
5.10.6	EUT OPERATING CONDITON.....	286
5.10.7	TEST RESULTS.....	286
5.11	BAND EDGES MEASUREMENT.....	296
5.11.1	LIMITS OF BAND EDGES MEASUREMENT.....	296
5.11.2	TEST INSTRUMENTS.....	296
5.11.3	TEST PROCEDURE.....	296
5.11.4	DEVIATION FROM TEST STANDARD.....	296
5.11.5	EUT OPERATING CONDITION.....	297
5.11.6	TEST RESULTS.....	297

1 Certification of Test Record

CERTIFICATION.

We, JMR Compliance Engineering, Chatsworth, CA, hereby certify that one sample of the designation product has been tested in our facility from Nov.1 to Dec.16 2004 The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's characteristics under the conditions herein specified.

PRODUCT: IEEE 802.11 A/B/G WIRELESS ACCESS POINT

BRAND NAME: STRIX

MODEL: ACCESS / ONE NETWORK: WM11Ae, WM11Ge

APPLICANT: STRIX SYSTEMS, INC

**STANDARDS: 47 CFR FCC Part 15, Subpart C (Section 15.247)
47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.4-2003**


All measurements are traceable to the National Institute of Standards and Technology (NIST). This Report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the US Government.

Tests performed by



Sandra Sohn
EMC Engineer

Test Record approved by::



Leon Kogan
Technical Director

**JMR Compliance Engineering, 20400 Plummer Street,
Chatsworth CA 91311. E-mail:emc@jmr.com**

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For freq: 2400~2483.5 MHz

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type	Result	Comments
15.207	AC Power Conducted Emissions, 0.15 – 30 MHz	PASS	Meet the requirement
15.209	Radiated Emissions, 30-1000 MHz:	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz (6dB bandwidth)	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Spurious Radiated Emissions Limit: Table 15.209: 1-40 GHz	PASS	Meet the requirement of class B limit
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit
15.205	Emissions produced in Restricted bands of operations Limit: Table 15.205	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.

For freq. 5.15 ~ 5.35GHz

APPLIED STANDARD: 47 CFR Part 15, Subpart E			
Standard Section	Test Type	Result	Comments
15.407(b)(6)	AC Power Conducted Emissions Limit: Table 15.207	PASS	Meet the requirement of class B limit
15.407(b)(6)	Radiated Emissions, 30-1000 MHz: Limit: Table 15.209	PASS	Meet the requirement of class B limit
15.407(b)(1)(2)(b)(5)	Electric Field Strength Spurious Emissions, 1000MHz ~ 40000MHz	PASS	Meet the requirement of limit
15.407(a)(1)(2)(3)	Peak Transmit Power	PASS	Meet the requirement of limit
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit
15.407(a)(1)(2)(3)	Peak Power Spectral Density	PASS	Meet the requirement of limit
15.407 (b)(1)(2)	Band Edge Measurement Limit: EIRP -27 dBm/MHz	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.

For freq. 5.725 ~ 5.850GHz

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Comments
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Spurious Radiated Emissions Limit: Table 15.209: 1-40 GHz	PASS	Meet the requirement of class B limit
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit
15.205	Emissions produced in Restricted bands of operations Limit: Table 15.205	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	IEEE 802.11 a/b/g Wireless Access Point
MODEL NO.	Access/One Network: WM11Ae, WM11Ge
OEM MODEL NO.	N/A
POWER SUPPLY	StrixSystems; Model: BME4: Input: 100-240V~, 50-60Hz Output 18Vdc,24W
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM, DBPSK, DQPSK, CCK
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	up to 54Mbps *(Turbo mode : up to 108Mbps)
FREQUENCY RANGE	802.11b and 802.11g: 2412~2462 MHz; 802.11a: 5.15~5.35GHz and 5.725~5.850GHz
NUMBER OF CHANNEL	802.11b and 802.11g: 11 for Normal mode / 1 for Turbo mode 802.11a: 13 for Normal mode / 5 for Turbo mode
CHANNEL SPACING	802.11b and 802.11g: 5MHz; 802.11a: 20MHz for Normal mode / 40MHz for Turbo mode
TRANSMIT POWER	802.11b and 802.11g: 17dBm; 802.11a: 17dBm
DATA CABLE	UTP cat.5
ANTENNA TYPE	(Note 3)
ANTENNA GAIN	(Note 3)
I/O PORTS	Ethernet ports X4
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatible with 802.11a and 802.11b, 802.11g technology.
2. This EUT is capable of providing data rates of up to 108Mbps in Turbo Mode depending upon reception quality.
3. The following antennas provided with this EUT:
 - **Dual-Band Vertically -Polarized Omni-Directional Antenna Module**
Gain: 2.0 dBi at 2.4-2.5 GHz; 2.0 dBi at 5.15-5.8 GHz
 - **External Dual-Band Vertically-Polarized Omni-Directional Antenna**
Gain: 4.0 dBi at 2.4-2.5 GHz; 5.0 dBi at 5.15-5.35 GHz;
4.5 dBi at 5.725-5.8 GHz

4. The EUT was powered by the following power adapter:

AC Power Adapter

Brand	Strixsystems	
Model	BME4	OEM P/N 310-0002-XX
Input	100-240 V~; 0.8A, 50/60 Hz	
Output	18 V; DC cable –unshielded 2.2 m with F/B	

The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

For 802.11b and 802.11g: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

One channel is provided to this EUT for Turbo Mode.

Channel	Frequency	Channel	Frequency
6	2437 MHz		

NOTE:

- Below 1GHz, the channel 1, 6, and 11 were pre-tested. The channel 11, worst case one, was chosen for final test.
- Above 1GHz, the channel 1, 6, and 11 were tested individually.
- Data rates 1; 5.5; 6;11;24;54 Mbps were pre-tested to determined the worst case

For 802.11a: Twelve channels are provided to this EUT for Normal mode.

Channel	Frequency	Channel	Frequency
36	5180 MHz	64	5320 MHz
40	5200 MHz	149	5745 MHz
44	5220 MHz	153	5765 MHz
48	5240 MHz	157	5785 MHz
52	5260 MHz	161	5805 MHz
56	5280 MHz	165	5825 MHz
60	5300 MHz		

Five channels are provided to this EUT for Turbo Mode.

Channel	Frequency	Channel	Frequency
42	5210 MHz	152	5760 MHz
50	5250 MHz	160	5800 MHz
58	5290 MHz		

NOTE:

- The EUT was tested in both normal mode (channel bandwidth of approximately 20MHz) and turbo mode (channel bandwidth of approximately 40MHz).
- “Normal Mode” allows data rates of up to 54Mbps. The device was, therefore, tested in Normal mode at the data rate that produced the highest output power for normal mode (6Mbps).
- Channel 36, 48, 52, 64,149 and 165 are the closest frequencies to the band edge, were chosen for final test of Normal Mode.
- Channels 42; 58 were chosen for final test of turbo mode.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a IEEE 802.11 a/b/g Wireless Access Point. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 15, Subpart C. (15.247),
FCC 47 CFR Part 15, Subpart E (15.407).
ANSI C63.4 : 2003**

All tests have been performed and recorded as per the above standards.

NOTE: The EUT supporting module is a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit. The following support units or accessories were used to set up a required test configurations.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	IBM	ThinkPad 2628	78-HLAW1 10/00	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1m Ethernet UTP cat.5; terminated with RJ45;

4 TEST TYPES AND RESULTS (FOR PART 802.11b & 802.11g)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Device	Model No.	Serial No.	Last Cal.	Next Cal
Cable 1	RG-214/U	CBL-001	02/19/05	02/19/06
Analyzer	HP85462A	3325A00120	03/05/05	03/05/06
Preselector	HP85460A	3330A00117	03/05/05	03/05/06
QPeak Adapter	HP85462 Internal	Internal	03/05/05	03/05/06
Pre-Amplifier	None			
LISN	3825/2 LISN	9406-2232	12/03/04	12/03/05
Switch 1	N/A	N/A	N/A	N/A
Attenuator 1	33-10-34	BA9146	02/19/05	02/19/06
Temperature and Humidity Recorder	Dickson TH8-24C	5097755	09/16/03	09/16/05

4.1.3 TEST PROCEDURES

The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

The frequency range from 150kHz to 30MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP



**Conducted Emission Test
(Front View)**

4.1.6 EUT OPERATING CONDITIONS

The AC Adaptor of EUT placed on a testing table.

The EUT is under transmission/receiving condition continuously at specific channel frequency for both 801.11 A/B/G by external antenna. Two Ethernet ports are backloop each other.

This program was repeated continuously for the duration of the testing. The above mentioned set-up allowed the article to perform sufficiently for the test purposes and required time, i.e. produce conducted emissions.

4.1.7 TEST RESULTS


EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26deg. C, 40%RH,	TESTED BY: Sandra Sohn	

No	Freq.	Emission Level	Emission Level	Limit	Limit	Margin	Margin
		[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	(dB)
		QP	AV	QP	AV	QP	AV
1	0.1592	55.03	39.24	65.50	55.50	-10.47	-16.26
2	0.2393	40.45	31.96	62.12	52.12	-21.67	-20.16
3	0.3191	40.83	37.69	59.73	49.73	-18.90	-12.04
4	1.4376	42.29	34.86	56.00	46.00	-13.71	-11.14
5	1.5176	41.84	34.57	56.00	46.00	-14.16	-11.43
6	1.6776	42.67	35.83	56.00	46.00	-13.33	-10.17
7	1.9172	41.92	36.08	56.00	46.00	-14.08	-9.92
8	1.9972	39.58	34.31	56.00	46.00	-16.42	-11.69
9	4.1548	41.78	34.94	56.00	46.00	-14.22	-11.06
10	5.8334	40.25	36.91	60.00	50.00	-19.75	-13.09
11	6.7928	40.16	36.11	60.00	50.00	-19.84	-13.89
12	7.1927	39.37	34.12	60.00	50.00	-20.63	-15.88
13	18.142	39.09	37.22	60.00	50.00	-20.91	-12.78

REMARKS:

1. AV. is abbreviations of average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value

Peak traces were recorded

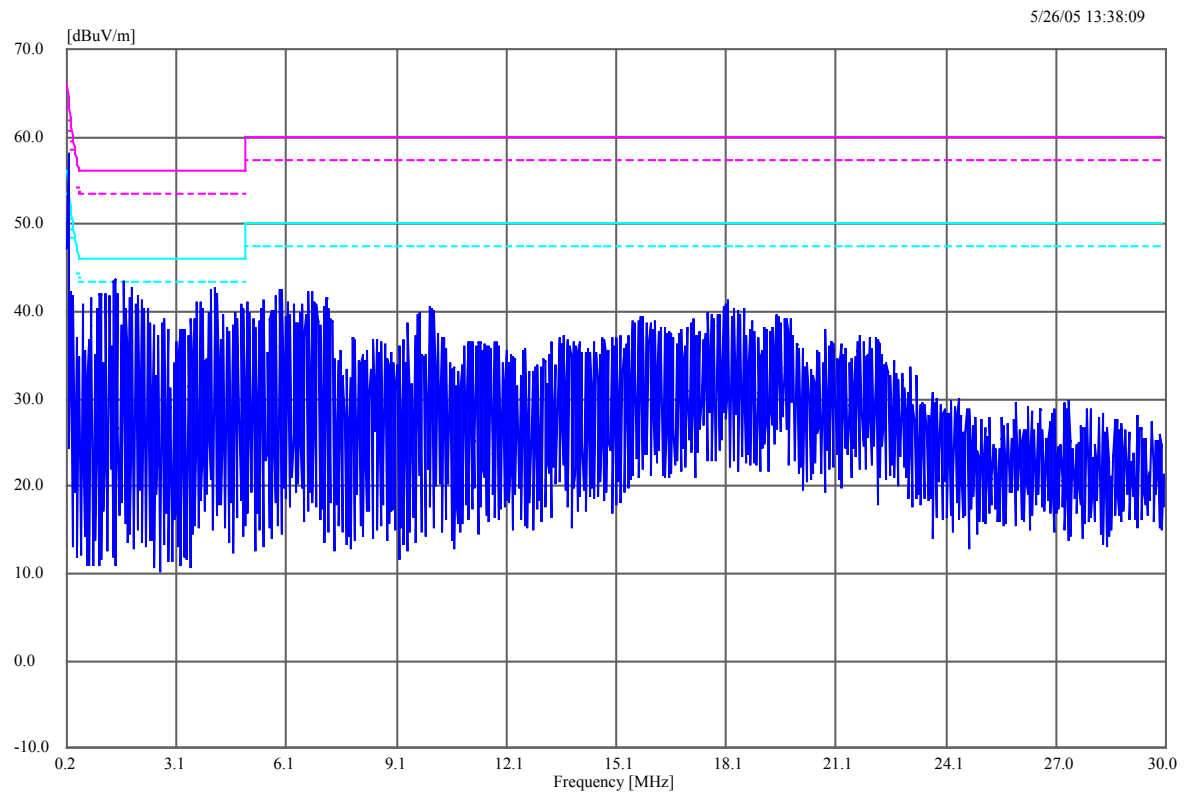


EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26deg. C, 40%RH,	TESTED BY: Sandra Sohn	

No	Freq.	Emission Level	Emission Level	Limit	Limit	Margin	Margin
		[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	(dB)
	[MHz]	QP	AV	QP	AV	QP	AV
1	0.1592	55.50	43.37	65.50	55.50	-10.00	-12.13
2	0.2392	40.56	30.68	62.12	52.12	-21.56	-21.44
3	0.3191	40.90	37.21	59.73	49.73	-18.83	-12.52
4	1.4361	41.91	34.27	56.00	46.00	-14.09	-11.73
5	1.6756	42.64	35.10	56.00	46.00	-13.36	-10.90
6	1.9152	41.90	35.13	56.00	46.00	-14.10	-10.87
7	4.6296	40.25	30.34	56.00	46.00	-15.75	-15.66
8	5.9075	42.78	31.57	60.00	50.00	-17.22	-18.43
9	6.4666	42.02	30.64	60.00	50.00	-17.98	-19.36
10	7.1054	40.29	30.25	60.00	50.00	-19.71	-19.75
11	18.044	40.27	38.57	60.00	50.00	-19.73	-11.43
12	19.482	39.32	36.15	60.00	50.00	-20.68	-13.85

REMARKS:

1. AV. is abbreviations of average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value

Peak traces were recorded

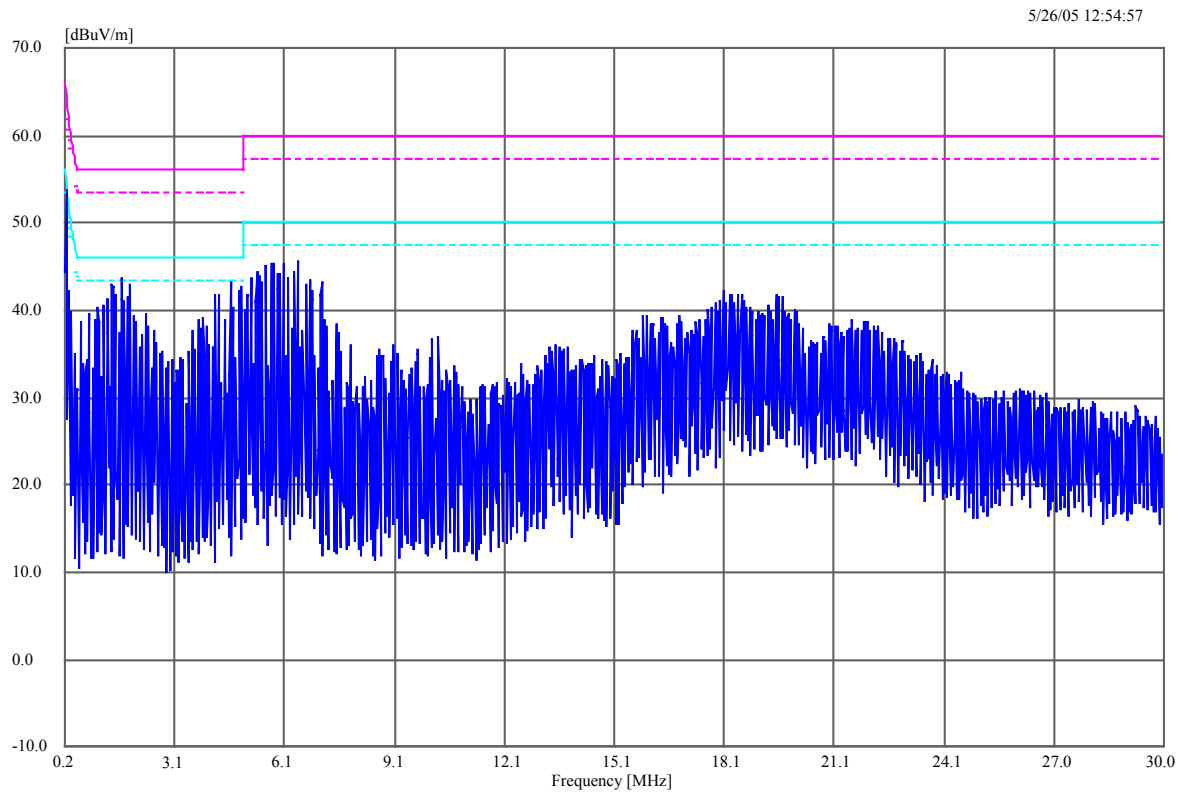

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

Device	Model No.	Serial No.	Last Cal.	Next Cal
Cable 1	8214	CBL-006	02/19/05	02/19/06
Analyzer	HP85462A	3325A00120	03/05/05	03/05/06
Cable 2	8268	CBL-002	02/19/05	02/19/06
Preselector	HP85460A	3330A00117	03/05/05	03/05/06
Qpeak Adapter	HP85462 Internal	Internal	03/05/05	03/05/06
Cable 10	K316MM	CBL-010	9/14/04	9/14/05
Cable 11	K086MM	CBL-011	9/14/04	9/14/05
ROHDE & SCHWARZ EMI Test Receiver	ESIB 40	100201	01/23/05	01/23/06
Pre-Amplifier	HP83051	1065194A	10/11/04	10/11/05
Tower 1	EMCO 1050	9310-1786	N/A	N/A
Turntable 1	EMCO 1060	9409-1753	N/A	N/A
Bilog Antenna	CBL6112B	2604	09/03/04	09/03/05
Horn Antenna	SAS-200	175	03/04/05	03/04/06
Double Ridged Guide Antenna	ETS3116	0026390	05/23/05	05/24/06
Shielded Semi-Anechoic Chamber	RANTEC	N/A	02/11/05	02/11/06
Temperature and Humidity Recorder	Dickson TH8-24C	5097755	09/16/03	09/16/05

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

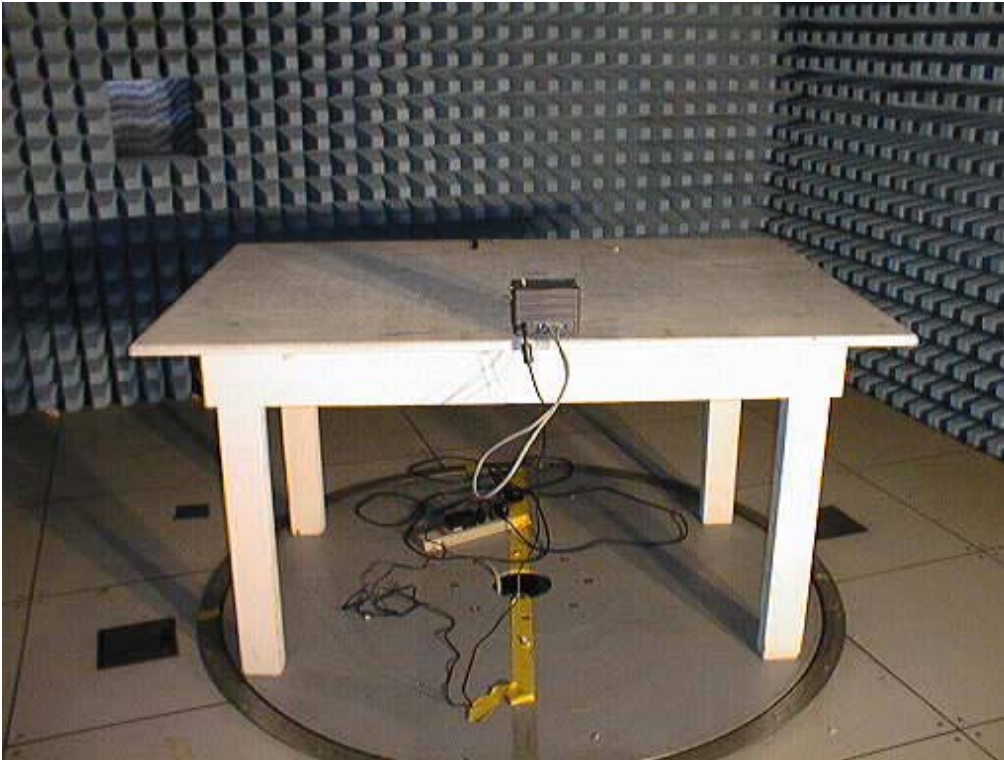

Radiated Emission Test with Antenna Module



Radiated Emission Test with External Antenna

4.2.6 EUT OPERATING CONDITIONS

The EUT is under transmission/receiving condition continuously at specific channel frequency for both 801.11 A/B/G by antenna module & external antenna.
Two Ethernet ports are backloop.

This program was repeated continuously for the duration of the testing. The above mentioned set-up allowed the article to perform sufficiently for the test purposes and required time, i.e. produce radiated emissions.

4.2.7 TEST RESULTS

EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 11, w/ antenna module	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 40%RH	TESTED BY: Sandra Sohn	


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)
1	200.002	36.74	43.5	-6.76	1.88	282
2	375.004	43.11	46.5	-3.39	1.47	62
3	500.003	38.00	46.5	-8.50	1.14	343
4	539.393	31.17	46.5	-15.33	1.00	242

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)
1	103.071	40.39	43.5	-3.11	1.03	254
2	374.993	46.42	46.5	-0.08	1.64	162
3	499.993	45.96	46.5	-0.54	1.4	180
4	539.030	35.55	46.5	-10.95	1.2	224
5	562.161	36.13	46.5	-10.37	1.2	162
6	577.612	38.55	46.5	-7.95	1.2	162


REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

Horizontal
Peak traces were recorded

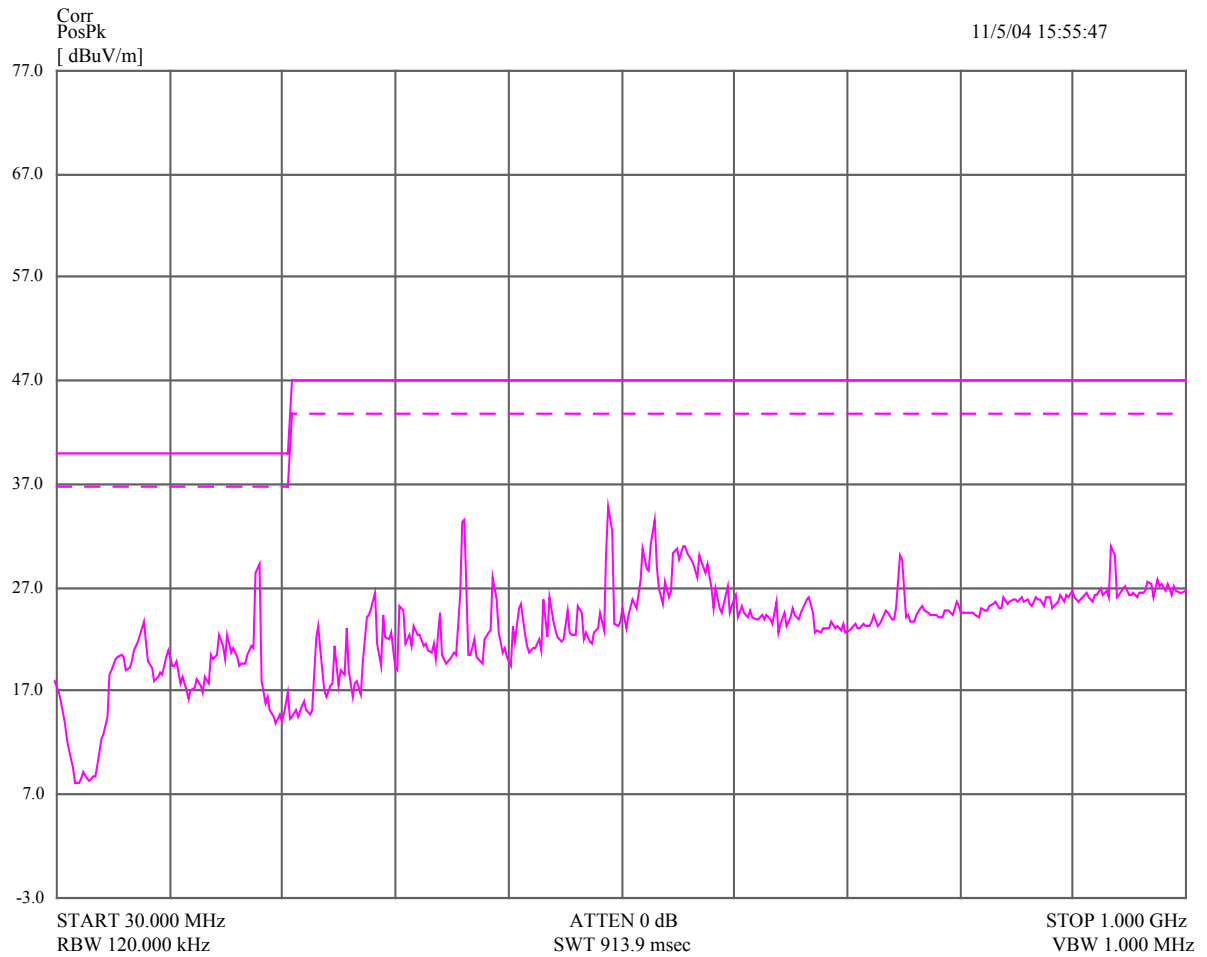

Vertical
Peak traces were recorded

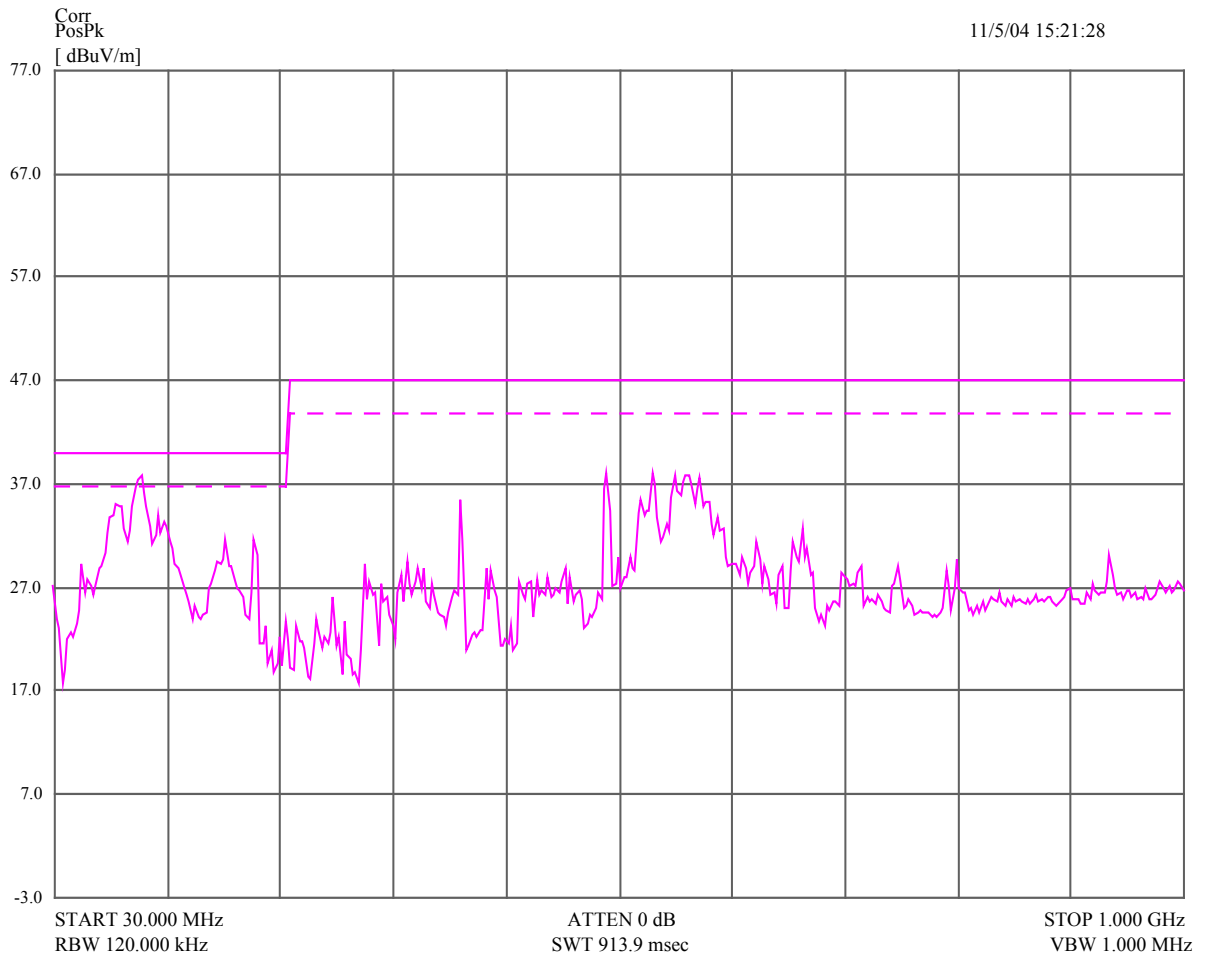

EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 11, w/external antenna	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 40%RH	TESTED BY: Sandra Sohn	


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)
1	133.329	43.45	43.5	-0.05	1.66	222
2	199.995	43.21	43.5	-0.29	1.87	137
3	293.734	31.01	46.5	-15.49	1.40	138
4	324.992	39.35	46.5	-7.15	1.40	138
5	333.323	37.11	46.5	-9.39	1.40	138
6	374.996	44.65	46.5	-1.85	1.2	228
7	399.969	41.34	46.5	-5.16	1.2	90
8	499.991	43.62	46.5	-2.88	1.2	247

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)
1	103.320	40.27	43.5	-3.23	1.2	156
2	375.006	42.29	46.5	-4.21	1.2	180
3	499.993	46.46	46.5	-0.04	1.2	175


REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

Horizontal Peak traces were recorded

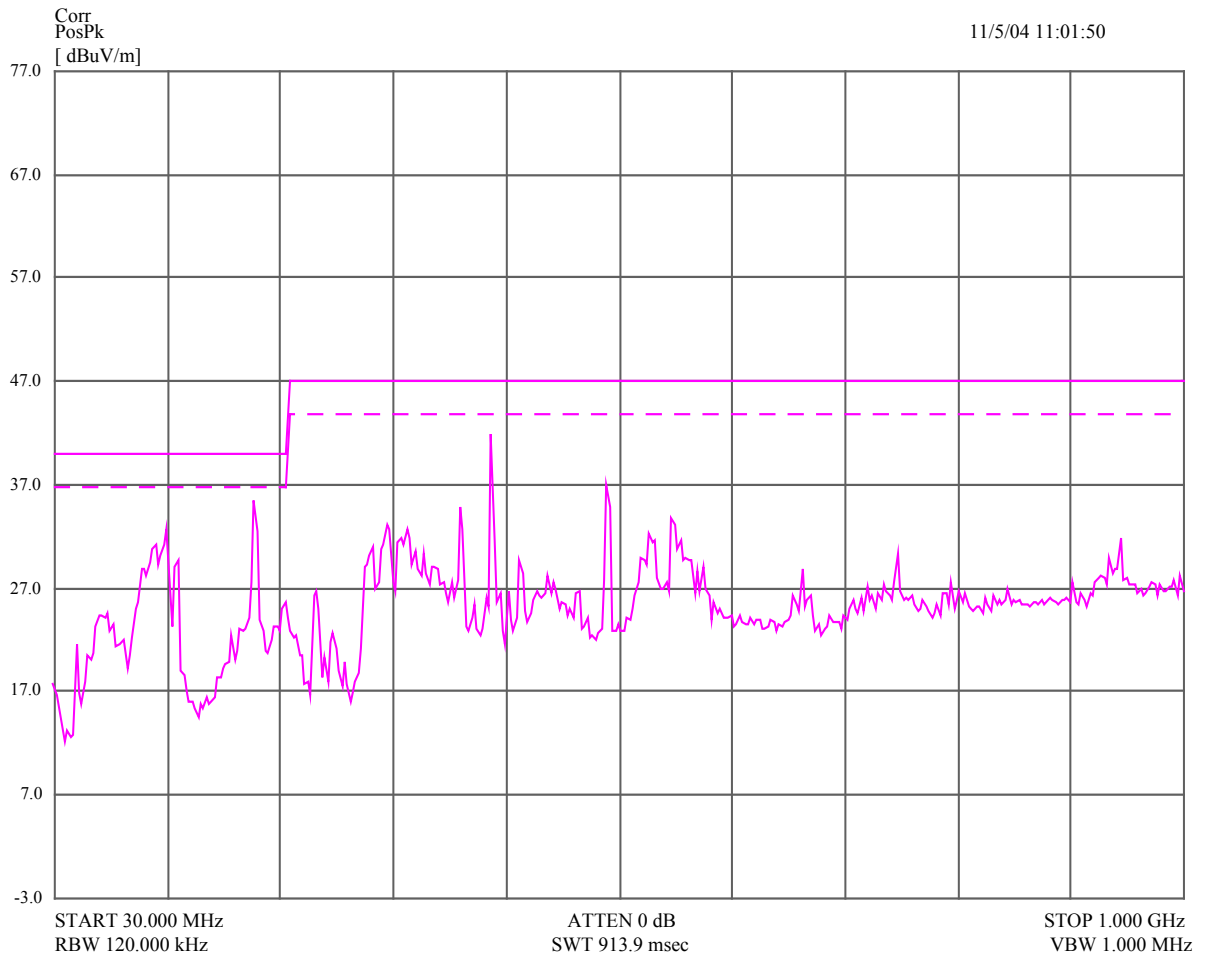

Vertical
Peak traces were recorded

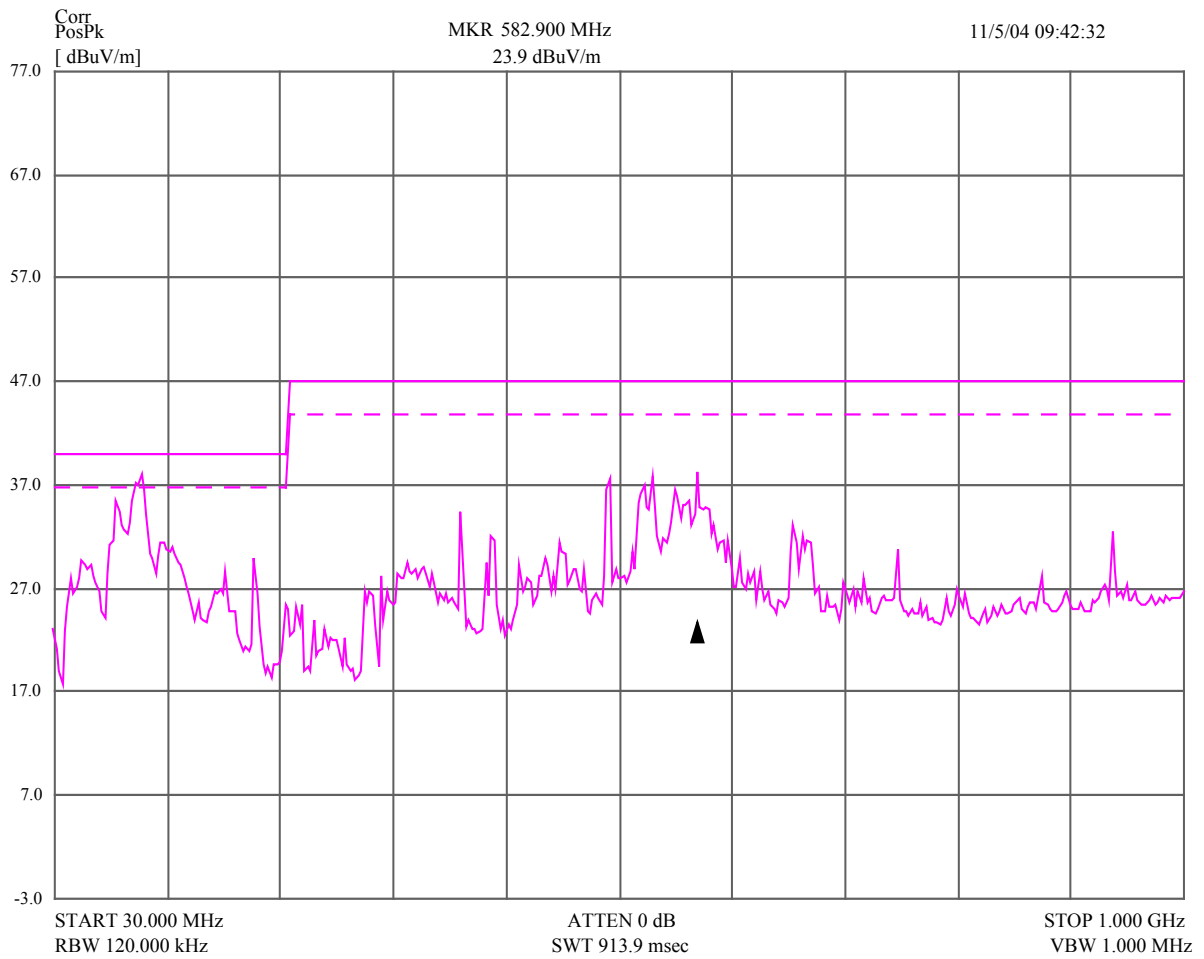

4.2.8 TEST RESULTS (A): Harmonics & Spurious emissions

EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 1(6Mbps) External Dual-Band Vertically-Polarized Omni-Directional Antenna Gain: 4 dBi at 2.4-2.5 GHz	FREQUENCY RANGE	1000-18000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (P) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 40%RH	TESTED BY: Sandra Sohn	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
F	2404 (P)	93.4 (P)			1	7	95.6	-2.2
F	2404 (AV)	67.2 (AV)			1	7	69.4	-2.2
1 _R	1034 (P)	48.1 (P)	74.0	-25.9	1	5	51.1	-3.0
2*	5258 (P)	52.5 (P)	73.4	-20.9		8	46.5	5.9
2*	5258 (AV)	39.5 (AV)	47.2	-7.7	1	8	33.6	5.9
3 _R	5428 (P)	52.2 (P)	74.0	-21.7	1	9	48.8	3.4


REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier (dB) + *Filter (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247 and per 15.205.
6. *Filter is used.
7. F is fundamental.
8. _R is Restricted band.

Vertical MaxPeak before corrections .(without filter)

Ch1 (Data rate: 6Mbps)


Resolution Bandwidth: 1MHz
Video Bandwidth: 1 MHz

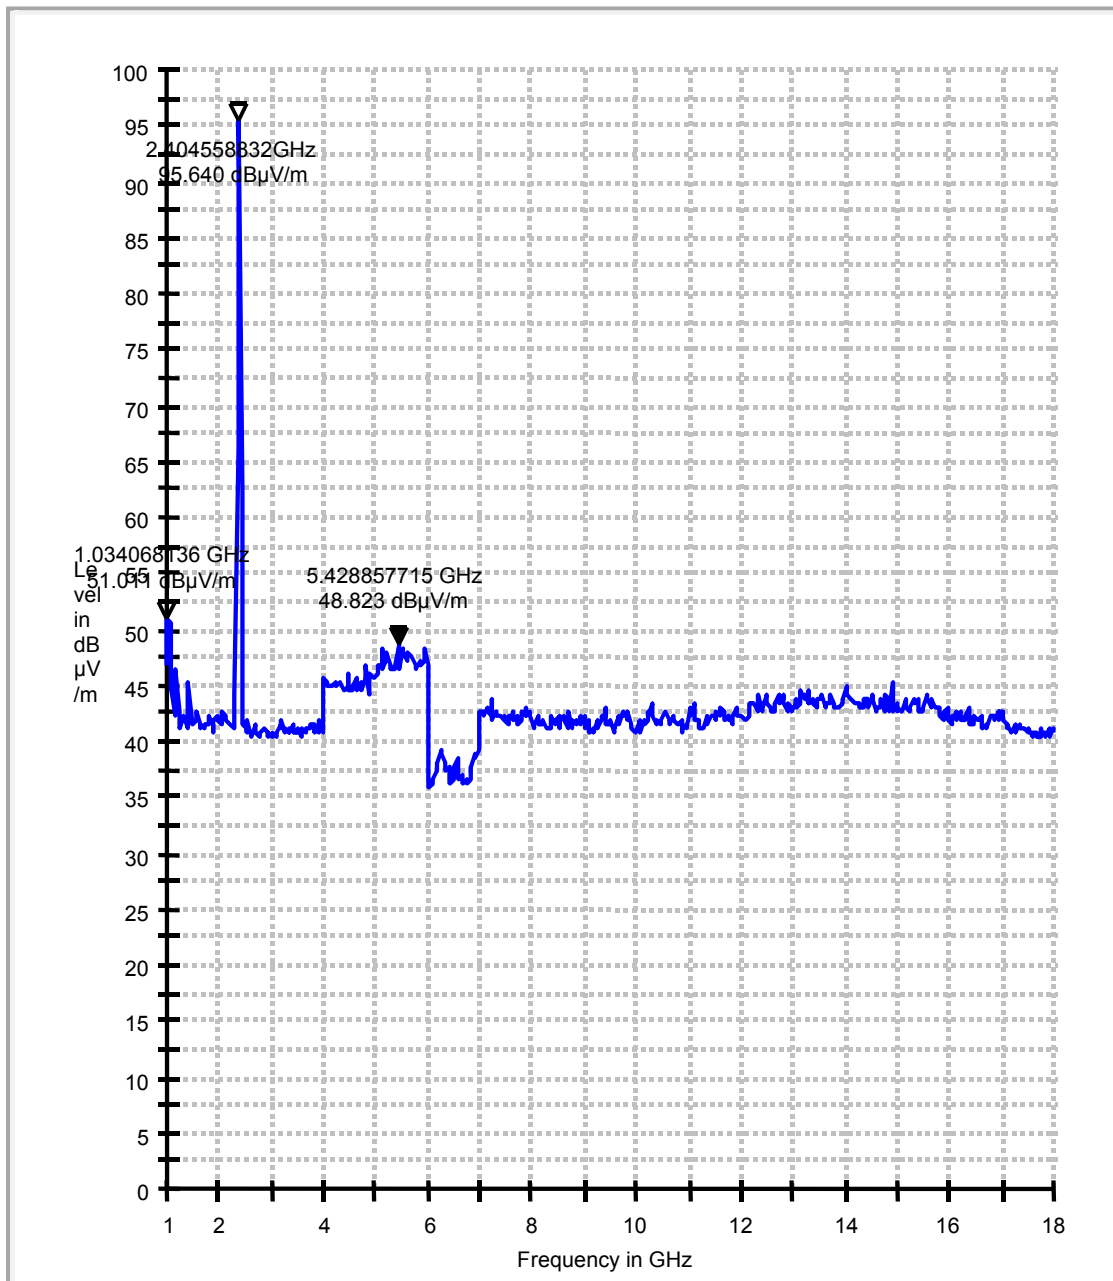

Vertical MaxPeak before corrections .(with filter)

Ch1 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 1 MHz

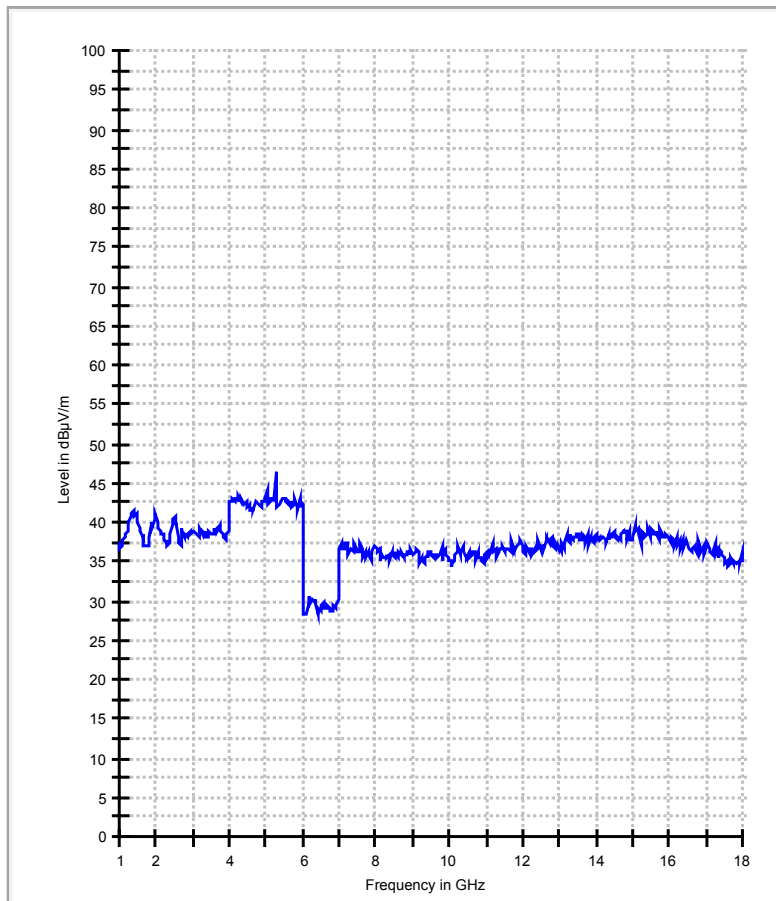




Vertical Average before corrections .(without filter)

Ch1 (Data rate: 6Mbps)


Resolution Bandwidth:	1MHz
Video Bandwidth:	300 Hz

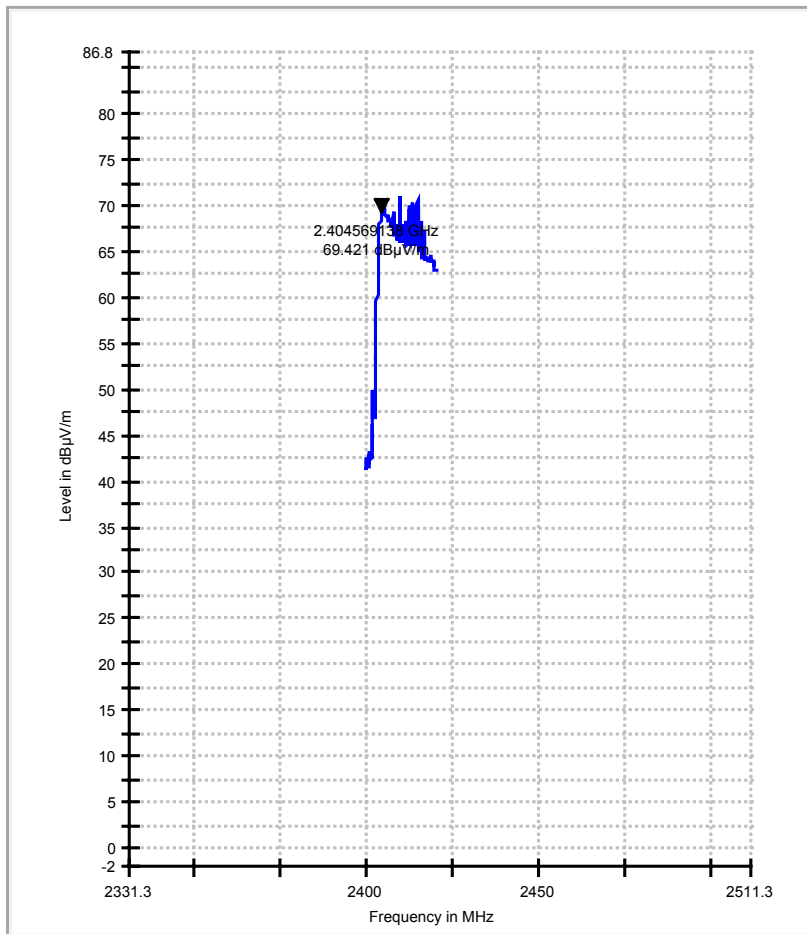

Vertical Average before corrections .(with filter)

Ch1 (Data rate: 6Mbps)

Resolution Bandwidth:	1MHz
Video Bandwidth:	300 Hz

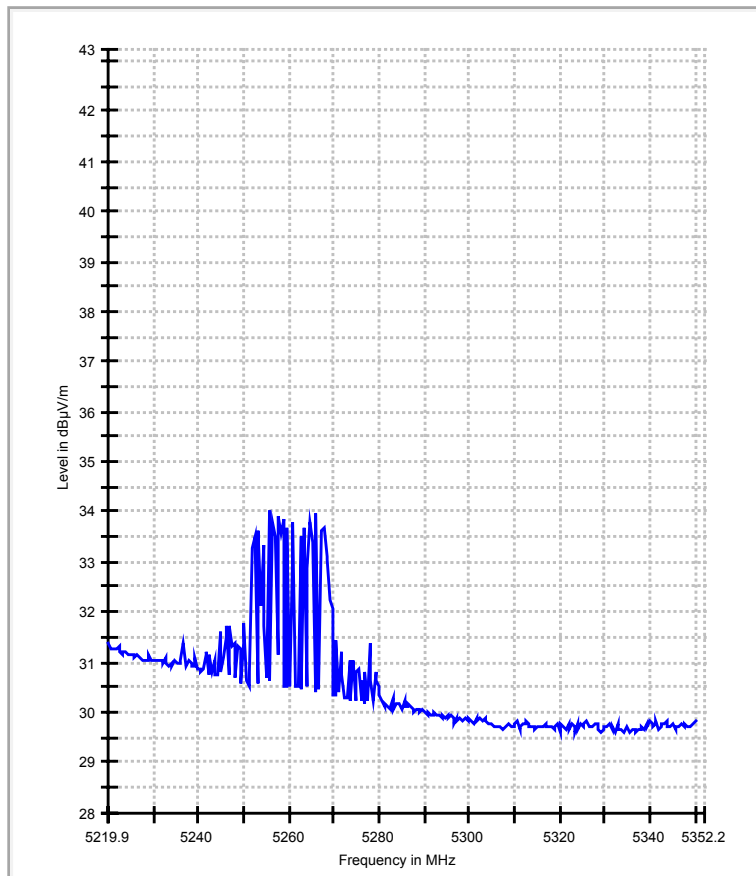

Harmonics & Spurious emissions: 1-18GHz

EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
------------	---	--------------	---

MODE	Channel 6 (6Mbps) External Dual-Band Vertically-Polarized Omni-Directional Antenna Gain: 4 dBi at 2.4-2.5 GHz	FREQUENCY RANGE	1000-18000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (P) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 40%RH	TESTED BY: Sandra Sohn	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
F	2430 (P)	95.2 (P)			1	8	97.4	-2.2
F	2434 (AV)	77.3 (AV)			1	8	79.5	-2.2
1 _R	1034 (P)	48.4 (P)	74.0 (P)	-25.6	1	6	51.4	-3.0
2*	4032 (P)	49.3 (P)	75.2 (P)	-25.8	1	7	43.4	5.9
3	5565 (P)	51.8 (P)	75.2 (P)	-23.4	1	9	48.4	3.4


REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier (dB) + *Filter (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247 and 15.205.
6. *Filter is used.
7. F is fundamental.
8. _R is restricted band.

Vertical MaxPeak before correction (no filter)
Ch6 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz


Video Bandwidth: 1 MHz

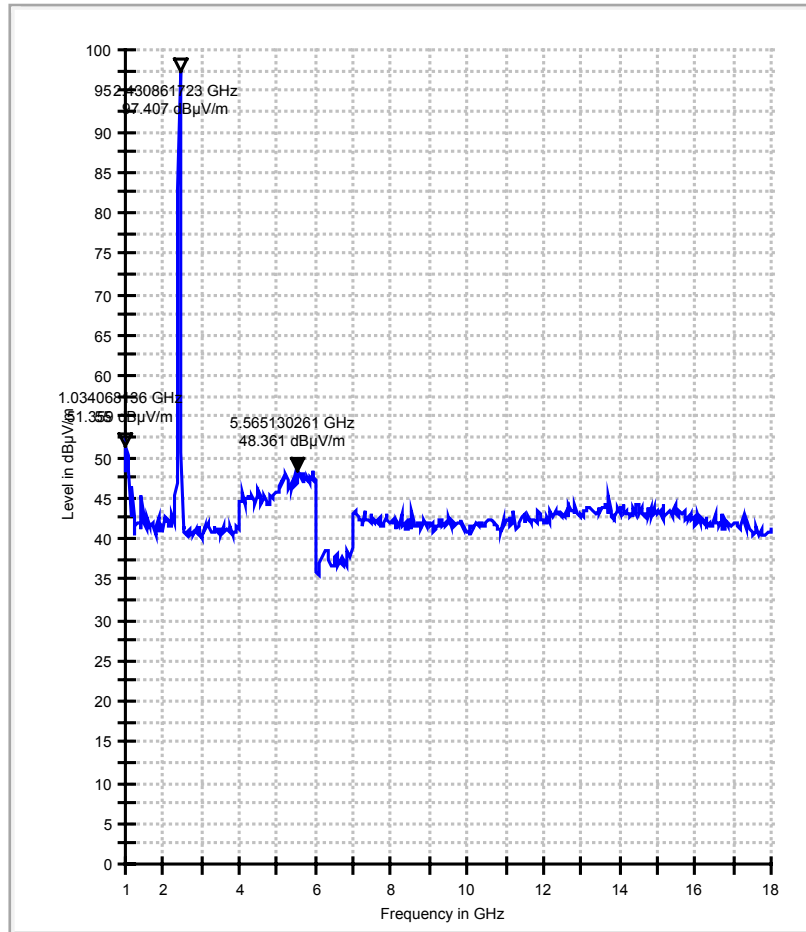

Vertical MaxPeak before correction (with filter)
Ch6 (Data rate: 6Mbps)


Resolution Bandwidth: 1MHz

Video Bandwidth: 1 MHz

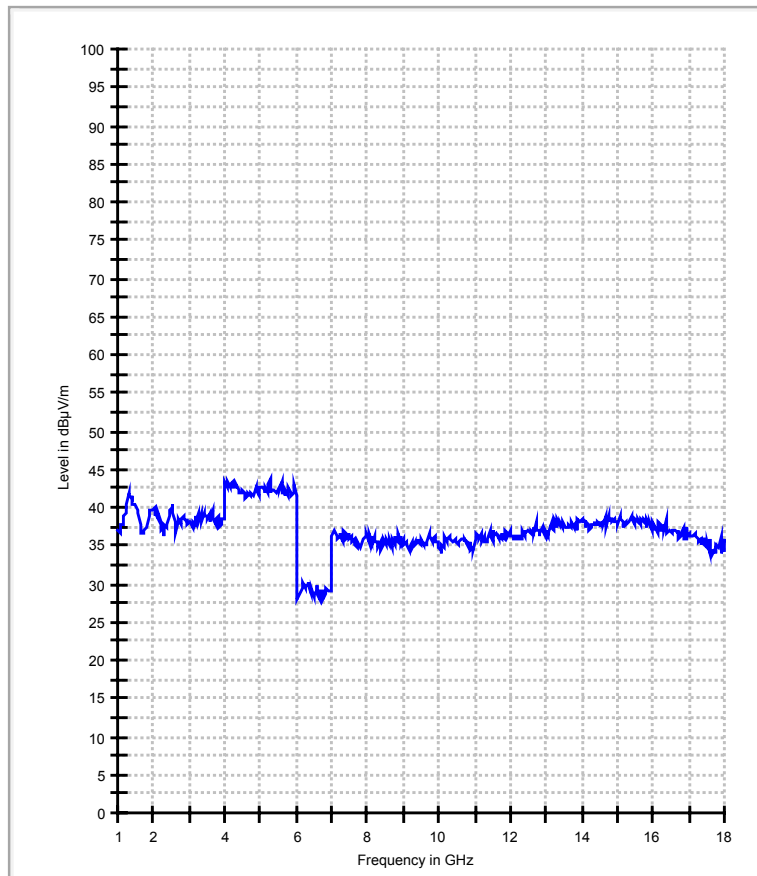

Vertical Average before correction (no filter)
Ch6 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

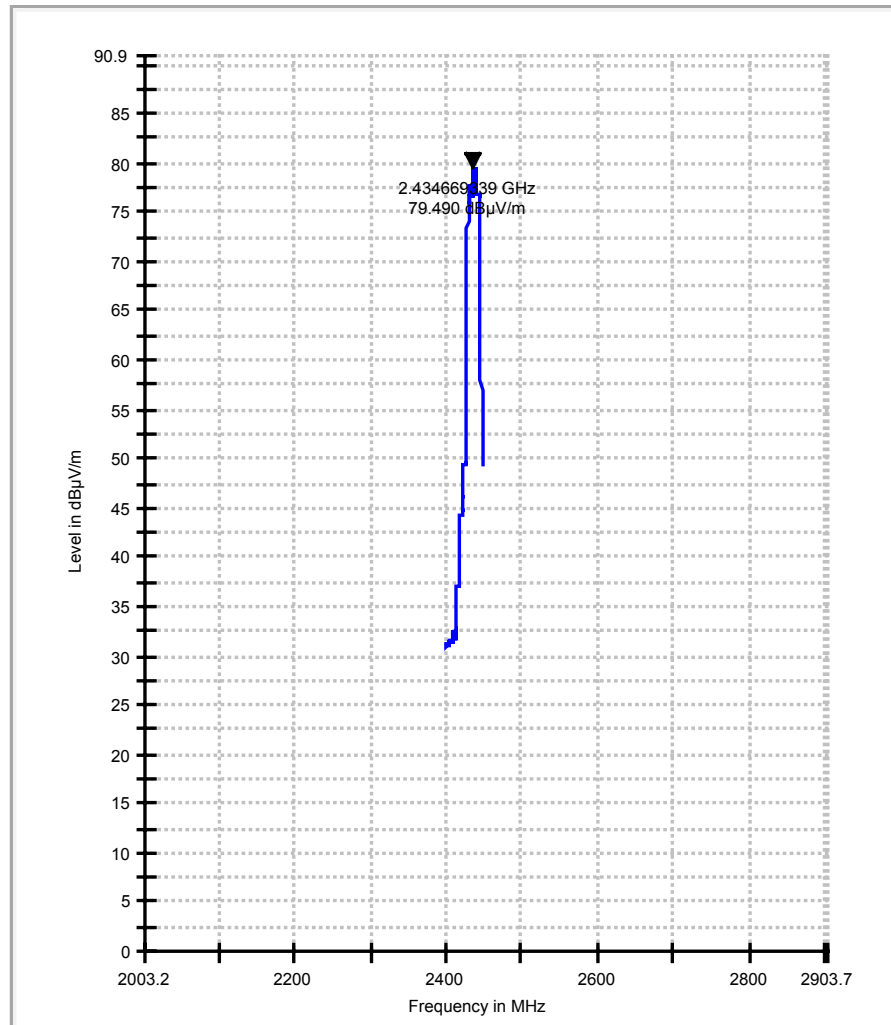

Harmonics & Spurious emissions: 1-18GHz

EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 11(6Mbps) External Dual-Band Vertically-Polarized Omni-Directional Antenna Gain: 4 dBi at 2.4-2.5 GHz	FREQUENCY RANGE	1000–18000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (P) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 40%RH	TESTED BY: Sandra Sohn	


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
F	2464 (P)	94.4			1	7	96.6	-2.2
F	2464 (AV)	69.1			1	7	71.3	-2.2
1 _R	1034 (P)	50.1 (P)	74.0 (P)	-23.9	1	9	53.1	-3.0
2 _R	4917.8 (P)	52.9 (P)	74.0 (P)	-21.1	1	11	49.5	3.4
3*	5599 (P)	48.5 (P)	74.4 (P)	-25.4	1	8	43.0	5.9

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier (dB) + *Filter (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247 and per 15.205.
6. * Filter is used.
7. F is fundamental.
8. _R is restricted band.


Vertical Peak before correction (without filter)
Ch11 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 1 MHz

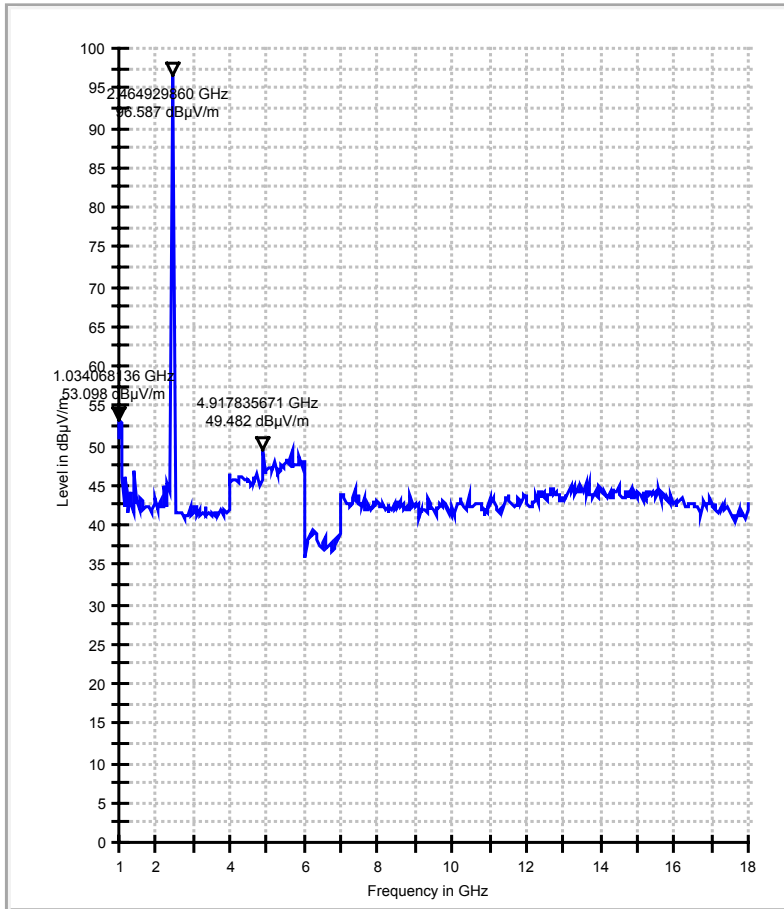


Vertical Peak before correction (with filter)
Ch11 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 1 MHz

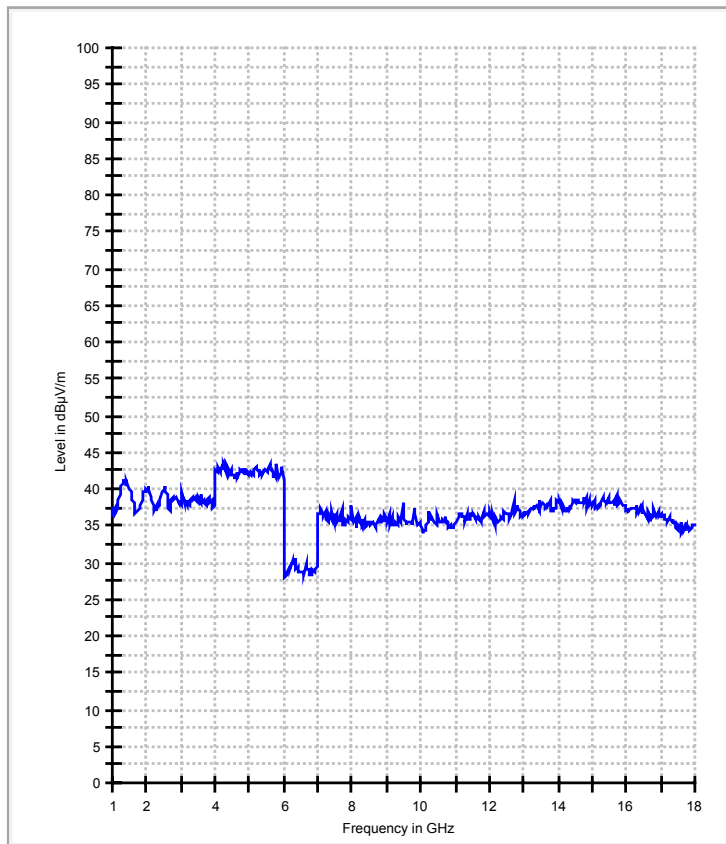

Vertical Average before correction (without filter)
Ch11 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

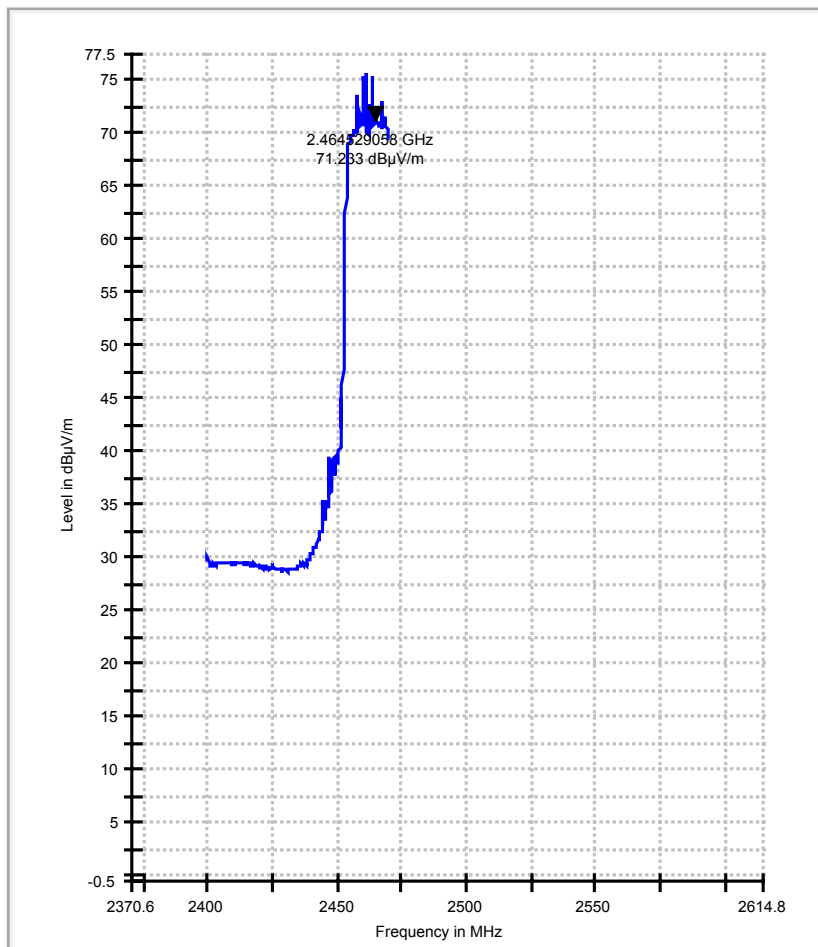

Harmonics & Spurious emissions:1-18GHz

EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 6 (turbo mode) External Dual-Band Vertically-Polarized Omni-Directional Antenna Gain: 4 dBi at 2.4-2.5 GHz	FREQUENCY RANGE	1000-18000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (P) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 40%RH	TESTED BY: Sandra Sohn	


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
F	2437.1 (P)	93.7 (P)			1	8	95.9	-2.2
F	2437.1 (AV)	72.7 (AV)			1	8	74.9	-2.2
1 _R	1034 (P)	47.7 (P)	74.0 (P)	-26.3	1	11	50.7	-3.0
2	5717.8 (P)	52.6 (P)	73.7 (P)	-21.1	1	11	49.2	3.4

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier (dB) + *Filter (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247 and per 15.205.
6. *Filter is used.
7. F is fundamental.
8. _R is restricted band.


Vertical MaxPeak before correction (without filter)
Ch6 (Turbo mode)

Resolution Bandwidth: 1MHz
Video Bandwidth: 1 MHz

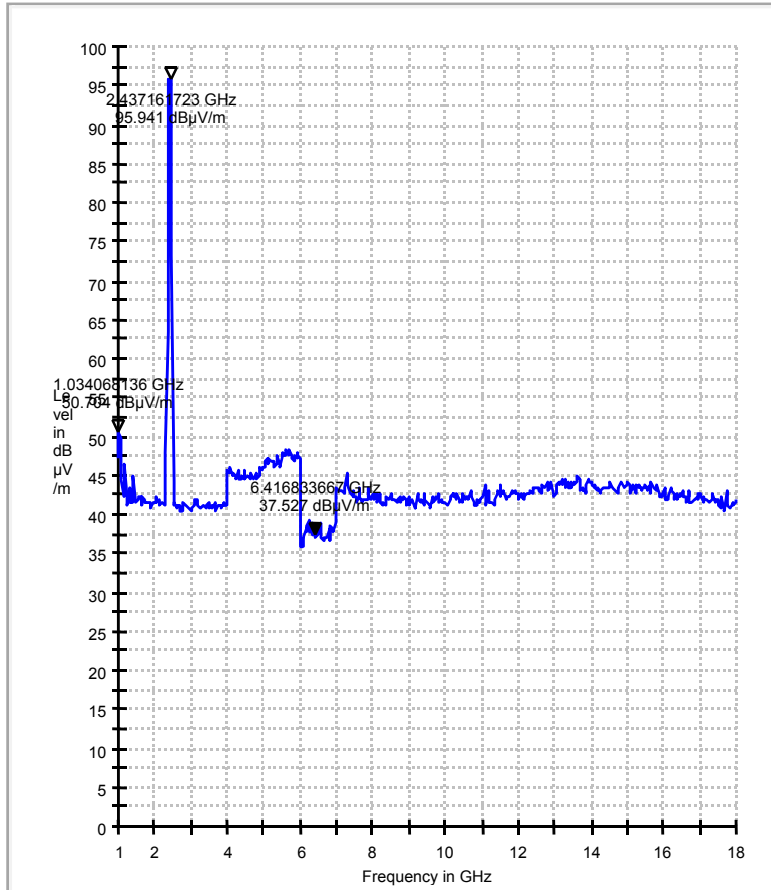

Vertical Average before correction (without filter)
Ch6 (Turbo mode)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

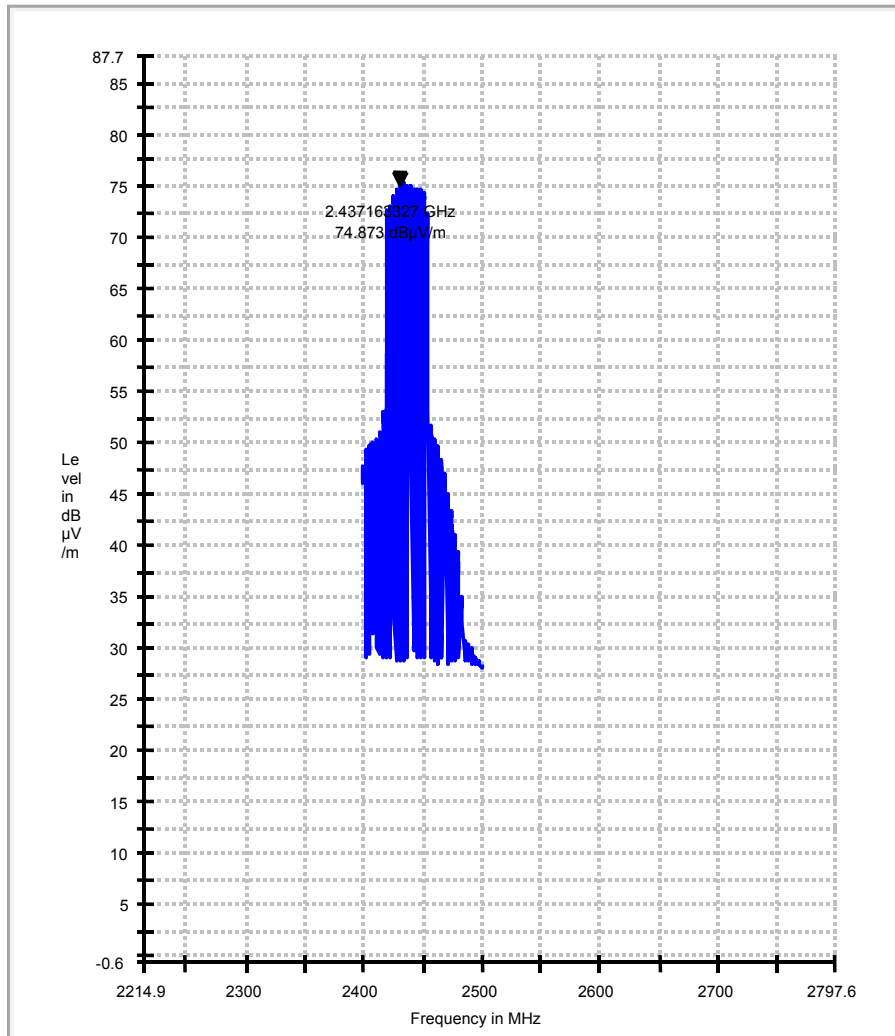

4.2.9 TEST RESULTS (B) : Harmonics & Spurious emissions

EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 1 (6Mbps) External Dual-Band Vertically-Polarized Omni-Directional Antenna Gain: 4 dBi at 2.4-2.5 GHz	FREQUENCY RANGE	18000-40000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (P) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 40%RH	TESTED BY: Sandra Sohn	


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
F	2404 (P)	93.4 (P)			1	7	95.640	-2.2
F	2404 (AV)	67.2 1 (AV)			1	7	69.4	-2.2
1*	32505 (P)	66.6 (P)	73.4 (P)	-6.8	1	12	46.4	20.2
1^	32484 (AV)	43.4 (AV)	47.2 (AV)	-3.8	1	12	33.2	10.2
2*	34709 (P)	67.4 (P)	73.4 (P)	-6.0	1	10	47.2	20.2
2^	34744 (AV)	43.8 (AV)	47.2 (AV)	-3.4	1	10	33.6	10.2

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier (dB) + *Filter (dB) - ^Distance factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.
6. *Filter is used.
- 7 ^ is measured at 1m.
8. F is fundamental.


Vertical MaxPeak before correction (with filter)
Ch1 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 1MHz

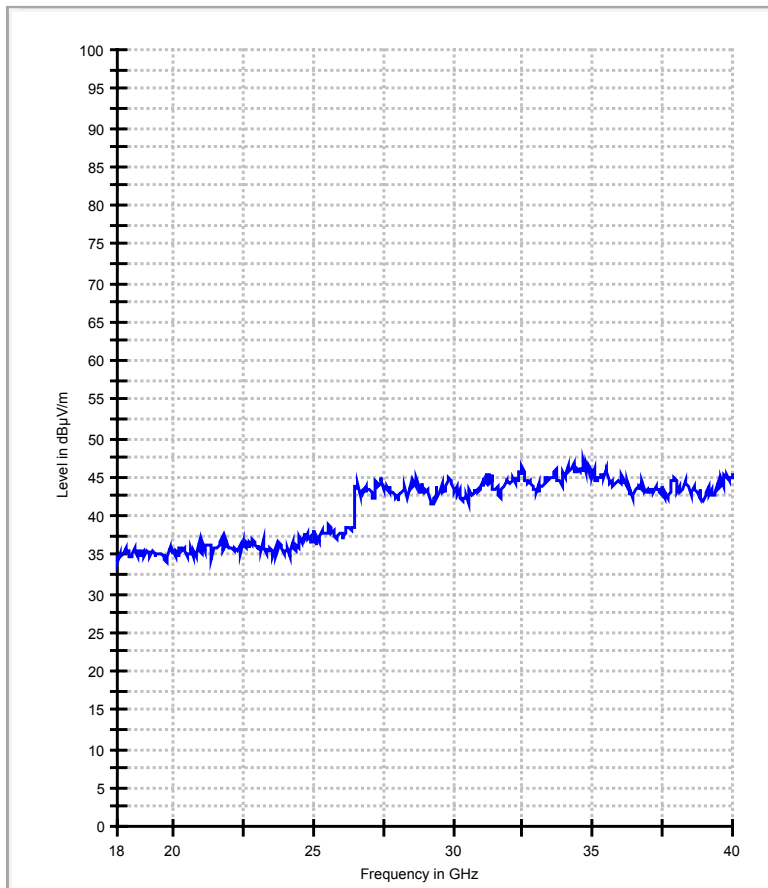


Vertical Average before correction (with filter and at 1m distance)
Ch1 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

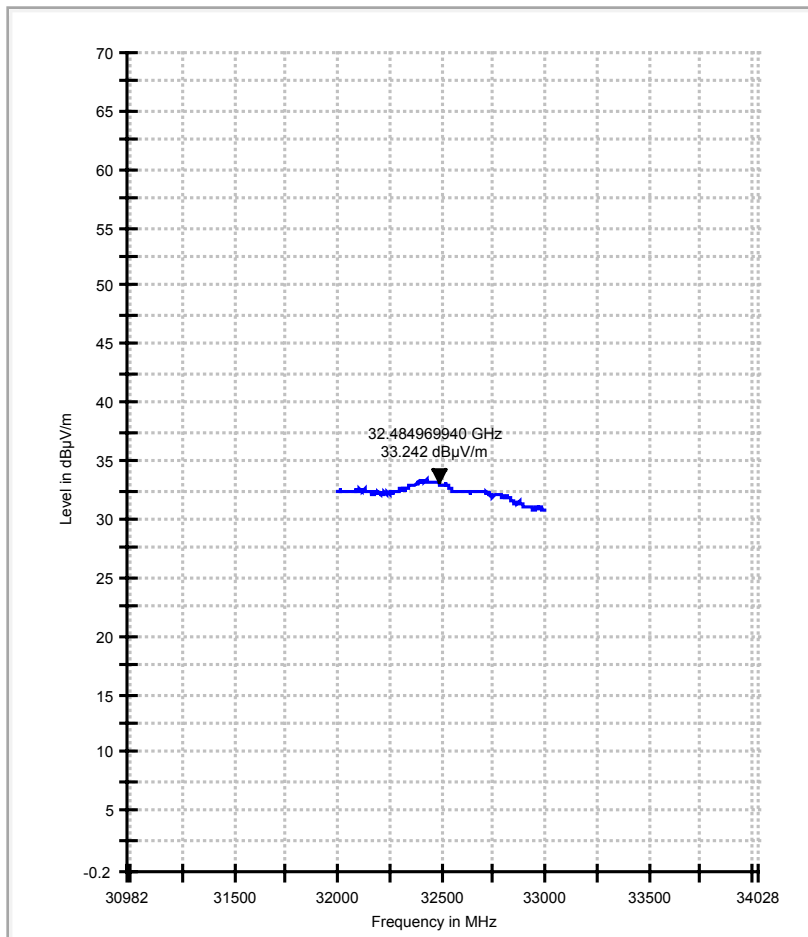

Vertical Average before correction (with filter and at 1m distance)
Ch1 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

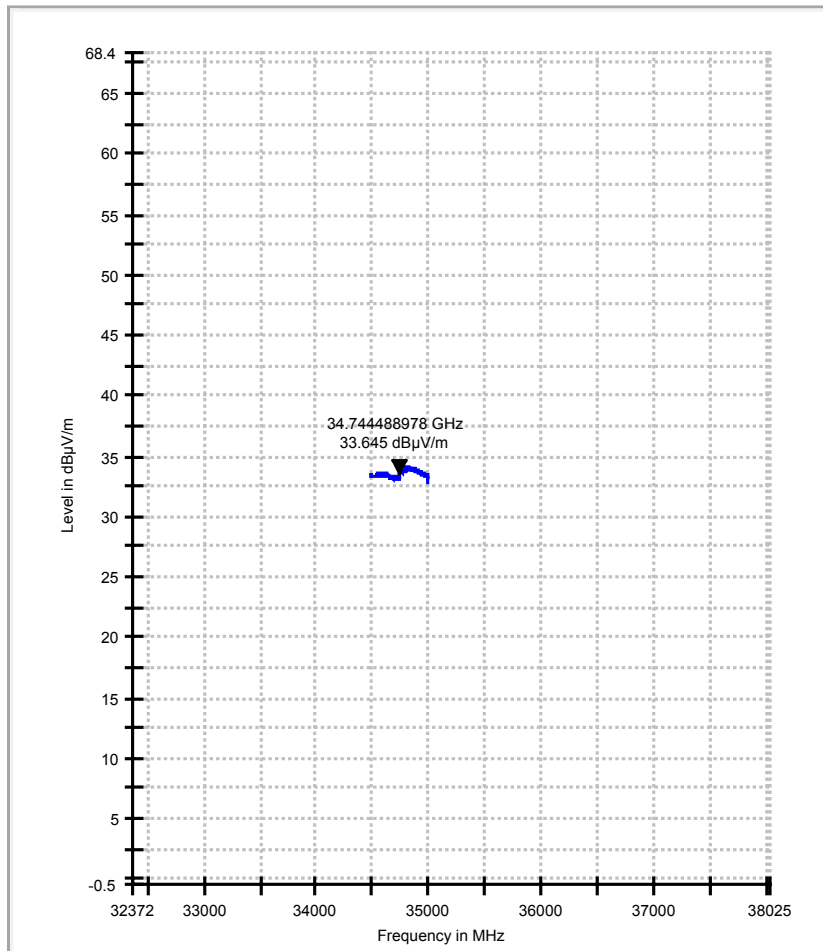

Harmonics & Spurious emissions:18-40GHz

EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 6(6Mbps) External Dual-Band Vertically-Polarized Omni-Directional Antenna Gain: 4 dBi at 2.4-2.5 GHz	FREQUENCY RANGE	18000-40000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (P) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 40%RH	TESTED BY: Sandra Sohn	


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
F	2430 (P)	95.2 (P)			1	8	97.4	-2.2
F	2434 (AV)	77.3 (AV)			1	8	79.5	-2.2
1*	32460 (P)	66.1 (P)	75.2 (P)	-9.1	1	11	45.9	20.2
1^	32456 (AV)	43.38 (AV)	57.3 (AV)	-14.0	1	11	33.1	10.2
2*	34841 (P)	67.1 (P)	75.2 (P)	-8.1	1	12	46.9	20.2
2^	34833 (AV)	44.1 (AV)	57.3 (AV)	-13.2	1	12	33.9	10.2

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier (dB) + *Filter (dB) - ^Distance factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.
6. *Filter is used.
7. ^ is measured at 1m.
- 8 F is fundamental.


Vertical MaxPeak before correction (with filter)
Ch6 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 1 MHz

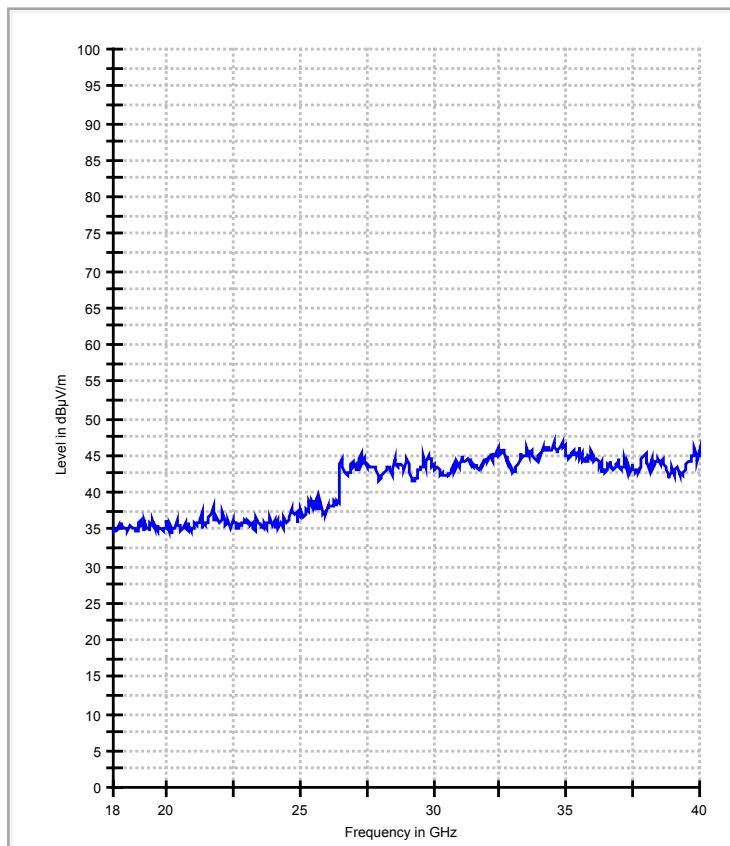


Vertical Average before correction (with filter and at 1m distance)
Ch6 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

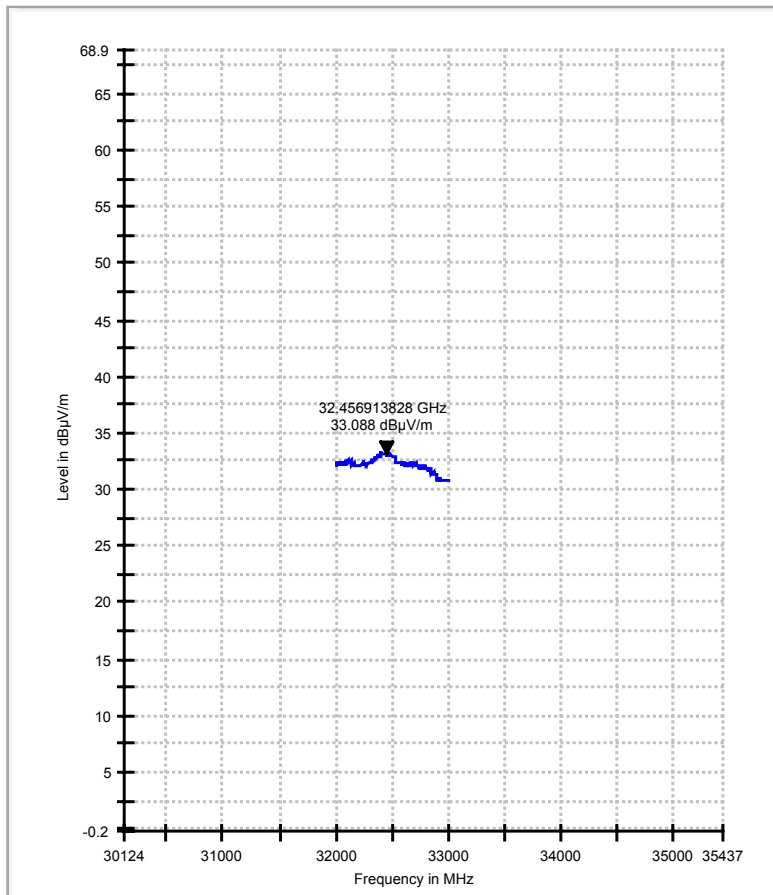

Vertical Average before correction (with filter and at 1m distance)
Ch6 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

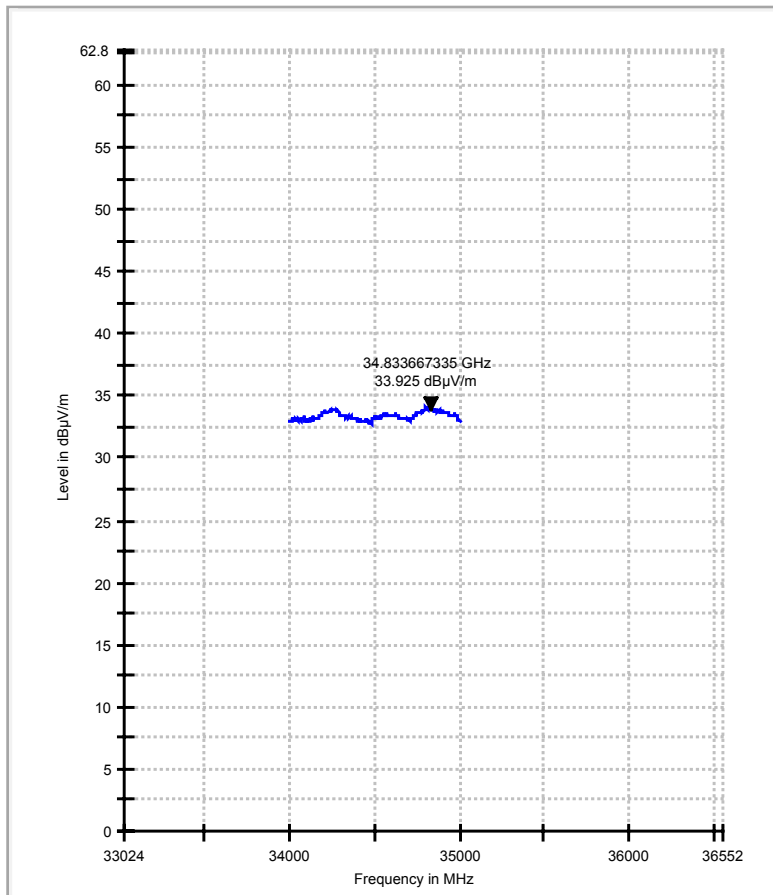

Harmonics & Spurious emissions:18-40GHz

EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 11(6Mbps) External Dual-Band Vertically- Polarized Omni-Directional Antenna Gain: 4 dBi at 2.4-2.5 GHz	FREQUENCY RANGE	18000-40000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (P) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 40%RH	TESTED BY: Sandra Sohn	


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
F	2464 (P)	94.4 (P)			1	7	96.6	-2.2
F	2464 (AV)	69.1 (AV)			1	7	71.3	-2.2
1*	32372 (P)	66.4 (P)	74.4 (P)	-8.0	1	10	46.2	20.2
1^	32376 (AV)	43.1 (AV)	49.1 (AV)	-5.9	1	10	32.9	10.2
2*	34709 (P)	67.0 (P)	74.4 (P)	-7.4	1	13	46.8	20.2
2^	34731 (AV)	43.5 (AV)	49.1 (AV)	-5.6	1	13	33.3	10.2

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier (dB) + *Filter (dB) -^Distance factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. *Filter is used.
7. ^ is measured at 1m.
8. F is fundamental.


Vertical MaxPeak before correction (with filter)
Ch11 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 1 MHz

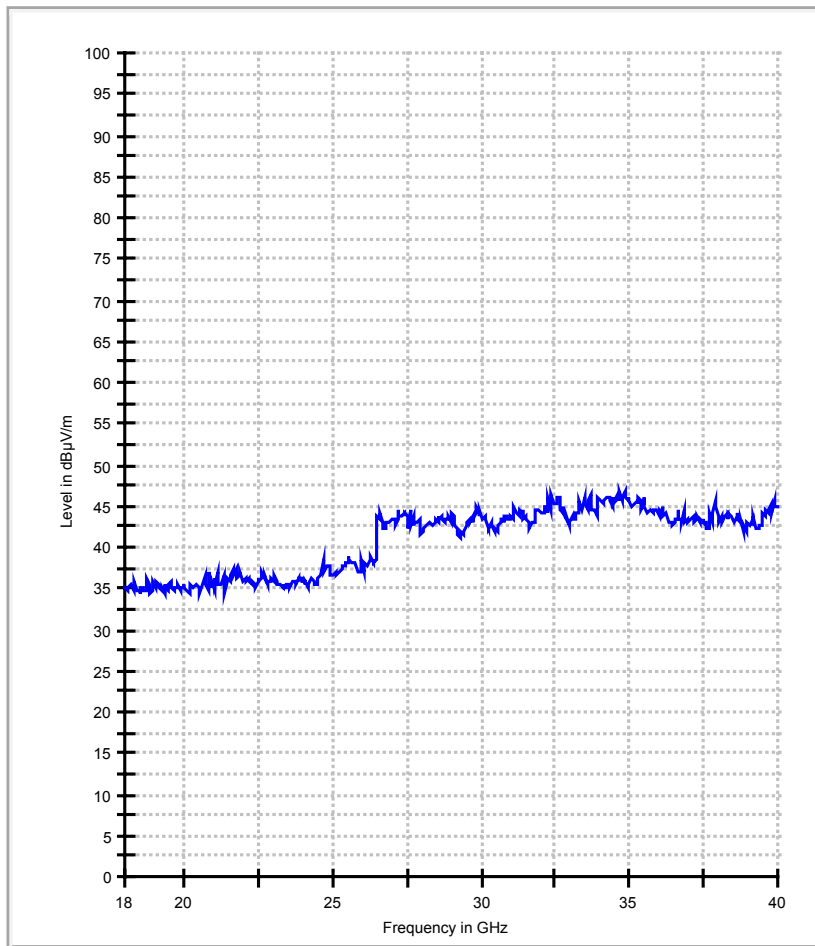


Vertical Average before correction (with filter and at 1m distance)
Ch11 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

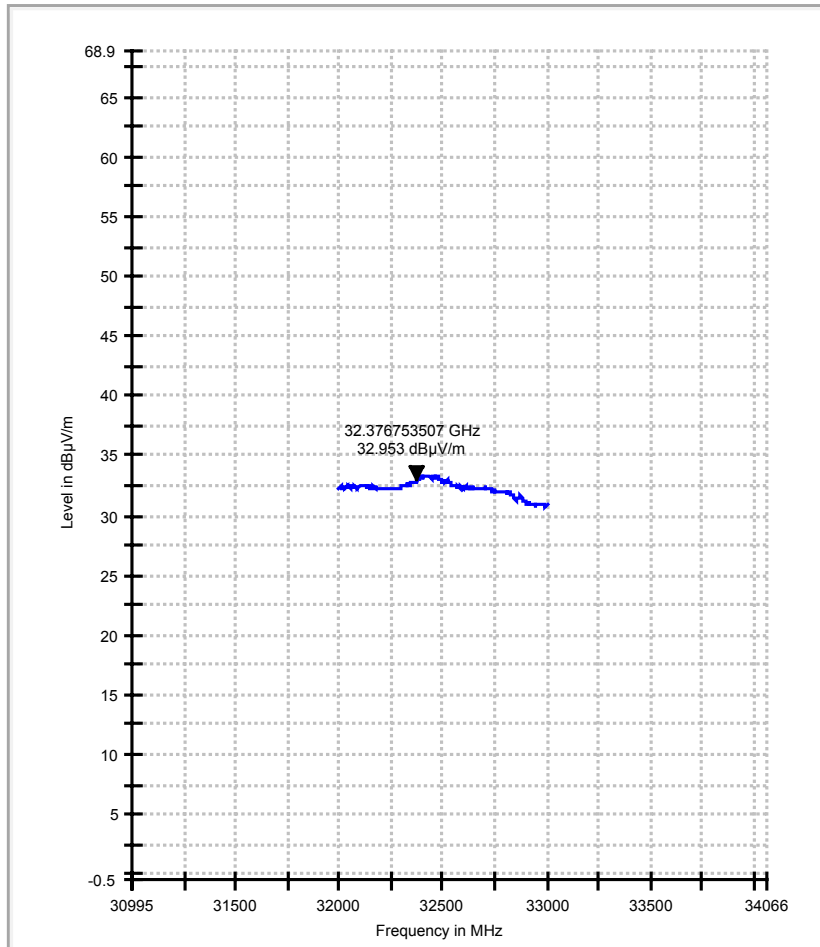

Vertical Average before correction (with filter and at 1m distance)
Ch11 (Data rate: 6Mbps)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

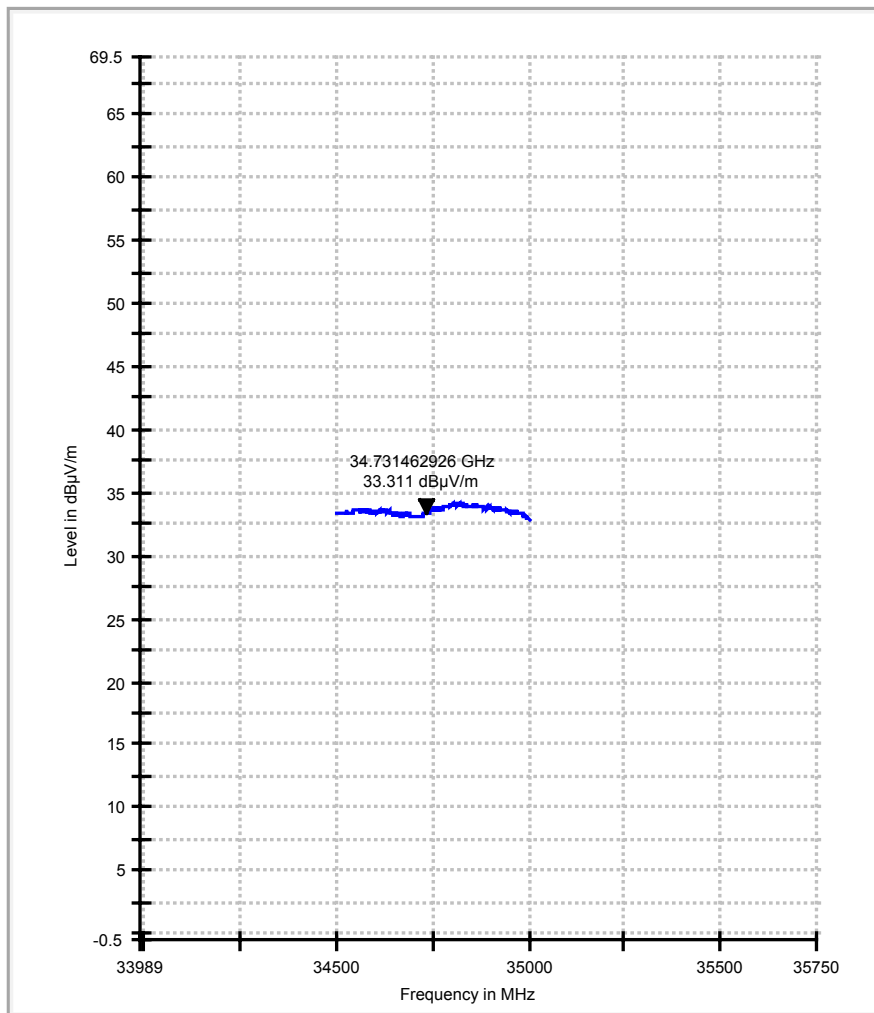

Harmonics & Spurious emissions:18-40GHz

EUT	IEEE 802.11 A/B/G WIRELESS ACCESS POINT	MODEL	ACCESS / ONE NETWORK: WM11Ae, WM11Ge
MODE	Channel 6, Turbo mode External Dual-Band Vertically-Polarized Omni-Directional Antenna Gain: 4 dBi at 2.4-2.5 GHz	FREQUENCY RANGE	18000-40000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak (P) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 40%RH	TESTED BY: Sandra Sohn	


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
F	2430.8 (P)	93.7 (P)			1	8	95.9	-2.2
F	2432 (AV)	72.7 (AV)			1	8	74.9	-2.2
1*	32416 (P)	65.9 (P)	73.71 (P)	-7.8 (P)	1	10	45.7	20.2
1^	32376 (AV)	43.1 (AV)	52.7 (AV)	-9.5 (AV)	1	10	32.9	10.2
2*	34224 (P)	66.9 (P)	73.7 (P)	-6.9 (P)	1	13	46.6	20.2
2^	34731 (AV)	43.5 (AV)	52.7 (AV)	-9.2 (AV)	1	13	33.3	10.2

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier (dB) + *Filter (dB) - ^Distance factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. *Filter is used.
7. ^ is measured at 1m.
8. F is fundamental.


Vertical MaxPeak before correction (with filter)
Ch6 (Turbo mode)

Resolution Bandwidth: 1MHz
Video Bandwidth: 1 MHz

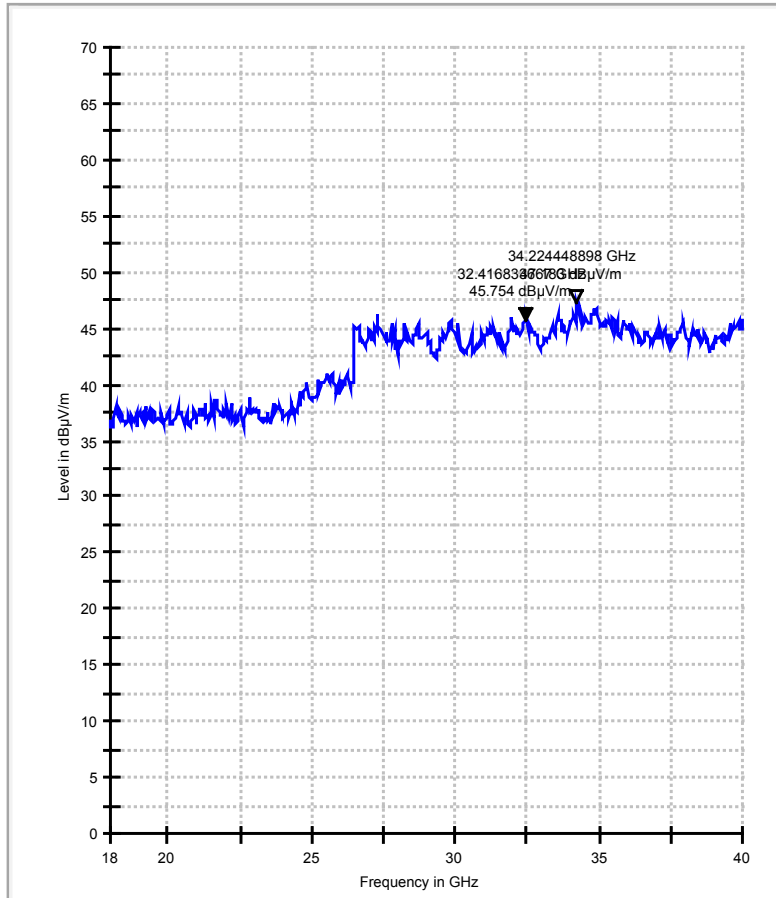

Vertical Average before correction (with filter and at 1m distance)
Ch6 (Turbo mode)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

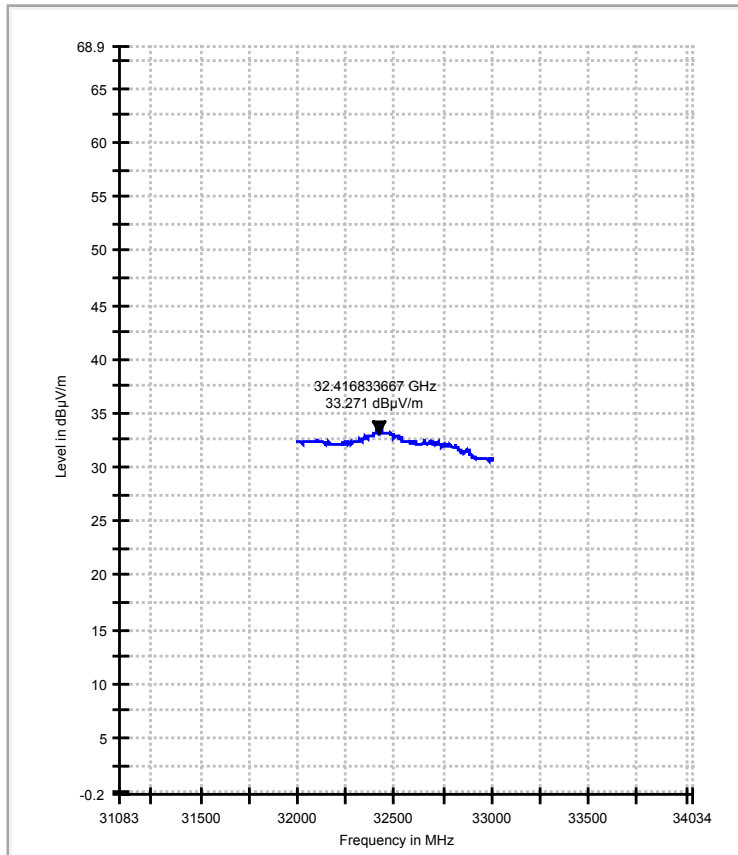

Vertical Average before correction (with filter and at 1m distance)
Ch6 (Turbo mode)

Resolution Bandwidth: 1MHz
Video Bandwidth: 300 Hz

