


|  |   |  |   |                                       |
|--|---|--|---|---------------------------------------|
| <b>Prüfbericht-Nr.:</b><br>Test report no.:  | <b>CN24ZEU2 003</b>   | <b>Auftrags-Nr.:</b><br>Order no.:       | 168499083   | <b>Page 1 of 15</b><br>Seite 1 von 15 |
| <b>Kunden-Referenz-Nr.:</b><br>Client reference no.:   | N/A   | <b>Auftragsdatum:</b><br>Order date:     | 2024-07-30  |                                       |
| <b>Auftraggeber:</b><br>Client:  | <b>Sanford LP dba Dymo</b><br>3 Glenlake Parkway, NE Atlanta, GA 30328 United States  |  |   |                                       |
| <b>Prüfgegenstand:</b><br>Test item:   | Label Maker   |  |   |                                       |
| <b>Bezeichnung / Typ-Nr.:</b><br>Identification / Type no.:  | LabelManager Executive 640CB<br>(Trademark: DYMO)   |  |   |                                       |
| <b>Auftrags-Inhalt:</b><br>Order content:  | Type test   |  |   |                                       |
| <b>Prüfgrundlage:</b><br>Test specification:   | CFR47 FCC Part 15: Subpart B Section 15.107<br>CFR47 FCC Part 15: Subpart B Section 15.109<br>ICES-003 Issue 7 October 2020 |  |   |                                       |
| <b>Wareneingangsdatum:</b><br>Date of sample receipt:  | 2024-08-12  | Refer to photos documents                |   |                                       |
| <b>Prüfmuster-Nr.:</b><br>Test sample no.:   | A003791854  |  |   |                                       |
| <b>Prüfzeitraum:</b><br>Testing period:  | 2024-08-23 – 2024-08-26   |  |   |                                       |
| <b>Ort der Prüfung:</b><br>Place of testing:   | Shenzhen Huaxia Testing<br>Technology Co., Ltd.   |  |   |                                       |
| <b>Prüflaboratorium:</b><br>Testing laboratory:  | TÜV Rheinland (Shenzhen)<br>Co., Ltd.   |  |   |                                       |
| <b>Prüfergebnis*:</b><br>Test result*:   | Pass  |  |   |                                       |
| <b>geprüft von:</b><br>tested by:  |    | <b>genehmigt von:</b><br>authorized by:  |  |                                       |
| <b>Datum:</b><br>Date:   | 2024-10-10<br><small>Signed by: Harry W. C. Wu</small>  | <b>Ausstellungsdatum:</b><br>Issue date: | 2024-10-10<br><small>Signed by: Alex Lan</small>                                      |                                       |
| <b>Stellung / Position:</b>  | Sachverständige(r)/Expert   | <b>Stellung / Position:</b>              | Sachverständige(r)/Expert   |                                       |
| <b>Sonstiges /</b><br>Other:   | FCC ID: RGDLM640  |  |   |                                       |
| <b>Zustand des Prüfgegenstandes bei Anlieferung:</b><br>Condition of the test item at delivery:  | Prüfmuster vollständig und unbeschädigt<br>Test item complete and undamaged   |  |   |                                       |
| <small>* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet</small>   |   |  |   |                                       |
| <small>* Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested</small>   |   |  |   |                                       |
| <b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b><br><i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i> |   |  |   |                                       |
| TUV Rheinland (Shenzhen) Co., Ltd., 1601-1604, 17-18F, Tower A Building 2, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, P. R. China<br>Mail: service-gc@tuv.com · Web: www.tuv.com  |   |  |   |                                       |

Prüfbericht-Nr.: CN24ZEU2 003  
Test report no.:

Page 2 of 15  
Seite 2 von 15

**Remarks**  
*Anmerkungen*

- |   |  |
|---|--|
| 1 | <p>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</p> <p>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</p> <p><i>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</i></p> <p><i>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</i></p>  |
| 2 | <p>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</p> <p><i>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</i></p>  |
| 3 | <p>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</p> <p><i>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</i></p>  |
| 4 | <p>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</p> <p><i>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</i></p> |

**Prüfbericht-Nr.:** CN24ZEU2 003  
*Test report no.:*

Seite 3 von 15  
Page 3 of 15

## ***Test Summary***

**5.1 Conducted emissions**

*RESULT: Pass*

**5.2 Radiated emissions**

*RESULT: Pass*

## Contents

|     |   |    |
|-----|---|----|
| 1   | GENERAL REMARKS .....                             | 5  |
| 1.1 | COMPLEMENTARY MATERIALS .....                     | 5  |
| 2   | TEST SITES.....                                   | 5  |
| 2.1 | TEST FACILITIES.....                              | 5  |
| 2.2 | LIST OF TEST AND MEASUREMENT INSTRUMENTS .....    | 6  |
| 2.3 | TRACEABILITY.....                                 | 7  |
| 2.4 | CALIBRATION .....                                 | 7  |
| 2.5 | MEASUREMENT UNCERTAINTY .....                     | 7  |
| 2.6 | LOCATION OF ORIGINAL DATA .....                   | 7  |
| 2.7 | STATUS OF FACILITY USED FOR TESTING.....          | 7  |
| 3   | GENERAL PRODUCT INFORMATION.....                  | 8  |
| 3.1 | PRODUCT FUNCTION AND INTENDED USE.....            | 8  |
| 3.2 | RATINGS AND SYSTEM DETAILS .....                  | 8  |
| 3.3 | INDEPENDENT OPERATION MODES .....                 | 8  |
| 3.4 | NOISE GENERATING AND NOISE SUPPRESSING PARTS..... | 8  |
| 3.5 | SUBMITTED DOCUMENTS.....                          | 8  |
| 4   | TEST SET-UP AND OPERATION MODES .....             | 9  |
| 4.1 | PRINCIPLE OF CONFIGURATION SELECTION .....        | 9  |
| 4.2 | TEST OPERATION AND TEST SOFTWARE.....             | 9  |
| 4.3 | SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT ..... | 9  |
| 4.4 | COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....    | 9  |
| 4.5 | TEST SETUP DIAGRAM .....                          | 10 |
| 5   | TEST RESULTS.....                                 | 11 |
| 5.1 | CONDUCTED EMISSIONS .....                         | 11 |
| 5.2 | RADIATED EMISSION .....                           | 12 |
| 6   | PHOTOGRAPHS OF THE TEST SET-UP.....               | 13 |
| 7   | LIST OF TABLES .....                              | 15 |
| 8   | LIST OF PHOTOGRAPHS .....                         | 15 |

**Prüfbericht-Nr.:** CN24ZEU2 003  
*Test report no.:*

Seite 5 von 15  
Page 5 of 15

## **1 General Remarks**

### **1.1 Complementary Materials**

All attachments are integral parts of this test report. This applies especially to the following appendix:  
Appendix A: Test Results.

## **2 Test Sites**

### **2.1 Test Facilities**

Shenzhen Huaxia Testing Technology Co., Ltd.  
1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District,  
Shenzhen, China

CNAS No.: L5785

The tests at the test sites have been conducted under the supervision of a TÜV engineer.

**Prüfbericht-Nr.:** CN24ZEU2 003  
*Test report no.:*

 Seite 6 von 15  
 Page 6 of 15

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

| <b>Conducted Emissions (150kHz-30MHz)</b> |                     |                 |                   |                   |
|---|---------------------|-----------------|-------------------|-------------------|
| <b>Equipment</b>                          | <b>Manufacturer</b> | <b>Model No</b> | <b>Serial No.</b> | <b>Cal. Until</b> |
| EMI Test Receiver                         | R&S                 | ESPI3           | CQA-013           | 2024/9/7          |
| LISN                                      | R&S                 | ENV216          | CQA-003           | 2024/9/7          |
| Coaxial cable<br>(9KHz~300MHz)            | CQA                 | N/A             | C021              | 2024/9/7          |

| <b>Radiated Emission</b>      |                     |                            |                   |                   |
|-------------------------------|---------------------|----------------------------|-------------------|-------------------|
| <b>Equipment</b>              | <b>Manufacturer</b> | <b>Model No.</b>           | <b>Serial No.</b> | <b>Cal. Until</b> |
| Loop antenna                  | SCHWARZBECK         | FMZB 1516                  | CQA-060           | 2024/9/15         |
| Horn Antenna                  | R&S                 | BBHA 9170                  | CQA-088           | 2024/9/15         |
| Horn Antenna                  | R&S                 | HF906                      | CQA-012           | 2024/9/15         |
| Bilog Antenna                 | R&S                 | HL562                      | CQA-011           | 2024/9/15         |
| EMI Test Receiver             | R&S                 | ESR7                       | CQA-005           | 2024/9/7          |
| Spectrum analyzer             | R&S                 | FSU26                      | CQA-038           | 2024/9/7          |
| Preamplifier                  | MITEQ               | AMF-6D-<br>02001800-29-20P | CQA-036           | 2024/9/7          |
| Coaxial cable<br>(1GHz~40GHz) | CQA                 | N/A                        | C007              | 2024/9/7          |
| Coaxial cable<br>(9KHz~1GHz)  | CQA                 | N/A                        | C013              | 2024/9/7          |

Prüfbericht-Nr.: CN24ZEU2 003  
Test report no.:Seite 7 von 15  
Page 7 of 15

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

| Parameter  | Uncertainty           |
|--|-----------------------|
| Radiated Emission (10m SAC), 30MHz to 1000MHz          | ± 4.66 dB             |
| Radiated Emission (3m SAC), above 1000MHz              | ± 4.60 dB             |
| Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz) | ± 3.70 dB / ± 3.30 dB |

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The Shenzhen Huaxia Testing Technology Co., Ltd. Test facility located at 1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements

### 3 General Product Information

#### 3.1 Product Function and Intended Use

The EUT is label printer, which supports Bluetooth technology.  
For details refer to the User Manual and Circuit Diagram.

#### 3.2 Ratings and System Details

Table 2: Technical Specification of EUT

| General Information of EUT | Value   |
|----------------------------|---|
| Kind of Equipment          | Label Maker   |
| Type Designation           | LabelManager Executive 640CB  |
| Trademark                  | DYMO  |
| Operating Voltage          | DC 5V, 2A via External AC/DC Adapter<br>Or DC 7.2V, 2000mAh via built-in Li-ion battery |
| Extreme Temperature Range  | 0°C to +45°C for charging<br>0°C to +60°C for discharging                               |

#### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, printing via keyboard input
- B. On, printing via PC, printer connected to PC via Type-C port
- C. On, printing via mobile phone, printer connected to mobile phone via Bluetooth
- D. On, Charging
- E. Off

#### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

#### 3.5 Submitted Documents

- User Manual
- Technical Description
- FCC/IC Label and Location Info

## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2014.

### 4.3 Special Accessories and Auxiliary Equipment

**Table 3: List of Accessories and Auxiliary Equipment**

| Description     | Manufacturer | Model        | S/N or Rating  |
|-----------------|--------------|--------------|--|
| Adapter         | Apple        | 120200C01    | Input:100-200V~50/60Hz, 0.8A,Output: 12V/2A                    |
| Adapter         | HUAWEI       | HW-100400C01 | Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX |
| Mobile phone    | Mi           | M2002J9E     | Xiaomi phone - Mi 10 Lite Zoom                                 |
| Mobile phone    | HUAWEI       | HMA-AL00     | HUAWEI (HUAWEI) PHONE-MATE 20                                  |
| Portable Laptop | Lenovo       | 20LT-A6Q2CD  | PF-12L05Q19110   |

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

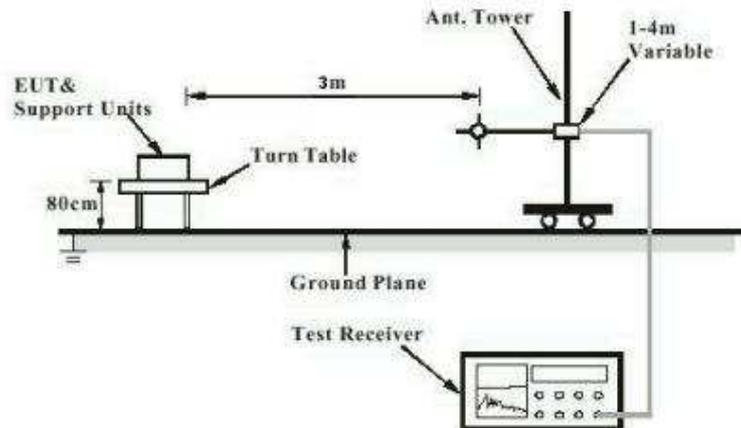


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


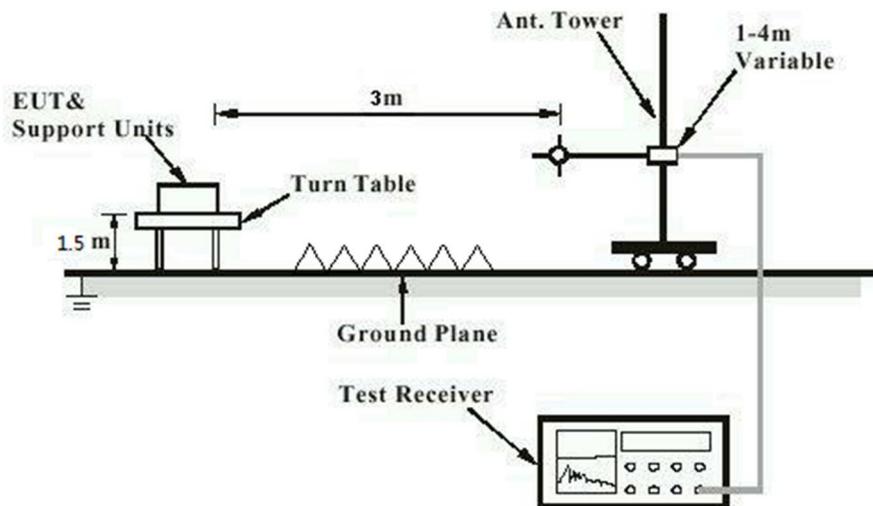


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement

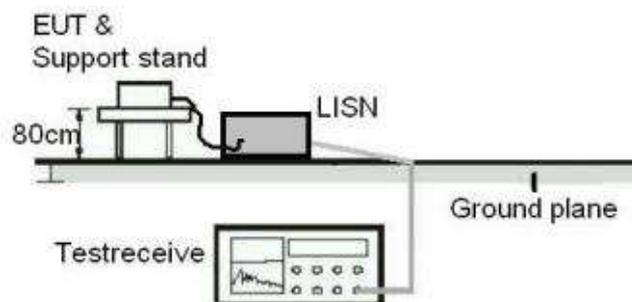

Prüfbericht-Nr.: CN24ZEU2 003  
Test report no.:Seite 11 von 15  
Page 11 of 15

## 5 Test Results

### 5.1 Conducted emissions

RESULT:

Pass

**Test Specification**

|                   |   |
|-------------------|---|
| Test standard     | : FCC Part 15.107(a) & ICES-003         |
| Basic standard    | : ANSI C63.4: 2014                      |
| Frequency range   | : 150kHz - 30MHz                        |
| Classification    | : Class B                               |
| Limit             | : FCC Part 15.107(a) & ICES-003 Table 1 |
| Kind of test site | : Shielded Room                         |

**Test Setup**

|                      |                            |
|----------------------|----------------------------|
| Date of testing      | : 2024-08-23 to 2024-08-26 |
| Test voltage         | : AC 120V, 60Hz            |
| Operation mode       | : D                        |
| Test ports           | : AC mains terminals       |
| Earthing             | : Not connected            |
| Test configuration   | : Table-top                |
| Ambient temperature  | : 25.5 °C                  |
| Relative humidity    | : 55.0 %                   |
| Atmospheric pressure | : 101 kPa                  |

For the measurement records, refer to the appendix A.

Prüfbericht-Nr.: CN24ZEU2 003  
Test report no.:Seite 12 von 15  
Page 12 of 15

## 5.2 Radiated Emission

**RESULT:****Pass****Test Specification**

|                   |   |   |
|-------------------|---|---|
| Test standard     | : | FCC Part 15.109(a) & ICES-003                       |
| Basic standard    | : | ANSI C63.4: 2014                                    |
| Frequency range   | : | 30 - ( five harmonics) *                            |
| Classification    | : | Class B   |
| Limit             | : | FCC Part 15.109(a)<br>ICES-003 Table 2 & Table 4    |
| Kind of test site | : | 3m Semi-anechoic Chamber & 3m Full-anechoic Chamber |

**Test Setup**

|                      |   |                          |
|----------------------|---|--------------------------|
| Date of testing      | : | 2024-08-23 to 2024-08-26 |
| Input voltage        | : | AC 120V, 60Hz or battery |
| Operation mode       | : | A, B, C, D               |
| Earthing             | : | Not connected            |
| Ambient temperature  | : | Refer to test data       |
| Relative humidity    | : | Refer to test data       |
| Atmospheric pressure | : | 101 kPa                  |

For the measurement records, refer to the appendix A.

**Remark:**

- 1) Note: Testing was carried out within frequency range 30MHz to the 5<sup>th</sup> harmonics, the maximum operating frequency of EUT is 2480MHz and we performed test from 30MHz to 12.5GHz in this test report.
- 2) This testing was carried out on all operation modes, but only the worst case was presented in this report.

## 7 List of Tables

|   |   |
|---|---|
| Table 1: List of Test and Measurement Equipment.....      | 6 |
| Table 2: Technical Specification of EUT .....             | 8 |
| Table 3: List of Accessories and Auxiliary Equipment..... | 9 |

## 8 List of Photographs

|  |    |
|--|----|
| Photograph 1: Set-up for Conducted Emission on AC Mains..... | 13 |
| Photograph 2: Set-up for Radiated Emission, below 1GHz.....  | 13 |
| Photograph 3: Set-up for Radiated Emission, above 1GHz ..... | 14 |


## Appendix A: Test Results of FCC 15B & ICES-003

|  |    |
|--|----|
| APPENDIX A: TEST RESULTS OF FCC 15B & ICES-003 .....             | 1  |
| APPENDIX A.1: TEST PLOTS OF CONDUCTED EMISSION ON AC MAINS ..... | 2  |
| APPENDIX A.2: TEST PLOTS OF RADIATED EMISSION, BELOW 1GHZ .....  | 4  |
| APPENDIX A.3: TEST PLOTS OF RADIATED EMISSION, ABOVE 1GHZ .....  | 12 |

### Appendix A.1: Test Plots of Conducted Emission on AC Mains


#### EUT Information

|                     |                              |
|---------------------|------------------------------|
| EUT Name:           | Label Maker                  |
| Model:              | LabelManager Executive 640CB |
| Test Mode:          | Charging                     |
| Test Voltage:       | AC 120V/60Hz                 |
| Standard:           | FCC 15B                      |
| Tem./Hum./Pressure: | 25.5°C/55.0%/101kPa          |

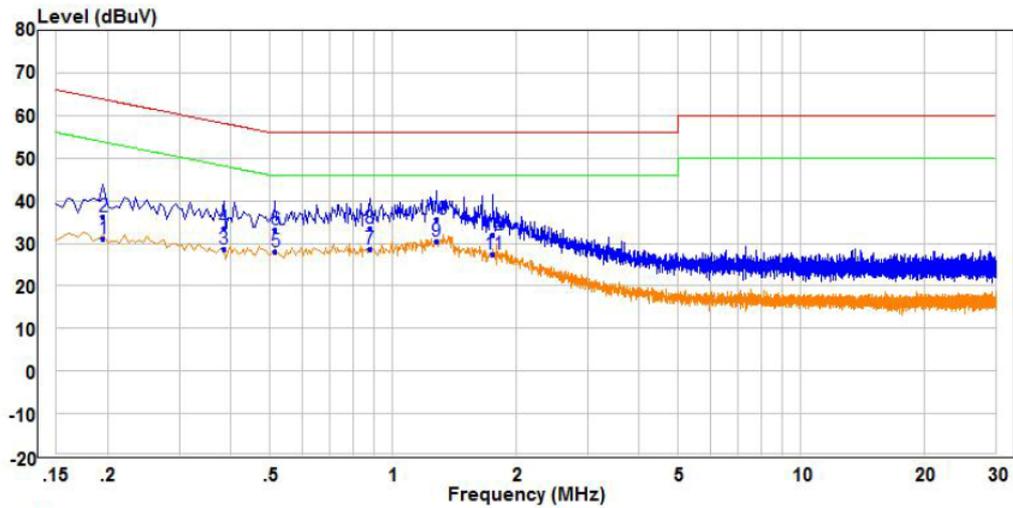

Trace: 1

|       | Freq  | Read Level | Factor | Level | Limit Line | Over Limit | Remark  | Pol/Phase |
|-------|-------|------------|--------|-------|------------|------------|---------|-----------|
|       | MHz   | dBuV       | dB     | dBuV  | dBuV       | dB         |         |           |
| 1     | 0.195 | 21.46      | 9.62   | 31.08 | 53.82      | -22.74     | Average | Line      |
| 2     | 0.195 | 26.51      | 9.62   | 36.13 | 63.82      | -27.69     | QP      | Line      |
| 3     | 0.385 | 19.15      | 9.59   | 28.74 | 48.17      | -19.43     | Average | Line      |
| 4     | 0.385 | 24.05      | 9.59   | 33.64 | 58.17      | -24.53     | QP      | Line      |
| 5     | 0.515 | 18.34      | 9.72   | 28.06 | 46.00      | -17.94     | Average | Line      |
| 6     | 0.515 | 23.58      | 9.72   | 33.30 | 56.00      | -22.70     | QP      | Line      |
| 7     | 0.880 | 18.86      | 9.78   | 28.64 | 46.00      | -17.36     | Average | Line      |
| 8     | 0.880 | 23.86      | 9.78   | 33.64 | 56.00      | -22.36     | QP      | Line      |
| 9 PP  | 1.280 | 19.98      | 10.39  | 30.37 | 46.00      | -15.63     | Average | Line      |
| 10 QP | 1.280 | 25.19      | 10.39  | 35.58 | 56.00      | -20.42     | QP      | Line      |
| 11    | 1.760 | 16.14      | 11.29  | 27.43 | 46.00      | -18.57     | Average | Line      |
| 12    | 1.760 | 20.80      | 11.29  | 32.09 | 56.00      | -23.91     | QP      | Line      |

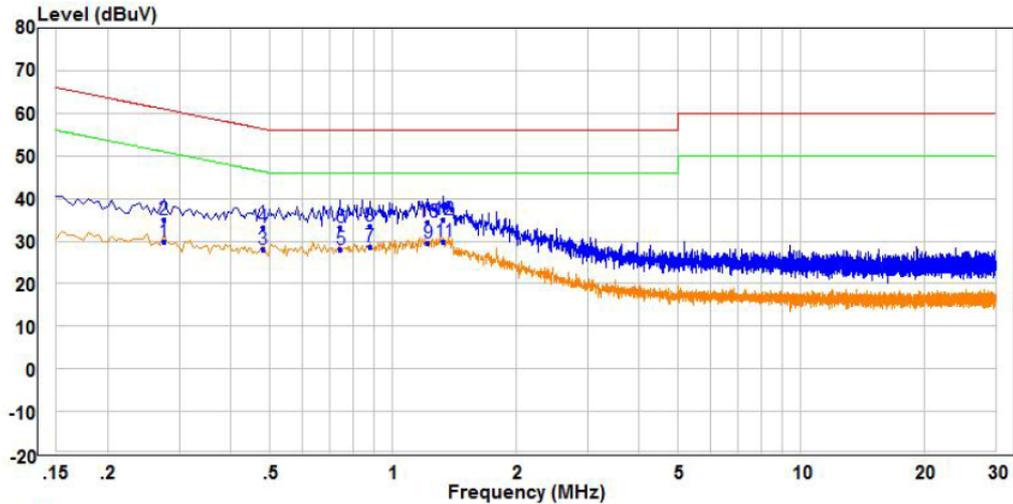

Trace: 1


|    | Freq     | Read Level | Factor | Level | Limit Line | Over Limit | Remark  | Pol/Phase |
|----|----------|------------|--------|-------|------------|------------|---------|-----------|
|    | MHz      | dBuV       | dB     | dBuV  | dBuV       | dB         |         |           |
| 1  | 0.275    | 20.36      | 9.51   | 29.87 | 50.97      | -21.10     | Average | Neutral   |
| 2  | 0.275    | 25.60      | 9.51   | 35.11 | 60.97      | -25.86     | QP      | Neutral   |
| 3  | 0.480    | 18.50      | 9.68   | 28.18 | 46.34      | -18.16     | Average | Neutral   |
| 4  | 0.480    | 23.40      | 9.68   | 33.08 | 56.34      | -23.26     | QP      | Neutral   |
| 5  | 0.745    | 18.29      | 9.87   | 28.16 | 46.00      | -17.84     | Average | Neutral   |
| 6  | 0.745    | 23.36      | 9.87   | 33.23 | 56.00      | -22.77     | QP      | Neutral   |
| 7  | 0.880    | 19.01      | 9.78   | 28.79 | 46.00      | -17.21     | Average | Neutral   |
| 8  | 0.880    | 23.69      | 9.78   | 33.47 | 56.00      | -22.53     | QP      | Neutral   |
| 9  | 1.220    | 19.73      | 9.71   | 29.44 | 46.00      | -16.56     | Average | Neutral   |
| 10 | 1.220    | 24.83      | 9.71   | 34.54 | 56.00      | -21.46     | QP      | Neutral   |
| 11 | PP 1.330 | 20.25      | 9.72   | 29.97 | 46.00      | -16.03     | Average | Neutral   |
| 12 | QP 1.330 | 25.20      | 9.72   | 34.92 | 56.00      | -21.08     | QP      | Neutral   |

## Appendix A.2: Test Plots of Radiated Emission, Below 1GHz

### EUT Information


|                     |                              |
|---------------------|------------------------------|
| EUT Name:           | Label Maker                  |
| Model:              | LabelManager Executive 640CB |
| Test Mode:          | Charging                     |
| Test Voltage:       | AC 120V/60Hz                 |
| Standard:           | FCC 15B                      |
| Tem./Hum./Pressure: | 25.5°C/53.0%/101kPa          |
| Remark:             | 3m SAC                       |

深圳市华夏准检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

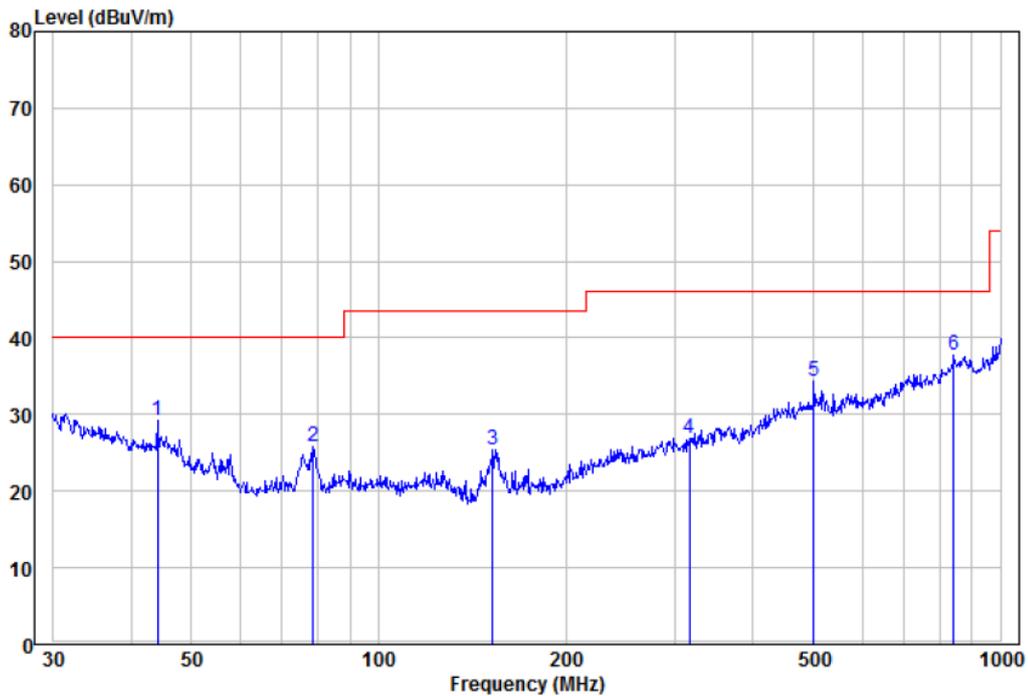

|      | Read Freq | Read Level | Factor | Limit Level | Over Limit | Remark      | Pol/Phase | APos | TPos |
|------|-----------|------------|--------|-------------|------------|-------------|-----------|------|------|
|      | MHz       | dBuV       | dB/m   | dBuV/m      | dB         |             |           | cm   | deg  |
| 1    | 44.12     | 17.65      | 11.54  | 29.19       | 40.00      | -10.81 Peak | VERTICAL  | ---  | 360  |
| 2    | 78.41     | 15.42      | 10.45  | 25.87       | 40.00      | -14.13 Peak | VERTICAL  | ---  | 360  |
| 3    | 152.66    | 15.77      | 9.62   | 25.39       | 43.50      | -18.11 Peak | VERTICAL  | ---  | 360  |
| 4    | 316.59    | 11.23      | 15.75  | 26.98       | 46.00      | -19.02 Peak | VERTICAL  | ---  | 360  |
| 5    | 501.18    | 14.06      | 20.31  | 34.37       | 46.00      | -11.63 Peak | VERTICAL  | ---  | 360  |
| 6 pp | 842.13    | 10.89      | 26.82  | 37.71       | 46.00      | -8.29 Peak  | VERTICAL  | ---  | 360  |

深圳市华夏准测检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

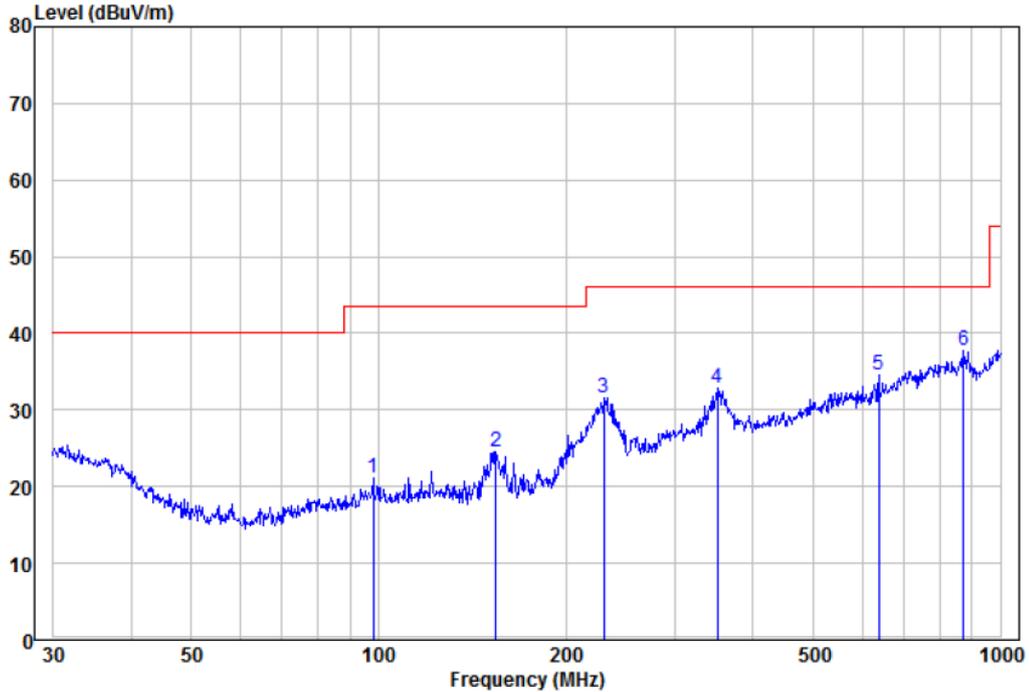


|      | Read Freq | Read Level | Read Factor | Limit Level | Limit Line | Over Limit | Remark | Pol/Phase  | APos | TPos |
|------|-----------|------------|-------------|-------------|------------|------------|--------|------------|------|------|
|      | MHz       | dBuV       | dB/m        | dBuV/m      | dBuV/m     | dB         |        |            | cm   | deg  |
| 1    | 98.14     | 9.50       | 11.62       | 21.12       | 43.50      | -22.38     | Peak   | HORIZONTAL | ---  | 0    |
| 2    | 154.28    | 15.01      | 9.52        | 24.53       | 43.50      | -18.97     | Peak   | HORIZONTAL | ---  | 0    |
| 3    | 230.10    | 19.56      | 11.98       | 31.54       | 46.00      | -14.46     | Peak   | HORIZONTAL | ---  | 0    |
| 4    | 350.48    | 16.25      | 16.62       | 32.87       | 46.00      | -13.13     | Peak   | HORIZONTAL | ---  | 0    |
| 5    | 638.37    | 12.94      | 21.70       | 34.64       | 46.00      | -11.36     | Peak   | HORIZONTAL | ---  | 0    |
| 6 pp | 872.18    | 11.02      | 26.77       | 37.79       | 46.00      | -8.21      | Peak   | HORIZONTAL | ---  | 0    |

### EUT Information


|                     |  |
|---------------------|--|
| EUT Name:           | Label Maker  |
| Model:              | LabelManager Executive 640CB                             |
| Test Mode:          | printing via PC, printer connected to PC via Type-C port |
| Test Voltage:       | Battery  |
| Standard:           | FCC 15B  |
| Tem./Hum./Pressure: | 25.5°C/53.0%/101kPa                                      |
| Remark:             | 3m SAC   |

深圳市华夏准测检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

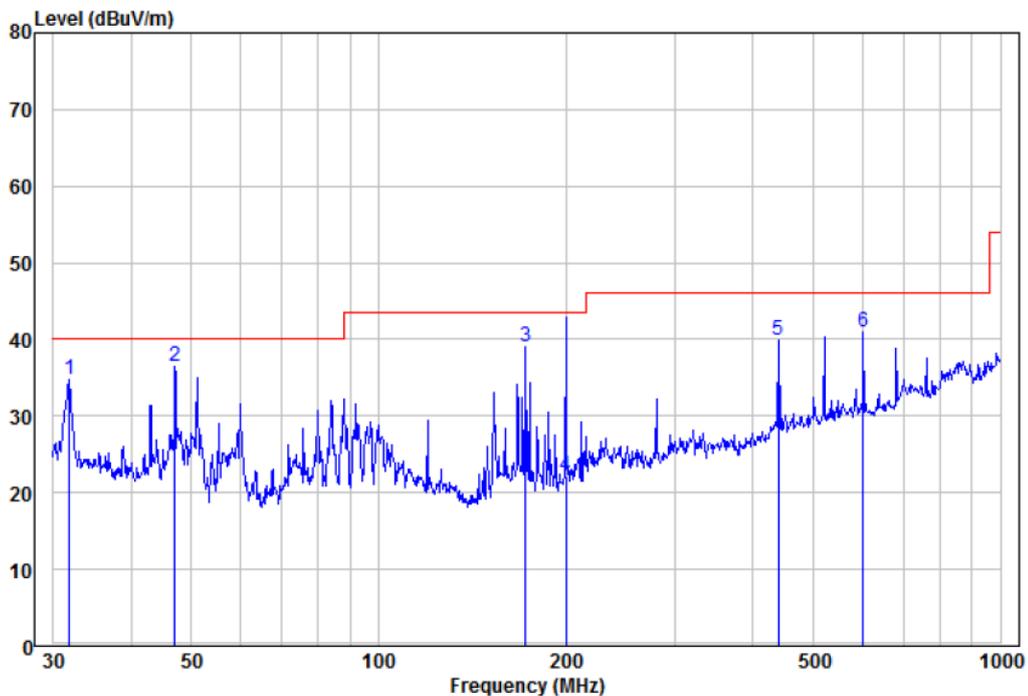

|   | Read      |       |        | Limit  | Over   |        |        | APos      | TPos |     |
|---|-----------|-------|--------|--------|--------|--------|--------|-----------|------|-----|
|   | Freq      | Level | Factor | Level  | Line   | Limit  | Remark | Pol/Phase |      |     |
|   | MHz       | dBuV  | dB/m   | dBuV/m | dBuV/m | dB     |        |           | cm   |     |
| 1 | 31.84     | 19.08 | 15.69  | 34.77  | 40.00  | -5.23  | Peak   | VERTICAL  | ---  | 358 |
| 2 | pp 46.99  | 26.31 | 10.19  | 36.50  | 40.00  | -3.50  | Peak   | VERTICAL  | ---  | 358 |
| 3 | 172.60    | 29.81 | 9.21   | 39.02  | 43.50  | -4.48  | Peak   | VERTICAL  | ---  | 358 |
| 4 | qp 199.99 | 12.22 | 10.00  | 22.22  | 43.50  | -21.28 | QP     | VERTICAL  | ---  | 358 |
| 5 | 440.20    | 21.74 | 18.25  | 39.99  | 46.00  | -6.01  | Peak   | VERTICAL  | ---  | 358 |
| 6 | 601.43    | 19.84 | 21.06  | 40.90  | 46.00  | -5.10  | Peak   | VERTICAL  | ---  | 358 |

深圳市华夏准测检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

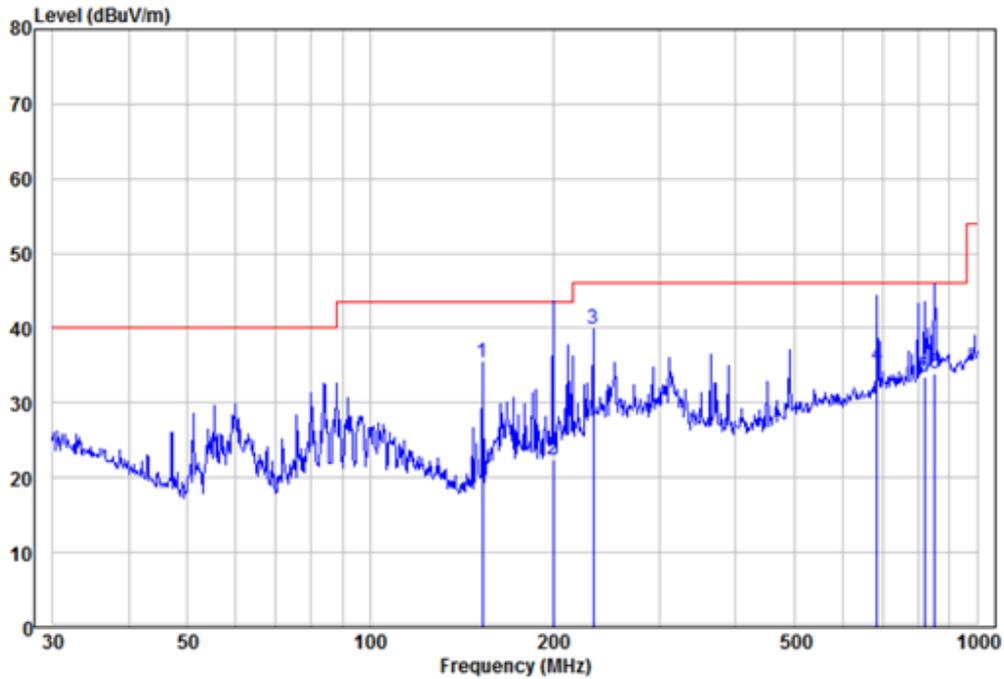


|      | Read   | Limit  | Over   |        |       |            |            | APos | TPos |
|------|--------|--------|--------|--------|-------|------------|------------|------|------|
| Freq | Level  | Factor | Level  | Line   | Limit | Remark     | Pol/Phase  | cm   | deg  |
| MHz  | dBuV   | dB/m   | dBuV/m | dBuV/m | dB    |            |            |      |      |
| 1    | 153.20 | 25.79  | 9.59   | 35.38  | 43.50 | -8.12 Peak | HORIZONTAL | ---  | 320  |
| 2    | 199.99 | 12.41  | 10.00  | 22.41  | 43.50 | -21.09 QP  | HORIZONTAL | ---  | 320  |
| 3 pp | 233.35 | 27.45  | 12.35  | 39.80  | 46.00 | -6.20 Peak | HORIZONTAL | ---  | 320  |
| 4 qp | 684.75 | 12.42  | 22.60  | 35.02  | 46.00 | -10.98 QP  | HORIZONTAL | ---  | 320  |
| 5    | 818.83 | 7.80   | 25.80  | 33.60  | 46.00 | -12.40 QP  | HORIZONTAL | ---  | 320  |
| 6    | 851.04 | 7.04   | 26.81  | 33.85  | 46.00 | -12.15 QP  | HORIZONTAL | ---  | 320  |

### EUT Information


|                     |                              |
|---------------------|------------------------------|
| EUT Name:           | Label Maker                  |
| Model:              | LabelManager Executive 640CB |
| Test Mode:          | printing via keyboard input  |
| Test Voltage:       | Battery                      |
| Standard:           | FCC 15B                      |
| Tem./Hum./Pressure: | 25.5°C/53.0%/101kPa          |
| Remark:             | 3m SAC                       |

深圳市华夏准测检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

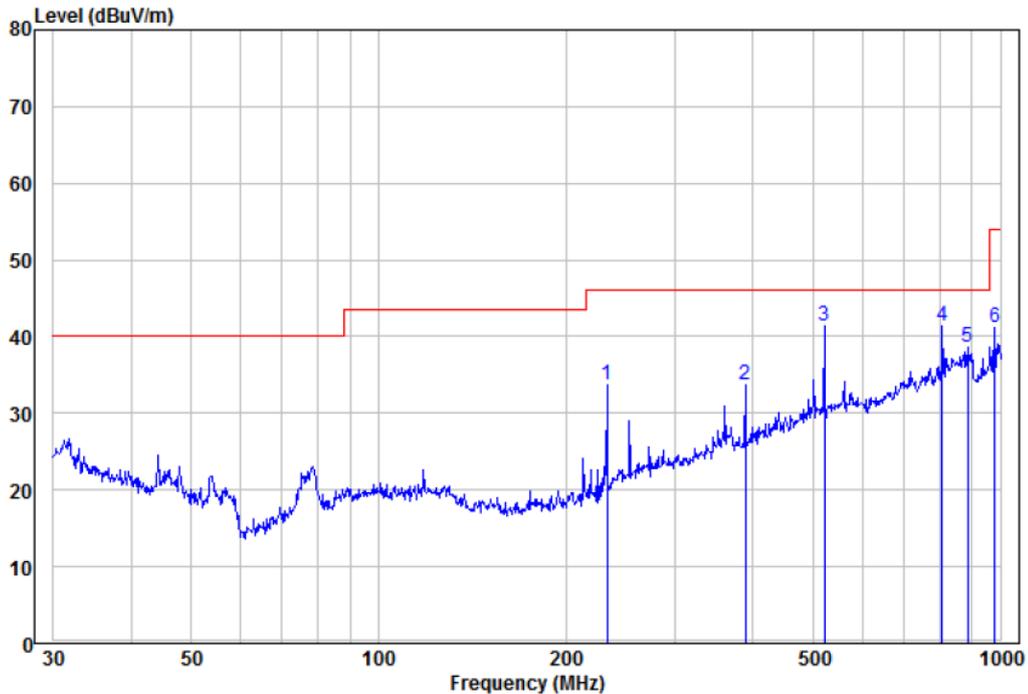

|      | Read Freq | Read Level | Factor | Limit Level | Over Limit | Remark      | Pol/Phase | APos | TPos |
|------|-----------|------------|--------|-------------|------------|-------------|-----------|------|------|
|      | MHz       | dBuV       | dB/m   | dBuV/m      | dBuV/m     | dB          |           | cm   | deg  |
| 1    | 233.35    | 21.45      | 12.35  | 33.80       | 46.00      | -12.20 Peak | VERTICAL  | ---  | 360  |
| 2    | 389.35    | 17.01      | 16.61  | 33.62       | 46.00      | -12.38 Peak | VERTICAL  | ---  | 360  |
| 3 pp | 520.89    | 20.79      | 20.58  | 41.37       | 46.00      | -4.63 Peak  | VERTICAL  | ---  | 360  |
| 4    | 807.43    | 15.53      | 25.79  | 41.32       | 46.00      | -4.68 Peak  | VERTICAL  | ---  | 360  |
| 5    | 887.61    | 11.98      | 26.73  | 38.71       | 46.00      | -7.29 Peak  | VERTICAL  | ---  | 360  |
| 6    | 979.18    | 14.03      | 27.16  | 41.19       | 54.00      | -12.81 Peak | VERTICAL  | ---  | 360  |

深圳市华夏准测检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

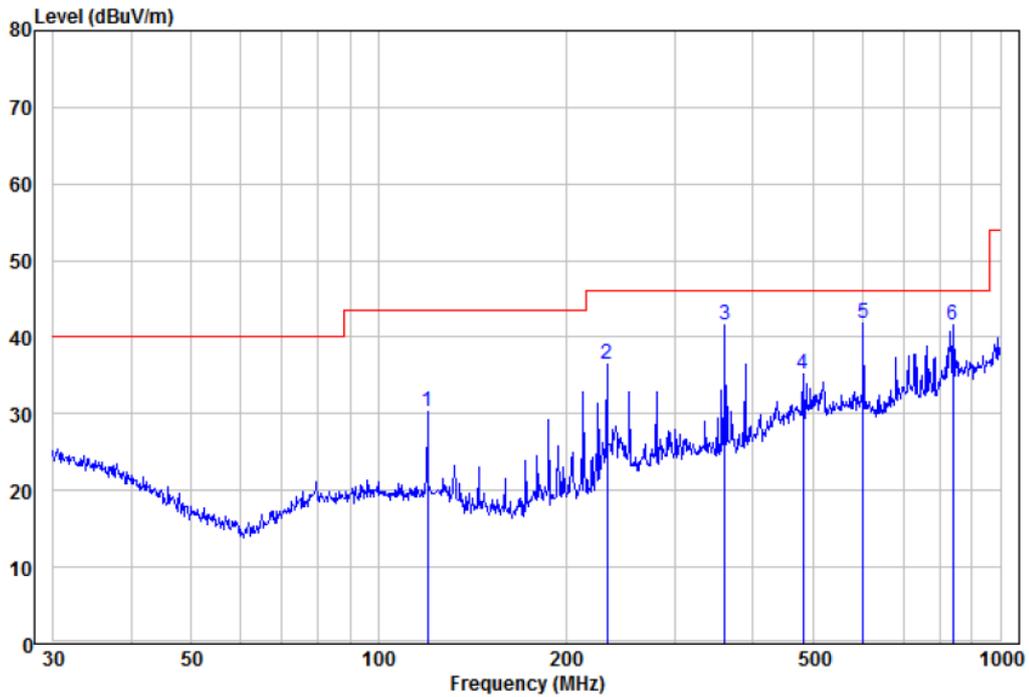


|      | Read   |       | Limit  | Over   |        |        |        | APos       | TPos |   |
|------|--------|-------|--------|--------|--------|--------|--------|------------|------|---|
|      | Freq   | Level | Factor | Level  | Line   | Limit  | Remark | Pol/Phase  |      |   |
|      | MHz    | dBuV  | dB/m   | dBuV/m | dBuV/m | dB     |        |            | cm   |   |
| 1    | 119.86 | 18.45 | 11.88  | 30.33  | 43.50  | -13.17 | Peak   | HORIZONTAL | ---  | 0 |
| 2    | 233.35 | 24.20 | 12.35  | 36.55  | 46.00  | -9.45  | Peak   | HORIZONTAL | ---  | 0 |
| 3    | 360.45 | 24.79 | 16.87  | 41.66  | 46.00  | -4.34  | Peak   | HORIZONTAL | ---  | 0 |
| 4    | 482.22 | 15.55 | 19.68  | 35.23  | 46.00  | -10.77 | Peak   | HORIZONTAL | ---  | 0 |
| 5 pp | 601.43 | 20.85 | 21.06  | 41.91  | 46.00  | -4.09  | Peak   | HORIZONTAL | ---  | 0 |
| 6    | 839.18 | 14.85 | 26.81  | 41.66  | 46.00  | -4.34  | Peak   | HORIZONTAL | ---  | 0 |

### EUT Information


EUT Name: Label Maker  
 Model: LabelManager Executive 640CB  
 Test Mode: printing via mobile phone, printer connected to mobile phone via Bluetooth  
 Test Voltage: Battery  
 Standard: FCC 15B  
 Tem./Hum./Pressure: 25.5°C/53.0%/101kPa  
 Remark: 3m SAC

深圳市华夏准测检测技术有限公司  
 Shenzhen Huaxia Testing Technology Co., Ltd.  
 深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
 1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
 Longhua New District,

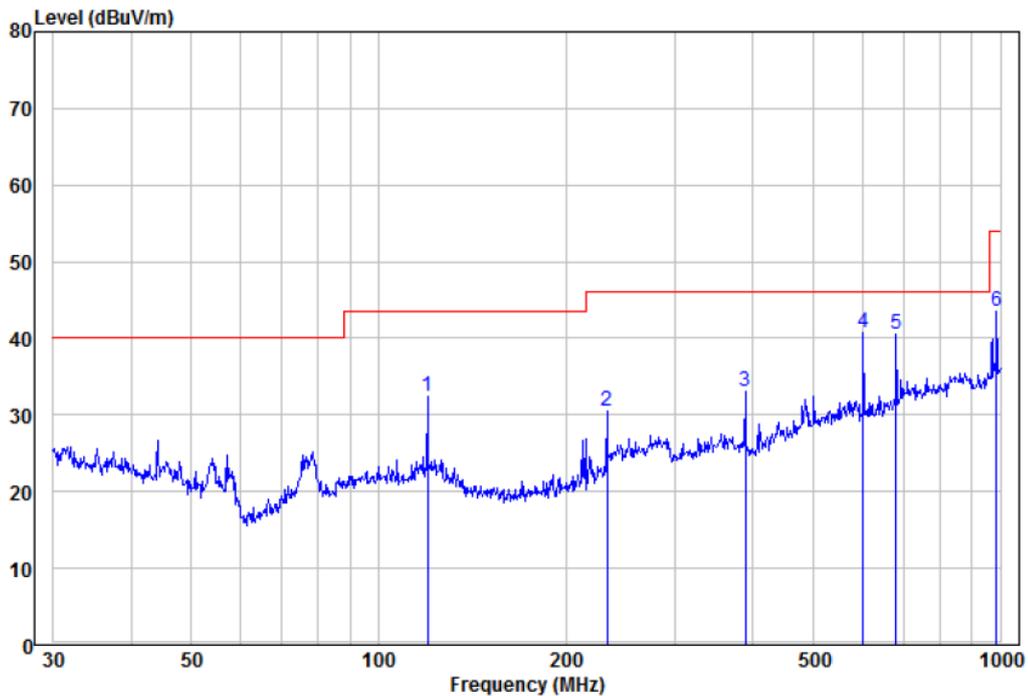

|      | Read   | Limit | Over   |        |        |        |        | APos      | TPos |   |
|------|--------|-------|--------|--------|--------|--------|--------|-----------|------|---|
|      | Freq   | Level | Factor | Level  | Line   | Limit  | Remark | Pol/Phase |      |   |
|      | MHz    | dBuV  | dB/m   | dBuV/m | dBuV/m | dB     |        |           | cm   |   |
| 1    | 119.86 | 20.62 | 11.88  | 32.50  | 43.50  | -11.00 | Peak   | VERTICAL  | ---  | 0 |
| 2    | 233.35 | 18.09 | 12.35  | 30.44  | 46.00  | -15.56 | Peak   | VERTICAL  | ---  | 0 |
| 3    | 389.35 | 16.47 | 16.61  | 33.08  | 46.00  | -12.92 | Peak   | VERTICAL  | ---  | 0 |
| 4 pp | 601.43 | 19.73 | 21.06  | 40.79  | 46.00  | -5.21  | Peak   | VERTICAL  | ---  | 0 |
| 5    | 679.96 | 18.11 | 22.51  | 40.62  | 46.00  | -5.38  | Peak   | VERTICAL  | ---  | 0 |
| 6    | 986.07 | 16.20 | 27.34  | 43.54  | 54.00  | -10.46 | Peak   | VERTICAL  | ---  | 0 |

深圳市华夏准测检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

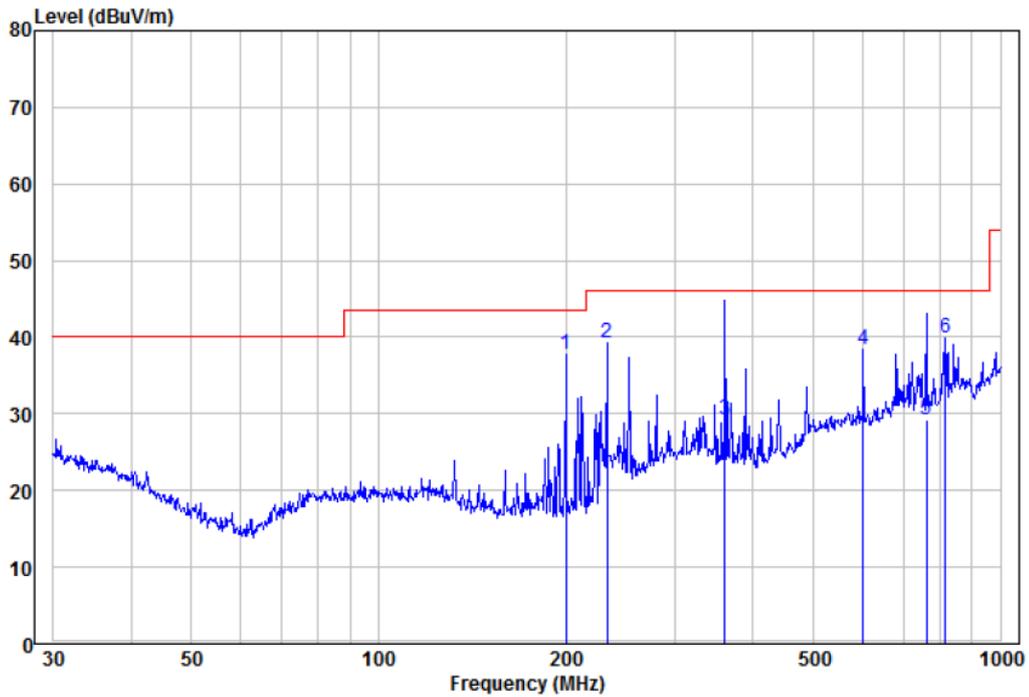

|   |      | Read   |        | Limit  | Over   |       |            | APos       | TPos |     |
|---|------|--------|--------|--------|--------|-------|------------|------------|------|-----|
|   | Freq | Level  | Factor | Level  | Line   | Limit | Remark     | Pol/Phase  |      |     |
|   | MHz  | dBuV   | dB/m   | dBuV/m | dBuV/m | dB    |            |            | cm   |     |
| 1 | pp   | 199.99 | 27.69  | 10.00  | 37.69  | 43.50 | -5.81 Peak | HORIZONTAL | ---  | 359 |
| 2 |      | 233.35 | 26.84  | 12.35  | 39.19  | 46.00 | -6.81 Peak | HORIZONTAL | ---  | 359 |
| 3 | qp   | 360.45 | 12.34  | 16.87  | 29.21  | 46.00 | -16.79 QP  | HORIZONTAL | ---  | 359 |
| 4 |      | 601.43 | 17.34  | 21.06  | 38.40  | 46.00 | -7.60 Peak | HORIZONTAL | ---  | 359 |
| 5 |      | 760.70 | 4.84   | 24.30  | 29.14  | 46.00 | -16.86 QP  | HORIZONTAL | ---  | 359 |
| 6 |      | 815.97 | 14.01  | 25.79  | 39.80  | 46.00 | -6.20 Peak | HORIZONTAL | ---  | 359 |


### Appendix A.3: Test Plots of Radiated Emission, Above 1GHz

Note: Testing was carried out within frequency range 30MHz to the 5<sup>th</sup> harmonics. The measurement results above 6GHz were greater than 20dB below the limit, so only record the test result within the 30MHz to 6GHz.

#### EUT Information


|                     |  |
|---------------------|--|
| EUT Name:           | Label Maker  |
| Model:              | LabelManager Executive 640CB   |
| Test Mode:          | printing via mobile phone, printer connected to mobile phone via Bluetooth |
| Test Voltage:       | Battery  |
| Standard:           | FCC 15B  |
| Tem./Hum./Pressure: | 25.5°C/53.0%/101kPa  |
| Remark:             | 3m FAC   |

深圳市华夏准测检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

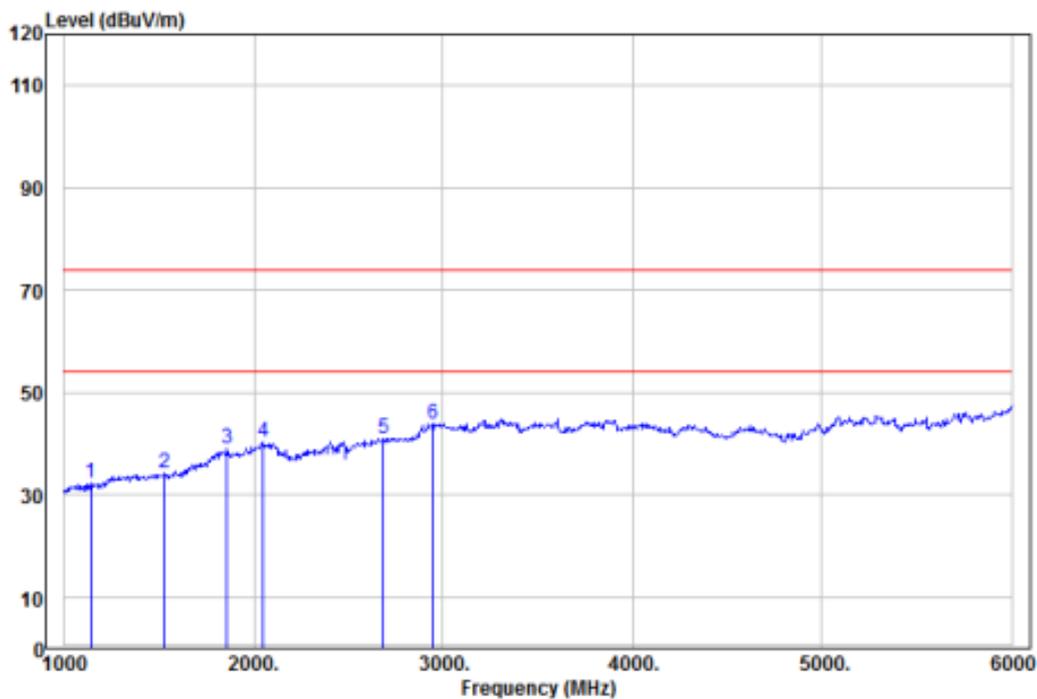

|      | Read Freq | Level | Factor | Level  | Limit Line | Over Limit | Remark  | Pol/Phase  | APos | TPos |
|------|-----------|-------|--------|--------|------------|------------|---------|------------|------|------|
|      | MHz       | dBuV  | dB/m   | dBuV/m | dBuV/m     | dB         |         |            | cm   | deg  |
| 1    | 1140.00   | 43.39 | -11.07 | 32.32  | 54.00      | -21.68     | Average | HORIZONTAL | ---  | 360  |
| 2    | 1530.00   | 42.45 | -8.30  | 34.15  | 54.00      | -19.85     | Average | HORIZONTAL | ---  | 360  |
| 3    | 1860.00   | 42.16 | -2.98  | 39.18  | 54.00      | -14.82     | Average | HORIZONTAL | ---  | 360  |
| 4    | 2050.00   | 42.39 | -2.23  | 40.16  | 54.00      | -13.84     | Average | HORIZONTAL | ---  | 360  |
| 5    | 2685.00   | 41.71 | -0.62  | 41.09  | 54.00      | -12.91     | Average | HORIZONTAL | ---  | 360  |
| 6 pp | 2945.00   | 43.11 | 0.83   | 43.94  | 54.00      | -10.06     | Average | HORIZONTAL | ---  | 360  |

深圳市华夏准测检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

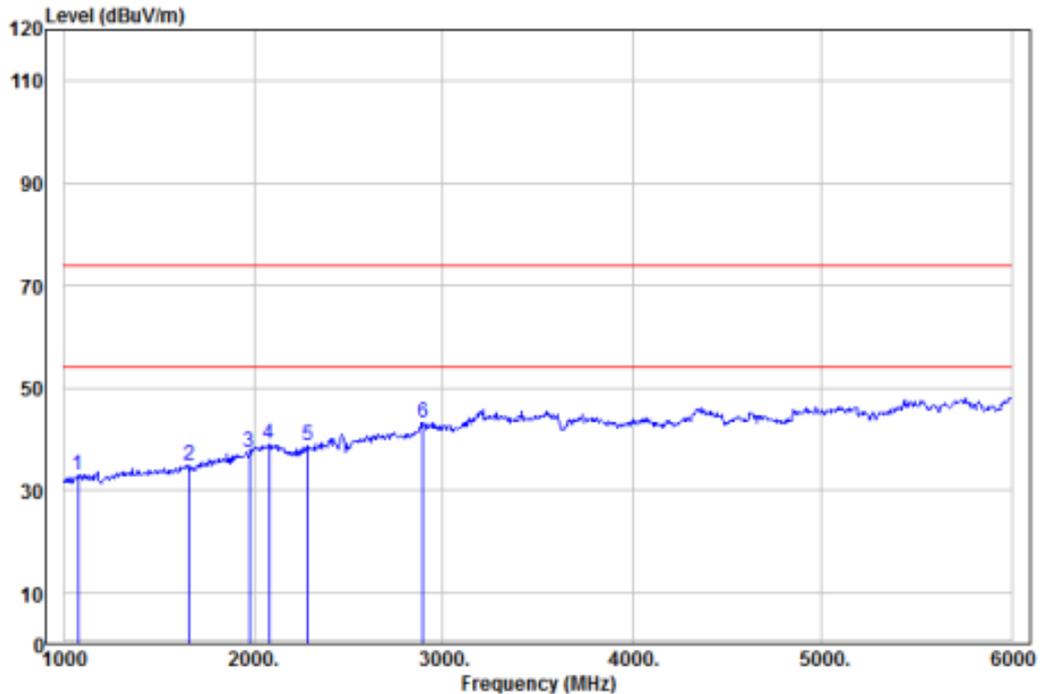


|      | Read    |        |        | Limit  | Over  |        |           | APos     | TPos |   |
|------|---------|--------|--------|--------|-------|--------|-----------|----------|------|---|
| Freq | Level   | Factor | Level  | Line   | Limit | Remark | Pol/Phase | cm       | deg  |   |
| MHz  | dBuV    | dB/m   | dBuV/m | dBuV/m | dB    |        |           |          |      |   |
| 1    | 1070.00 | 44.46  | -11.49 | 32.97  | 54.00 | -21.03 | Average   | VERTICAL | ---  | 0 |
| 2    | 1660.00 | 41.33  | -6.40  | 34.93  | 54.00 | -19.07 | Average   | VERTICAL | ---  | 0 |
| 3    | 1975.00 | 39.67  | -2.10  | 37.57  | 54.00 | -16.43 | Average   | VERTICAL | ---  | 0 |
| 4    | 2080.00 | 41.41  | -2.46  | 38.95  | 54.00 | -15.05 | Average   | VERTICAL | ---  | 0 |
| 5    | 2285.00 | 42.20  | -3.41  | 38.79  | 54.00 | -15.21 | Average   | VERTICAL | ---  | 0 |
| 6 pp | 2895.00 | 42.73  | 0.45   | 43.18  | 54.00 | -10.82 | Average   | VERTICAL | ---  | 0 |

### EUT Information


EUT Name: Label Maker  
 Model: LabelManager Executive 640CB  
 Test Mode: printing via keyboard input  
 Test Voltage: Battery  
 Standard: FCC 15B  
 Tem./Hum./Pressure: 25.5°C/53.0%/101kPa  
 Remark: 3m SAC

深圳市华夏准测检测技术有限公司  
 Shenzhen Huaxia Testing Technology Co., Ltd.  
 深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
 1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
 Longhua New District,

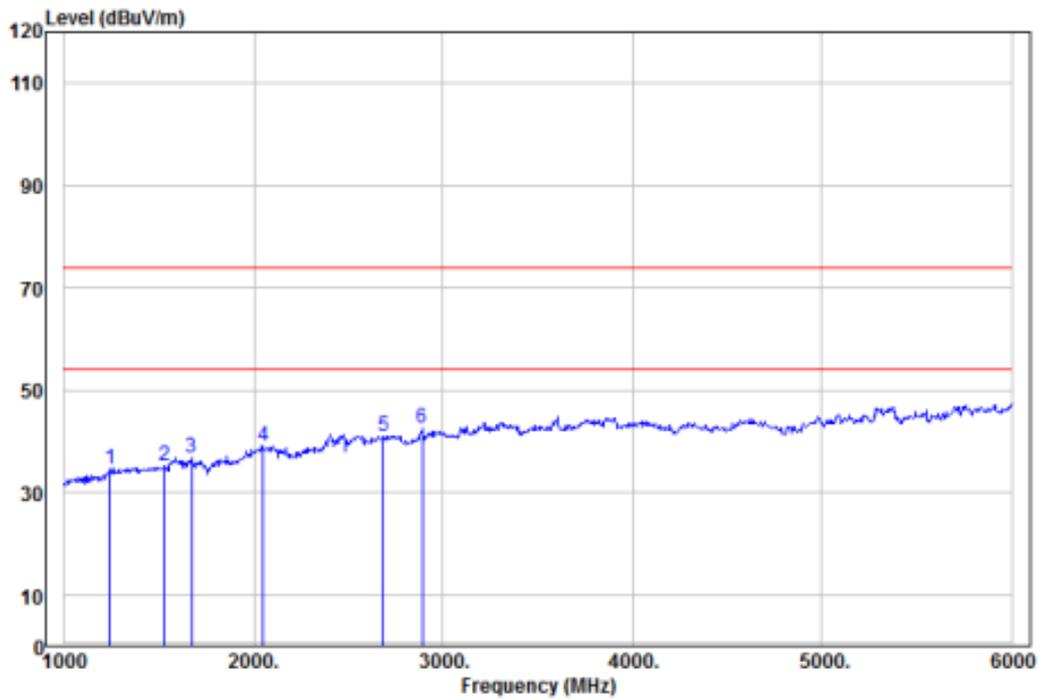

|      | Read    |       | Limit  | Over   |        |        |         | APos       | TPos |     |
|------|---------|-------|--------|--------|--------|--------|---------|------------|------|-----|
|      | Freq    | Level | Factor | Level  | Line   | Limit  | Remark  | Pol/Phase  |      |     |
|      | MHz     | dBuV  | dB/m   | dBuV/m | dBuV/m | dB     |         |            | cm   |     |
| 1    | 1240.00 | 44.64 | -10.04 | 34.60  | 54.00  | -19.40 | Average | HORIZONTAL | ---  | 360 |
| 2    | 1530.00 | 43.45 | -8.30  | 35.15  | 54.00  | -18.85 | Average | HORIZONTAL | ---  | 360 |
| 3    | 1670.00 | 42.90 | -6.17  | 36.73  | 54.00  | -17.27 | Average | HORIZONTAL | ---  | 360 |
| 4    | 2050.00 | 41.39 | -2.23  | 39.16  | 54.00  | -14.84 | Average | HORIZONTAL | ---  | 360 |
| 5    | 2685.00 | 41.71 | -0.62  | 41.09  | 54.00  | -12.91 | Average | HORIZONTAL | ---  | 360 |
| 6 pp | 2890.00 | 41.98 | 0.44   | 42.42  | 54.00  | -11.58 | Average | HORIZONTAL | ---  | 360 |

深圳市华夏准测检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

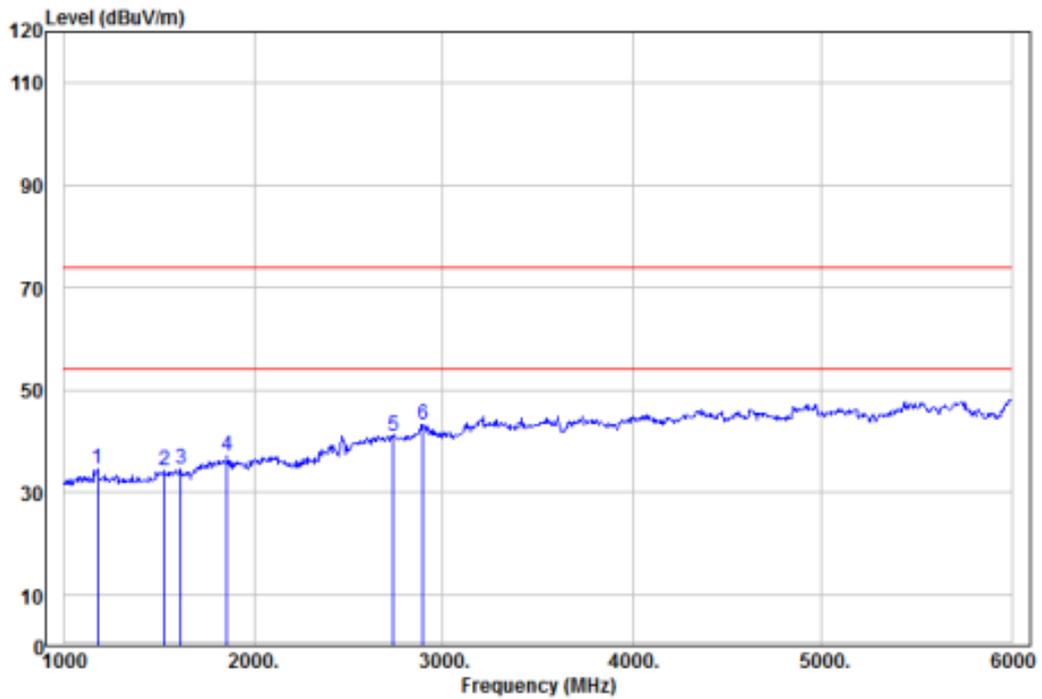


|      | Read    |        |        | Limit  | Over  |        |           | APos     | TPos |   |
|------|---------|--------|--------|--------|-------|--------|-----------|----------|------|---|
| Freq | Level   | Factor | Level  | Line   | Limit | Remark | Pol/Phase | cm       | deg  |   |
| MHz  | dBuV    | dB/m   | dBuV/m | dBuV/m | dB    |        |           |          |      |   |
| 1    | 1175.00 | 45.54  | -10.90 | 34.64  | 54.00 | -19.36 | Average   | VERTICAL | ---  | 0 |
| 2    | 1530.00 | 42.40  | -8.30  | 34.10  | 54.00 | -19.90 | Average   | VERTICAL | ---  | 0 |
| 3    | 1615.00 | 41.73  | -7.27  | 34.46  | 54.00 | -19.54 | Average   | VERTICAL | ---  | 0 |
| 4    | 1860.00 | 40.10  | -2.98  | 37.12  | 54.00 | -16.88 | Average   | VERTICAL | ---  | 0 |
| 5    | 2735.00 | 41.57  | -0.48  | 41.09  | 54.00 | -12.91 | Average   | VERTICAL | ---  | 0 |
| 6 pp | 2895.00 | 42.73  | 0.45   | 43.18  | 54.00 | -10.82 | Average   | VERTICAL | ---  | 0 |

### EUT Information


EUT Name: Label Maker  
 Model: LabelManager Executive 640CB  
 Test Mode: printing via PC, printer connected to PC via Type-C port  
 Test Voltage: Battery  
 Standard: FCC 15B  
 Tem./Hum./Pressure: 25.5°C/53.0%/101kPa  
 Remark: 3m SAC

深圳市华夏准测检测技术有限公司  
 Shenzhen Huaxia Testing Technology Co., Ltd.  
 深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
 1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
 Longhua New District,

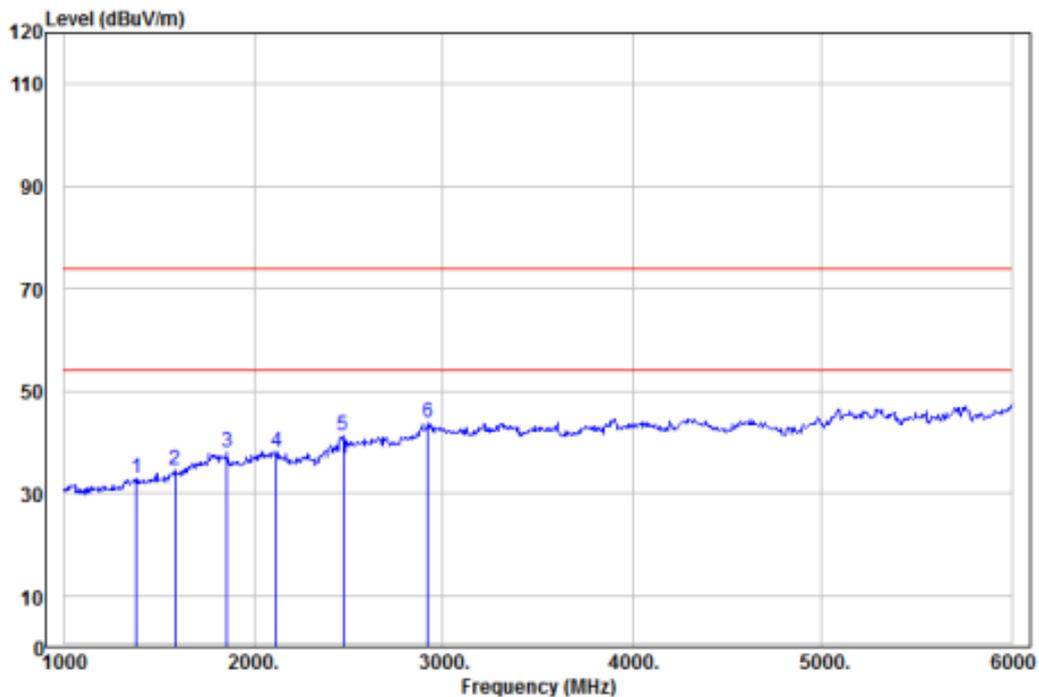

|      | Read    |        |        | Limit  | Over  |        |           | APos       | TPos |     |
|------|---------|--------|--------|--------|-------|--------|-----------|------------|------|-----|
| Freq | Level   | Factor | Level  | Line   | Limit | Remark | Pol/Phase | cm         | deg  |     |
| MHz  | dBuV    | dB/m   | dBuV/m | dBuV/m | dB    |        |           |            |      |     |
| 1    | 1380.00 | 41.81  | -8.96  | 32.85  | 54.00 | -21.15 | Average   | HORIZONTAL | ---  | 360 |
| 2    | 1585.00 | 42.40  | -7.75  | 34.65  | 54.00 | -19.35 | Average   | HORIZONTAL | ---  | 360 |
| 3    | 1860.00 | 41.16  | -2.98  | 38.18  | 54.00 | -15.82 | Average   | HORIZONTAL | ---  | 360 |
| 4    | 2120.00 | 40.90  | -2.88  | 38.02  | 54.00 | -15.98 | Average   | HORIZONTAL | ---  | 360 |
| 5    | 2470.00 | 43.68  | -2.28  | 41.40  | 54.00 | -12.60 | Average   | HORIZONTAL | ---  | 360 |
| 6 pp | 2920.00 | 43.13  | 0.63   | 43.76  | 54.00 | -10.24 | Average   | HORIZONTAL | ---  | 360 |

深圳市华夏准测检测技术有限公司  
Shenzhen Huaxia Testing Technology Co., Ltd.  
深圳市龙华新区大浪华辉路同胜科技大厦A座一楼  
1/F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street,  
Longhua New District,

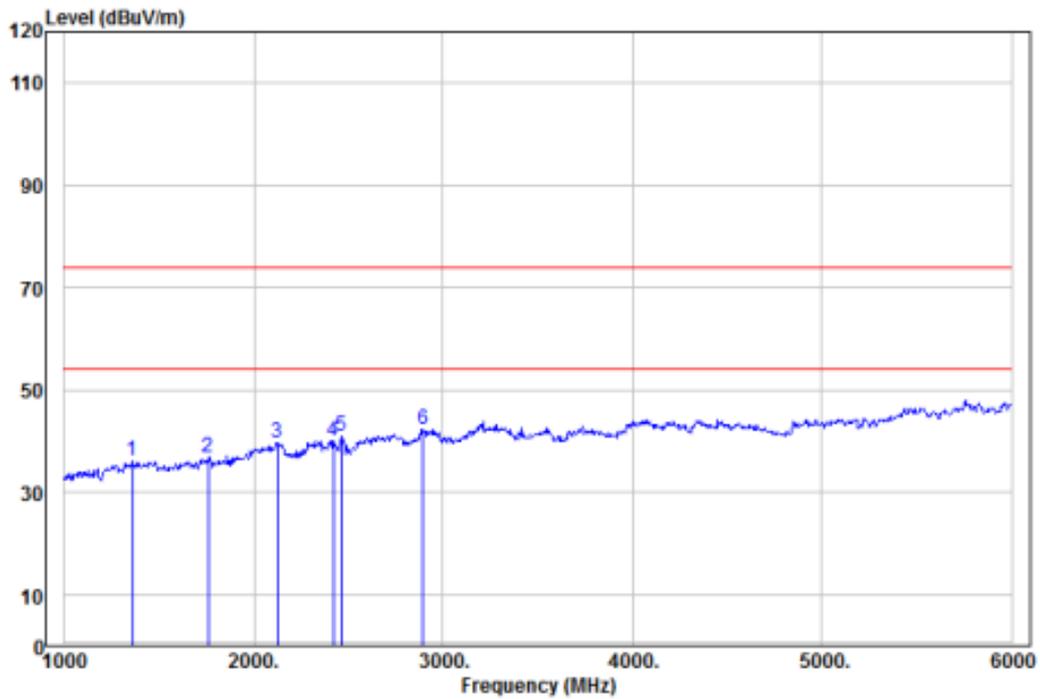

|      | Freq    | Read Level | Factor | Level  | Limit  | Over Limit | Remark  | Pol/Phase | APos | TPos |
|------|---------|------------|--------|--------|--------|------------|---------|-----------|------|------|
|      | MHz     | dBuV       | dB/m   | dBuV/m | dBuV/m | dB         |         |           | cm   | deg  |
| 1    | 1360.00 | 45.20      | -8.97  | 36.23  | 54.00  | -17.77     | Average | VERTICAL  | ---  | 0    |
| 2    | 1760.00 | 41.59      | -4.72  | 36.87  | 54.00  | -17.13     | Average | VERTICAL  | ---  | 0    |
| 3    | 2125.00 | 42.64      | -2.94  | 39.70  | 54.00  | -14.30     | Average | VERTICAL  | ---  | 0    |
| 4    | 2420.00 | 42.75      | -2.61  | 40.14  | 54.00  | -13.86     | Average | VERTICAL  | ---  | 0    |
| 5    | 2465.00 | 43.37      | -2.30  | 41.07  | 54.00  | -12.93     | Average | VERTICAL  | ---  | 0    |
| 6 pp | 2895.00 | 41.73      | 0.45   | 42.18  | 54.00  | -11.82     | Average | VERTICAL  | ---  | 0    |