

Table of Contents


1.	RADIATED EMISSIONS	2
2.	CONDUCTED EMISSIONS	4

1. Radiated Emissions

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

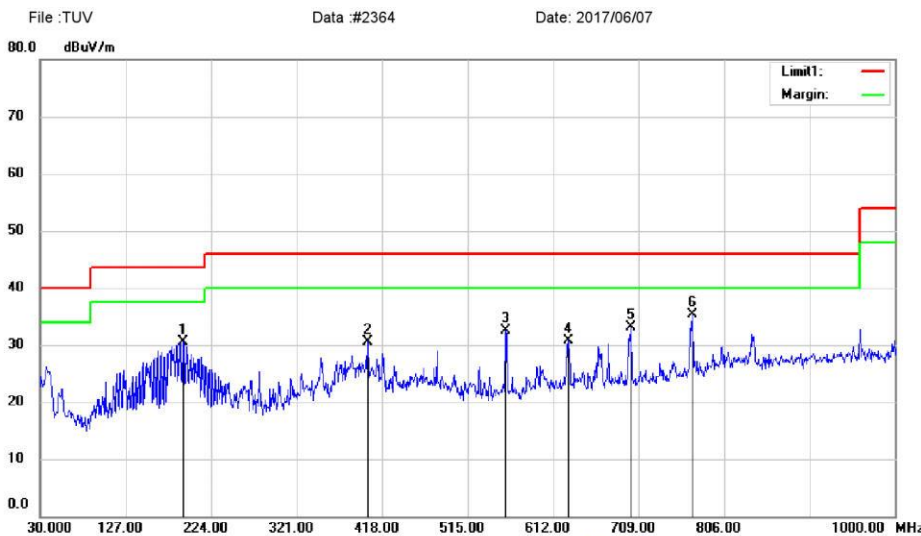

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Label printer
 M/N: Label Writer Wireless
 Mode: Connect to pc
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		191.9900	47.15	-16.72	30.43	43.50	-13.07	QP		
2		401.5100	39.66	-9.22	30.44	46.00	-15.56	QP		
3		557.6800	38.58	-6.10	32.48	46.00	-13.52	QP		
4		629.4600	35.37	-4.74	30.63	46.00	-15.37	QP		
5		700.2700	37.11	-3.99	33.12	46.00	-12.88	QP		
6	*	770.1100	37.92	-2.61	35.31	46.00	-10.69	QP		

*: Maximum data x: Over limit !: over margin


Operator: LQZ

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

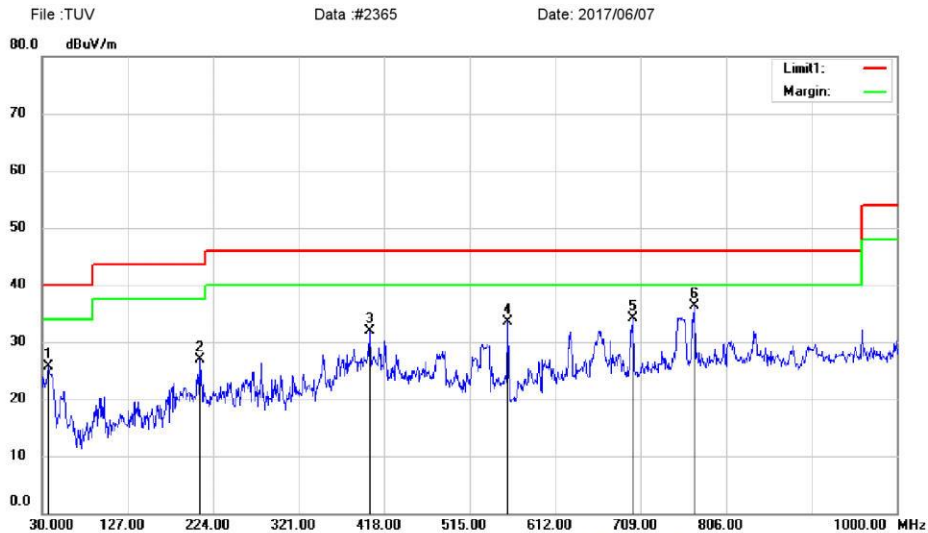

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Label printer
 M/N: Label Writer Wireless
 Mode: Connect to pc
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		36.7900	41.01	-15.36	25.65	40.00	-14.35			QP	
2		208.4800	42.48	-15.49	26.99	43.50	-16.51			QP	
3		401.5100	41.16	-9.22	31.94	46.00	-14.06			QP	
4		557.6800	39.58	-6.10	33.48	46.00	-12.52			QP	
5		700.2700	38.11	-3.99	34.12	46.00	-11.88			QP	
6	*	770.1100	38.92	-2.61	36.31	46.00	-9.69			QP	

*:Maximum data x:Over limit !:over margin


Operator: LQZ

2. Conducted Emissions

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.entek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Conducted Emission Measurement

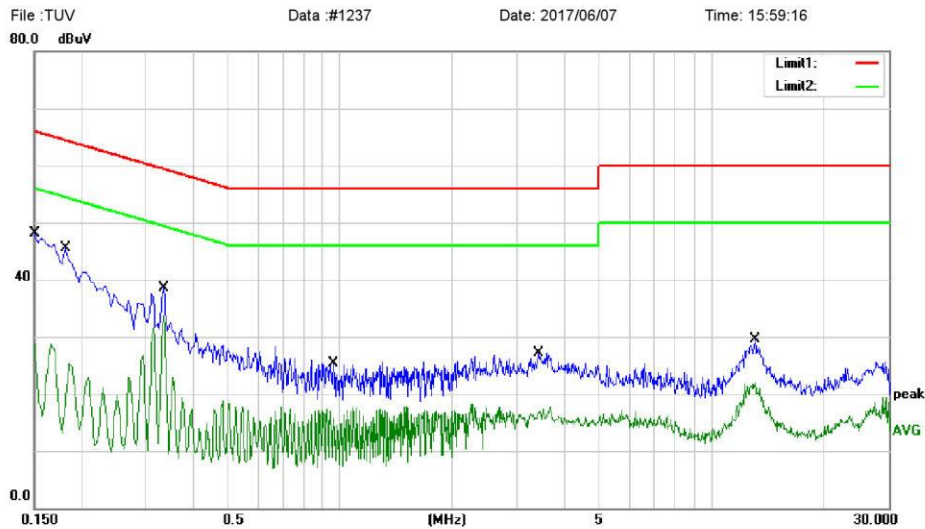

Site: Conduction #2 Phase: **N** Temperature: 21
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 53 %
 EUT: Label Printer
 M/N: Label Writer Wireless
 Mode: Connect to PC
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	38.55	9.62	48.17	66.00	-17.83	QP	
2		0.1500	19.03	9.62	28.65	56.00	-27.35	AVG	
3		0.1820	35.92	9.63	45.55	64.39	-18.84	QP	
4		0.1820	15.66	9.63	25.29	54.39	-29.10	AVG	
5		0.3340	28.90	9.67	38.57	59.35	-20.78	QP	
6	*	0.3340	24.12	9.67	33.79	49.35	-15.56	AVG	
7		0.9620	15.38	9.84	25.22	56.00	-30.78	QP	
8		0.9620	7.50	9.84	17.34	46.00	-28.66	AVG	
9		3.4260	17.24	9.86	27.10	56.00	-28.90	QP	
10		3.4260	7.78	9.86	17.64	46.00	-28.36	AVG	
11		13.0820	18.81	10.64	29.45	60.00	-30.55	QP	
12		13.0820	11.20	10.64	21.84	50.00	-28.16	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL


Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.entek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Conducted Emission Measurement

File : TUV Data : #1238 Date : 2017/06/07 Time : 16:00:08

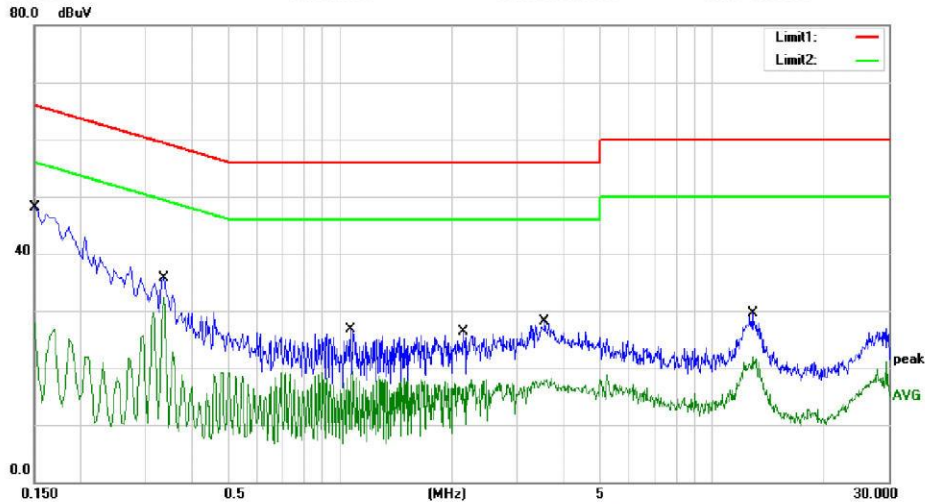

Site Conduction #2 Phase: **L1** Temperature: 21
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 53 %
 EUT: Label Printer
 M/N: Label Writer Wireless
 Mode: Connect to PC
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	38.42	9.62	48.04	66.00	-17.96	QP	
2		0.1500	18.18	9.62	27.80	56.00	-28.20	AVG	
3		0.3340	25.97	9.67	35.64	59.35	-23.71	QP	
4	*	0.3340	22.59	9.67	32.26	49.35	-17.09	AVG	
5		1.0660	16.79	9.85	26.64	56.00	-29.36	QP	
6		1.0660	9.52	9.85	19.37	46.00	-26.63	AVG	
7		2.1500	16.35	9.86	26.21	56.00	-29.79	QP	
8		2.1500	7.96	9.86	17.82	46.00	-28.18	AVG	
9		3.5500	18.22	9.86	28.08	56.00	-27.92	QP	
10		3.5500	8.23	9.86	18.09	46.00	-27.91	AVG	
11		12.8860	18.93	10.64	29.57	60.00	-30.43	QP	
12		12.8860	11.32	10.64	21.96	50.00	-28.04	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL