




Produkte
 Products

5.4 Test Graphs



CH64-5320MHz

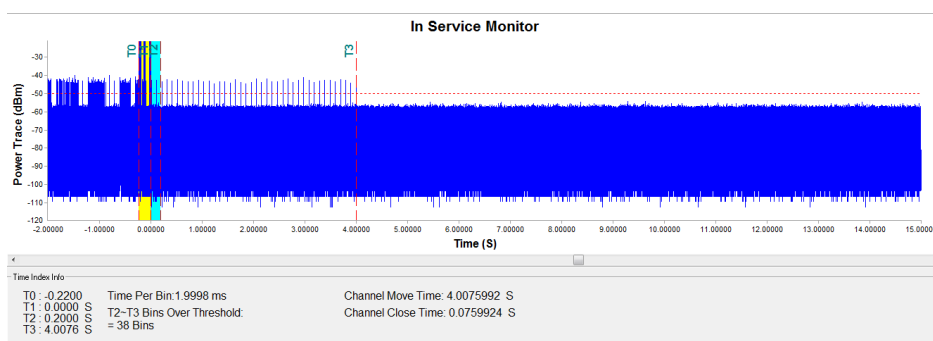

CH100-5500MHz

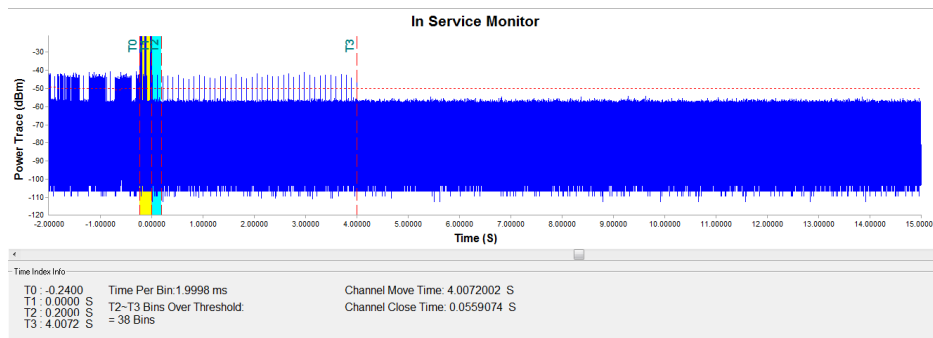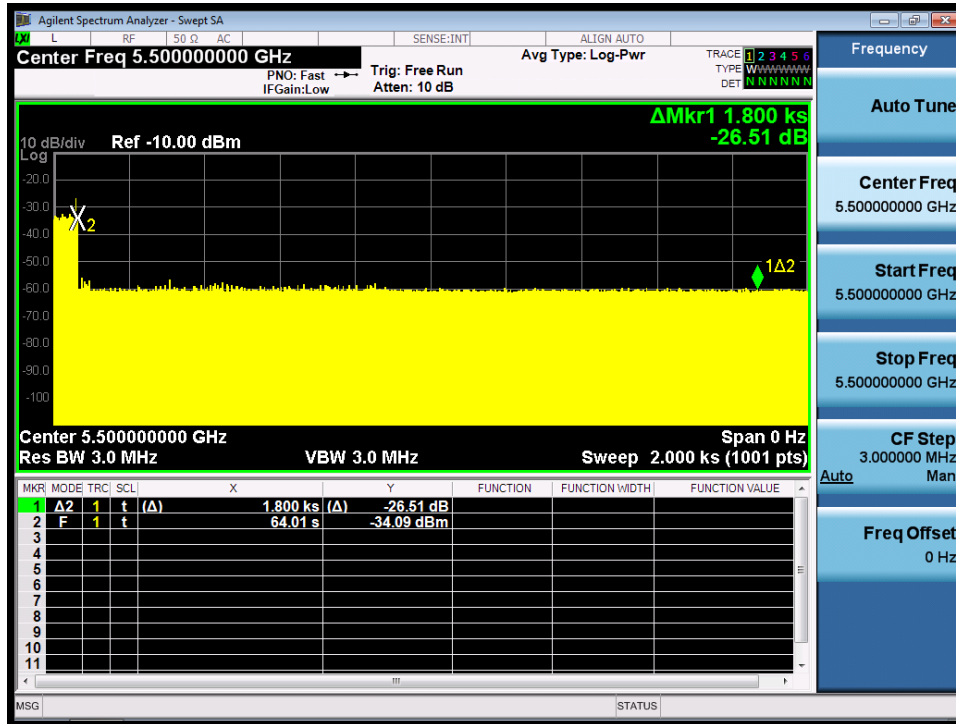

CH140-5700MHz

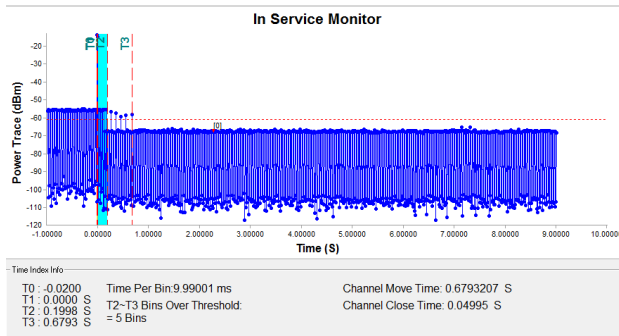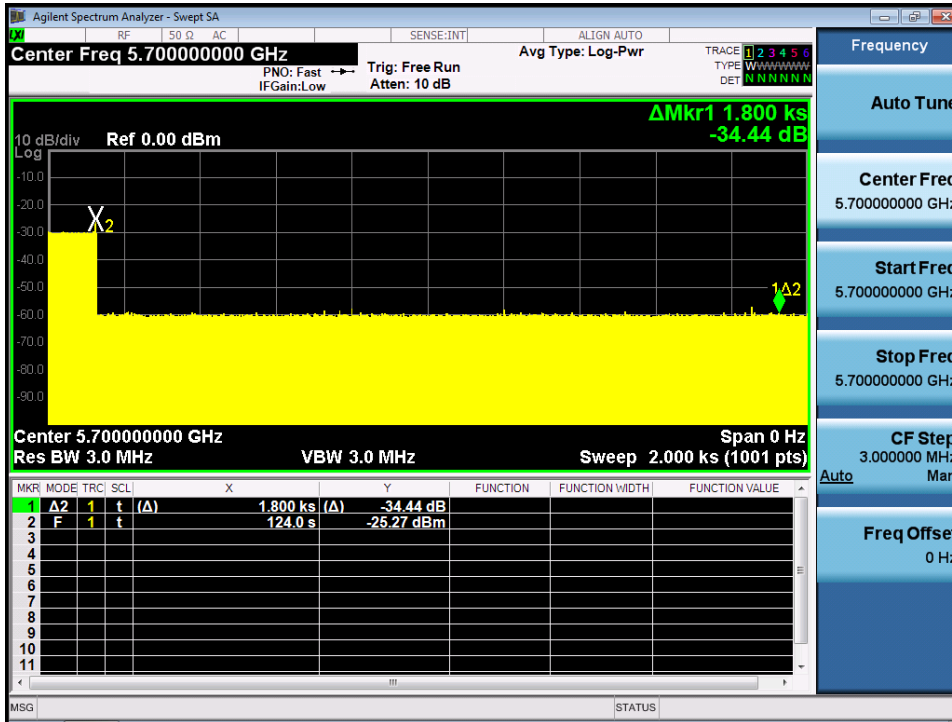

6. Transmitter Spurious Emissions

Note: 1, Testing is carried out with frequency rang 9kHz to the tenth harmonics.
2, The margin is greater than 20 dB are not shown in this Appendix.

6.1 Transmitter Spurious Emissions, Below 1GHz

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
EUT: Label maker
M/N: Label Writer Wireless
Mode: 11a 5180
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		260.8600	40.91	-12.26	28.65	46.00	-17.35	QP		
2		363.6800	35.29	-9.11	26.18	46.00	-19.82	QP		
3		480.0800	32.74	-7.22	25.52	46.00	-20.48	QP		
4	*	660.5000	33.02	-3.51	29.51	46.00	-16.49	QP		
5		816.6700	27.39	-0.88	26.51	46.00	-19.49	QP		
6		960.2300	31.27	0.80	32.07	54.00	-21.93	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017Data: #787


Page: 1

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

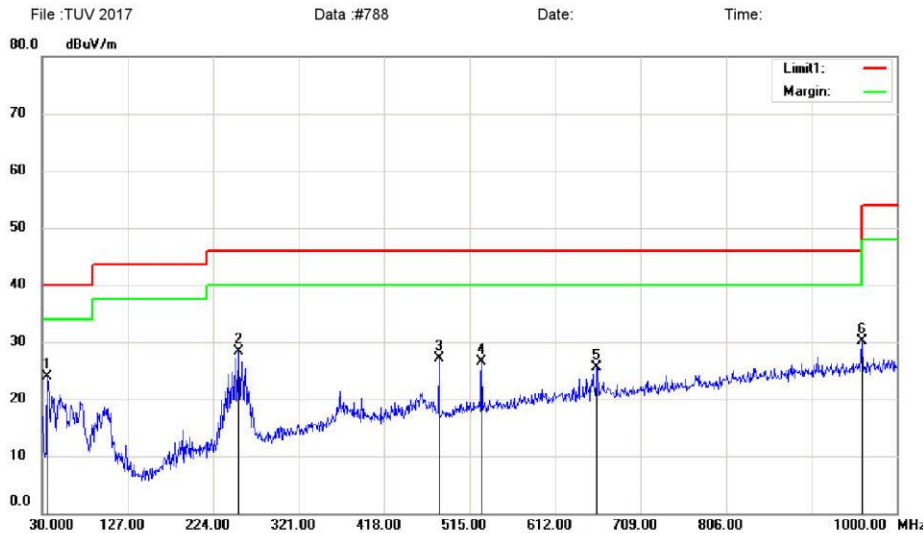

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5180
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	35.8200	40.35	-16.45	23.90	40.00	-16.10			QP	
2		253.1000	41.22	-12.96	28.26	46.00	-17.74			QP	
3		480.0800	34.33	-7.22	27.11	46.00	-18.89			QP	
4		528.5800	32.52	-6.09	26.43	46.00	-19.57			QP	
5		659.5300	28.93	-3.52	25.41	46.00	-20.59			QP	
6		960.2300	29.37	0.80	30.17	54.00	-23.83			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

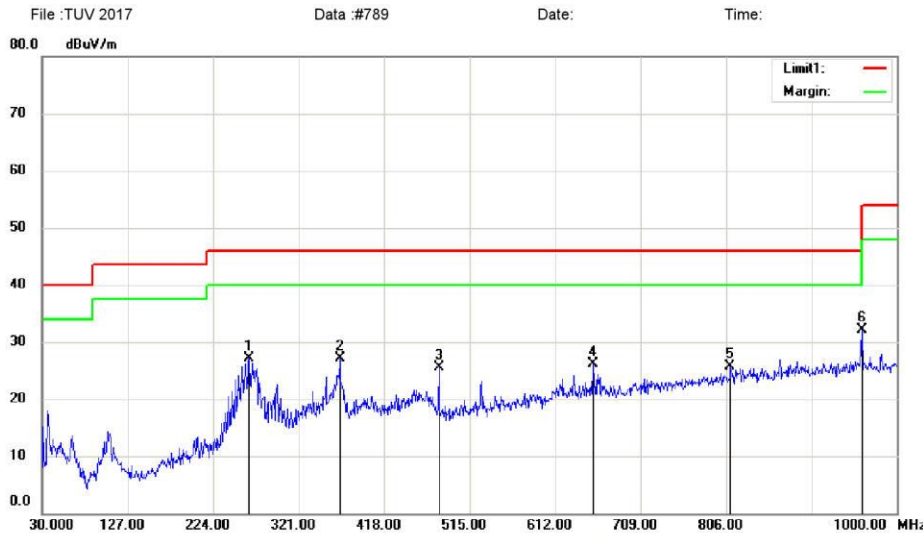

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5200
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		264.7400	39.05	-12.03	27.02	46.00	-18.98			QP	
2	*	367.5600	36.10	-9.04	27.06	46.00	-18.94			QP	
3		480.0800	32.80	-7.22	25.58	46.00	-20.42			QP	
4		655.6500	29.76	-3.59	26.17	46.00	-19.83			QP	
5		810.8500	26.63	-0.95	25.68	46.00	-20.32			QP	
6		960.2300	31.21	0.80	32.01	54.00	-21.99			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

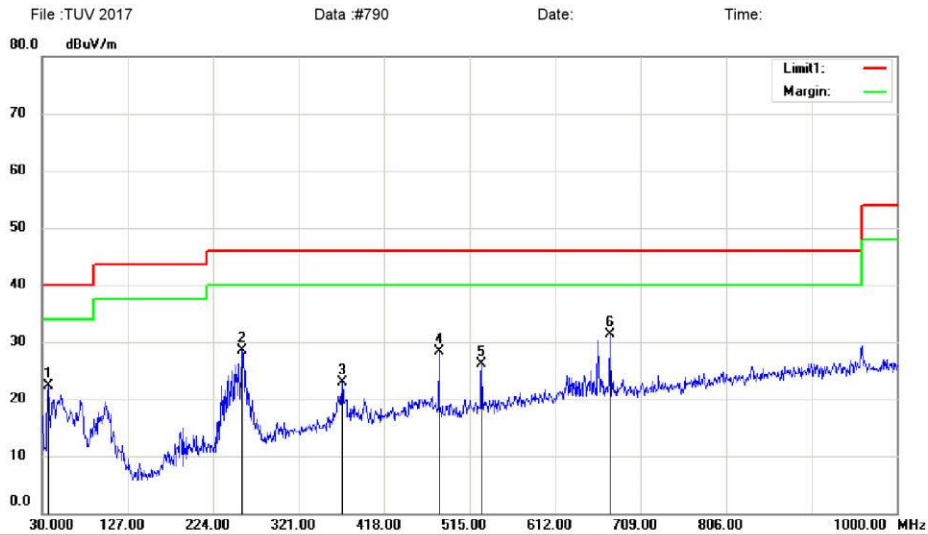

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5200
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		36.7900	38.07	-15.72	22.35	40.00	-17.65	QP		
2		256.9800	41.07	-12.59	28.48	46.00	-17.52	QP		
3		370.4700	31.79	-8.98	22.81	46.00	-23.19	QP		
4		480.0800	35.61	-7.22	28.39	46.00	-17.61	QP		
5		528.5800	32.15	-6.09	26.06	46.00	-19.94	QP		
6	*	674.0800	34.59	-3.31	31.28	46.00	-14.72	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

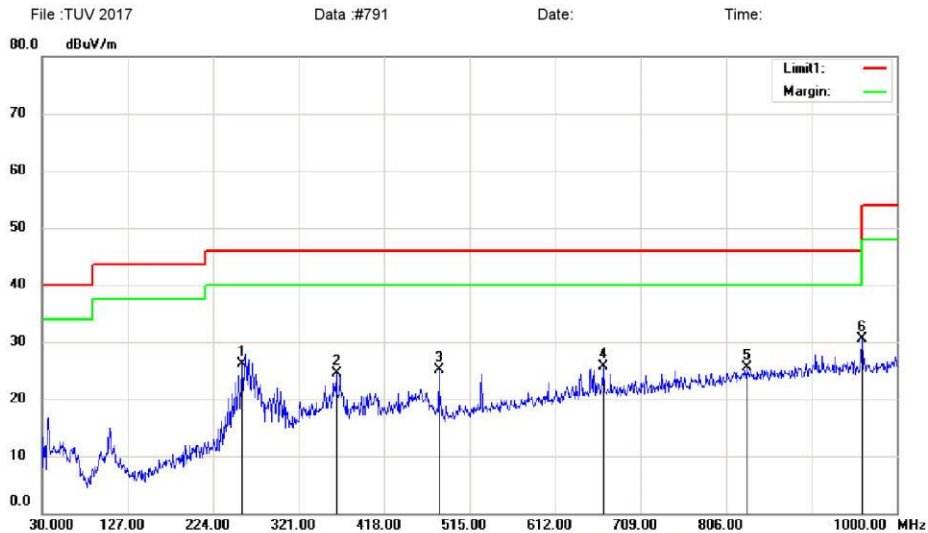

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5240
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	256.9800	38.60	-12.59	26.01	46.00	-19.99	QP			
2		363.6800	33.62	-9.11	24.51	46.00	-21.49	QP			
3		480.0800	32.40	-7.22	25.18	46.00	-20.82	QP			
4		667.2900	29.12	-3.42	25.70	46.00	-20.30	QP			
5		829.2800	26.19	-0.73	25.46	46.00	-20.54	QP			
6		960.2300	29.78	0.80	30.58	54.00	-23.42	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

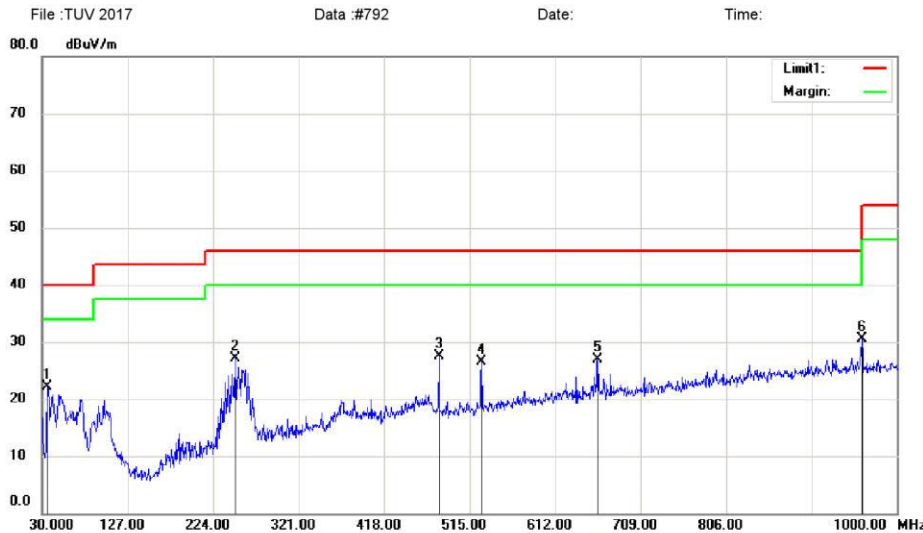

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5240
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	35.8200	38.52	-16.45	22.07	40.00	-17.93			QP	
2		249.2200	40.43	-13.27	27.16	46.00	-18.84			QP	
3		480.0800	34.74	-7.22	27.52	46.00	-18.48			QP	
4		528.5800	32.51	-6.09	26.42	46.00	-19.58			QP	
5		660.5000	30.51	-3.51	27.00	46.00	-19.00			QP	
6		960.2300	29.71	0.80	30.51	54.00	-23.49			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

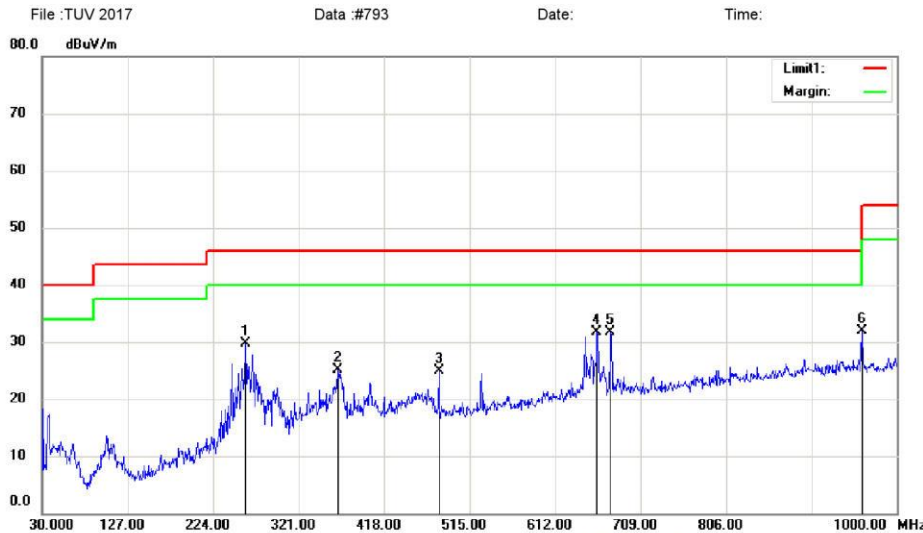

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5260
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		260.8600	41.98	-12.26	29.72	46.00	-16.28			QP	
2		365.6200	34.14	-9.07	25.07	46.00	-20.93			QP	
3		480.0800	32.18	-7.22	24.96	46.00	-21.04			QP	
4		659.5300	35.14	-3.52	31.62	46.00	-14.38			QP	
5	*	675.0500	35.06	-3.29	31.77	46.00	-14.23			QP	
6		960.2300	31.12	0.80	31.92	54.00	-22.08			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

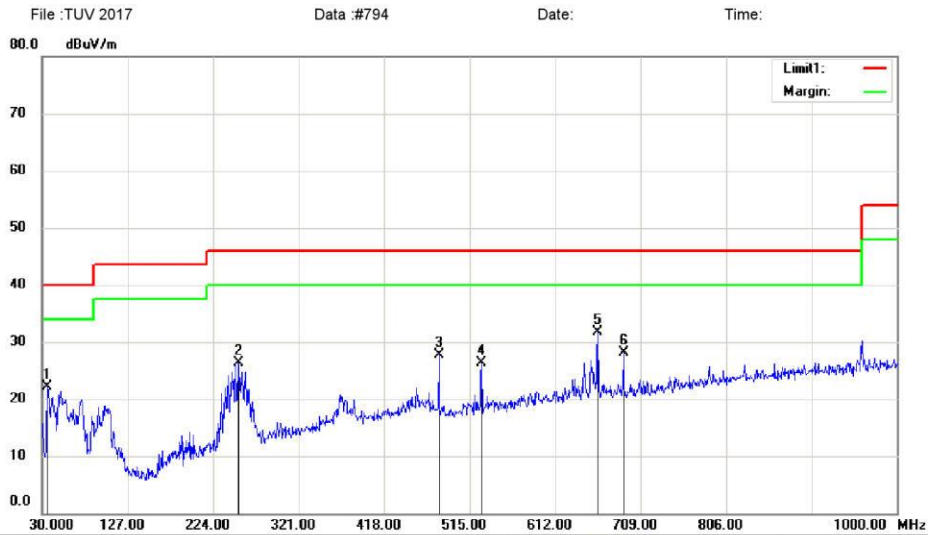

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5260
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		35.8200	38.55	-16.45	22.10	40.00	-17.90			QP	
2		253.1000	39.20	-12.96	26.24	46.00	-19.76			QP	
3		480.0800	35.00	-7.22	27.78	46.00	-18.22			QP	
4		528.5800	32.47	-6.09	26.38	46.00	-19.62			QP	
5	*	660.5000	35.12	-3.51	31.61	46.00	-14.39			QP	
6		689.6000	31.13	-3.06	28.07	46.00	-17.93			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

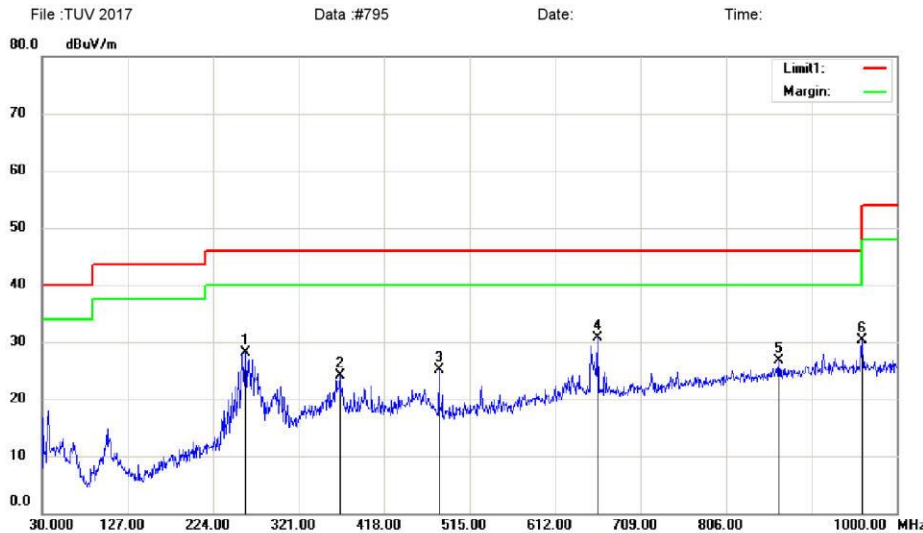

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5280
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		260.8600	40.44	-12.26	28.18	46.00	-17.82			QP	
2		367.5600	33.07	-9.04	24.03	46.00	-21.97			QP	
3		480.0800	32.24	-7.22	25.02	46.00	-20.98			QP	
4	*	660.5000	34.15	-3.51	30.64	46.00	-15.36			QP	
5		866.1400	26.98	-0.27	26.71	46.00	-19.29			QP	
6		960.2300	29.56	0.80	30.36	54.00	-23.64			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

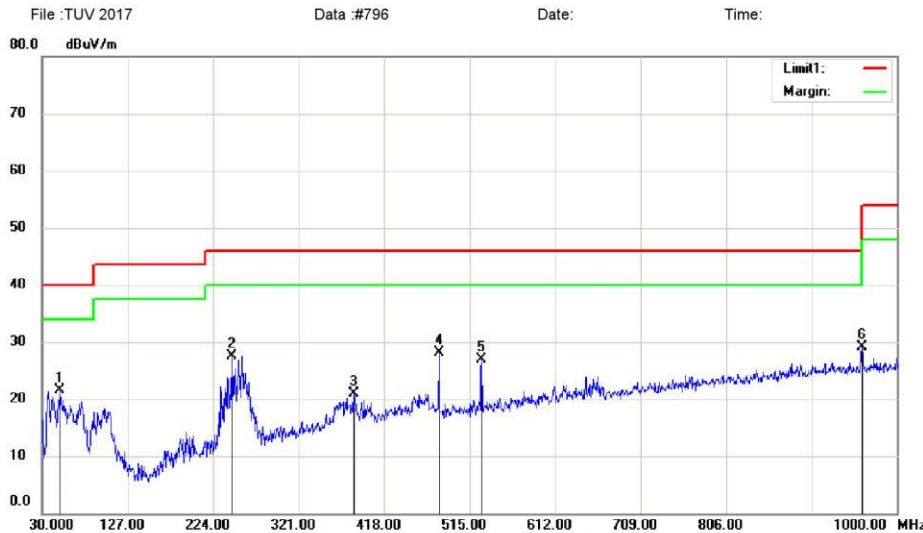

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5280
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		50.3700	35.19	-13.66	21.53	40.00	-18.47			QP	
2		245.3400	40.85	-13.29	27.56	46.00	-18.44			QP	
3		383.0800	29.64	-8.75	20.89	46.00	-25.11			QP	
4	*	480.0800	35.34	-7.22	28.12	46.00	-17.88			QP	
5		528.5800	32.93	-6.09	26.84	46.00	-19.16			QP	
6		960.2300	28.21	0.80	29.01	54.00	-24.99			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

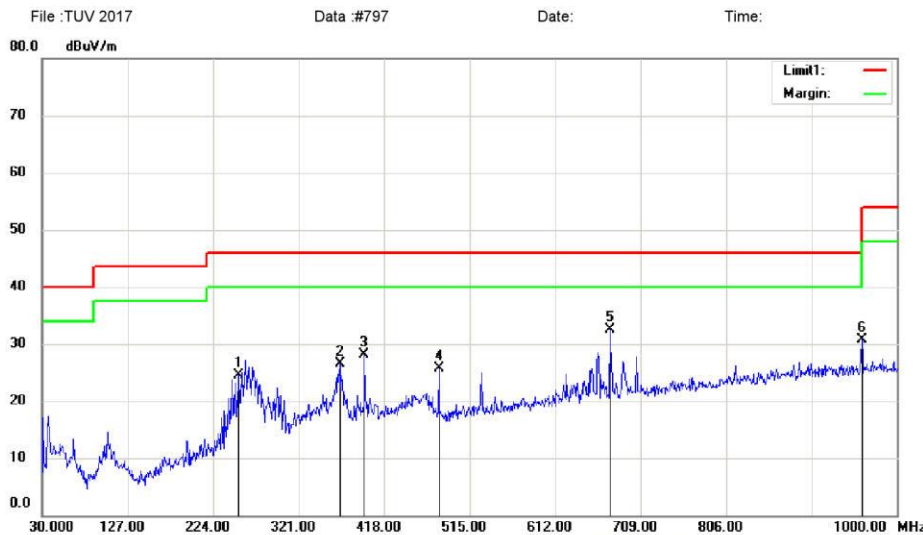

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5320
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		253.1000	37.37	-12.96	24.41	46.00	-21.59			QP	
2		367.5600	35.56	-9.04	26.52	46.00	-19.48			QP	
3		395.6900	36.56	-8.53	28.03	46.00	-17.97			QP	
4		480.0800	32.90	-7.22	25.68	46.00	-20.32			QP	
5	*	674.0800	35.87	-3.31	32.56	46.00	-13.44			QP	
6		960.2300	29.87	0.80	30.67	54.00	-23.33			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

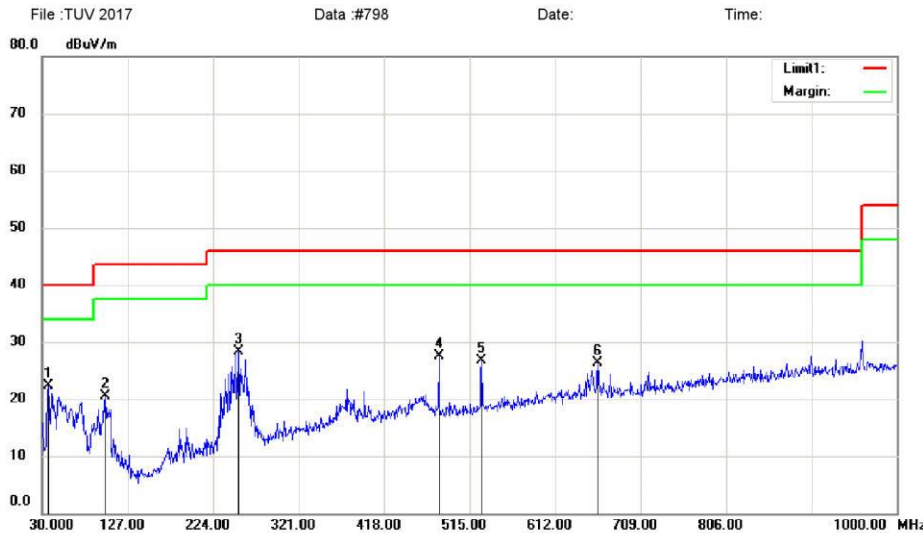

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5320
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	36.7900	38.10	-15.72	22.38	40.00	-17.62	QP		
2		101.7800	35.04	-14.47	20.57	43.50	-22.93	QP		
3		253.1000	41.31	-12.96	28.35	46.00	-17.65	QP		
4		480.0800	34.74	-7.22	27.52	46.00	-18.48	QP		
5		528.5800	32.86	-6.09	26.77	46.00	-19.23	QP		
6		660.5000	29.90	-3.51	26.39	46.00	-19.61	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

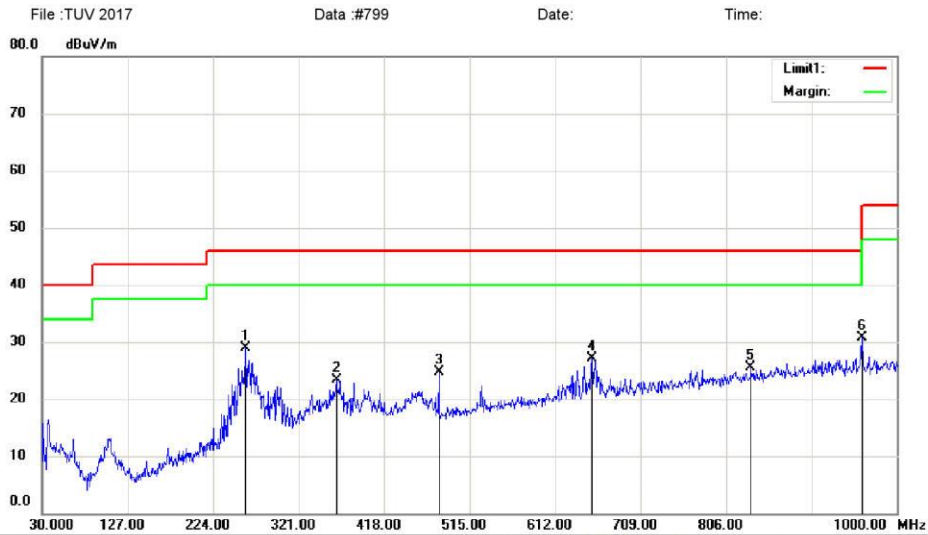

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5500
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	260.8600	41.20	-12.26	28.94	46.00	-17.06	QP		
2		363.6800	32.40	-9.11	23.29	46.00	-22.71	QP		
3		480.0800	31.97	-7.22	24.75	46.00	-21.25	QP		
4		653.7100	30.68	-3.61	27.07	46.00	-18.93	QP		
5		834.1300	26.16	-0.66	25.50	46.00	-20.50	QP		
6		960.2300	29.89	0.80	30.69	54.00	-23.31	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

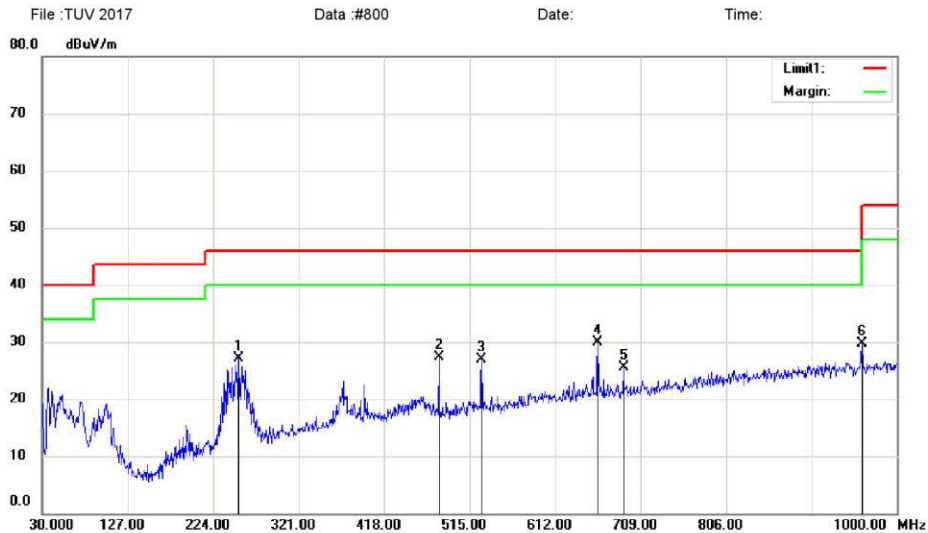

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5500
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		253.1000	40.16	-12.96	27.20	46.00	-18.80	QP			
2		480.0800	34.59	-7.22	27.37	46.00	-18.63	QP			
3		528.5800	32.93	-6.09	26.84	46.00	-19.16	QP			
4	*	660.5000	33.43	-3.51	29.92	46.00	-16.08	QP			
5		689.6000	28.59	-3.06	25.53	46.00	-20.47	QP			
6		960.2300	28.97	0.80	29.77	54.00	-24.23	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

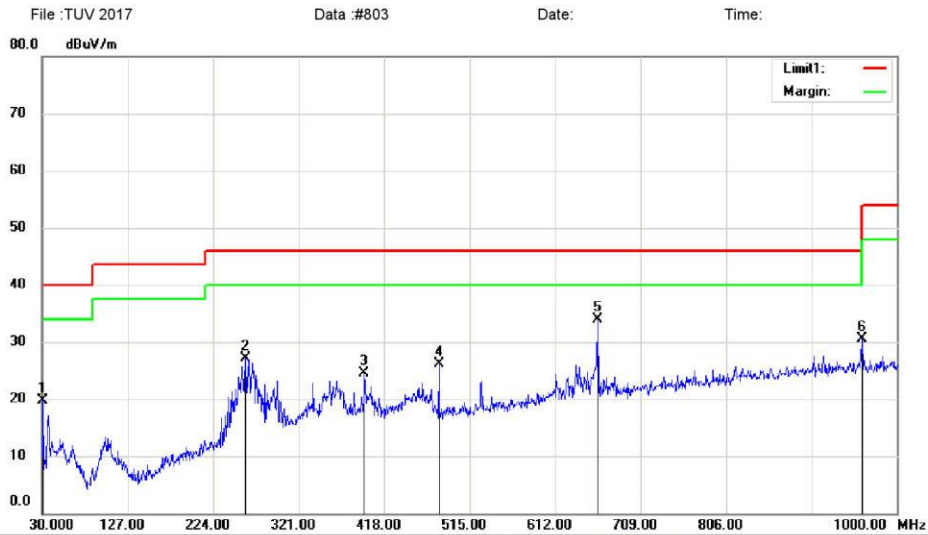

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5580
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		30.9700	36.94	-17.21	19.73	40.00	-20.27	QP		
2		260.8600	39.30	-12.26	27.04	46.00	-18.96	QP		
3		395.6900	33.12	-8.53	24.59	46.00	-21.41	QP		
4		480.0800	33.28	-7.22	26.06	46.00	-19.94	QP		
5	*	660.5000	37.35	-3.51	33.84	46.00	-12.16	QP		
6		960.2300	29.70	0.80	30.50	54.00	-23.50	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

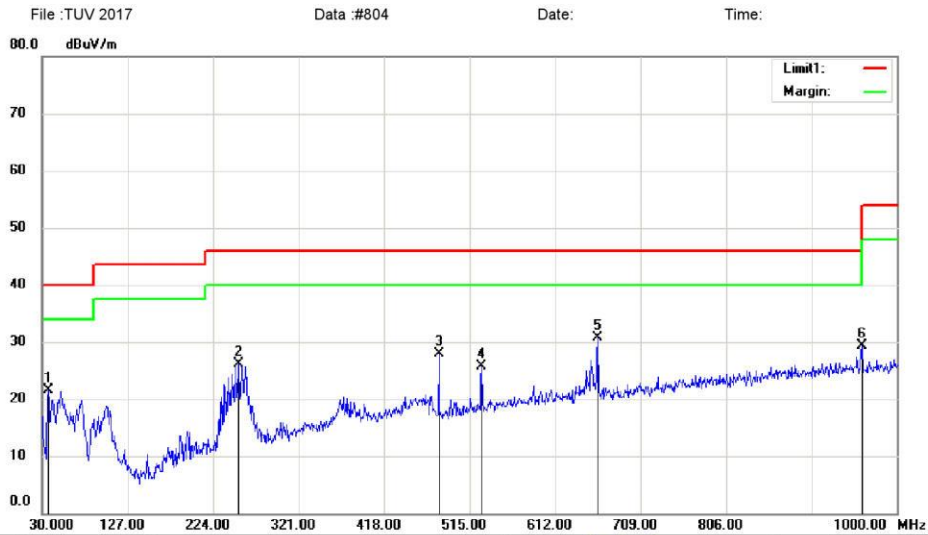

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5580
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		36.7900	37.13	-15.72	21.41	40.00	-18.59	QP		
2		253.1000	39.10	-12.96	26.14	46.00	-19.86	QP		
3		480.0800	35.19	-7.22	27.97	46.00	-18.03	QP		
4		528.5800	31.86	-6.09	25.77	46.00	-20.23	QP		
5	*	660.5000	34.14	-3.51	30.63	46.00	-15.37	QP		
6		960.2300	28.45	0.80	29.25	54.00	-24.75	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

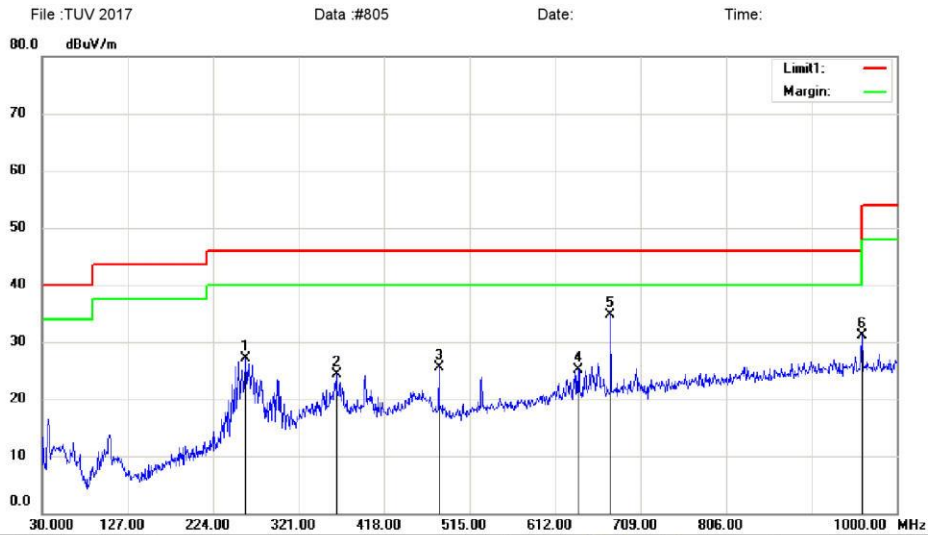

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5660
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		260.8600	39.27	-12.26	27.01	46.00	-18.99			QP	
2		363.6800	33.50	-9.11	24.39	46.00	-21.61			QP	
3		480.0800	32.82	-7.22	25.60	46.00	-20.40			QP	
4		638.1900	28.91	-3.85	25.06	46.00	-20.94			QP	
5	*	675.0500	37.90	-3.29	34.61	46.00	-11.39			QP	
6		960.2300	30.38	0.80	31.18	54.00	-22.82			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

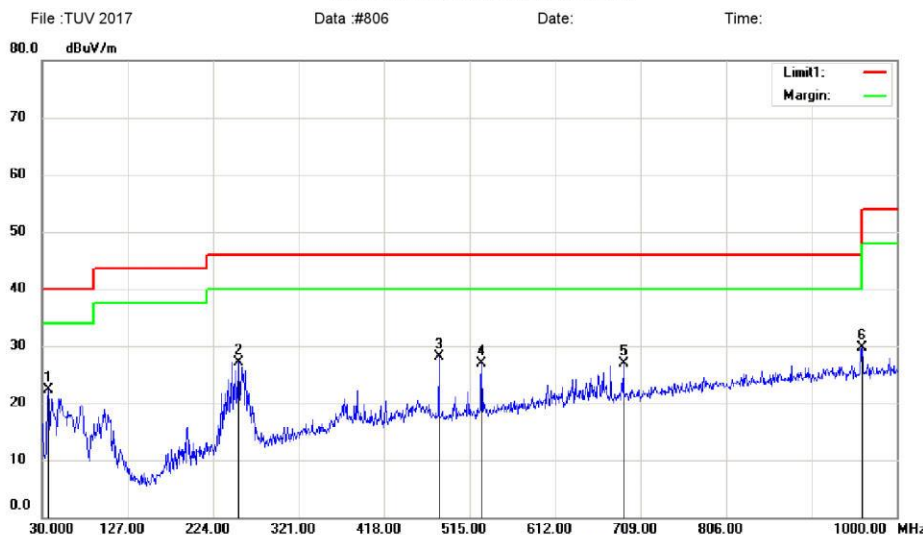

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5660
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	36.7900	38.08	-15.72	22.36	40.00	-17.64	QP		
2		253.1000	40.04	-12.96	27.08	46.00	-18.92	QP		
3		480.0800	35.26	-7.22	28.04	46.00	-17.96	QP		
4		528.5800	32.90	-6.09	26.81	46.00	-19.19	QP		
5		689.6000	29.87	-3.06	26.81	46.00	-19.19	QP		
6		960.2300	28.93	0.80	29.73	54.00	-24.27	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

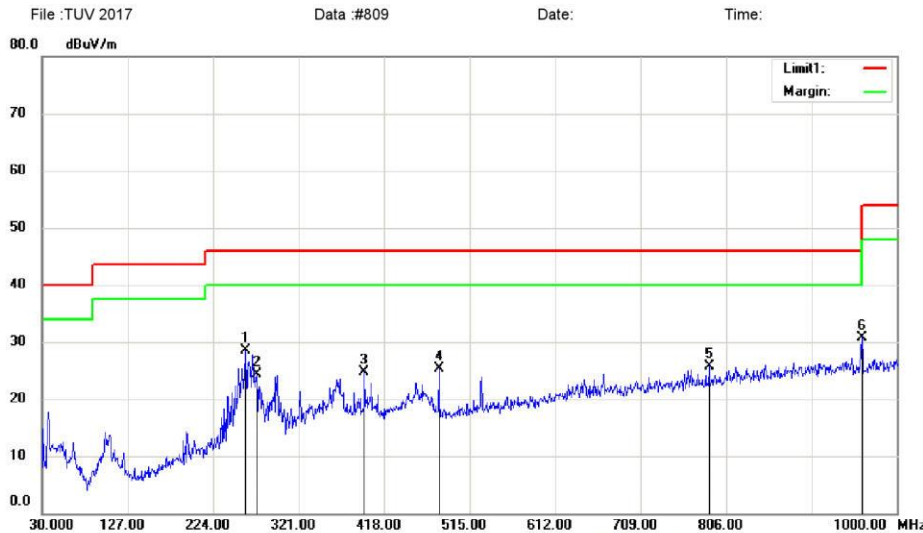

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5700
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	260.8600	40.75	-12.26	28.49	46.00	-17.51			QP	
2		273.4700	35.93	-11.72	24.21	46.00	-21.79			QP	
3		395.6900	33.33	-8.53	24.80	46.00	-21.20			QP	
4		480.0800	32.55	-7.22	25.33	46.00	-20.67			QP	
5		786.6000	27.08	-1.32	25.76	46.00	-20.24			QP	
6		960.2300	29.95	0.80	30.75	54.00	-23.25			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

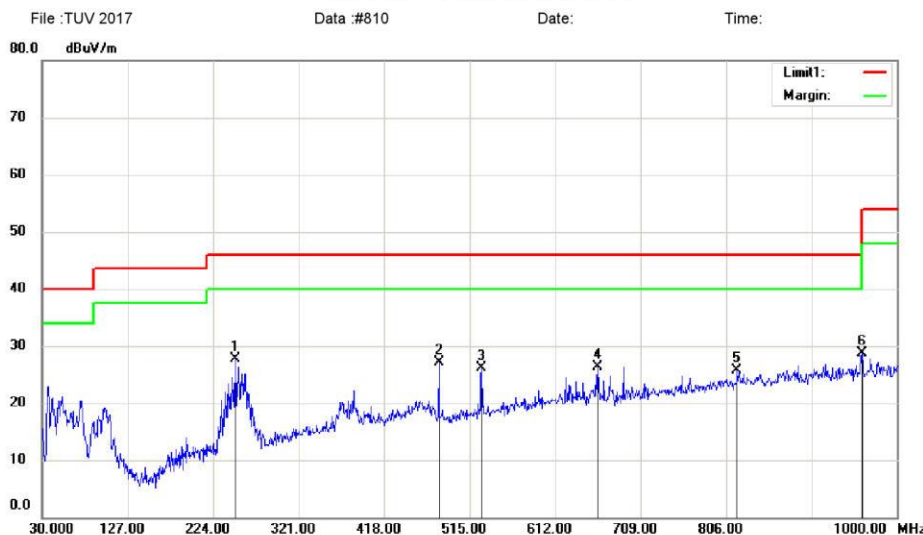

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5700
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	249.2200	40.88	-13.27	27.61	46.00	-18.39	QP			
2		480.0800	34.27	-7.22	27.05	46.00	-18.95	QP			
3		528.5800	32.14	-6.09	26.05	46.00	-19.95	QP			
4		660.5000	29.86	-3.51	26.35	46.00	-19.65	QP			
5		818.6100	26.53	-0.85	25.68	46.00	-20.32	QP			
6		960.2300	27.91	0.80	28.71	54.00	-25.29	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

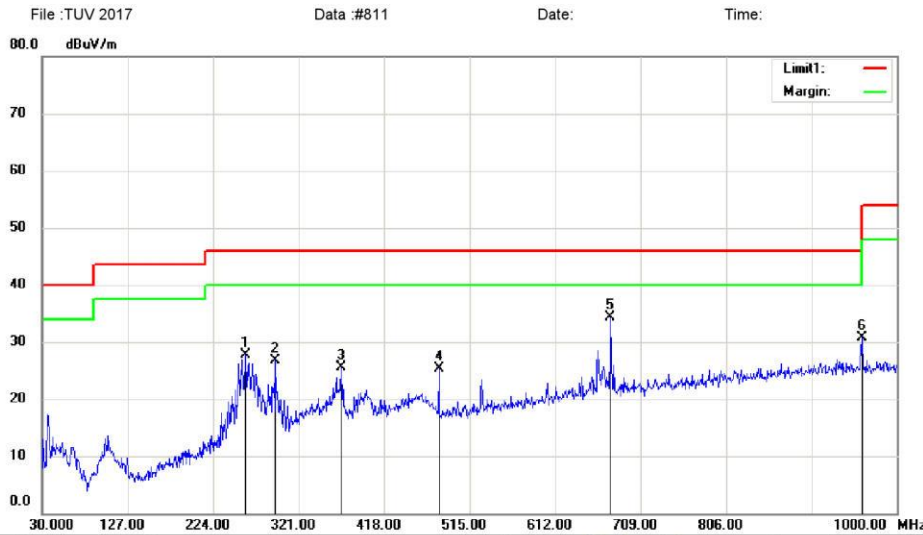

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5745
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		260.8600	40.00	-12.26	27.74	46.00	-18.26			QP	
2		294.8100	38.04	-11.40	26.64	46.00	-19.36			QP	
3		369.5000	34.51	-9.00	25.51	46.00	-20.49			QP	
4		480.0800	32.44	-7.22	25.22	46.00	-20.78			QP	
5	*	675.0500	37.54	-3.29	34.25	46.00	-11.75			QP	
6		960.2300	29.98	0.80	30.78	54.00	-23.22			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

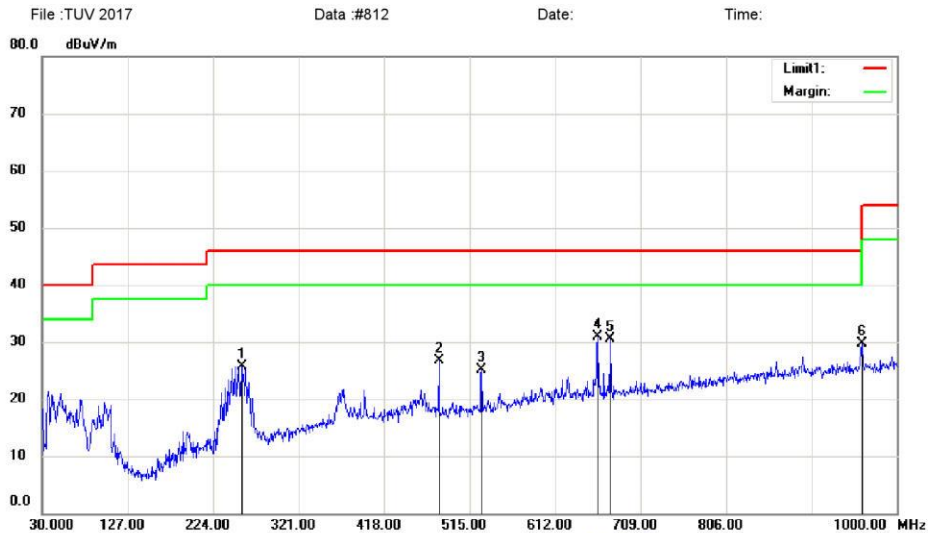

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5745
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		256.9800	38.32	-12.59	25.73	46.00	-20.27			QP	
2		480.0800	33.96	-7.22	26.74	46.00	-19.26			QP	
3		528.5800	31.13	-6.09	25.04	46.00	-20.96			QP	
4	*	660.5000	34.44	-3.51	30.93	46.00	-15.07			QP	
5		675.0500	33.72	-3.29	30.43	46.00	-15.57			QP	
6		960.2300	28.90	0.80	29.70	54.00	-24.30			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

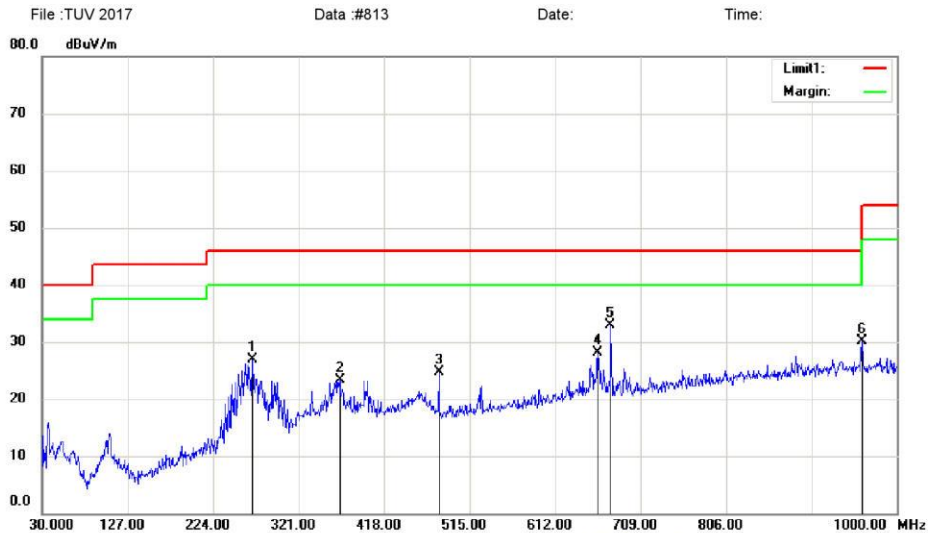

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5785
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		268.6200	38.80	-11.82	26.98	46.00	-19.02			QP	
2		367.5600	32.38	-9.04	23.34	46.00	-22.66			QP	
3		480.0800	31.85	-7.22	24.63	46.00	-21.37			QP	
4		660.5000	31.66	-3.51	28.15	46.00	-17.85			QP	
5	*	675.0500	36.25	-3.29	32.96	46.00	-13.04			QP	
6		960.2300	29.30	0.80	30.10	54.00	-23.90			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

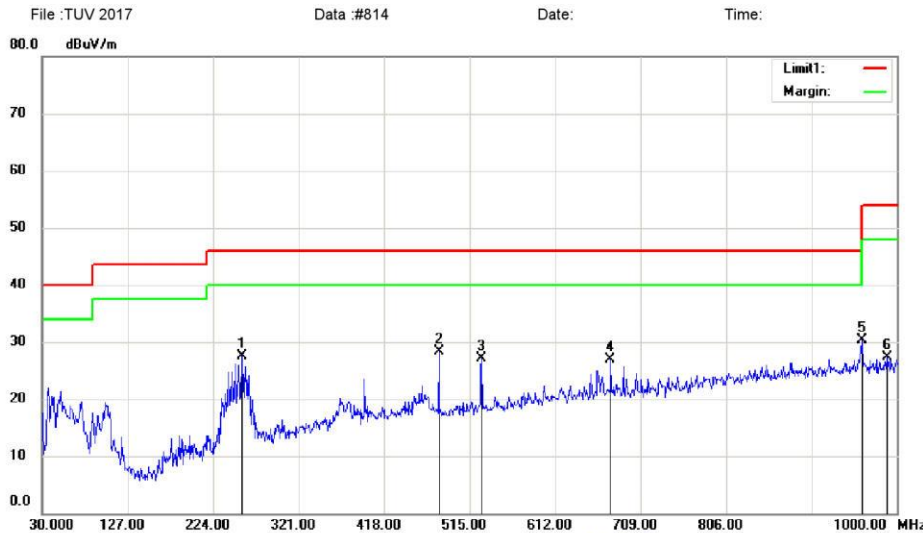

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5785
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		256.9800	40.03	-12.59	27.44	46.00	-18.56			QP	
2	*	480.0800	35.44	-7.22	28.22	46.00	-17.78			QP	
3		528.5800	33.12	-6.09	27.03	46.00	-18.97			QP	
4		675.0500	30.24	-3.29	26.95	46.00	-19.05			QP	
5		960.2300	29.56	0.80	30.36	54.00	-23.64			QP	
6		988.3600	26.23	1.13	27.36	54.00	-26.64			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

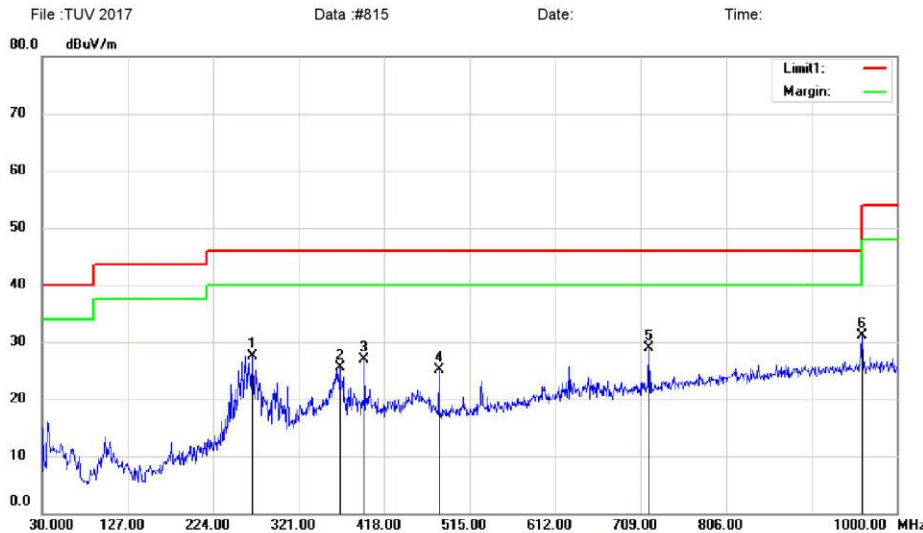

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5825
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		268.6200	39.34	-11.82	27.52	46.00	-18.48			QP	
2		367.5600	34.52	-9.04	25.48	46.00	-20.52			QP	
3		395.6900	35.50	-8.53	26.97	46.00	-19.03			QP	
4		480.0800	32.34	-7.22	25.12	46.00	-20.88			QP	
5	*	718.7000	31.44	-2.57	28.87	46.00	-17.13			QP	
6		960.2300	30.38	0.80	31.18	54.00	-22.82			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

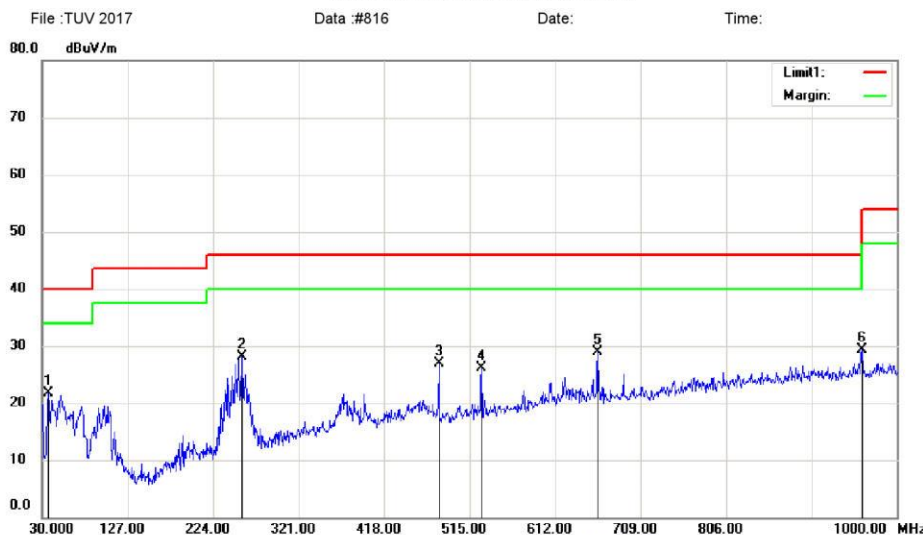

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11a 5825
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		36.7900	37.51	-15.72	21.79	40.00	-18.21	QP		
2		256.9800	40.62	-12.59	28.03	46.00	-17.97	QP		
3		480.0800	34.19	-7.22	26.97	46.00	-19.03	QP		
4		528.5800	32.29	-6.09	26.20	46.00	-19.80	QP		
5	*	660.5000	32.46	-3.51	28.95	46.00	-17.05	QP		
6		960.2300	28.59	0.80	29.39	54.00	-24.61	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

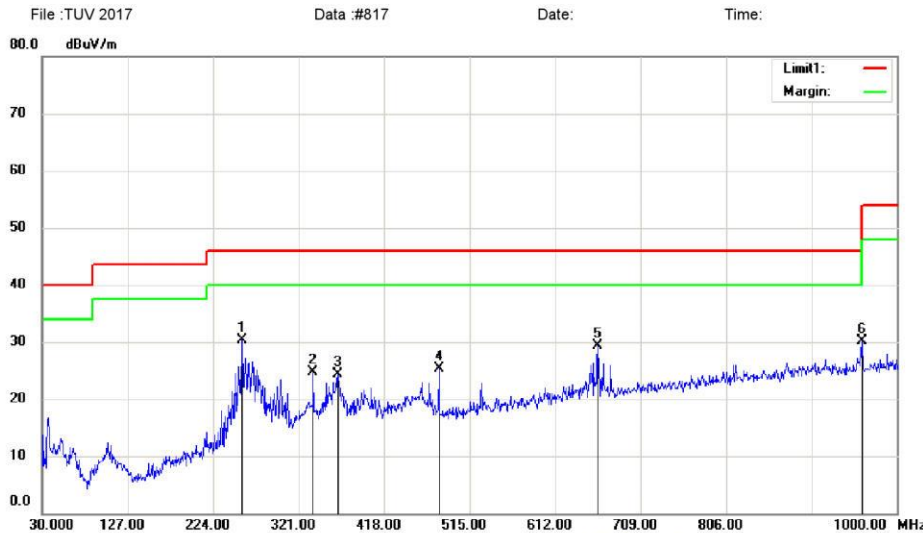

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11n 5180
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	256.9800	42.84	-12.59	30.25	46.00	-15.75	QP			
2		337.4900	34.49	-9.84	24.65	46.00	-21.35	QP			
3		365.6200	33.32	-9.07	24.25	46.00	-21.75	QP			
4		480.0800	32.54	-7.22	25.32	46.00	-20.68	QP			
5		660.5000	32.80	-3.51	29.29	46.00	-16.71	QP			
6		960.2300	29.39	0.80	30.19	54.00	-23.81	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

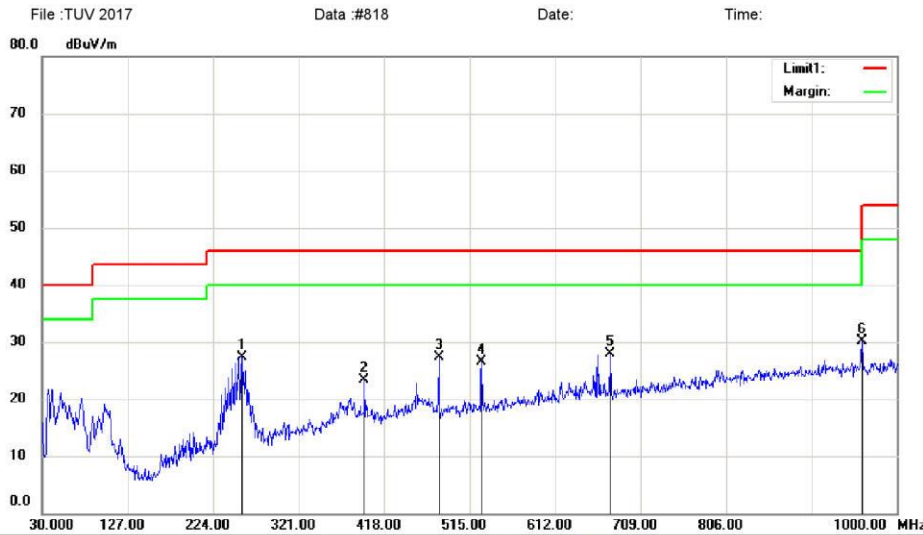

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11n 5180
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		256.9800	39.94	-12.59	27.35	46.00	-18.65	QP		
2		395.6900	31.77	-8.53	23.24	46.00	-22.76	QP		
3		480.0800	34.57	-7.22	27.35	46.00	-18.65	QP		
4		528.5800	32.60	-6.09	26.51	46.00	-19.49	QP		
5	*	675.0500	31.13	-3.29	27.84	46.00	-18.16	QP		
6		960.2300	29.36	0.80	30.16	54.00	-23.84	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

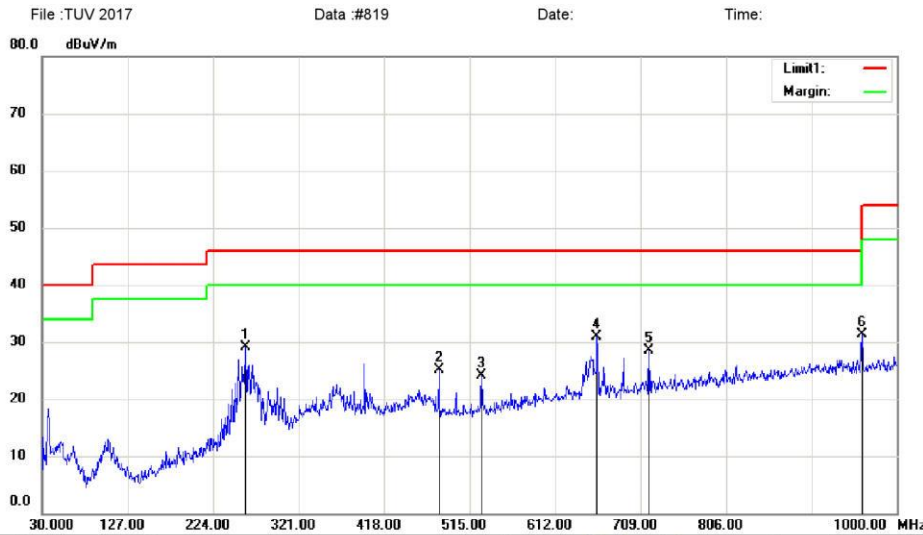

Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11n 5200
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		260.8600	41.33	-12.26	29.07	46.00	-16.93			QP	
2		480.0800	32.29	-7.22	25.07	46.00	-20.93			QP	
3		528.5800	30.24	-6.09	24.15	46.00	-21.85			QP	
4	*	659.5300	34.40	-3.52	30.88	46.00	-15.12			QP	
5		718.7000	31.12	-2.57	28.55	46.00	-17.45			QP	
6		960.2300	30.54	0.80	31.34	54.00	-22.66			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

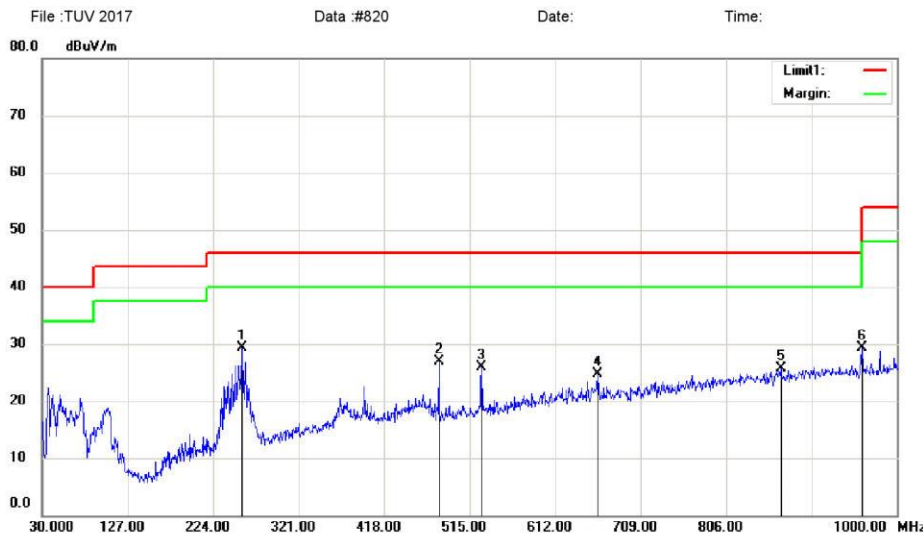

Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 55 %
 EUT: Label maker
 M/N: Label Writer Wireless
 Mode: 11n 5200
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	256.9800	41.90	-12.59	29.31	46.00	-16.69	QP			
2		480.0800	34.15	-7.22	26.93	46.00	-19.07	QP			
3		528.5800	32.07	-6.09	25.98	46.00	-20.02	QP			
4		660.5000	28.21	-3.51	24.70	46.00	-21.30	QP			
5		868.0800	25.90	-0.25	25.65	46.00	-20.35	QP			
6		960.2300	28.43	0.80	29.23	54.00	-24.77	QP			

*:Maximum data x:Over limit !:over margin

Operator: KK