

PEAK OUTPUT POWER (RADIATED).

Highest Channel: 2480 MHz.

Report No:
18878RET.101

Date: 2003-12-02

FET45_00.DOC

Page: 21 of 46


Annex A

Section 15.247 Subclause (c). Band-edge of conducted emissions (Transmitter)**SPECIFICATION**

Emissions outside the frequency band in which the intentional radiator is operating shall be at least 20dB below the highest level of the desired power.

RESULTS:


1. LOW FREQUENCY SECTION 2402 MHz (HOPPING OFF). See next plot.

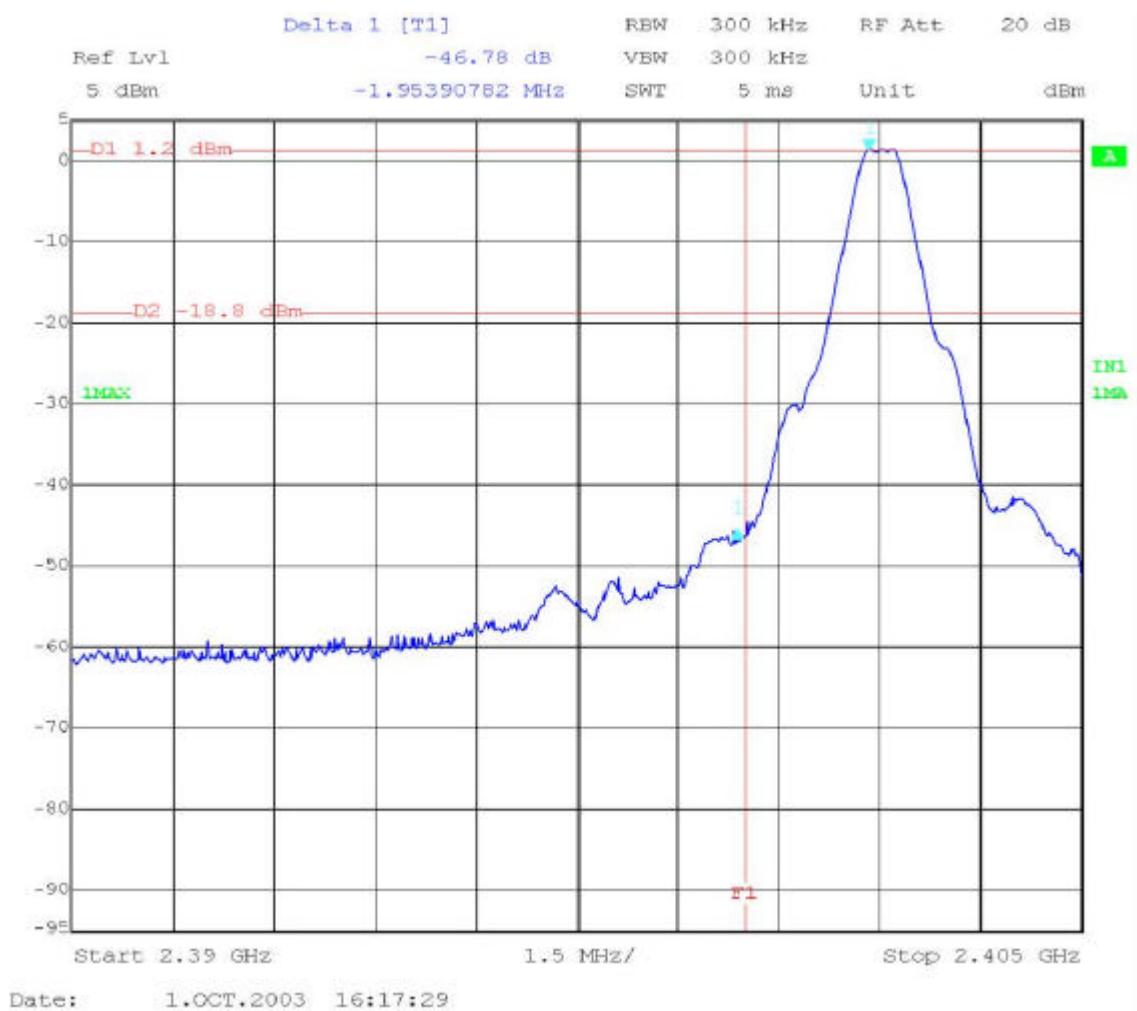

Verdict: PASS

Report No: 18878RET.101		Page: 22 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A


2. HIGH FREQUENCY SECTION 2480 MHz (HOPPING OFF). See next plot.

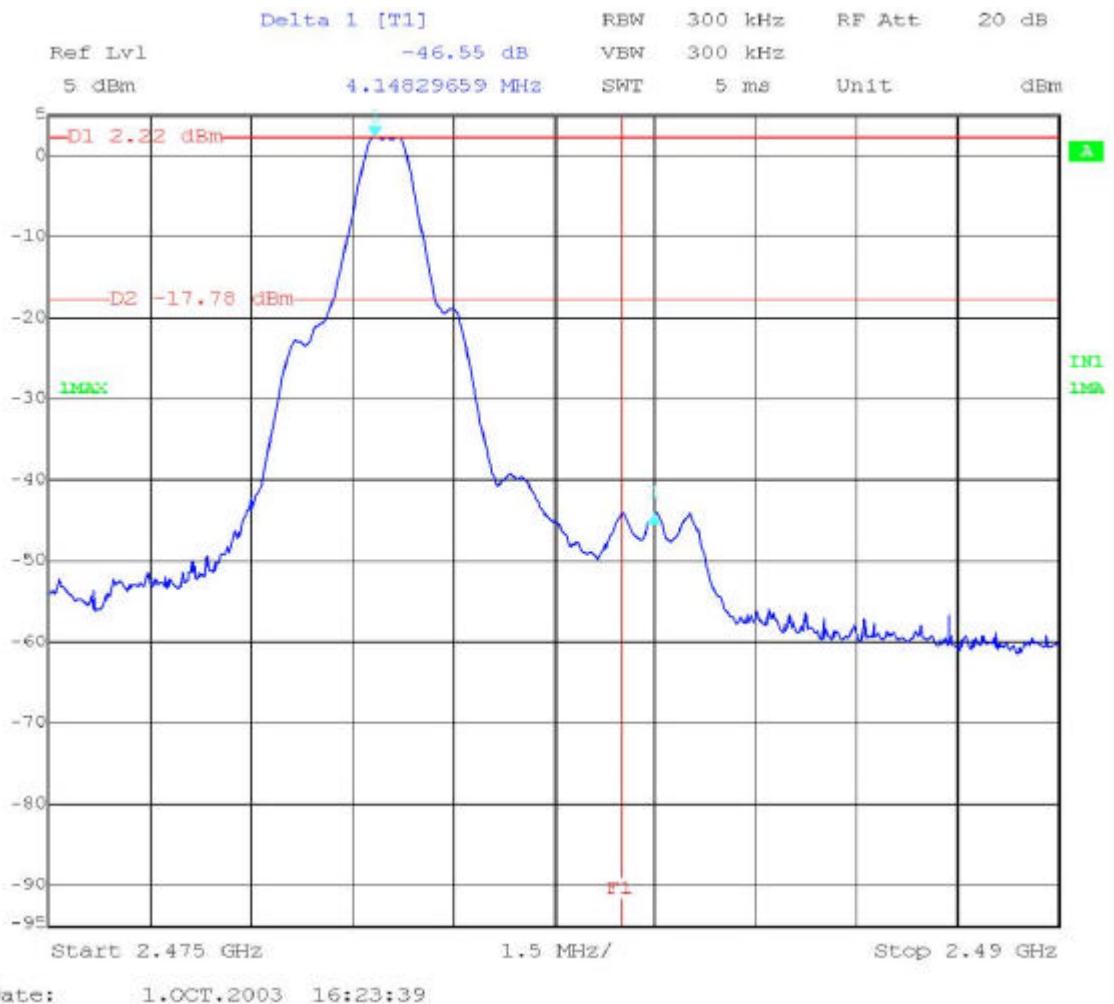

Verdict: PASS

Report No: 18878RET.101		Page: 23 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A


3. LOW FREQUENCY SECTION (HOPPING ON). See next plot.

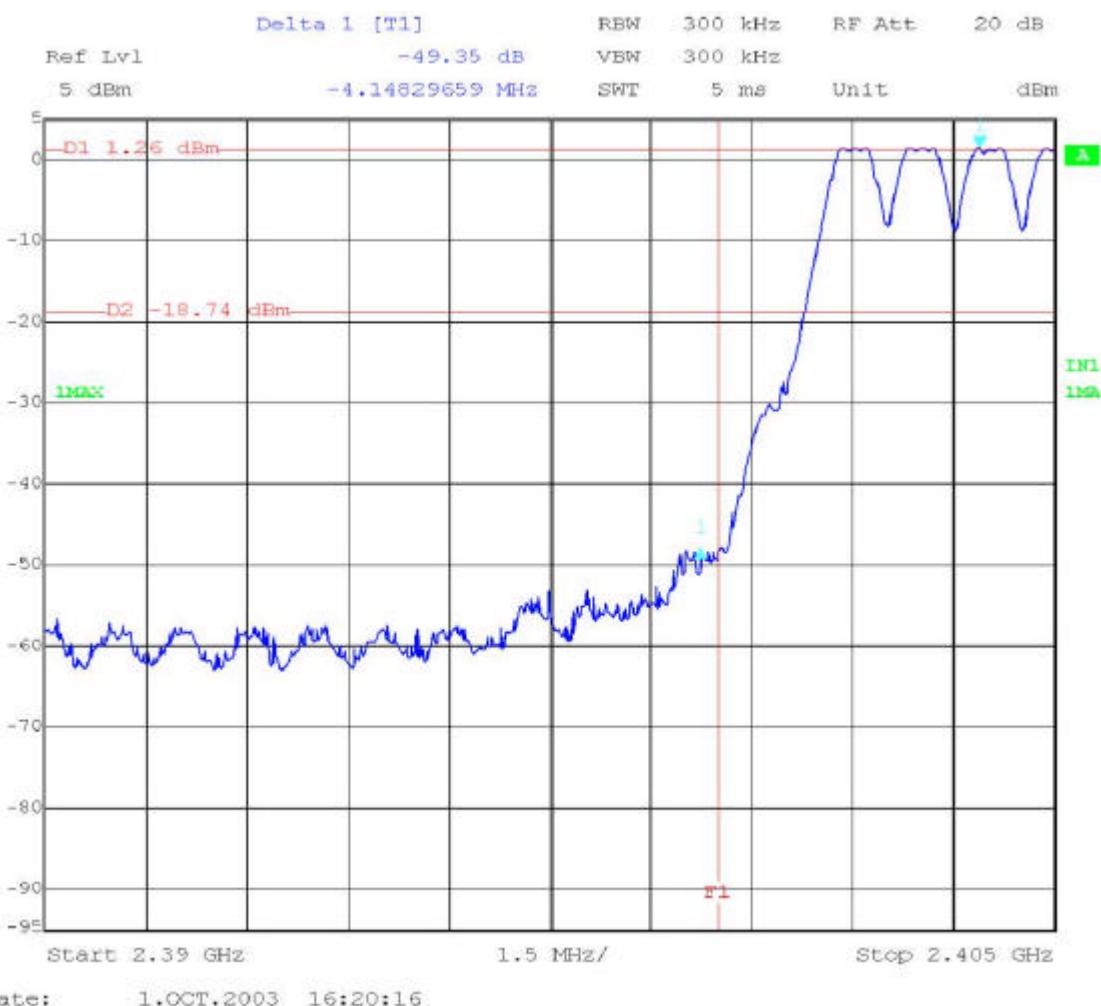

Verdict: PASS

Report No: 18878RET.101		Page: 24 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A

4. HIGH FREQUENCY SECTION (HOPPING ON). See next plot.

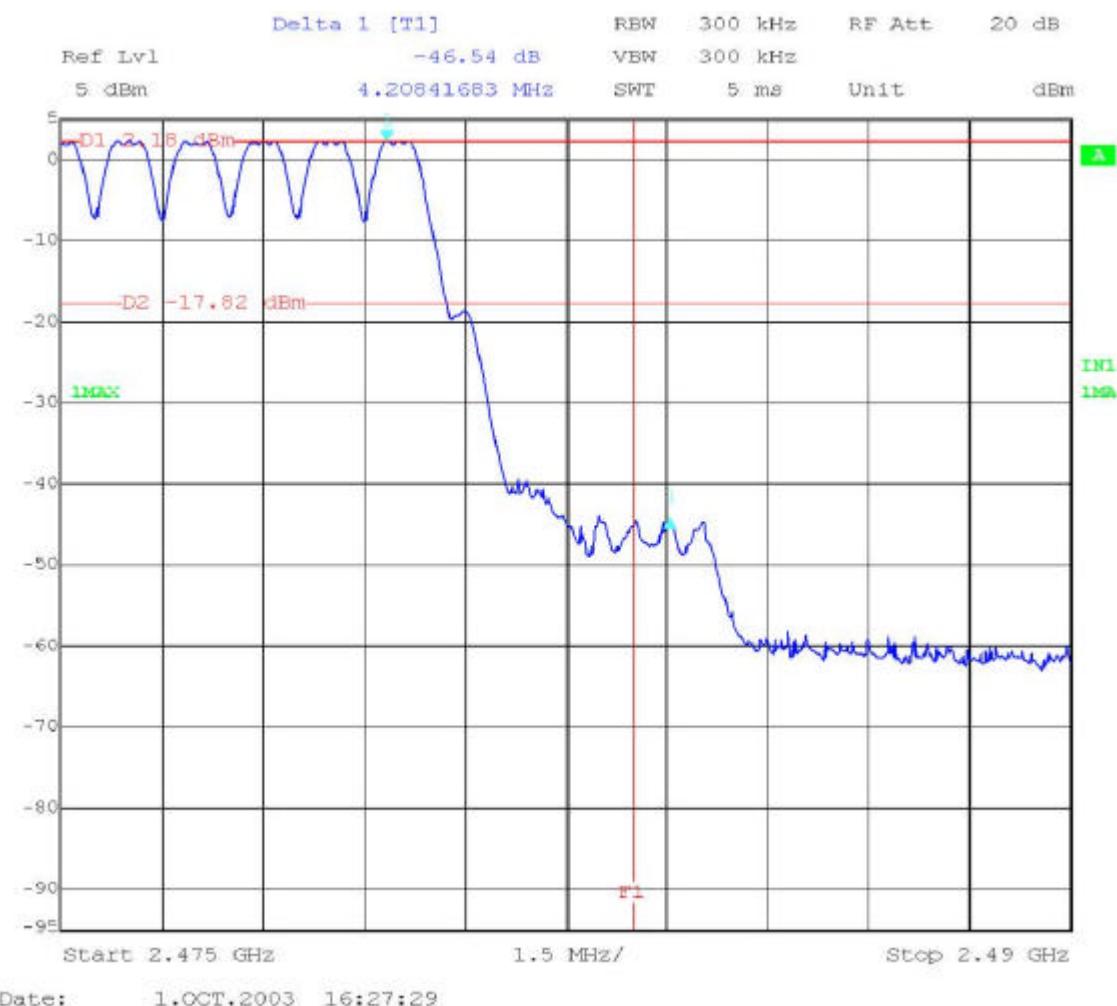

Verdict: PASS

Report No: 18878RET.101		Page: 25 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A


Section 15.247 Subclause (c). Emission limitations conducted (Transmitter)

SPECIFICATION

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

RESULTS:

1. LOWEST CHANNEL (2402 MHz): 30 MHz-25 GHz (see next plot).

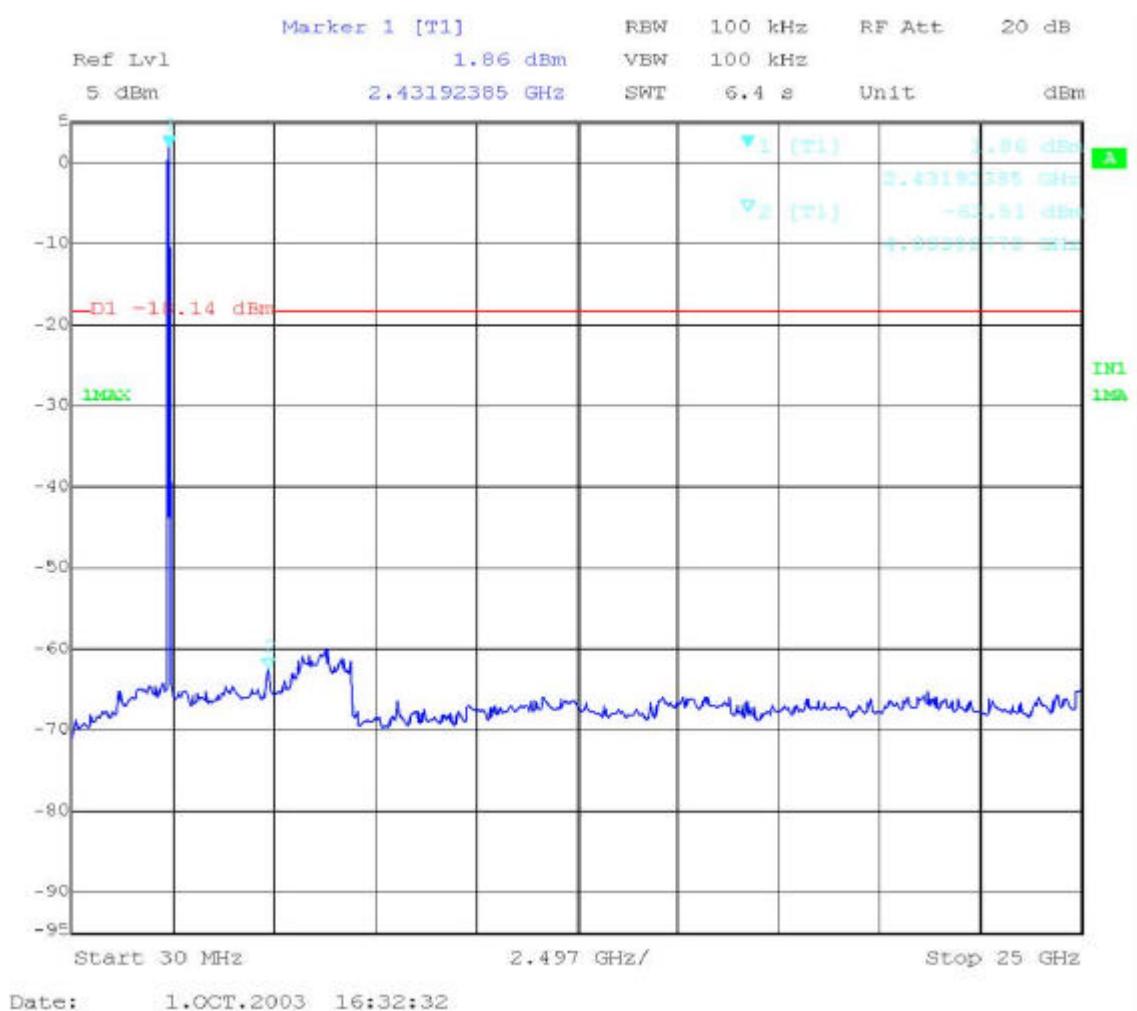


Note: The peak above the limit is the carrier frequency.

Verdict: PASS

Report No: 18878RET.101		Page: 26 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A


2. MIDDLE CHANNEL (2441 MHz): 30 MHz-25 GHz (see next plot).

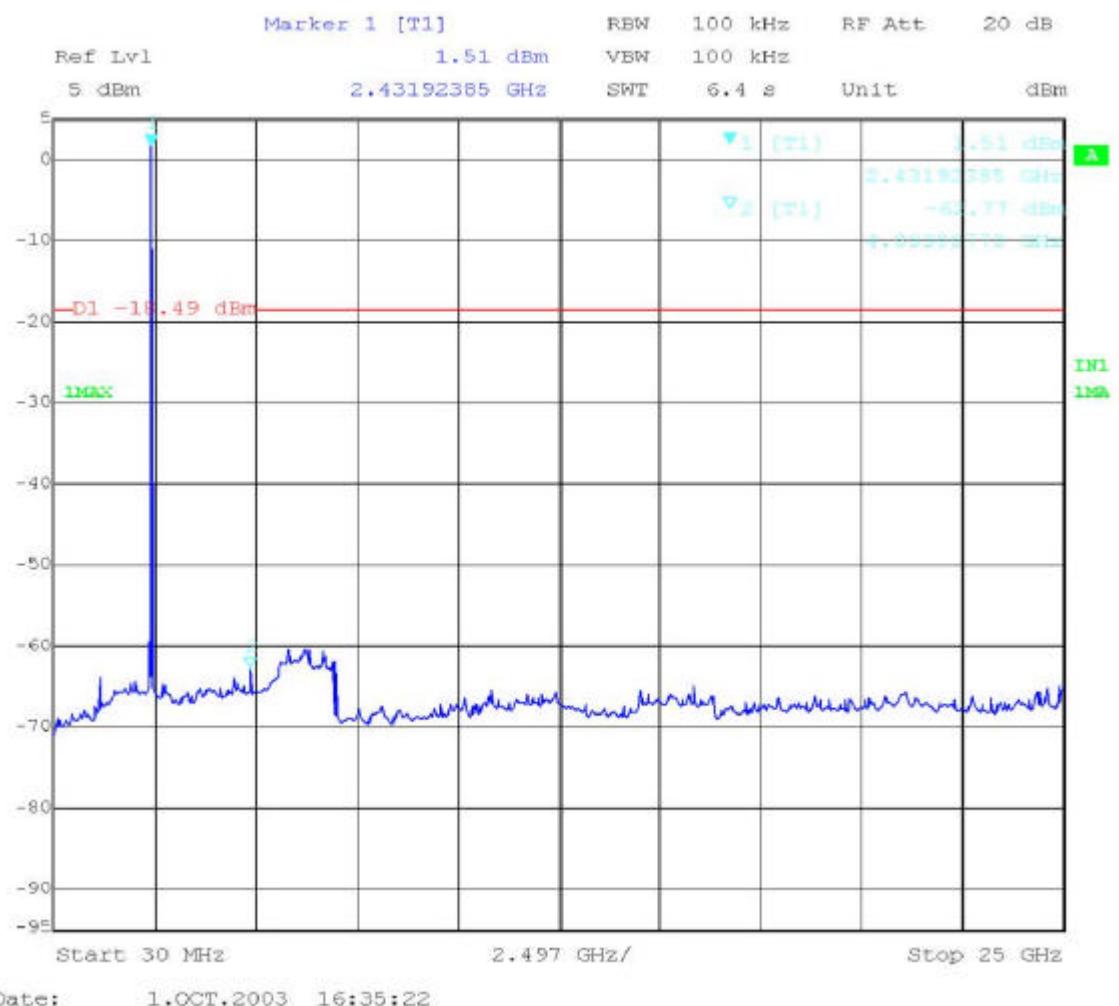

Note: The peak above the limit is the carrier frequency.

Verdict: PASS

3. HIGH CHANNEL (2480 MHz): 30 MHz-25 GHz (see next plot).

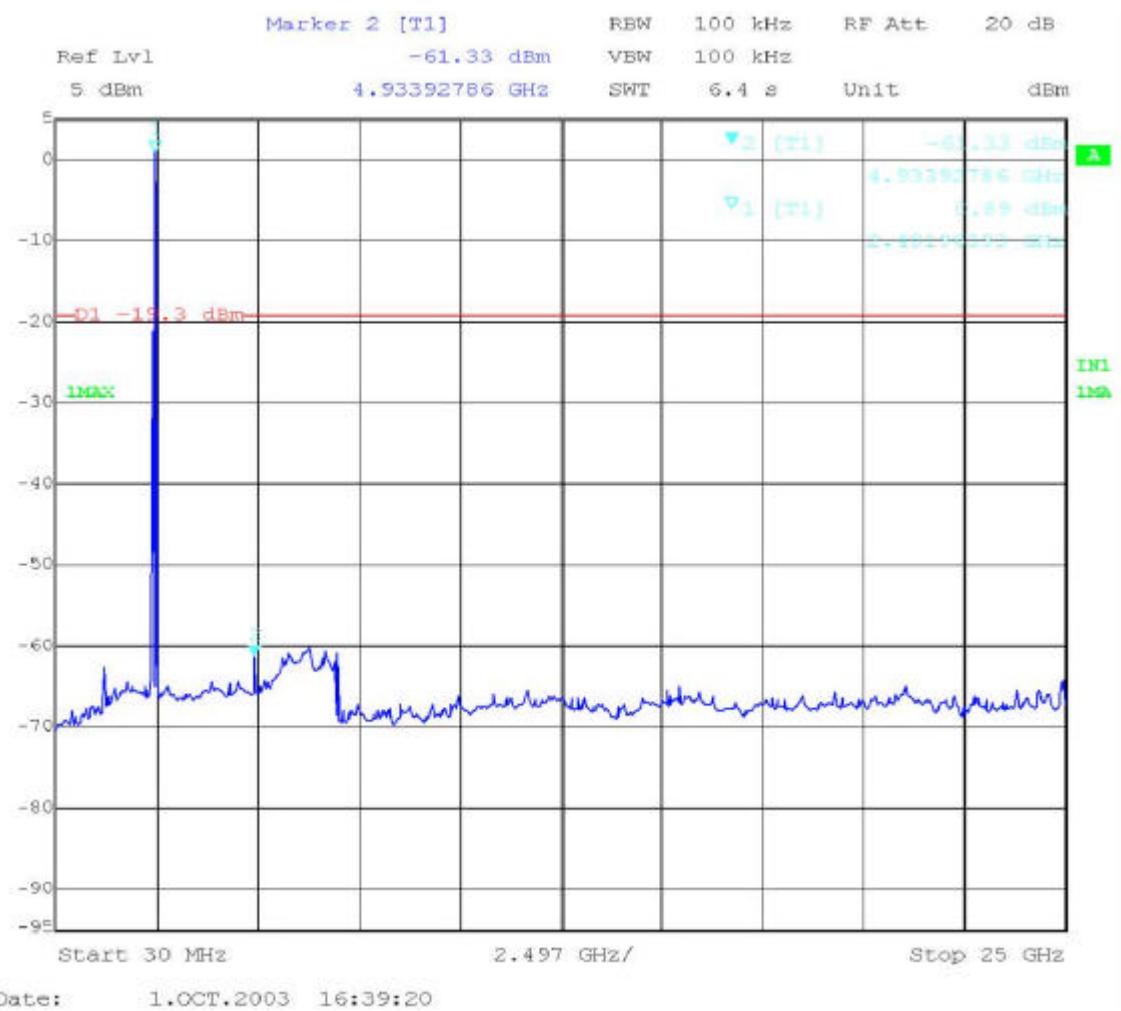

Note: The peak above the limit is the carrier frequency.

Verdict: PASS

Report No:
18878RET.101

Date: 2003-12-02

FET45_00.DOC

Page: 28 of 46

Annex A

Section 15.247 Subclause (c). Emission limitations radiated (Transmitter)**SPECIFICATION**

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

The equipment transmits continuously in the selected channel so it is not necessary a duty cycle correction factor.

Report No: 18878RET.101		Page: 29 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A

1. TRANSMITTER OPERATING IN CHANNEL: LOWEST (2402 MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals found.

Frequency range 1 GHz-25 GHz.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1201.52101	Horizontal	Peak	36.20	± 4.0
1201. 52101	Horizontal	Average	34.66	± 4.0

No spurious signals found at the harmonics frequencies and inside the restricted bands 2310-2390 MHz and 2483.5-2500 MHz

Verdict: PASS.

2. TRANSMITTER OPERATING IN CHANNEL: MIDDLE (2441 MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals found.

Frequency range 1 GHz-25 GHz.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1220.84168	Horizontal	Peak	37.48	± 4.0
1220.84168	Horizontal	Average	35.81	± 4.0

No spurious signals found at the harmonics frequencies and inside the restricted bands 2310-2390 MHz and 2483.5-2500 MHz

Verdict: PASS.

Report No: 18878RET.101		Page: 30 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A

3. TRANSMITTER OPERATING IN CHANNEL: HIGHEST (2480 MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals found.

Frequency range 1 GHz-25 GHz.


Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1239.87976	Horizontal	Peak	37.69	± 4.0
1239.87976	Horizontal	Average	36.53	± 4.0

No spurious signals found at the harmonics frequencies and inside the restricted bands 2310-2390 MHz and 2483.5-2500 MHz

Verdict: PASS.

Report No: 18878RET.101		Page: 31 of 46
Date: 2003-12-02		Annex A

FREQUENCY RANGE 30 MHz-1000 MHz.

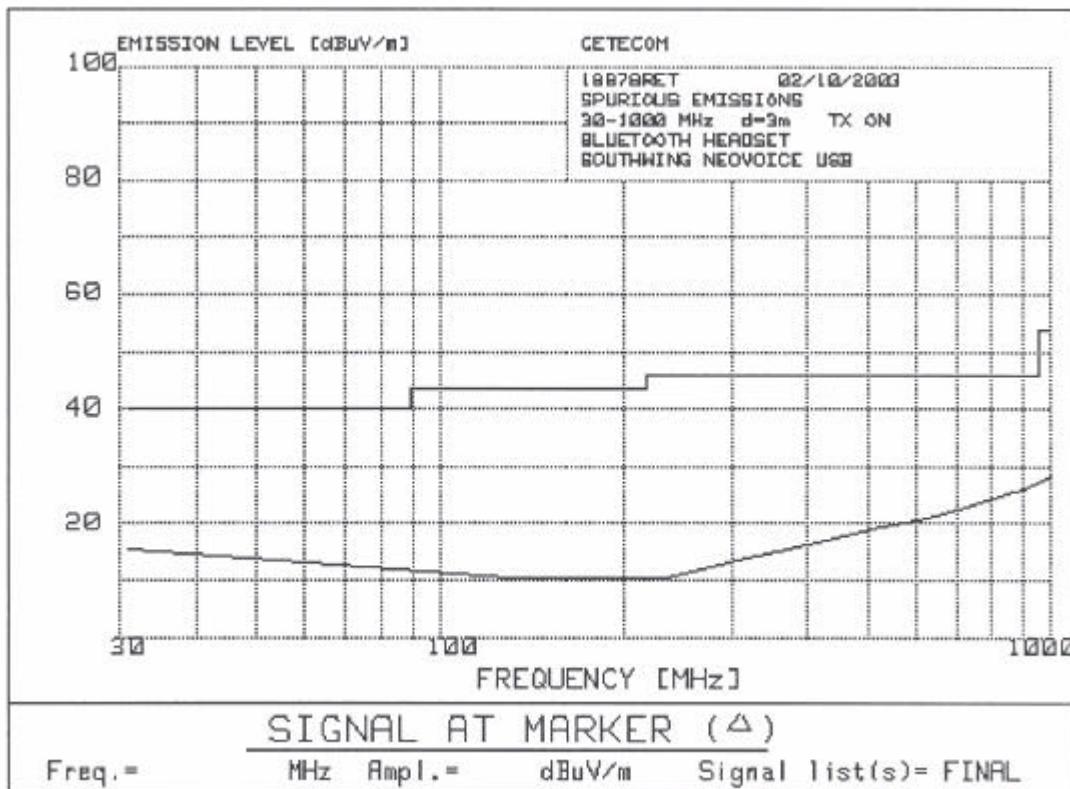

Resolution bandwidth = 100 kHz.


Video bandwidth = 100 kHz.

(This plot is valid for all three channels).

Report No: 18878RET.101		Page: 32 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A


FREQUENCY RANGE 1 GHz to 2.9 GHz.

CHANNEL: Lowest (2402 MHz).

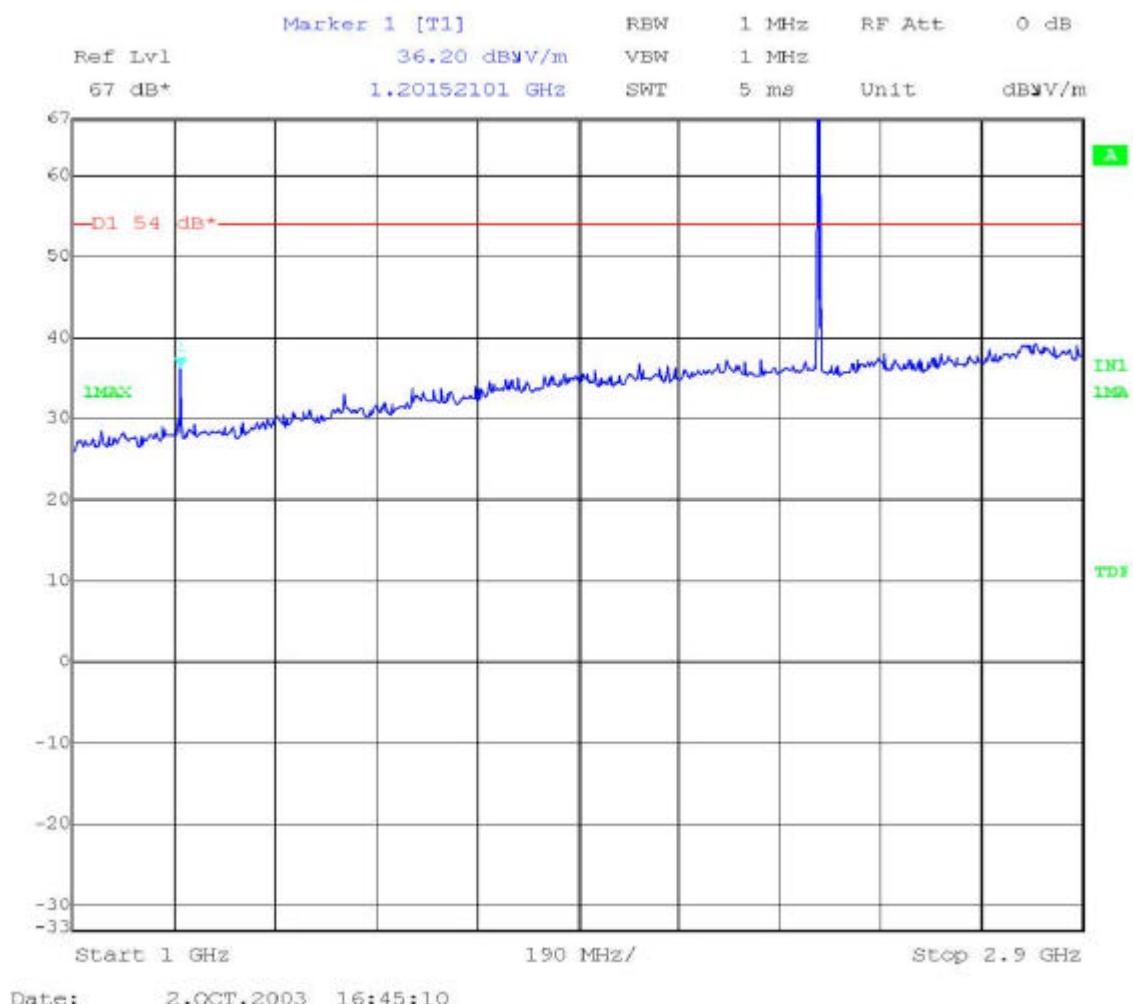

Note: The peak above the limit is the carrier frequency.

Report No: 18878RET.101		Page: 33 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A

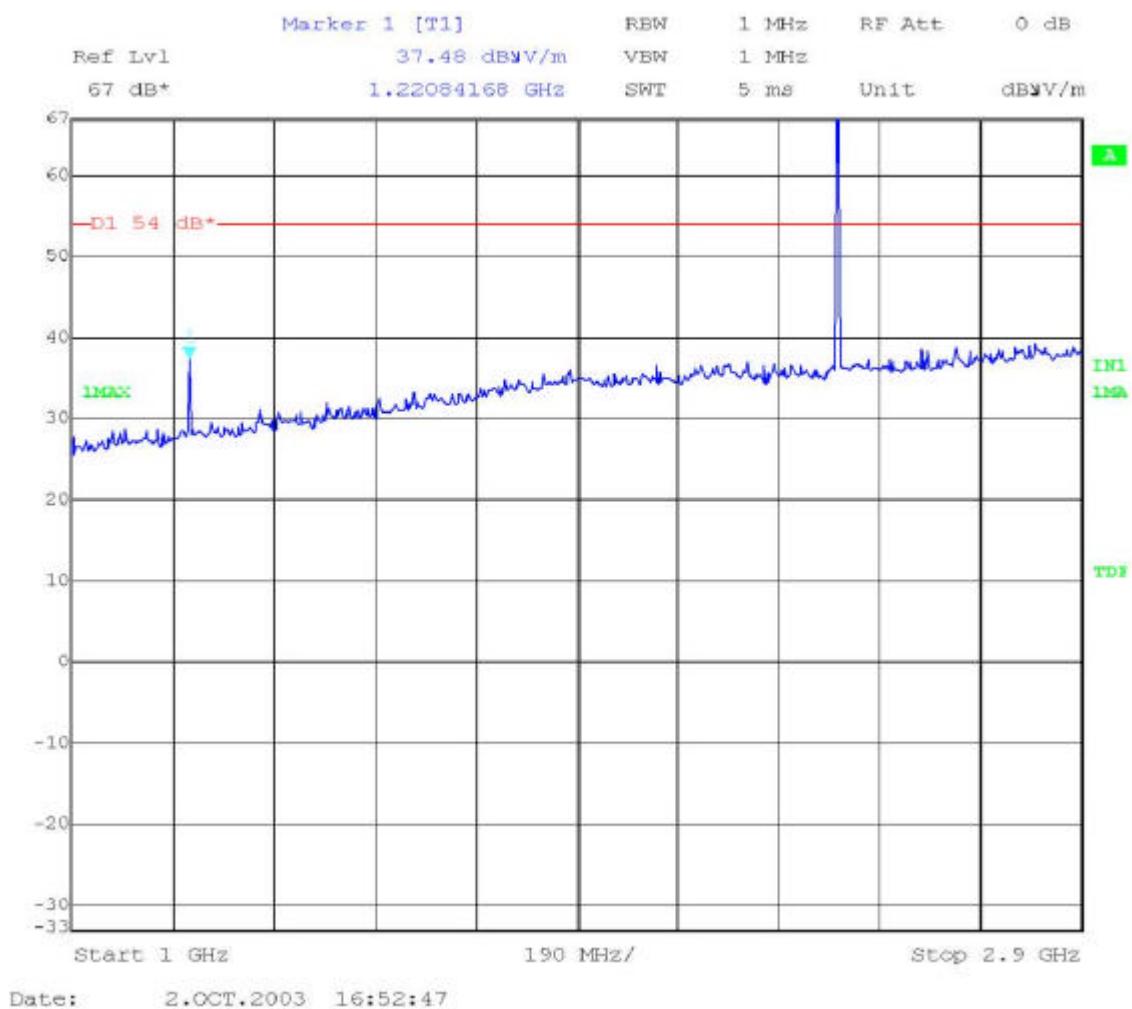CHANNEL: Middle (2441 MHz).


Note: The peak above the limit is the carrier frequency.

Report No:
18878RET.101

Page: 34 of 46

Date: 2003-12-02

Annex A

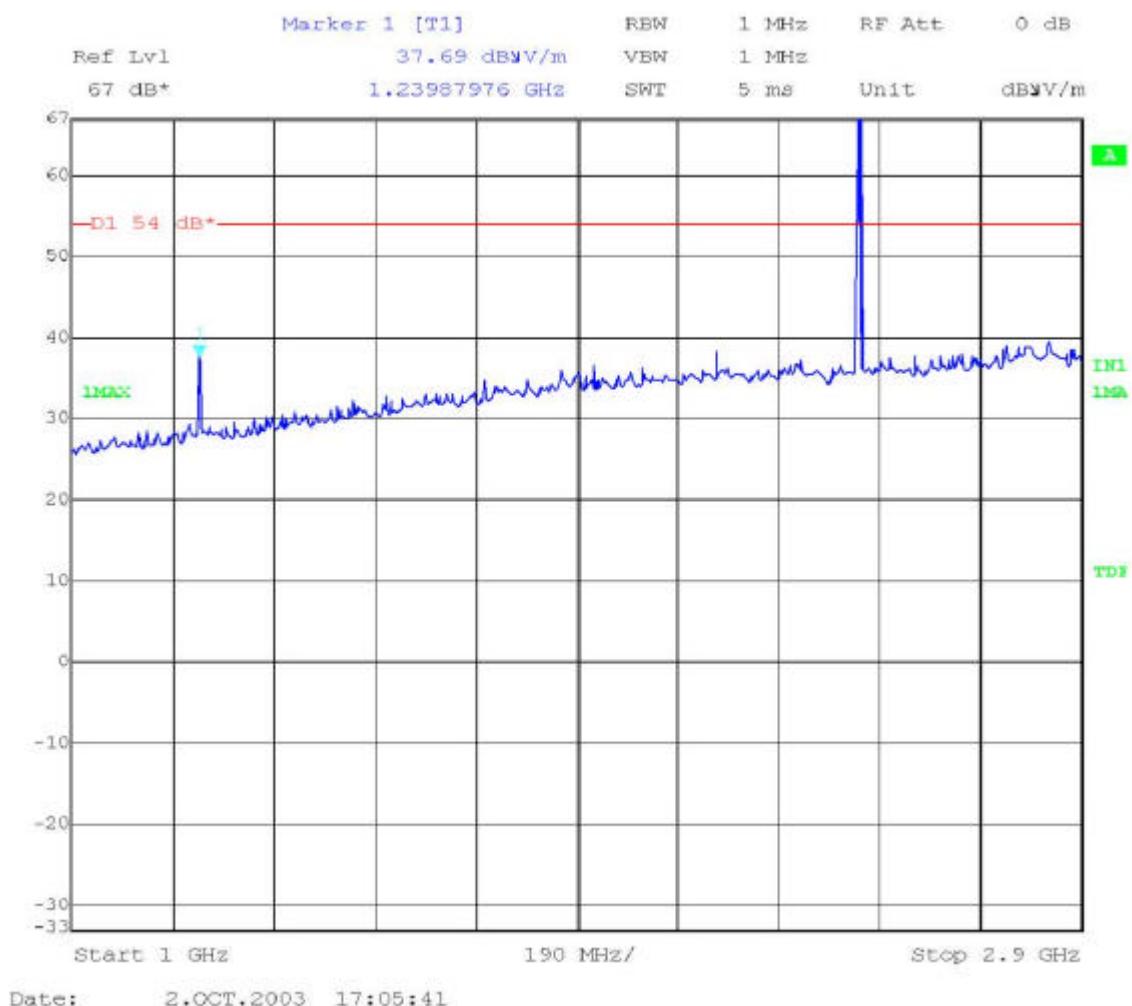CHANNEL: Highest (2480 MHz).

Note: The peak above the limit is the carrier frequency.


Report No:
18878RET.101

Page: 35 of 46

Date: 2003-12-02

Annex A


FREQUENCY RANGE 2.9 GHz to 12.75 GHz.

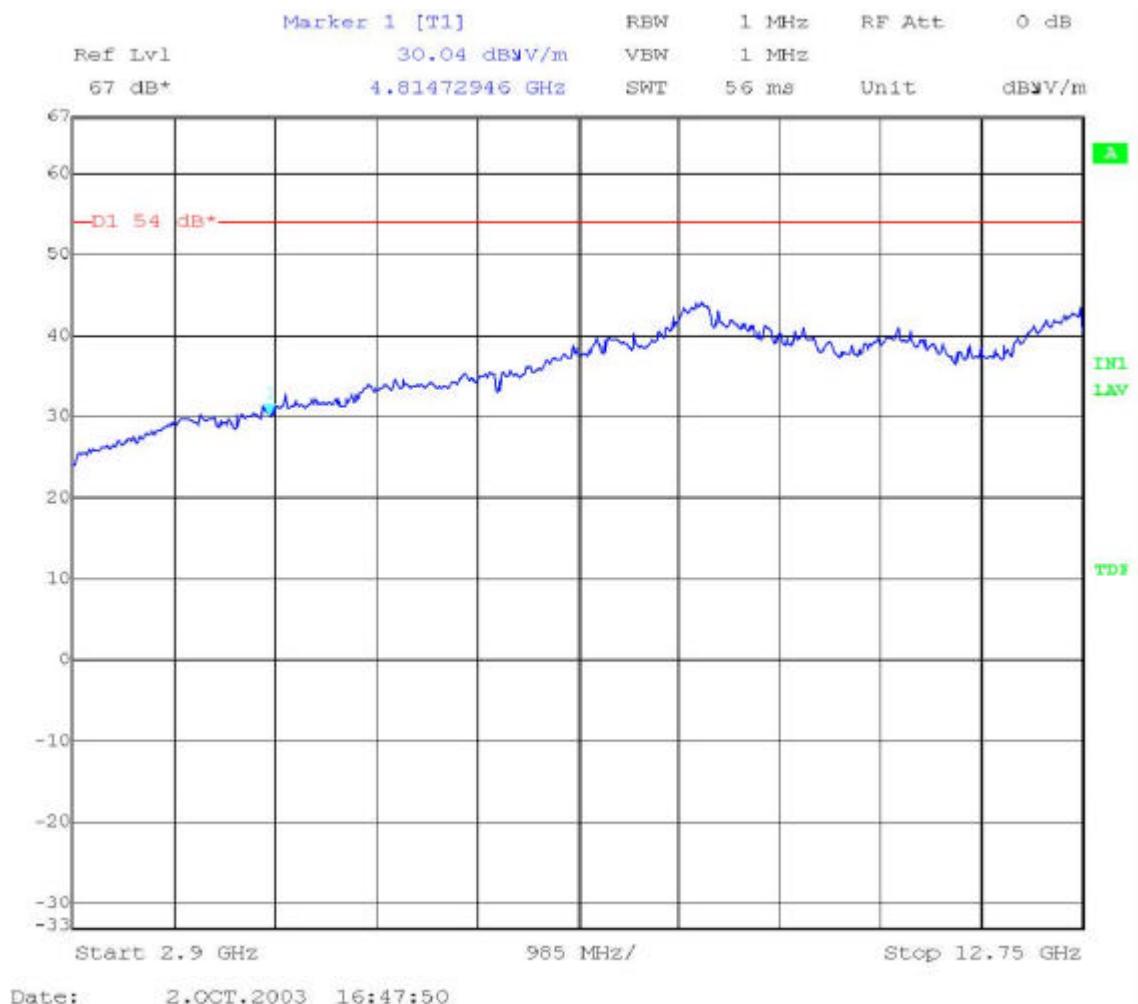CHANNEL: Lowest (2402 MHz).Report No:
18878RET.101


Page: 36 of 46

Date: 2003-12-02

Annex A

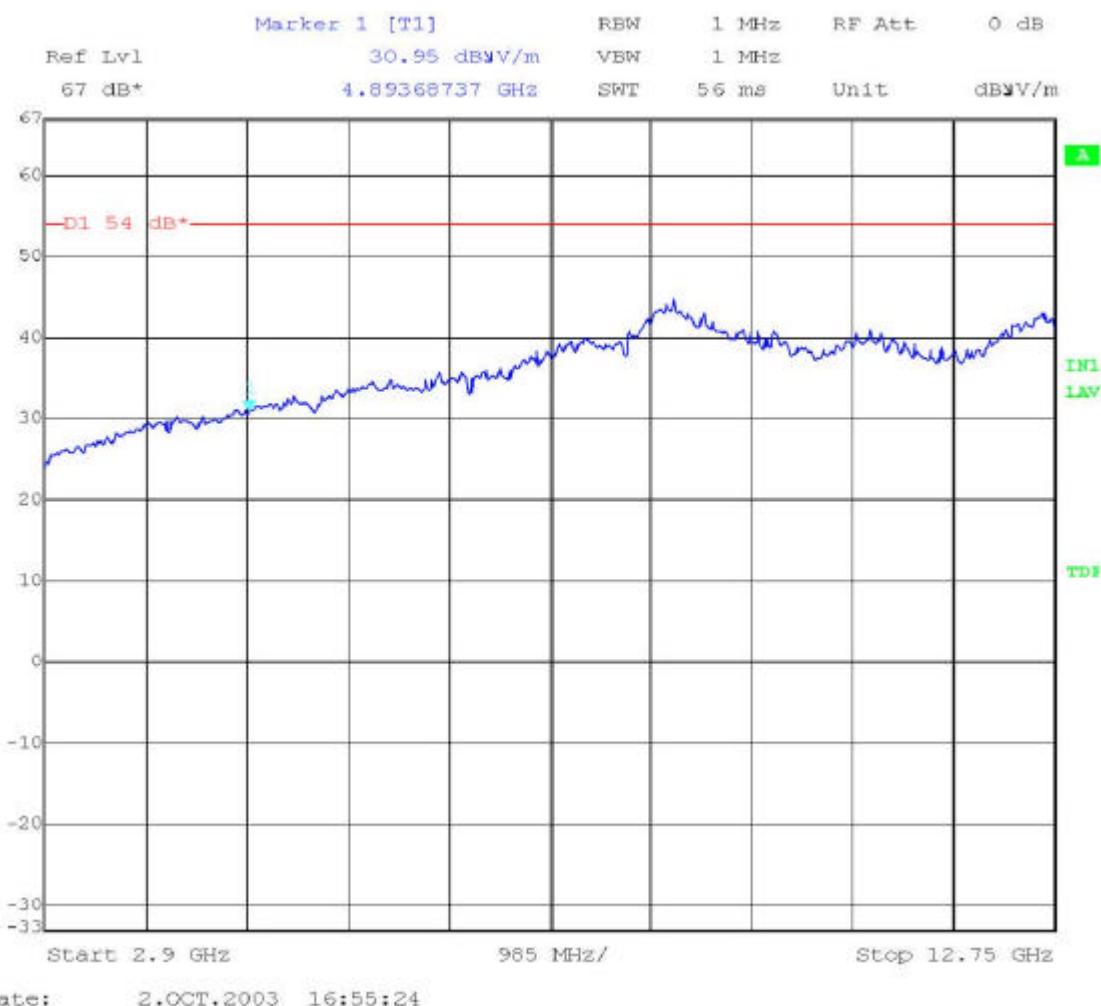
CHANNEL: Middle (2441 MHz).

Report No: 18878RET.101		Page: 37 of 46
Date: 2003-12-02		Annex A

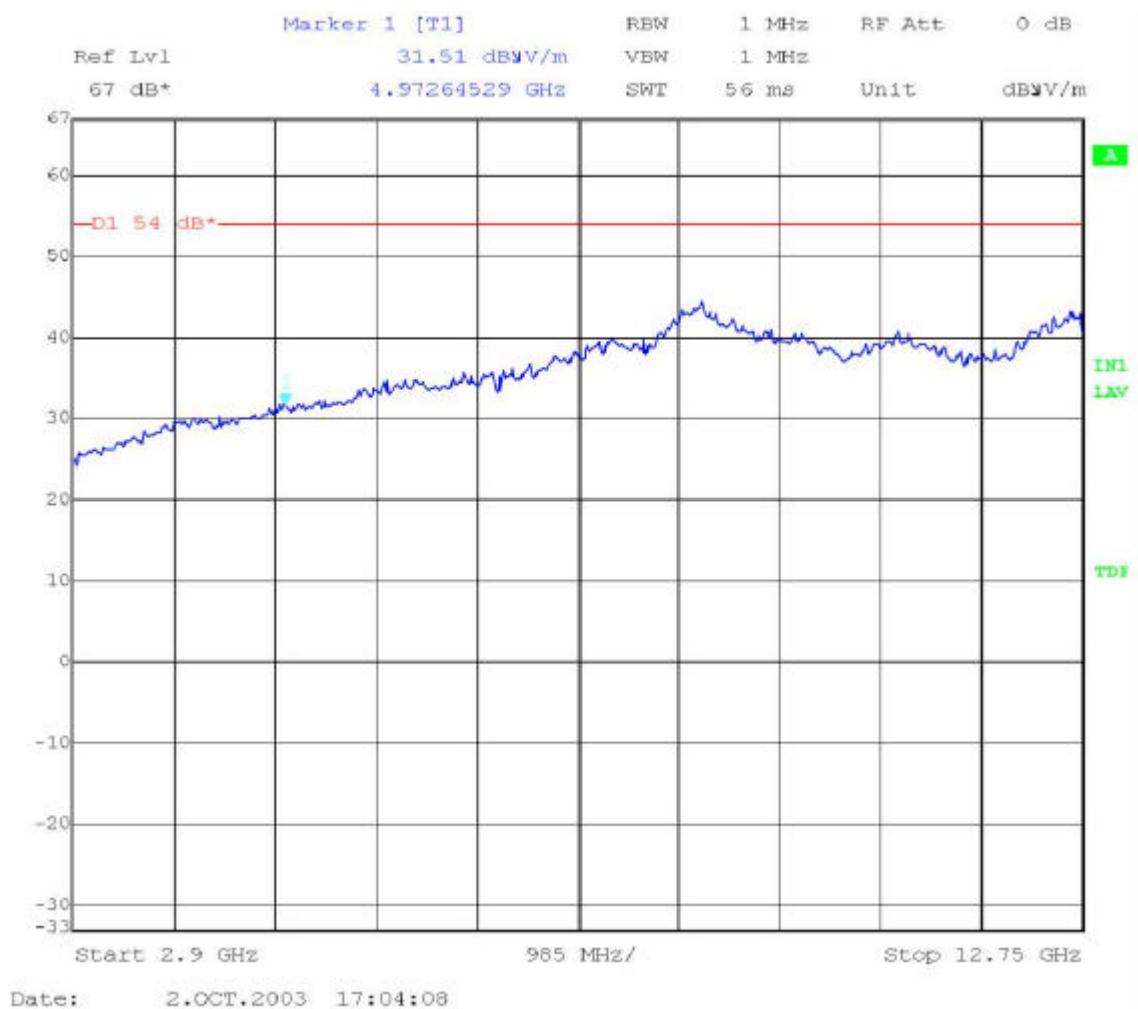CHANNEL: Highest (2480 MHz).

Report No: 18878RET.101		Page: 38 of 46
Date: 2003-12-02		Annex A


FREQUENCY RANGE 12.75 GHz to 18 GHz.

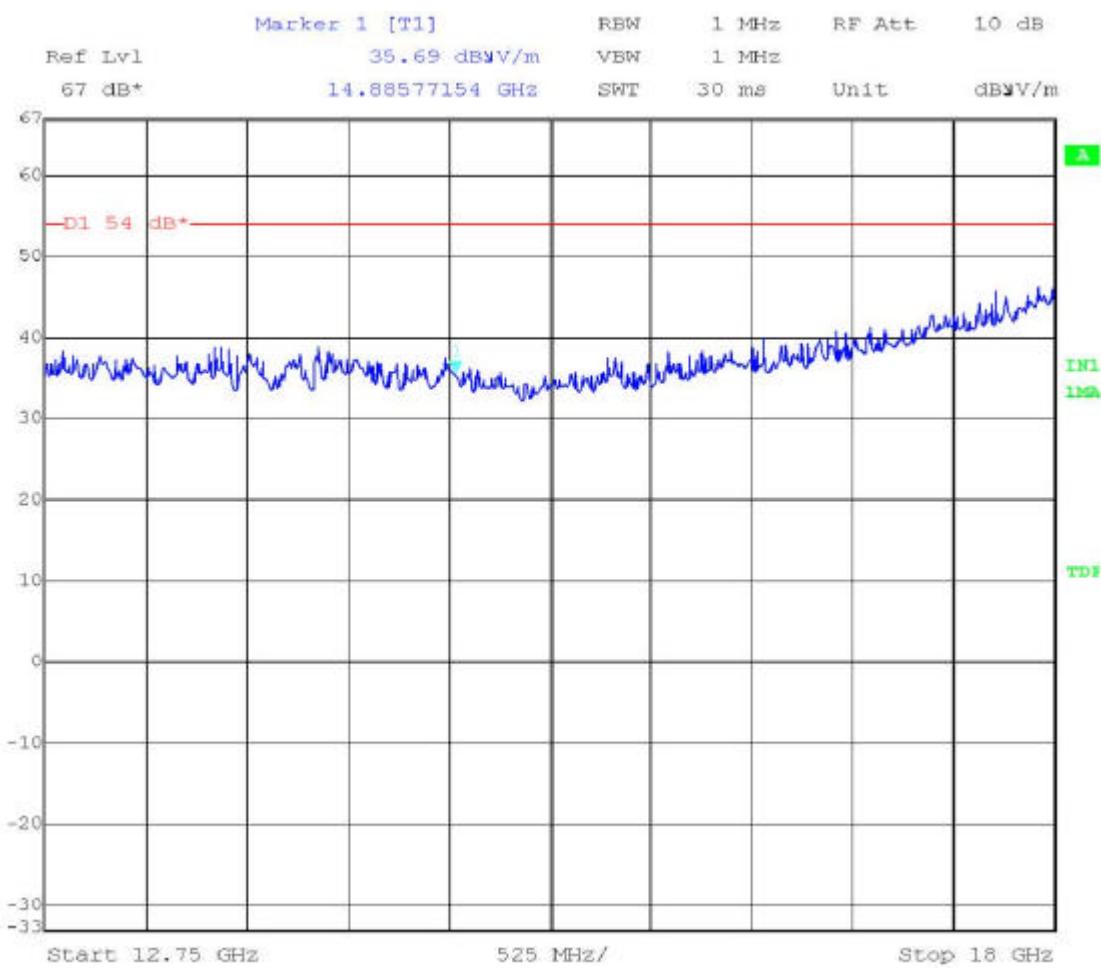

(This plot is valid for all three channels).

Report No: 18878RET.101		Page: 39 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A

FREQUENCY RANGE 18 GHz to 25 GHz.

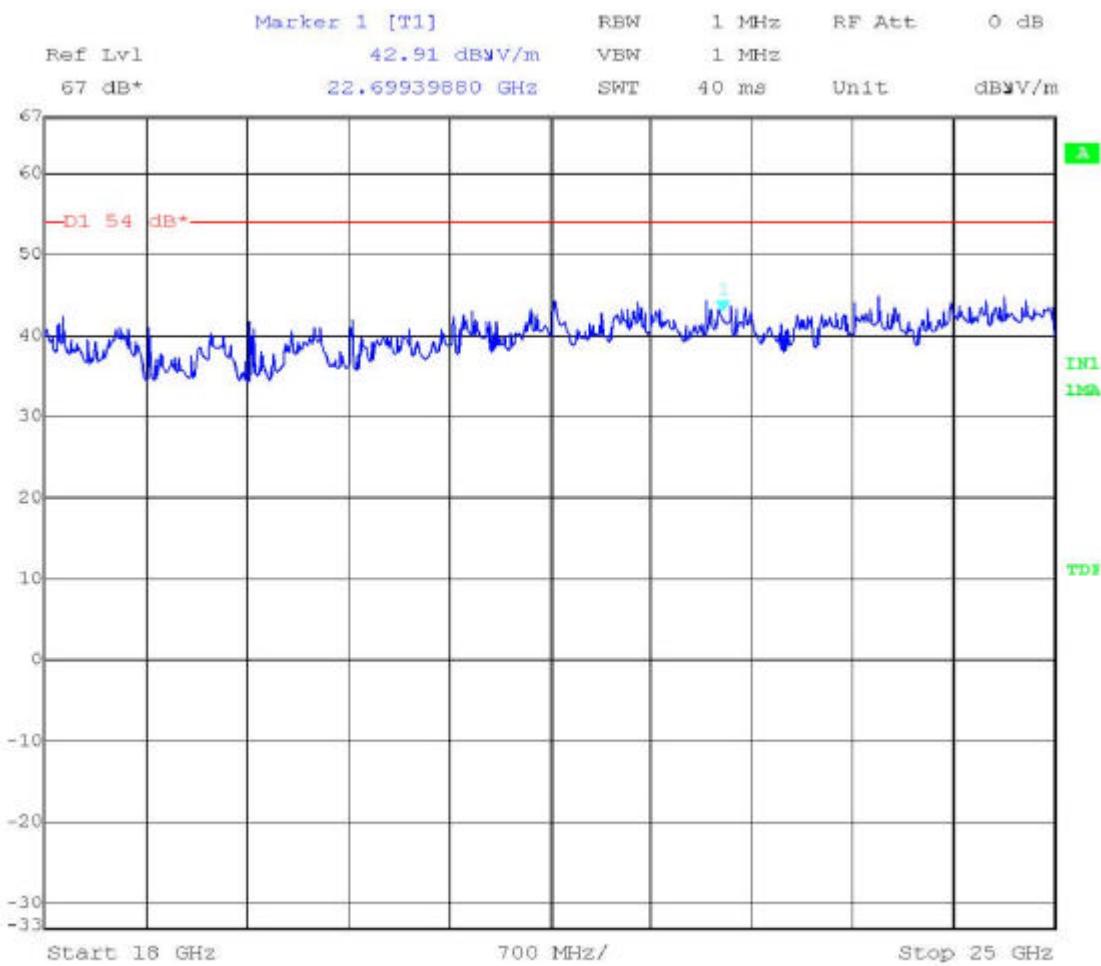

(This plot is valid for all three channels).

Report No: 18878RET.101		Page: 40 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A

Section 15.109. Receiver spurious radiation**SPECIFICATION**

The field strength shall not exceed the following values:

Frequency Range (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Report No: 18878RET.101		Page: 41 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A


Frequency range 30 MHz-1000 MHz.

No spurious signals found.

Frequency range 1 GHz-25 GHz.

No spurious signals found.

Verdict: PASS

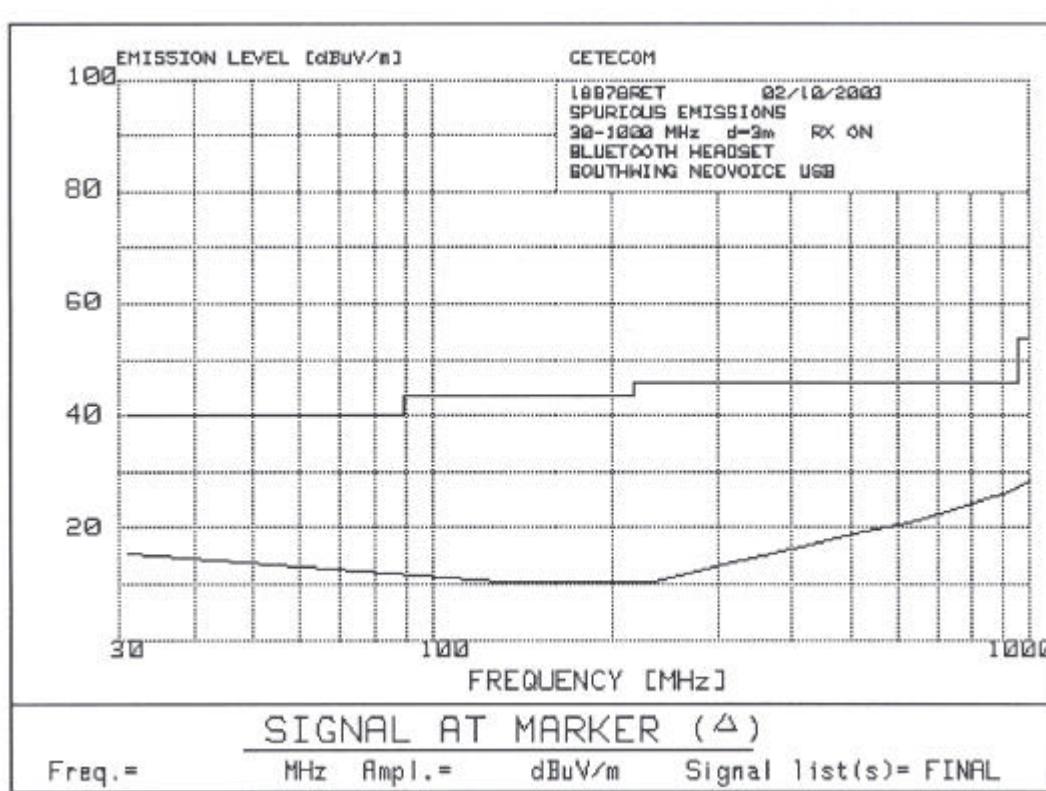FREQUENCY RANGE 30 MHz-1000 MHz.


Resolution bandwidth = 100 kHz.

Video bandwidth = 100 kHz.

(This plot is valid for all three channels).

Report No: 18878RET.101		Page: 42 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A


FREQUENCY RANGE 1 GHz-2.9 GHz.

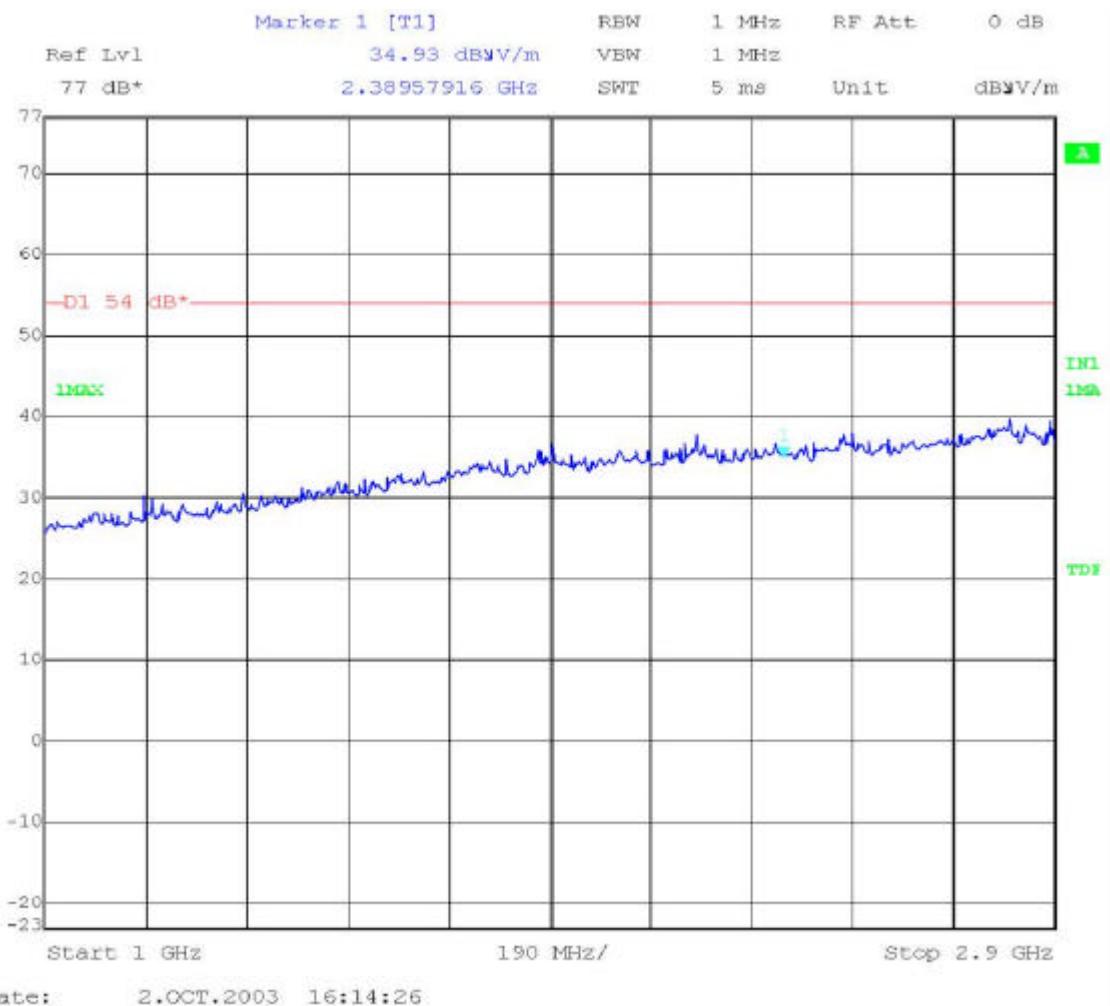

(This plot is valid for all three channels).

Report No: 18878RET.101		Page: 43 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A


FREQUENCY RANGE 2.9 GHz-12.75 GHz.

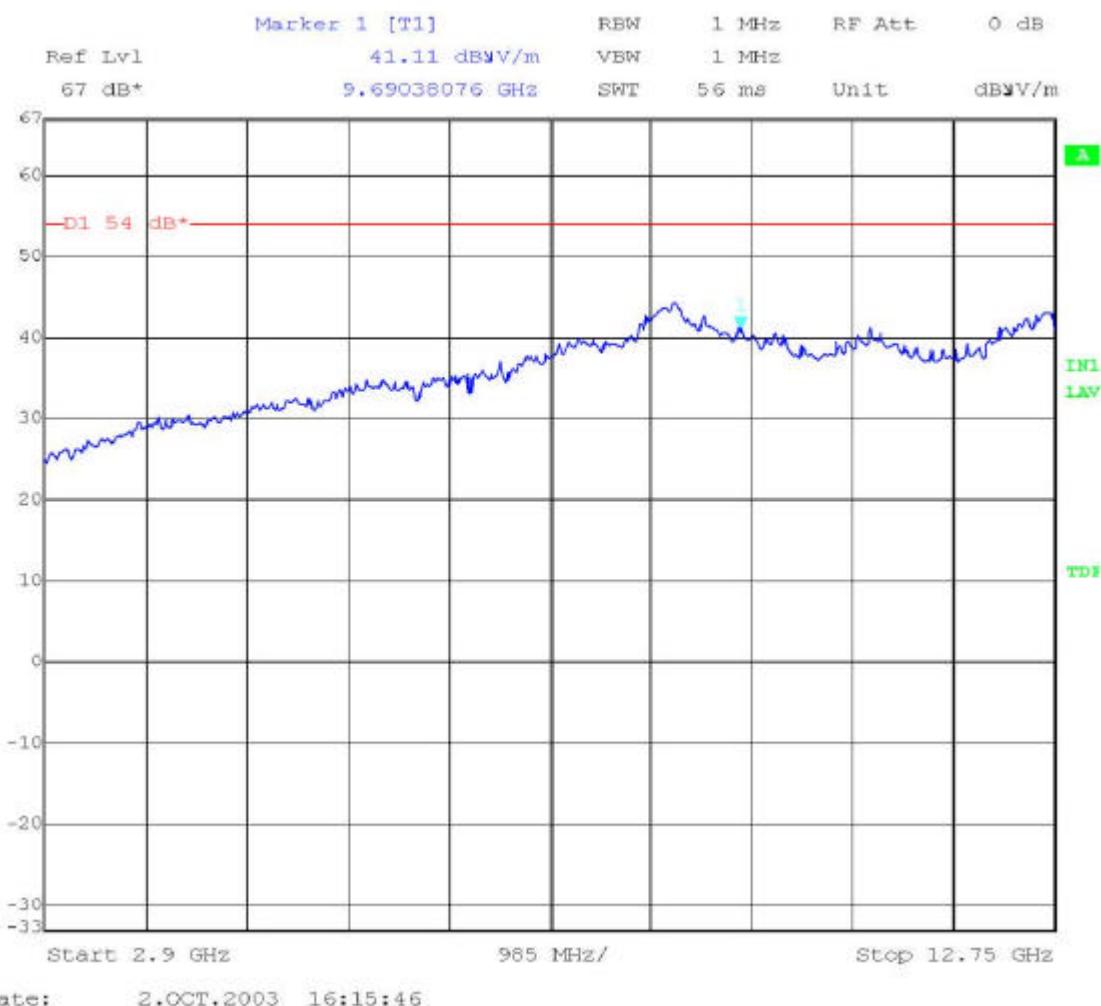

(This plot is valid for all three channels).

Report No: 18878RET.101		Page: 44 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A


FREQUENCY RANGE 12.75 GHz-18 GHz.

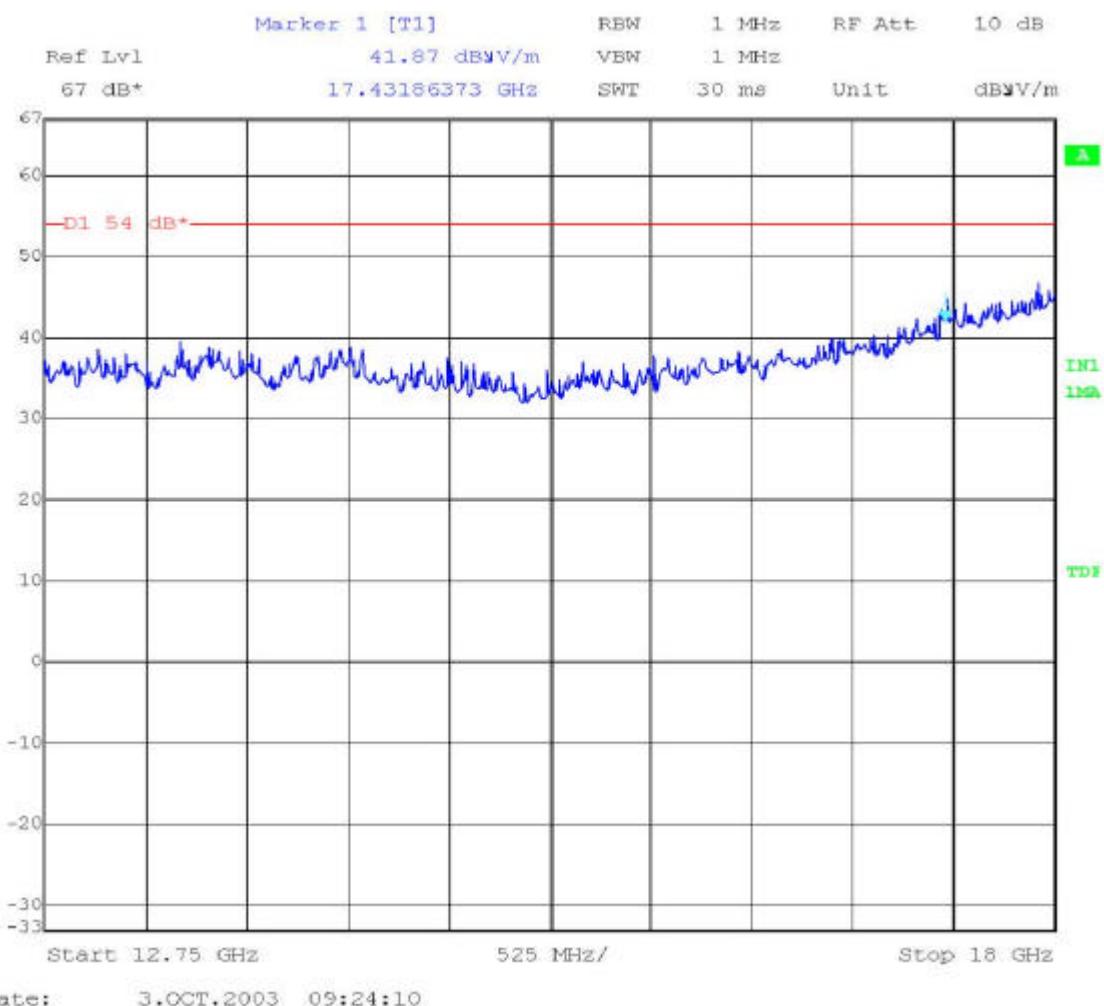

(This plot is valid for all three channels).

Report No: 18878RET.101		Page: 45 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A

FREQUENCY RANGE 18 GHz-25 GHz.

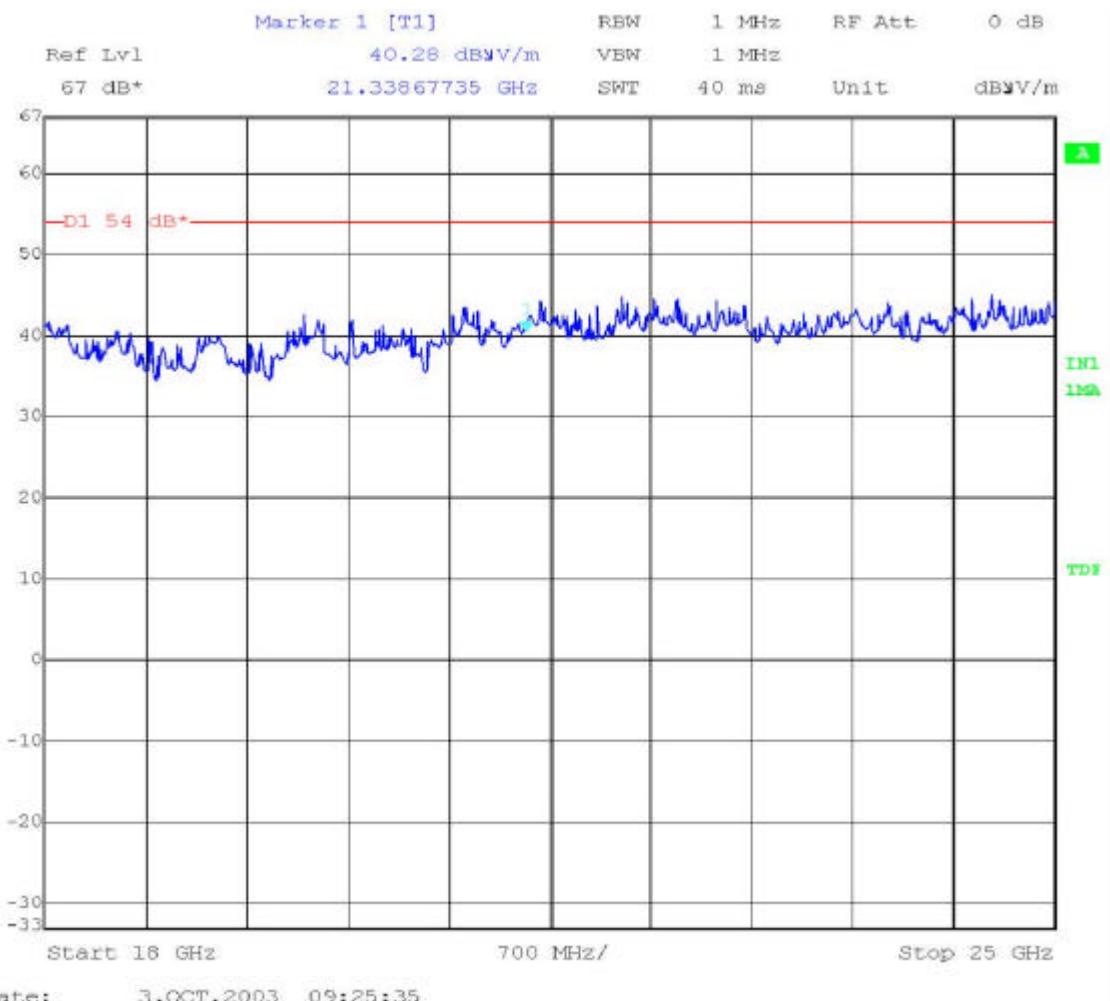

(This plot is valid for all three channels).

Report No: 18878RET.101		Page: 46 of 46
Date: 2003-12-02 FET45_00.DOC		Annex A

ANNEX B

PHOTOGRAPHS

(Number of photographs: 6)

Report No.: 18878RET.101

Report No.: 18878RET.101		Page: 1 of 7
Date: 2003-12-02		Annex B

1. Equipment (external view)



Report No.: 18878RET.101		Page: 2 of 7
Date: 2003-12-02		Annex B

2. Equipment (internal view) for conducted measurements.



Report No.:	
18878RET.101	

Date: 2003-12-02

Page: 3 of 7

Annex B

3. General test set-up for radiated measurements.




Report No.:	
18878RET.101	

Date: 2003-12-02

Page: 4 of 7


Annex B

4. Test set-up for radiated measurements below 1 GHz.

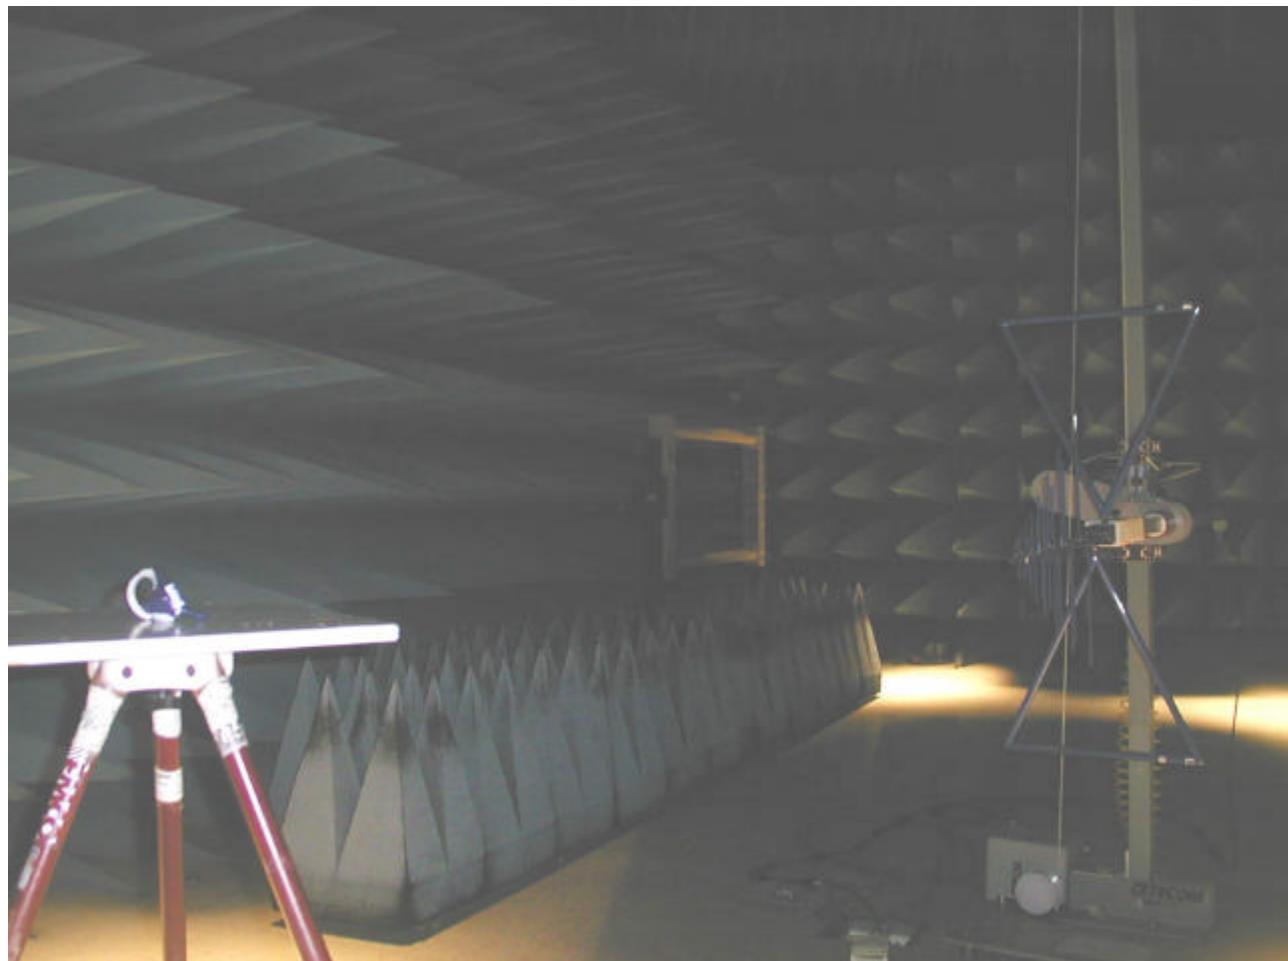


Report No.: 18878RET.101		Page: 5 of 7
Date: 2003-12-02		Annex B

5. Test set-up for radiated measurements above 1 GHz.

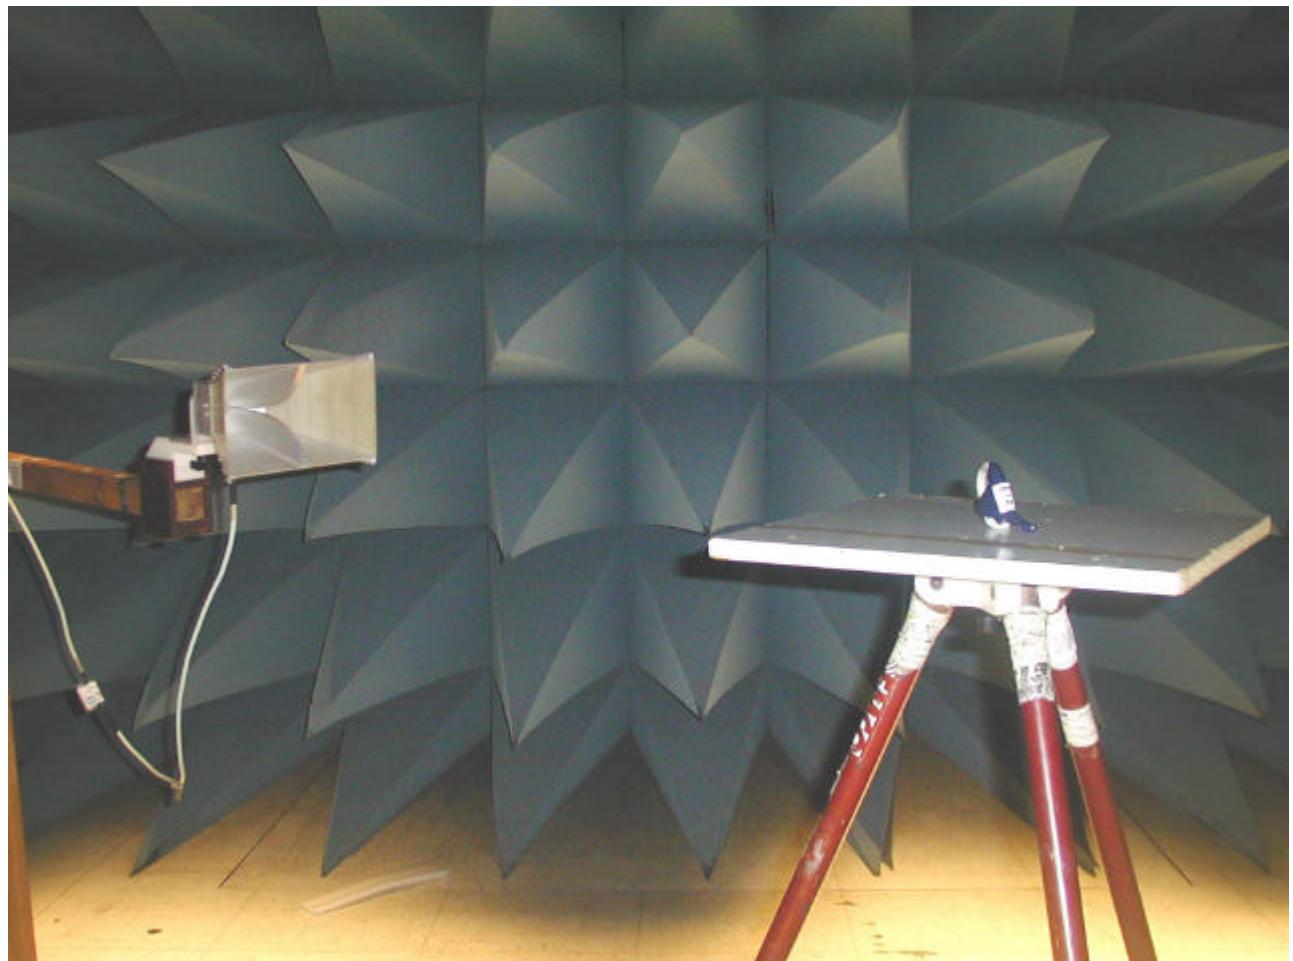

Report No.: 18878RET.101		Page: 6 of 7
Date: 2003-12-02		Annex B

6. Test set-up for RF conducted measurements.

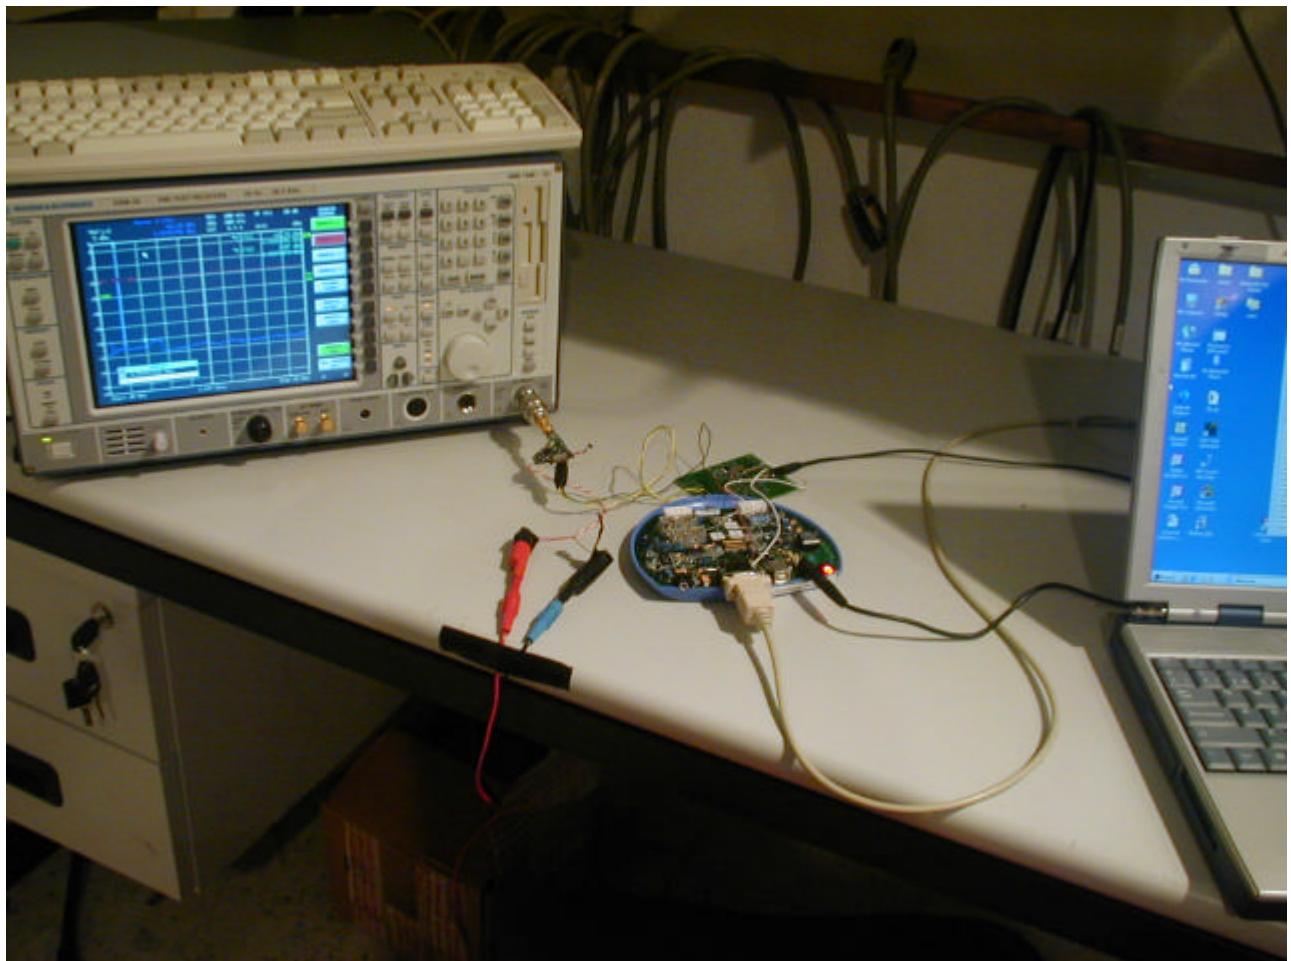

Report No.:	
18878RET.101	

Date: 2003-12-02

Page: 7 of 7

Annex B