

Specific Absorption Rate (SAR) Test Report
for
Gincom Inc.
on the
Wireless LAN USB Dongle

FCC ID: RGWGWM2UBA
Report No.: F382701
Date of Testing: Sep. 6, 2003
Date of Report: Sep. 8, 2003
Date of Review: Oct. 7, 2003

- The test results refer exclusively to the presented test model / sample only.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

1. Statement of Compliance	1
2. Administration Data.....	2
2.1 Testing Laboratory.....	2
2.2 Details of Applicant.....	2
2.3 Application Details	2
3. General Information	3
3.1 Description of EUT.....	3
3.2 Applied Standards.....	5
3.3 Device Category and SAR Limits.	5
3.4 Test Conditions	6
3.4.1 Ambient Conditions.....	6
3.4.2 Test Configuration.....	6
4. Specific Absorption Rate (SAR)	7
4.1 Introduction	7
4.2 SAR definition.....	7
5. SAR Measurement System.....	8
5.1 DASY4 E-Field Probe System	9
5.1.1 ET3DV6 E-Field Probe Specification	10
5.1.2 ET3DV6 E-Field Probe Calibration	10
5.2 Data Acquisition Electronic (DAE) System	11
5.3 Robot	12
5.4 Measurement Server	13
5.5 SAM phantom	13
5.6 Data Storage and Evaluation	14
5.6.1 Data Storage	14
5.6.2 Data Evaluation.....	14
5.7 Test Equipment List	17
6. Tissue Simulating Liquids.....	18
7. Uncertainty Assessment	20
8. SAR Measurement Evaluation	22
8.1 Purpose for System Performance Check	22
8.2 Equipments Set up	22
8.3. Validation Results.....	23
9. Description for EUT Testing Position	24
10. Measurement Procedure	26
10.1 Spatial Peak SAR Evaluation.....	26
11. SAR Test Results	28
11.1 Bottom	28
11.2 Round Tip Attached.....	28
11.3 Round Tip with 1.5 cm Gap.....	28
12. Reference	29
Appendix A - System Performance Check Data	
Appendix B - SAR Measurement Data	
Appendix C – Calibration Data	

1. Statement of Compliance

The Specific Absorption Rate (SAR) maximum result found during testing for the Gincom Inc. Wireless Local Area Network (WLAN) USB Dongle is 0.179 W/Kg with expanded uncertainty 19.6%. It is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1999 and had been tested in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C (Edition 01-01).

Tested by Jones Tasi

Reviewed by Daniel Lee

Jones Tasi
Project Leader
Sep. 6, 2003

Dr. C.H. Daniel Lee
SAR Lab. Manager
Oct. 7, 2003

2. Administration Data**2.1 Testing Laboratory**

Company Name : Sporton International Inc.
Department : Antenna Design/SAR
Address : No.52, Hwa-Ya 1st RD., Hwa Ya Technology Park, Kwei-Shan Hsiang,
TaoYuan Hsien, Taiwan, R.O.C.
Telephone Number : 886-3-327-3456
Fax Number : 886-3-327-0973

2.2 Detail of Applicant

Company Name : Gincom Inc.
Address : 15F., No. 284, Sec 3, Sanmin Rd., Taoyuan, Taiwan 330, R.O.C.
Telephone Number : 886-3-3364686
Fax Number : 886-3-3330608
Contact Person : peterpan@gincom.com.tw

2.3 Application Detail

Date of reception of application: 2003/09/02
Start of test : 2003/09/05
End of test : 2003/09/06

3.Scope**3.1 Description of Device Under Test (DUT)**

DUT Type :	802.11b Wireless LAN USB Dongle
Trade Name :	Gincom
Model Name :	GWM2-UBA
FCC ID	RGWGWM2UBA
Rx & Tx Frequency :	2412~2462 MHz
Interface :	USB A-Type
Antenna Type :	Embedded Chip Antenna
Antenna Gain :	+2 dBi
MAC :	00A0C5FEDCBA
Type of Modulation :	11M/5Mbps: CCK, 2Mbps:DQ PASK, 1Mbps:DBPSK
Operation Temperature :	0~55°C
DUT Stage	Identical prototype
Application Type :	Certification



Fig. 3.1. Top view of the DUT

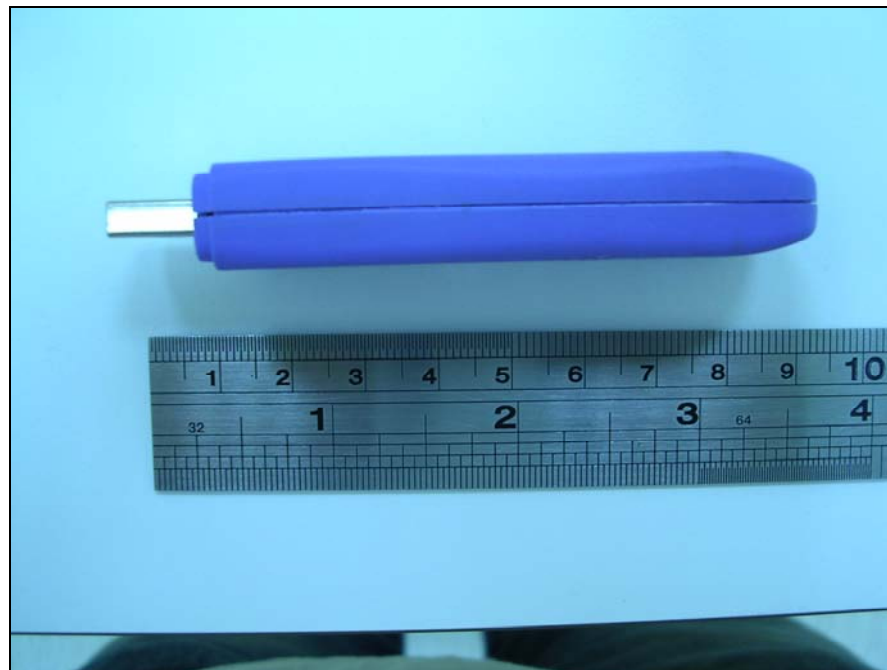


Fig. 3.2 Side view of the DUT

3.2 Applied Standards:

The Specific Absorption Rate (SAR) testing specification, method and procedure for this WLAN card is in accordance with the following standards:

47 CFR Part 2 (2.1093),
IEEE C95.1-1999,
IEEE C95.3-1991,
IEEE P1528 -200X, and
OET Bulletin 65 Supplement C (Edition 01-01)

3.3 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.4 Test Conditons

3.4.1 Ambient Condition:

Ambient Temperature (°C)	21 ~ 23.5
Tissue simulating liquid temperature (°C)	21.5
Humidity (%)	50 ~ 65

3.4.2 Test Configuration:

Engineering Testing software installed on the notebook can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement is continuous wave (CW) and its crest factor is 1. The measurements were performed on the lowest, middle, and highest channel, i.e. channel 1, channel 6, and channel 11 for each testing position.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The FCC recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. ρ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\mathbf{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration,

or related to the electrical field in the tissue by

$$\mathbf{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement Setup

Remote Control Box

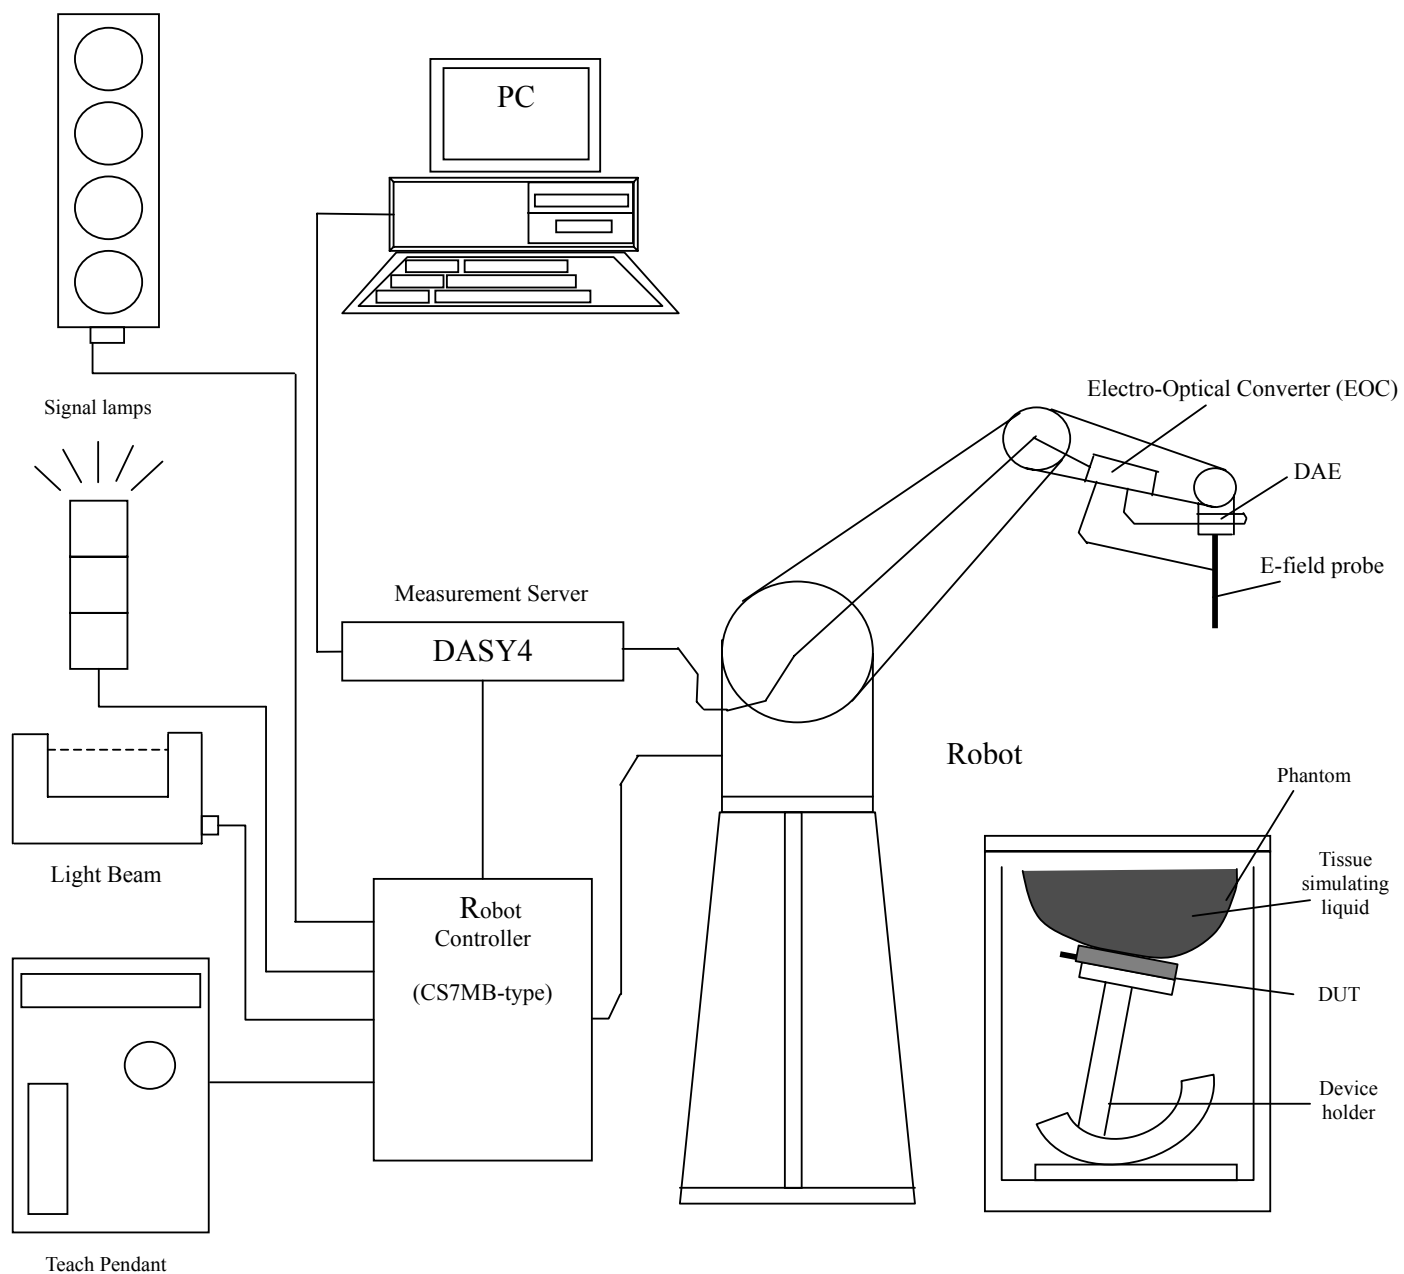


Fig. 5.1 DASY4 system

The DASY4 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

5.1.DASY4 E-Field Probe System

The SAR measurement is conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

Calibration: Required once a year.

5.1.1. ET3DV6 E-Field Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents)
Calibration	Simulating tissue at frequencies of 900MHz, 1.8GHz and 2.45GHz for brain and muscle (accuracy $\pm 8\%$)
Frequency	10 MHz to > 3 GHz
Directivity	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation perpendicular to probe axis)
Dynamic Range	$5 \mu\text{W/g}$ to > 100mW/g; Linearity: $\pm 0.2\text{dB}$
Surface Detection	± 0.2 mm repeatability in air and clear liquids on reflecting surface
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 3GHz Compliance tests for mobile phones and Wireless LAN Fast automatic scanning in arbitrary phantoms



Fig. 5.2 Probe setup on robot

5.1.2 ET3DV6 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data are as below:

Sensitivity	X axis : 1.81 μ V	Y axis 1.82 μ V	Z axis : 1.61 μ V
Diode compression point	X axis : 95mV	Y axis : 95 mV	Z axis : 95mV
Conversion factor 2400~2500 MHz (Body)	X axis	Y axis	Z axis
	4.4	4.4	4.4
Boundary effect 2400~2500 MHz (Body)	Alpha	Depth	
	1.00	1.65	

NOTE:

1. The probe parameters have been calibrated by the SPEAG.
2. For the detailed calibration data is shown in Appendix C.

5.2 DATA Acquisition Electronics (DAE)

The data acquisition electronics (DAE4) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

Calibration: Required once a year. Calibration data is attached in Appendix C.

5.3 Robot

The DASY4 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASYS system, the CS7MB robot controller version from Stäubli is used. The RX robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

5.4 Measurement Server

The DASY4 measurement server is based on a PC/104 CPU board with
166 MHz CPU
32 MB chipset and
64 MB RAM.

Communication with
the DAE4 electronic box
the 16-bit AD-converter system for optical detection and digital I/O interface.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.

Calibration: No calibration required.

5.5 SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.

A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters.

On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

The phantom can be used with the following tissue simulating liquids:

- *Water-sugar based liquid
- *Glycol based liquids



Fig. 5.3 Top view of twin phantom



Fig. 5.4 Bottom view of twin phantom

5.6 Data Storage and Evaluation

5.6.1 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The postprocessing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a loseless media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.6.2 Data Evaluation

The DASY4 postprocessing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	$\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	ConvF_i
	- Diode compression point	dcp_i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel

can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \text{ConvF}}}$$

$$\text{H-field probes : } H_i = \sqrt{V_i \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with V_i = compensated signal of channel i ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i ($i = x, y, z$)
 $\mu\text{ V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

* Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

5.7. Test Equipment List

Manufacture	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Filed Probe	ET3DV6	1687	Sep. 28, 2004	Sep.18, 2004
SPEAG	900MHz System Validation Kit	D900V2	190	Jul. 17, 2003	Jul. 17, 2005
SPEAG	1800MHz System Validation Kit	D1800V2	2d076	Jul. 16, 2003	Jul. 16, 2005
SPEAG	2450MHz System Validation Kit	D2450V2	716	Sep. 26, 2002	Sep. 26, 2004
SPEAG	Data Acquisition Electronics	DAE3	577	Jul. 28, 2003	Jul. 28, 2004
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	Phantom	SAM V4.0	TP-1303	NCR	NCR
SPEAG	Robot	Staubli RX90BL	F03/5W15A1/A/01	NCR	NCR
SPEAG	Software	DASY4 V4.1 Build 47	N/A	NCR	NCR
SPEAG	Software	SEMCAD V1.6 Build 116	N/A	NCR	NCR
SPEAG	Measurement Server	SE UMS 001 BA	1021	NCR	NCR
Agilent	S-Parameter Network Analyzer	8720ES	US39172472	May 15, 2003	May 15, 2004
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	NCR
R&S	Power Meter	NRVS	100444	May 28, 2003	May 28, 2004
R&S	Power Sensor	NRV	100057	May 28, 2003	May 28, 2004
R&S	Signal Generato	SMR40	104558402	Nov.8, 2002	Nov. 8, 2003
Agilent	Dual Directional Coupler	778D	50334	NCR	NCR
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	NCR

Table 5.1 Test Equipment List

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY4, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. The liquid height from the bottom of the phantom body is 15 centimeters, which is shown in Fig. 6.1.

The following ingredients for tissue simulating liquid are used:

- **Water:** deionized water (pure H₂O), resistivity $\geq 16\text{M}\Omega$ - as basis for the liquid
- **Sugar:** refined sugar in crystals, as available in food shops – to reduce relative permittivity
- **Salt:** pure NaCl – to increase conductivity
- **Cellulose:** Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20°C), CAS#54290-to increase viscosity and to keep sugar in solution.
- **Preservative:** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS#55965-84-9- to prevent the spread of bacteria and molds.
- **DGMBE:** Deithlenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH, CAS#112-34-5 – to reduce relative permittivity.

Table 6.1 gives the recipes for one liter of tissue simulating liquid for frequency band 2450 MHz.

Ingredient	MSL-2450
Water	698.3 ml
DGMBE	301.7 ml
Total amount	1 liter (1.0 kg)
Dielectric Parameters at 22°	f = 2450MHz $\epsilon = 52.5 \pm 5\%$, $\sigma = 2.00 \pm 5\%$ S/m

Table 6.1

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070C Dielectric Probe Kit and an Agilent 8720ES Network Analyzer.

Table 6.2 shows the measuring results for muscle simulating liquid in this 2450 MHz frequency band at the temperature = 21.9°C

Frequency(MHz)	Permittivity (ϵ)	Conductivity (σ)
2412	53.43	1.95
2422	53.41	1.97
2432	53.38	1.98
2437	53.37	1.99
2442	53.35	1.99
2452	53.33	2.01
2462	53.30	2.02
2472	53.27	2.03

Table 6.2

The measuring data are consistent with $\epsilon = 52.5 \pm 5\%$ and $\sigma = 2.00 \pm 5\%$.

**Fig. 6.1**

7. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-shape
Multiplying factor ^(a)	1/k ^(b)	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 7.1

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY4 uncertainty Budget is showed in Table 7.2.

Error Description	Uncertainty Value \pm %	Probability Distribution	Divisor	C_i $1/g$	Standard Unc. (1-g)	v_i or V_{eff}
Measurement System						
Probe Calibration	± 4.8	Normal	1	1	± 4.8	∞
Axial Isotropy	± 4.7	Rectangular	$\sqrt{3}$	$(1-C_p)^{1/2}$	± 1.9	∞
Hemispherical Isotropy	± 9.6	Rectangular	$\sqrt{3}$	$(C_p)^{1/2}$	± 3.9	∞
Boundary Effect	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
System Detection Limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 1.0	Rectangular	1	1	± 1.0	∞
Response Time	± 0	Normal	$\sqrt{3}$	1	± 0	∞
Integration time	± 0	Rectangular	$\sqrt{3}$	1	± 0	∞
RF Ambient Conditions	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner Mech. Tolerance	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.2	∞
Probe Positioning with respect to Phantom Shell	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Extrapolation and Interpolation Algorithms for Max. SAR Evaluation	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Test sample Related						
Test sample Positioning	± 2.9	Normal	1	1	± 2.9	145
Device Holder Uncertainty	± 3.6	Normal	1	1	± 3.6	5
Output Power Variation-SAR drift measurement	± 2.5	Rectangular	$\sqrt{3}$	1	± 1.4	∞
Phantom and Tissue parameters						
Phantom uncertainty(Including shape and thickness tolerances)	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid Conductivity Target tolerance	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid Conductivity measurement uncertainty	± 2.5	Normal	1	0.64	± 1.6	∞
Liquid Permittivity Target tolerance	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid Permittivity measurement uncertainty	± 2.0	Normal	1	0.6	± 1.2	∞
Combined standard uncertainty					± 9.79	330
Coverage Factor for 95 %		K=2				
Expanded uncertainty (Coverage factor = 2)			Normal (k=2) 27		± 19.6	

Table 7.2. Uncertainty Budget of DASY

8. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator with a fixed output power 24 dBm at frequency 2450 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

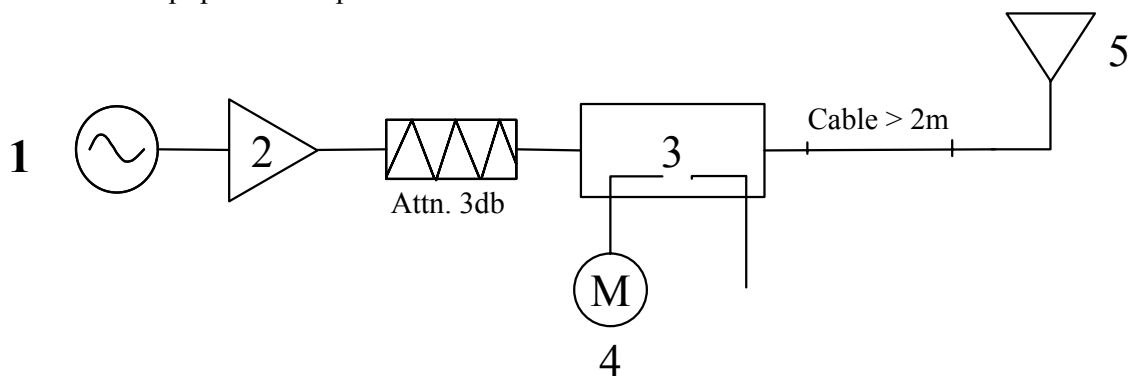


Fig. 8.1

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Dipole

The output power on dipole port must be calibrated to 24dBm (250mW) before dipole is connected.

8.3 Validation Results

Comparing to the original SAR value provided by Speag, the validation data should within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power.

	Target (W/kg)	Measurement data (W/kg)	Variation
SAR (1g)	51.6	53.6	3.8%
SAR (10g)	25.0	24.6	1.6%

Table 8.1

The table above indicates the system performance check can meet the variation criterion.

9. Description for DUT Testing Position

This DUT was tested in 3 different positions. The first one is Bottom in Fig. 9.1. In this position, the bottom of notebook is touched with that phantom. The distance between DUT and phantom bottom is one centimeter.

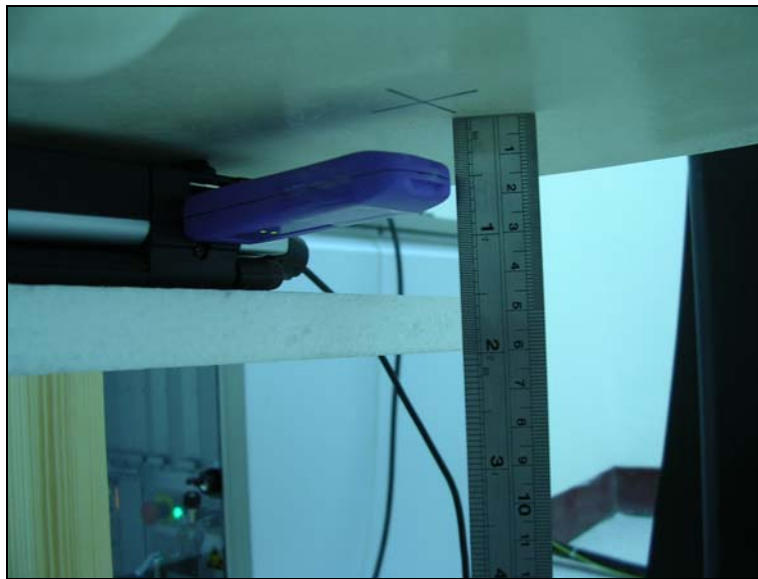


Fig. 9.1

The second position is Round Tip Attached in Fig. 9.2. In this position, the round tip of the DUT is touched with the flat phantom.

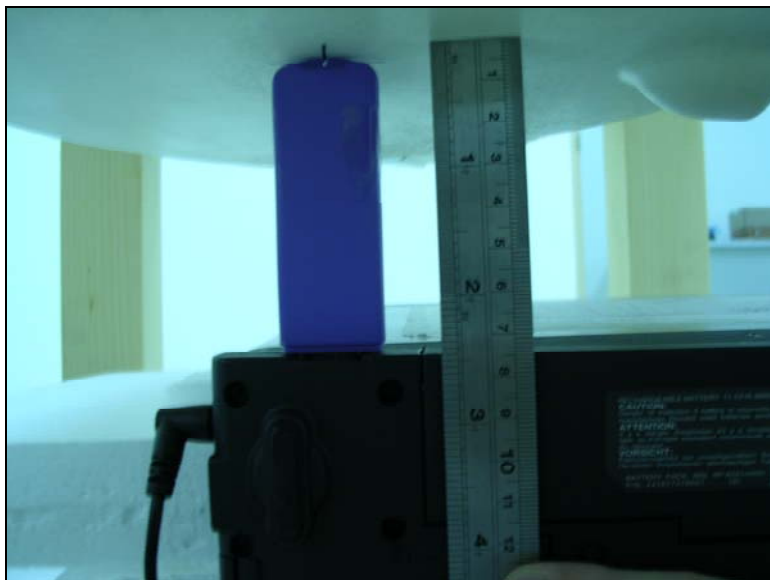


Fig. 9.2

The third one is Round tip with 1.5cm Gap in Fig. 9.3. In this position, the gap between the flat phantom surface and the round tip of the DUT is 1.5 cm.

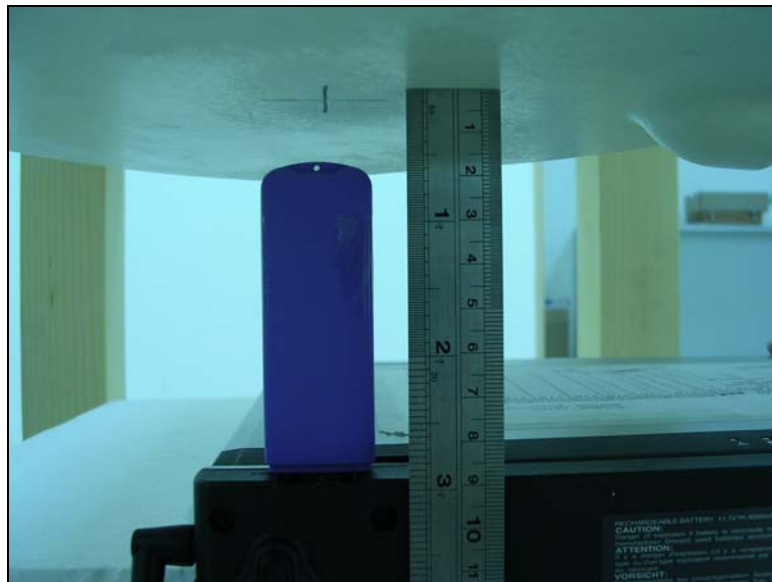


Fig. 9.3

10. Measurement Procedures

The measurement procedures are as follows:

- Plugging DUT into the notebook
- Using engineering software to transmit RF power continuously (continuous Tx) in the low channel
- Placing the DUT in the positions described in the last section
- Setting scan area, grid size and other setting on the DASY4 software
- Taking data for the low channel
- Repeat the previous steps for the middle and high channels.

According to the IEEE P1528 draft standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528-200X standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY4 software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

Base on the Draft: SCC-34, SC-2, WG-2-Computational Dosimetry, IEEE P1529/D0.0 (Draft Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) Associated with the Use of Wireless Handset-Computational techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the postprocessing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- extraction of the measured data (grid and values) from the Zoom Scan
- calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- generation of a high-resolution mesh within the measured volume

-
- interpolation of all measured values form the measurement grid to the high-resolution grid
 - extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
 - calculation of the averaged SAR within masses of 1g and 10g

11. SAR Test Results**11.1 Bottom**

Chan.	Freq (MHz)	Modulation type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limits (W/Kg)	Results
1	2412(Low)	CCK	15.66	-0.07	0.11	1.6	Pass
6	2437(Mid)	CCK	15.42	0.1	0.117	1.6	Pass
11	2462(High)	CCK	15.13	-0.1	0.13	1.6	Pass

11.2 Round Tip Attached

Chan.	Freq (MHz)	Modulation type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limits (W/Kg)	Results
1	2412(Low)	CCK	15.66	-0.03	0.156	1.6	Pass
6	2437(Mid)	CCK	15.42	0.02	0.135	1.6	Pass
11	2462(High)	CCK	15.13	0.005	0.179	1.6	Pass

11.3 Round Tip with 1.5 cm Gap

Chan.	Freq (MHz)	Modulation type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limits (W/Kg)	Results
1	2412(Low)	CCK	15.66	0.009	0.0398	1.6	Pass
6	2437(Mid)	CCK	15.42	-0.06	0.0348	1.6	Pass
11	2462(High)	CCK	15.13	-0.1	0.0248	1.6	Pass

12. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] IEEE Std. 1528-200X, Draft CD 1.1 “ Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”, December 2002
- [3] Supplement C (Edition 01-10) to OET Bulletin 65 (Edition 97-01), “Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to RF Emissions”, June 2001
- [4] IEEE Std. C95.3, “IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields-RF and Microwave”, 1991
- [5] IEEE Std. C95.1, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, 1999
- [6] DAYS4 System Handbook

Appendix A - System Performance Check Data

Date/Time: 09/06/03 09:54:35

Test Laboratory: Sporton

2.4GHz Dipole System Calibration

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:716**Program Name: System Performance Check**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 2$ mho/m, $\epsilon_r = 53.33$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 7/28/2003

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

System Performance Check/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 89 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 16.1 mW/g

System Performance Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 27.8 W/kg

SAR (1 g) = 13.4 mW/g; SAR (10 g) = 6.15 mW/g

Reference Value = 89 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 14.9 mW/g

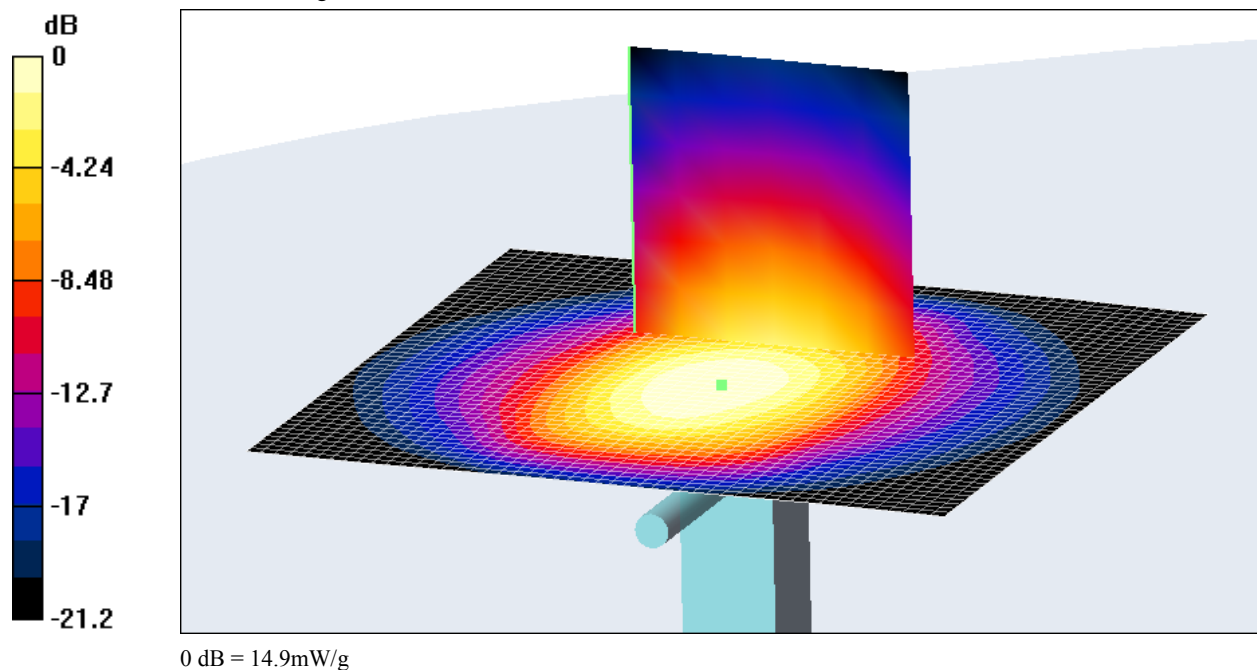

Appendix B - SAR Measurement Data

Date/Time: 09/06/03 13:58:02

Test Laboratory: Sporton

11Mbps Wireless LAN USB Dongle Bottom

DUT: 11Mbps Wireless LAN USB Dongle; Type: GWM2-UBA; Serial: 00A0C5FEDCBA**Program Name: DASY4**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 53.43$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 7/28/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

Channel 1 2412MHz/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 5.93 V/m

Power Drift = -0.07 dB

Maximum value of SAR = 0.113 mW/g

Channel 1 2412MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Peak SAR (extrapolated) = 0.207 W/kg

SAR (1 g) = 0.11 mW/g; SAR (10 g) = 0.0602 mW/g

Reference Value = 5.93 V/m

Power Drift = -0.07 dB

Maximum value of SAR = 0.115 mW/g

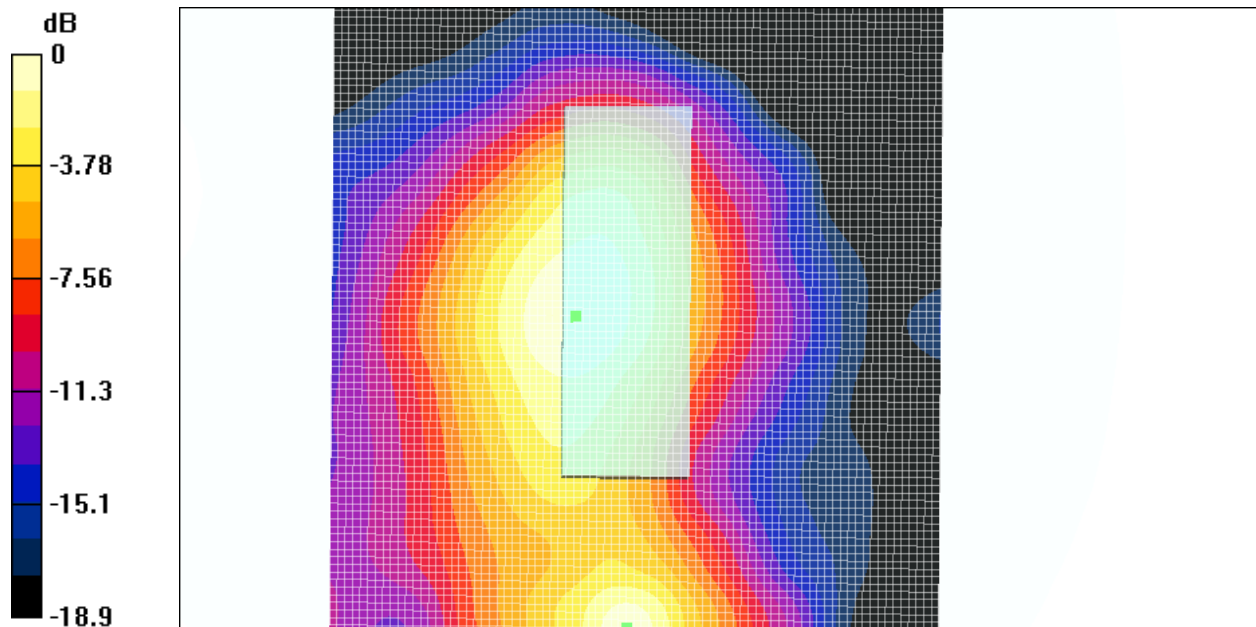

0 dB = 0.115mW/g

Date/Time: 09/06/03 14:24:32

Test Laboratory: Sporton

11Mbps Wireless LAN USB Dongle Bottom

DUT: 11Mbps Wireless LAN USB Dongle; Type: GWM2-UBA; Serial: 00A0C5FEDCBA

Program Name: DASY4

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450 ($\sigma = 1.99$ mho/m, $\epsilon_r = 53.37$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 7/28/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

Channel 6 2437MHz/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.01 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.123 mW/g

Channel 6 2437MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Peak SAR (extrapolated) = 0.227 W/kg

SAR (1 g) = 0.117 mW/g; SAR (10 g) = 0.0676 mW/g

Reference Value = 6.01 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.123 mW/g

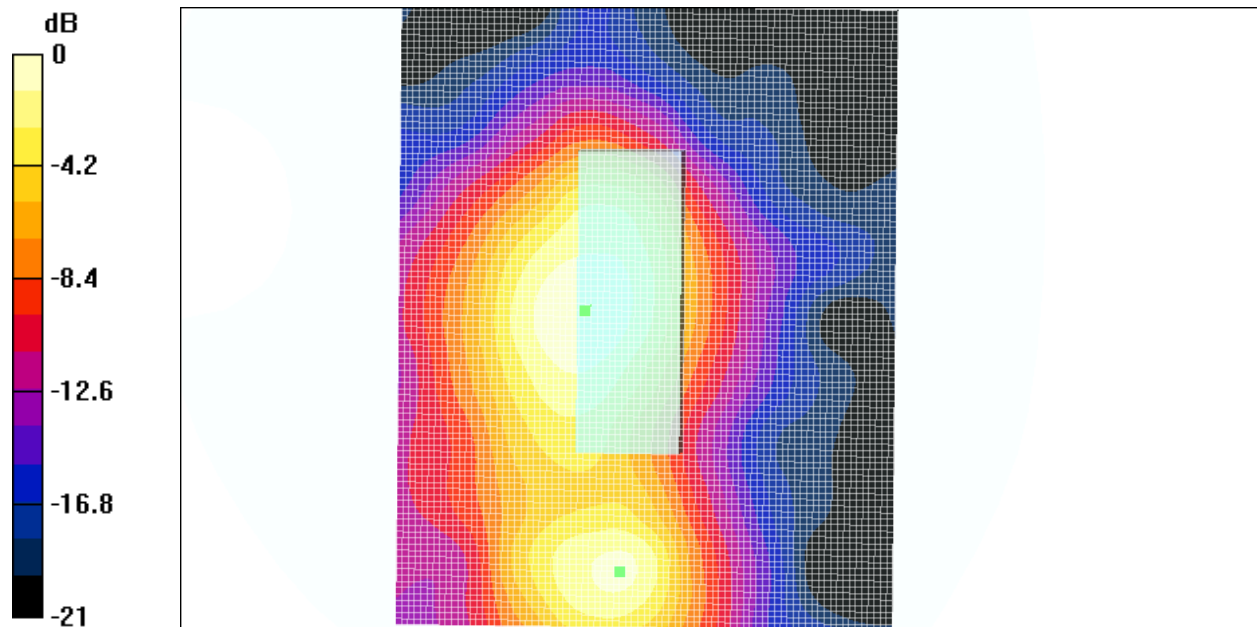

Date/Time: 09/06/03 14:48:51

Test Laboratory: Sporton

11Mbps Wireless LAN USB Dongle Bottom

DUT: 11Mbps Wireless LAN USB Dongle; Type: GWM2-UBA; Serial: 00A0C5FEDCBA

Program Name: DASY4

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL2450 ($\sigma = 2.02$ mho/m, $\epsilon_r = 53.3$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 7/28/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

Channel 11 2462MHz/Area Scan (81x101x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 5.69 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.127 mW/g

Channel 11 2462MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Peak SAR (extrapolated) = 0.321 W/kg

SAR (1 g) = 0.13 mW/g; SAR (10 g) = 0.0709 mW/g

Reference Value = 5.69 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.126 mW/g

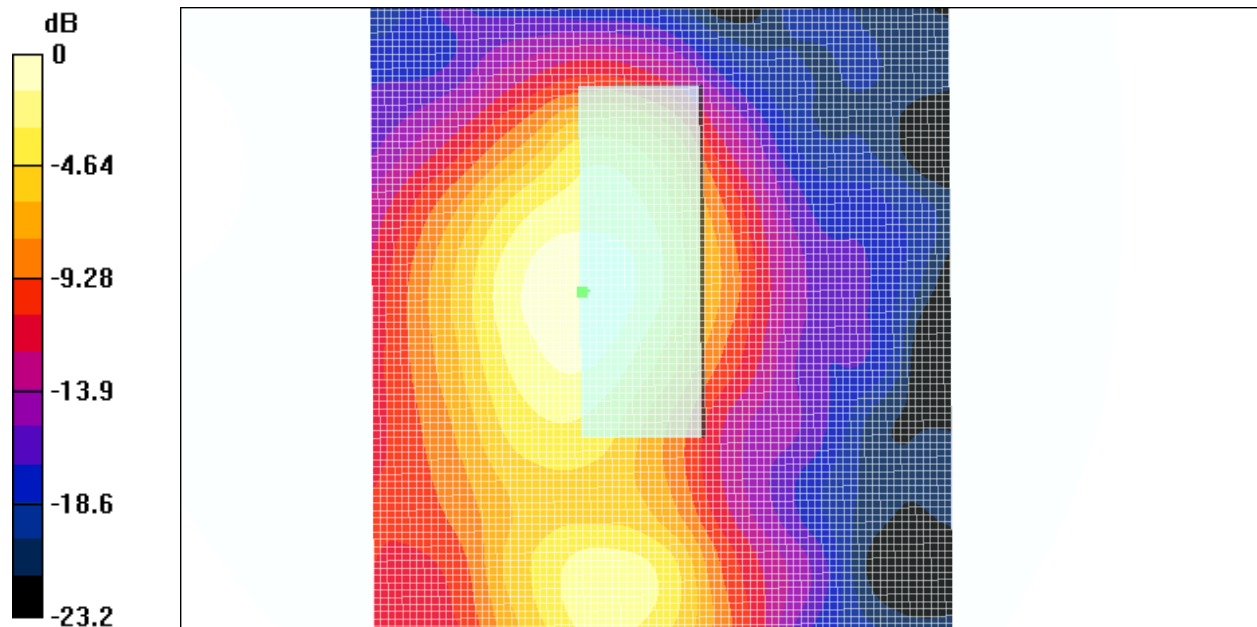

0 dB = 0.126mW/g

Date/Time: 09/06/03 12:23:06

Test Laboratory: Sporton

11Mbps Wireless LAN USB Dongle Round Tip Attached**DUT: 11Mbps Wireless LAN USB Dongle; Type: GWM2-UBA; Serial: 00A0C5FEDCBA****Program Name: DASY4**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 53.43$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 7/28/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

Channel 1 2412MHz/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.6 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.165 mW/g

Channel 1 2412MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Peak SAR (extrapolated) = 0.393 W/kg

SAR (1 g) = 0.156 mW/g; SAR (10 g) = 0.0704 mW/g

Reference Value = 10.6 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.173 mW/g

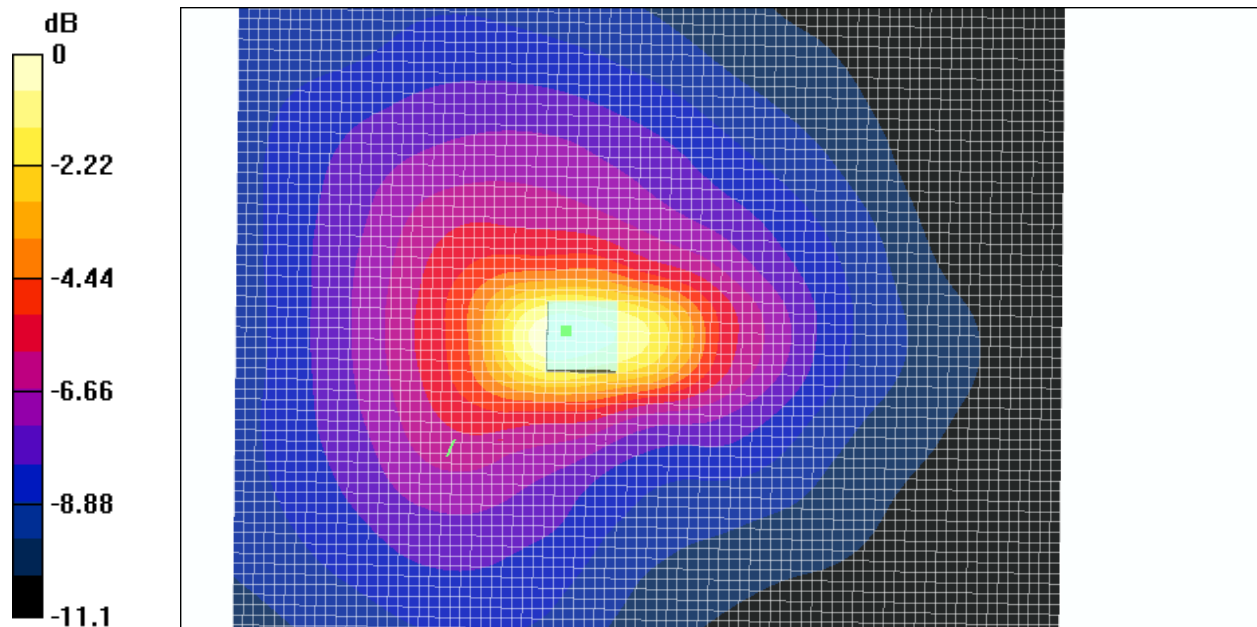

0 dB = 0.173mW/g

Date/Time: 09/06/03 12:46:39

Test Laboratory: Sporton

11Mbps Wireless LAN USB Dongle Round Tip Attached**DUT: 11Mbps Wireless LAN USB Dongle; Type: GWM2-UBA; Serial: 00A0C5FEDCBA****Program Name: DASY4**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450 ($\sigma = 1.99$ mho/m, $\epsilon_r = 53.37$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 7/28/2003

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

Channel 6 2437MHz/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 9.5 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.144 mW/g

Channel 6 2437MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Peak SAR (extrapolated) = 0.365 W/kg

SAR (1 g) = 0.135 mW/g; SAR (10 g) = 0.0631 mW/g

Reference Value = 9.5 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.151 mW/g

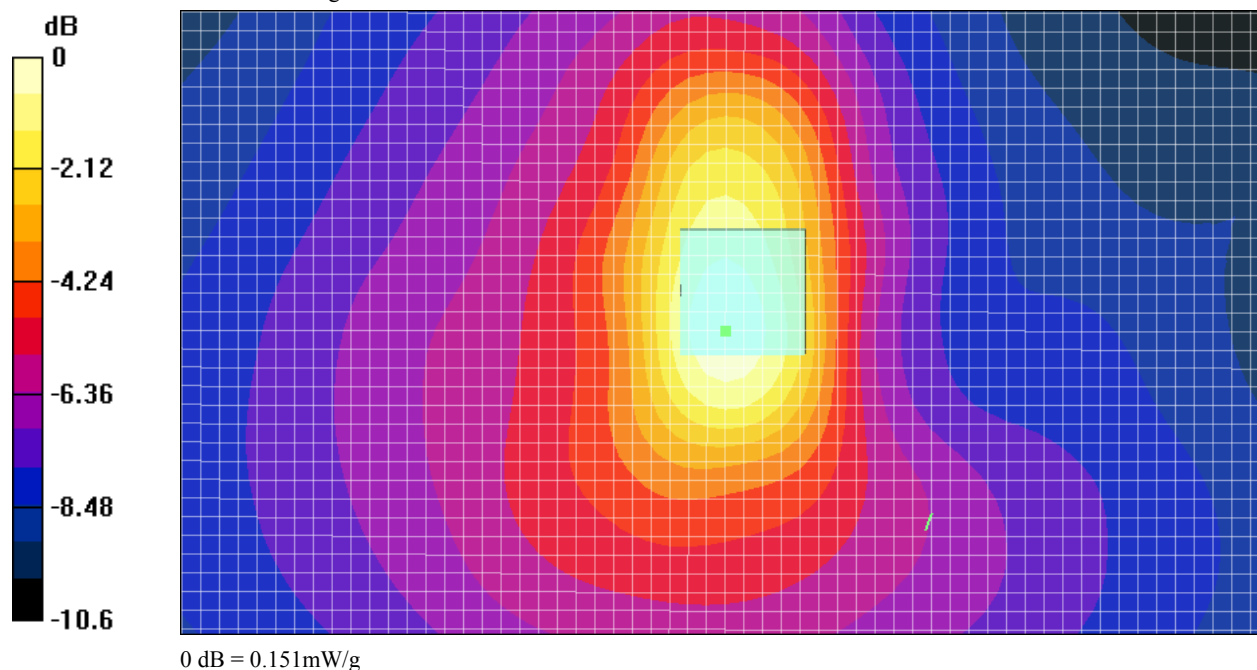

Date/Time: 09/06/03 12:46:39

Test Laboratory: Sporton

11Mbps Wireless LAN USB Dongle Round Tip Attached**DUT: 11Mbps Wireless LAN USB Dongle; Type: GWM2-UBA; Serial: 00A0C5FEDCBA****Program Name: DASY4**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL2450 ($\sigma = 2.02$ mho/m, $\epsilon_r = 53.3$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 7/28/2003

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

Channel 11 2462MHz/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.9 V/m

Power Drift = 0.005 dB

Maximum value of SAR = 0.19 mW/g

Channel 11 2462MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Peak SAR (extrapolated) = 0.52 W/kg

SAR (1 g) = 0.179 mW/g; SAR (10 g) = 0.0755 mW/g

Reference Value = 10.9 V/m

Power Drift = 0.005 dB

Maximum value of SAR = 0.208 mW/g

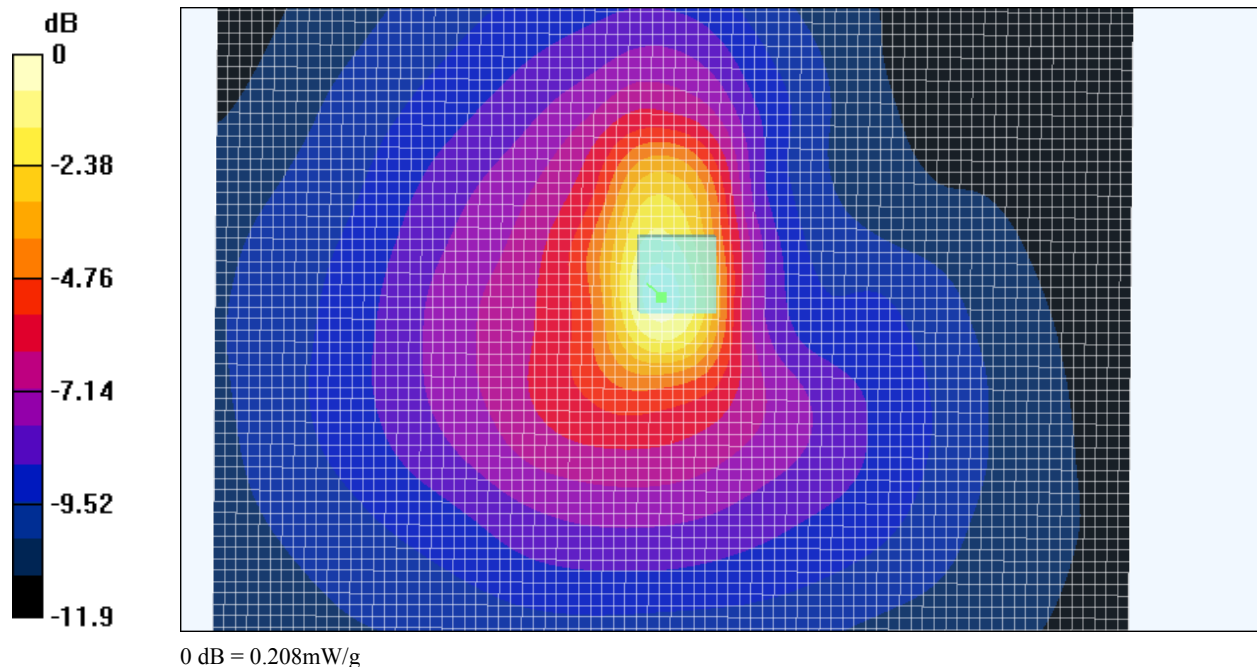

Date/Time: 09/06/03 11:11:06

Test Laboratory: Sporton

11Mbps Wireless LAN USB Dongle Round Tip with 1.5 cm Gap**DUT: 11Mbps Wireless LAN USB Dongle; Type: GWM2-UBA; Serial: 00A0C5FEDCBA****Program Name: DASY4**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL2450 ($\sigma = 1.95$ mho/m, $\epsilon_r = 53.43$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 7/28/2003

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303;

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

Channel 1 2412MHz/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.82 V/m

Power Drift = 0.009 dB

Maximum value of SAR = 0.0412 mW/g

Channel 1 2412MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Peak SAR (extrapolated) = 0.0631 W/kg

SAR (1 g) = 0.0399 mW/g; SAR (10 g) = 0.0308 mW/g

Reference Value = 4.82 V/m

Power Drift = 0.009 dB

Maximum value of SAR = 0.0442 mW/g

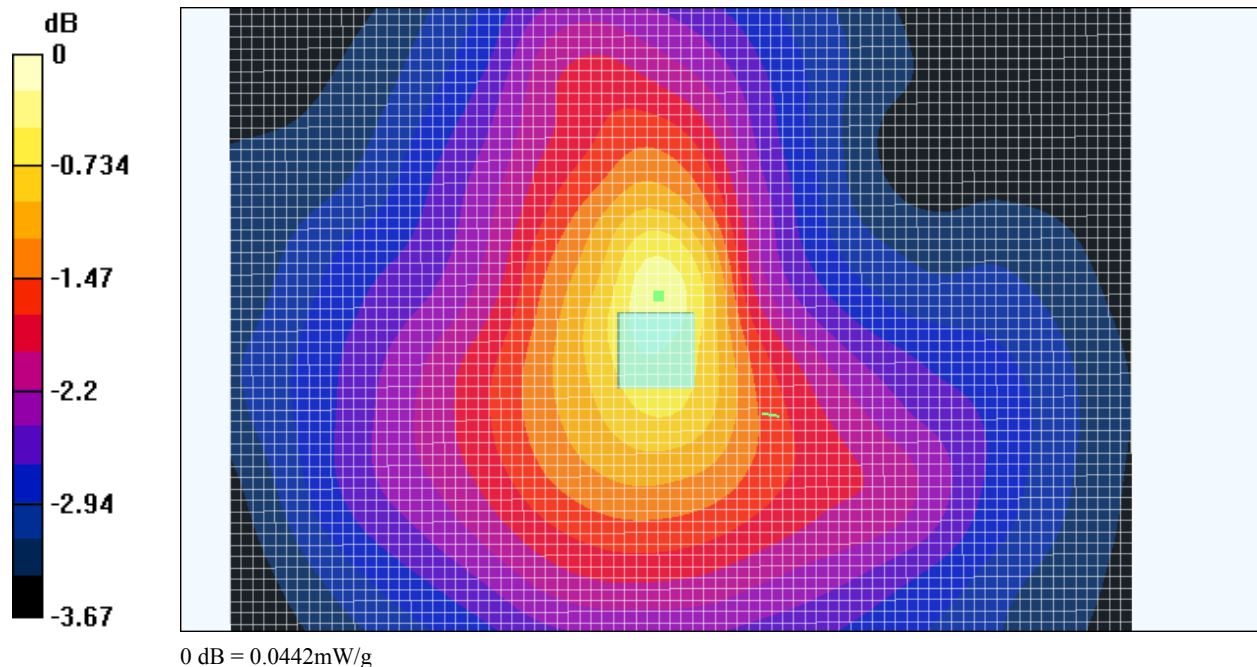

Date/Time: 09/06/03 11:11:06

Test Laboratory: Sporton

11Mbps Wireless LAN USB Dongle Round Tip with 1.5 cm Gap**DUT: 11Mbps Wireless LAN USB Dongle; Type: GWM2-UBA; Serial: 00A0C5FEDCBA****Program Name: DASY4**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL2450 ($\sigma = 1.99$ mho/m, $\epsilon_r = 53.37$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 7/28/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

Channel 6 2437MHz/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 4.6 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.035 mW/g

Channel 6 2437MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Peak SAR (extrapolated) = 0.0635 W/kg

SAR (1 g) = 0.0348 mW/g; SAR (10 g) = 0.0247 mW/g

Reference Value = 4.6 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.0438 mW/g

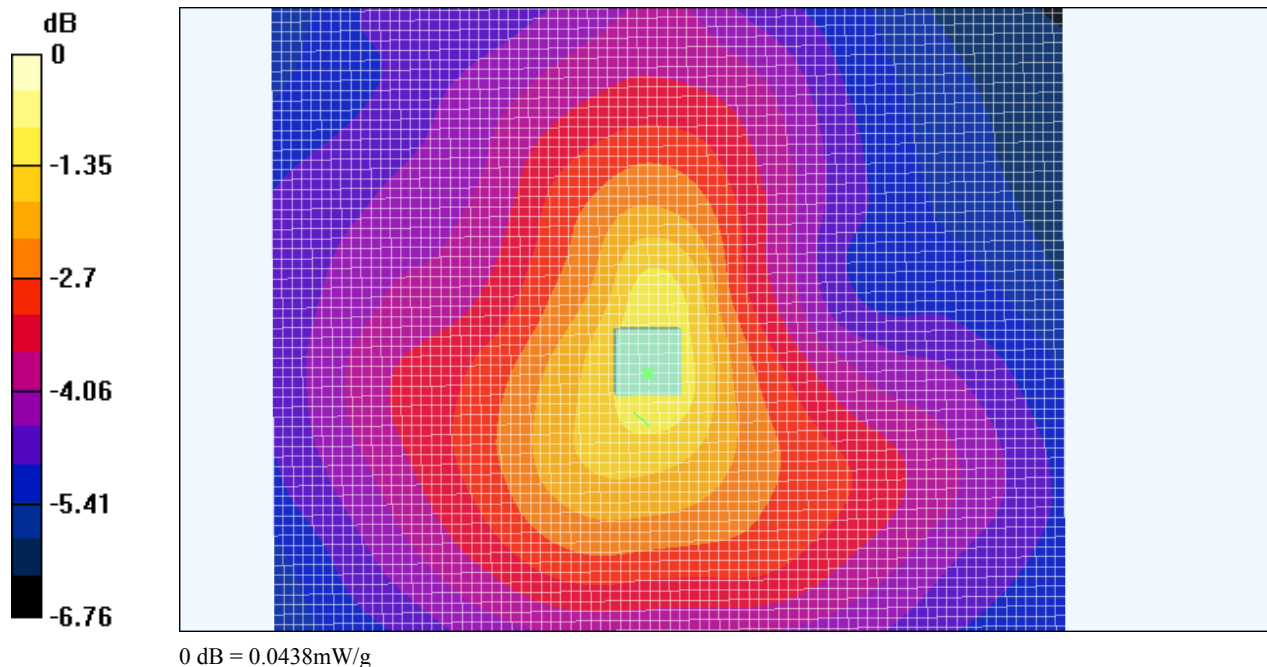

Date/Time: 09/06/03 10:54:30

Test Laboratory: Sporton

11Mbps Wireless LAN USB Dongle Round Tip with 1.5 cm Gap**DUT: 11Mbps Wireless LAN USB Dongle; Type: GWM2-UBA; Serial: 00A0C5FEDCBA****Program Name: DASY4**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL2450 ($\sigma = 2.02$ mho/m, $\epsilon_r = 53.3$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 7/28/2003

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

Channel 11 2462MHz/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 3.76 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0258 mW/g

Channel 11 2462MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Peak SAR (extrapolated) = 0.04 W/kg

SAR (1 g) = 0.0248 mW/g; SAR (10 g) = 0.018 mW/g

Reference Value = 3.76 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0396 mW/g

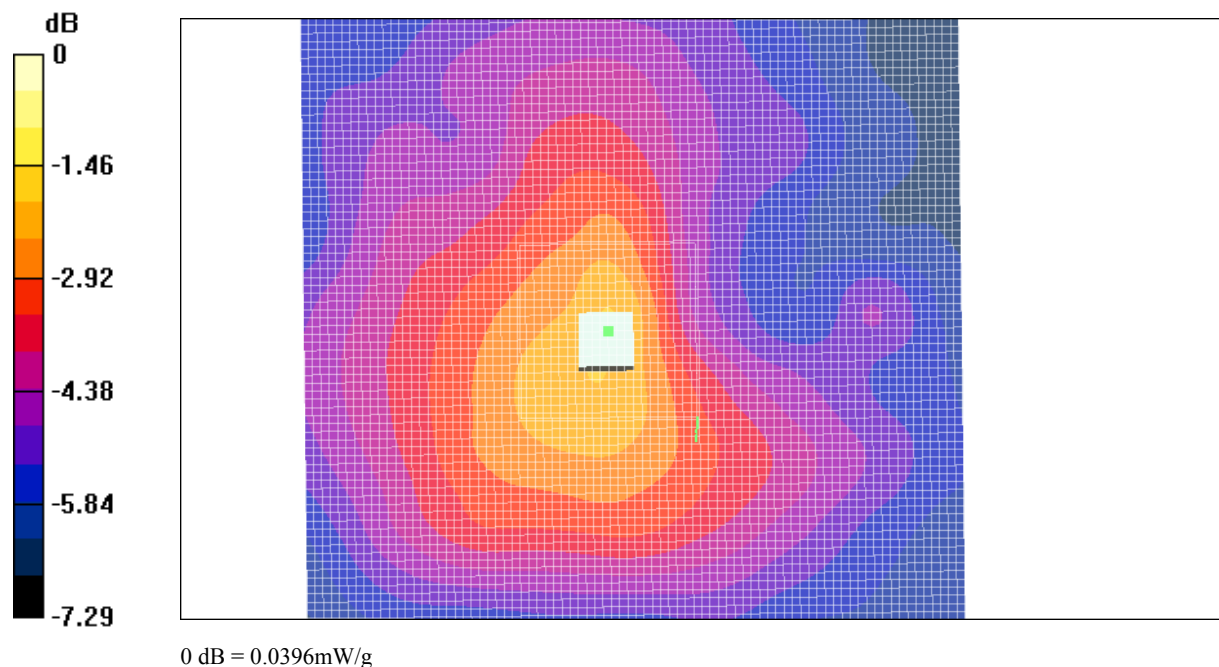

Date/Time: 09/06/03 12:46:39

Test Laboratory: Sporton

11Mbps Wireless LAN USB Dongle Round Tip Attached**DUT: 11Mbps Wireless LAN USB Dongle; Type: GWM2-UBA; Serial: 00A0C5FEDCBA****Program Name: DASY4**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL2450 ($\sigma = 2.02$ mho/m, $\epsilon_r = 53.3$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section ; Ambient temp.: 22° C; Liquid temp. 21.5° C

DASY4 Configuration:

- Probe: ET3DV6 - SN1687; ConvF (4.4, 4.4, 4.4); Calibrated: 9/28/2002

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 7/28/2003

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1303

- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

Channel 11 2462MHz/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.9 V/m

Power Drift = 0.005 dB

Maximum value of SAR = 0.19 mW/g

Channel 11 2462MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 0.52 W/kg

SAR (1 g) = 0.179 mW/g; SAR (10 g) = 0.0755 mW/g

Reference Value = 10.9 V/m

Power Drift = 0.005 dB

Maximum value of SAR = 0.208 mW/g

