

FCC Test Report

Product Name	In Wall Single relay (1 way) switch module
Model No.	PAN05-2
FCC ID.	RHHPAN05

Applicant	Philio Technology Corporation
Address	8F.,No.653-2,Zhongzheng Rd., Xinzhuang Dist., New Taipei City 24257,Taiwan(R.O.C)

Date of Receipt	May 20, 2014
Issued Date	Jul. 02, 2014
Report No.	1480438R-RFUSP15V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.


The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issued Date: Jul. 02, 2014

Report No.: 1480438R-RFUSP15V00



Product Name	In Wall Single relay (1 way) switch module
Applicant	Philio Technology Corporation
Address	8F.,No.653-2,Zhongzheng Rd., Xinzhuang Dist., New Taipei City 24257,Taiwan(R.O.C)
Manufacturer	Philio Technology Corporation
Model No.	PAN05-2
FCC ID.	RHHPAN05
EUT Rated Voltage	AC 100-120V / 60Hz
EUT Test Voltage	AC 120V / 60Hz
Trade Name	
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2013 ANSI C63.10: 2009
Test Result	Complied

Documented By


:



(Senior Adm. Specialist / Joanne Lin)

Tested By

:



(Engineer / Nova Chu)

Approved By

:




(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description	4
1.2. Operation Description	5
1.3. Tested System Details	6
1.4. Configuration of Test System.....	6
1.5. EUT Exercise Software.....	6
1.6. Test Facility	7
2. Conducted Emission	8
2.1. Test Equipment	8
2.2. Test Setup.....	8
2.3. Limits	9
2.4. Test Procedure	9
2.5. Uncertainty.....	9
2.6. Test Result of Conducted Emission	10
3. Radiated Emission	12
3.1. Test Equipment	12
3.2. Test Setup.....	13
3.3. Limits	14
3.4. Test Procedure.....	15
3.5. Uncertainty.....	15
3.6. Test Result of Radiated Emission	16
4. Band Edge.....	25
4.1. Test Equipment	25
4.2. Test Setup.....	25
4.3. Limit.....	26
4.4. Test Procedure.....	26
4.5. Uncertainty.....	26
4.6. Test Result of Band Edge.....	27
5. EMI Reduction Method During Compliance Testing	31
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	In Wall Single relay (1 way) switch module
Trade Name	
FCC ID.	RHHPAN05
Model No.	PAN05-2
Frequency Range	908.4MHz, 916.0MHz
Type of Modulation	FSK
Number of Channels	2
Channel Control	Auto
Antenna Type	Monopole Antenna

Center Frequency of Each Channel:

Channel	Frequency
Channel 1:	908.4MHz
Channel 2:	916.0MHz

Note:

1. The EUT is a In Wall Single relay (1 way) switch module with a built-in 908.4MHz, 916.0MHz Z-Wave transceiver.
2. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit
-----------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Load (1400W)	DELL	N/A	N/A
2	Switch (two PCS)		N/A	N/A

Signal Cable Type	Signal cable Description
A	Power Line Cable
	Non-Shielded, 0.2m, six PCS

1.4. Configuration of Test System

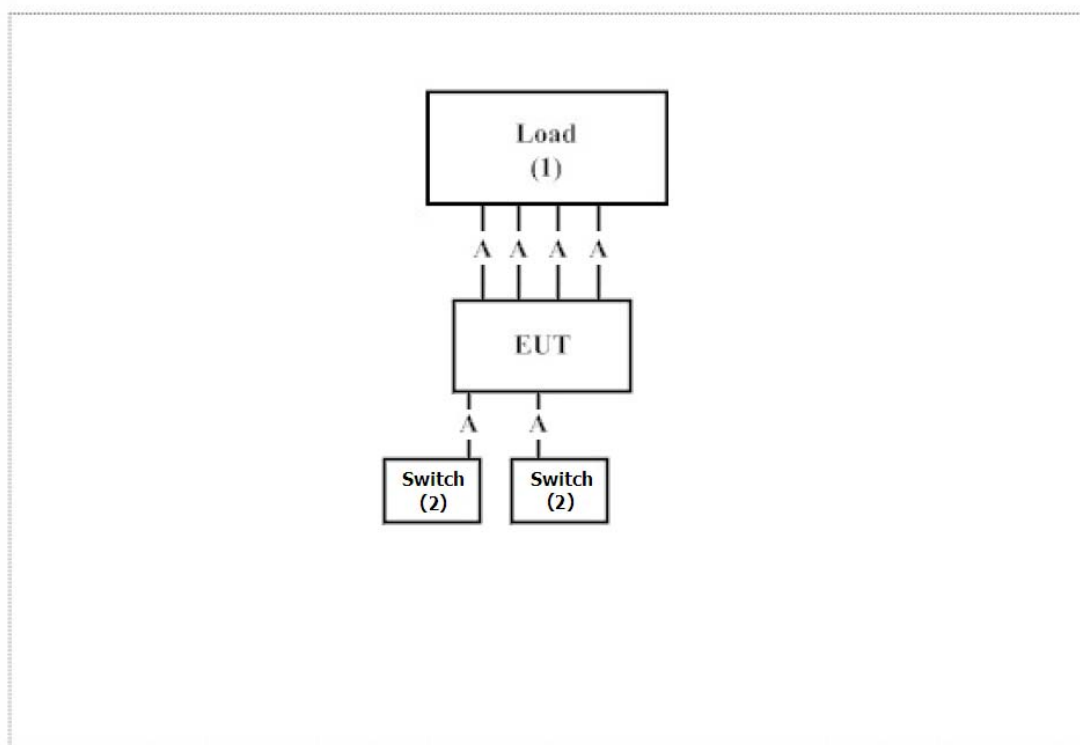

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Provide the AC Power Source.
- (3) Start transmits continually.
- (4) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://tw.quietek.com/modules/myalbum/>
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng Linkou Dist., New Taipei City
24451, Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2014	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2014	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2014	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2014	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2014	
	No.8 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

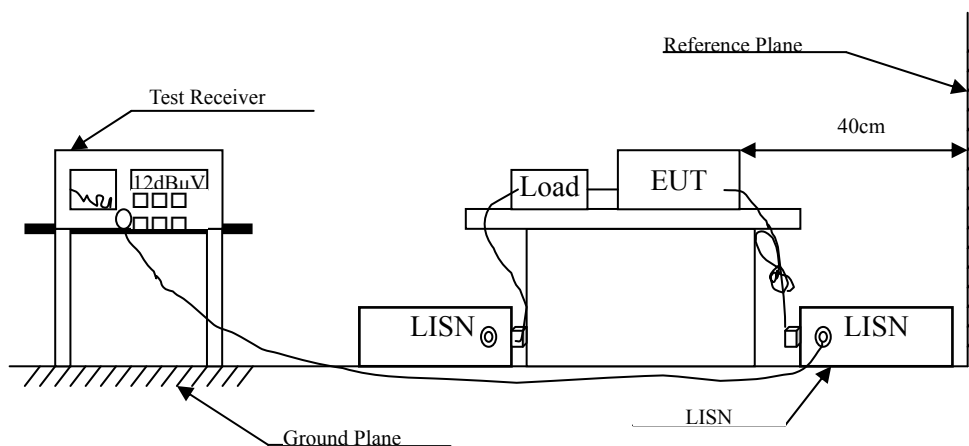

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : In Wall Single relay (1 way) switch module
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmit (908.4MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV	Margin dB	Limit dBμV
Line 1					
Quasi-Peak					
0.170	9.655	49.730	59.385	-6.044	65.429
0.209	9.651	47.640	57.291	-7.023	64.314
0.271	9.654	44.960	54.614	-7.929	62.543
0.353	9.659	41.350	51.009	-9.191	60.200
0.447	9.664	35.610	45.274	-12.240	57.514
0.634	9.674	30.620	40.294	-15.706	56.000
Average					
0.170	9.655	33.200	42.855	-12.574	55.429
0.209	9.651	30.900	40.551	-13.763	54.314
0.271	9.654	28.410	38.064	-14.479	52.543
0.353	9.659	24.850	34.509	-15.691	50.200
0.447	9.664	19.410	29.074	-18.440	47.514
0.634	9.674	12.030	21.704	-24.296	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : In Wall Single relay (1 way) switch module
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmit (908.4MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	dB	dBμV
	dB	dBμV	dBμV		
Line 2					
Quasi-Peak					
0.150	9.661	50.030	59.691	-6.309	66.000
0.216	9.661	47.390	57.051	-7.063	64.114
0.271	9.664	44.980	54.644	-7.899	62.543
0.326	9.657	42.510	52.167	-8.804	60.971
0.412	9.662	38.120	47.782	-10.732	58.514
0.599	9.672	30.560	40.232	-15.768	56.000
Average					
0.150	9.661	33.360	43.021	-12.979	56.000
0.216	9.661	30.760	40.421	-13.693	54.114
0.271	9.664	28.840	38.504	-14.039	52.543
0.326	9.657	26.630	36.287	-14.684	50.971
0.412	9.662	22.820	32.482	-16.032	48.514
0.599	9.672	12.710	22.382	-23.618	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Radiated Emission

3.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input checked="" type="checkbox"/> Site # 3	X Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2014
	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2014
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2014
	X Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	X Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2014
	X Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2014
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

3.2. Test Setup

Below 1GHz

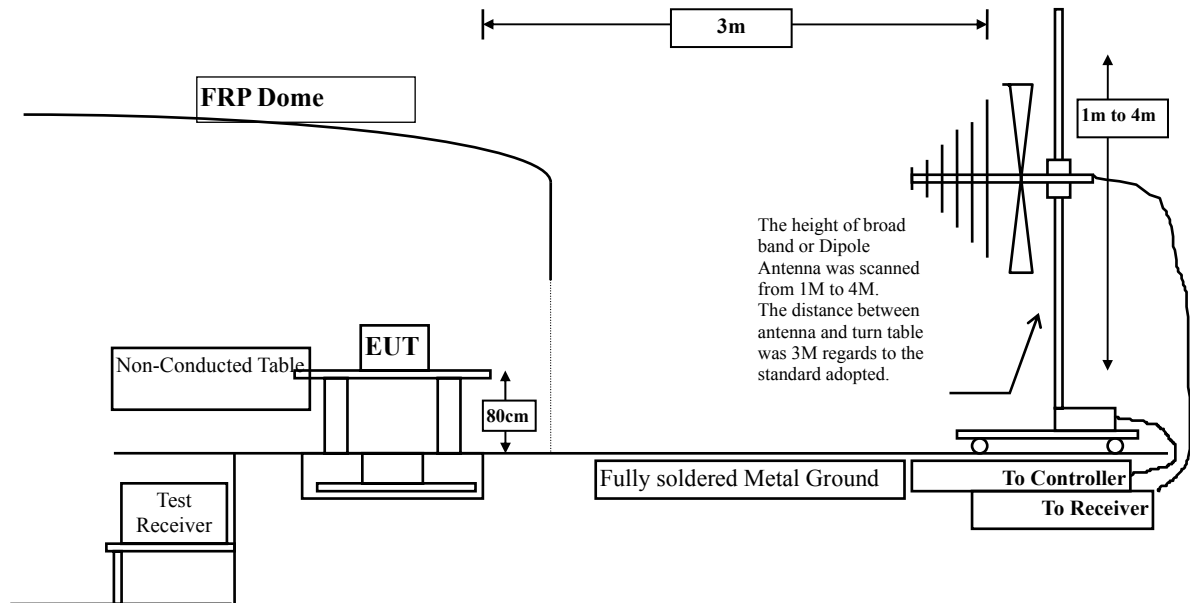

Above 1GHz

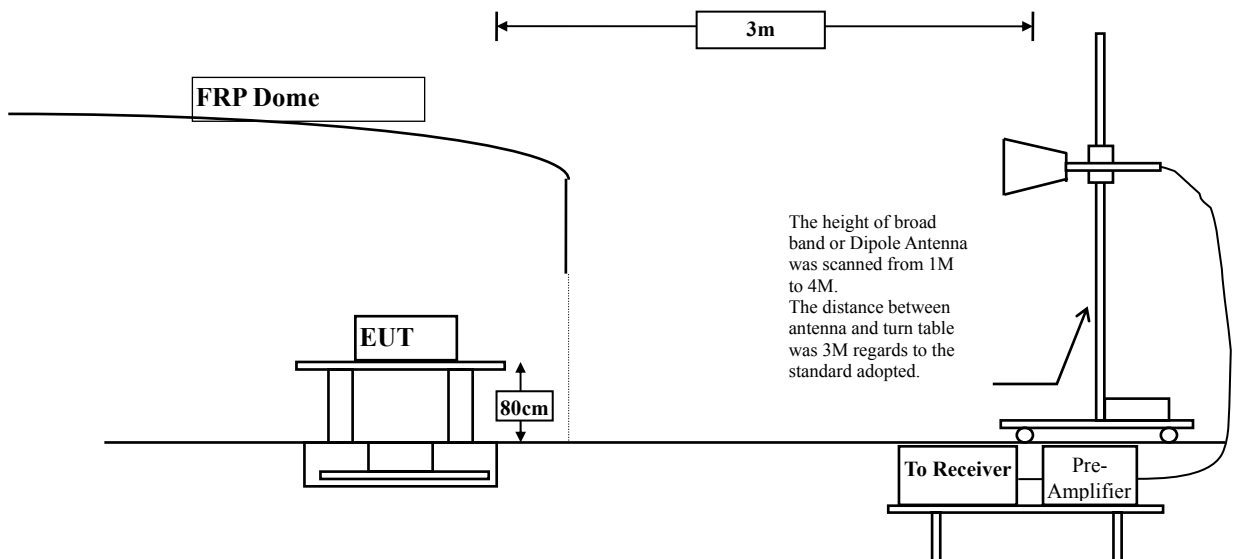

3.3. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBμV/m @3m)	(uV/m @3m)	(dBμV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

Remarks : 1. RF Voltage (dBμV/m) = 20 log RF Voltage (uV/m)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks : 1. RF Voltage (dBμV/m) = 20 log RF Voltage (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

3.6. Test Result of Radiated Emission

Product : In Wall Single relay (1 way) switch module
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (X-asix)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
908.400	6.291	82.030	88.321	-5.679	94.000
916.000	6.434	82.190	88.624	-5.376	94.000
Vertical					
908.400	0.747	87.850	88.597	-5.403	94.000
916.000	-0.901	87.000	86.099	-7.901	94.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : In Wall Single relay (1 way) switch module
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (Y-asix)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
Horizontal					
908.400	6.291	83.310	89.601	-4.399	94.000
916.000	6.434	82.610	89.044	-4.956	94.000
Vertical					
908.400	0.747	81.600	82.347	-11.653	94.000
916.000	-0.901	88.360	87.459	-6.541	94.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : In Wall Single relay (1 way) switch module
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (Z-asix)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
908.400	6.291	83.410	89.701	-4.299	94.000
916.000	6.434	83.430	89.864	-4.136	94.000
Vertical					
908.400	0.747	82.450	83.197	-10.803	94.000
916.000	-0.901	82.310	81.409	-12.591	94.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : In Wall Single relay (1 way) switch module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (908.4MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
Peak Detector:					
1816.800	-0.546	44.180	43.635	-30.365	74.000
2725.200	-2.972	56.580	53.608	-20.392	74.000
3633.600	-1.186	43.070	41.884	-32.116	74.000
4542.000	2.357	45.280	47.636	-26.364	74.000
5450.400	3.829	40.460	44.289	-29.711	74.000
6358.800	5.583	41.200	46.783	-27.217	74.000
7267.200	9.789	38.990	48.779	-25.221	74.000
8175.600	11.090	41.550	52.640	-21.360	74.000
9084.000	11.885	39.020	50.905	-23.095	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : In Wall Single relay (1 way) switch module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (908.4MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Vertical					
Peak Detector:					
1816.800	0.256	42.440	42.697	-31.303	74.000
2725.200	-2.972	55.620	52.648	-21.352	74.000
3633.600	-1.291	43.460	42.169	-31.831	74.000
4542.000	0.732	49.900	50.631	-23.369	74.000
5450.400	3.621	40.830	44.451	-29.549	74.000
6358.800	5.741	41.600	47.341	-26.659	74.000
7267.200	9.268	39.690	48.959	-25.041	74.000
8175.600	10.122	41.310	51.432	-22.568	74.000
9084.000	11.666	39.150	50.816	-23.184	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : In Wall Single relay (1 way) switch module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (916.0MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
Peak Detector:					
1832.000	-1.292	43.032	41.740	-32.260	74.000
2748.000	-2.777	55.350	52.573	-21.427	74.000
3664.000	-1.420	42.400	40.979	-33.021	74.000
4580.000	2.285	43.170	45.455	-28.545	74.000
5496.000	4.419	40.800	45.219	-28.781	74.000
6412.000	6.060	40.070	46.130	-27.870	74.000
7328.000	10.732	38.490	49.222	-24.778	74.000
8244.000	11.499	41.580	53.079	-20.921	74.000
9160.000	11.539	39.730	51.269	-22.731	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : In Wall Single relay (1 way) switch module
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (916.0MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBμV	dBμV/m	dB	dBμV/m
Vertical					
Peak Detector:					
1832.000	-0.666	41.570	40.904	-33.096	74.000
2748.000	-1.900	54.240	52.340	-21.660	74.000
3664.000	-1.641	43.180	41.539	-32.461	74.000
4580.000	0.670	48.810	49.481	-24.519	74.000
5496.000	4.424	40.130	44.555	-29.445	74.000
6412.000	5.944	41.190	47.135	-26.865	74.000
7328.000	10.103	38.280	48.383	-25.617	74.000
8244.000	10.591	41.630	52.221	-21.779	74.000
9160.000	11.453	38.720	50.173	-23.827	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : In Wall Single relay (1 way) switch module
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (908.4MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB μ V	dB μ V/m	dB	dB μ V/m
Horizontal					
117.300	-7.350	24.633	17.283	-26.217	43.500
255.040	-5.409	34.717	29.308	-16.692	46.000
460.680	4.030	22.928	26.958	-19.042	46.000
596.480	3.587	27.334	30.921	-15.079	46.000
788.540	6.144	28.318	34.462	-11.538	46.000
852.560	7.106	27.428	34.534	-11.466	46.000
Vertical					
45.520	-10.625	39.349	28.724	-11.276	40.000
255.040	-5.089	28.953	23.864	-22.136	46.000
381.140	0.816	24.537	25.353	-20.647	46.000
524.700	1.130	24.591	25.721	-20.279	46.000
685.720	2.254	23.043	25.297	-20.703	46.000
792.420	2.681	23.494	26.175	-19.825	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : In Wall Single relay (1 way) switch module
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (916.0MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBμV	dBμV/m	dB	dBμV/m
Horizontal					
128.940	-7.390	24.281	16.891	-26.609	43.500
255.040	-5.409	34.986	29.577	-16.423	46.000
288.020	-5.557	31.905	26.348	-19.652	46.000
452.920	1.290	25.257	26.547	-19.453	46.000
606.180	4.196	23.830	28.026	-17.974	46.000
813.760	6.296	27.746	34.042	-11.958	46.000
Vertical					
45.520	-10.625	38.127	27.502	-12.498	40.000
255.040	-5.089	28.537	23.448	-22.552	46.000
381.140	0.816	23.032	23.848	-22.152	46.000
619.760	0.474	26.049	26.523	-19.477	46.000
780.780	2.769	29.738	32.507	-13.493	46.000
877.780	0.847	29.362	30.209	-15.791	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge


4.1. Test Equipment

The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 3	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2014
	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2014
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2014
	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2014
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by "X" are used to measure the final test results.

4.2. Test Setup

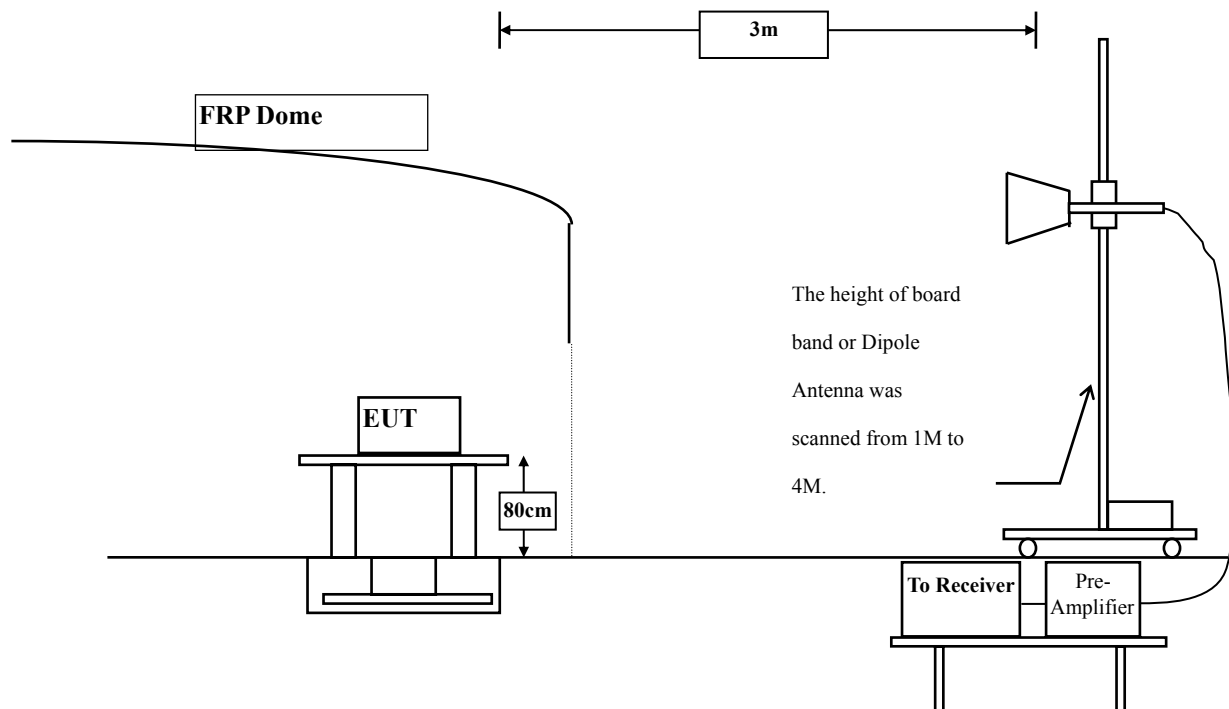

4.3. Limit

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

4.5. Uncertainty

Radiated is ± 3.9 dB.

4.6. Test Result of Band Edge


Product : In Wall Single relay (1 way) switch module
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (908.4MHz)

RF Radiated Measurement (Horizontal):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Quasi-Peak Limit (dB μ V/m)	Result
01(Quasi-Peak)	902.000	-6.370	29.000	22.630	47.000	Pass

Figure Channel 01:

Horizontal (Quasi-Peak)

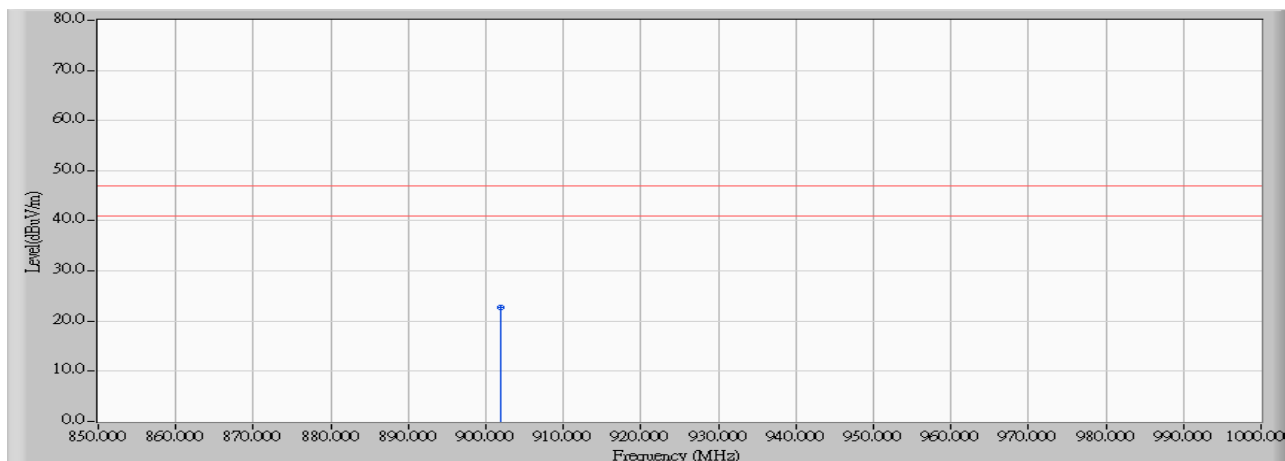

Note:


1. Quasi-Peak measurements: RBW=100kHz, VBW=1MHz, Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Product : In Wall Single relay (1 way) switch module
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (908.4MHz)

RF Radiated Measurement (Vertical):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Quasi-Peak Limit (dBμV/m)	Result
01(Quasi-Peak)	902.000	-5.220	28.350	23.130	47.000	Pass

Figure Channel 01: Vertical (Quasi-Peak)

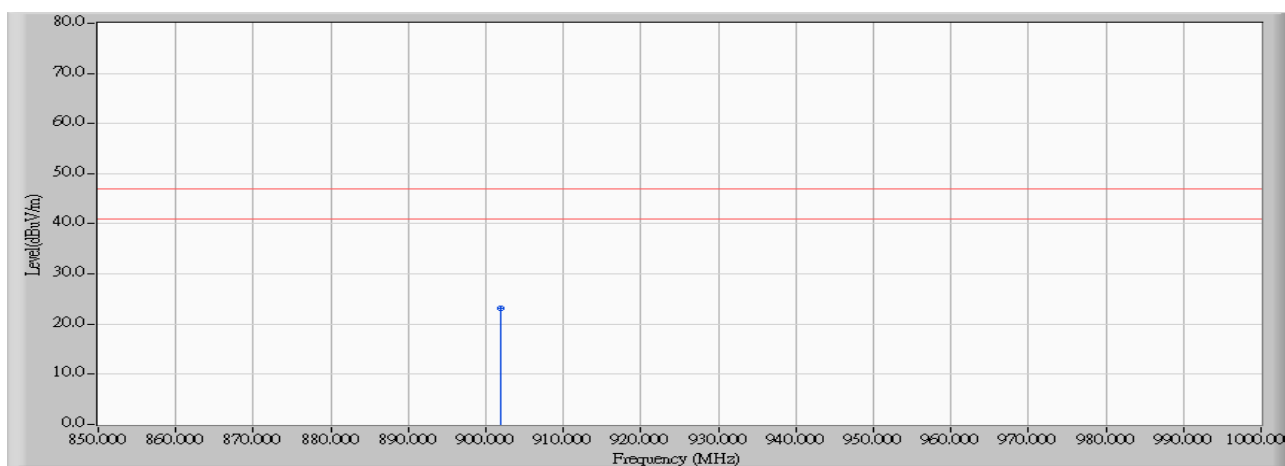

Note:


1. Quasi-Peak measurements: RBW=100kHz,VBW=1MHz,Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Product : In Wall Single relay (1 way) switch module
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (916.0MHz)

RF Radiated Measurement (Horizontal):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Quasi-Peak Limit (dBμV/m)	Result
02(Quasi-Peak)	928.000	-6.122	41.430	35.308	47.000	Pass

Figure Channel 02: Horizontal (Quasi-Peak)

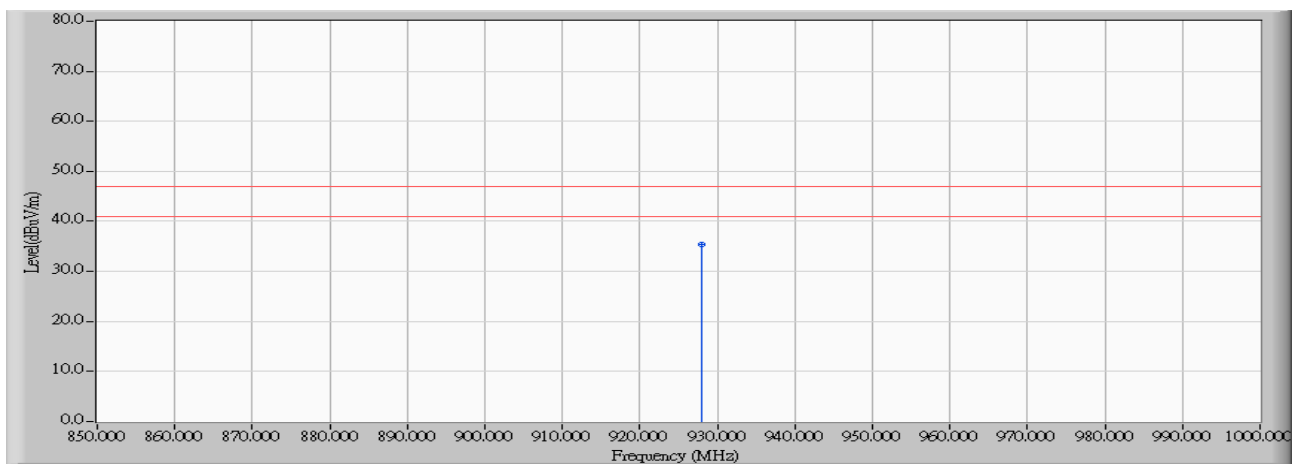

Note:


1. Quasi-Peak measurements: RBW=100kHz, VBW=1MHz, Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Product : In Wall Single relay (1 way) switch module
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (916.0MHz)

RF Radiated Measurement (Vertical):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Quasi-Peak Limit (dB μ V/m)	Result
02(Quasi-Peak)	928.000	-5.142	41.000	35.858	47.000	Pass

Figure Channel 02: Vertical (Quasi-Peak)

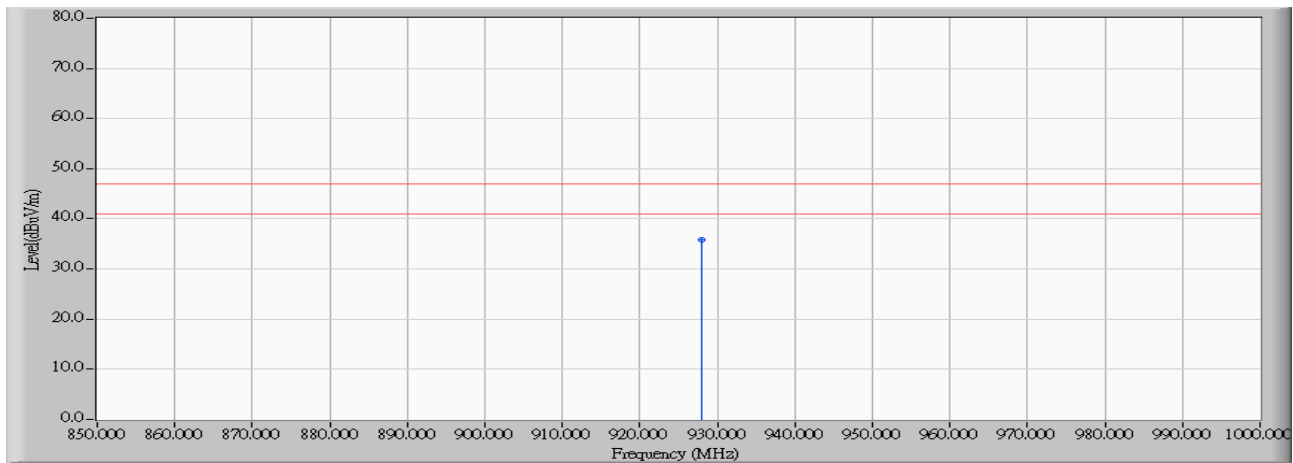

Note:

1. Quasi-Peak measurements: RBW=100kHz,VBW=1MHz,Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

5. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1 : EUT Test Photographs

Attachment 2 : EUT Detailed Photographs