



TEST REPORT

Product Name : 3rd Generation Customer Premise Equipment
Model Number : Gen3-CPE
Brand Name : Digital Path Networks
FCC ID : RHK-G3CPE100

Applicant : Digital Path Networks
Address : 275 Airpark Boulevard, Suite 500 Chico,
CA 95973 USA

Received Date : April 21, 2004
Tested Date : April 21 ~ September 14, 2004

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : RHK-G3CPE100

Report No. : ER04-04-057FRF

Page 2 of 86

Test Report Certification

Product Name : 3rd Generation Customer Premise Equipment
Model Number : Gen3-CPE
Brand Name : Digital Path Networks
FCC ID : RHK-G3CPE100
Applicant : Digital Path Networks

Measurement Standard :

FCC 47 C.F.R. Part 15, Subpart B and Subpart C (2003)
ANSI C63.4 (2001)

Tested By : Chris Huang , Date : September 20, 2004
(Chris Huang)

Approved By : Chieh-De Tsai , Date : September 20, 2004
(Chieh-De Tsai, Manager)

WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION	5
1.1 General Statement	5
1.2 General Description of EUT & Power	5
1.3 Description of Peripherals.....	6
1.4 EUT & Peripherals Setup Diagram.....	7
1.5 EUT Operating Procedure.....	8
1.6 Description of Laboratory	8
1.7 Summary of Test Results	9
2. CONDUCTED POWERLINE TEST.....	10
2.1 Test Equipments.....	10
2.2 Test Setup.....	10
2.3 Conducted Power Line Emission Limit.....	11
2.4 Test Procedure.....	11
2.5 Uncertainty of Conducted Emission	11
2.6 Conducted RF Voltage Measurement	12-19
2.7 Photos of Conduction Test.....	20-21
3. RADIATED EMISSION TEST	22
3.1 Test Equipments.....	22
3.2 Test Setup.....	22
3.3 Radiation Limit	23
3.4 Test Procedures	24
3.5 Uncertainty of Radiated Emission	24
3.6 Radiated RF Noise Measurement.....	25-62
3.7 Photos of Open Site.....	63-66
4. 6dB BANDWIDTH MEASUREMENT	67
4.1 Test Equipments.....	67
4.2 Test Setup.....	67
4.3 Limits of 6dB Bandwidth Measurement.....	67
4.4 Test Procedure.....	67
4.5 Uncertainty of Conducted Emission	67
4.6 Test Results	68
4.7 Photo of 6db Bandwidth Measurement.....	69-70



TABLE OF CONTENTS

TITLE	PAGE NO.
5. MAXIMUM PEAK OUTPUT POWER	71
5.1 Test Equipments.....	71
5.2 Test Setup.....	71
5.3 Limits of Maximum Peak Output Power	71
5.4 Test Procedure.....	72
5.5 Uncertainty of Conducted Emission	72
5.6 Test Results	72
6. POWER SPECTRAL DENSITY MEASUREMENT	73
6.1 Test Equipments.....	73
6.2 Test Setup.....	73
6.3 Limits of Power Spectral Density Measurement.....	73
6.4 Test Procedure.....	74
6.5 Uncertainty of Conducted Emission	74
6.6 Test Results	74
6.7 Photo of Power Spectral Density Measurement.....	75-76
7. BAND EDGE MEASUREMENT	77
7.1 Test Equipments.....	77
7.2 Test Setup.....	77
7.3 Limits of Band Edge Emissions Measurement	77
7.4 Test Procedure.....	77
7.5 Uncertainty of Conducted Emission	77
7.6 Test Results	78-79
7.7 Photo of Band edge Measurement	80-83
8. ANTENNA REQUIREMENT	84
8.1 Standard Applicable.....	84
8.2 Antenna Connected Construction	84
9. RF EXPOSURE EVALUATION	85
9.1 Friis Formula.....	85
9.2 EUT Operating Condition.....	85
9.3 Test Result of RF Exposure Evaluation.....	86
9.3.1 Antenna Gain	86
9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance	86



1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to National or International std.

1.2 General Description of EUT & Power

Product Name	3rd Generation Customer Premise Equipment
Model Number	Gen3-CPE
Frequency Range	2400MHz to 2483.5MHz
Frequency Channel	2412MHz + 5×n (MHz), n=0, 1, 2,.....10
Channel Number	11
Channel Spacing	5MHz
Air Data Rate	54Mbps (802.11g Mode), 11Mbps(802.11b Mode)
Type of Modulation	802.11b : DSSS(CCK, DQPSK, DBPSK) 802.11g : OFDM(64QAM, 16AQM, QPSK, BPSK)
Frequency Selection	by software / firmware
EUT Description	2.4GHz (Direct Sequence Spread Spectrum and Orthogonal Frequency Division Multiplex) Data Transceiver for WLAN application
Antenna Type	ANTENNA (1) : Omni-directional antenna, 9dBi, RFtechnics Ltd., RFT-0M-09-24 ANTENNA (2) : Directional panel antenna, 14.2dBi, SuperPass, SPFPG14 ANTENNA (3) : Omni-directional antenna, 8dBi, SuperPass, SPDG16O ANTENNA (4) : Flat plate antenna, 14dBi, RFtechnics Ltd., RFT-FP-24-14 All these antennas are soldered on PCB directly.
Power Source	24VDC from Ethernet, POE.



1.3 Description of Peripherals

(1) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : N800V
SERIAL NUMBER : 5Y33KSQZMOYL
FCC ID : DOC
POWER CORD : Unshielded, Detachable, 1.8m

Adapter

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : PPP009L
INPUT POWER : 100-240V, 50/60Hz, 1.7A
OUTPUT POWER : 18.5VDC, 65W, 3.5A

(2) Wireless LAN PCMICA Card

MANUFACTURER : BUFFALO
MODEL NUMBER : WLI-CB-G54A
FCC : FDI-09101744-0


(3) Adapter

MANUFACTURER : MOTOQOLA
MODEL NUMBER : SADB-1129
INPUT POWER : 120VAC, 50/60Hz, 14W
OUTPUT POWER : 24VDC, 400mA

(4) Adapter

	Type	Connector	shielded	Length
(A)	Cat5 twisted-pair	RJ-45,Plastic	NO	5m

1.4 EUT & Peripherals Setup Diagram

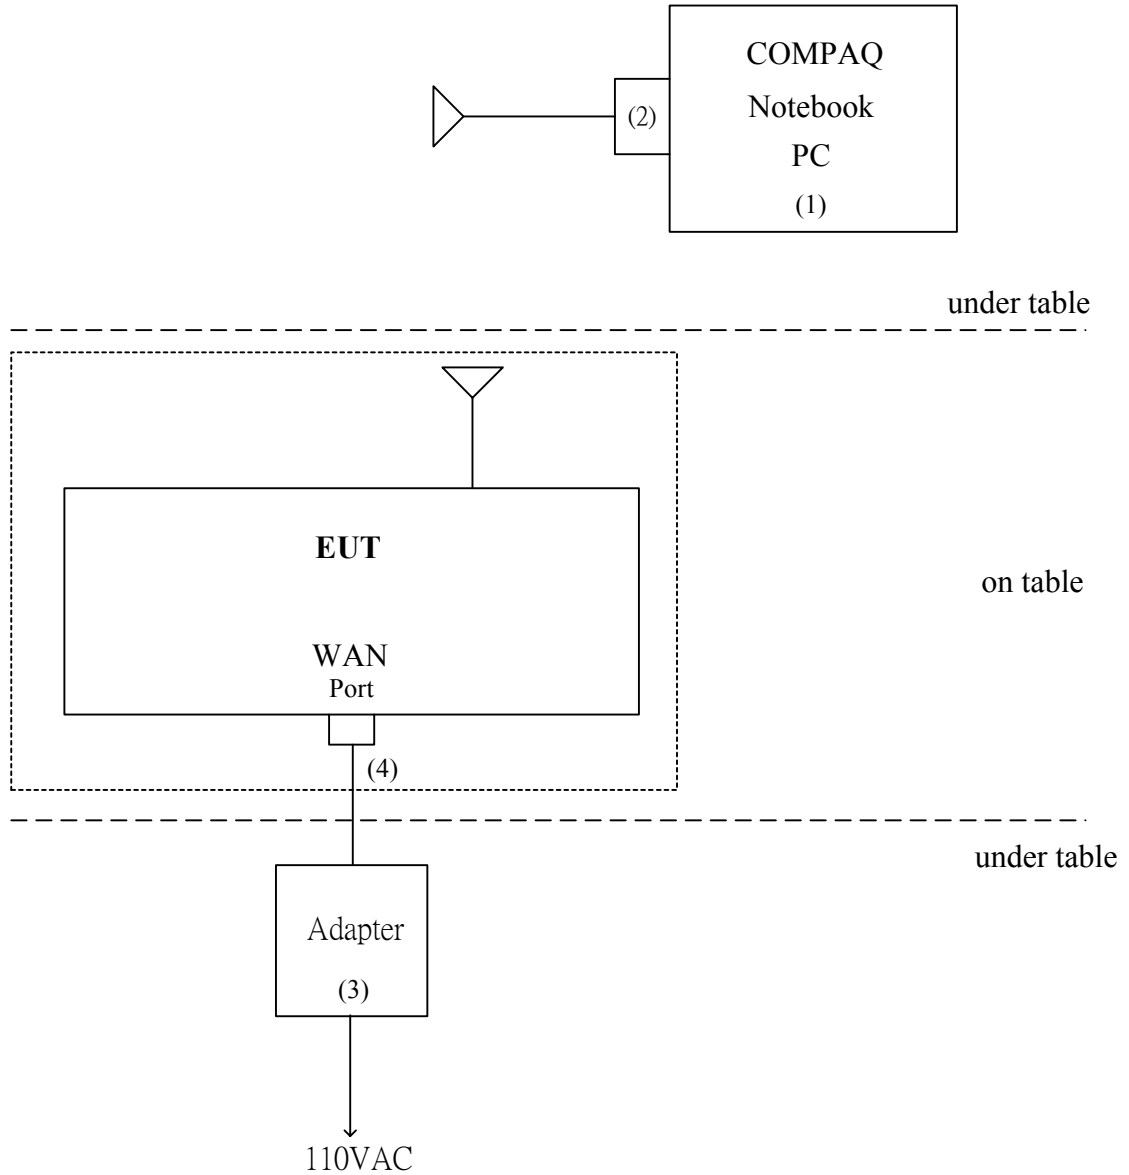

The indicated numbers (1)(2).....,please refer to item 1.3



1.5 EUT Operating Procedure

- (1) Set up all computers like the setup diagram.
- (2) Note: Client NB's IP must set as 192.168.1.100. The NB must connect with the WRT54G V2.0.
- (3) Start "IE" with HTTP://192.168.1.1
- (4) Login Main Web only need the Password: admin
- (5) Login EMI testing page http://192.168.1.1/emi_test.asp
- (6) Command "wl antdiv 0" and click "Apply".
- (7) Command "wl txant 0" and click "Apply".
- (8) Command "wl rate 11" and click "Apply".
- (9) Command "wl channel 1".
- (10) Command "epi_tcp -tsufm -l 1472 -n 1000000 192.168.1.100" and click "Apply".
- (11) Start test.
- (12) Antenna (1) and (3) are the same type of antenna and antenna (2) and (4) are the same type of antenna. After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3) and the emission of antenna (2) is higher than the emission of antenna (4). The test results of antenna (1) and (2) are recorded infinal test report as representative.

1.6 Description of Laboratory

SITE DESCRIPTION

FCC Certificate NO. : 90585
BSMI Certificate NO. : SL2-IN-E-0002
NVLAP Lab code : 200118-0
CNLA Certificate NO. : CNLA-ZL97018
VCCI Certificate NO. : R-1189, C-1250
TÜV Rheinland Certificate NO. : 10008375

NAME OF SITE : Ecom Sertech Corp. Hsin-Chu Lab.
(Spin-off from ITRI / ERSO on Apr. 01, 2003)

SITE LOCATION : Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : RHK-G3CPE100

Report No. : ER04-04-057FRF

Page 9 of 86

1.7 Summary of Test Results

The EUT has been tested according to the following specifications :

APPLIED STANDARD : FCC 47 C.F.R. Part 15, Subpart B and Subpart C

Standard Section	Test Item and Limit	Result	REMARK
15.107 15.207	AC Power Conducted Emission Limit : 15.107	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Orthogonal Frequency Division Multiplex System Limit : 6dB bandwidth > 500KHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit : max. 22dBm	PASS	Meet the requirement of limit
15.109 15.205 15.209	Transmitter Radiated Emissions Limit : Table 15.209	PASS	Meet the requirement of limit
15.247(d)	Power Spectral Density Limit : max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Out of Band Emission and Restricted Band Radiation Limit:20dB less than peak value of fundamental frequency Restricted band Limit:Table 15.209	PASS	Meet the requirement of limit




2. CONDUCTED POWERLINE TEST

2.1 Test Equipments

The following test equipments are used during the conducted powerline tests :

Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
HP SPECTRUM ANALYZER & DISPLAY	8594E	3801A05627	April 26, 2004	1 Year	PRETEST
SOLAR ISOLATION TRANSFORMER	7032-1	N/A	N/A	N/A	FINAL
EMCO L.I.S.N.	3850/2	9311-1025 9401-1028	January 08, 2004 For Characteristic impedance May 18, 2004 For Insertion loss	1 Year	FINAL
R & S TEST RECEIVER	ESHS 30	838550/003	February 11, 2004	1 Year	FINAL
KEENE SHIELDED ROOM	5983	No.1	N/A	N/A	FINAL
R & S PULSE LIMIT	EHS3Z2	357.8810.52	July 10, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	July 10, 2004	1 Year	FINAL
50Ω TERMINATOR	-----	-----	July 10, 2004	1 Year	FINAL

2.2 Test Setup

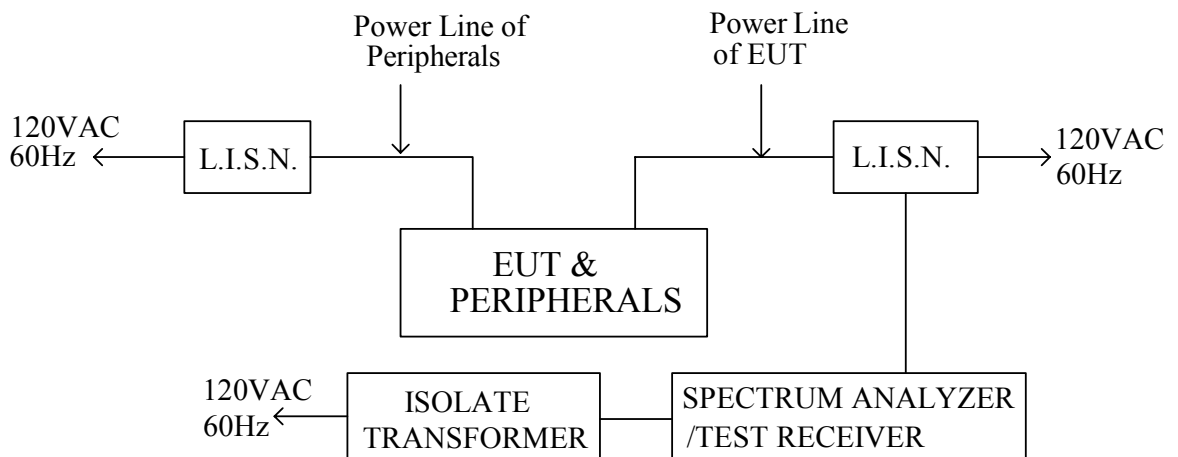



2.3 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ v)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 Test Procedure

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room. The EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.36 dB.




2.6 Conducted RF Voltage Measurement

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Digital Path Networks	Test Date	2004/05/31
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	25°C, 60%

LINE

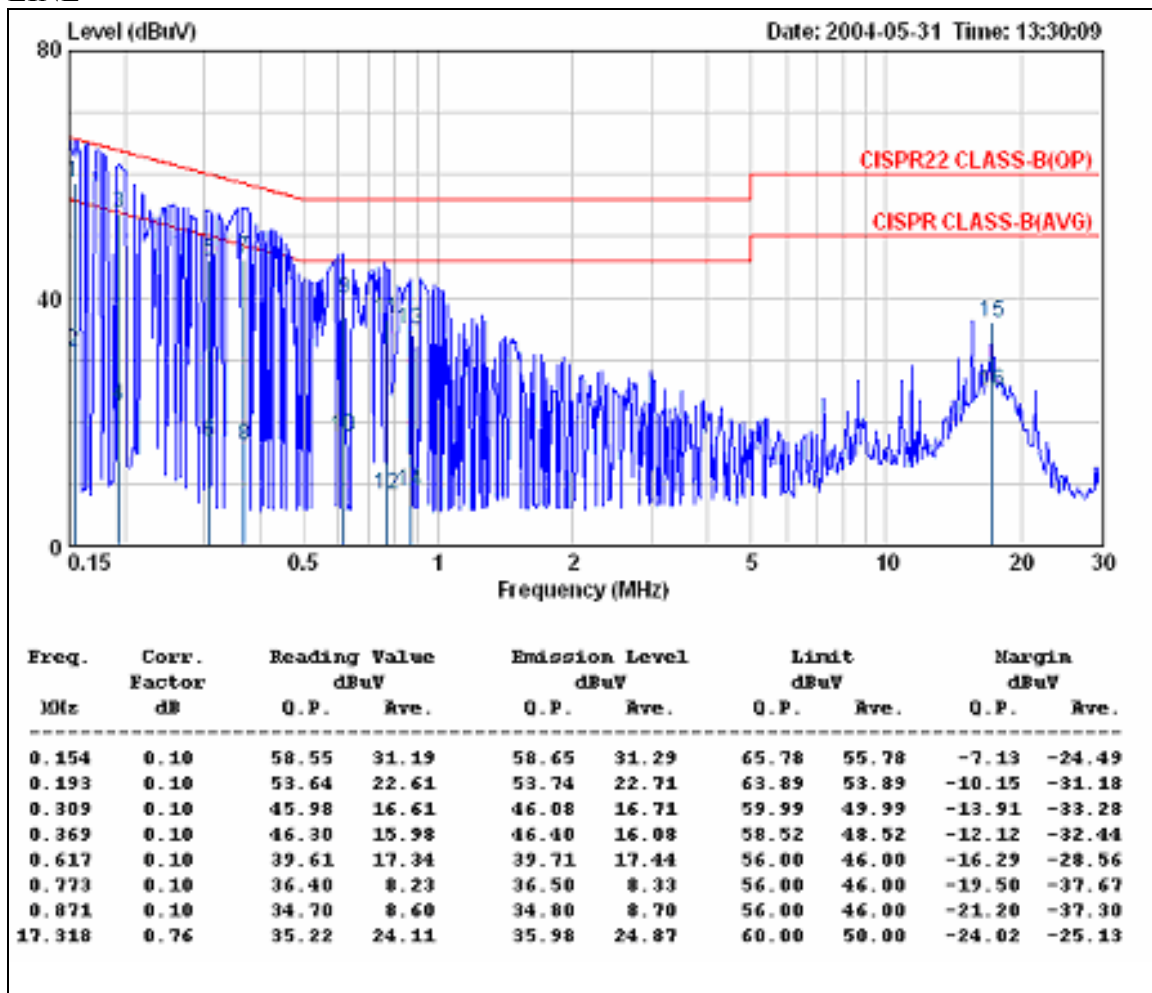

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11b mode.(Antenna 1)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 13 of 86

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Digital Path Networks	Test Date	2004/05/31
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	25°C, 60%

NEUTRAL

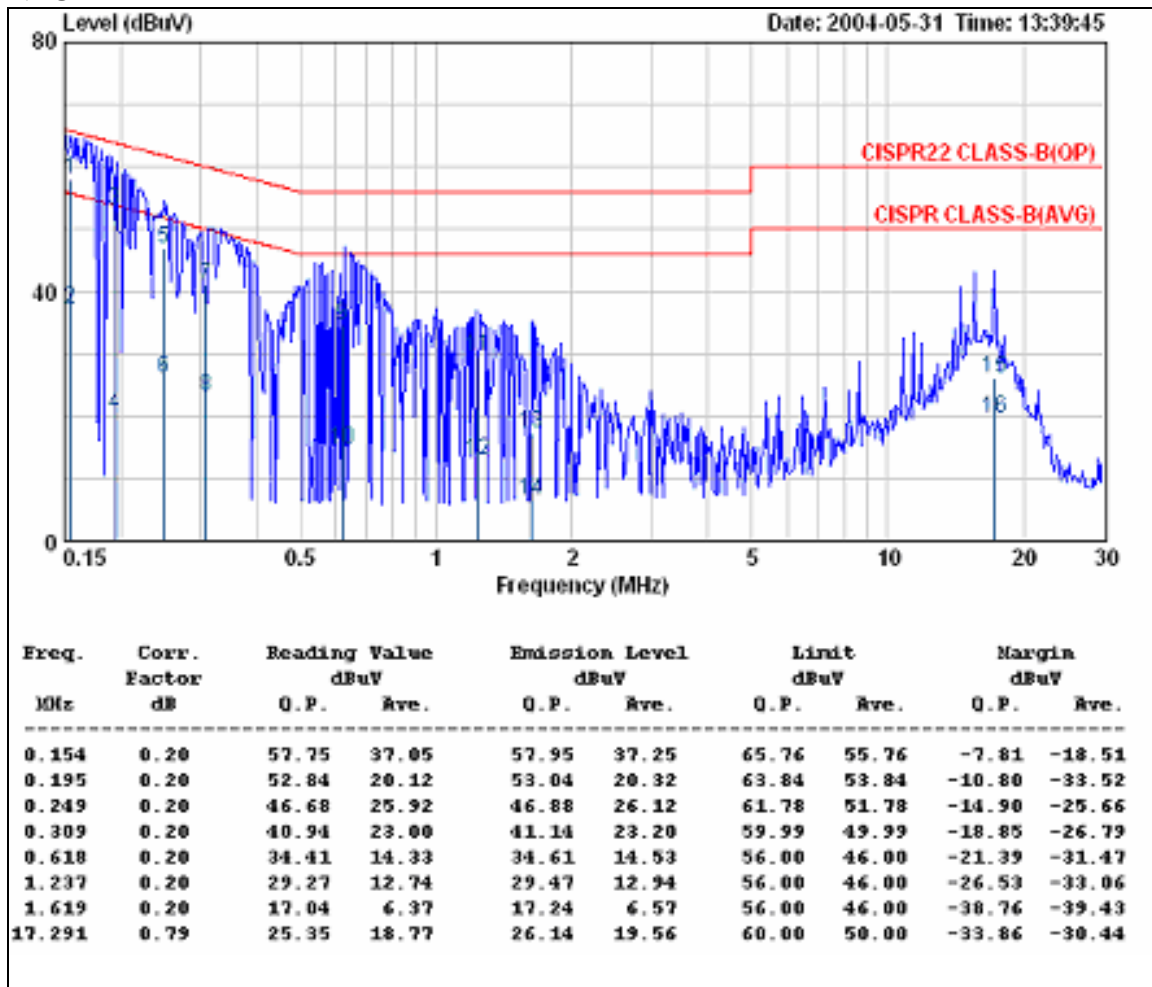

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11b mode. (Antenna 1)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : RHK-G3CPE100


Report No. : ER04-04-057FRF

Page 14 of 86

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Digital Path Networks	Test Date	2004/05/31
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	25°C, 60%

LINE

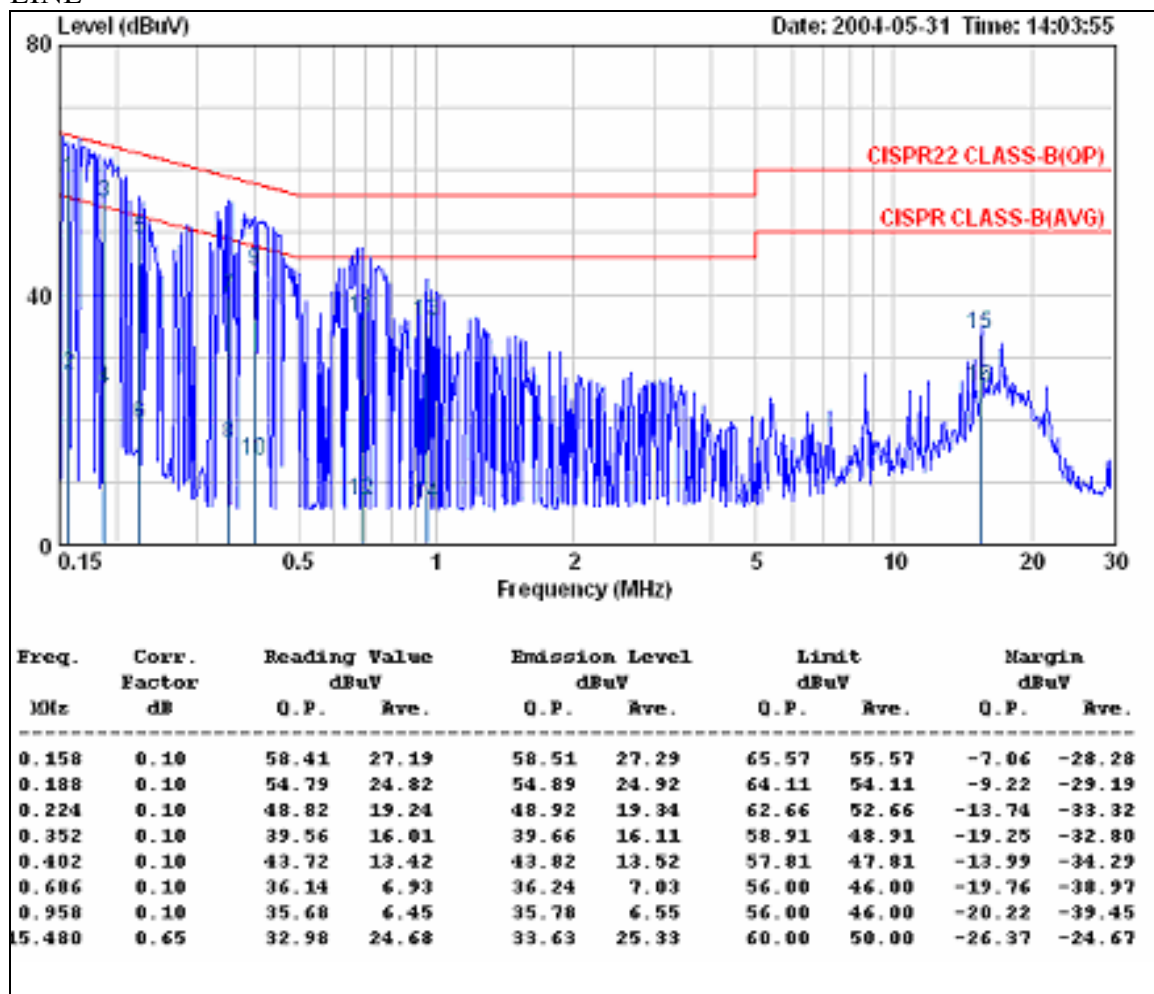

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11g mode. (Antenna 1)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 15 of 86

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Digital Path Networks	Test Date	2004/05/31
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	25°C, 60%

NEUTRAL

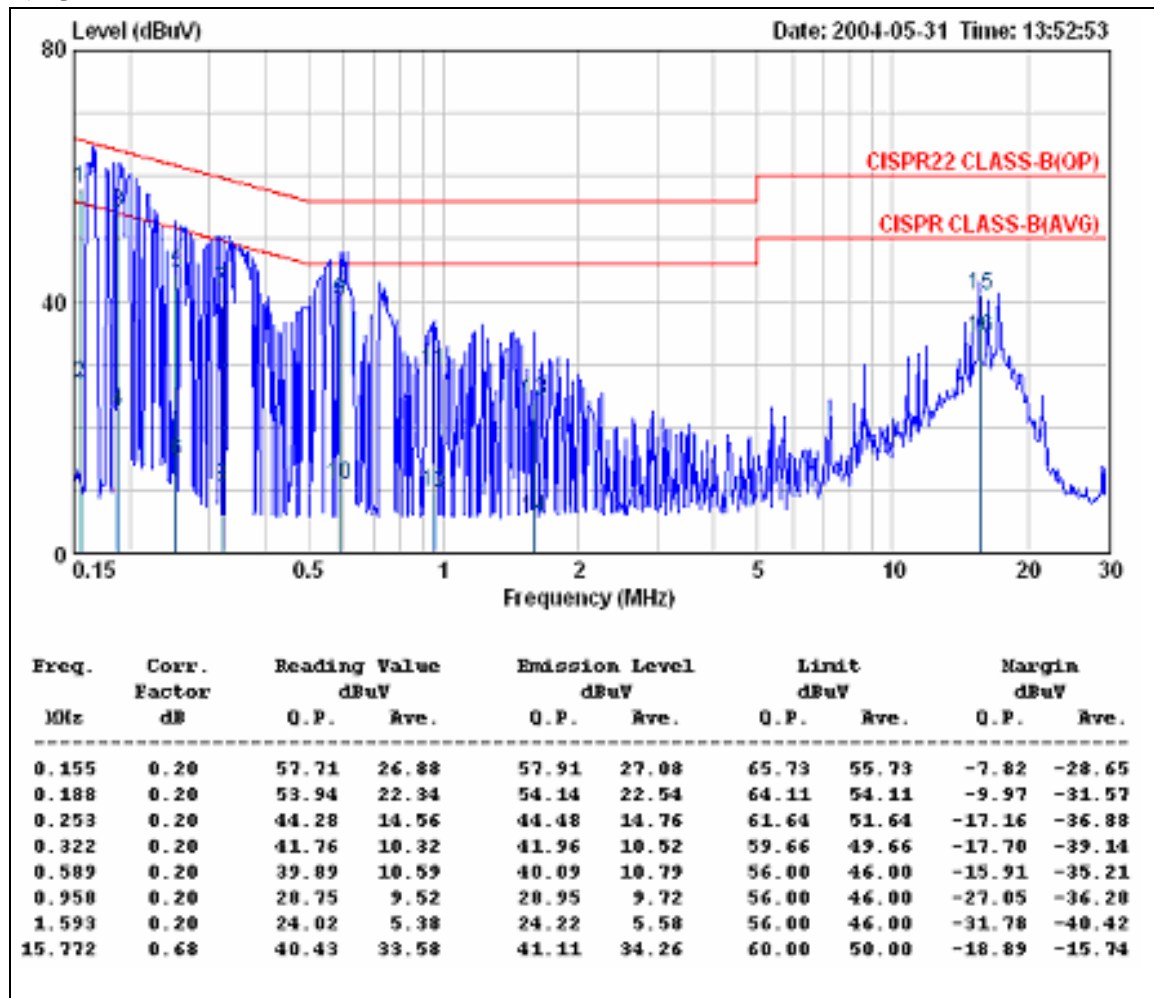

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11g mode. (Antenna 1)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 16 of 86

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Digital Path Networks	Test Date	2004/06/04
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	25°C, 60%

LINE

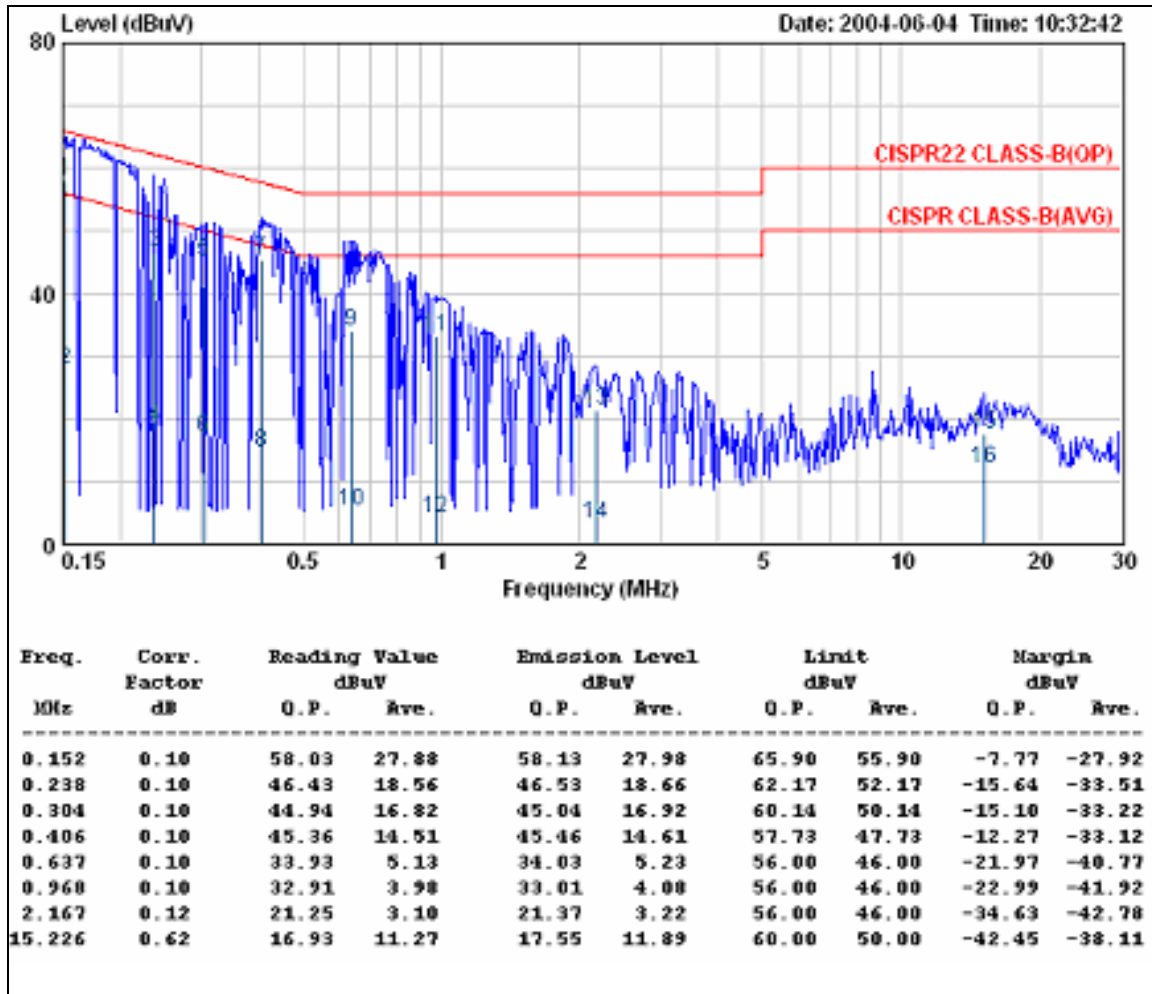

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11b mode. (Antenna 2)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100


Report No. : ER04-04-057FRF

Page 17 of 86

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Digital Path Networks	Test Date	2004/06/04
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	25°C, 60%

NEUTRAL

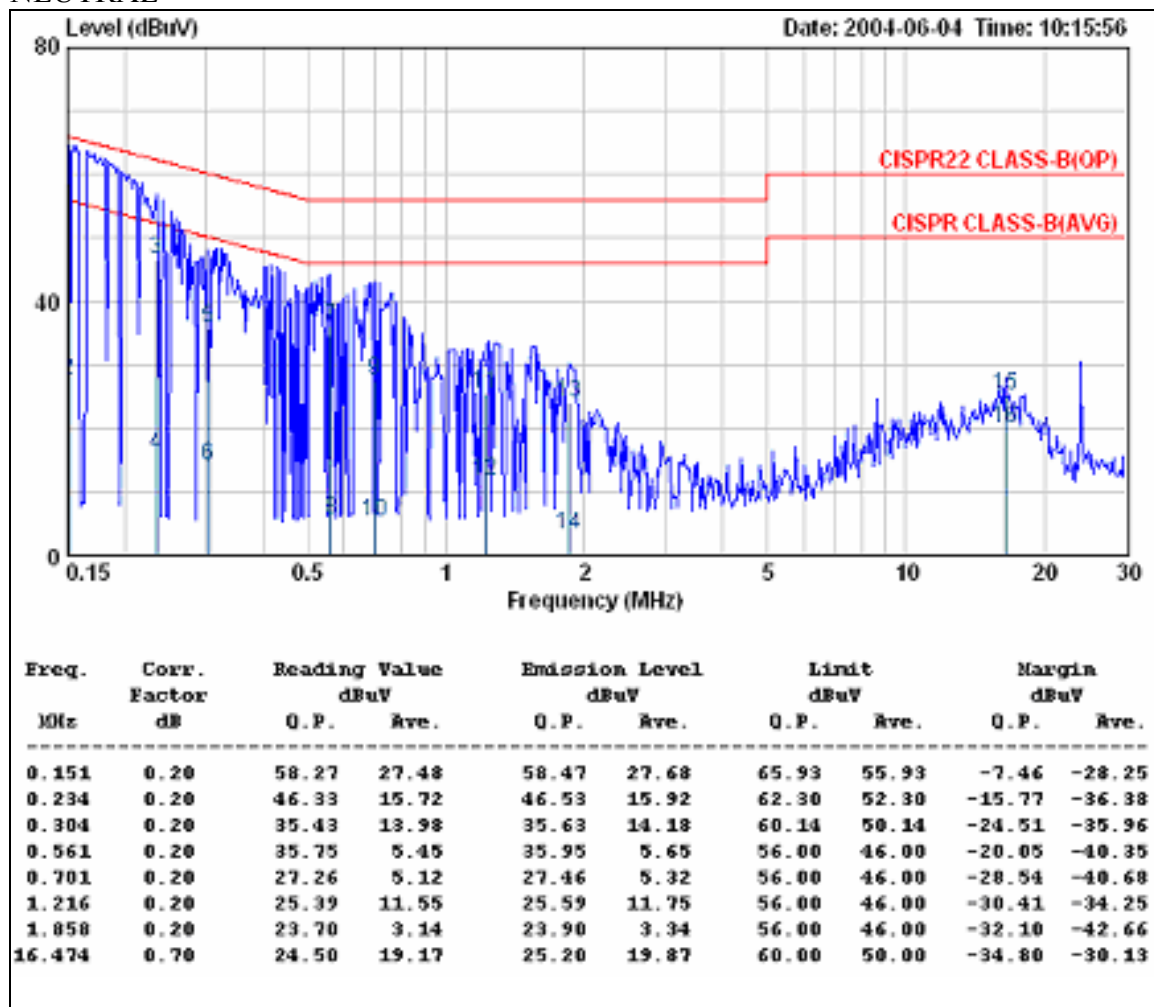

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11b mode. (Antenna 2)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100


Report No. : ER04-04-057FRF

Page 18 of 86

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Digital Path Networks	Test Date	2004/06/04
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	25°C, 60%

LINE

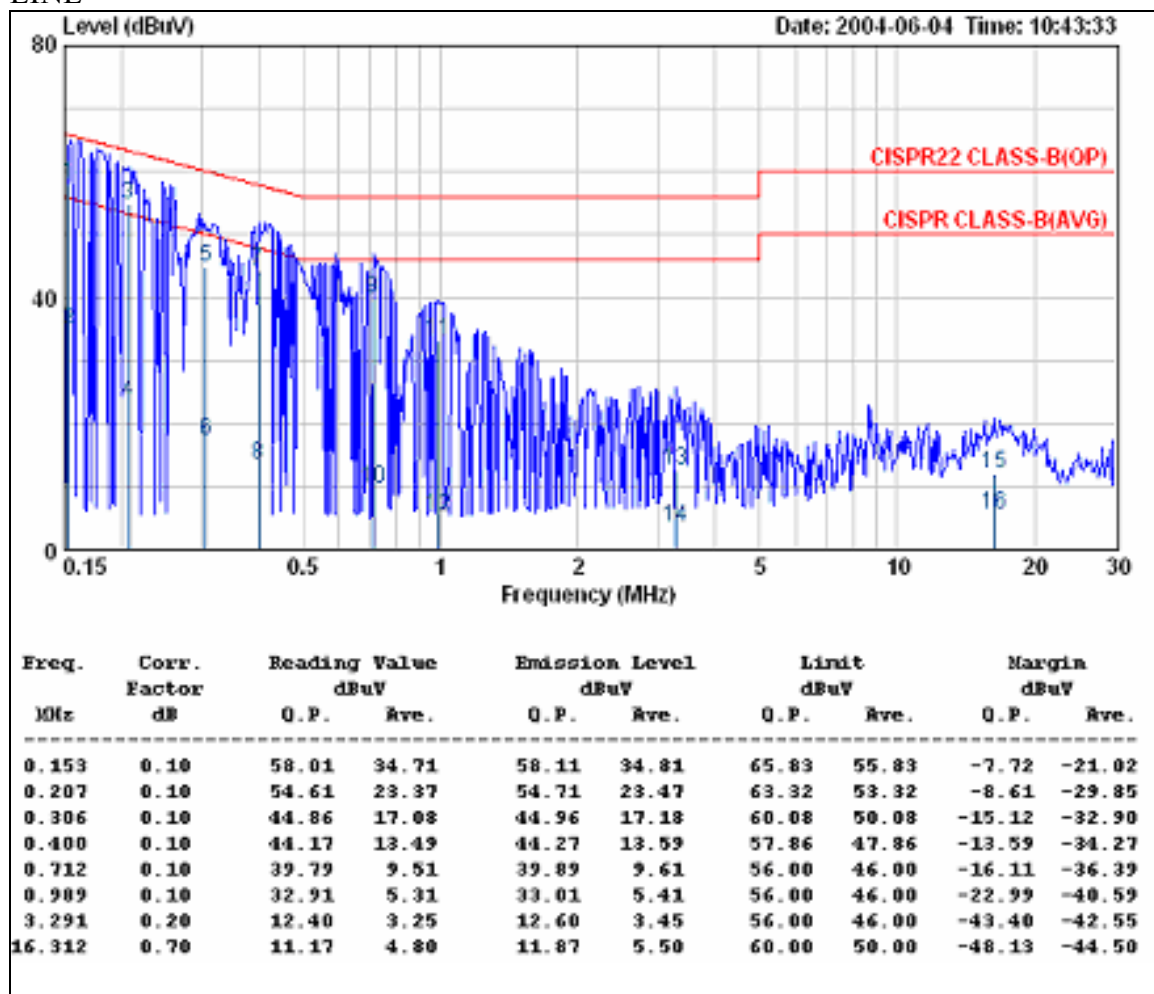

REMARKS :

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11g mode. (Antenna 2)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 19 of 86

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

Company	Digital Path Networks	Test Date	2004/06/04
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	25°C, 60%

NEUTRAL

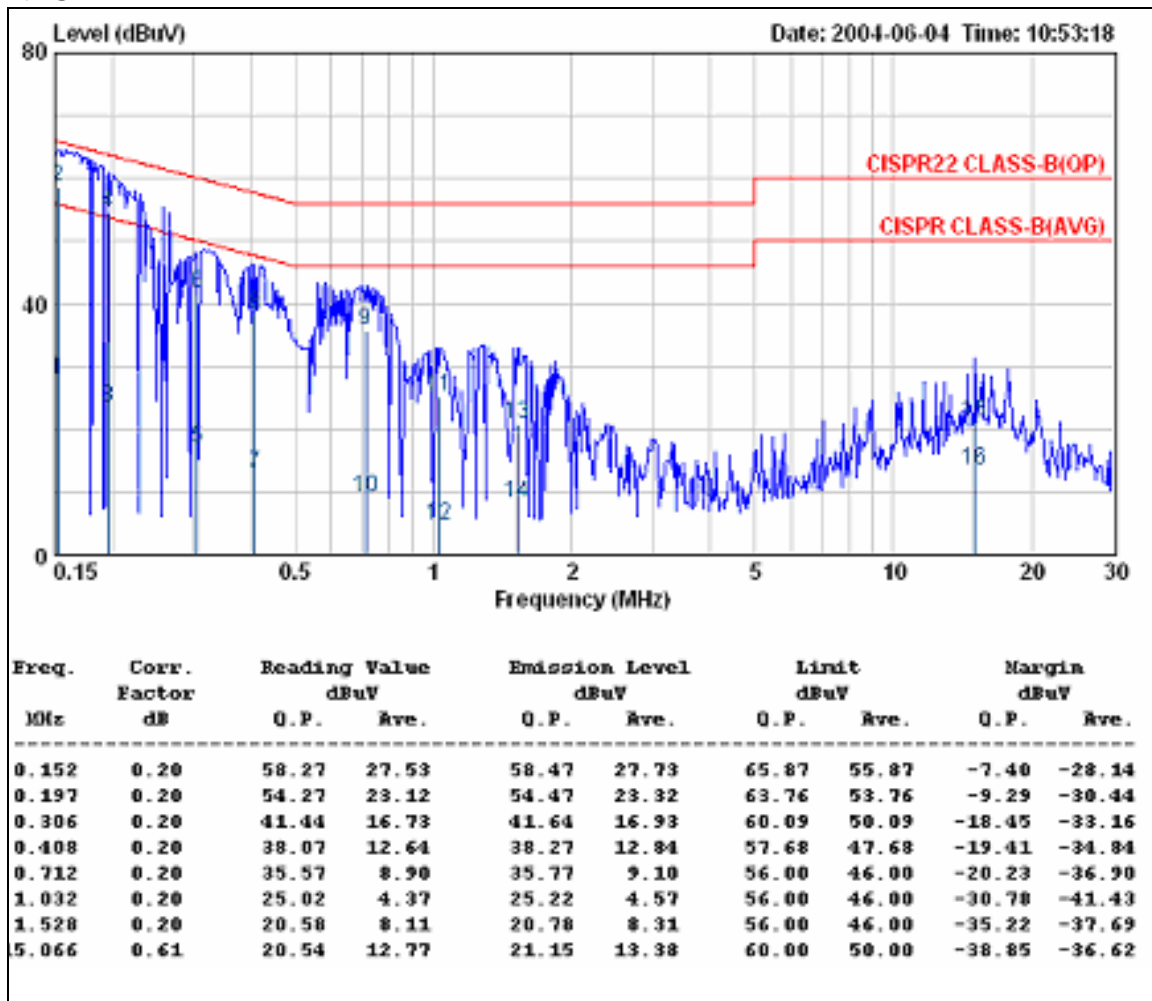

REMARKS :



1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value
3. For 802.11g mode. (Antenna 2)
4. The EUT can be operated in transmitting, stand-by and receiving mode. After preliminary scan, EUT in transmitting mode has highest emission. The EUT was set in transmitting mode at final test to get the worst case test results.

2.7 Photos of Conduction Test

Antenna (1) :



Antenna (2) :

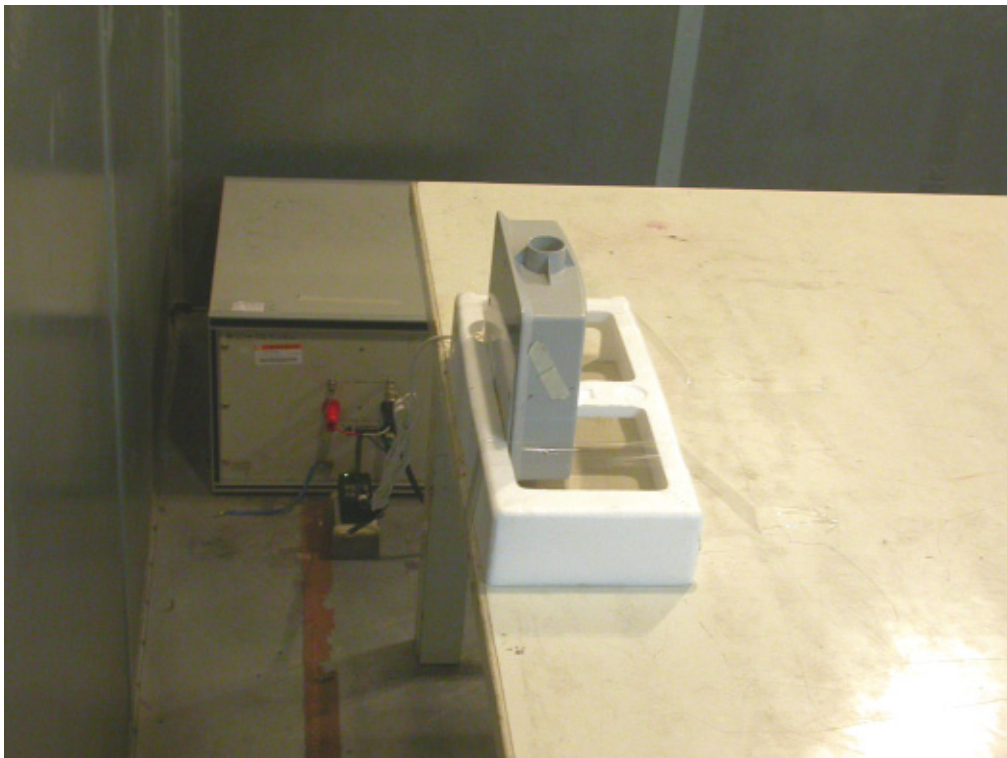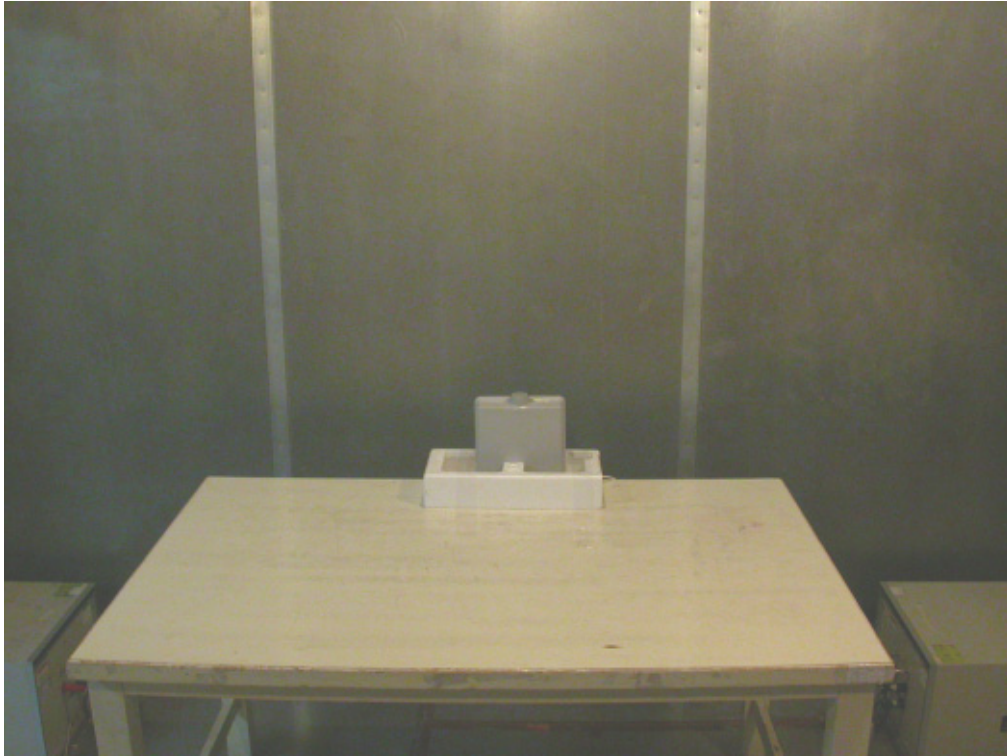

3. RADIATED EMISSION TEST


3.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.

Manufacturer or Type	Model No	Serial No	Date of Calibration	Calibration Period	Remark
CHASE BI-LOG ANTENNA	CBL6112B	2421	May 07, 2004	1 Year	FINAL
R/S SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004	1 Year	FINAL
OPEN SITE	-----	No.2	May 07, 2004	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	4	July 13, 2004	1 Year	FINAL
Horn Antenna	AH-118	10089	February 25, 2004	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	October 11, 2003	1 Year	FINAL
HP High pass filter	84300/80038	011	CAL. ON USE	1 Year	FINAL
Horn Antenna	AH-840	03077	February 25, 2004	1 Year	FINAL


3.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission below 1GHz.

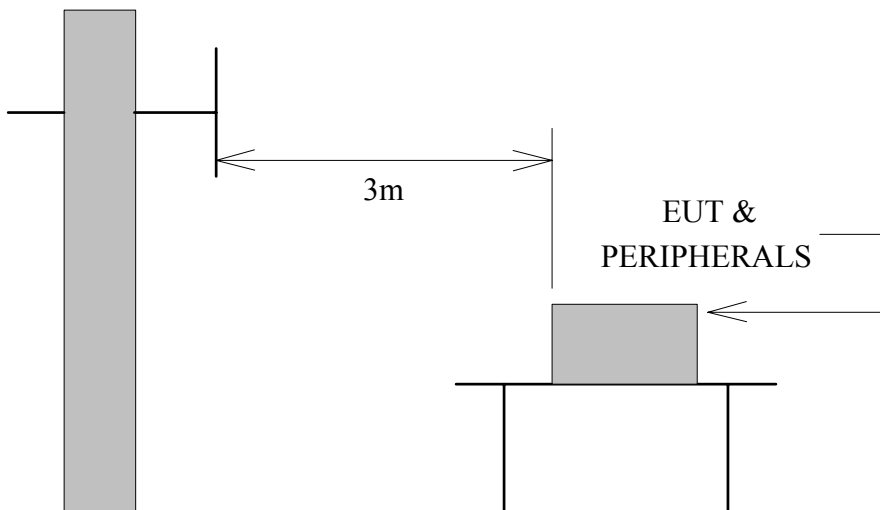

Antenna Elevation Variable

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

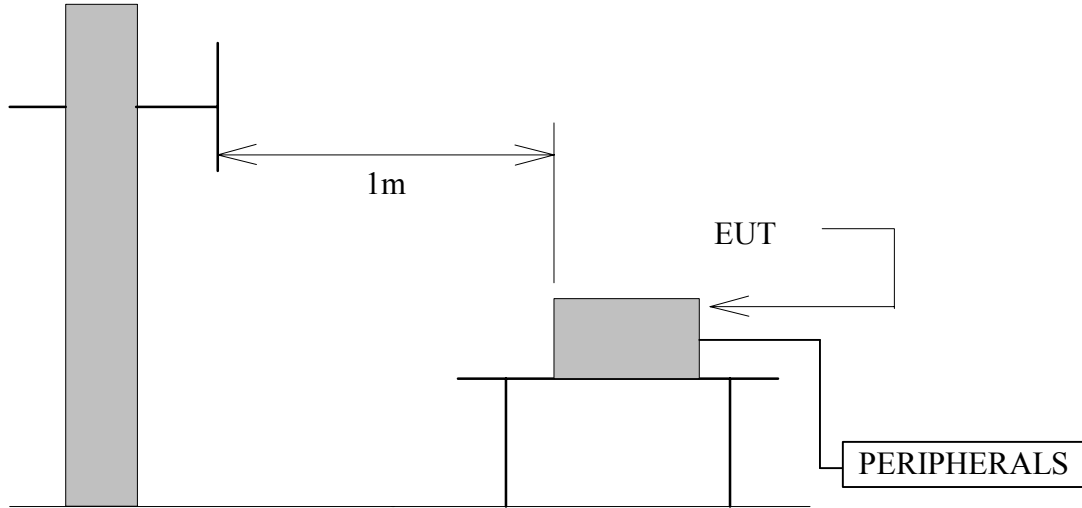

Antenna Elevation Variable

3.3 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/M)	Radiated (µV/M)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table. According to § 15.247(c), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radiofrequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.



3.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1GHz, the EUT was set 1 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

3.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is ± 2.72 dB.



3.6 Radiated RF Noise Measurement

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Company	Digital Path Networks	Test Date	2004/06/04
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	25°C, 60%

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading at 3m(dBμV)		Limits (dBμV/m)	Emission Level at 3m(dBμV/m)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	21.39	0.90	*	*	40.00	*	*
75.00	8.53	1.55	12.30	17.80	40.00	22.38	27.88
199.99	10.39	2.80	19.70	25.40	43.50	32.89	38.59
299.99	13.50	3.60	22.80	21.20	46.00	39.90	38.30
399.99	14.44	3.75	7.60	16.50	46.00	25.79	34.69
499.98	18.32	4.90	10.40	17.10	46.00	33.62	40.32
599.99	19.54	5.40	8.20	13.40	46.00	33.14	38.34
699.98	19.43	5.90	12.90	15.90	46.00	38.23	41.23
899.99	21.04	6.60	6.10	12.40	46.00	33.74	40.04
1000.00	21.58	7.00	*	*	54.00	*	*

REMARKS :

- * Undetectable
- Emission level (dBμV/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).
- According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in finial test.
- The RF-Chip combined with 802.11b&g mode. It will auto-detect the situation then switch the mode. The 802.11g mode is the worse case than the 802.11b mode. So only the 802.11g mode data are recorded in finial test report.
- Antenna type : Antenna (1).
- After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in finial test report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100

Report No. : ER04-04-057FRF

Page 26 of 86

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Company	Digital Path Networks	Test Date	2004/09/14
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	25°C, 60%

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading at 3m(dBμV)		Limits (dBμV/m)	Emission Level at 3m(dBμV/m)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	21.39	0.90	*	*	40.00	*	*
199.99	10.39	2.80	22.20	13.20	43.50	35.39	26.39
249.99	13.09	3.20	20.70	11.70	46.00	36.99	27.99
299.99	13.50	3.60	18.60	18.90	46.00	35.70	36.00
399.99	17.24	4.20	17.20	18.60	46.00	38.64	40.04
499.98	18.32	4.90	8.20	19.40	46.00	31.42	42.62
599.99	19.54	5.40	8.10	5.60	46.00	33.04	30.54
699.98	19.43	5.90	16.90	16.00	46.00	42.23	41.33
899.99	21.04	6.60	8.20	14.80	46.00	35.84	42.44
1000.00	21.58	7.00	*	*	54.00	*	*

REMARKS :

- * Undetectable
- Emission level (dBμV/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).
- According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in finial test.
- The RF-Chip combined with 802.11b&g mode. It will auto-detect the situation then switch the mode. The 802.11g mode is the worse case than the 802.11b mode. So only the 802.11g mode data are recorded in finial test report.
- Antenna type : Antenna (2).
- After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 27 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH1 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4823.91	44.86	34.44	5.08	35.16	9.50	0.00	39.72	74	-34.28	P	1.0
4823.91	33.67	34.44	5.08	35.16	9.50	0.00	28.53	54	-25.47	A	1.0
7236.01	45.11	39.81	6.74	35.65	9.50	0.00	46.50	74	-27.50	P	1.0
7236.01	33.08	39.81	6.74	35.65	9.50	0.00	34.47	54	-19.53	A	1.0
9647.97	47.22	38.54	8.29	36.44	9.50	0.00	48.11	74	-25.89	P	1.0
9647.97	36.93	38.54	8.29	36.44	9.50	0.00	37.82	54	-16.18	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz,VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (1).
9. After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
Report No. : ER04-04-057FRF
Page 28 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH1 RX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4824.06	45.62	34.44	5.08	35.16	9.50	0.00	40.48	74	-33.52	P	1.0
4824.06	33.13	34.44	5.08	35.16	9.50	0.00	27.99	54	-26.01	A	1.0
7237.05	44.28	39.81	6.74	35.65	9.50	0.00	45.67	74	-28.33	P	1.0
7237.05	33.35	39.81	6.74	35.65	9.50	0.00	34.74	54	-19.26	A	1.0
9648.03	46.11	38.54	8.29	36.44	9.50	0.00	47.00	74	-27.00	P	1.0
9648.03	34.86	38.54	8.29	36.44	9.50	0.00	35.75	54	-18.25	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz,VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (1).
9. After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 29 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH6 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4873.83	45.93	34.77	5.10	35.20	9.50	0.00	41.10	74	-32.90	P	1.0
4873.83	34.28	34.77	5.10	35.20	9.50	0.00	29.45	54	-24.55	A	1.0
7311.02	45.37	39.78	6.79	35.64	9.50	0.00	46.80	74	-27.20	P	1.0
7311.02	33.83	39.78	6.79	35.64	9.50	0.00	35.26	54	-18.74	A	1.0
9747.94	47.08	38.53	8.33	36.60	9.50	0.00	47.84	74	-26.16	P	1.0
9747.94	36.82	38.53	8.33	36.60	9.50	0.00	37.58	54	-16.42	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz,VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (1).
9. After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 30 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH6 RX				Measurement Distance at 1m					Vertical polarity		
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4873.96	45.38	34.77	5.10	35.20	9.50	0.00	40.55	74	-33.45	P	1.0
4873.96	33.30	34.77	5.10	35.20	9.50	0.00	28.47	54	-25.53	A	1.0
7311.05	44.82	39.78	6.79	35.64	9.50	0.00	46.25	74	-27.75	P	1.0
7311.05	32.69	39.78	6.79	35.64	9.50	0.00	34.12	54	-19.88	A	1.0
9747.81	46.38	38.53	8.33	36.60	9.50	0.00	47.14	74	-26.86	P	1.0
9747.81	35.07	38.53	8.33	36.60	9.50	0.00	35.83	54	-18.17	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (1).
9. After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 31 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH11 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4923.97	45.71	35.10	5.12	35.24	9.50	0.00	41.18	74	-32.82	P	1.0
4923.97	34.09	35.10	5.12	35.24	9.50	0.00	29.56	54	-24.44	A	1.0
7386.99	44.88	39.75	6.84	35.62	9.50	0.00	46.35	74	-27.65	P	1.0
7386.99	33.47	39.75	6.84	35.62	9.50	0.00	34.94	54	-19.06	A	1.0
9848.06	46.95	38.52	8.37	36.76	9.50	0.00	47.57	74	-26.43	P	1.0
9848.06	36.57	38.52	8.37	36.76	9.50	0.00	37.19	54	-16.81	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (1).
9. After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 32 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH11 RX				Measurement Distance at 1m					Vertical polarity		
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4923.91	45.82	35.10	5.12	35.24	9.50	0.00	41.29	74	-32.71	P	1.0
4923.91	33.56	35.10	5.12	35.24	9.50	0.00	29.03	54	-24.97	A	1.0
7386.05	45.08	39.75	6.84	35.62	9.50	0.00	46.55	74	-27.45	P	1.0
7386.05	33.49	39.75	6.84	35.62	9.50	0.00	34.96	54	-19.04	A	1.0
9847.83	46.37	38.52	8.37	36.76	9.50	0.00	46.99	74	-27.01	P	1.0
9847.83	35.19	38.52	8.37	36.76	9.50	0.00	35.81	54	-18.19	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (1).
9. After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 33 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH1 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4823.91	45.92	34.44	5.08	35.16	9.50	0.00	40.78	74	-33.22	P	1.0
4823.91	34.10	34.44	5.08	35.16	9.50	0.00	28.96	54	-25.04	A	1.0
7236.00	44.82	39.81	6.74	35.65	9.50	0.00	46.21	74	-27.79	P	1.0
7236.00	33.24	39.81	6.74	35.65	9.50	0.00	34.63	54	-19.37	A	1.0
9647.88	47.50	38.54	8.29	36.44	9.50	0.00	48.39	74	-25.61	P	1.0
9647.88	37.24	38.54	8.29	36.44	9.50	0.00	38.13	54	-15.87	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (2).
9. After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 34 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH1 RX				Measurement Distance at 1m					Vertical polarity		
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4824.04	45.82	34.44	5.08	35.16	9.50	0.00	40.68	74	-33.32	P	1.0
4824.04	34.34	34.44	5.08	35.16	9.50	0.00	29.20	54	-24.80	A	1.0
7236.02	44.83	39.81	6.74	35.65	9.50	0.00	46.22	74	-27.78	P	1.0
7236.02	33.71	39.81	6.74	35.65	9.50	0.00	35.10	54	-18.90	A	1.0
9648.03	46.52	38.54	8.29	36.44	9.50	0.00	47.41	74	-26.59	P	1.0
9648.03	37.05	38.54	8.29	36.44	9.50	0.00	37.94	54	-16.06	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (2).
9. After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
Report No. : ER04-04-057FRF
Page 35 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH6 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4873.93	45.88	34.77	5.10	35.20	9.50	0.00	41.05	74	-32.95	P	1.0
4873.93	34.21	34.77	5.10	35.20	9.50	0.00	29.38	54	-24.62	A	1.0
7311.01	44.72	39.78	6.79	35.64	9.50	0.00	46.15	74	-27.85	P	1.0
7311.01	33.33	39.78	6.79	35.64	9.50	0.00	34.76	54	-19.24	A	1.0
9747.95	46.57	38.53	8.33	36.60	9.50	0.00	47.33	74	-26.67	P	1.0
9747.95	36.70	38.53	8.33	36.60	9.50	0.00	37.46	54	-16.54	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (2).
9. After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in finial test report.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100

Report No. : ER04-04-057FRF

Page 36 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH6 RX				Measurement Distance at 1m					Vertical polarity		
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4873.96	45.57	34.77	5.10	35.20	9.50	0.00	40.74	74	-33.26	P	1.0
4873.96	34.56	34.77	5.10	35.20	9.50	0.00	29.73	54	-24.27	A	1.0
7311.05	45.08	39.78	6.79	35.64	9.50	0.00	46.51	74	-27.49	P	1.0
7311.05	33.97	39.78	6.79	35.64	9.50	0.00	35.40	54	-18.60	A	1.0
9747.96	46.82	38.53	8.33	36.60	9.50	0.00	47.58	74	-26.42	P	1.0
9747.96	36.92	38.53	8.33	36.60	9.50	0.00	37.68	54	-16.32	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (2).
9. After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 37 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH11 RX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4923.02	45.58	35.09	5.12	35.24	9.50	0.00	41.05	74	-32.95	P	1.0
4923.02	33.99	35.09	5.12	35.24	9.50	0.00	29.46	54	-24.54	A	1.0
7385.99	44.61	39.75	6.84	35.62	9.50	0.00	46.08	74	-27.92	P	1.0
7385.99	33.27	39.75	6.84	35.62	9.50	0.00	34.74	54	-19.26	A	1.0
9848.02	46.82	38.52	8.37	36.76	9.50	0.00	47.44	74	-26.56	P	1.0
9848.02	37.02	38.52	8.37	36.76	9.50	0.00	37.64	54	-16.36	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (2).
9. After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
Report No. : ER04-04-057FRF
Page 38 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH11 RX				Measurement Distance at 1m					Vertical polarity		
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
4923.91	45.37	35.10	5.12	35.24	9.50	0.00	40.84	74	-33.16	P	1.0
4923.91	34.11	35.10	5.12	35.24	9.50	0.00	29.58	54	-24.42	A	1.0
7386.05	44.39	39.75	6.84	35.62	9.50	0.00	45.86	74	-28.14	P	1.0
7386.05	33.62	39.75	6.84	35.62	9.50	0.00	35.09	54	-18.91	A	1.0
9847.93	45.89	38.52	8.37	36.76	9.50	0.00	46.51	74	-27.49	P	1.0
9847.93	36.66	38.52	8.37	36.76	9.50	0.00	37.28	54	-16.72	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain.
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.
8. Antenna type : Antenna (2).
9. After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in finial test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 39 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3 rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	29.35	31.81	3.57	0.00	9.50	0.00	55.23	74	-18.77	P	1.00
* 2389.90	17.00	31.81	3.57	0.00	9.50	0.00	42.88	54	-11.12	A	1.00
2413.51	65.95	31.79	3.58	0.00	9.50	0.00	91.82	Fundamental Frequency		P	1.00
2413.51	59.20	31.79	3.58	0.00	9.50	0.00	85.07			A	1.00
* 4824.01	47.92	34.44	5.08	35.16	9.50	2.00	44.79	74	-29.21	P	1.00
* 4824.01	42.33	34.44	5.08	35.16	9.50	2.00	39.20	54	-14.80	A	1.00
7235.54	46.90	39.81	6.74	35.65	9.50	2.00	50.29	74	-23.71	P	1.00
7235.54	36.57	39.81	6.74	35.65	9.50	2.00	39.96	54	-14.04	A	1.00
9648.05	56.36	38.54	8.29	36.44	9.50	0.61	57.86	71.82	-13.96	P	1.00
9648.05	54.03	38.54	8.29	36.44	9.50	0.61	55.53	65.07	-9.54	A	1.00
* 12067.55	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14481.06	-----	-----	-----	-----	9.50	0.68	-----	-----	-----	-----	1.00
16894.57	-----	-----	-----	-----	9.50	0.44	-----	-----	-----	-----	1.00
* 19308.08	-----	-----	-----	-----	9.50	1.97	-----	-----	-----	-----	1.00
21721.59	-----	-----	-----	-----	9.50	0.81	-----	-----	-----	-----	1.00
24135.10	-----	-----	-----	-----	9.50	2.88	-----	-----	-----	-----	1.00

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
 $Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit$
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11b mode at 11Mbps with power setting 17.81dBm (PK) / 12.07dBm (AVG) and antenna (1).
 - After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 40 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH1 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	38.83	31.81	3.57	0.00	9.50	0.00	64.71	74	-9.29	P	1.00
* 2389.90	22.50	31.81	3.57	0.00	9.50	0.00	48.38	54	-5.62	A	1.00
2409.84	87.86	31.79	3.58	0.00	9.50	0.00	113.73	Fundamental Frequency		P	1.00
2409.84	81.39	31.79	3.58	0.00	9.50	0.00	107.26			A	1.00
* 4824.18	48.59	34.44	5.08	35.16	9.50	2.00	45.46	74	-28.54	P	1.00
* 4824.18	42.37	34.44	5.08	35.16	9.50	2.00	39.24	54	-14.76	A	1.00
7239.55	45.97	39.80	6.74	35.65	9.50	2.00	49.36	74	-24.64	P	1.00
7239.55	35.65	39.80	6.74	35.65	9.50	2.00	39.04	54	-14.96	A	1.00
9647.96	55.05	38.54	8.29	36.44	9.50	0.61	56.55	93.73	-37.18	P	1.00
9647.96	52.82	38.54	8.29	36.44	9.50	0.61	54.32	87.26	-32.94	A	1.00
* 12049.20	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14459.04	-----	-----	-----	-----	9.50	0.65	-----	-----	-----	-----	1.00
16868.88	-----	-----	-----	-----	9.50	0.42	-----	-----	-----	-----	1.00
* 19278.72	-----	-----	-----	-----	9.50	1.93	-----	-----	-----	-----	1.00
21688.56	-----	-----	-----	-----	9.50	0.82	-----	-----	-----	-----	1.00
24098.40	-----	-----	-----	-----	9.50	2.94	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 $Level = Reading + AF + Cable - Preamp + Filter - Dist$, $Margin = Level - Limit$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps with power setting 17.81dBm (PK) / 12.07dBm (AVG) and antenna (1). The margin will be 3dB smaller if the power is set to 20.81dBm (PK) / 15.07 dBm (AVG).
- After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 41 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2437.50	65.55	31.76	3.59	0.00	9.50	0.00	91.41	Fundamental Frequency		P	1.00
2437.50	58.90	31.76	3.59	0.00	9.50	0.00	84.76			A	1.00
* 4874.01	48.04	34.77	5.10	35.20	9.50	1.80	45.01	74	-28.99	P	1.00
* 4874.01	42.31	34.77	5.10	35.20	9.50	1.80	39.28	54	-14.72	A	1.00
* 7311.01	46.85	39.78	6.79	35.64	9.50	2.00	50.28	74	-23.72	P	1.00
* 7311.01	36.76	39.78	6.79	35.64	9.50	2.00	40.19	54	-13.81	A	1.00
9747.96	54.67	38.53	8.33	36.60	9.50	0.55	55.98	71.41	-15.43	P	1.00
9747.96	52.24	38.53	8.33	36.60	9.50	0.55	53.55	64.76	-11.21	A	1.00
* 12187.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14625.00	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
17062.50	-----	-----	-----	-----	9.50	0.53	-----	-----	-----	-----	1.00
* 19500.00	-----	-----	-----	-----	9.50	2.20	-----	-----	-----	-----	1.00
21937.50	-----	-----	-----	-----	9.50	0.73	-----	-----	-----	-----	1.00
24375.00	-----	-----	-----	-----	9.50	2.50	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps with power setting 20.56dBm (PK) / 16.17dBm (AVG) and antenna (1).
- After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 42 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2434.55	87.10	31.77	3.59	0.00	9.50	0.00	112.96	Fundamental Frequency		P	1.00
2434.55	80.23	31.77	3.59	0.00	9.50	0.00	106.09			A	1.00
* 4874.04	48.33	34.77	5.10	35.20	9.50	1.80	45.30	74	-28.70	P	1.00
* 4874.04	42.22	34.77	5.10	35.20	9.50	1.80	39.19	54	-14.81	A	1.00
* 7311.01	46.13	39.78	6.79	35.64	9.50	2.00	49.56	74	-24.44	P	1.00
* 7311.01	36.24	39.78	6.79	35.64	9.50	2.00	39.67	54	-14.33	A	1.00
9747.99	54.30	38.53	8.33	36.60	9.50	0.55	55.61	92.96	-37.35	P	1.00
9747.99	51.07	38.53	8.33	36.60	9.50	0.55	52.38	86.09	-33.71	A	1.00
* 12172.75	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14607.30	-----	-----	-----	-----	9.50	0.61	-----	-----	-----	-----	1.00
17041.85	-----	-----	-----	-----	9.50	0.52	-----	-----	-----	-----	1.00
* 19476.40	-----	-----	-----	-----	9.50	2.17	-----	-----	-----	-----	1.00
21910.95	-----	-----	-----	-----	9.50	0.74	-----	-----	-----	-----	1.00
24345.50	-----	-----	-----	-----	9.50	2.55	-----	-----	-----	-----	1.00

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
 $Level = Reading + AF + Cable - Preamp + Filter - Dist$, $Margin = Level - Limit$
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11b mode at 11Mbps with power setting 20.56dBm (PK) / 16.17dBm (AVG) and antenna (1).
 - After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd.,ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 43 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2463.72	65.41	31.74	3.60	0.00	9.50	0.00	91.25	Fundamental Frequency		P	1.00
2463.72	58.81	31.74	3.60	0.00	9.50	0.00	84.65			A	1.00
* 2483.60	29.74	31.72	3.61	0.00	9.50	0.00	55.57	74	-18.43	P	1.00
* 2483.60	16.95	31.72	3.61	0.00	9.50	0.00	42.78	54	-11.22	A	1.00
* 4923.88	48.21	35.10	5.12	35.24	9.50	1.60	45.29	74	-28.71	P	1.00
* 4923.88	42.57	35.10	5.12	35.24	9.50	1.60	39.65	54	-14.35	A	1.00
* 7391.16	47.05	39.74	6.85	35.62	9.50	2.00	50.52	74	-23.48	P	1.00
* 7391.16	37.01	39.74	6.85	35.62	9.50	2.00	40.48	54	-13.52	A	1.00
9847.89	53.77	38.52	8.37	36.76	9.50	0.49	54.89	71.25	-16.37	P	1.00
9847.89	50.27	38.52	8.37	36.76	9.50	0.49	51.39	64.65	-13.27	A	1.00
* 12318.60	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14782.32	-----	-----	-----	-----	9.50	0.47	-----	-----	-----	-----	1.00
17246.04	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
* 19709.76	-----	-----	-----	-----	9.50	2.41	-----	-----	-----	-----	1.00
* 22173.48	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24637.20	-----	-----	-----	-----	9.50	2.11	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps with power setting 17.01dBm (PK) / 11.17dBm (AVG) and antenna (1).
- After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 44 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH11 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2463.45	86.10	31.74	3.60	0.00	9.50	0.00	111.94	Fundamental Frequency		P	1.00
2463.45	79.63	31.74	3.60	0.00	9.50	0.00	105.47			A	1.00
* 2483.60	39.56	31.72	3.61	0.00	9.50	0.00	65.39	74	-8.61	P	1.00
* 2483.60	24.88	31.72	3.61	0.00	9.50	0.00	50.71	54	-3.29	A	1.00
* 4923.96	48.12	35.10	5.12	35.24	9.50	1.60	45.20	74	-28.80	P	1.00
* 4923.96	42.11	35.10	5.12	35.24	9.50	1.60	39.19	54	-14.81	A	1.00
* 7386.03	46.08	39.75	6.84	35.62	9.50	2.00	49.55	74	-24.45	P	1.00
* 7386.03	36.03	39.75	6.84	35.62	9.50	2.00	39.50	54	-14.50	A	1.00
9848.06	52.68	38.52	8.37	36.76	9.50	0.49	53.79	91.94	-38.15	P	1.00
9848.06	50.03	38.52	8.37	36.76	9.50	0.49	51.14	85.47	-34.33	A	1.00
* 12317.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14780.70	-----	-----	-----	-----	9.50	0.48	-----	-----	-----	-----	1.00
17244.15	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
* 19707.60	-----	-----	-----	-----	9.50	2.41	-----	-----	-----	-----	1.00
* 22171.05	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24634.50	-----	-----	-----	-----	9.50	2.11	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps with power setting 17.01dBm (PK) / 11.17dBm (AVG) and antenna (1). The margin will be 3dB smaller if the power is set to 20.01dBm (PK) / 14.17 dBm (AVG).
- After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 45 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	27.36	31.81	3.57	0.00	9.50	0.00	53.24	74	-20.76	P	1.00
* 2389.90	15.52	31.81	3.57	0.00	9.50	0.00	41.40	54	-12.60	A	1.00
2410.84	62.86	31.79	3.58	0.00	9.50	0.00	88.73	Fundamental Frequency		P	1.00
2410.84	58.50	31.79	3.58	0.00	9.50	0.00	84.37			A	1.00
* 4824.16	47.86	34.44	5.08	35.16	9.50	2.00	44.73	74	-29.27	P	1.00
* 4824.16	43.52	34.44	5.08	35.16	9.50	2.00	40.39	54	-13.61	A	1.00
7236.00	45.80	39.81	6.74	35.65	9.50	2.00	49.19	74	-24.81	P	1.00
7236.00	34.33	39.81	6.74	35.65	9.50	2.00	37.72	54	-16.28	A	1.00
9646.60	55.31	38.54	8.29	36.43	9.50	0.61	56.82	74	-17.18	P	1.00
9646.60	46.03	38.54	8.29	36.43	9.50	0.61	47.54	54	-6.46	A	1.00
* 12054.20	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14465.04	-----	-----	-----	-----	9.50	0.66	-----	-----	-----	-----	1.00
16875.88	-----	-----	-----	-----	9.50	0.43	-----	-----	-----	-----	1.00
* 19286.72	-----	-----	-----	-----	9.50	1.94	-----	-----	-----	-----	1.00
21697.56	-----	-----	-----	-----	9.50	0.82	-----	-----	-----	-----	1.00
24108.40	-----	-----	-----	-----	9.50	2.93	-----	-----	-----	-----	1.00

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
 $Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit$
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11g mode at 6Mbps with power setting 16.53dBm (PK) / 8.31dBm (AVG) and antenna (1).
 - After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 46 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH1 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	41.02	31.81	3.57	0.00	9.50	0.00	66.90	74	-7.10	P	1.00
* 2389.90	24.98	31.81	3.57	0.00	9.50	0.00	50.86	54	-3.14	A	1.00
2409.94	85.38	31.79	3.58	0.00	9.50	0.00	111.25	Fundamental Frequency		P	1.00
2409.94	79.46	31.79	3.58	0.00	9.50	0.00	105.33			A	1.00
* 4824.03	47.27	34.44	5.08	35.16	9.50	2.00	44.14	74	-29.86	P	1.00
* 4824.03	43.12	34.44	5.08	35.16	9.50	2.00	39.99	54	-14.01	A	1.00
7236.03	45.84	39.81	6.74	35.65	9.50	2.00	49.23	74	-24.77	P	1.00
7236.03	34.27	39.81	6.74	35.65	9.50	2.00	37.66	54	-16.34	A	1.00
9648.04	49.67	38.54	8.29	36.44	9.50	0.61	51.17	74	-22.83	P	1.00
9648.04	43.11	38.54	8.29	36.44	9.50	0.61	44.61	54	-9.39	A	1.00
* 12049.70	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14459.64	-----	-----	-----	-----	9.50	0.65	-----	-----	-----	-----	1.00
16869.58	-----	-----	-----	-----	9.50	0.42	-----	-----	-----	-----	1.00
* 19279.52	-----	-----	-----	-----	9.50	1.94	-----	-----	-----	-----	1.00
21689.46	-----	-----	-----	-----	9.50	0.82	-----	-----	-----	-----	1.00
24099.40	-----	-----	-----	-----	9.50	2.94	-----	-----	-----	-----	1.00

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
 $Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit$
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11g mode at 6Mbps with power setting 16.53dBm (PK) / 18.31dBm (AVG) and antenna (1). The margin will be 1dB smaller if the power is set to 17.63dBm (PK) / 9.31 dBm (AVG).
 - After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 47 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2434.07	61.52	31.77	3.59	0.00	9.50	0.00	87.38	Fundamental Frequency		P	1.00
2434.07	57.64	31.77	3.59	0.00	9.50	0.00	83.50			A	1.00
* 4874.08	46.82	34.77	5.10	35.20	9.50	1.80	43.79	74	-30.21	P	1.00
* 4874.08	42.56	34.77	5.10	35.20	9.50	1.80	39.53	54	-14.47	A	1.00
* 7311.05	45.37	39.78	6.79	35.64	9.50	2.00	48.80	74	-25.20	P	1.00
* 7311.05	34.11	39.78	6.79	35.64	9.50	2.00	37.54	54	-16.46	A	1.00
9747.83	52.93	38.53	8.33	36.60	9.50	0.55	54.24	74	-19.76	P	1.00
9747.83	45.42	38.53	8.33	36.60	9.50	0.55	46.73	54	-7.27	A	1.00
* 12170.35	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14604.42	-----	-----	-----	-----	9.50	0.62	-----	-----	-----	-----	1.00
17038.49	-----	-----	-----	-----	9.50	0.52	-----	-----	-----	-----	1.00
* 19472.56	-----	-----	-----	-----	9.50	2.17	-----	-----	-----	-----	1.00
21906.63	-----	-----	-----	-----	9.50	0.74	-----	-----	-----	-----	1.00
24340.70	-----	-----	-----	-----	9.50	2.55	-----	-----	-----	-----	1.00

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11g mode at 6Mbps with power setting 21.58dBm (PK) / 12.54dBm (AVG) and antenna (1).
 - After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 48 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2433.82	84.37	31.77	3.59	0.00	9.50	0.00	110.23	Fundamental Frequency		P	1.00
2433.82	78.17	31.77	3.59	0.00	9.50	0.00	104.03			A	1.00
* 4873.97	47.11	34.77	5.10	35.20	9.50	1.80	44.08	74	-29.92	P	1.00
* 4873.97	43.20	34.77	5.10	35.20	9.50	1.80	40.17	54	-13.83	A	1.00
* 7310.97	45.76	39.78	6.79	35.64	9.50	2.00	49.19	74	-24.81	P	1.00
* 7310.97	34.20	39.78	6.79	35.64	9.50	2.00	37.63	54	-16.37	A	1.00
9747.88	48.93	38.53	8.33	36.60	9.50	0.55	50.24	74	-23.76	P	1.00
9747.88	42.86	38.53	8.33	36.60	9.50	0.55	44.17	54	-9.83	A	1.00
* 12169.10	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14602.92	-----	-----	-----	-----	9.50	0.62	-----	-----	-----	-----	1.00
17036.74	-----	-----	-----	-----	9.50	0.51	-----	-----	-----	-----	1.00
* 19470.56	-----	-----	-----	-----	9.50	2.16	-----	-----	-----	-----	1.00
21904.38	-----	-----	-----	-----	9.50	0.74	-----	-----	-----	-----	1.00
24338.20	-----	-----	-----	-----	9.50	2.56	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 $Level = Reading + AF + Cable - Preamp + Filter - Dist$, $Margin = Level - Limit$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11g mode at 6Mbps with power setting 21.58dBm (PK) / 12.54dBm (AVG) and antenna (1).
- After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 49 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2464.40	61.80	31.74	3.60	0.00	9.50	0.00	87.64	Fundamental Frequency		P	1.00
2464.40	57.03	31.74	3.60	0.00	9.50	0.00	82.87			A	1.00
* 2483.60	27.36	31.72	3.61	0.00	9.50	0.00	53.19	74	-20.81	P	1.00
* 2483.60	15.52	31.72	3.61	0.00	9.50	0.00	41.35	54	-12.65	A	1.00
* 4923.97	47.10	35.10	5.12	35.24	9.50	1.60	44.18	74	-29.82	P	1.00
* 4924.04	42.58	35.10	5.12	35.24	9.50	1.60	39.66	54	-14.34	A	1.00
* 7386.13	45.77	39.75	6.84	35.62	9.50	2.00	49.24	74	-24.76	P	1.00
* 7386.13	34.21	39.75	6.84	35.62	9.50	2.00	37.68	54	-16.32	A	1.00
9848.05	53.59	38.52	8.37	36.76	9.50	0.49	54.70	74	-19.30	P	1.00
9848.05	45.59	38.52	8.37	36.76	9.50	0.49	46.70	54	-7.30	A	1.00
* 12322.00	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14786.40	-----	-----	-----	-----	9.50	0.47	-----	-----	-----	-----	1.00
17250.80	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
* 19715.20	-----	-----	-----	-----	9.50	2.42	-----	-----	-----	-----	1.00
* 22179.60	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24644.00	-----	-----	-----	-----	9.50	2.10	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11g mode at 6Mbps with power setting 15.89dBm (PK) / 7.87dBm (AVG) and antenna (1).
- After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 50 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/05/24
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	23.5°C , 63%

CH11 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2462.30	83.66	31.74	3.60	0.00	9.50	0.00	109.50	Fundamental Frequency		P	1.00
2462.30	77.84	31.74	3.60	0.00	9.50	0.00	103.68			A	1.00
* 2483.60	39.57	31.72	3.61	0.00	9.50	0.00	65.40	74	-8.60	P	1.00
* 2483.60	24.65	31.72	3.61	0.00	9.50	0.00	50.48	54	-3.52	A	1.00
* 4924.12	46.89	35.10	5.12	35.24	9.50	1.60	43.97	74	-30.03	P	1.00
* 4924.12	42.85	35.10	5.12	35.24	9.50	1.60	39.93	54	-14.07	A	1.00
* 7386.01	45.87	39.75	6.84	35.62	9.50	2.00	49.34	74	-24.66	P	1.00
* 7386.01	34.59	39.75	6.84	35.62	9.50	2.00	38.06	54	-15.94	A	1.00
9847.79	48.61	38.52	8.37	36.76	9.50	0.49	49.73	74	-24.27	P	1.00
9847.79	42.87	38.52	8.37	36.76	9.50	0.49	43.99	54	-10.01	A	1.00
* 12311.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14773.80	-----	-----	-----	-----	0.00	0.48	-----	-----	-----	-----	1.00
17236.10	-----	-----	-----	-----	0.00	0.59	-----	-----	-----	-----	1.00
* 19698.40	-----	-----	-----	-----	0.00	2.40	-----	-----	-----	-----	1.00
* 22160.70	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24623.00	-----	-----	-----	-----	0.00	2.13	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11g mode at 6Mbps with power setting 15.89dBm (PK) / 17.87dBm (AVG) and antenna (1). The margin will be 1.5dB smaller if the power is set to 17.63dBm (PK) / 9.31 dBm (AVG).
- After an exploratory test, the emission of antenna (1) is higher than the emission of antenna (3). So only the antenna (1) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 51 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	17.10	31.81	3.57	0.00	9.50	0.00	42.98	74	-31.02	P	1.00
* 2389.90	4.00	31.81	3.57	0.00	9.50	0.00	29.88	54	-24.12	A	1.00
2414.05	72.28	31.79	3.58	0.00	9.50	0.00	98.15	Fundamental Frequency		P	1.00
2414.05	67.76	31.79	3.58	0.00	9.50	0.00	93.63			A	1.00
* 4823.98	47.83	34.44	5.08	35.16	9.50	2.00	44.70	74	-29.30	P	1.00
* 4823.98	38.14	34.44	5.08	35.16	9.50	2.00	35.01	54	-18.99	A	1.00
7236.04	45.83	39.81	6.74	35.65	9.50	2.00	49.22	74	-24.78	P	1.00
7236.04	33.87	39.81	6.74	35.65	9.50	2.00	37.26	54	-16.74	A	1.00
9647.97	50.57	38.54	8.29	36.44	9.50	0.61	52.07	74	-21.93	P	1.00
9647.97	45.02	38.54	8.29	36.44	9.50	0.61	46.52	54	-7.48	A	1.00
* 12070.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14484.30	-----	-----	-----	-----	9.50	0.68	-----	-----	-----	-----	1.00
16898.35	-----	-----	-----	-----	9.50	0.44	-----	-----	-----	-----	1.00
* 19312.40	-----	-----	-----	-----	9.50	1.97	-----	-----	-----	-----	1.00
21726.45	-----	-----	-----	-----	9.50	0.81	-----	-----	-----	-----	1.00
24140.50	-----	-----	-----	-----	9.50	2.88	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps with power setting 17.81dBm (PK) / 12.07dBm (AVG) and antenna (2).
- After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : RHK-G3CPE100

Report No. : ER04-04-057FRF

Page 52 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH1 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	40.40	31.81	3.57	0.00	9.50	0.00	66.28	74	-7.72	P	1.00
* 2389.90	25.10	31.81	3.57	0.00	9.50	0.00	50.98	54	-3.02	A	1.00
2409.84	94.51	31.79	3.58	0.00	9.50	0.00	120.38	Fundamental Frequency		P	1.00
2409.84	89.54	31.79	3.58	0.00	9.50	0.00	115.41			A	1.00
* 4824.02	49.67	34.44	5.08	35.16	9.50	2.00	46.54	74	-27.46	P	1.00
* 4824.02	44.02	34.44	5.08	35.16	9.50	2.00	40.89	54	-13.11	A	1.00
7235.85	45.28	39.81	6.74	35.65	9.50	2.00	48.67	74	-25.33	P	1.00
7235.85	34.11	39.81	6.74	35.65	9.50	2.00	37.50	54	-16.50	A	1.00
9647.98	51.37	38.54	8.29	36.44	9.50	0.61	52.87	74	-21.13	P	1.00
9647.98	44.88	38.54	8.29	36.44	9.50	0.61	46.38	54	-7.62	A	1.00
* 12049.20	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14459.04	-----	-----	-----	-----	9.50	0.65	-----	-----	-----	-----	1.00
16868.88	-----	-----	-----	-----	9.50	0.42	-----	-----	-----	-----	1.00
* 19278.72	-----	-----	-----	-----	9.50	1.93	-----	-----	-----	-----	1.00
21688.56	-----	-----	-----	-----	9.50	0.82	-----	-----	-----	-----	1.00
24098.40	-----	-----	-----	-----	9.50	2.94	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 $Level = Reading + AF + Cable - Preamp + Filter - Dist$, $Margin = Level - Limit$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps with power setting 17.81dBm (PK) / 12.07dBm (AVG) and antenna (2). The margin will be 3dB smaller if the power is set to 20.81dBm (PK) / 15.07 dBm (AVG).
- After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 53 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2437.50	75.23	31.76	3.59	0.00	9.50	0.00	101.09	Fundamental Frequency		P	1.00
2437.50	69.05	31.76	3.59	0.00	9.50	0.00	94.91			A	1.00
* 4874.01	47.27	34.77	5.10	35.20	9.50	1.80	44.24	74	-29.76	P	1.00
* 4874.01	37.24	34.77	5.10	35.20	9.50	1.80	34.21	54	-19.79	A	1.00
* 7311.01	45.76	39.78	6.79	35.64	9.50	2.00	49.19	74	-24.81	P	1.00
* 7311.01	33.70	39.78	6.79	35.64	9.50	2.00	37.13	54	-16.87	A	1.00
9747.96	49.89	38.53	8.33	36.60	9.50	0.55	51.20	74	-22.80	P	1.00
9747.96	43.81	38.53	8.33	36.60	9.50	0.55	45.12	54	-8.88	A	1.00
* 12187.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14625.00	-----	-----	-----	-----	9.50	0.60	-----	-----	-----	-----	1.00
17062.50	-----	-----	-----	-----	9.50	0.53	-----	-----	-----	-----	1.00
* 19500.00	-----	-----	-----	-----	9.50	2.20	-----	-----	-----	-----	1.00
21937.50	-----	-----	-----	-----	9.50	0.73	-----	-----	-----	-----	1.00
24375.00	-----	-----	-----	-----	9.50	2.50	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps with power setting 20.56dBm (PK) / 16.17dBm (AVG) and antenna (2).
- After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 54 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2434.55	97.29	31.77	3.59	0.00	9.50	0.00	123.15	Fundamental Frequency		P	1.00
2434.55	91.21	31.77	3.59	0.00	9.50	0.00	117.07			A	1.00
* 4874.04	49.11	34.77	5.10	35.20	9.50	1.80	46.08	74	-27.92	P	1.00
* 4874.04	43.21	34.77	5.10	35.20	9.50	1.80	40.18	54	-13.82	A	1.00
* 7311.01	44.99	39.78	6.79	35.64	9.50	2.00	48.42	74	-25.58	P	1.00
* 7311.01	33.63	39.78	6.79	35.64	9.50	2.00	37.06	54	-16.94	A	1.00
9747.99	50.43	38.53	8.33	36.60	9.50	0.55	51.74	74	-22.26	P	1.00
9747.99	44.19	38.53	8.33	36.60	9.50	0.55	45.50	54	-8.50	A	1.00
* 12172.75	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14607.30	-----	-----	-----	-----	9.50	0.61	-----	-----	-----	-----	1.00
17041.85	-----	-----	-----	-----	9.50	0.52	-----	-----	-----	-----	1.00
* 19476.40	-----	-----	-----	-----	9.50	2.17	-----	-----	-----	-----	1.00
21910.95	-----	-----	-----	-----	9.50	0.74	-----	-----	-----	-----	1.00
24345.50	-----	-----	-----	-----	9.50	2.55	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps with power setting 20.56dBm (PK) / 16.17dBm (AVG) and antenna (2).
- After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 55 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2460.74	71.76	31.74	3.60	0.00	9.50	0.00	97.60	Fundamental Frequency		P	1.00
2460.74	67.00	31.74	3.60	0.00	9.50	0.00	92.84			A	1.00
* 2483.65	16.80	31.72	3.61	0.00	9.50	0.00	42.63	74	-31.37	P	1.00
* 2483.65	2.80	31.72	3.61	0.00	9.50	0.00	28.63	54	-25.37	A	1.00
* 4923.51	46.65	35.10	5.12	35.24	9.50	1.61	43.73	74	-30.27	P	1.00
* 4923.51	36.37	35.10	5.12	35.24	9.50	1.61	33.45	54	-20.55	A	1.00
* 7385.99	46.15	39.75	6.84	35.62	9.50	2.00	49.62	74	-24.38	P	1.00
* 7385.99	33.82	39.75	6.84	35.62	9.50	2.00	37.29	54	-16.71	A	1.00
9847.89	49.75	38.52	8.37	36.76	9.50	0.49	50.87	74	-23.13	P	1.00
9847.89	43.44	38.52	8.37	36.76	9.50	0.49	44.56	54	-9.44	A	1.00
* 12303.70	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14764.44	-----	-----	-----	-----	9.50	0.49	-----	-----	-----	-----	1.00
17225.18	-----	-----	-----	-----	9.50	0.59	-----	-----	-----	-----	1.00
* 19685.92	-----	-----	-----	-----	9.50	2.39	-----	-----	-----	-----	1.00
* 22146.66	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24607.40	-----	-----	-----	-----	9.50	2.15	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps with power setting 17.01dBm (PK) / 11.17dBm (AVG) and antenna (2).
- After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100

Report No. : ER04-04-057FRF

Page 56 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH11 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2460.30	91.73	31.74	3.60	0.00	9.50	0.00	117.57	Fundamental Frequency		P	1.00
2460.30	87.09	31.74	3.60	0.00	9.50	0.00	112.93			A	1.00
* 2483.65	40.80	31.72	3.61	0.00	9.50	0.00	66.63	74	-7.37	P	1.00
* 2483.65	16.60	31.72	3.61	0.00	9.50	0.00	42.43	54	-11.57	A	1.00
* 4923.96	48.59	35.10	5.12	35.24	9.50	1.60	45.67	74	-28.33	P	1.00
* 4923.96	42.36	35.10	5.12	35.24	9.50	1.60	39.44	54	-14.56	A	1.00
* 7386.00	44.93	39.75	6.84	35.62	9.50	2.00	48.40	74	-25.60	P	1.00
* 7386.00	33.26	39.75	6.84	35.62	9.50	2.00	36.73	54	-17.27	A	1.00
9848.06	50.93	38.52	8.37	36.76	9.50	0.49	52.04	74	-21.96	P	1.00
9848.06	43.27	38.52	8.37	36.76	9.50	0.49	44.38	54	-9.62	A	1.00
* 12301.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14761.80	-----	-----	-----	-----	9.50	0.49	-----	-----	-----	-----	1.00
17222.10	-----	-----	-----	-----	9.50	0.59	-----	-----	-----	-----	1.00
* 19682.40	-----	-----	-----	-----	9.50	2.38	-----	-----	-----	-----	1.00
* 22142.70	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24603.00	-----	-----	-----	-----	9.50	2.16	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 $Level = Reading + AF + Cable - Preamp + Filter - Dist$, $Margin = Level - Limit$
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11b mode at 11Mbps with power setting 17.01dBm (PK) 11.17dBm (AVG) and antenna (2). The margin will be 3dB smaller if the power is set to 20.01dBm (PK) / 14.17 dBm (AVG).
- After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 57 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH1 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	18.30	31.81	3.57	0.00	9.50	0.00	44.18	74	-29.82	P	1.00
* 2389.90	5.10	31.81	3.57	0.00	9.50	0.00	30.98	54	-23.02	A	1.00
2409.24	66.94	31.79	3.58	0.00	9.50	0.00	92.81	Fundamental Frequency		P	1.00
2409.24	62.01	31.79	3.58	0.00	9.50	0.00	87.88			A	1.00
* 4824.16	45.80	34.44	5.08	35.16	9.50	2.00	42.67	74	-31.33	P	1.00
* 4824.16	35.47	34.44	5.08	35.16	9.50	2.00	32.34	54	-21.66	A	1.00
7236.00	45.86	39.81	6.74	35.65	9.50	2.00	49.25	74	-24.75	P	1.00
7236.00	34.06	39.81	6.74	35.65	9.50	2.00	37.45	54	-16.55	A	1.00
9646.60	50.38	38.54	8.29	36.43	9.50	0.61	51.89	74	-22.11	P	1.00
9647.86	43.50	38.54	8.29	36.44	9.50	0.61	45.00	54	-9.00	A	1.00
* 12046.20	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14455.44	-----	-----	-----	-----	9.50	0.65	-----	-----	-----	-----	1.00
16864.68	-----	-----	-----	-----	9.50	0.42	-----	-----	-----	-----	1.00
* 19273.92	-----	-----	-----	-----	9.50	1.93	-----	-----	-----	-----	1.00
21683.16	-----	-----	-----	-----	9.50	0.83	-----	-----	-----	-----	1.00
24092.40	-----	-----	-----	-----	9.50	2.95	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11g mode at 6Mbps with power setting 16.53dBm (PK) / 18.31dBm (AVG) and antenna (2).
- After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd.,ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 58 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH1 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	43.10	31.81	3.57	0.00	9.50	0.00	68.98	74	-5.02	P	1.00
* 2389.90	26.80	31.81	3.57	0.00	9.50	0.00	52.68	54	-1.32	A	1.00
2406.73	89.52	31.79	3.58	0.00	9.50	0.00	115.39	Fundamental Frequency		P	1.00
2406.73	84.52	31.79	3.58	0.00	9.50	0.00	110.39			A	1.00
* 4824.05	45.98	34.44	5.08	35.16	9.50	2.00	42.85	74	-31.15	P	1.00
* 4824.05	38.51	34.44	5.08	35.16	9.50	2.00	35.38	54	-18.62	A	1.00
7236.03	45.96	39.81	6.74	35.65	9.50	2.00	49.35	74	-24.65	P	1.00
7236.03	33.73	39.81	6.74	35.65	9.50	2.00	37.12	54	-16.88	A	1.00
9648.06	50.37	38.54	8.29	36.44	9.50	0.61	51.87	74	-22.13	P	1.00
9648.06	44.43	38.54	8.29	36.44	9.50	0.61	45.93	54	-8.07	A	1.00
* 12033.65	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14440.38	-----	-----	-----	-----	9.50	0.63	-----	-----	-----	-----	1.00
16847.11	-----	-----	-----	-----	9.50	0.41	-----	-----	-----	-----	1.00
* 19253.84	-----	-----	-----	-----	9.50	1.90	-----	-----	-----	-----	1.00
21660.57	-----	-----	-----	-----	9.50	0.84	-----	-----	-----	-----	1.00
24067.30	-----	-----	-----	-----	9.50	2.99	-----	-----	-----	-----	1.00

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
 $Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit$
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11g mode at 6Mbps with power setting 16.53dBm (PK) 8.31dBm (AVG) and antenna (2). The margin will be 1dB smaller if the power is set to 17.63dBm (PK) / 9.31 dBm (AVG).
 - The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
 - After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 59 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH6 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2434.07	70.89	31.77	3.59	0.00	9.50	0.00	96.75	Fundamental Frequency		P	1.00
2434.07	65.66	31.77	3.59	0.00	9.50	0.00	91.52			A	1.00
* 4874.08	45.89	34.77	5.10	35.20	9.50	1.80	42.86	74	-31.14	P	1.00
* 4874.08	36.12	34.77	5.10	35.20	9.50	1.80	33.09	54	-20.91	A	1.00
* 7311.05	45.82	39.78	6.79	35.64	9.50	2.00	49.25	74	-24.75	P	1.00
* 7311.05	33.76	39.78	6.79	35.64	9.50	2.00	37.19	54	-16.81	A	1.00
9747.83	50.19	38.53	8.33	36.60	9.50	0.55	51.50	74	-22.50	P	1.00
9747.83	42.92	38.53	8.33	36.60	9.50	0.55	44.23	54	-9.77	A	1.00
* 12170.35	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14604.42	-----	-----	-----	-----	9.50	0.62	-----	-----	-----	-----	1.00
17038.49	-----	-----	-----	-----	9.50	0.52	-----	-----	-----	-----	1.00
* 19472.56	-----	-----	-----	-----	9.50	2.17	-----	-----	-----	-----	1.00
21906.63	-----	-----	-----	-----	9.50	0.74	-----	-----	-----	-----	1.00
24340.70	-----	-----	-----	-----	9.50	2.55	-----	-----	-----	-----	1.00

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11g mode at 6Mbps with power setting 21.58dBm (PK) / 12.54dBm (AVG) and antenna (2).
 - After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 60 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH6 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2433.88	92.04	31.77	3.59	0.00	9.50	0.00	117.90	Fundamental Frequency		P	1.00
2433.88	83.95	31.77	3.59	0.00	9.50	0.00	109.81			A	1.00
* 4873.97	46.23	34.77	5.10	35.20	9.50	1.80	43.20	74	-30.80	P	1.00
* 4873.97	37.91	34.77	5.10	35.20	9.50	1.80	34.88	54	-19.12	A	1.00
* 7310.97	45.82	39.78	6.79	35.64	9.50	2.00	49.25	74	-24.75	P	1.00
* 7310.97	33.61	39.78	6.79	35.64	9.50	2.00	37.04	54	-16.96	A	1.00
9747.88	49.93	38.53	8.33	36.60	9.50	0.55	51.24	74	-22.76	P	1.00
9747.88	43.89	38.53	8.33	36.60	9.50	0.55	45.20	54	-8.80	A	1.00
* 12169.40	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14603.28	-----	-----	-----	-----	9.50	0.62	-----	-----	-----	-----	1.00
17037.16	-----	-----	-----	-----	9.50	0.51	-----	-----	-----	-----	1.00
* 19471.04	-----	-----	-----	-----	9.50	2.17	-----	-----	-----	-----	1.00
21904.92	-----	-----	-----	-----	9.50	0.74	-----	-----	-----	-----	1.00
24338.80	-----	-----	-----	-----	9.50	2.56	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11g mode at 6Mbps with power setting 21.58dBm (PK) / 12.56dBm (AVG) and antenna (2).
- After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 61 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH11 TX				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2456.63	68.32	31.74	3.60	0.00	9.50	0.00	94.16	Fundamental Frequency		P	1.00
2456.63	62.82	31.74	3.60	0.00	9.50	0.00	88.66			A	1.00
* 2483.60	18.20	31.72	3.61	0.00	9.50	0.00	44.03	74	-29.97	P	1.00
* 2483.60	5.20	31.72	3.61	0.00	9.50	0.00	31.03	54	-22.97	A	1.00
* 4923.97	46.23	35.10	5.12	35.24	9.50	1.60	43.31	74	-30.69	P	1.00
* 4923.97	36.57	35.10	5.12	35.24	9.50	1.60	33.65	54	-20.35	A	1.00
* 7386.13	45.55	39.75	6.84	35.62	9.50	2.00	49.02	74	-24.98	P	1.00
* 7386.13	33.27	39.75	6.84	35.62	9.50	2.00	36.74	54	-17.26	A	1.00
9847.99	50.27	38.52	8.37	36.76	9.50	0.49	51.38	74	-22.62	P	1.00
9847.99	43.69	38.52	8.37	36.76	9.50	0.49	44.80	54	-9.20	A	1.00
* 12283.15	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14739.78	-----	-----	-----	-----	9.50	0.51	-----	-----	-----	-----	1.00
17196.41	-----	-----	-----	-----	9.50	0.58	-----	-----	-----	-----	1.00
* 19653.04	-----	-----	-----	-----	9.50	2.35	-----	-----	-----	-----	1.00
* 22109.67	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24566.30	-----	-----	-----	-----	9.50	2.21	-----	-----	-----	-----	1.00

Note :

- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
- AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
- Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
- Remark “*” means the Restricted band.
- Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
- The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
- The other emission levels were very low against the limit
- The test limit distance is 3M limit.
- For 802.11g mode at 6Mbps with power setting 15.89dBm (PK) / 17.87dBm (AVG) and antenna (2).
- After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
 Report No. : ER04-04-057FRF
 Page 62 of 86

The frequency spectrum above 1 GHz was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Digital Path Networks	Test Date	2004/08/03
Product Name	3rd Generation Customer Premise Equipment	Test By	Chris Huang
Model Name	Gen3-CPE	TEMP & Humidity	30°C , 60%

CH11 TX				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2456.78	87.99	31.74	3.60	0.00	9.50	0.00	113.83	Fundamental Frequency		P	1.00
2456.78	82.22	31.74	3.60	0.00	9.50	0.00	108.06			A	1.00
* 2483.60	43.80	31.72	3.61	0.00	9.50	0.00	69.63	74	-4.37	P	1.00
* 2483.60	26.20	31.72	3.61	0.00	9.50	0.00	52.03	54	-1.97	A	1.00
* 4924.02	46.11	35.10	5.12	35.24	9.50	1.60	43.19	74	-30.81	P	1.00
* 4924.02	36.88	35.10	5.12	35.24	9.50	1.60	33.96	54	-20.04	A	1.00
* 7386.01	46.08	39.75	6.84	35.62	9.50	2.00	49.55	74	-24.45	P	1.00
* 7386.01	33.53	39.75	6.84	35.62	9.50	2.00	37.00	54	-17.00	A	1.00
9848.05	49.71	38.52	8.37	36.76	9.50	0.49	50.82	74	-23.18	P	1.00
9848.05	42.32	38.52	8.37	36.76	9.50	0.49	43.43	54	-10.57	A	1.00
* 12283.90	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14740.68	-----	-----	-----	-----	9.50	0.51	-----	-----	-----	-----	1.00
17197.46	-----	-----	-----	-----	9.50	0.58	-----	-----	-----	-----	1.00
* 19654.24	-----	-----	-----	-----	9.50	2.35	-----	-----	-----	-----	1.00
* 22111.02	-----	-----	-----	-----	9.50	0.70	-----	-----	-----	-----	1.00
24567.80	-----	-----	-----	-----	9.50	2.21	-----	-----	-----	-----	1.00

- Note :
- The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
 - AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 - Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
 - Remark “*” means the Restricted band.
 - Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
 - The result basic equation calculation is as follow:
 Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
 - The other emission levels were very low against the limit
 - The test limit distance is 3M limit.
 - For 802.11g mode at 6Mbps with power setting 15.89dBm (PK) / 7.87dBm (AVG) and antenna (2). The margin will be 1.5dB smaller if the power is set to 17.39dBm (PK) / 9.37 dBm (AVG).
 - The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
 - After an exploratory test, the emission of antenna (2) is higher than the emission of antenna (4). So only the antenna (2) data are recorded in final test report.

3.7 Photos of Open Site

Antenna (1) :





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100


Report No. : ER04-04-057FRF

Page 64 of 86



Antenna (2) :



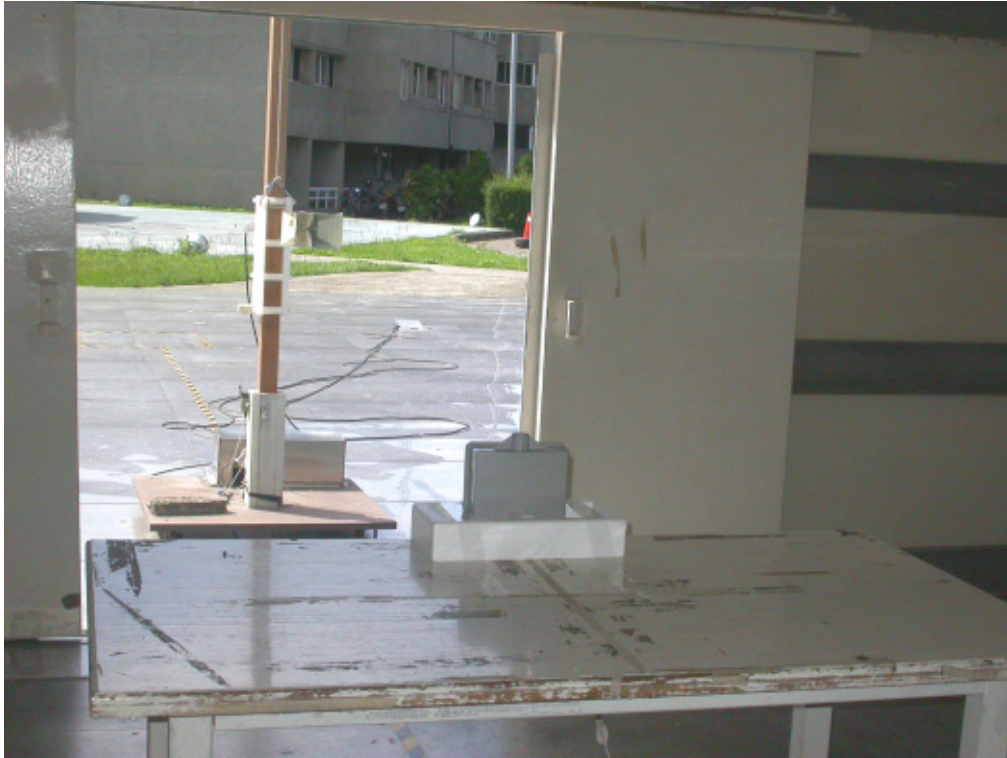



4. 6dB BANDWIDTH MEASUREMENT

4.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup



4.3 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500KHz

4.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 10MHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 200KHz.



4.6 Test Results

Input Power (System)	24VDC (PoE)	Environmental Conditions	25.4°C, 70%RH
Tested By	Chris Huang		

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.15	0.5	PASS
6	2437	15.15	0.5	PASS
11	2462	15.19	0.5	PASS

Note :

For 802.11b Mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.39	0.5	PASS
6	2437	16.03	0.5	PASS
11	2462	15.91	0.5	PASS

Note :

For 802.11g Mode




4.7 Photo of 6db Bandwidth Measurement

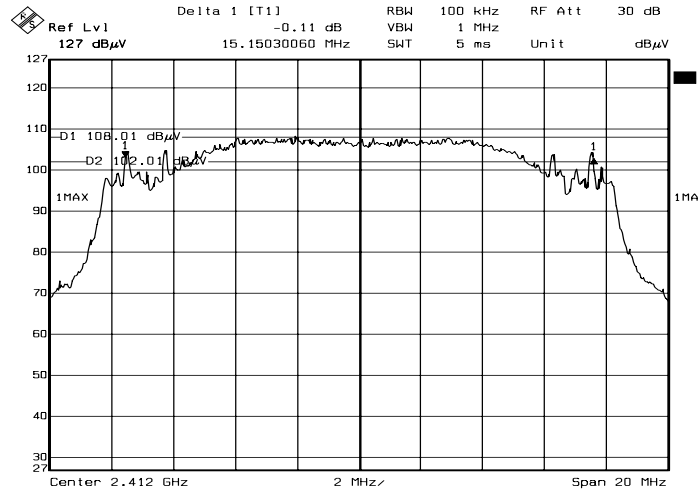


Date: 28.MAY.2004 20:54:11

Channel 1

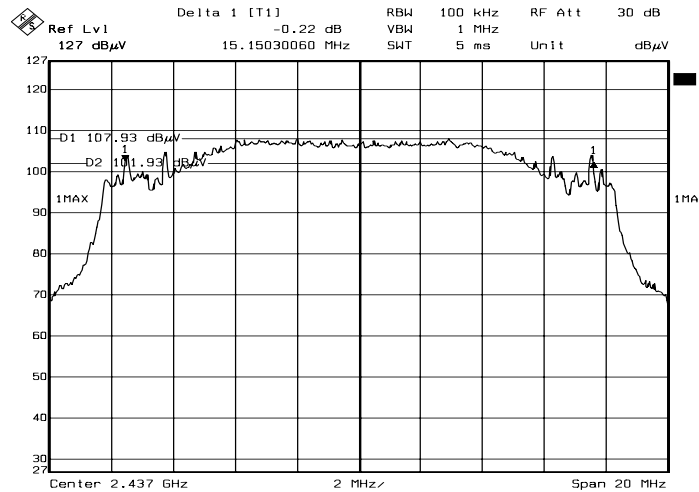

Date: 28.MAY.2004 21:22:51

Channel 6

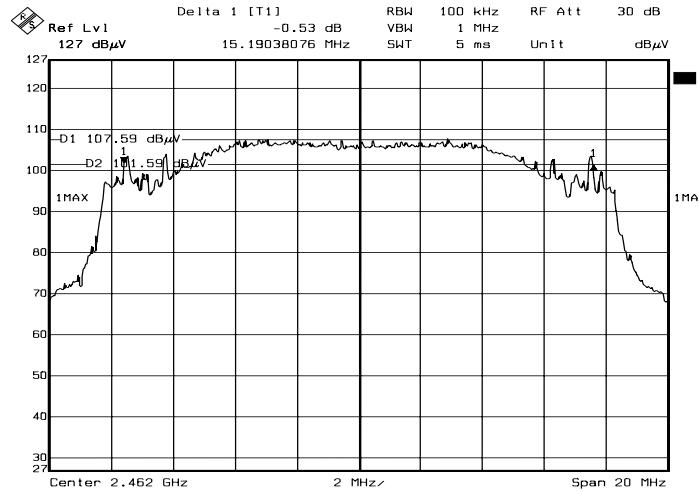

Date: 28.MAY.2004 21:10:27

Channel 11

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720


FCC ID : RHK-G3CPE100

Report No. : ER04-04-057FRF


Page 70 of 86

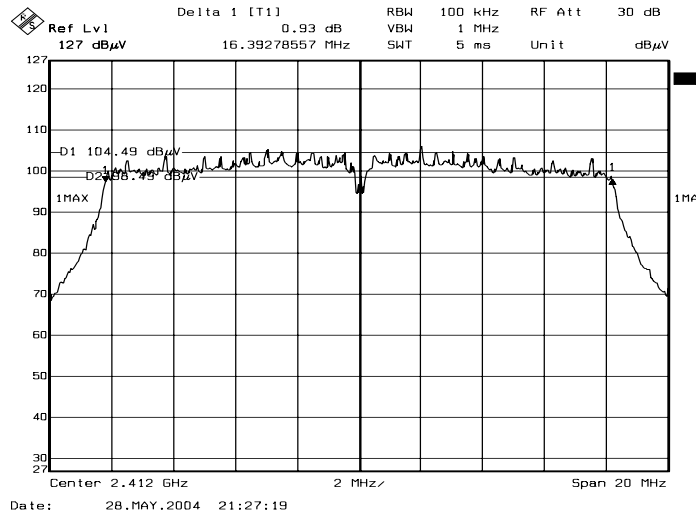

Channel 1

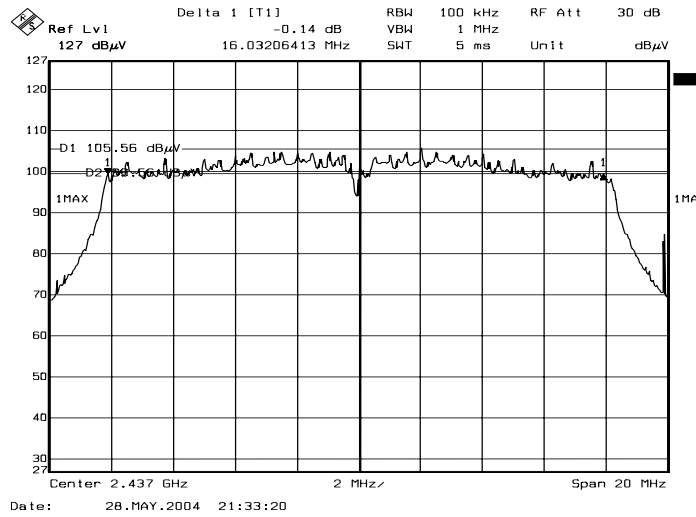

Channel 6

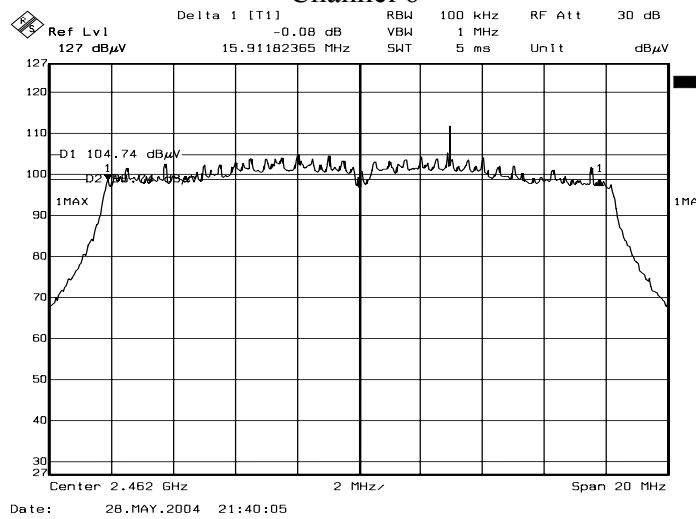

Channel 11

Note: For 802.11g Mode

5. MAXIMUM PEAK OUTPUT POWER


5.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004
Agilent ATTENUATOR	8491B	57321	CAL. ON USE
ANRITSU	ML2487A MAL2491A	6K00001783 030982	February 10, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup



5.3 Limits of Maximum Peak Output Power

The Maximum peak output power Measurement according to the 15.247(b)(3) that shall not exceed 30dBm, and 15.247(b)(4) the transmitting antennas of directional gain greater than 6dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.



5.4 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

5.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.82 dB.

5.6 Test Results

Input Power (System)	24VDC (PoE)	Environmental Conditions	25.4°C, 70%RH
Tested By	Chris Huang		

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	15.07	20.81	21.80	PASS
6	2437	16.17	20.56	21.80	PASS
11	2462	14.17	20.01	21.80	PASS

- Note :
1. For 802.11b mode.
 2. At final test to get the worst-case emission at 11Mbps.
 3. The results are calculated as the following equation :
Peak Power Output = Peak Power Reading + Cable loss + Attenuator
 4. All these Antennas are soldered on PCB directly. The maximum Gain of this antenna is 14.2dBi.

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	9.31	17.63	21.80	PASS
6	2437	12.54	21.58	21.80	PASS
11	2462	9.37	17.39	21.80	PASS

- Note :
1. For 802.11g mode.
 2. At final test to get the worst-case emission at 6Mbps.
 3. The results are calculated as the following equation :
Peak Power Output = Peak Power Reading + Cable loss + Attenuator
 4. All these Antennas are soldered on PCB directly. The maximum Gain of this antenna is 14.2dBi.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100
Report No. : ER04-04-057FRF
Page 73 of 86

6. POWER SPECTRAL DENSITY MEASUREMENT


6.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup



6.3 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3KHz.



6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 30KHz VBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

6.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.82dB.

6.6 Test Results

Input Power (System)	24VDC (PoE)	Environmental Conditions	25.4°C, 70%RH
Tested By	Chris Huang		

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maxmum Limit (dBm)	Pass / Fail
1	2412	-13.82	8	PASS
6	2437	-14.35	8	PASS
11	2462	-15.02	8	PASS

Note :

For 11Mbps (802.11b mode) at finial test to get the worst-case emission at 11Mbps.


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maxmum Limit (dBm)	Pass / Fail
1	2412	-17.37	8	PASS
6	2437	-17.77	8	PASS
11	2462	-18.87	8	PASS

Note :


For 54Mbps (802.11g mode) at finial test to get the worst-case emission at 6Mbps.




6.7 Photo of Power Spectral Density Measurement

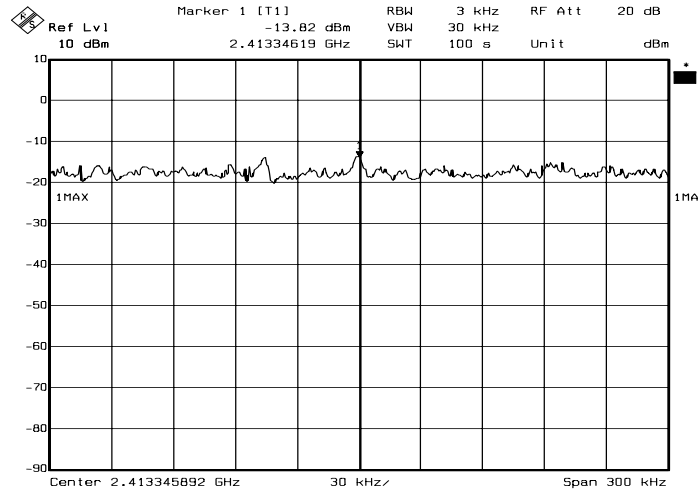

Channel 1

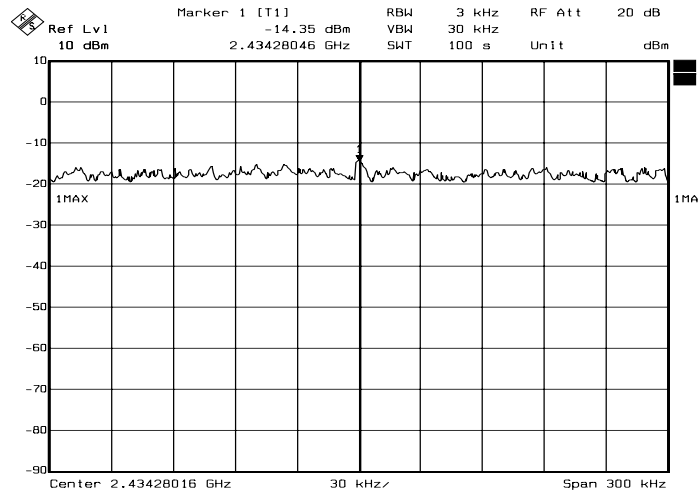

Channel 6

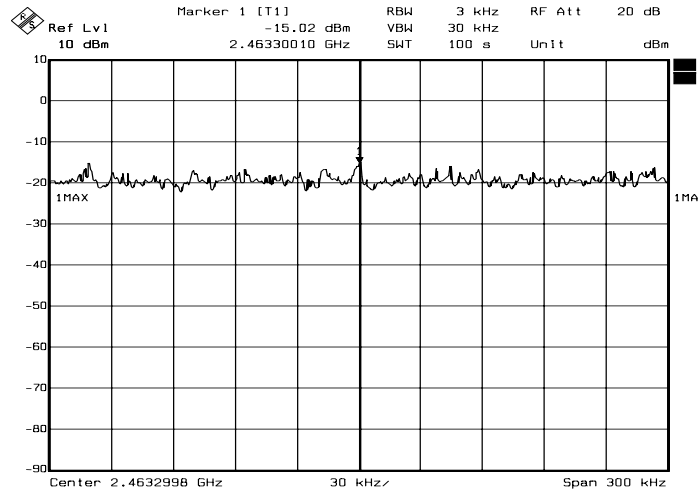

Channel 11

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : RHK-G3CPE100


Report No. : ER04-04-057FRF

Page 76 of 86

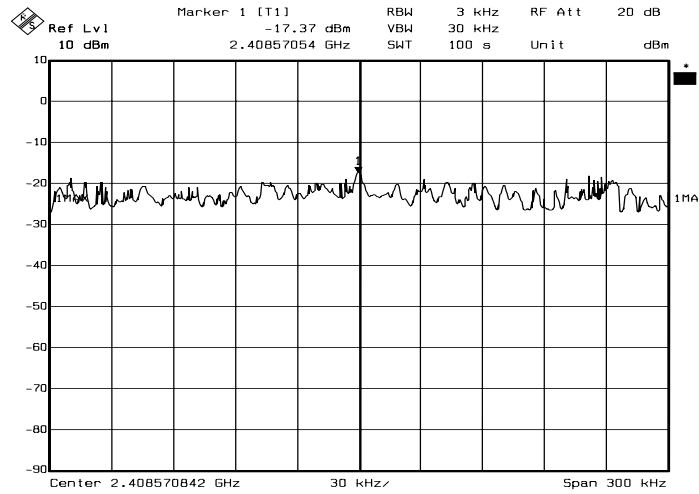


Date: 28.MAY.2004 22:08:12

Channel 1

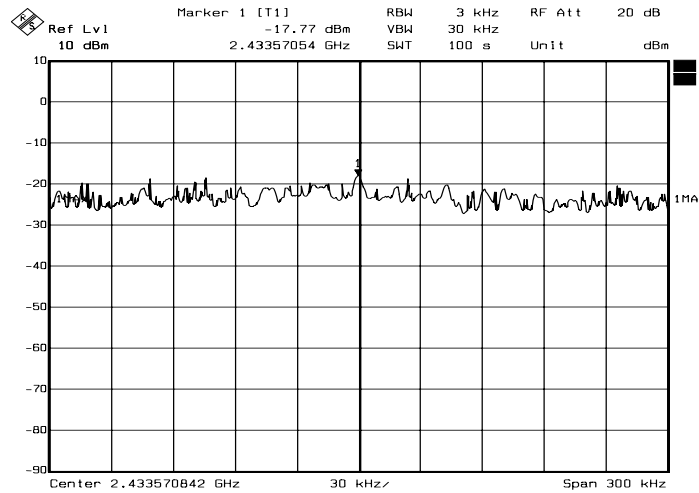

Date: 28.MAY.2004 21:59:45

Channel 6

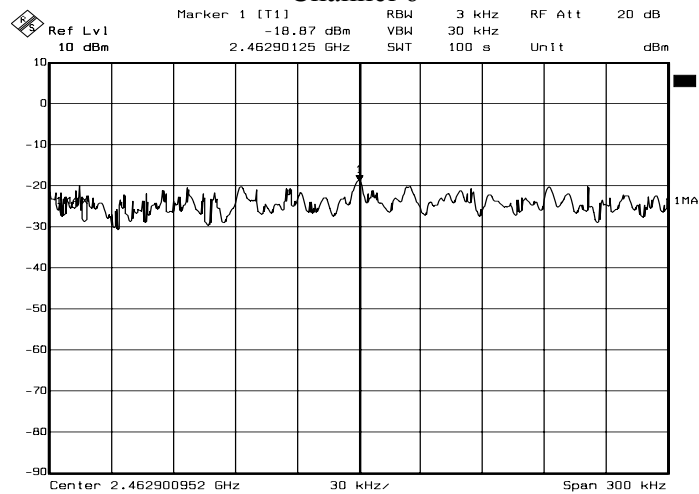

Date: 28.MAY.2004 21:55:59

Channel 11

Note: For 802.11g Mode



7. BAND EDGE MEASUREMENT


7.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup



7.3 Limits of Band Edge Emissions Measurement

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.4 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer with suitable frequency span including 100KHz bandwidth from band edge. The band edges was measured and recorded.

7.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.82 dB.



7.6 Test Results

A. Conducted

Refer to 7.7 photo of out band Emission measurement

B. Radiated

Input Power (System)	24VDC (PoE)	Environmental Conditions	25.4°C, 70%RH
Tested By	Chris Huang		

For 802.11b mode (Antenna 1)

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	57.57	76.93	71.82	93.73	PASS
	AV	45.38	61.70	65.07	87.26	
2483.50	PK	55.65	66.96	74.00	74.00	PASS
	AV	42.83	50.79	54.00	54.00	

For 802.11g mode (Antenna 1)

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	56.56	75.74	68.73	91.25	PASS
	AV	45.24	63.24	64.37	85.33	
2483.50	PK	53.24	65.78	74.00	74.00	PASS
	AV	42.26	50.51	54.00	54.00	

Note :

Radiated band edge field strength is measured with measurement procedure ANSI C63.4-2001.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : RHK-G3CPE100

Report No. : ER04-04-057FRF

Page 79 of 86

Input Power (System)	24VDC (PoE)	Environmental Conditions	25.4°C, 70%RH
Tested By	Chris Huang		

For 802.11b mode (Antenna 2)

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	59.08	82.98	78.15	100.38	PASS
	AV	42.08	66.48	73.63	95.41	
2483.50	PK	42.93	67.03	74.00	74.00	PASS
	AV	28.63	42.53	54.00	54.00	

For 802.11g mode (Antenna 2)

Refer to the section 3.6, the measured radiated band edge emissions are listed below :


Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	55.78	80.28	72.81	95.39	PASS
	AV	42.18	65.58	67.88	90.39	
2483.50	PK	44.43	70.03	74.00	74.00	PASS
	AV	31.13	52.13	54.00	54.00	

Note :

Radiated band edge field strength is measured with measurement procedure ANSI C63.4-2001.




7.7 Photo of Band edge Measurement

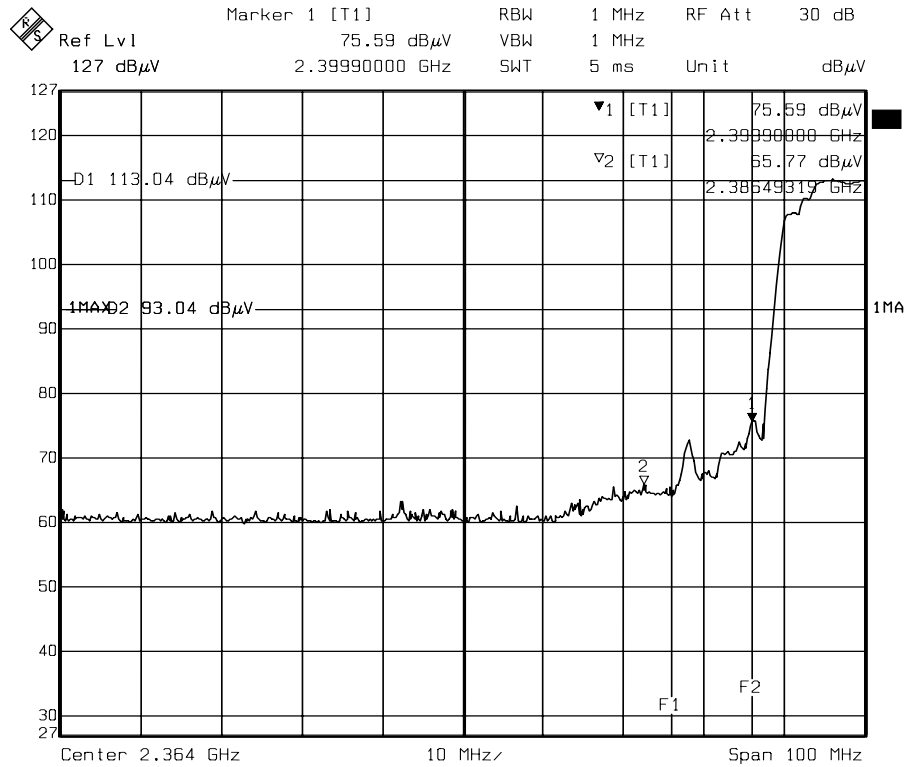

Date: 28.MAY.2004 23:26:26

Lower Band edge (Peak)

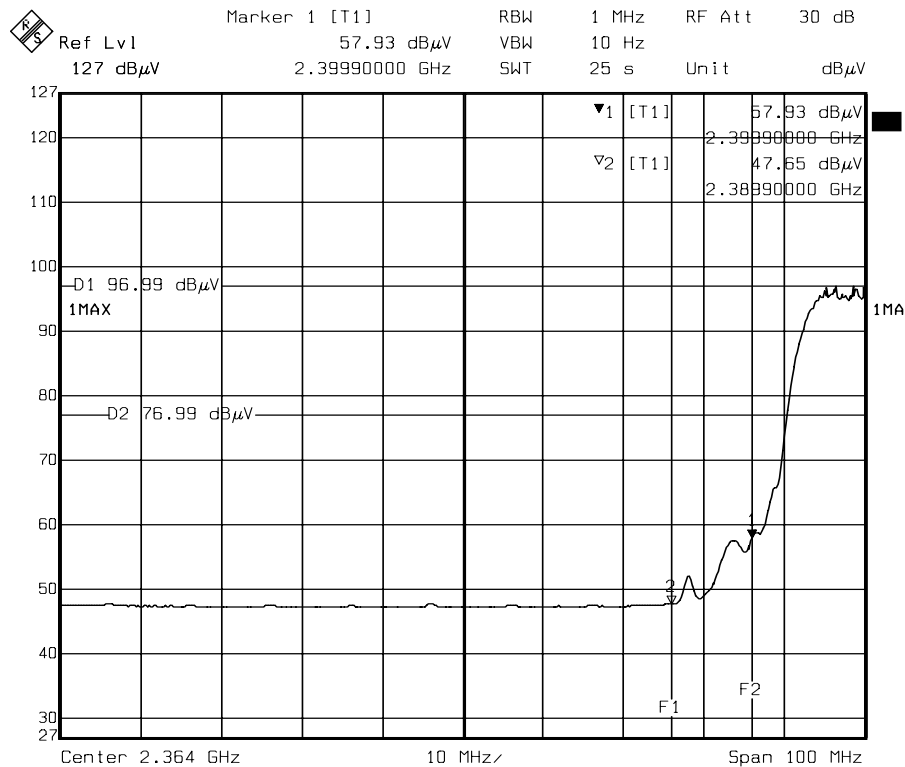

Date: 28.MAY.2004 23:17:36

Lower Band edge (Average)

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : RHK-G3CPE100


Report No. : ER04-04-057FRF

Page 81 of 86

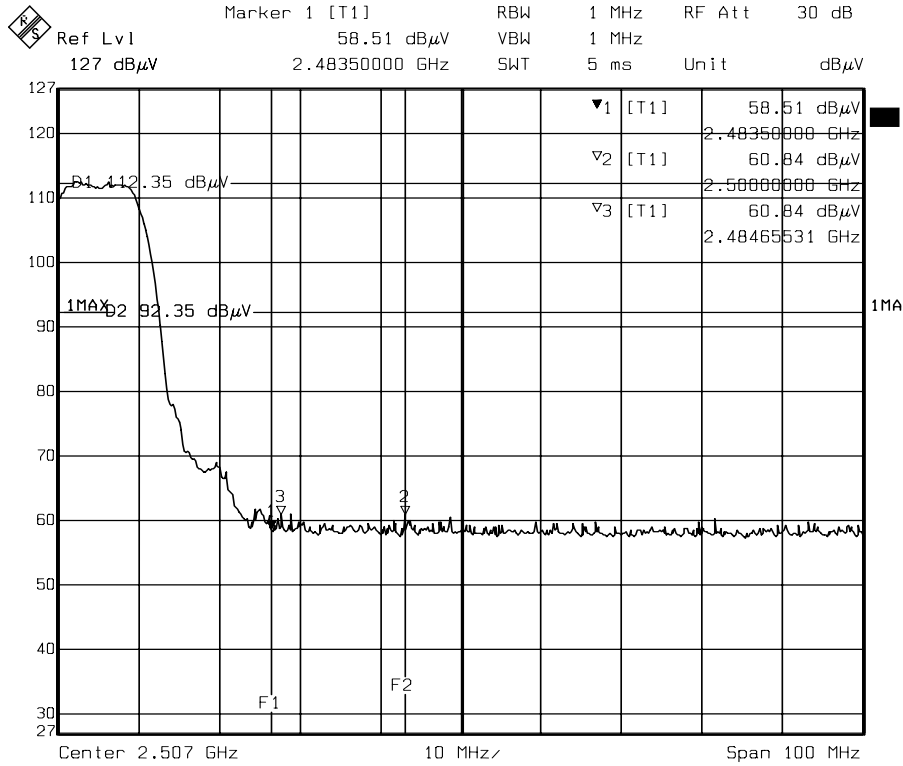

Date: 28.MAY.2004 22:36:30

Higher Band edge (Peak)

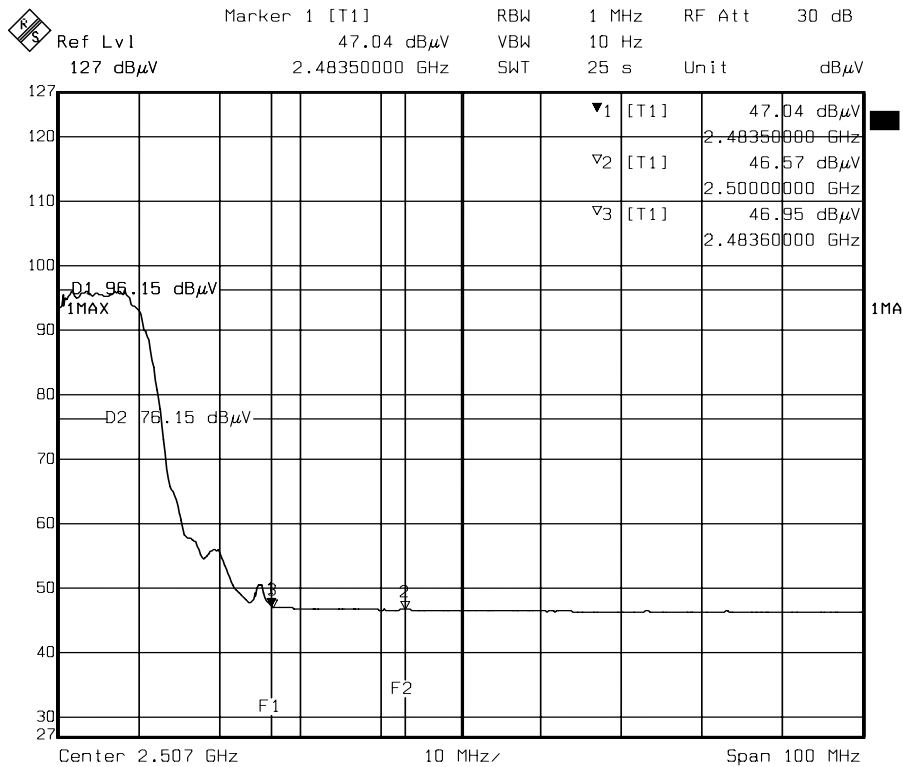

Date: 28.MAY.2004 22:50:35

Higher Band edge (Average)

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720


FCC ID : RHK-G3CPE100

Report No. : ER04-04-057FRF

Page 82 of 86

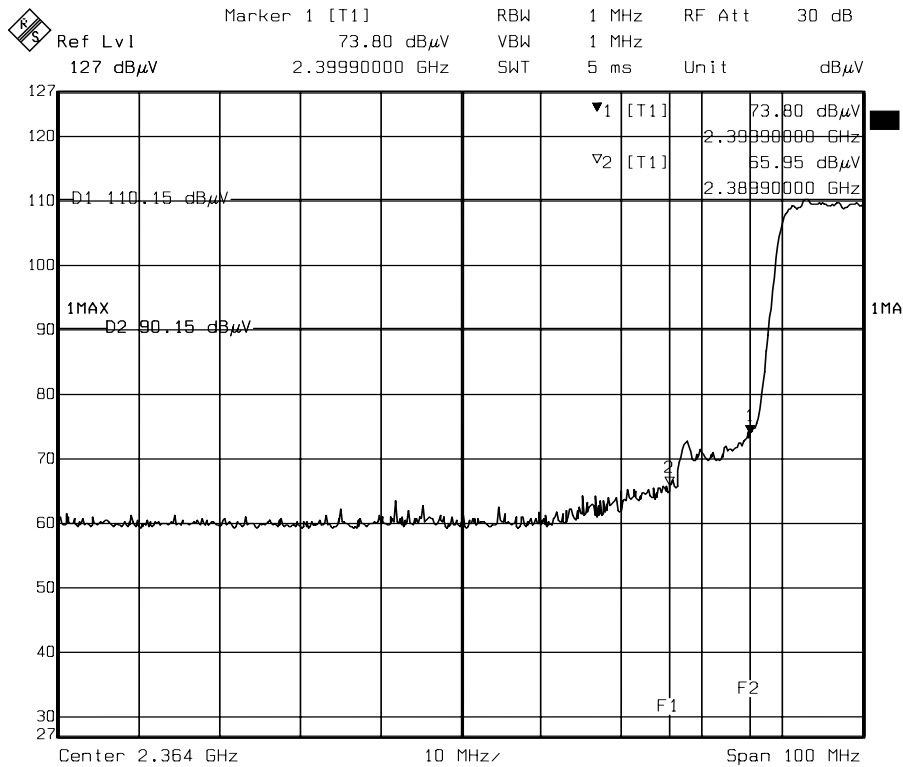

Lower Band edge (Peak)

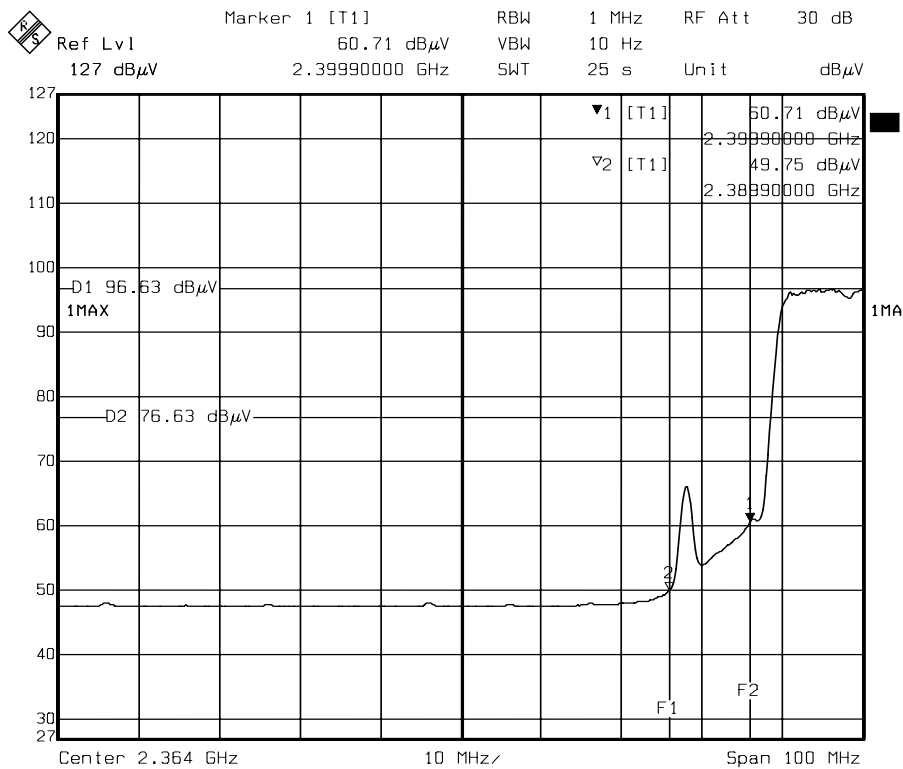

Lower Band edge (Average)

Note: For 802.11g Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
 TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : RHK-G3CPE100


Report No. : ER04-04-057FRF

Page 83 of 86

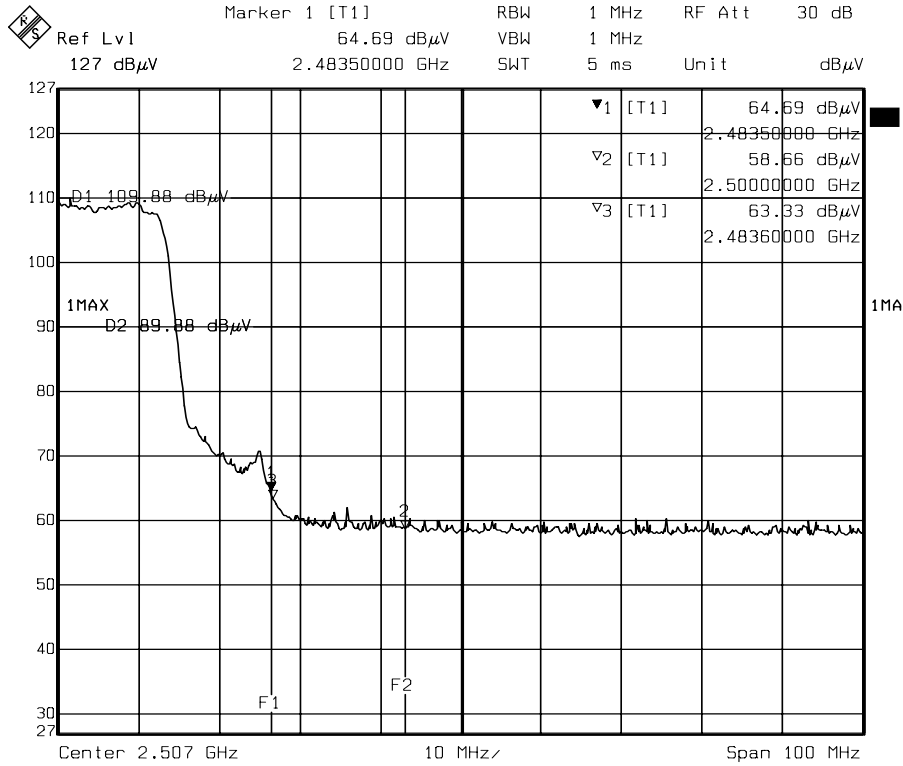

Date: 28.MAY.2004 22:55:51

Higher Band edge (Peak)

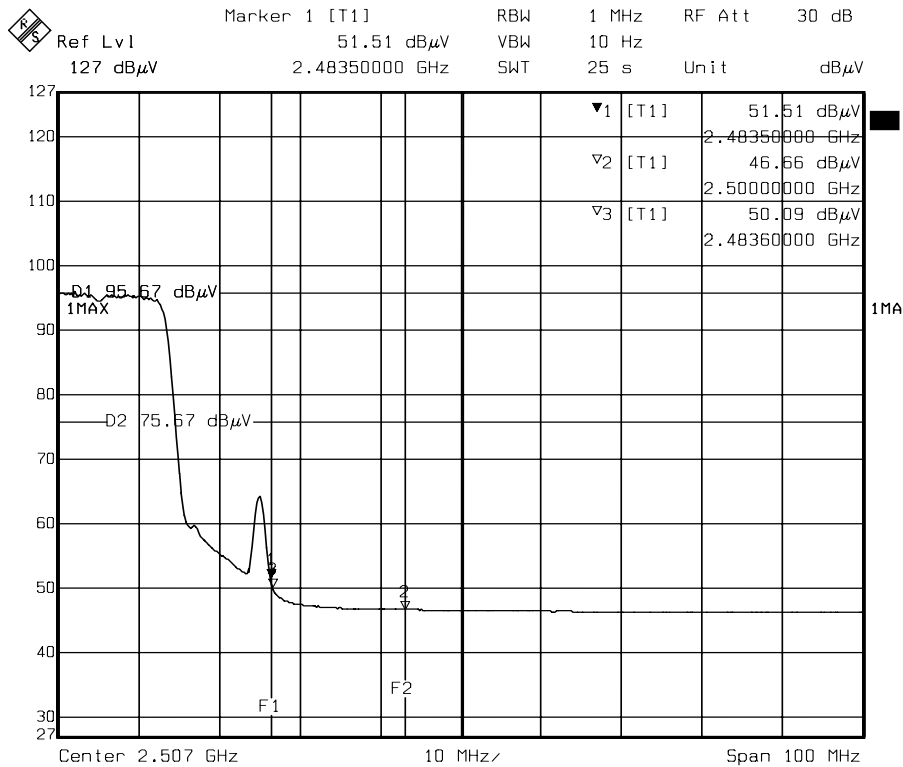

Date: 28.MAY.2004 22:59:51

Higher Band edge (Average)

Note: For 802.11g Mode



8. ANTENNA REQUIREMENT

8.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2 Antenna Connected Construction

ANTENNA (1) : Omni-directional antenna, 9dBi, RFtechnics Ltd., RFT-0M-09-24

ANTENNA (2) : Directional panel antenna, 14.2dBi, SuperPass, SPFPG14

ANTENNA (3) : Omni-directional antenna, 8dBi, SuperPass, SPDG16O

ANTENNA (4) : Flat plate antenna, 14dBi, RFtechnics Ltd., RFT-FP-24-14

All these antennas are soldered on PCB directly. The maximum Gain of this antenna is only 14.2dBi.



9. RF EXPOSURE EVALUATION

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)
LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

9.1 Friis Formula

Friis transmission formula : $Pd = (Pout * G) / (4 * pi * r^2)$

Where

Pd = power density in mW/cm²

Pout = output power to antenna in mW

G = gain of antenna in linear scale

Pi = 3.1416

R = distance between observation point and center of the radiator in cm

Pd is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

9.2 EUT Operating Condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.



9.3 Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data
Test Mode : Normal Operation

9.3.1 Antenna Gain

Antenna Gain : The maximum Gain measured in fully anechoic chamber is 2dBi linear scale.

9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance

Channel	Channel Frequency (MHz)	Output Average Power to Antenna (dBm)	Antenna Gain	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	15.07	14.2	0.084281	1
CH6	2437.00	16.17	14.2	0.216636	1
CH11	2462.00	14.17	14.2	0.068506	1

Note :

1. For 802.11b mode (11Mbps).
2. The power density Pd (4th column) at a distance of 20cm calculated from the friis transmission formula is far below the limit of 1 mW/cm² . The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.

Channel	Channel Frequency (MHz)	Output Average Power to Antenna (dBm)	Antenna Gain	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	9.31	14.2	0.035459	1
CH6	2437.00	12.54	14.2	0.093914	1
CH11	2462.00	9.37	14.2	0.032043	1

Note :

1. For 802.11g mode (6Mbps).
2. The power density Pd (4th column) at a distance of 20cm calculated from the friis transmission formula is far below the limit of 1 mW/cm² . The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.