

# RADIO FREQUENCY EXPOSURE REPORT

FOR THE

**Device: Gen7 AP**  
**Model: G7RL10H and G7RL10S**

**Report No.: 100331-25**

**Date of issue: December 18, 2017**

**PREPARED FOR:**

DigitalPath, Inc.  
1065 Marauder St.  
Chico, CA 95973

**PREPARED BY:**

Benny Lovan  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



**Steve Behm**  
*Director of Quality Assurance & Engineering Services*  
CKC Laboratories, Inc.

**Purpose:**

To demonstrate compliance with United States, Canada, Australia and/or European Union RF Exposure requirements for Portable equipment (devices used  $\leq 20$ cm from the body) or Mobile equipment (devices used  $> 20$ cm from the body) with power output below exemption levels and Mobile equipment, where Maximum Permissible Exposure (MPE) Calculations apply.

**Device and Antenna Operating Configuration:**

Devices operating at maximum output power with continuous transmission of modulated data.

The present report is assessing compliance for four frequency bands of operation: 5150-5250MHz, 5250 – 5350MHz, 5470 – 5725MHz and 5725-5850MHz.

Operation in the band of 5150-5250MHz and 5250 – 5350MHz refers to report 100331-23.

Operation in the band of 5470 – 5725 and 5725-5850MHz refers to the report 100331-24.

For each frequency band of operation, there are multiple antennas that may be used; the gain of these antennas are 9dBi, 13dBi, 17.5dBi, 28dBi. Depending on which antenna is used, the power will be adjusted accordingly as noted in the referenced test reports.

**Test Procedure:**

This equipment is evaluated in accordance with the guidelines set forth in KDB 447498 & ANSI C95.1 for the US, Health Canada Safety Code 6 & RSS 102 for Canada, ARPANSA RPS3 for AU and EN 62479 or EN 62311 for EU.

**Other Considerations:**

Report considers stand-alone configurations only. RF Exposure limits are calculated at the highest measured amplitude of each operating band. The stand-alone evaluation was utilized due to antenna patterns that do not overlap and therefore the RF Exposure Power Density Assessment for Multi Transmitter, Simultaneous Transmission is not applicable.

The manufacturer declares the output from all antennas are completely uncorrelated.

**Referenced Test Reports:**

The following test reports were referenced in conjunction with this assessment:

100331-23 FCC Subpart E Part 15.407, 5.2 and 5.3GHz

100331-24 FCC Subpart E Part 15.407, 5.5 and 5.8GHz

## RF Exposure Power Density Assessment (Single Transmitter, Stand Alone)

**MPE Calculation:**

$$\text{Power Density } (S) = \frac{\text{EIRP}}{4\pi d^2} \quad \text{Given: EIRP in mW or W and d in cm or m}$$

**US MPE Assessment**

| <b>Power Reported is:</b> | <input type="checkbox"/> Peak <input checked="" type="checkbox"/> Average                             |                                    |             |                |                           |                             |   |
|---------------------------|---|------------------------------------|-------------|----------------|---------------------------|-----------------------------|---|
| <b>Limit Used is:</b>     | <input checked="" type="checkbox"/> General Population <input type="checkbox"/> Occupational Exposure |                                    |             |                |                           |                             |   |
| Operating Band<br>MHz     | Power<br>dBm  | Ant Type/Gain<br>dBi               | EIRP<br>dBm | Distance<br>cm | MPE<br>mW/cm <sup>2</sup> | Limit<br>mW/cm <sup>2</sup> | Comments  |
| 20MHz Channel BW          |   |                                    |             |                |                           |                             |   |
| 5180 - 5240               | 13.46   | 17.5dBi / Horn                     | 30.96       | 20             | 0.2482                    | 1                           |   |
| 5260 - 5320               | 11.33   | 17.5dBi / Horn                     | 28.83       | 20             | 0.1519                    | 1                           |   |
| 5500 - 5700               | 12.46   | 17.5dBi / Horn                     | 29.96       | 20             | 0.1971                    | 1                           |   |
| 5745 - 5840               | 17.11   | 17.5dBi / Horn                     | 34.61       | 20             | 0.5751                    | 1                           |   |
| 5180 - 5240               | 13.46   | 13dBi / HexHorn<br>and 50 Deg Horn | 26.46       | 20             | 0.0881                    | 1                           |   |
| 5260 - 5320               | 12.91   | 13dBi / HexHorn<br>and 50 Deg Horn | 25.91       | 20             | 0.0776                    | 1                           |   |
| 5500 - 5700               | 15.57   | 13dBi / HexHorn<br>and 50 Deg Horn | 28.57       | 20             | 0.1431                    | 1                           |   |
| 5745 - 5840               | 20.02   | 13dBi / HexHorn<br>and 50 Deg Horn | 33.02       | 20             | 0.3987                    | 1                           |   |
| 5180 - 5240               | 20.46   | 9dBi / Horn                        | 29.46       | 20             | 0.1756                    | 1                           |   |
| 5260 - 5320               | 20.35   | 9dBi / Horn                        | 29.35       | 20             | 0.1713                    | 1                           |   |
| 5500 - 5700               | 20.36   | 9dBi / Horn                        | 29.36       | 20             | 0.1717                    | 1                           |   |
| 5745 - 5840               | 21.10   | 9dBi / Horn                        | 30.10       | 20             | 0.2036                    | 1                           |   |
| 5745 - 5840               | 22.94   | 28dBi / DISH                       | 50.94       | 100            | 0.9881                    | 1                           | Calculated for<br>a 1 meter<br>separation<br>distance |

| 40MHz Channel BW |       |                                    |       |     |        |   |   |
|------------------|-------|------------------------------------|-------|-----|--------|---|---|
| 5200 – 5210      | 9.65  | 17.5dBi / Horn                     | 27.15 | 20  | 0.1032 | 1 |   |
| 5260 - 5310      | 10.21 | 17.5dBi / Horn                     | 27.71 | 20  | 0.1174 | 1 |   |
| 5520 - 5700      | 12.34 | 17.5dBi / Horn                     | 29.84 | 20  | 0.1917 | 1 |   |
| 5760 - 5825      | 18.48 | 17.5dBi / Horn                     | 35.98 | 20  | 0.7884 | 1 |   |
| 5200 – 5210      | 14.03 | 13dBi / HexHorn<br>and 50 Deg Horn | 27.03 | 20  | 0.1004 | 1 |   |
| 5260 - 5310      | 14.33 | 13dBi / HexHorn<br>and 50 Deg Horn | 27.33 | 20  | 0.1076 | 1 |   |
| 5520 - 5700      | 16.91 | 13dBi / HexHorn<br>and 50 Deg Horn | 29.91 | 20  | 0.1949 | 1 |   |
| 5760 - 5825      | 22.81 | 13dBi / HexHorn<br>and 50 Deg Horn | 35.81 | 20  | 0.7581 | 1 |   |
| 5180 - 5210      | 16.67 | 9dBi / Horn                        | 25.67 | 20  | 0.0734 | 1 |   |
| 5260 - 5320      | 16.74 | 9dBi / Horn                        | 25.74 | 20  | 0.0746 | 1 |   |
| 5500 - 5700      | 16.46 | 9dBi / Horn                        | 25.46 | 20  | 0.0699 | 1 |   |
| 5760 - 5840      | 21.51 | 9dBi / Horn                        | 30.51 | 20  | 0.2237 | 1 |   |
| 5745 - 5825      | 20.02 | 28dBi / DISH                       | 48.02 | 100 | 0.5044 | 1 | Calculated for<br>a 1 meter<br>separation<br>distance |
| 80MHz Channel BW |       |                                    |       |     |        |   |   |
| 5240             | 8.67  | 17.5dBi / Horn                     | 26.17 | 20  | 0.0824 | 1 |   |
| 5260             | 8.60  | 17.5dBi / Horn                     | 26.1  | 20  | 0.0810 | 1 |   |
| 5540 - 5600      | 8.51  | 17.5dBi / Horn                     | 26.01 | 20  | 0.0794 | 1 |   |
| 5815 - 5820      | 16.5  | 17.5dBi / Horn                     | 33.50 | 20  | 0.4454 | 1 |   |
| 5210 - 5240      | 11.8  | 13dBi / HexHorn<br>and 50 Deg Horn | 24.80 | 20  | 0.0601 | 1 |   |
| 5260             | 12.14 | 13dBi / HexHorn<br>and 50 Deg Horn | 25.14 | 20  | 0.0649 | 1 |   |
| 5540 - 5600      | 16.60 | 13dBi / HexHorn<br>and 50 Deg Horn | 29.60 | 20  | 0.1814 | 1 |   |
| 5815 - 5820      | 19.53 | 13dBi / HexHorn<br>and 50 Deg Horn | 32.53 | 20  | 0.3562 | 1 |   |
| 5200 - 5205      | 13.45 | 9dBi / Horn                        | 22.45 | 20  | 0.0349 | 1 |   |
| 5260 - 5300      | 14.09 | 9dBi / Horn                        | 23.09 | 20  | 0.0405 | 1 |   |
| 5510 - 5600      | 17.18 | 9dBi / Horn                        | 26.18 | 20  | 0.0826 | 1 |   |
| 5815 - 5840      | 18.15 | 9dBi / Horn                        | 27.15 | 20  | 0.1032 | 1 |   |
| 5760 - 5815      | 16.31 | 28dBi / DISH                       | 44.31 | 100 | 0.2147 | 1 | Calculated for<br>a 1 meter<br>separation<br>distance |

## RF Exposure Power Density Assessment (Multi Transmitter, Simultaneous Transmission)

**MPE Calculation:**

$$Power\ Density\ (S) = \frac{EIRP}{4\pi\ d^2} \quad \text{Given: EIRP in } mW \text{ or } W \text{ and } d \text{ in } cm \text{ or } m$$

For multi-band devices with simultaneous transmission, assessment of compliance to MPE limits is based on fractional analysis for each band of operation:  $\sum_i \frac{S_i}{MPE\ Limit_i} \leq 1$ .

**US MPE Assessment**

| <b>Power Reported is:</b> | <input type="checkbox"/> Peak <input type="checkbox"/> Average                             |                   |          |             |                        |                          |         |
|---------------------------|--|-------------------|----------|-------------|------------------------|--------------------------|---------|
| <b>Limit Used is:</b>     | <input type="checkbox"/> General Population <input type="checkbox"/> Occupational Exposure |                   |          |             |                        |                          |         |
| Operating Band MHz        | Power dBm  | Ant Type/Gain dBi | EIRP dBm | Distance cm | MPE mW/cm <sup>2</sup> | Limit mW/cm <sup>2</sup> | S/Limit |
| N/A                       | N/A  | N/A               | N/A      | N/A         | N/A                    | N/A                      | N/A     |

N/A - The stand-alone evaluation was utilized due to antenna patterns that do not overlap and therefore the RF Exposure Power Density Assessment for Multi Transmitter, Simultaneous Transmission is not applicable. The manufacturer declares the output from all antennas are completely uncorrelated.

## **Summary:**

### *Exemptions:*

Equipment demonstrating compliance by portable RF exposure exemption have been evaluated, without further testing, for use under either portable or mobile RF exposure configurations. Additional configurations including collocation or simultaneous transmission with other transmitters (including necessary separation distances) are subject to further assessment. Certain exemption criteria may define specific separation distances. It is assumed that the manufacturer shall design the equipment such that these minimum separation distance is met.

### *MPE Calculation Results:*

Equipment demonstrating compliance with MPE calculations have been evaluated, without further testing, for use under mobile RF exposure configurations as identified herein. Additional configurations including collocation or simultaneous transmission with other transmitters (including necessary separation distances) are subject to further assessment. It is assumed that the manufacturer shall design the equipment such that the minimum separation distance of 20cm (or greater, as listed above) is met or that the manufacturer provides a protection guide (e.g. installation instructions) to the end user such that the antenna(s) may be installed in accordance with the manufacturer's instructions in such a manor to maintain the minimum separation distance.

### *General Comments:*

The absorption and distribution of Electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape and physiological condition of the body; the orientation of the body with respect to the fields; and, the electrical properties of the body and the environment. Variables that may play a substantial role in possible biological effects are those that characterize the environment (including but not limited to: ambient temperature, air velocity, relative humidity and body insulation); and those that characterize the individual (including but not limited to: age, gender, activity level and existing debilitation or disease). Because innumerable factors may interact to determine specific biological effects of exposure to electromagnetic fields, any protection guide should consider both intended and unintended operational environments and provide guidance for installation and use of the product such that proper separation distances can be maintained. (ANSI C95.1)

## APPENDIX A - RF Exposure Limits

### United States Compliance Requirements (1.1310):

#### *RF Exposure Evaluation Limits Occupational / Controlled Exposure*

| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> )     | Averaging Time (minutes) |
|-----------------------|-------------------------------|-------------------------------|---|--------------------------|
| 0.3-3.0               | 614                           | 1.63                          | *(100)                                  | 6                        |
| 3.0-30                | 1842 / f <sub>MHz</sub>       | 4.89 / f <sub>MHz</sub>       | *(900 / f <sub>MHz</sub> <sup>2</sup> ) | 6                        |
| 30-300                | 61.4                          | 0.163                         | 1                                       | 6                        |
| 300-1500              | ---                           | ---                           | f <sub>MHz</sub> / 300                  | 6                        |
| 1500-100,000          | ---                           | ---                           | 5.0                                     | 6                        |

#### *RF Exposure Evaluation Limits General Population / Uncontrolled Exposure*

| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> )     | Averaging Time (minutes) |
|-----------------------|-------------------------------|-------------------------------|---|--------------------------|
| 0.3-1.34              | 614                           | 1.63                          | *(100)                                  | 30                       |
| 1.34-30               | 824 / f <sub>MHz</sub>        | 2.19 / f <sub>MHz</sub>       | *(180 / f <sub>MHz</sub> <sup>2</sup> ) | 30                       |
| 30-300                | 27.5                          | 0.073                         | 0.2                                     | 30                       |
| 300-1500              | ---                           | ---                           | f <sub>MHz</sub> / 1500                 | 30                       |
| 1500-100,000          | ---                           | ---                           | 1.0                                     | 30                       |

\* Plane wave equivalent power density

Limit is calculated based on the mid-band frequency used in the operating frequency range.

### Exemption Limits for Stand-Alone SAR Evaluation:

In accordance with KDB 447498 D01

| Max Output Power at Exemption Limit (mW) |  |   |
|--|--|---|
| Frequency (MHz)                          | $d \leq 50\text{mm}$   | $50\text{mm} < d \leq 20\text{cm}$  |
| <100                                     | $\frac{1}{2} \cdot \left( \frac{R \cdot 50}{\sqrt{0.1}} \right) \cdot \left( 1 + \text{LOG} \left( \frac{100}{f_{\text{MHz}}} \right) \right)$ | $\left( \frac{R \cdot 50}{\sqrt{0.1}} + (d - 50) \frac{100}{150} \right) \cdot \left( 1 + \text{LOG} \left( \frac{100}{f_{\text{MHz}}} \right) \right)$ |
| 100-1500                                 | $\left( \frac{R \cdot d}{\sqrt{f_{\text{GHz}}}} \right)$   | $\left( \frac{R \cdot 50}{\sqrt{f_{\text{GHz}}}} + (d - 50) \frac{f_{\text{MHz}}}{150} \right)$   |
| 1500-6000                                |  | $\left( \frac{R \cdot 50}{\sqrt{f_{\text{GHz}}}} + (d - 50) \cdot 10 \right)$   |

R is the allowed ratio: 3 for 1-g SAR and 7.5 for 10-g extremity SAR.

d is distance in mm, rounded to the nearest mm.

**Canadian Compliance Requirements (RSS-102):**

**RF Exposure Evaluation Limits  
Occupational / Controlled Exposure:**

| Frequency Range (MHz) | Electric Field Strength (V/m)          | Magnetic Field Strength (A/m)                         | Power Density (W/m <sup>2</sup> )       | Averaging Time (minutes)                 |
|-----------------------|--|---|---|--|
| 0.003-10              | 170                                    | 180   | --                                      | Instantaneous                            |
| 0.1-10                | --                                     | 1.6 / f <sub>MHz</sub>                                | --                                      | 6  |
| 1.29-10               | 193 / f <sub>MHz</sub> <sup>0.5</sup>  | --  | --                                      | 6  |
| 10-20                 | 61.4                                   | 0.163   | 10                                      | 6  |
| 20-48                 | 129.8 / f <sup>0.5</sup>               | 0.3444 / f <sub>MHz</sub> <sup>0.25</sup>             | 44.72 / f <sub>MHz</sub> <sup>0.5</sup> | 6  |
| 48-100                | 49.33                                  | 0.1309  | 6.455                                   | 6  |
| 100-6000              | 15.60 f <sub>MHz</sub> <sup>0.25</sup> | 0.04138 f <sub>MHz</sub> <sup>0.25</sup>              | 0.6455 f <sub>MHz</sub> <sup>0.5</sup>  | 6  |
| 6000-15000            | 137                                    | 0.364   | 50                                      | 6  |
| 15000-150,000         | 137                                    | 0.364   | 50                                      | 616000 / f <sub>MHz</sub> <sup>1.2</sup> |
| 150,000-300,000       | 0.354 f <sub>MHz</sub> <sup>0.5</sup>  | 9.40x10 <sup>-4</sup> f <sub>MHz</sub> <sup>0.5</sup> | 3.33x10 <sup>-4</sup> f <sub>MHz</sub>  | 616000 / f <sub>MHz</sub> <sup>1.2</sup> |

**RF Exposure Evaluation Limits  
General Population / Uncontrolled Exposure**

| Frequency Range (MHz) | Electric Field Strength (V/m)            | Magnetic Field Strength (A/m)                         | Power Density (W/m <sup>2</sup> )          | Averaging Time (minutes)                 |
|-----------------------|--|---|--|--|
| 0.003-10              | 83                                       | 90  | --   | Instantaneous                            |
| 0.1-10                | --                                       | 0.73 / f  | --   | 6  |
| 1.1-10                | 87 / f <sub>MHz</sub> <sup>0.5</sup>     | --  | --   | 6  |
| 10-20                 | 27.46                                    | 0.0728  | 2  | 6  |
| 20-48                 | 58.07 / f <sub>MHz</sub> <sup>0.25</sup> | 0.1540 / f <sub>MHz</sub> <sup>0.25</sup>             | 8.944 / f <sub>MHz</sub> <sup>0.5</sup>    | 6  |
| 48-300                | 22.06                                    | 0.05852   | 1.291                                      | 6  |
| 300-6000              | 3.142 f <sub>MHz</sub> <sup>0.3417</sup> | 0.008335 f <sub>MHz</sub> <sup>0.3417</sup>           | 0.02619 f <sub>MHz</sub> <sup>0.6834</sup> | 6  |
| 6000-15000            | 61.4                                     | 0.163   | 10   | 6  |
| 15000-150,000         | 61.4                                     | 0.163   | 10   | 616000 / f <sub>MHz</sub> <sup>1.2</sup> |
| 150,000-300,000       | 0.158 f <sub>MHz</sub> <sup>0.5</sup>    | 4.21x10 <sup>-4</sup> f <sub>MHz</sub> <sup>0.5</sup> | 6.67x10 <sup>-5</sup> f <sub>MHz</sub>     | 616000 / f <sub>MHz</sub> <sup>1.2</sup> |




**Exemption Limits for Stand-Alone SAR Evaluation:**

| Exemption Limits (mW) at Separation Distance (mm) |    |     |     |     |     |     |     |     |     |     |
|---|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Freq(MHz)   | ≤5 | 10  | 15  | 20  | 25  | 30  | 35  | 40  | 45  | ≥50 |
| ≤300  | 71 | 101 | 132 | 162 | 193 | 223 | 254 | 284 | 315 | 345 |
| 450   | 52 | 70  | 88  | 106 | 123 | 141 | 159 | 177 | 195 | 213 |
| 835   | 17 | 30  | 42  | 55  | 67  | 80  | 92  | 105 | 117 | 130 |
| 1900  | 7  | 10  | 18  | 34  | 60  | 99  | 153 | 225 | 316 | 431 |
| 2450  | 4  | 7   | 15  | 30  | 52  | 83  | 123 | 173 | 235 | 309 |
| 3500  | 2  | 6   | 16  | 32  | 55  | 86  | 124 | 170 | 225 | 290 |
| 5800  | 1  | 6   | 15  | 27  | 41  | 56  | 71  | 85  | 97  | 106 |

**Exemption Limits for Stand-Alone Mobile Routine Evaluation:**

| Frequency (MHz) | RF Exposure Exemption Limit (mW) |
|-----------------|----------------------------------|
| <20             | 1000                             |
| 20-48           | $4490 / f_{\text{MHz}}^{0.5}$    |
| 48-300          | 600                              |
| 300-6000        | $13.1 f_{\text{MHz}}^{0.6834}$   |
| ≥6000           | 5000                             |

**General<sup>1</sup> Comparison of FCC and IC Exemption Limits for Stand Alone SAR Evaluation**

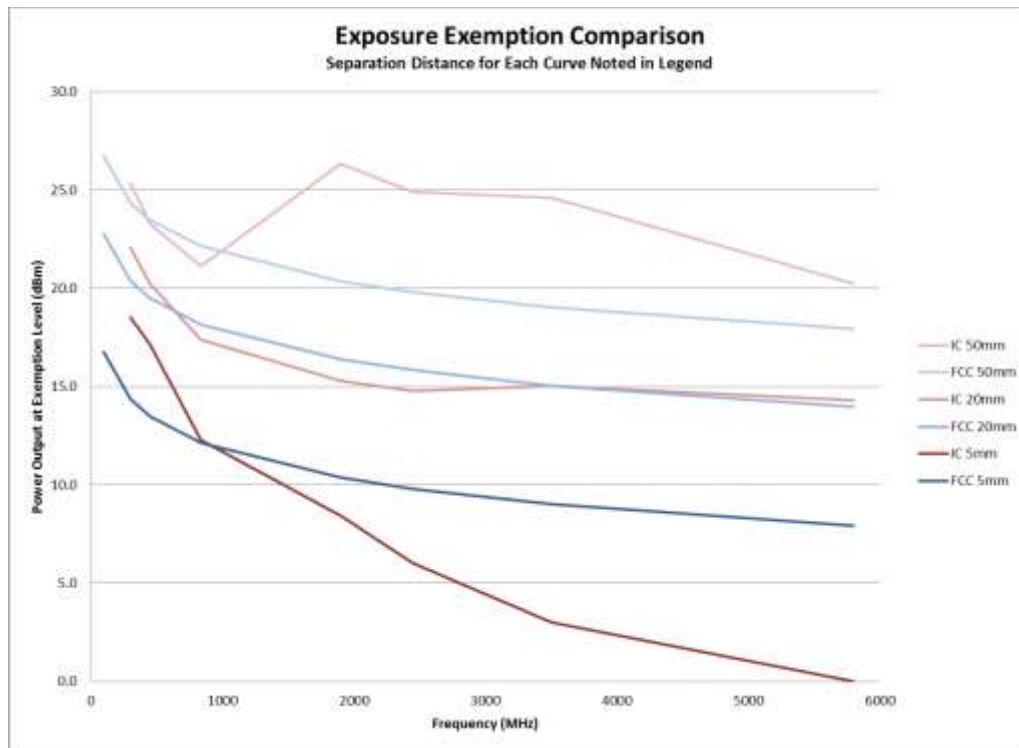

<sup>1</sup> Non-Exhaustive

**Australian Radiation Protection and Nuclear Safety Agency Requirements (ARPANSA):**

**RF Exposure Evaluation Limits  
Occupational / Controlled Exposure:**

| Frequency Range (MHz) | Electric Field Strength (V/m)          | Magnetic Field Strength (A/m)             | Power Density (W/m <sup>2</sup> )    | Averaging Time (minutes)                               |
|-----------------------|--|---|--------------------------------------|--|
| 0.1 – 1.0             | 614                                    | 1.63 / f <sub>MHz</sub>                   | ---                                  | 6  |
| 1.0-10                | 614 / f <sub>MHz</sub>                 | 1.63 / f <sub>MHz</sub>                   | 1000 / f <sub>MHz</sub> <sup>2</sup> | 6  |
| 10-400                | 61.4                                   | 0.163                                     | 10                                   | 6  |
| 400-2000              | 3.07 * f <sub>MHz</sub> <sup>0.5</sup> | 0.00814 * f <sub>MHz</sub> <sup>0.5</sup> | f <sub>MHz</sub> / 40                | 6  |
| 2000-10,000           | 137                                    | 0.36                                      | 50                                   | 6  |
| 10,000 – 300,000      | 137                                    | 0.36                                      | 50                                   | 9.6x10 <sup>4</sup> / f <sub>MHz</sub> <sup>1.05</sup> |

**RF Exposure Evaluation Limits  
General Population / Uncontrolled Exposure**

| Frequency Range (MHz) | Electric Field Strength (V/m)          | Magnetic Field Strength (A/m)             | Power Density (W/m <sup>2</sup> ) | Averaging Time (minutes)                               |
|-----------------------|--|---|-----------------------------------|--|
| 0.10-0.15             | 86.8                                   | 4.86                                      | ---                               | 6  |
| 0.150-1.0             | 86.8                                   | 0.729 / f <sub>MHz</sub>                  | --                                | 6  |
| 1.0-10                | 86.8 / f <sub>MHz</sub> <sup>0.5</sup> | 0.729 / f <sub>MHz</sub>                  | ---                               | 6  |
| 10-400                | 27.4                                   | 0.0729                                    | 2                                 | 6  |
| 400-2000              | 1.37 f <sub>MHz</sub> <sup>0.5</sup>   | 0.00364 * f <sub>MHz</sub> <sup>0.5</sup> | f <sub>MHz</sub> / 200            | 6  |
| 2000-10,000           | 61.4                                   | 0.163                                     | 10                                | 6  |
| 10,000 – 300,000      | 61.4                                   | 0.163                                     | 10                                | 9.6x10 <sup>4</sup> / f <sub>MHz</sub> <sup>1.05</sup> |

\*Power density limit applicable >100MHz

**Exemption Limits for Stand-Alone Evaluation:**

Occupational Exposure: 100mW

Portable - General Public: 20mW

Mobile – General Public: Separation distance >20cm and power < ARPANSA RPS3 Table S2

Or according to ARPANSA RPS3 Table S1

**Table S2**

| Operating Frequency (MHz) | Nominal Mean Power Output (W) |
|---------------------------|-------------------------------|
| 0.1-450                   | 7                             |
| 450-2500                  | 3150 / f <sub>MHz</sub>       |

**European Union Compliance Requirements (ICNIRP):**

***RF Exposure Evaluation Limits  
Occupational / Controlled Exposure:***

| Frequency Range (MHz) | Electric Field Strength (V/m)         | Magnetic Field Strength (A/m)           | Power Density (W/m <sup>2</sup> ) | Averaging Time (minutes) |
|-----------------------|---------------------------------------|---|-----------------------------------|--------------------------|
| 0.00082-0.065         | 610                                   | 24.4                                    | ---                               | 6                        |
| 0.065-1.0             | 610                                   | 1.6/f                                   | ---                               | 6                        |
| 1.0-10                | 610 / f <sub>MHz</sub>                | 1.6/f                                   | ---                               | 6                        |
| 10-400                | 61                                    | 0.16                                    | 10                                | 6                        |
| 400-2000              | 3.0 * f <sub>MHz</sub> <sup>0.5</sup> | 0.008 * f <sub>MHz</sub> <sup>0.5</sup> | f <sub>MHz</sub> / 40             | 6                        |
| 2000-300,000          | 137                                   | 0.36                                    | 50                                | 6                        |

***RF Exposure Evaluation Limits  
General Population / Uncontrolled Exposure***

| Frequency Range (MHz) | Electric Field Strength (V/m)         | Magnetic Field Strength (A/m)           | Power Density (W/m <sup>2</sup> ) | Averaging Time (minutes) |
|-----------------------|---------------------------------------|---|-----------------------------------|--------------------------|
| 0.003-0.150           | 87                                    | 5.0                                     | ---                               | 6                        |
| 0.150-1.0             | 87                                    | 0.73 / f <sub>MHz</sub>                 | --                                | 6                        |
| 1.0-10                | 87 / f <sub>MHz</sub> <sup>0.5</sup>  | 0.73 / f <sub>MHz</sub>                 | ---                               | 6                        |
| 10-400                | 28                                    | 0.073                                   | 2                                 | 6                        |
| 400-2000              | 1.375 f <sub>MHz</sub> <sup>0.5</sup> | 0.0037* f <sub>MHz</sub> <sup>0.5</sup> | f <sub>MHz</sub> / 200            | 6                        |
| 2000-300,000          | 61                                    | 0.16                                    | 10                                | 6                        |

*\*Power density limit applicable >100MHz*

**Exemption Limits<sup>2</sup> for Stand-Alone SAR Evaluation:**

Head / Body: 20mW

Extremity: 40mW

<sup>2</sup> EN 62479 Annex A, General Public

## Appendix B - References

1. ACMA Radiocommunications (Electromagnetic Radio – Human Exposure) Standard, 2014.
2. AS/NZS 2772.2, Radiofrequency fields – Principles and method of measurement and computation – 3 kHz to 300 GHz, 2011.
3. Australian Radiation Protection and Nuclear Safety Agency, ARPANSA RPS 3, Maximum Exposure Levels to Radiofrequency Fields 3 kHz to 300 GHz, 2002 (&Errata, 2003).
4. New Zealand Standard, NZS 2772.1, Radiofrequency Fields Part 1: Maximum Exposure Levels 3 kHz to 300 GHz, 2009.
5. Federal Communications Commission Knowledge Database (KDB) Publication 447498, “What are the RF exposure requirements and procedures for mobile and portable devices?” As in effect on the issue date of this report.
6. Title 47 Code of Federal Regulations, Part 1.1310, “Radiofrequency radiation exposure limits.” As in effect on the issue date of this report.
7. Title 47 Code of Federal Regulations, Part 2.1091, “Radiofrequency radiation exposure evaluation: mobile devices.” As in effect on the issue date of this report.
8. ANSI C95.1 (2005) IEEE Standard for Safety Level with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz, 2005.
9. Health Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3 kHz to 300 GHz, 2015.
10. Industry Canada GL-01 Guidelines for the Measurement of Radio Frequency Fields at Frequencies From 3 kHz to 300 GHz, Issue 3, March 2015.
11. Industry Canada RSS-102 Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
12. EC Council Recommendation 1999/519/EC “On the limitation of exposure of the general public to electromagnetic fields (0Hz to 300GHz),” (1999).
13. European Committee for Electrotechnical Standardization. European Normative, EN 62311 Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz to 300 GHz), 2008.
14. European Committee for Electrotechnical Standardization. European Normative, EN 62479 Assessment of the compliance of low power electronic and electrical equipment with the basic restrictions related to human exposure to electromagnetic fields (10 MHz to 300 GHz), 2010.
15. International Commission on Non-Ionizing Radiation Protection. Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). Health Physics 74 (4): 494-522; 1998.
16. International Commission on Non-Ionizing Radiation Protection Statement on the "Guidelines for limiting exposure to time-varying electric, magnetic and electromagnetic fields (up to 300 GHz). Health Physics 97(3):257-259, 2009.