



DFS PORTION of FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

GEN7 AP

MODEL NUMBER: G7RL10S

FCC ID: RHK-G7RL10

REPORT NUMBER: 12049298-E1V1

ISSUE DATE: JANUARY 8, 2018

Prepared for
DIGITAL PATH, INC.
1065 MARAUDER STREET
CHICO, CA 95973
U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-------------------|------------------|-------------------|
| V1 | 1/8/2018 | Initial Issue | Henry Lau |

TABLE OF CONTENTS

| | |
|---|------------|
| 1. ATTESTATION OF TEST RESULTS | 5 |
| 2. TEST METHODOLOGY | 6 |
| 3. REFERENCE DOCUMENTS | 6 |
| 4. FACILITIES AND ACCREDITATION | 6 |
| 5. CALIBRATION AND UNCERTAINTY | 6 |
| 5.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | <i>6</i> |
| 5.2. <i>MEASUREMENT UNCERTAINTY</i> | <i>6</i> |
| 6. DYNAMIC FREQUENCY SELECTION..... | 7 |
| 6.1. <i>OVERVIEW</i> | <i>7</i> |
| 6.1.1. <i>LIMITS</i> | <i>7</i> |
| 6.1.2. <i>TEST AND MEASUREMENT SYSTEM</i> | <i>11</i> |
| 6.1.3. <i>TEST AND MEASUREMENT SOFTWARE</i> | <i>13</i> |
| 6.1.4. <i>TEST ROOM ENVIRONMENT</i> | <i>13</i> |
| 6.1.5. <i>SETUP OF EUT.....</i> | <i>14</i> |
| 6.1.6. <i>DESCRIPTION OF EUT</i> | <i>16</i> |
| 6.2. <i>MASTER DEVICE RESULTS FOR 20 MHz BANDWIDTH</i> | <i>18</i> |
| 6.2.1. <i>TEST CHANNEL</i> | <i>18</i> |
| 6.2.2. <i>RADAR WAVEFORMS AND TRAFFIC.....</i> | <i>18</i> |
| 6.2.3. <i>CHANNEL AVAILABILITY CHECK TIME.....</i> | <i>27</i> |
| 6.2.4. <i>OVERLAPPING CHANNEL TESTS.....</i> | <i>32</i> |
| 6.2.5. <i>MOVE AND CLOSING TIME</i> | <i>32</i> |
| 6.2.6. <i>DETECTION BANDWIDTH.....</i> | <i>37</i> |
| 6.2.7. <i>IN-SERVICE MONITORING</i> | <i>39</i> |
| 6.3. <i>MASTER DEVICE RESULTS FOR 40 MHz BANDWIDTH</i> | <i>46</i> |
| 6.3.1. <i>TEST CHANNEL</i> | <i>46</i> |
| 6.3.2. <i>RADAR WAVEFORMS AND TRAFFIC.....</i> | <i>46</i> |
| 6.3.3. <i>CHANNEL AVAILABILITY CHECK TIME.....</i> | <i>55</i> |
| 6.3.1. <i>OVERLAPPING CHANNEL TESTS.....</i> | <i>60</i> |
| 6.3.2. <i>MOVE AND CLOSING TIME</i> | <i>60</i> |
| 6.3.3. <i>DETECTION BANDWIDTH.....</i> | <i>65</i> |
| 6.3.4. <i>IN-SERVICE MONITORING</i> | <i>67</i> |
| 6.4. <i>MASTER DEVICE RESULTS FOR 80 MHz BANDWIDTH</i> | <i>74</i> |
| 6.4.1. <i>TEST CHANNEL</i> | <i>74</i> |
| 6.4.2. <i>RADAR WAVEFORMS AND TRAFFIC.....</i> | <i>74</i> |
| 6.4.1. <i>CHANNEL AVAILABILITY CHECK TIME.....</i> | <i>83</i> |
| 6.4.2. <i>OVERLAPPING CHANNEL TESTS.....</i> | <i>88</i> |
| 6.4.3. <i>MOVE AND CLOSING TIME</i> | <i>88</i> |
| 6.4.1. <i>NON-OCCUPANCY PERIOD</i> | <i>93</i> |
| 6.4.2. <i>DETECTION BANDWIDTH.....</i> | <i>94</i> |
| 6.4.3. <i>IN-SERVICE MONITORING</i> | <i>96</i> |
| 6.5. <i>APPLICABLE TESTS FOR SLAVE DEVICE CONFIGURATION.....</i> | <i>104</i> |
| 6.5.1. <i>APPLICABILITY OF MASTER DEVICE CONFIGURATION TEST RESULTS ...</i> | <i>104</i> |

- 6.5.2. ADDITIONAL APPLICABLE TESTS OF SLAVE DEVICE 104
- 6.6. SLAVE DEVICE CONFIGURATION RESULTS FOR 20 MHz BANDWIDTH 105
 - 6.6.1. TEST CHANNEL 105
 - 6.6.2. RADAR WAVEFORM AND TRAFFIC 105
 - 6.6.3. MOVE AND CLOSING TIME OF SLAVE DEVICE IN RESPONSE TO
DETECTION BY MASTER DEVICE 110
 - 6.6.4. MOVE AND CLOSING TIME OF MASTER DEVICE IN RESPONSE TO
DETECTION BY SLAVE DEVICE 114
- 6.7. SLAVE DEVICE CONFIGURATION RESULTS FOR 40 MHz BANDWIDTH 118
 - 6.7.1. TEST CHANNEL 118
 - 6.7.2. RADAR WAVEFORM AND TRAFFIC 118
 - 6.7.3. MOVE AND CLOSING TIME OF SLAVE DEVICE IN RESPONSE TO
DETECTION BY MASTER DEVICE 123
 - 6.7.4. MOVE AND CLOSING TIME OF MASTER DEVICE IN RESPONSE TO
DETECTION BY SLAVE DEVICE 127
- 6.8. SLAVE DEVICE CONFIGURATION RESULTS FOR 80 MHz BANDWIDTH 131
 - 6.8.1. TEST CHANNEL 131
 - 6.8.2. RADAR WAVEFORM AND TRAFFIC 131
 - 6.8.3. MOVE AND CLOSING TIME OF SLAVE DEVICE IN RESPONSE TO
DETECTION BY MASTER DEVICE 136
 - 6.8.4. 30-MINUTE NON-OCCUPANCY PERIOD OF SLAVE IN RESPONSE TO
DETECTION BY MASTER DEVICE 140
 - 6.8.5. MOVE AND CLOSING TIME OF MASTER DEVICE IN RESPONSE TO
DETECTION BY SLAVE DEVICE 141
 - 6.8.6. NON-OCCUPANCY PERIOD OF MASTER DEVICE IN RESPONSE TO
DETECTION BY SLAVE DEVICE 145
- 6.9. BRIDGE MODE RESULTS 146
- 7. SETUP PHOTOS 147**
 - 7.1. MASTER DEVICE TESTING 147
 - 7.2. STANDARD SLAVE DEVICE TESTING 149
 - 7.3. SLAVE DEVICE WITH RADAR DETECTION TESTING 151
 - 7.3.1. SLAVE DEVICE BEING SUBJECTED TO RADAR 151
 - 7.3.2. MASTER DEVICE IN RESPONSE TO DETECTION BY THE SLAVE DEVICE . 153

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: DIGITAL PATH, INC.
1065 MARAUDER STREET
CHICO, CA 95973, U.S.A.

EUT DESCRIPTION: GEN7 AP

MODEL: G7RL10S

SERIAL NUMBER: 04:F0:21:37:E1:98 (MASTER) and
04:F0:21:36:8a:66 (SLAVE)

DATE TESTED: DECEMBER 04 to 05, 2017

| APPLICABLE STANDARDS | |
|---|--------------|
| STANDARD | TEST RESULTS |
| DFS Portion of CFR 47 Part 15 Subpart E | Complies |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:



HENRY LAU
LABORATORY ENGINEER
UL Verification Services Inc.

DOUG ANDERSON
EMC ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the DFS portion of FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033, KDB 905462 D02 and D03.

3. REFERENCE DOCUMENTS

Measurements of transmitter parameters as referenced in this report are documented in report number 100331-24 from testing performed at CKC Laboratories, 5046 Sierra Pines Drive, Mariposa, CA 95338

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services, Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty level has been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|-----------|---------------|
| Time | $\pm 0.02 \%$ |

The Uncertainty figure is valid to a confidence level of 95%.

6. DYNAMIC FREQUENCY SELECTION

6.1. OVERVIEW

6.1.1. LIMITS

FCC

§15.407 (h), FCC KDB 905462 D02 “COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION” and KDB 905462 D03 “U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY”.

Table 1: Applicability of DFS requirements prior to use of a channel

| Requirement | Operational Mode | | |
|---------------------------------|------------------|----------------------------------|-------------------------------|
| | Master | Client (without radar detection) | Client (with radar detection) |
| Non-Occupancy Period | Yes | Not required | Yes |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Availability Check Time | Yes | Not required | Not required |
| U-NII Detection Bandwidth | Yes | Not required | Yes |

Table 2: Applicability of DFS requirements during normal operation

| Requirement | Operational Mode | | |
|-----------------------------------|------------------|----------------------|-------------------|
| | Master | Client (without DFS) | Client (with DFS) |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Closing Transmission Time | Yes | Yes | Yes |
| Channel Move Time | Yes | Yes | Yes |
| U-NII Detection Bandwidth | Yes | Not required | Yes |

| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar DFS | Client (without DFS) |
|--|--|--|
| <i>U-NII Detection Bandwidth and Statistical Performance Check</i> | All BW modes must be tested | Not required |
| <i>Channel Move Time and Channel Closing Transmission Time</i> | Test using widest BW mode available | Test using the widest BW mode available for the link |
| <i>All other tests</i> | Any single BW mode | Not required |
| Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequency between the bonded 20 MHz channel blocks. | | |

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

| | |
|---|----------------------|
| Maximum Transmit Power | Value (see notes) |
| E.I.R.P. \geq 200 mill watt | -64 dBm |
| E.I.R.P. < 200 mill watt and power spectral density < 10 dBm/MHz | -62 dBm |
| E.I.R.P. < 200 mill watt that do not meet power spectral density requirement | -64 dBm |
| <p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note 3: E.I.R.P. is based on the highest antenna gain. For MIMO devices refer to KDB publication 662911 D01.</p> | |

Table 4: DFS Response requirement values

| Parameter | Value |
|--|--|
| <i>Non-occupancy period</i> | 30 minutes |
| <i>Channel Availability Check Time</i> | 60 seconds |
| <i>Channel Move Time</i> | 10 seconds (See Note 1) |
| <i>Channel Closing Transmission Time</i> | 200 milliseconds + approx. 60 milliseconds over remaining 10 second period. (See Notes 1 and 2) |
| <i>U-NII Detection Bandwidth</i> | Minimum 100% of the U-NII 99% transmission power bandwidth. (See Note 3) |
| <p>Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p>Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> | |

Table 5 – Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (usec) | PRI (usec) | Pulses | Minimum Percentage of Successful Detection | Minimum Trials |
|---|--------------------|---|---|--|----------------|
| 0 | 1 | 1428 | 18 | See Note 1 | See Note 1 |
| 1 | 1 | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in table 5a | Roundup: $\{(1/360) \times (19 \times 10^6 \text{ PRI}_{\text{usec}})\}$ | 60% | 30 |
| | | Test B: 15 unique PRI values randomly selected within the range of 518-3066 usec. With a minimum increment of 1 usec, excluding PRI values selected in Test A | | | |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |
| Note 1: Short Pulse Radar Type 0 should be used for the <i>Detection Bandwidth</i> test, <i>Channel Move Time</i> , and <i>Channel Closing Time</i> tests. | | | | | |

Table 6 – Long Pulse Radar Test Signal


| Radar Waveform Type | Pulse Width (µsec) | Chirp Width (MHz) | PRI (µsec) | Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Trials |
|---------------------|--------------------|-------------------|------------|------------------|------------------|--|----------------|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

Table 7 – Frequency Hopping Radar Test Signal

| Radar Waveform Type | Pulse Width (µsec) | PRI (µsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Trials |
|---------------------|--------------------|------------|----------------|--------------------|--------------------------------|--|----------------|
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 |

6.1.2. TEST AND MEASUREMENT SYSTEM

RADIATED METHOD SYSTEM BLOCK DIAGRAM

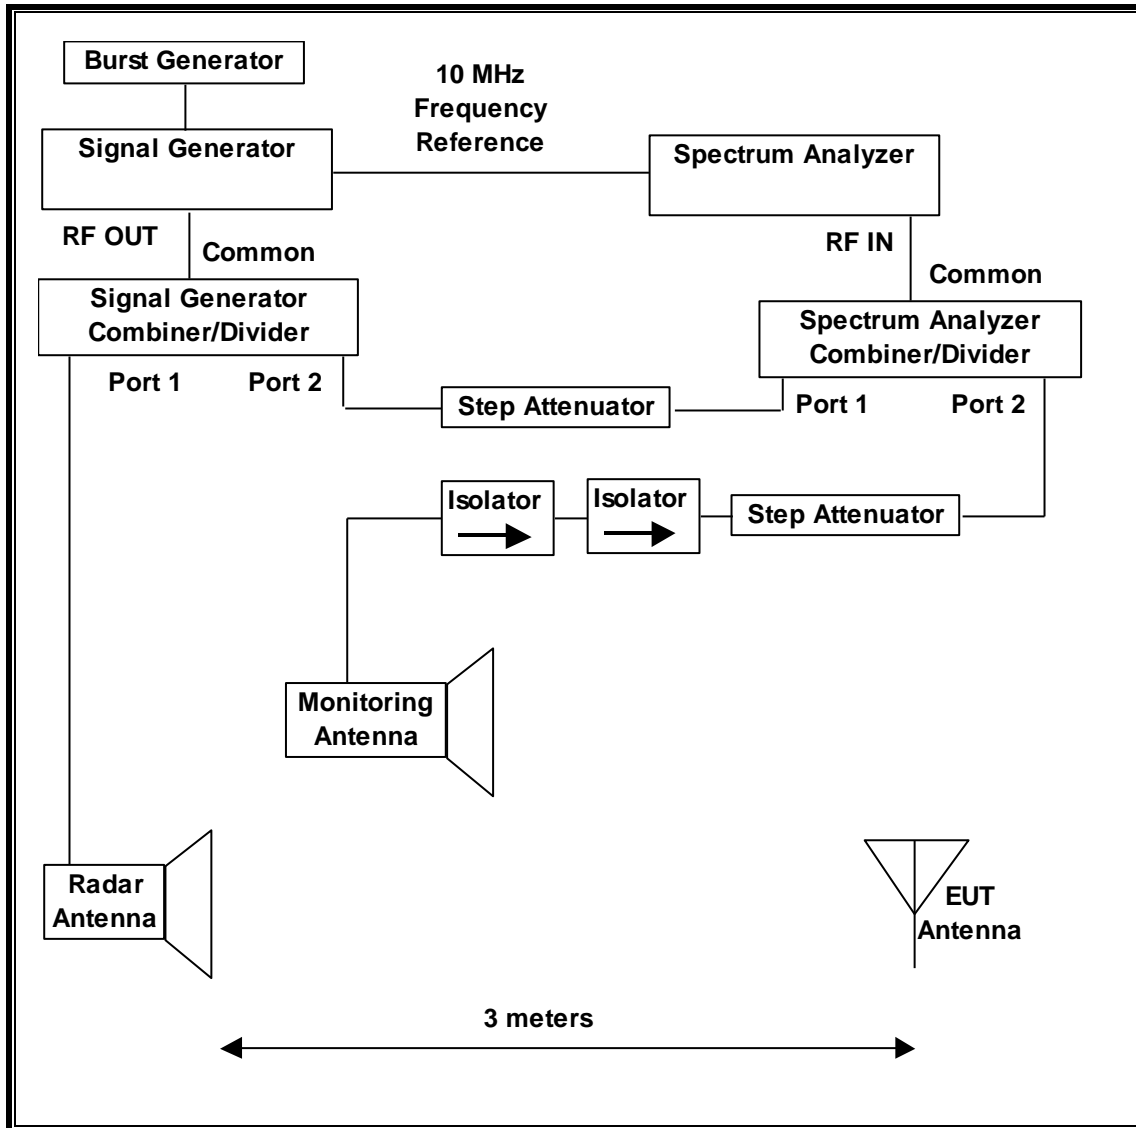

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 1, 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of KDB 905462 D02. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Streaming WLAN traffic from the Master to the Slave is initiated. The monitoring antenna is oriented to monitor the device under test and isolate the support device so that the activity from the support device does not appear in the sweep. A step attenuator is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

| TEST EQUIPMENT LIST | | | | |
|--|--------------|--------|---------------|----------|
| Description | Manufacturer | Model | Serial Number | Cal Due |
| Spectrum Analyzer, PXA, 3Hz to 44GHz | Keysight | N9030A | US51350187 | 06/22/18 |
| Signal Generator, MXG X-Series RF Vector | Agilent | N5182B | MY51350337 | 04/21/18 |
| Arbitrary Waveform Generator | Agilent / HP | 33220A | MY44037572 | 04/06/18 |

6.1.3. TEST AND MEASUREMENT SOFTWARE

The following test and measurement software was utilized for the tests documented in this report:

| TEST SOFTWARE LIST | | |
|----------------------------------|---------|--|
| Name | Version | Test / Function |
| Aggregate Time-PXA | 3.0 | Channel Loading and Aggregate Closing Time |
| FCC 2006 Detection Bandwidth-PXA | 3.0 | Detection Bandwidth in 1 MHz Steps |
| FCC 2014 Detection Bandwidth-PXA | 3.0 | Detection Bandwidth in 5 MHz Steps |
| In Service Monitoring-PXA | 3.0 | In-Service Monitoring (Probability of Detection) |
| PXA Read | 3.0.0.9 | Signal Generator Screen Capture |
| SGXProject.exe | 1.7 | Radar Waveform Generation and Download |

6.1.4. TEST ROOM ENVIRONMENT


The test room temperature and humidity shall be maintained within normal temperature of 15~35 °C and normal humidity 20~75% (relative humidity).

ENVIRONMENT CONDITION

| Parameter | Value |
|-------------|------------------|
| Temperature | 25.6 and 25.3 °C |
| Humidity | 21 and 24 % |

6.1.5. SETUP OF EUT

RADIATED METHOD EUT TEST SETUP

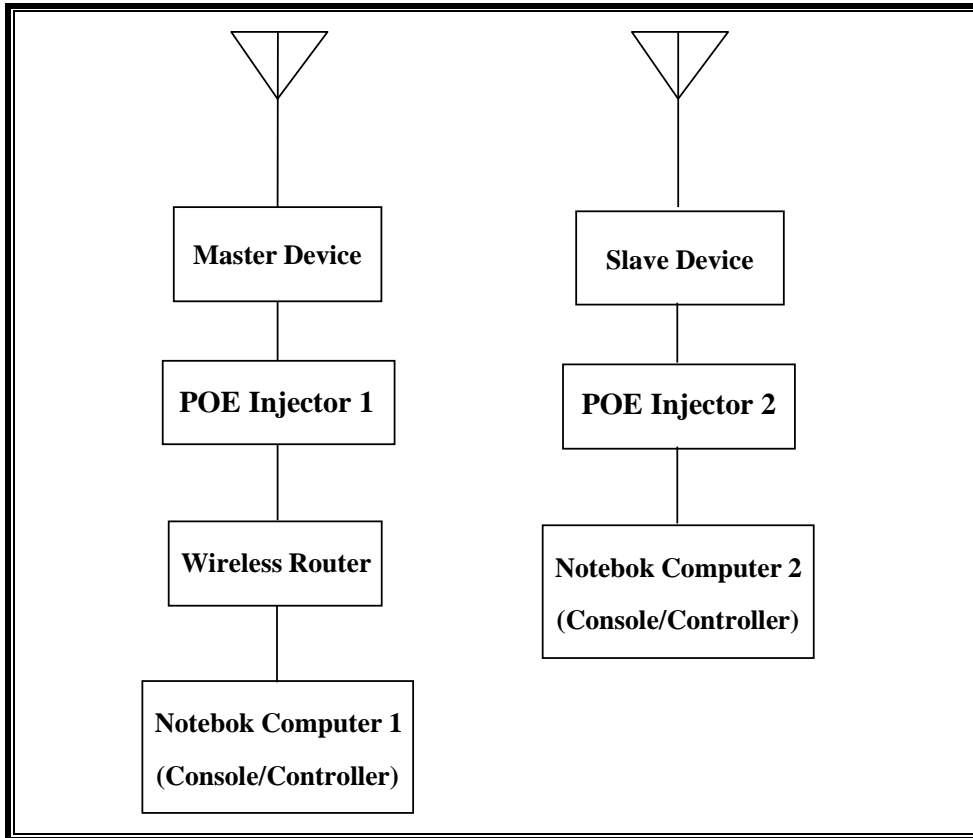

SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

| PERIPHERAL SUPPORT EQUIPMENT LIST | | | | |
|---|--|----------------------|----------------------|---------------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Gen7 AP (Master Device) | Digital Path | G7RL10S | 04:F0:21:37:E1:98 | RHK-G7RL10 |
| P.O.E. Injector 1 (Master) | Ubiquity Networks | GP-C500-120G | 1724-0001476 | DoC |
| Notebook PC 1 (Master Console/Controller) | HP | ProBook 450 G3 | 5CD6386620 | DoC |
| AC Adapter (Master Console PC) | Chicony Power Technology | PPP009C | F200001550001125 | DoC |
| Gen7 AP (Slave Device) | Digital Path | G7RL10S | 04:F0:21:36:8a:66 | RHK-G7RL10 |
| P.O.E. Injector 2 (Slave) | Foshan Shunde Great Power Supply Co., Ltd. | GRT-560110A | 1709032784 | Doc |
| Notebook PC 2 (Slave Console/Controller) | HP | HP 250 G6 | CND7303KR2 | Doc |
| AC Adapter (Slave Console PC) | Lite On Technology | HSTNN-LA40 | WFTLC0A7Y86YRA | Doc |
| Wireless Dual Band Router (Hardwired Ethernet Use Only) | TPLink | TL-WDR3600 | 12C70602246 | Doc |
| AC Adapter (Router) | Shenzen Honor Eletric co. | ADS-25E-12 12018EPCU | H161501E008995 | Doc |

6.1.6. DESCRIPTION OF EUT

The EUT operates over the 5470-5725 MHz ranges.

The EUT can be configured as a Master Device or a Slave Device without Radar Detection.

The highest power level within these bands is 29.96 dBm EIRP in the 5470-5725 MHz band.

The EUT supports from as few as one antenna to an array of up to as many as six antennas. The highest gain antenna assembly utilized with the EUT has a gain of 17.5 dBi in the 5 GHz band. The lowest gain antenna assembly utilized with the EUT has a gain of 9 dBi in the 5 GHz band.

Up to six antennas are utilized to meet the diversity and MIMO operational requirements.

The rated output power of the Master unit is $> 23\text{dBm}$ (EIRP). Therefore the required interference threshold level is -64 dBm . After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63\text{ dBm}$.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm . The tested level is lower than the required level hence it provides a margin to the limit.

The EUT uses four transmitter/receiver chains, each connected to an antenna to perform radiated tests.

The Slave device associated with the EUT during these tests has radar detection capability.

WLAN traffic that meets or exceeds the minimum required loading was generated by transferring a data stream from the Master Device to the Slave Device using iPerf version 2.0.5 software package.

TPC is required since the maximum EIRP is greater than 500 mW (27 dBm).

The EUT utilizes the 802.11ac architecture. Three nominal channel bandwidths are implemented: 20 MHz, 40 MHz and 80 MHz.

The software installed in the Master and Slave devices is QSDK5.

UNIFORM CHANNEL SPREADING

This function is not required per KDB 905462 and is not applicable to Slave Devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is a Digital Path Access Point, FCC ID: RHK-G7RL10 . The minimum antenna gain for the Master Device is 9 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides a margin to the limit.


6.2. MASTER DEVICE RESULTS FOR 20 MHz BANDWIDTH


6.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.


6.2.2. RADAR WAVEFORMS AND TRAFFIC


RADAR WAVEFORMS

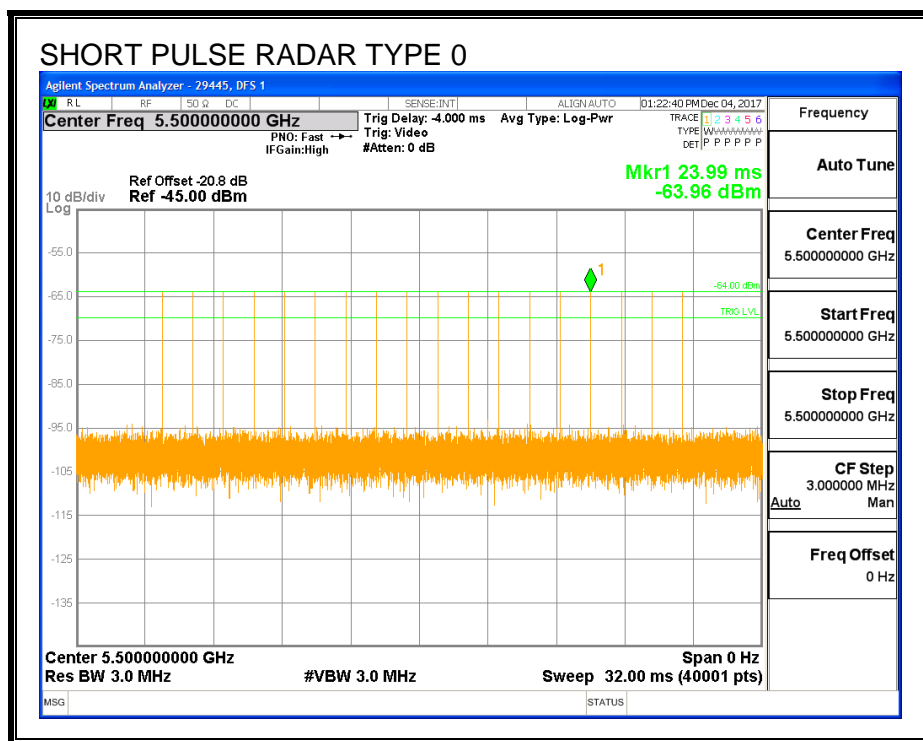


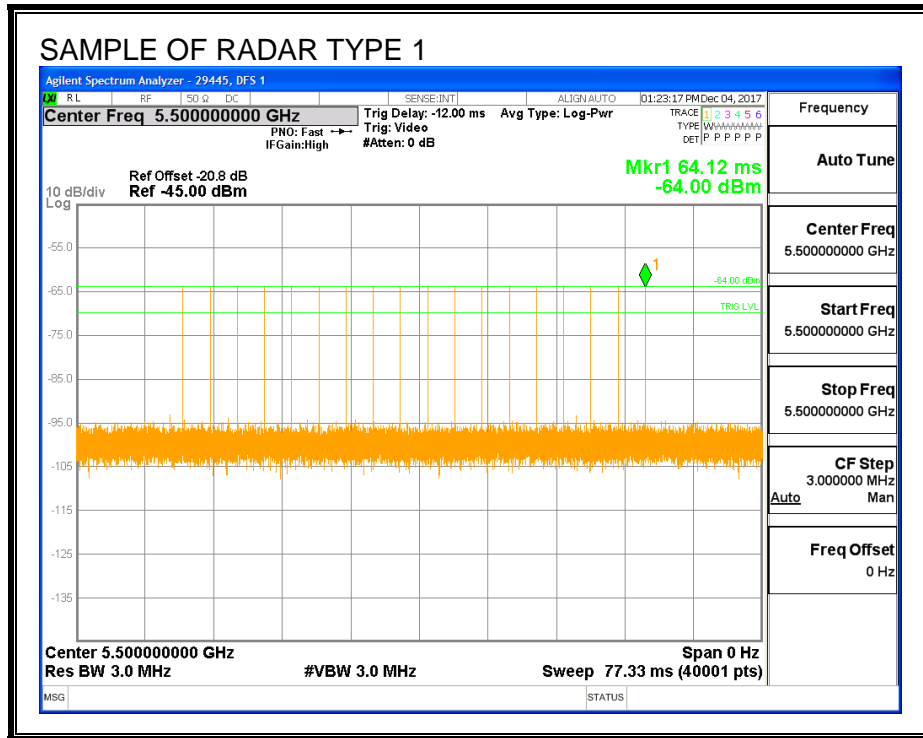


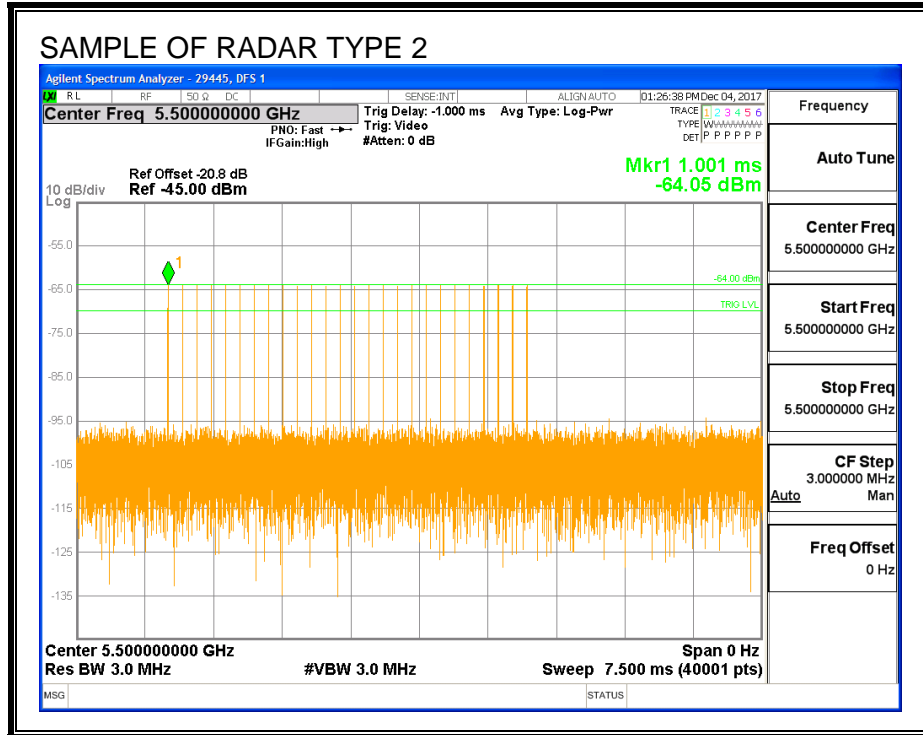

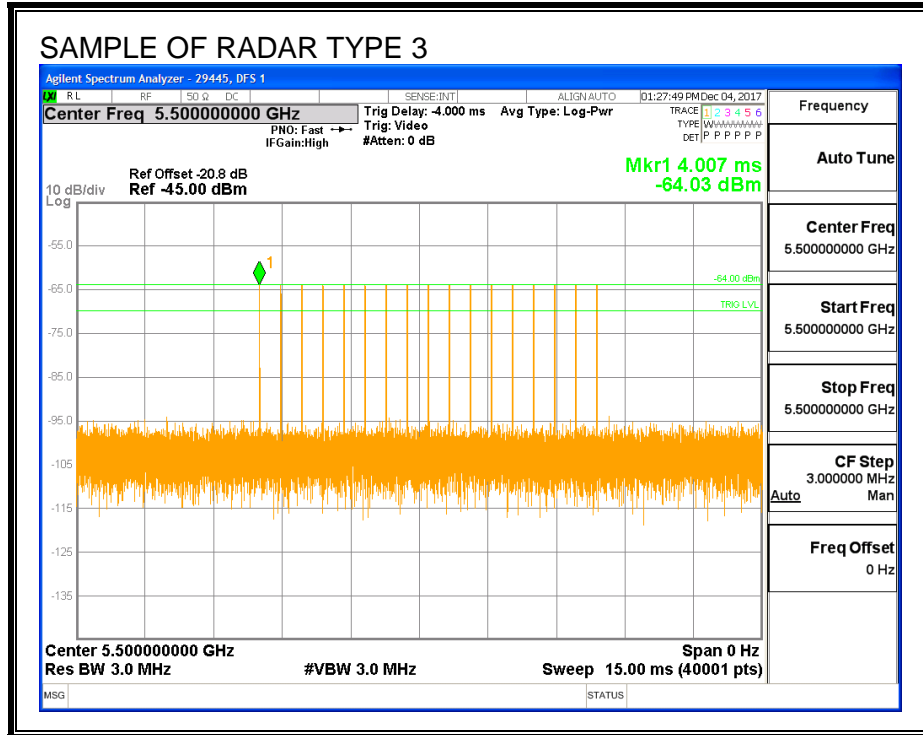


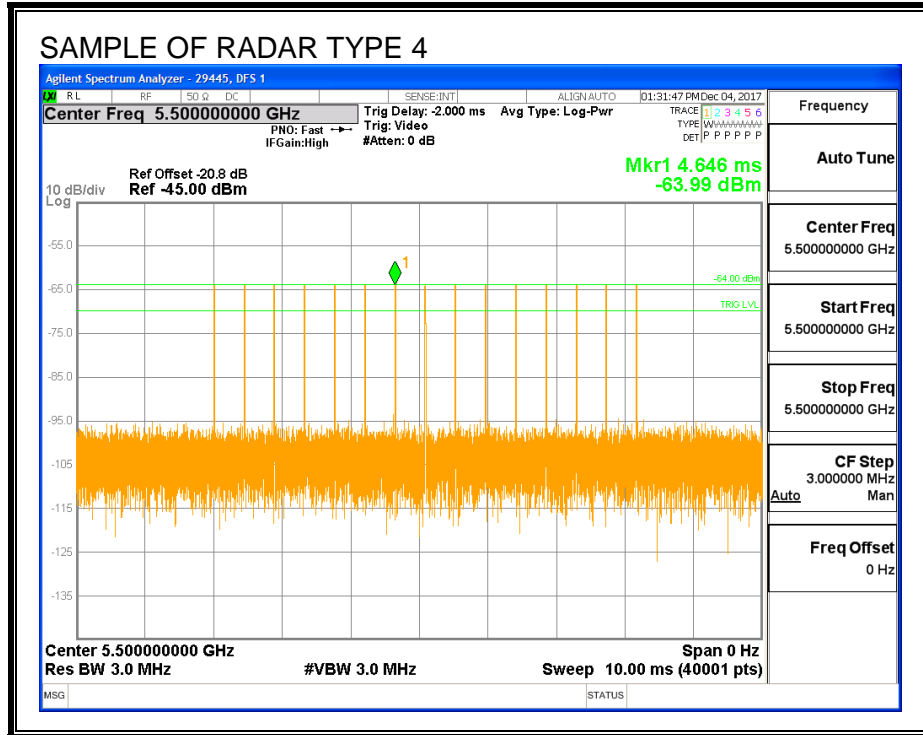

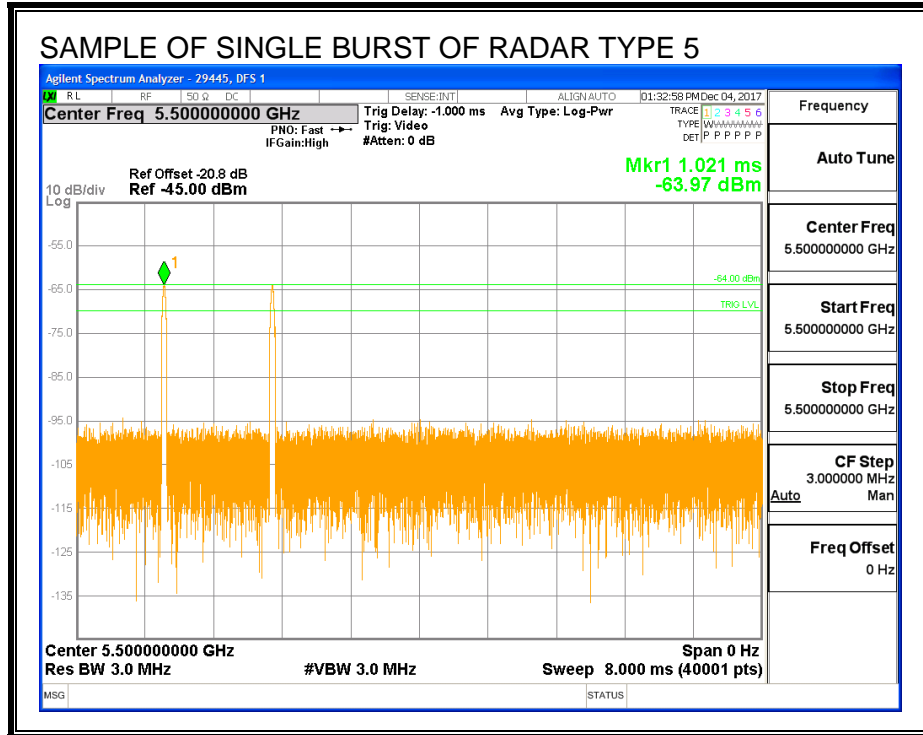


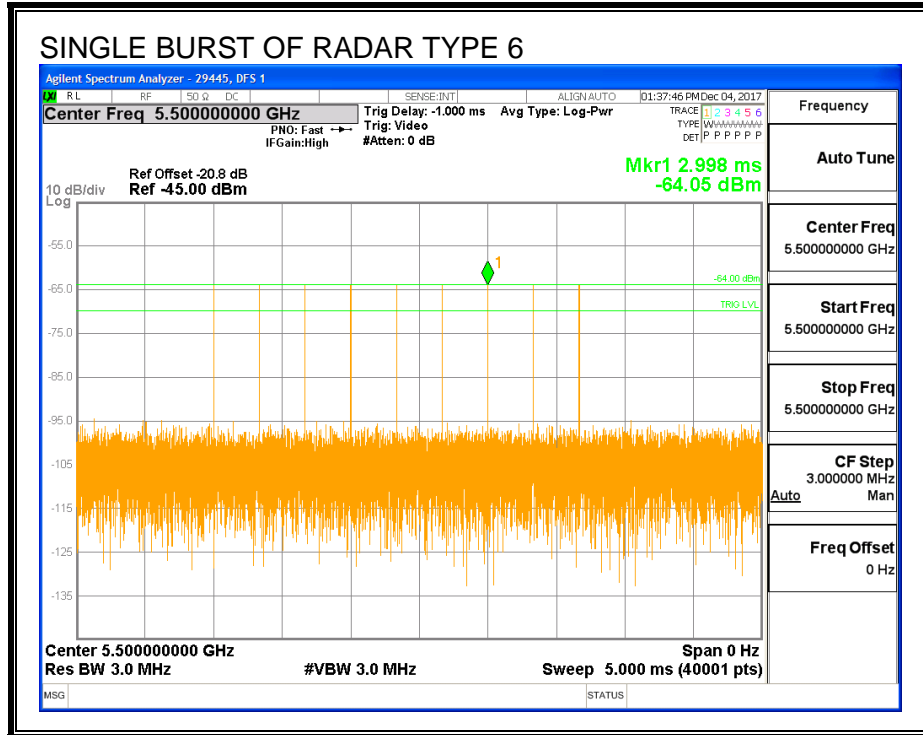

TRAFFIC

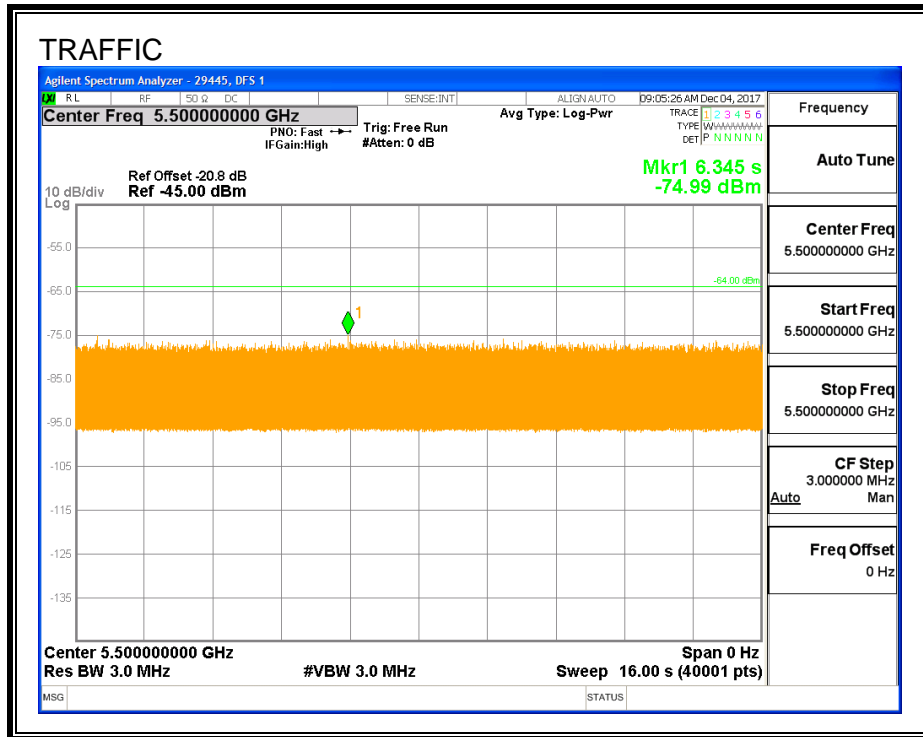

CHANNEL LOADING

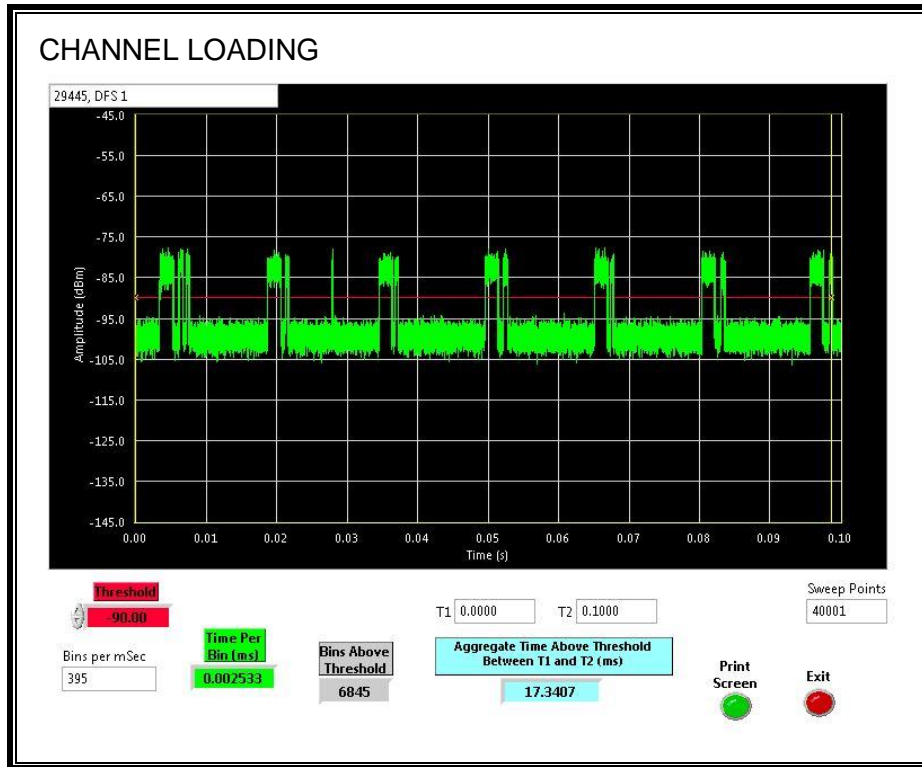

The level of traffic loading on the channel by the EUT is 17.34%.

6.2.3. CHANNEL AVAILABILITY CHECK TIME

PROCEDURE TO DETERMINE INITIAL POWER-UP CYCLE TIME

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

PROCEDURE FOR TIMING OF RADAR BURST

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

QUANTITATIVE RESULTS

No Radar Triggered

| Timing of Reboot (sec) | Timing of Start of Traffic (sec) | Total Power-up Cycle Time (sec) | Initial Power-up Cycle Time (sec) |
|------------------------|----------------------------------|---------------------------------|-----------------------------------|
| 29.92 | 158.9 | 129.0 | 69.0 |

Radar Near Beginning of CAC

| Timing of Reboot (sec) | Timing of Radar Burst (sec) | Radar Relative to Reboot (sec) | Radar Relative to Start of CAC (sec) |
|------------------------|-----------------------------|--------------------------------|--------------------------------------|
| 31.02 | 103.4 | 72.4 | 3.4 |

Radar Near End of CAC

| Timing of Reboot (sec) | Timing of Radar Burst (sec) | Radar Relative to Reboot (sec) | Radar Relative to Start of CAC (sec) |
|------------------------|-----------------------------|--------------------------------|--------------------------------------|
| 29.88 | 156.3 | 126.4 | 57.4 |

QUALITATIVE RESULTS


| Timing of Radar Burst | Display on Control Computer | Spectrum Analyzer Display |
|-------------------------------|------------------------------|---|
| No Radar Triggered | EUT marks Channel as active | Transmissions begin on channel after completion of the initial power-up cycle and the CAC |
| Within 0 to 6 second window | EUT indicates radar detected | No transmissions on channel |
| Within 54 to 60 second window | EUT indicates radar detected | No transmissions on channel |

TIMING WITHOUT RADAR DURING CAC

AP is rebooted
 Traffic ceases
 Start of Initial Power-up cycle

End of Initial Power-up cycle
 Start of CAC

End of CAC
 Traffic is Initiated

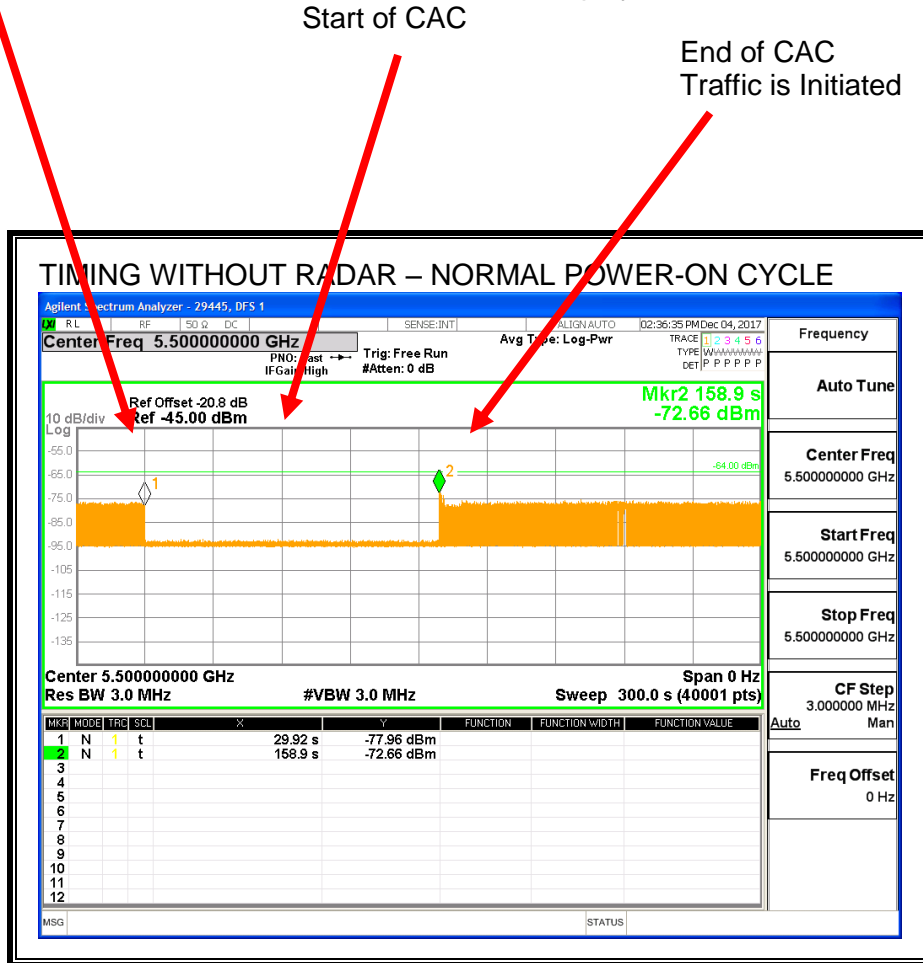


Transmissions begin on channel after completion of the initial power-up cycle and the CAC.

TIMING WITH RADAR NEAR BEGINNING OF CAC

AP is rebooted
 Traffic ceases
 Start of Initial Power-up cycle

End of Initial Power-up cycle
 Start of CAC

Radar Signal Applied

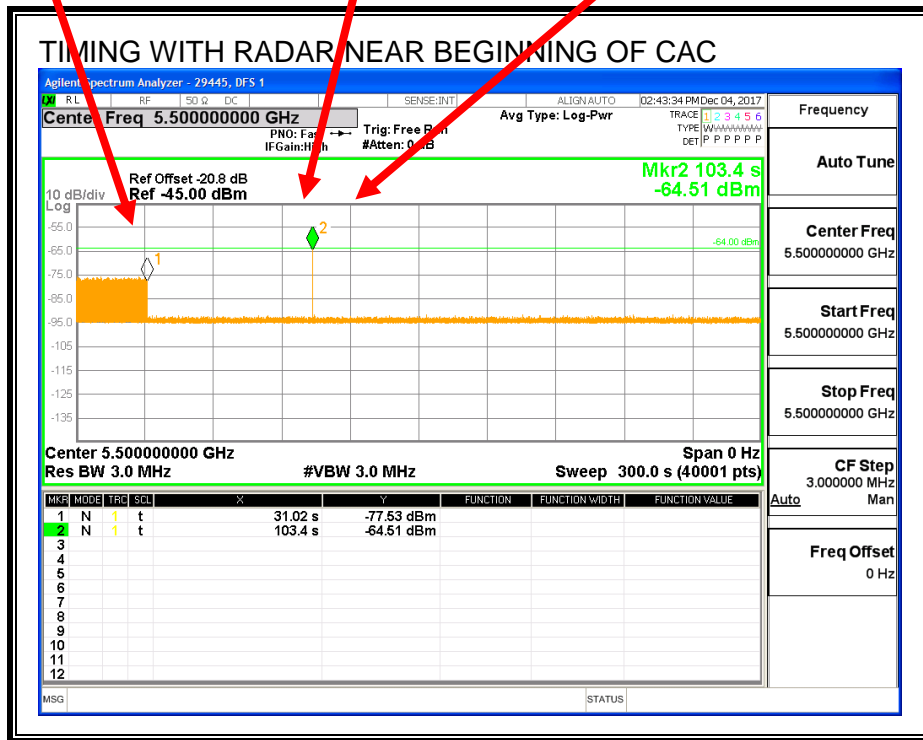


No EUT transmissions were observed after the radar signal.

TIMING WITH RADAR NEAR END OF CAC

AP is rebooted
 Traffic ceases
 Start of Initial Power-up cycle

End of Initial Power-up cycle
 Start of CAC

Radar Signal Applied

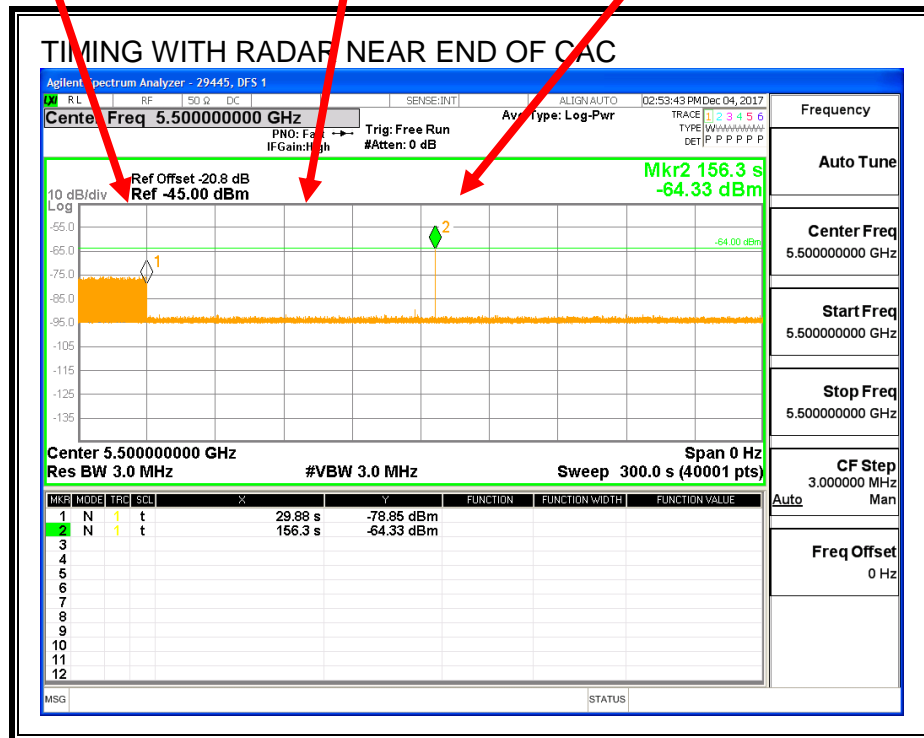

No EUT transmissions were observed after the radar signal.

6.2.4. OVERLAPPING CHANNEL TESTS

RESULTS

The channel spacing is not less than the channel bandwidth therefore the EUT does not have an overlapping channel plan.

6.2.5. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


| Channel Move Time (sec) | Limit (sec) |
|----------------------------|----------------|
| 0.536 | 10 |

| Aggregate Channel Closing Transmission Time (msec) | Limit (msec) |
|---|-----------------|
| 4.4 | 60 |

MOVE TIME

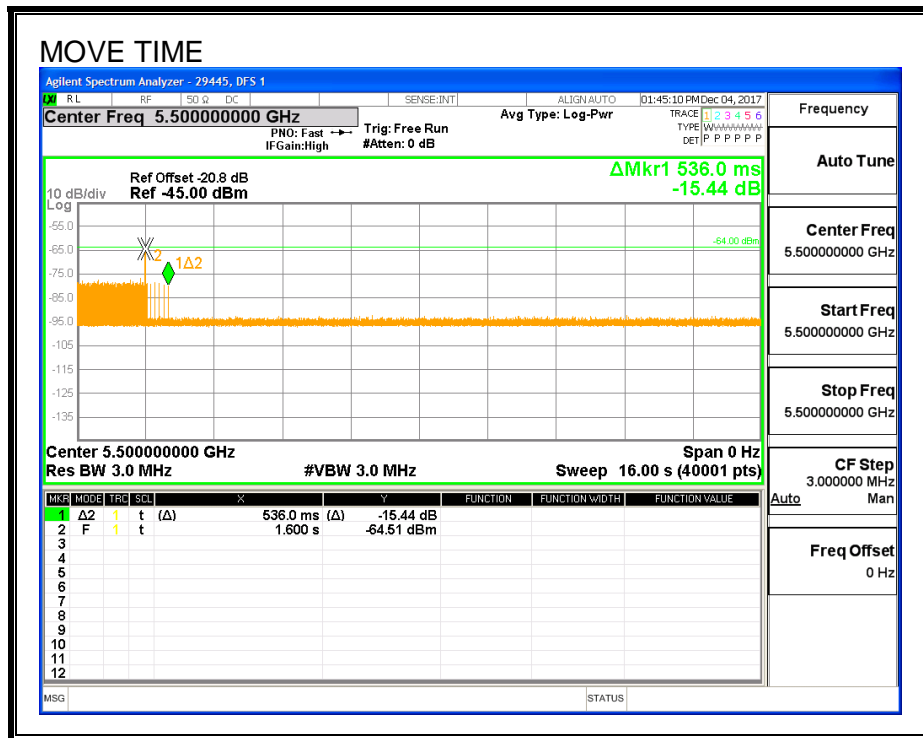


CHANNEL CLOSING TIME

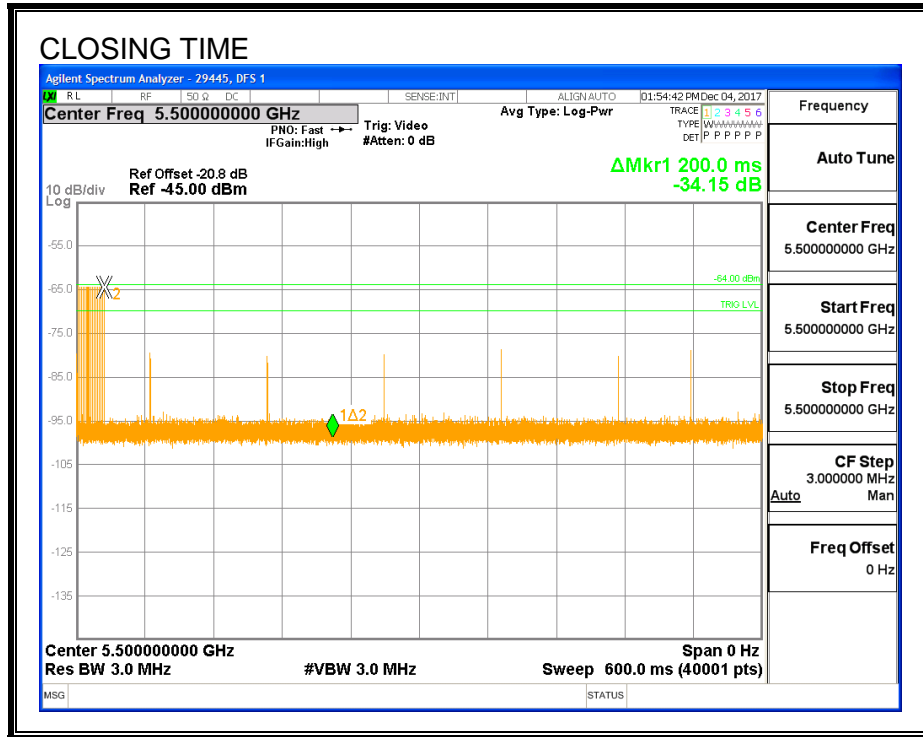


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.

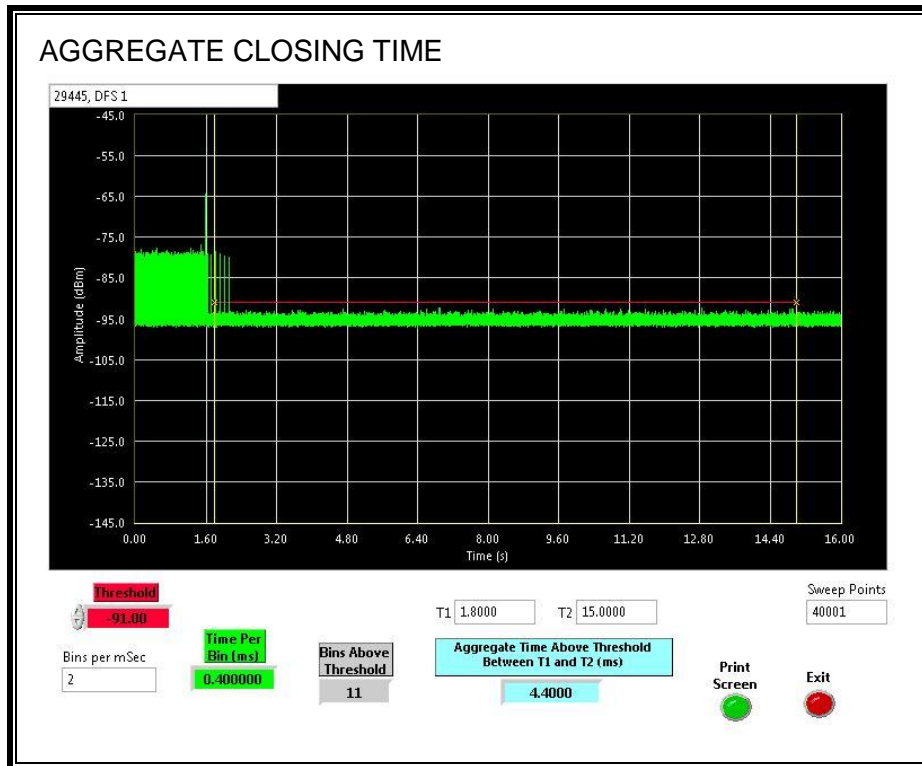


LONG PULSE CHANNEL MOVE TIME

The traffic ceases prior to 10 seconds after the end of the radar waveform.

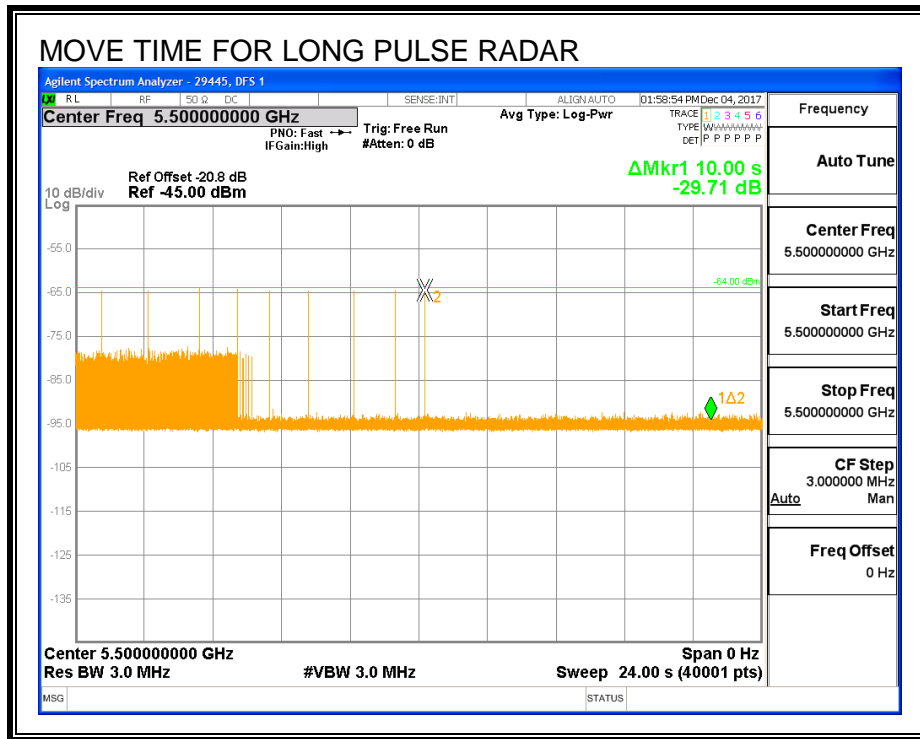

6.2.6. DETECTION BANDWIDTH

REFERENCE PLOT OF 99% POWER BANDWIDTH

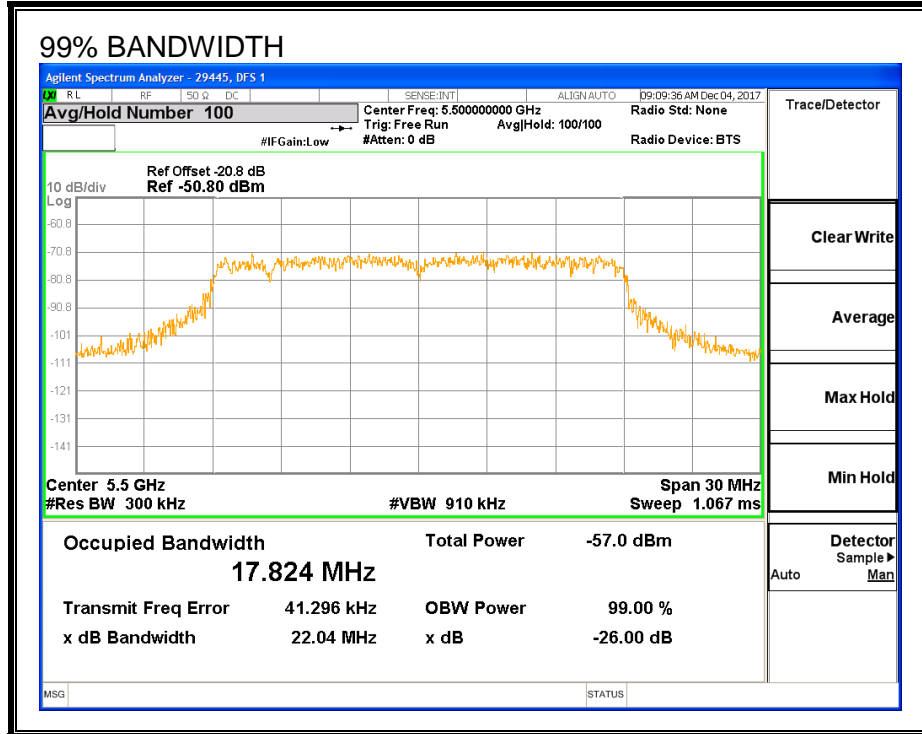

RESULTS

| FL | FH | Detection Bandwidth | 99% Power Bandwidth | Ratio of Detection BW to 99% Power BW | Minimum Limit |
|-------|-------|---------------------|---------------------|---------------------------------------|---------------|
| (MHz) | (MHz) | (MHz) | (MHz) | (%) | (%) |
| 5490 | 5510 | 20 | 17.824 | 112.2 | 100 |

DETECTION BANDWIDTH PROBABILITY

| DETECTION BANDWIDTH PROBABILITY RESULTS | | | | |
|--|-------------------------|------------------------|----------------------|-------------|
| Detection Bandwidth Test Results | | 29445 | DFS 1 | |
| FCC Type 0 Waveform: 1 us Pulse Width, 1428 us PRI, 18 Pulses per Burst | | | | |
| Frequency (MHz) | Number of Trials | Number Detected | Detection (%) | Mark |
| 5490 | 10 | 10 | 100 | FL |
| 5495 | 10 | 10 | 100 | |
| 5500 | 10 | 10 | 100 | |
| 5505 | 10 | 10 | 100 | |
| 5510 | 10 | 10 | 100 | FH |

6.2.7. IN-SERVICE MONITORING

RESULTS

| FCC Radar Test Summary | | | | | | | | | | |
|------------------------|------------------|---------------|-----------|-----------|---------------------|------|-------|---------------|-----------------|-------------------------------|
| Signal Type | Number of Trials | Detection (%) | Limit (%) | Pass/Fail | Detection Bandwidth | | OBW | Test Location | Employee Number | In-Service Monitoring Version |
| | | | | | FL | FH | | | | |
| FCC Short Pulse Type 1 | 30 | 100.00 | 60 | Pass | 5490 | 5510 | 17.82 | DFS 1 | 29445 | Version 3.0 |
| FCC Short Pulse Type 2 | 30 | 90.00 | 60 | Pass | 5490 | 5510 | 17.82 | DFS 1 | 29445 | Version 3.0 |
| FCC Short Pulse Type 3 | 30 | 93.33 | 60 | Pass | 5490 | 5510 | 17.82 | DFS 1 | 29445 | Version 3.0 |
| FCC Short Pulse Type 4 | 30 | 83.33 | 60 | Pass | 5490 | 5510 | 17.82 | DFS 1 | 29445 | Version 3.0 |
| Aggregate | | 91.67 | 80 | Pass | | | | | | |
| FCC Long Pulse Type 5 | 30 | 90.00 | 80 | Pass | 5490 | 5510 | 17.82 | DFS 1 | 29445 | Version 3.0 |
| FCC Hopping Type 6 | 42 | 100.00 | 70 | Pass | 5490 | 5510 | | DFS 1 | 29445 | Version 3.0 |

TYPE 1 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 1 | | | | | | |
|---|---------------------|-------------|---------------------|---------------|--------------------|----------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Test (A/B) | Frequency (MHz) | Successful Detection (Yes/No) |
| 1001 | 1 | 3066 | 18 | A | 5500 | Yes |
| 1002 | 1 | 578 | 92 | A | 5504 | Yes |
| 1003 | 1 | 918 | 58 | A | 5501 | Yes |
| 1004 | 1 | 778 | 68 | A | 5498 | Yes |
| 1005 | 1 | 738 | 72 | A | 5494 | Yes |
| 1006 | 1 | 858 | 62 | A | 5491 | Yes |
| 1007 | 1 | 818 | 65 | A | 5505 | Yes |
| 1008 | 1 | 518 | 102 | A | 5500 | Yes |
| 1009 | 1 | 938 | 57 | A | 5504 | Yes |
| 1010 | 1 | 838 | 63 | A | 5505 | Yes |
| 1011 | 1 | 658 | 81 | A | 5497 | Yes |
| 1012 | 1 | 598 | 89 | A | 5504 | Yes |
| 1013 | 1 | 758 | 70 | A | 5507 | Yes |
| 1014 | 1 | 878 | 61 | A | 5508 | Yes |
| 1015 | 1 | 538 | 99 | A | 5494 | Yes |
| 1016 | 1 | 695 | 76 | B | 5502 | Yes |
| 1017 | 1 | 3004 | 18 | B | 5494 | Yes |
| 1018 | 1 | 1895 | 28 | B | 5508 | Yes |
| 1019 | 1 | 1786 | 30 | B | 5502 | Yes |
| 1020 | 1 | 2001 | 27 | B | 5495 | Yes |
| 1021 | 1 | 827 | 64 | B | 5502 | Yes |
| 1022 | 1 | 2525 | 21 | B | 5508 | Yes |
| 1023 | 1 | 1480 | 36 | B | 5504 | Yes |
| 1024 | 1 | 2113 | 25 | B | 5509 | Yes |
| 1025 | 1 | 1198 | 45 | B | 5505 | Yes |
| 1026 | 1 | 1960 | 27 | B | 5495 | Yes |
| 1027 | 1 | 1174 | 45 | B | 5508 | Yes |
| 1028 | 1 | 871 | 61 | B | 5493 | Yes |
| 1029 | 1 | 1568 | 34 | B | 5509 | Yes |
| 1030 | 1 | 2589 | 21 | B | 5500 | Yes |

TYPE 2 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 2 | | | | | |
|---|------------------|----------|------------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Frequency (MHz) | Successful Detection (Yes/No) |
| 2001 | 1.4 | 157 | 26 | 5494 | Yes |
| 2002 | 1.1 | 230 | 27 | 5498 | No |
| 2003 | 3.5 | 215 | 29 | 5504 | Yes |
| 2004 | 1.4 | 211 | 23 | 5509 | Yes |
| 2005 | 2.1 | 201 | 29 | 5508 | Yes |
| 2006 | 4.4 | 163 | 24 | 5509 | Yes |
| 2007 | 1.2 | 156 | 23 | 5509 | Yes |
| 2008 | 3.6 | 165 | 29 | 5492 | Yes |
| 2009 | 2.8 | 163 | 28 | 5499 | Yes |
| 2010 | 1.4 | 176 | 27 | 5493 | Yes |
| 2011 | 4.9 | 221 | 24 | 5502 | Yes |
| 2012 | 3.9 | 158 | 27 | 5491 | Yes |
| 2013 | 3.5 | 169 | 24 | 5501 | Yes |
| 2014 | 4.7 | 190 | 28 | 5495 | Yes |
| 2015 | 2.6 | 206 | 25 | 5506 | Yes |
| 2016 | 2 | 193 | 29 | 5504 | Yes |
| 2017 | 4.2 | 212 | 27 | 5497 | Yes |
| 2018 | 3.9 | 204 | 25 | 5503 | Yes |
| 2019 | 2.2 | 190 | 26 | 5505 | No |
| 2020 | 4.2 | 185 | 28 | 5505 | Yes |
| 2021 | 4.9 | 175 | 27 | 5505 | Yes |
| 2022 | 5 | 175 | 25 | 5502 | Yes |
| 2023 | 1.8 | 169 | 24 | 5503 | Yes |
| 2024 | 4.3 | 178 | 23 | 5507 | Yes |
| 2025 | 3.4 | 176 | 26 | 5496 | Yes |
| 2026 | 4.2 | 189 | 25 | 5492 | Yes |
| 2027 | 1.4 | 153 | 25 | 5501 | Yes |
| 2028 | 4.6 | 170 | 28 | 5504 | No |
| 2029 | 4.1 | 181 | 25 | 5497 | Yes |
| 2030 | 1.2 | 203 | 29 | 5497 | Yes |

TYPE 3 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 3 | | | | | |
|---|------------------|----------|------------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Frequency (MHz) | Successful Detection (Yes/No) |
| 3001 | 8.2 | 461 | 17 | 5504 | Yes |
| 3002 | 7.7 | 423 | 17 | 5493 | Yes |
| 3003 | 9.8 | 483 | 18 | 5497 | Yes |
| 3004 | 9.5 | 457 | 17 | 5505 | Yes |
| 3005 | 7.8 | 412 | 16 | 5493 | Yes |
| 3006 | 9.9 | 399 | 18 | 5503 | Yes |
| 3007 | 6.4 | 367 | 18 | 5508 | Yes |
| 3008 | 8.7 | 500 | 18 | 5500 | Yes |
| 3009 | 9.6 | 363 | 17 | 5491 | Yes |
| 3010 | 8 | 258 | 18 | 5500 | Yes |
| 3011 | 7.1 | 384 | 16 | 5508 | Yes |
| 3012 | 7.9 | 292 | 16 | 5492 | Yes |
| 3013 | 7.3 | 431 | 17 | 5507 | Yes |
| 3014 | 8.3 | 485 | 17 | 5499 | Yes |
| 3015 | 7.8 | 268 | 16 | 5508 | Yes |
| 3016 | 7.1 | 335 | 17 | 5490 | Yes |
| 3017 | 6.9 | 382 | 18 | 5502 | Yes |
| 3018 | 6.4 | 344 | 16 | 5493 | Yes |
| 3019 | 8.5 | 404 | 17 | 5509 | Yes |
| 3020 | 8.2 | 378 | 16 | 5497 | Yes |
| 3021 | 8.7 | 333 | 18 | 5494 | Yes |
| 3022 | 8.6 | 320 | 17 | 5492 | Yes |
| 3023 | 9.2 | 288 | 17 | 5501 | Yes |
| 3024 | 7.4 | 421 | 16 | 5505 | Yes |
| 3025 | 8.3 | 284 | 16 | 5500 | No |
| 3026 | 8.9 | 429 | 17 | 5497 | No |
| 3027 | 9.9 | 305 | 18 | 5510 | Yes |
| 3028 | 6.6 | 464 | 18 | 5502 | Yes |
| 3029 | 6 | 352 | 16 | 5495 | Yes |
| 3030 | 7 | 288 | 16 | 5503 | Yes |

TYPE 4 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 4 | | | | | |
|---|------------------|----------|------------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Frequency (MHz) | Successful Detection (Yes/No) |
| 4001 | 12.3 | 440 | 15 | 5504 | Yes |
| 4002 | 19.7 | 255 | 13 | 5508 | Yes |
| 4003 | 19.3 | 303 | 14 | 5501 | Yes |
| 4004 | 18.1 | 264 | 16 | 5506 | Yes |
| 4005 | 13.8 | 324 | 13 | 5502 | No |
| 4006 | 13.1 | 298 | 16 | 5502 | Yes |
| 4007 | 14.1 | 253 | 15 | 5502 | Yes |
| 4008 | 13.9 | 374 | 15 | 5495 | Yes |
| 4009 | 15.4 | 342 | 12 | 5506 | Yes |
| 4010 | 11.3 | 341 | 16 | 5501 | Yes |
| 4011 | 13.3 | 455 | 15 | 5498 | Yes |
| 4012 | 14.5 | 350 | 12 | 5502 | No |
| 4013 | 16.9 | 477 | 14 | 5499 | Yes |
| 4014 | 18.6 | 384 | 14 | 5506 | Yes |
| 4015 | 17.2 | 406 | 16 | 5492 | Yes |
| 4016 | 19.4 | 459 | 16 | 5498 | Yes |
| 4017 | 18.5 | 361 | 14 | 5506 | Yes |
| 4018 | 16.8 | 309 | 16 | 5508 | Yes |
| 4019 | 16.4 | 474 | 12 | 5502 | No |
| 4020 | 15.2 | 436 | 15 | 5501 | Yes |
| 4021 | 20 | 496 | 16 | 5492 | Yes |
| 4022 | 15.1 | 352 | 14 | 5505 | Yes |
| 4023 | 11.2 | 425 | 13 | 5491 | Yes |
| 4024 | 15.8 | 294 | 14 | 5507 | Yes |
| 4025 | 12.5 | 262 | 13 | 5497 | Yes |
| 4026 | 17.5 | 395 | 14 | 5502 | Yes |
| 4027 | 19.5 | 376 | 14 | 5505 | Yes |
| 4028 | 11.6 | 271 | 13 | 5505 | Yes |
| 4029 | 14 | 397 | 13 | 5508 | No |
| 4030 | 15.8 | 438 | 12 | 5493 | No |

TYPE 5 DETECTION PROBABILITY

| Data Sheet for FCC Long Pulse Radar Type 5 | | |
|---|------------------------|--------------------------------------|
| Trial | Frequency (MHz) | Successful Detection (Yes/No) |
| 1 | 5500 | Yes |
| 2 | 5500 | Yes |
| 3 | 5500 | Yes |
| 4 | 5500 | Yes |
| 5 | 5500 | Yes |
| 6 | 5500 | Yes |
| 7 | 5500 | Yes |
| 8 | 5500 | Yes |
| 9 | 5500 | No |
| 10 | 5500 | No |
| 11 | 5495 | Yes |
| 12 | 5497 | No |
| 13 | 5495 | Yes |
| 14 | 5497 | Yes |
| 15 | 5498 | Yes |
| 16 | 5497 | Yes |
| 17 | 5498 | Yes |
| 18 | 5499 | Yes |
| 19 | 5494 | Yes |
| 20 | 5496 | Yes |
| 21 | 5504 | Yes |
| 22 | 5505 | Yes |
| 23 | 5504 | Yes |
| 24 | 5503 | Yes |
| 25 | 5503 | Yes |
| 26 | 5502 | Yes |
| 27 | 5505 | Yes |
| 28 | 5500 | Yes |
| 29 | 5501 | Yes |
| 30 | 5501 | Yes |

Note: The Type 5 randomized parameters tested are shown in a separate document.

TYPE 6 DETECTION PROBABILITY

| Data Sheet for FCC Hopping Radar Type 6 | | | | |
|---|--------------------------------|----------------------------------|--------------------------|-------------------------------|
| 1 us Pulse Width, 333 us PRI, 9 Pulses per Burst, 1 Burst per Hop | | | | |
| NTIA August 2005 Hopping Sequence | | | | |
| Trial | Starting Index Within Sequence | Signal Generator Frequency (MHz) | Hops within Detection BW | Successful Detection (Yes/No) |
| 1 | 256 | 5490 | 6 | Yes |
| 2 | 731 | 5491 | 4 | Yes |
| 3 | 1206 | 5492 | 2 | Yes |
| 4 | 1681 | 5493 | 2 | Yes |
| 5 | 2156 | 5494 | 1 | Yes |
| 6 | 2631 | 5495 | 7 | Yes |
| 7 | 3106 | 5496 | 5 | Yes |
| 8 | 3581 | 5497 | 5 | Yes |
| 9 | 4056 | 5498 | 2 | Yes |
| 10 | 4531 | 5499 | 5 | Yes |
| 11 | 5006 | 5500 | 3 | Yes |
| 12 | 5481 | 5501 | 5 | Yes |
| 13 | 5956 | 5502 | 2 | Yes |
| 14 | 6431 | 5503 | 2 | Yes |
| 15 | 6906 | 5504 | 6 | Yes |
| 16 | 7381 | 5505 | 3 | Yes |
| 17 | 7856 | 5506 | 4 | Yes |
| 18 | 8331 | 5507 | 2 | Yes |
| 19 | 8806 | 5508 | 2 | Yes |
| 20 | 9281 | 5509 | 3 | Yes |
| 21 | 9756 | 5510 | 2 | Yes |
| 22 | 10231 | 5490 | 3 | Yes |
| 23 | 10706 | 5491 | 6 | Yes |
| 24 | 11181 | 5492 | 2 | Yes |
| 25 | 11656 | 5493 | 3 | Yes |
| 26 | 12131 | 5494 | 4 | Yes |
| 27 | 12606 | 5495 | 2 | Yes |
| 28 | 13081 | 5496 | 5 | Yes |
| 29 | 13556 | 5497 | 3 | Yes |
| 30 | 14031 | 5498 | 5 | Yes |
| 31 | 14506 | 5499 | 6 | Yes |
| 32 | 14981 | 5500 | 2 | Yes |
| 33 | 15456 | 5501 | 5 | Yes |
| 34 | 15931 | 5502 | 5 | Yes |
| 35 | 16406 | 5503 | 4 | Yes |
| 36 | 16881 | 5504 | 3 | Yes |
| 37 | 17356 | 5505 | 5 | Yes |
| 38 | 17831 | 5506 | 3 | Yes |
| 39 | 18306 | 5507 | 4 | Yes |
| 40 | 18781 | 5508 | 2 | Yes |
| 41 | 19256 | 5509 | 3 | Yes |
| 42 | 19731 | 5510 | 3 | Yes |


6.3. MASTER DEVICE RESULTS FOR 40 MHz BANDWIDTH


6.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.


6.3.2. RADAR WAVEFORMS AND TRAFFIC


RADAR WAVEFORMS

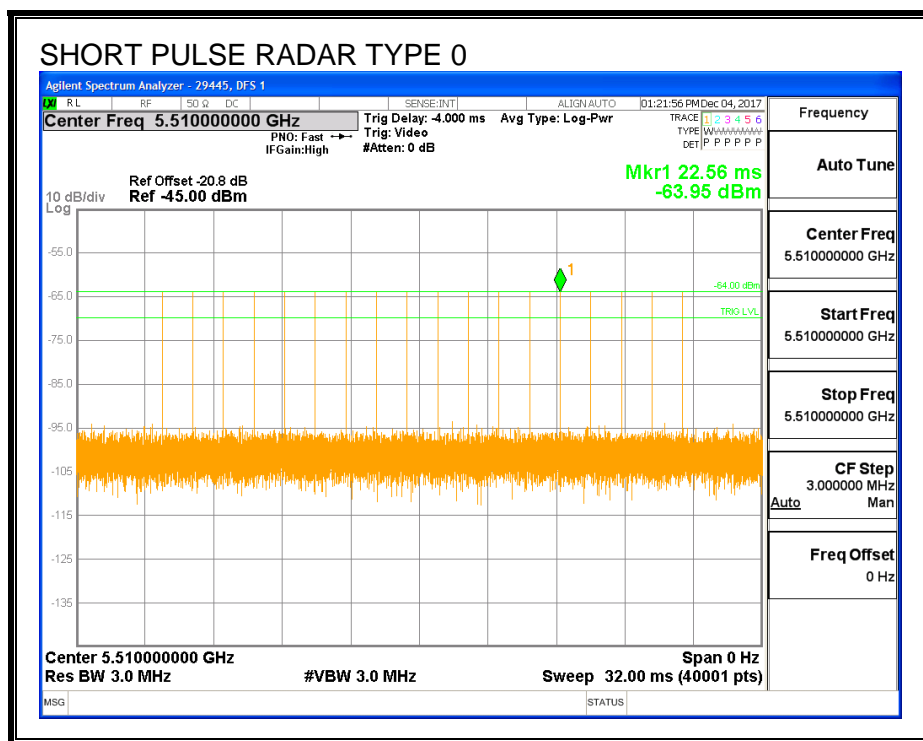


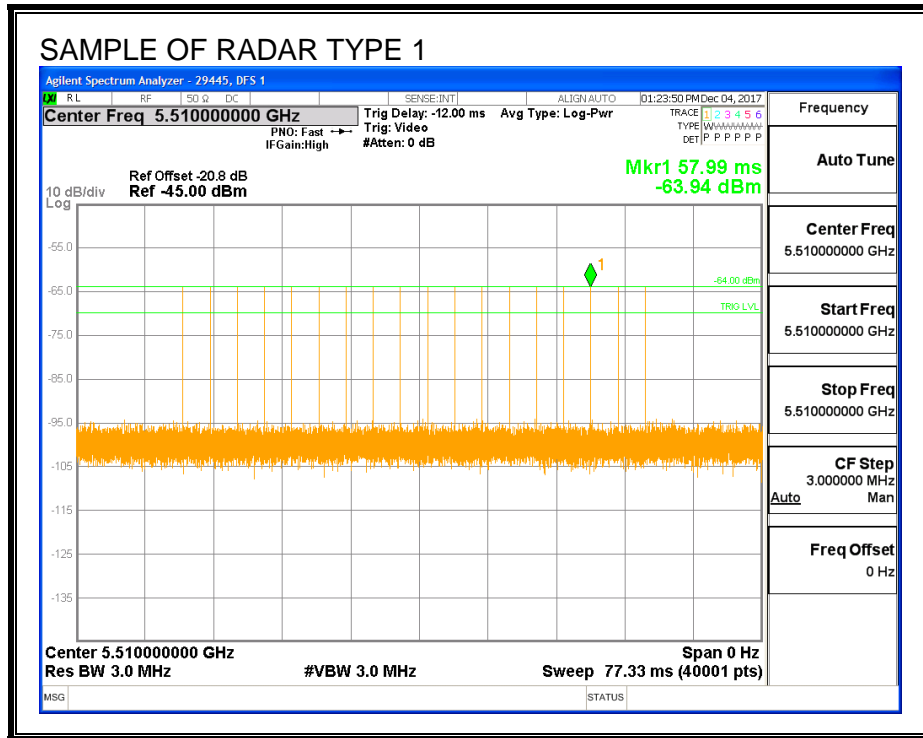


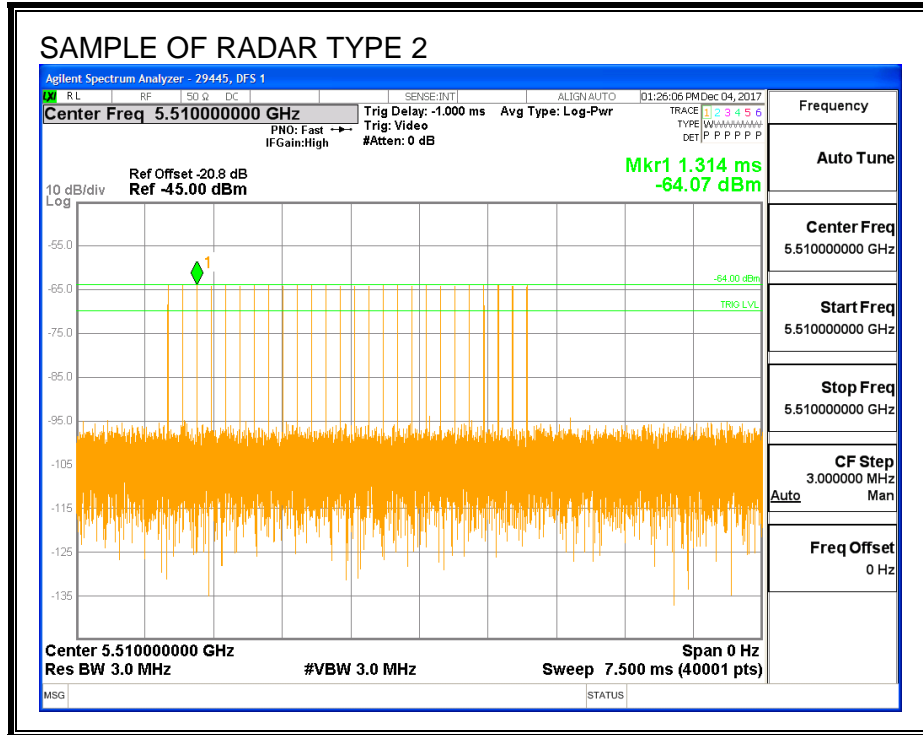

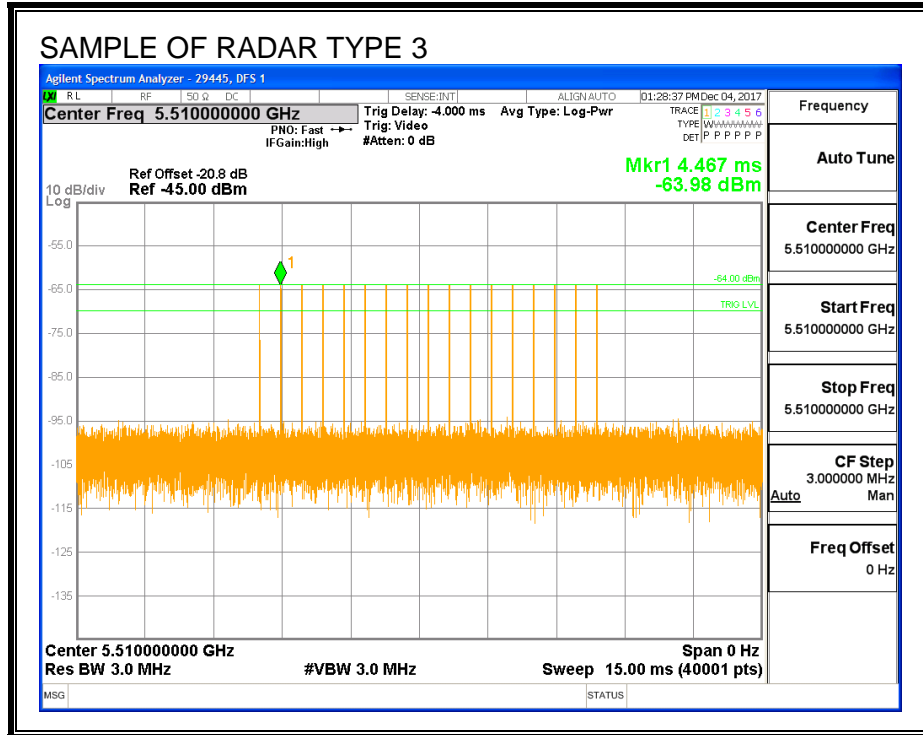


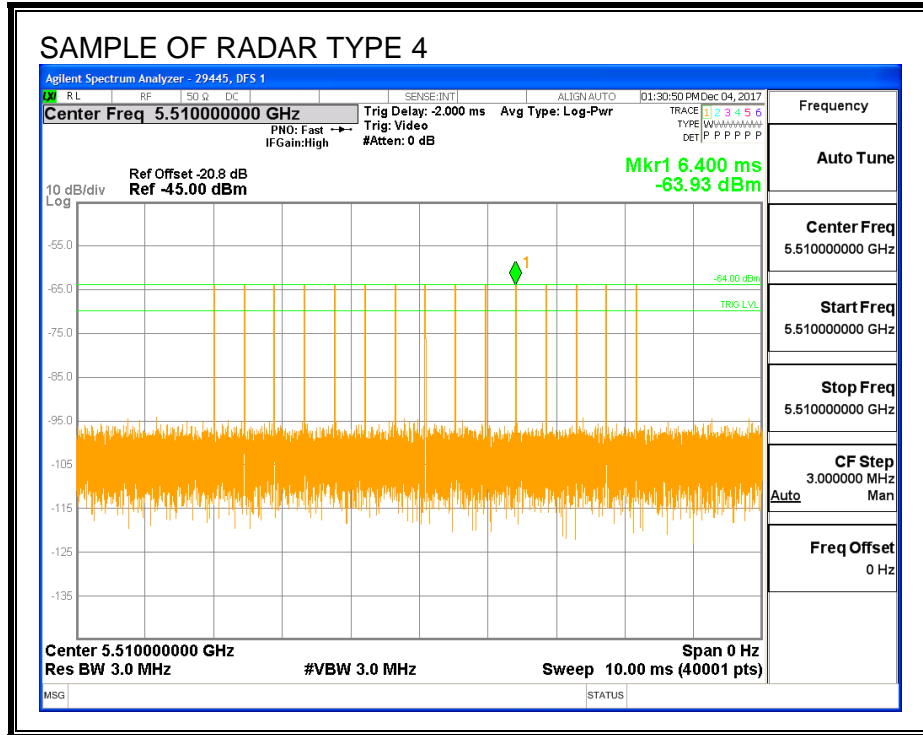

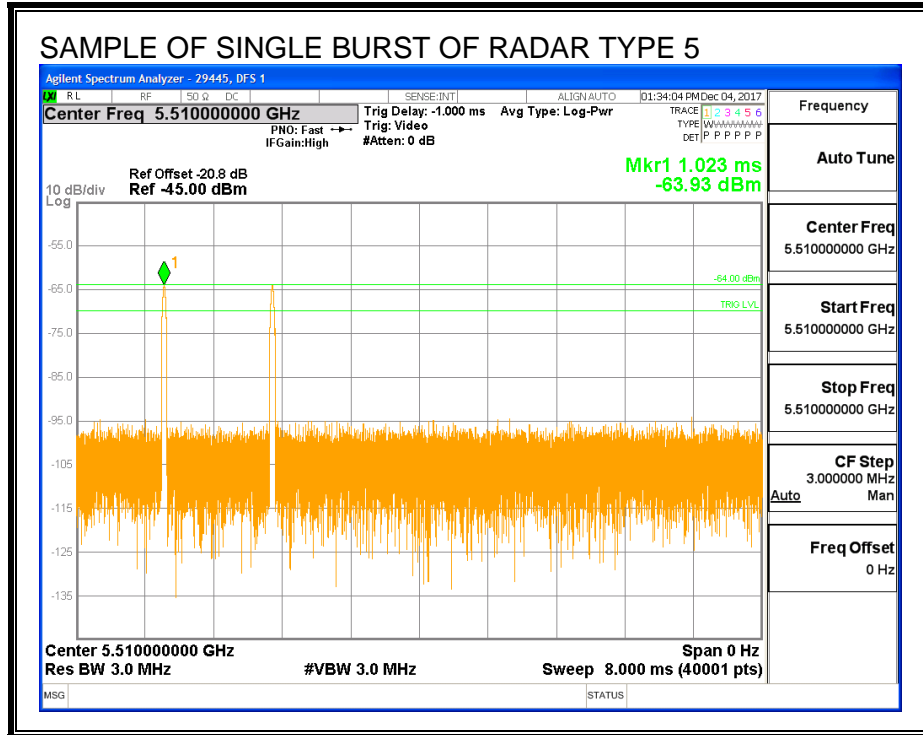


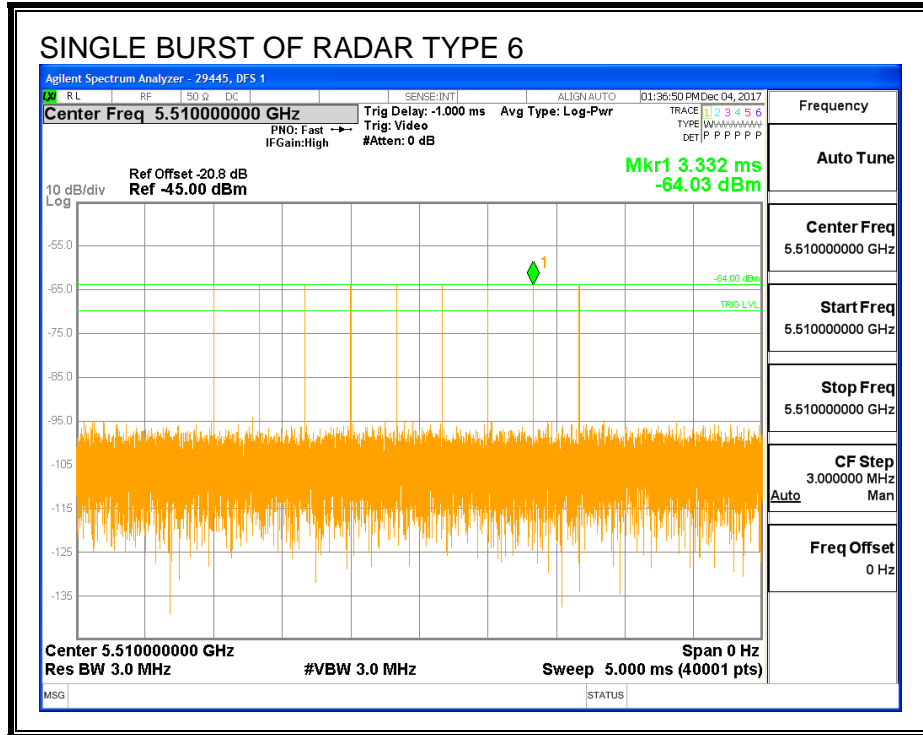

TRAFFIC

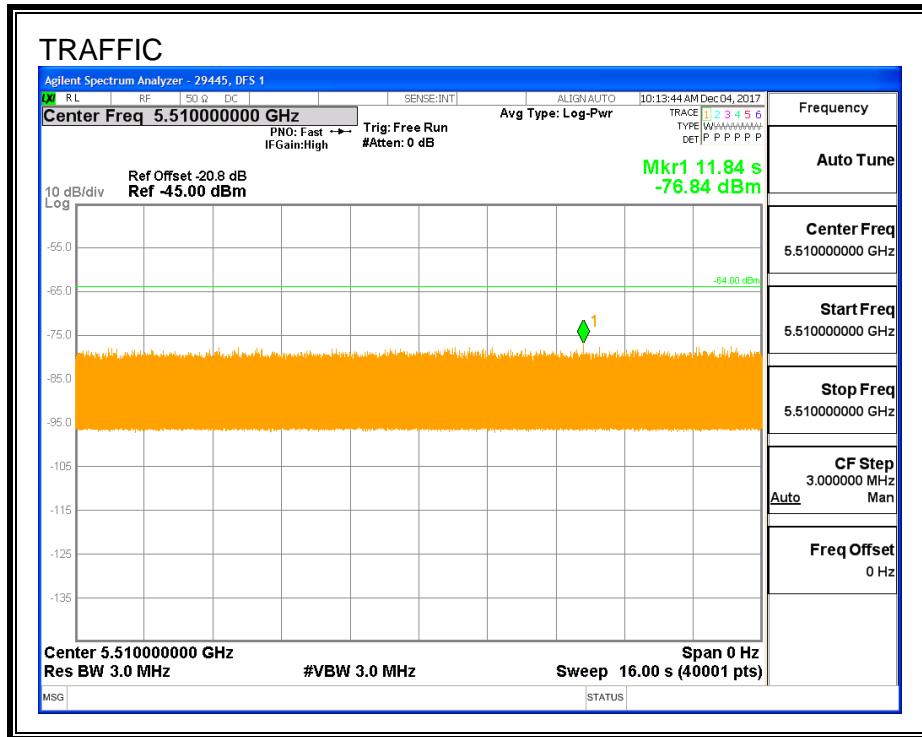

CHANNEL LOADING

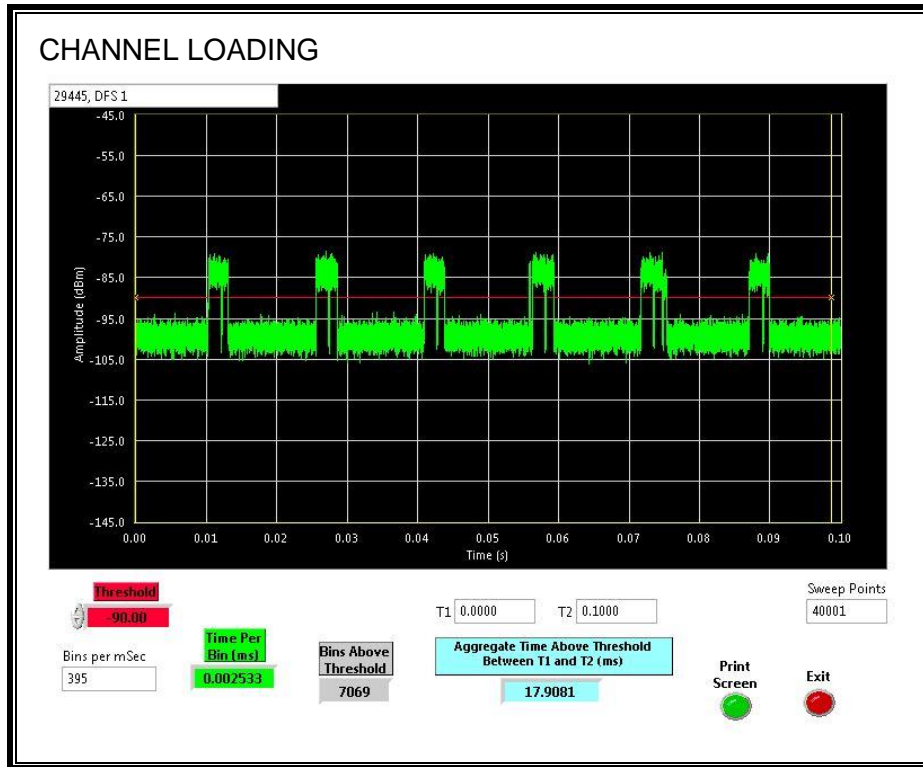

The level of traffic loading on the channel by the EUT is 17.90%.

6.3.3. CHANNEL AVAILABILITY CHECK TIME

PROCEDURE TO DETERMINE INITIAL POWER-UP CYCLE TIME

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

PROCEDURE FOR TIMING OF RADAR BURST

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

QUANTITATIVE RESULTS

No Radar Triggered

| Timing of Reboot (sec) | Timing of Start of Traffic (sec) | Total Power-up Cycle Time (sec) | Initial Power-up Cycle Time (sec) |
|------------------------|----------------------------------|---------------------------------|-----------------------------------|
| 30.1 | 158.0 | 127.9 | 67.9 |

Radar Near Beginning of CAC

| Timing of Reboot (sec) | Timing of Radar Burst (sec) | Radar Relative to Reboot (sec) | Radar Relative to Start of CAC (sec) |
|------------------------|-----------------------------|--------------------------------|--------------------------------------|
| 30.65 | 101.6 | 71.0 | 3.0 |

Radar Near End of CAC

| Timing of Reboot (sec) | Timing of Radar Burst (sec) | Radar Relative to Reboot (sec) | Radar Relative to Start of CAC (sec) |
|------------------------|-----------------------------|--------------------------------|--------------------------------------|
| 30.47 | 155.8 | 125.3 | 57.4 |

QUALITATIVE RESULTS


| Timing of Radar Burst | Display on Control Computer | Spectrum Analyzer Display |
|-------------------------------|------------------------------|---|
| No Radar Triggered | EUT marks Channel as active | Transmissions begin on channel after completion of the initial power-up cycle and the CAC |
| Within 0 to 6 second window | EUT indicates radar detected | No transmissions on channel |
| Within 54 to 60 second window | EUT indicates radar detected | No transmissions on channel |

TIMING WITHOUT RADAR DURING CAC

AP is rebooted
 Traffic ceases
 Start of Initial Power-up cycle

End of Initial Power-up cycle
 Start of CAC

End of CAC
 Traffic is Initiated

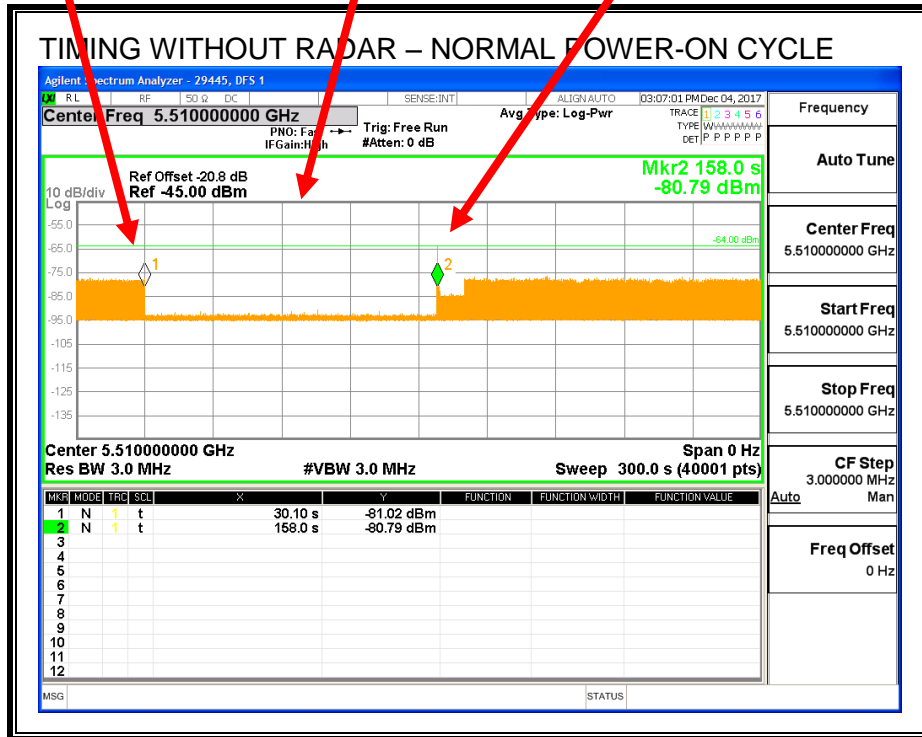


Transmissions begin on channel after completion of the initial power-up cycle and the CAC.

TIMING WITH RADAR NEAR BEGINNING OF CAC

AP is rebooted
 Traffic ceases
 Start of Initial Power-up cycle

End of Initial Power-up cycle
 Start of CAC

Radar Signal Applied

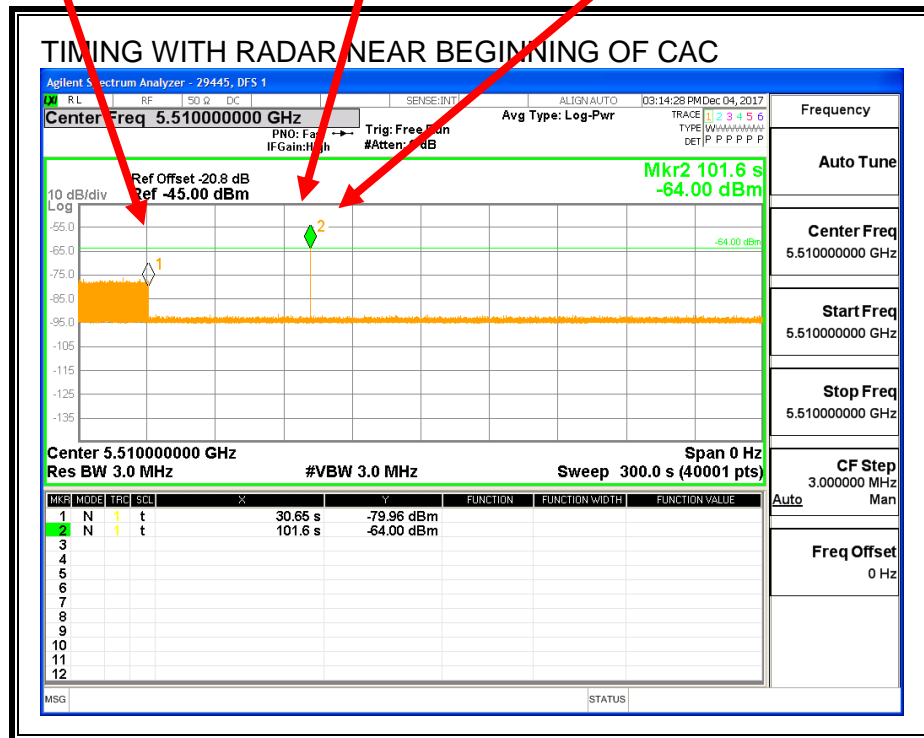


No EUT transmissions were observed after the radar signal.

TIMING WITH RADAR NEAR END OF CAC

AP is rebooted
 Traffic ceases
 Start of Initial Power-up cycle

End of Initial Power-up cycle
 Start of CAC

Radar Signal Applied

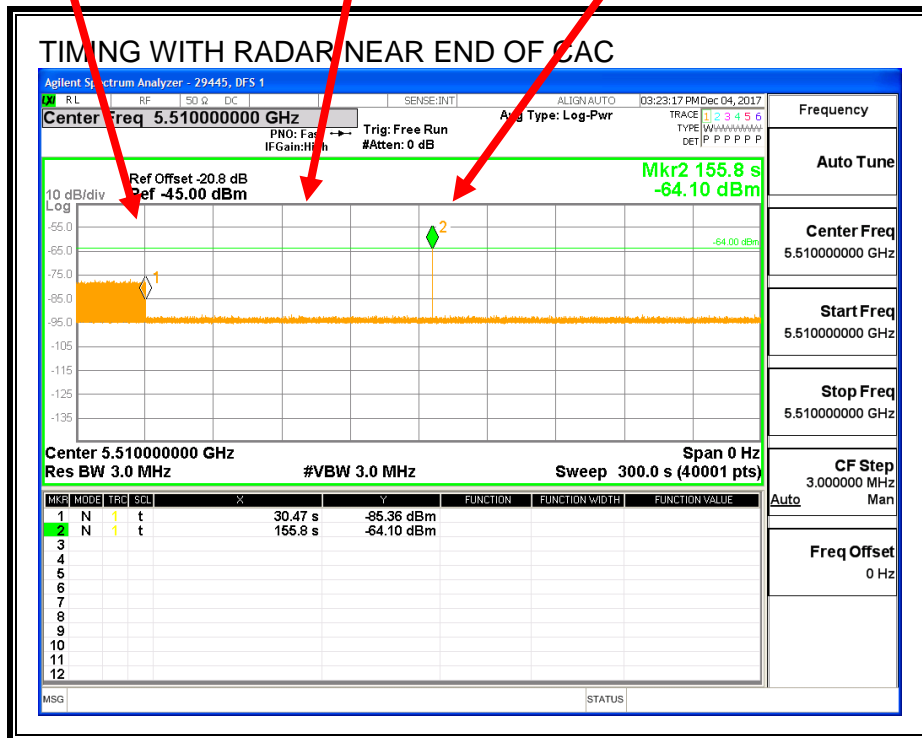

No EUT transmissions were observed after the radar signal.

6.3.1. OVERLAPPING CHANNEL TESTS

RESULTS

The channel spacing is not less than the channel bandwidth therefore the EUT does not have an overlapping channel plan.

6.3.2. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


| Channel Move Time (sec) | Limit (sec) |
|----------------------------|----------------|
| 0.4992 | 10 |

| Aggregate Channel Closing Transmission Time (msec) | Limit (msec) |
|---|-----------------|
| 3.6 | 60 |

MOVE TIME

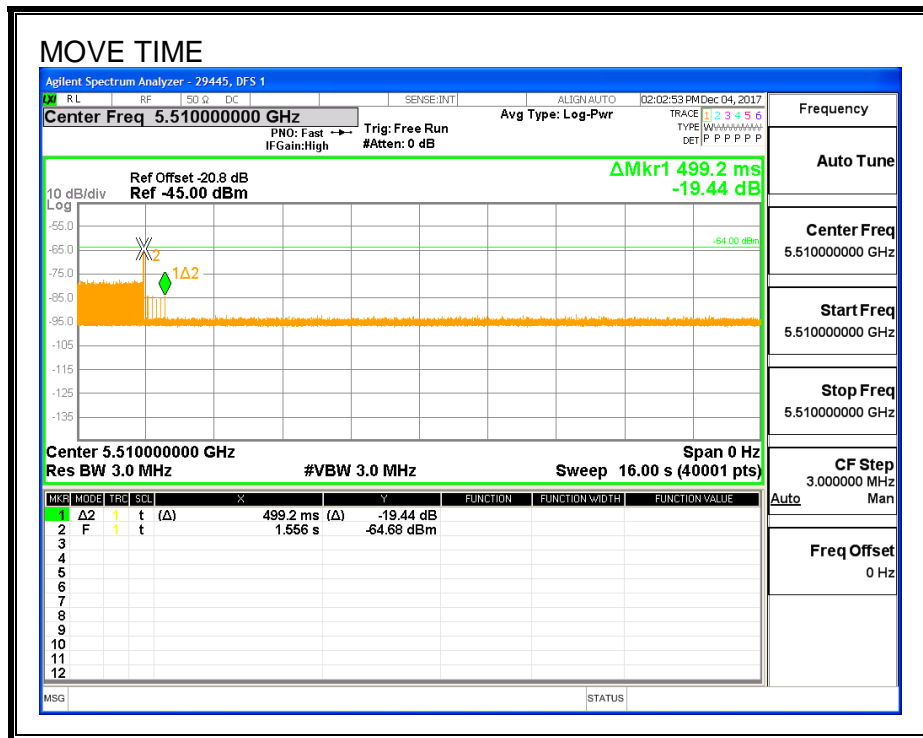


CHANNEL CLOSING TIME

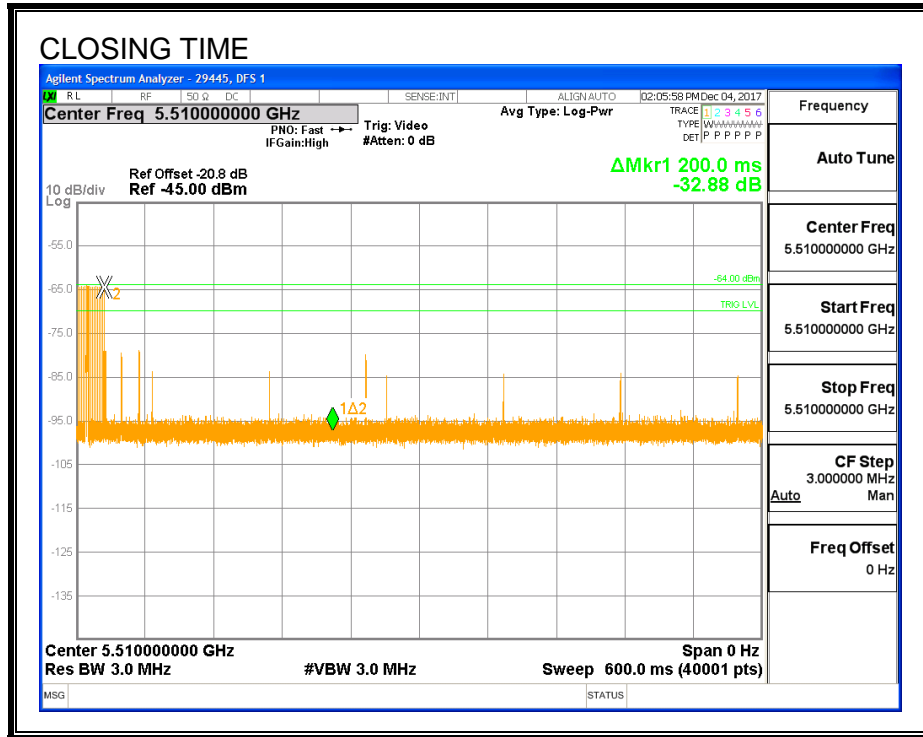


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.

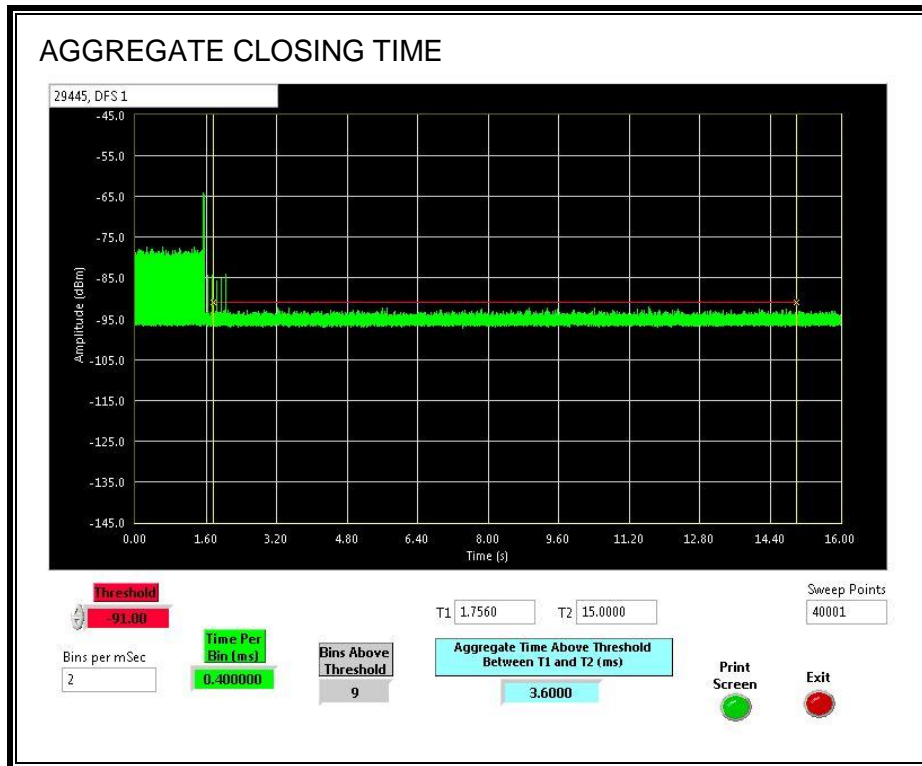


LONG PULSE CHANNEL MOVE TIME

The traffic ceases prior to 10 seconds after the end of the radar waveform.

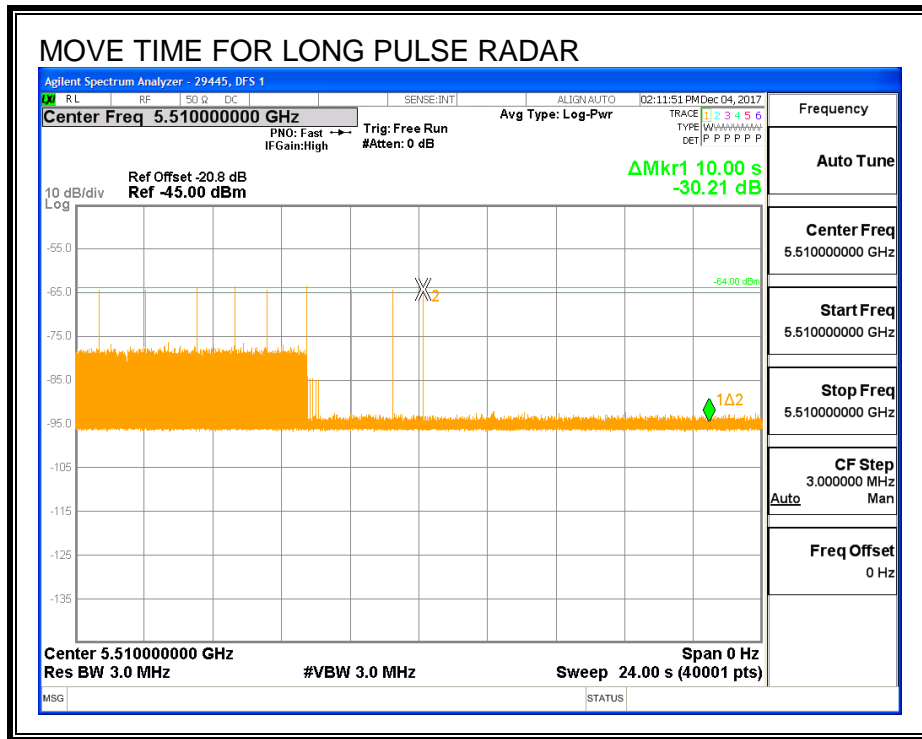

6.3.3. DETECTION BANDWIDTH

REFERENCE PLOT OF 99% POWER BANDWIDTH

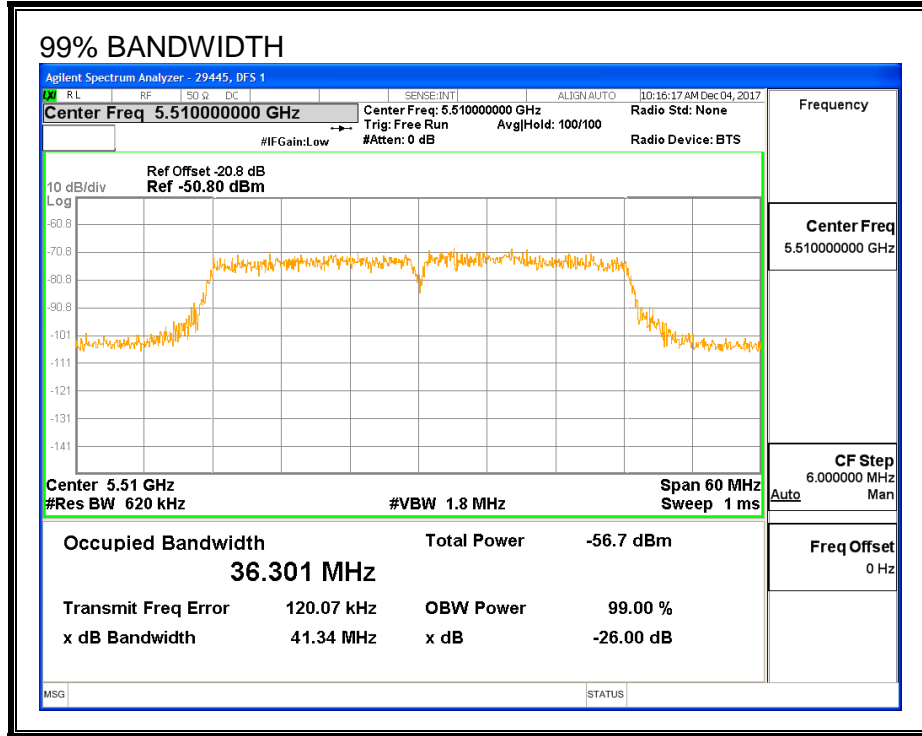

RESULTS

| FL | FH | Detection Bandwidth | 99% Power Bandwidth | Ratio of Detection BW to 99% Power BW | Minimum Limit |
|-------|-------|---------------------|---------------------|---------------------------------------|---------------|
| (MHz) | (MHz) | (MHz) | (MHz) | (%) | (%) |
| 5490 | 5530 | 40 | 36.301 | 110.2 | 100 |

DETECTION BANDWIDTH PROBABILITY

| DETECTION BANDWIDTH PROBABILITY RESULTS | | | | |
|--|-------------------------|------------------------|----------------------|-------------|
| Detection Bandwidth Test Results | | 29445 | DFS 1 | |
| FCC Type 0 Waveform: 1 us Pulse Width, 1428 us PRI, 18 Pulses per Burst | | | | |
| Frequency (MHz) | Number of Trials | Number Detected | Detection (%) | Mark |
| 5490 | 10 | 10 | 100 | FL |
| 5495 | 10 | 10 | 100 | |
| 5500 | 10 | 10 | 100 | |
| 5505 | 10 | 10 | 100 | |
| 5510 | 10 | 10 | 100 | |
| 5515 | 10 | 10 | 100 | |
| 5520 | 10 | 10 | 100 | |
| 5525 | 10 | 10 | 100 | |
| 5530 | 10 | 10 | 100 | FH |

6.3.4. IN-SERVICE MONITORING

RESULTS

| FCC Radar Test Summary | | | | | | | | | | |
|------------------------|------------------|---------------|-----------|-----------|---------------------|------|------|---------------|-----------------|-------------------------------|
| Signal Type | Number of Trials | Detection (%) | Limit (%) | Pass/Fail | Detection Bandwidth | | | Test Location | Employee Number | In-Service Monitoring Version |
| | | | | | FL | FH | OBW | | | |
| FCC Short Pulse Type 1 | 30 | 100.00 | 60 | Pass | 5490 | 5530 | 36.3 | DFS 1 | 29445 | Version 3.0 |
| FCC Short Pulse Type 2 | 30 | 73.33 | 60 | Pass | 5490 | 5530 | 36.3 | DFS 1 | 29445 | Version 3.0 |
| FCC Short Pulse Type 3 | 30 | 93.33 | 60 | Pass | 5490 | 5530 | 36.3 | DFS 1 | 29445 | Version 3.0 |
| FCC Short Pulse Type 4 | 30 | 80.00 | 60 | Pass | 5490 | 5530 | 36.3 | DFS 1 | 29445 | Version 3.0 |
| Aggregate | | 86.67 | 80 | Pass | | | | | | |
| FCC Long Pulse Type 5 | 30 | 100.00 | 80 | Pass | 5490 | 5530 | 36.3 | DFS 1 | 29445 | Version 3.0 |
| FCC Hopping Type 6 | 41 | 100.00 | 70 | Pass | 5490 | 5530 | | DFS 1 | 29445 | Version 3.0 |

TYPE 1 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 1 | | | | | | |
|---|------------------|----------|------------------|------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Test (A/B) | Frequency (MHz) | Successful Detection (Yes/No) |
| 1001 | 1 | 3066 | 18 | A | 5529 | Yes |
| 1002 | 1 | 578 | 92 | A | 5507 | Yes |
| 1003 | 1 | 918 | 58 | A | 5528 | Yes |
| 1004 | 1 | 778 | 68 | A | 5526 | Yes |
| 1005 | 1 | 738 | 72 | A | 5510 | Yes |
| 1006 | 1 | 858 | 62 | A | 5514 | Yes |
| 1007 | 1 | 818 | 65 | A | 5521 | Yes |
| 1008 | 1 | 518 | 102 | A | 5491 | Yes |
| 1009 | 1 | 938 | 57 | A | 5527 | Yes |
| 1010 | 1 | 838 | 63 | A | 5493 | Yes |
| 1011 | 1 | 658 | 81 | A | 5519 | Yes |
| 1012 | 1 | 598 | 89 | A | 5505 | Yes |
| 1013 | 1 | 758 | 70 | A | 5501 | Yes |
| 1014 | 1 | 878 | 61 | A | 5499 | Yes |
| 1015 | 1 | 538 | 99 | A | 5496 | Yes |
| 1016 | 1 | 695 | 76 | B | 5494 | Yes |
| 1017 | 1 | 3004 | 18 | B | 5499 | Yes |
| 1018 | 1 | 1895 | 28 | B | 5496 | Yes |
| 1019 | 1 | 1786 | 30 | B | 5502 | Yes |
| 1020 | 1 | 2001 | 27 | B | 5497 | Yes |
| 1021 | 1 | 827 | 64 | B | 5528 | Yes |
| 1022 | 1 | 2525 | 21 | B | 5520 | Yes |
| 1023 | 1 | 1480 | 36 | B | 5498 | Yes |
| 1024 | 1 | 2113 | 25 | B | 5506 | Yes |
| 1025 | 1 | 1198 | 45 | B | 5525 | Yes |
| 1026 | 1 | 1960 | 27 | B | 5522 | Yes |
| 1027 | 1 | 1174 | 45 | B | 5520 | Yes |
| 1028 | 1 | 871 | 61 | B | 5509 | Yes |
| 1029 | 1 | 1568 | 34 | B | 5499 | Yes |
| 1030 | 1 | 2589 | 21 | B | 5517 | Yes |

TYPE 2 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 2 | | | | | |
|---|------------------|----------|------------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Frequency (MHz) | Successful Detection (Yes/No) |
| 2001 | 1.4 | 157 | 26 | 5527 | Yes |
| 2002 | 1.1 | 230 | 27 | 5504 | Yes |
| 2003 | 3.5 | 215 | 29 | 5506 | Yes |
| 2004 | 1.4 | 211 | 23 | 5506 | Yes |
| 2005 | 2.1 | 201 | 29 | 5505 | Yes |
| 2006 | 4.4 | 163 | 24 | 5500 | Yes |
| 2007 | 1.2 | 156 | 23 | 5507 | Yes |
| 2008 | 3.6 | 165 | 29 | 5497 | Yes |
| 2009 | 2.8 | 163 | 28 | 5530 | Yes |
| 2010 | 1.4 | 176 | 27 | 5520 | No |
| 2011 | 4.9 | 221 | 24 | 5509 | Yes |
| 2012 | 3.9 | 158 | 27 | 5503 | No |
| 2013 | 3.5 | 169 | 24 | 5520 | Yes |
| 2014 | 4.7 | 190 | 28 | 5491 | No |
| 2015 | 2.6 | 206 | 25 | 5522 | No |
| 2016 | 2 | 193 | 29 | 5527 | Yes |
| 2017 | 4.2 | 212 | 27 | 5522 | No |
| 2018 | 3.9 | 204 | 25 | 5522 | Yes |
| 2019 | 2.2 | 190 | 26 | 5517 | Yes |
| 2020 | 4.2 | 185 | 28 | 5498 | Yes |
| 2021 | 4.9 | 175 | 27 | 5523 | Yes |
| 2022 | 5 | 175 | 25 | 5528 | Yes |
| 2023 | 1.8 | 169 | 24 | 5495 | Yes |
| 2024 | 4.3 | 178 | 23 | 5504 | No |
| 2025 | 3.4 | 176 | 26 | 5517 | No |
| 2026 | 4.2 | 189 | 25 | 5506 | Yes |
| 2027 | 1.4 | 153 | 25 | 5518 | Yes |
| 2028 | 4.6 | 170 | 28 | 5516 | No |
| 2029 | 4.1 | 181 | 25 | 5518 | Yes |
| 2030 | 1.2 | 203 | 29 | 5519 | Yes |

TYPE 3 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 3 | | | | | |
|---|------------------|----------|------------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Frequency (MHz) | Successful Detection (Yes/No) |
| 3001 | 8.2 | 461 | 17 | 5527 | Yes |
| 3002 | 7.7 | 423 | 17 | 5515 | Yes |
| 3003 | 9.8 | 483 | 18 | 5506 | Yes |
| 3004 | 9.5 | 457 | 17 | 5510 | Yes |
| 3005 | 7.8 | 412 | 16 | 5525 | Yes |
| 3006 | 9.9 | 399 | 18 | 5518 | Yes |
| 3007 | 6.4 | 367 | 18 | 5514 | Yes |
| 3008 | 8.7 | 500 | 18 | 5507 | Yes |
| 3009 | 9.6 | 363 | 17 | 5511 | Yes |
| 3010 | 8 | 258 | 18 | 5508 | Yes |
| 3011 | 7.1 | 384 | 16 | 5498 | No |
| 3012 | 7.9 | 292 | 16 | 5527 | Yes |
| 3013 | 7.3 | 431 | 17 | 5523 | Yes |
| 3014 | 8.3 | 485 | 17 | 5496 | Yes |
| 3015 | 7.8 | 268 | 16 | 5524 | Yes |
| 3016 | 7.1 | 335 | 17 | 5491 | Yes |
| 3017 | 6.9 | 382 | 18 | 5494 | Yes |
| 3018 | 6.4 | 344 | 16 | 5509 | Yes |
| 3019 | 8.5 | 404 | 17 | 5512 | Yes |
| 3020 | 8.2 | 378 | 16 | 5515 | Yes |
| 3021 | 8.7 | 333 | 18 | 5510 | Yes |
| 3022 | 8.6 | 320 | 17 | 5521 | Yes |
| 3023 | 9.2 | 288 | 17 | 5527 | No |
| 3024 | 7.4 | 421 | 16 | 5504 | Yes |
| 3025 | 8.3 | 284 | 16 | 5505 | Yes |
| 3026 | 8.9 | 429 | 17 | 5528 | Yes |
| 3027 | 9.9 | 305 | 18 | 5523 | Yes |
| 3028 | 6.6 | 464 | 18 | 5502 | Yes |
| 3029 | 6 | 352 | 16 | 5522 | Yes |
| 3030 | 7 | 288 | 16 | 5498 | Yes |

TYPE 4 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 4 | | | | | |
|---|------------------|----------|------------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Frequency (MHz) | Successful Detection (Yes/No) |
| 4001 | 12.3 | 440 | 15 | 5523 | Yes |
| 4002 | 19.7 | 255 | 13 | 5502 | Yes |
| 4003 | 19.3 | 303 | 14 | 5493 | Yes |
| 4004 | 18.1 | 264 | 16 | 5528 | Yes |
| 4005 | 13.8 | 324 | 13 | 5520 | Yes |
| 4006 | 13.1 | 298 | 16 | 5528 | Yes |
| 4007 | 14.1 | 253 | 15 | 5520 | Yes |
| 4008 | 13.9 | 374 | 15 | 5497 | Yes |
| 4009 | 15.4 | 342 | 12 | 5496 | No |
| 4010 | 11.3 | 341 | 16 | 5528 | Yes |
| 4011 | 13.3 | 455 | 15 | 5521 | Yes |
| 4012 | 14.5 | 350 | 12 | 5494 | Yes |
| 4013 | 16.9 | 477 | 14 | 5511 | Yes |
| 4014 | 18.6 | 384 | 14 | 5514 | No |
| 4015 | 17.2 | 406 | 16 | 5492 | Yes |
| 4016 | 19.4 | 459 | 16 | 5515 | No |
| 4017 | 18.5 | 361 | 14 | 5491 | Yes |
| 4018 | 16.8 | 309 | 16 | 5523 | Yes |
| 4019 | 16.4 | 474 | 12 | 5497 | No |
| 4020 | 15.2 | 436 | 15 | 5498 | Yes |
| 4021 | 20 | 496 | 16 | 5521 | Yes |
| 4022 | 15.1 | 352 | 14 | 5511 | Yes |
| 4023 | 11.2 | 425 | 13 | 5494 | No |
| 4024 | 15.8 | 294 | 14 | 5513 | Yes |
| 4025 | 12.5 | 262 | 13 | 5492 | Yes |
| 4026 | 17.5 | 395 | 14 | 5516 | No |
| 4027 | 19.5 | 376 | 14 | 5508 | Yes |
| 4028 | 11.6 | 271 | 13 | 5517 | Yes |
| 4029 | 14 | 397 | 13 | 5518 | Yes |
| 4030 | 15.8 | 438 | 12 | 5523 | Yes |

TYPE 5 DETECTION PROBABILITY

| Data Sheet for FCC Long Pulse Radar Type 5 | | |
|---|------------------------|--------------------------------------|
| Trial | Frequency (MHz) | Successful Detection (Yes/No) |
| 1 | 5510 | Yes |
| 2 | 5510 | Yes |
| 3 | 5510 | Yes |
| 4 | 5510 | Yes |
| 5 | 5510 | Yes |
| 6 | 5510 | Yes |
| 7 | 5510 | Yes |
| 8 | 5510 | Yes |
| 9 | 5510 | Yes |
| 10 | 5510 | Yes |
| 11 | 5496 | Yes |
| 12 | 5498 | Yes |
| 13 | 5496 | Yes |
| 14 | 5498 | Yes |
| 15 | 5499 | Yes |
| 16 | 5498 | Yes |
| 17 | 5498 | Yes |
| 18 | 5500 | Yes |
| 19 | 5494 | Yes |
| 20 | 5496 | Yes |
| 21 | 5523 | Yes |
| 22 | 5525 | Yes |
| 23 | 5523 | Yes |
| 24 | 5523 | Yes |
| 25 | 5522 | Yes |
| 26 | 5522 | Yes |
| 27 | 5525 | Yes |
| 28 | 5520 | Yes |
| 29 | 5521 | Yes |
| 30 | 5520 | Yes |

Note: The Type 5 randomized parameters tested are shown in a separate document.

TYPE 6 DETECTION PROBABILITY

| Data Sheet for FCC Hopping Radar Type 6 | | | | |
|---|--------------------------------|----------------------------------|--------------------------|-------------------------------|
| 1 us Pulse Width, 333 us PRI, 9 Pulses per Burst, 1 Burst per Hop | | | | |
| NTIA August 2005 Hopping Sequence | | | | |
| Trial | Starting Index Within Sequence | Signal Generator Frequency (MHz) | Hops within Detection BW | Successful Detection (Yes/No) |
| 1 | 31 | 5490 | 13 | Yes |
| 2 | 506 | 5491 | 9 | Yes |
| 3 | 981 | 5492 | 7 | Yes |
| 4 | 1456 | 5493 | 12 | Yes |
| 5 | 1931 | 5494 | 17 | Yes |
| 6 | 2406 | 5495 | 10 | Yes |
| 7 | 2881 | 5496 | 7 | Yes |
| 8 | 3356 | 5497 | 8 | Yes |
| 9 | 3831 | 5498 | 10 | Yes |
| 10 | 4306 | 5499 | 8 | Yes |
| 11 | 4781 | 5500 | 8 | Yes |
| 12 | 5256 | 5501 | 8 | Yes |
| 13 | 5731 | 5502 | 7 | Yes |
| 14 | 6206 | 5503 | 14 | Yes |
| 15 | 6681 | 5504 | 9 | Yes |
| 16 | 7156 | 5505 | 9 | Yes |
| 17 | 7631 | 5506 | 14 | Yes |
| 18 | 8106 | 5507 | 4 | Yes |
| 19 | 8581 | 5508 | 5 | Yes |
| 20 | 9056 | 5509 | 10 | Yes |
| 21 | 9531 | 5510 | 11 | Yes |
| 22 | 10006 | 5511 | 8 | Yes |
| 23 | 10481 | 5512 | 6 | Yes |
| 24 | 10956 | 5513 | 9 | Yes |
| 25 | 11431 | 5514 | 8 | Yes |
| 26 | 11906 | 5515 | 8 | Yes |
| 27 | 12381 | 5516 | 7 | Yes |
| 28 | 12856 | 5517 | 8 | Yes |
| 29 | 13331 | 5518 | 13 | Yes |
| 30 | 13806 | 5519 | 6 | Yes |
| 31 | 14281 | 5520 | 8 | Yes |
| 32 | 14756 | 5521 | 6 | Yes |
| 33 | 15231 | 5522 | 8 | Yes |
| 34 | 15706 | 5523 | 10 | Yes |
| 35 | 16181 | 5524 | 9 | Yes |
| 36 | 16656 | 5525 | 6 | Yes |
| 37 | 17131 | 5526 | 11 | Yes |
| 38 | 17606 | 5527 | 12 | Yes |
| 39 | 18081 | 5528 | 9 | Yes |
| 40 | 18556 | 5529 | 7 | Yes |
| 41 | 19031 | 5530 | 4 | Yes |


6.4. MASTER DEVICE RESULTS FOR 80 MHz BANDWIDTH


6.4.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.


6.4.2. RADAR WAVEFORMS AND TRAFFIC


RADAR WAVEFORMS

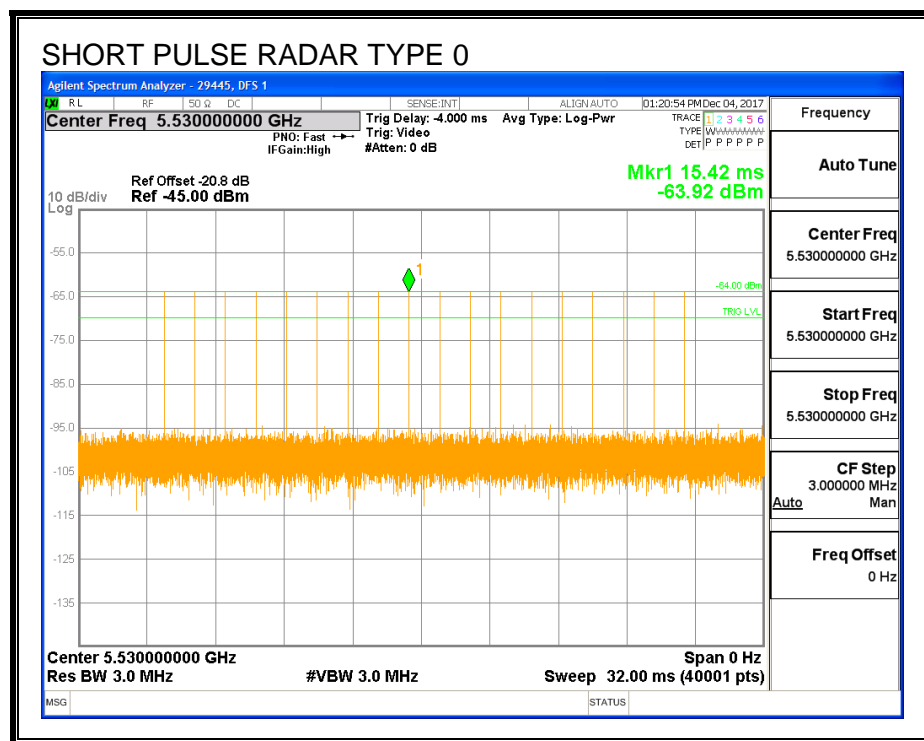


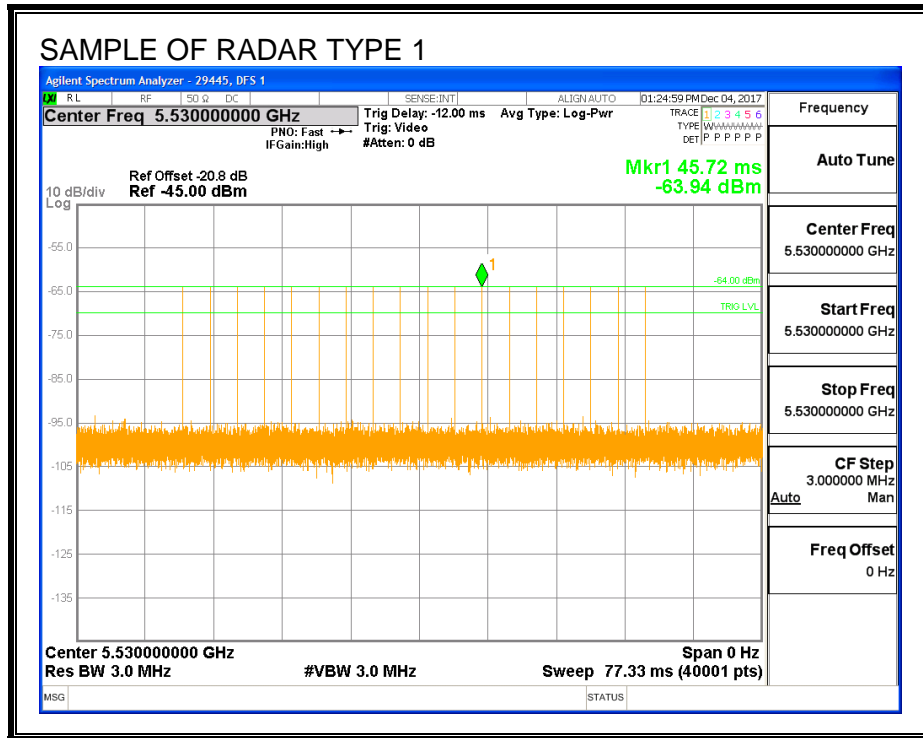


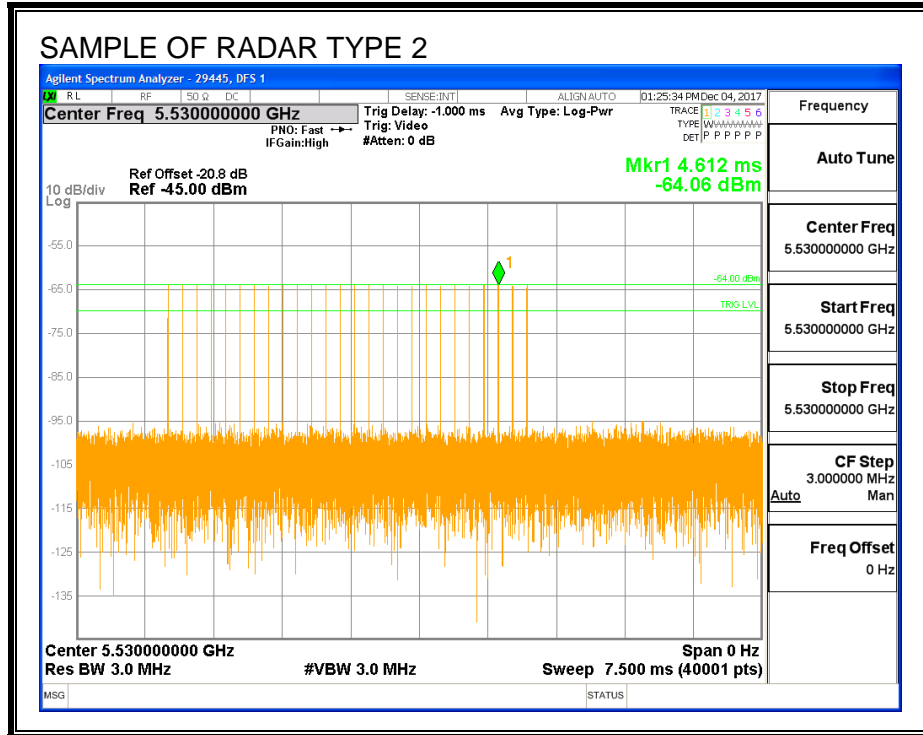

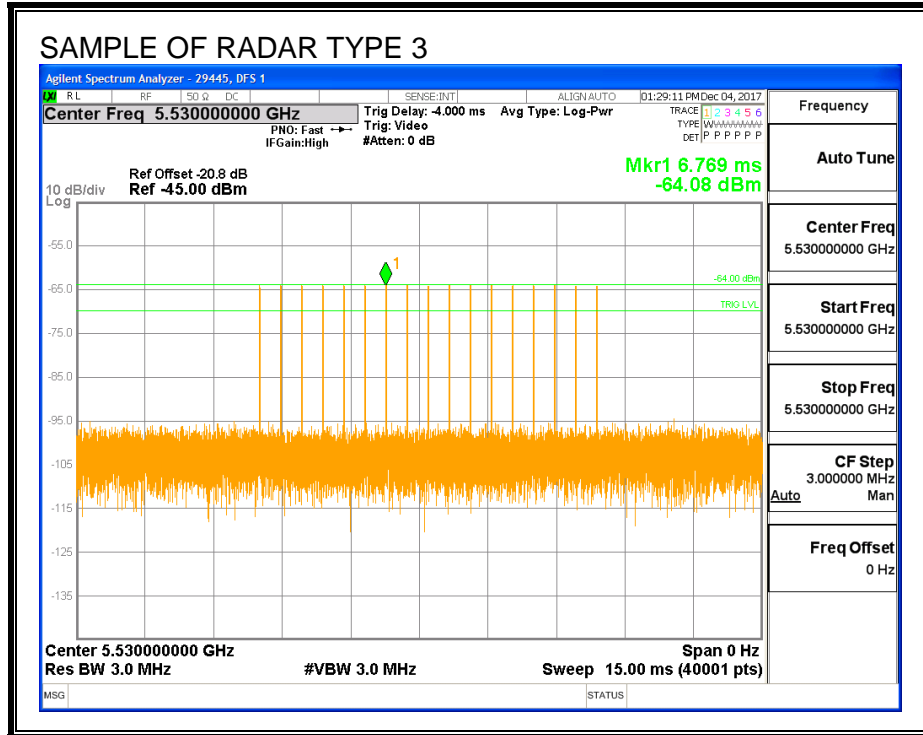


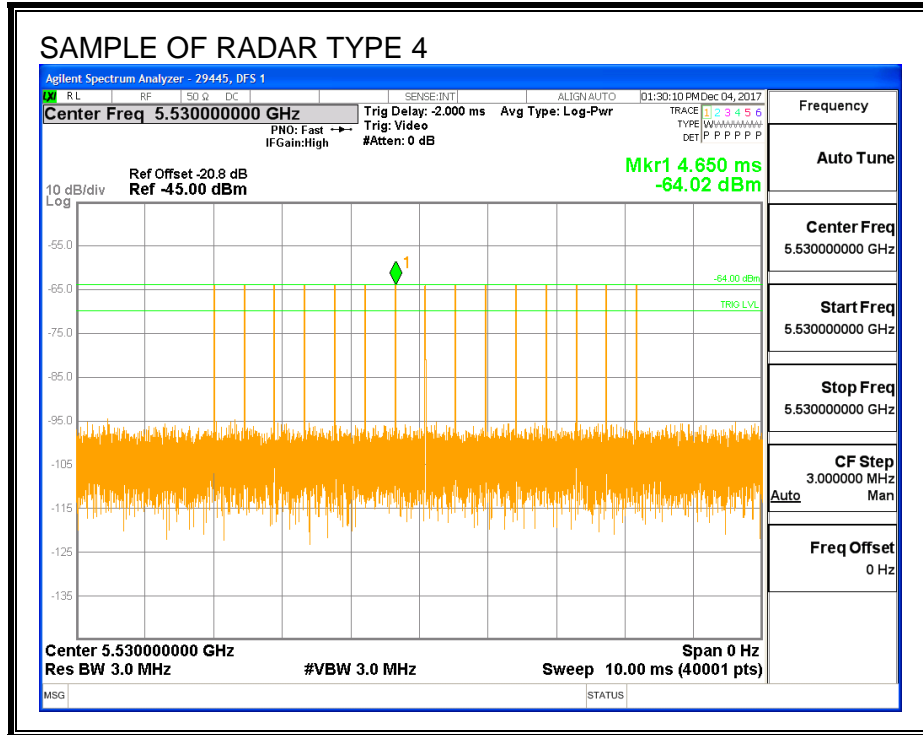

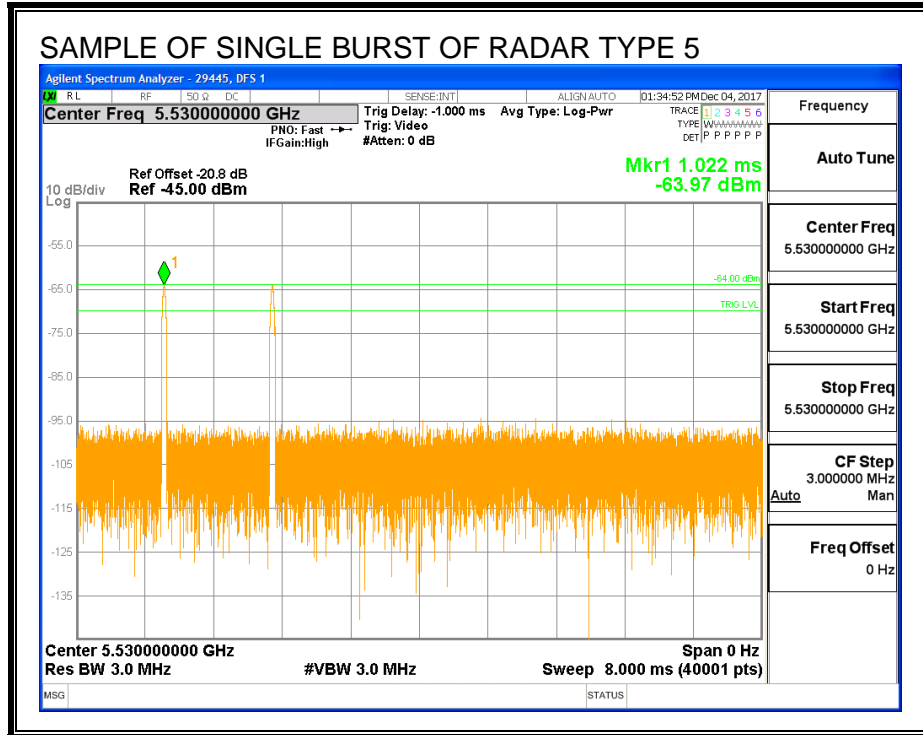


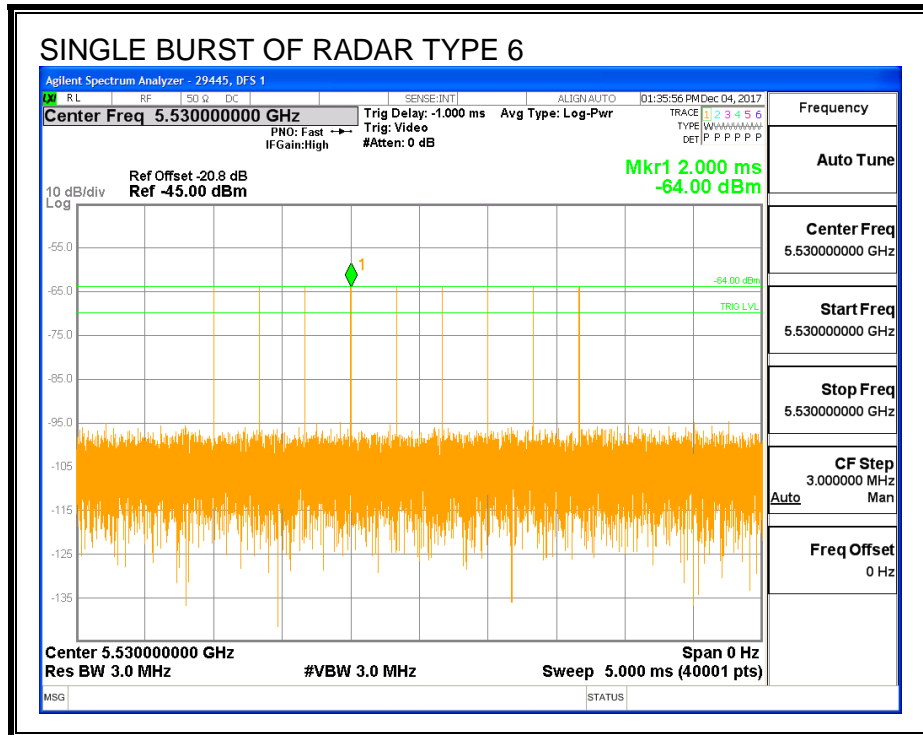

TRAFFIC

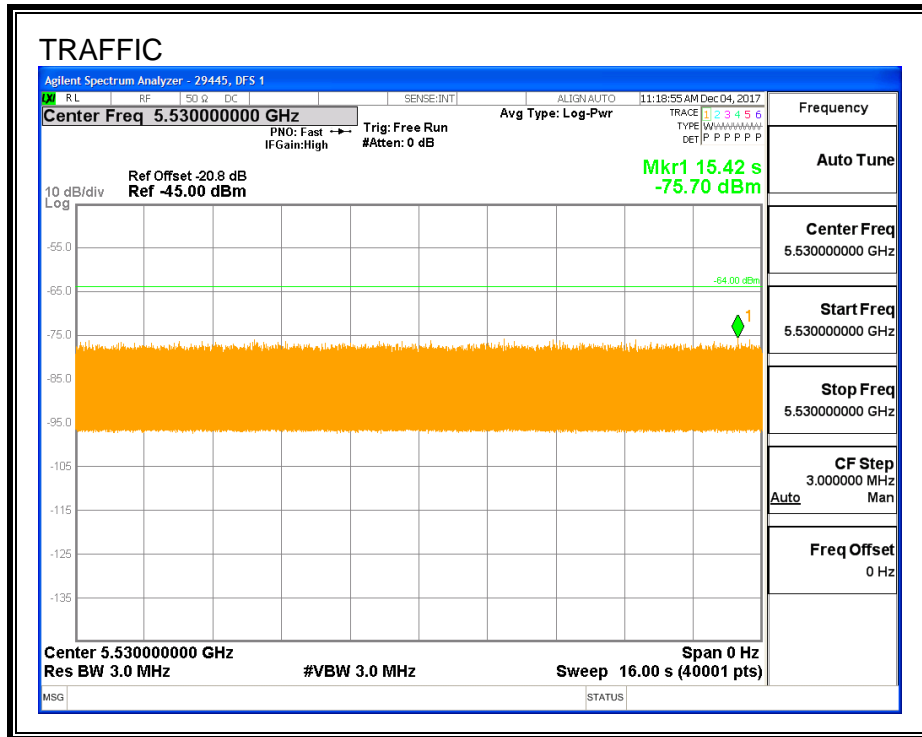

CHANNEL LOADING

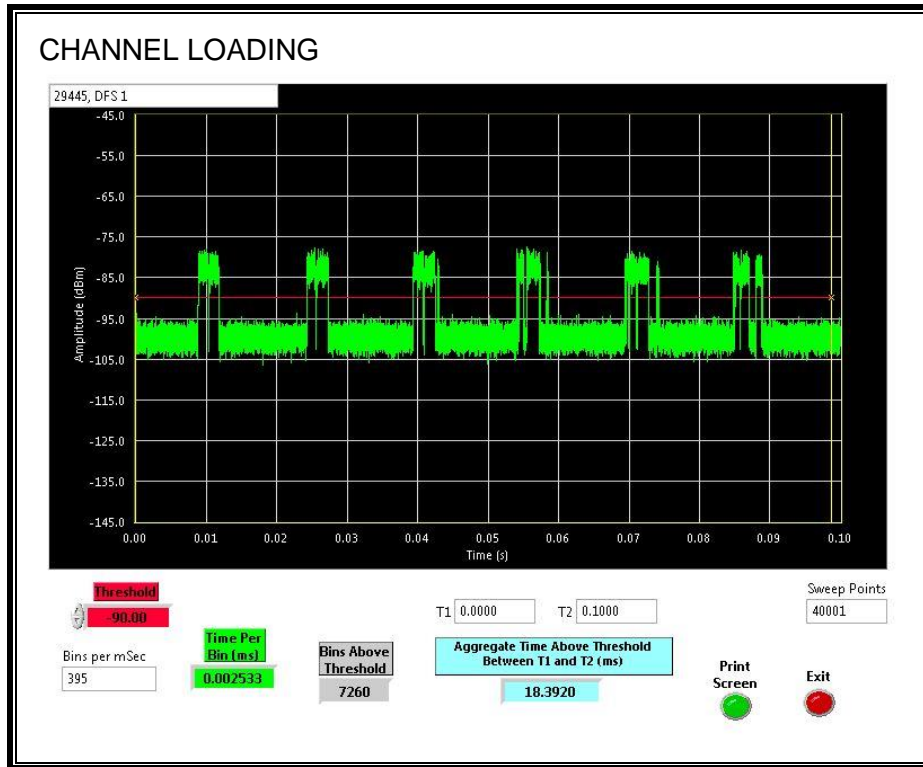

The level of traffic loading on the channel by the EUT is 18.39%.

6.4.1. CHANNEL AVAILABILITY CHECK TIME

PROCEDURE TO DETERMINE INITIAL POWER-UP CYCLE TIME

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

PROCEDURE FOR TIMING OF RADAR BURST

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

QUANTITATIVE RESULTS

No Radar Triggered

| Timing of Reboot (sec) | Timing of Start of Traffic (sec) | Total Power-up Cycle Time (sec) | Initial Power-up Cycle Time (sec) |
|------------------------|----------------------------------|---------------------------------|-----------------------------------|
| 29.99 | 157.8 | 127.8 | 67.8 |

Radar Near Beginning of CAC

| Timing of Reboot (sec) | Timing of Radar Burst (sec) | Radar Relative to Reboot (sec) | Radar Relative to Start of CAC (sec) |
|------------------------|-----------------------------|--------------------------------|--------------------------------------|
| 30.5 | 100.8 | 70.3 | 2.5 |

Radar Near End of CAC

| Timing of Reboot (sec) | Timing of Radar Burst (sec) | Radar Relative to Reboot (sec) | Radar Relative to Start of CAC (sec) |
|------------------------|-----------------------------|--------------------------------|--------------------------------------|
| 30.71 | 155.9 | 125.2 | 57.4 |

QUALITATIVE RESULTS


| Timing of Radar Burst | Display on Control Computer | Spectrum Analyzer Display |
|-------------------------------|------------------------------|---|
| No Radar Triggered | EUT marks Channel as active | Transmissions begin on channel after completion of the initial power-up cycle and the CAC |
| Within 0 to 6 second window | EUT indicates radar detected | No transmissions on channel |
| Within 54 to 60 second window | EUT indicates radar detected | No transmissions on channel |

TIMING WITHOUT RADAR DURING CAC

AP is rebooted
 Traffic ceases
 Start of Initial Power-up cycle

End of Initial Power-up cycle
 Start of CAC

End of CAC
 Traffic is Initiated

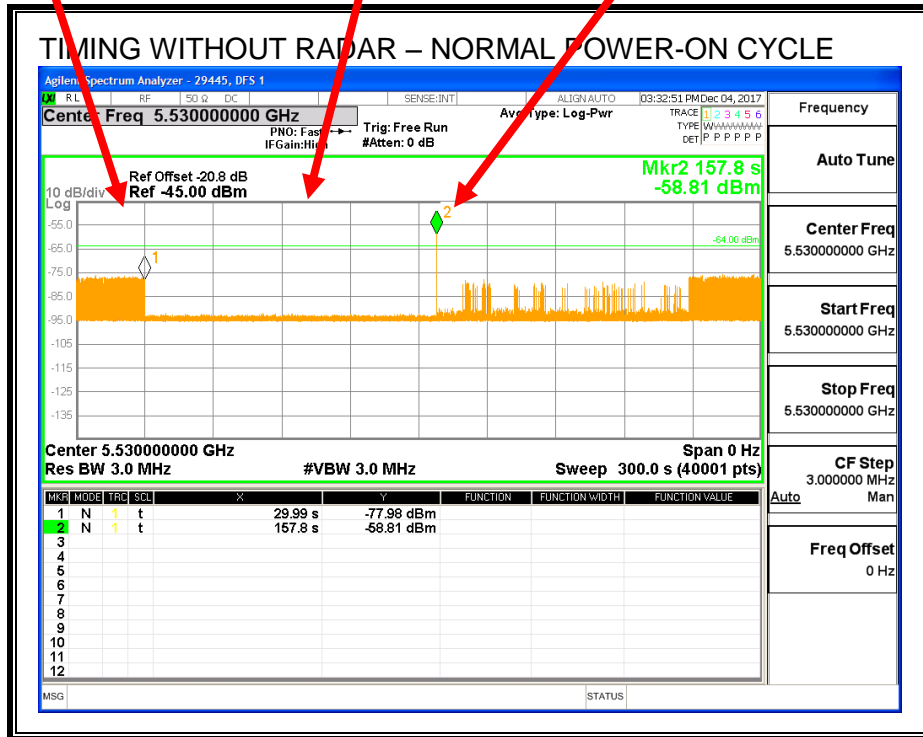


Transmissions begin on channel after completion of the initial power-up cycle and the CAC.

TIMING WITH RADAR NEAR BEGINNING OF CAC

AP is rebooted
 Traffic ceases
 Start of Initial Power-up cycle

End of Initial Power-up cycle
 Start of CAC

Radar Signal Applied

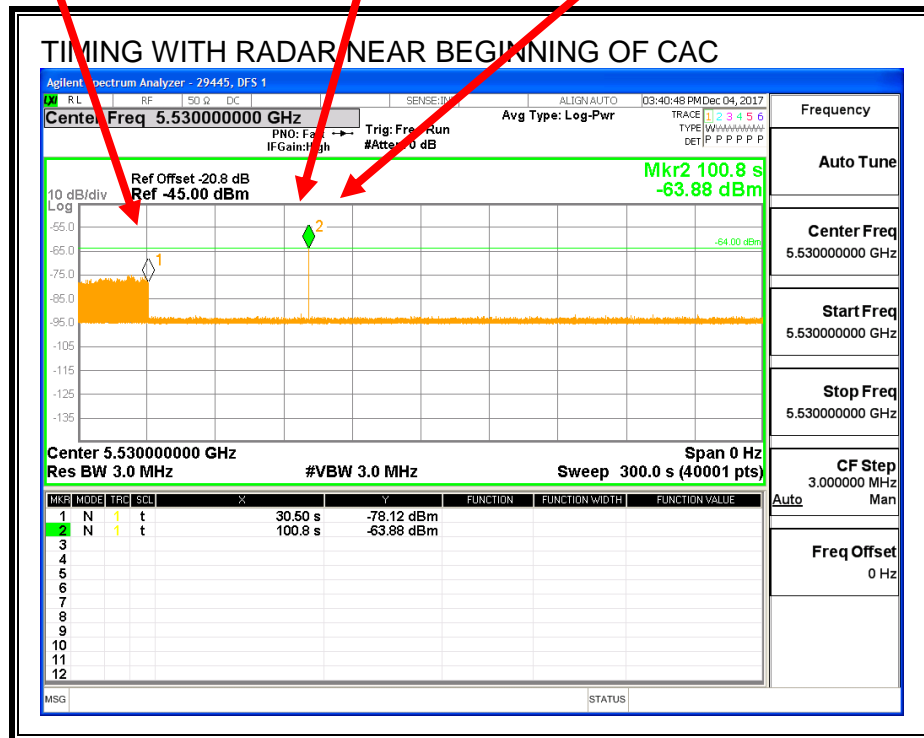


No EUT transmissions were observed after the radar signal.

TIMING WITH RADAR NEAR END OF CAC

AP is rebooted
 Traffic ceases
 Start of Initial Power-up cycle

End of Initial Power-up cycle
 Start of CAC

Radar Signal Applied

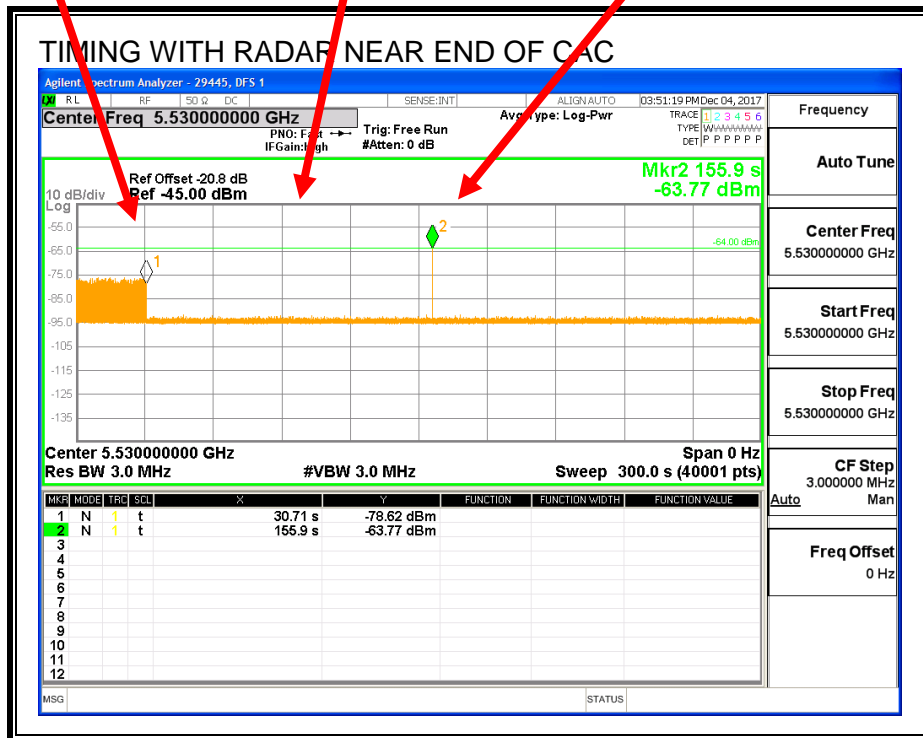

No EUT transmissions were observed after the radar signal.

6.4.2. OVERLAPPING CHANNEL TESTS

RESULTS

The channel spacing is not less than the channel bandwidth therefore the EUT does not have an overlapping channel plan.

6.4.3. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


| Channel Move Time (sec) | Limit (sec) |
|----------------------------|----------------|
| 0.5484 | 10 |

| Aggregate Channel Closing Transmission Time (msec) | Limit (msec) |
|---|-----------------|
| 0.4 | 60 |

MOVE TIME

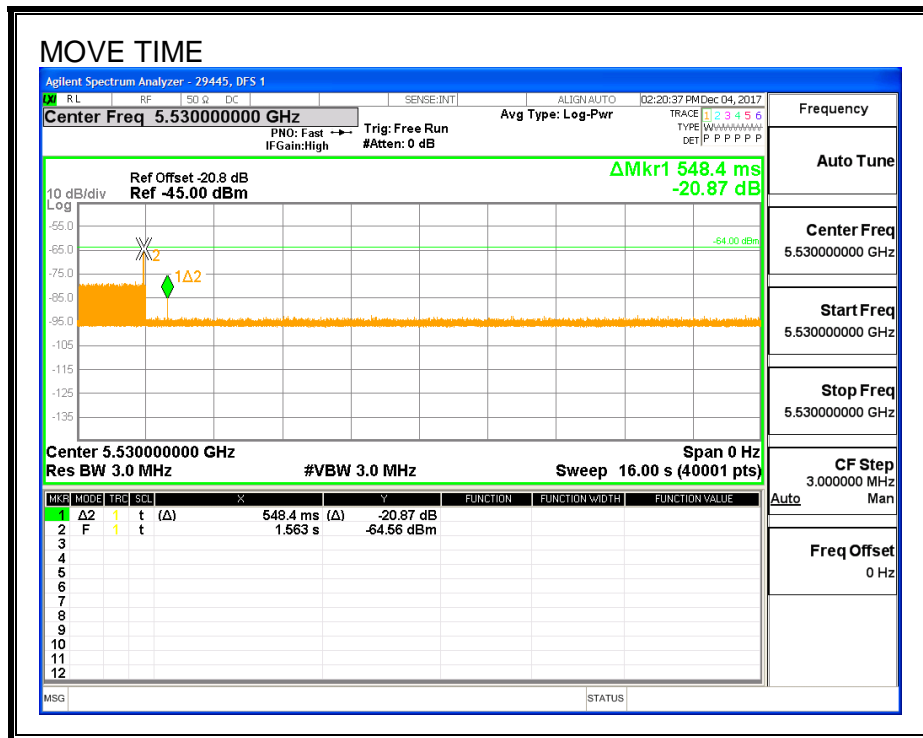


CHANNEL CLOSING TIME

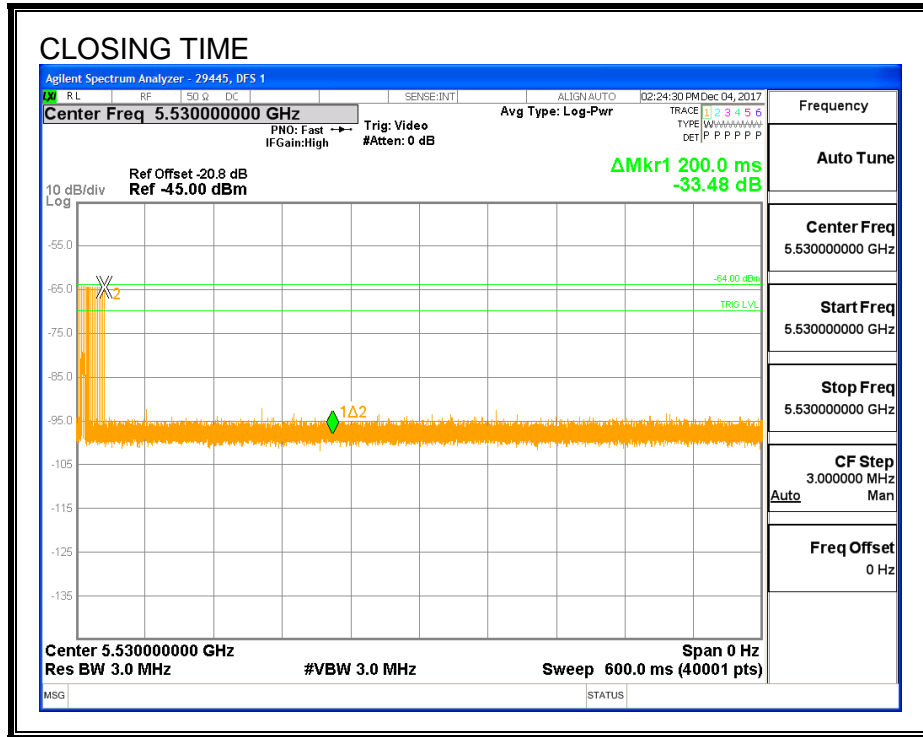


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.

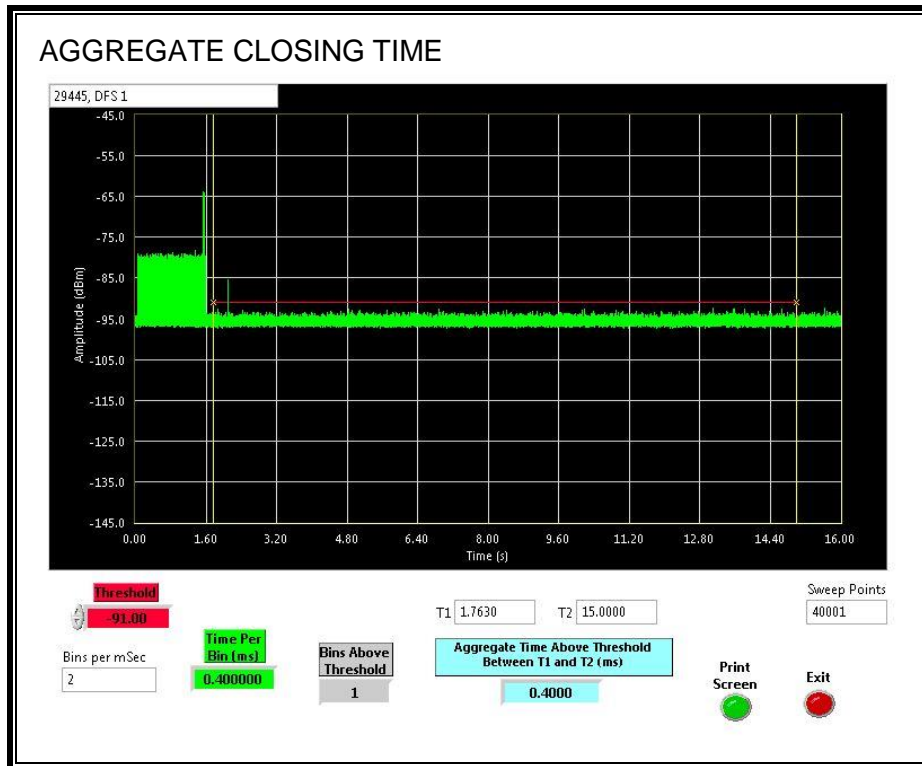

LONG PULSE CHANNEL MOVE TIME


The traffic ceases prior to 10 seconds after the end of the radar waveform.

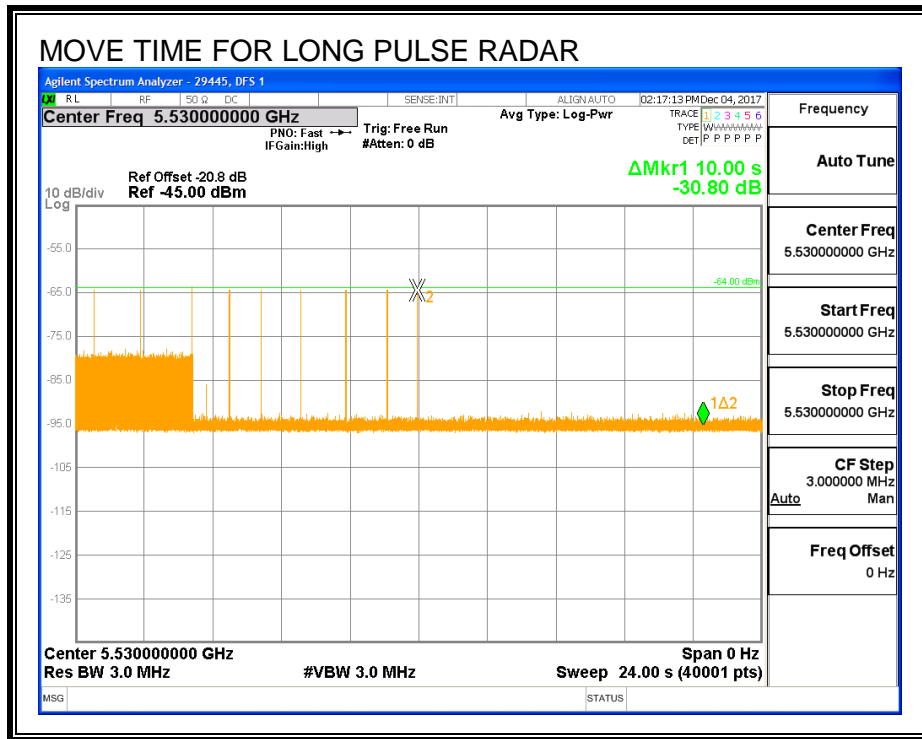

6.4.1. NON-OCCUPANCY PERIOD


RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

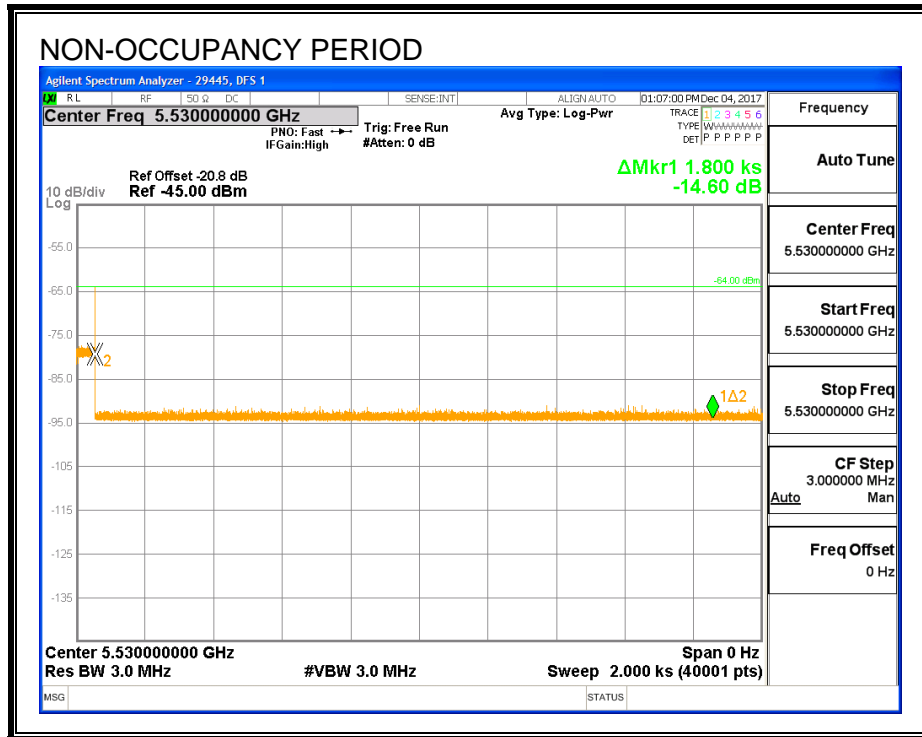

6.4.2. DETECTION BANDWIDTH

REFERENCE PLOT OF 99% POWER BANDWIDTH

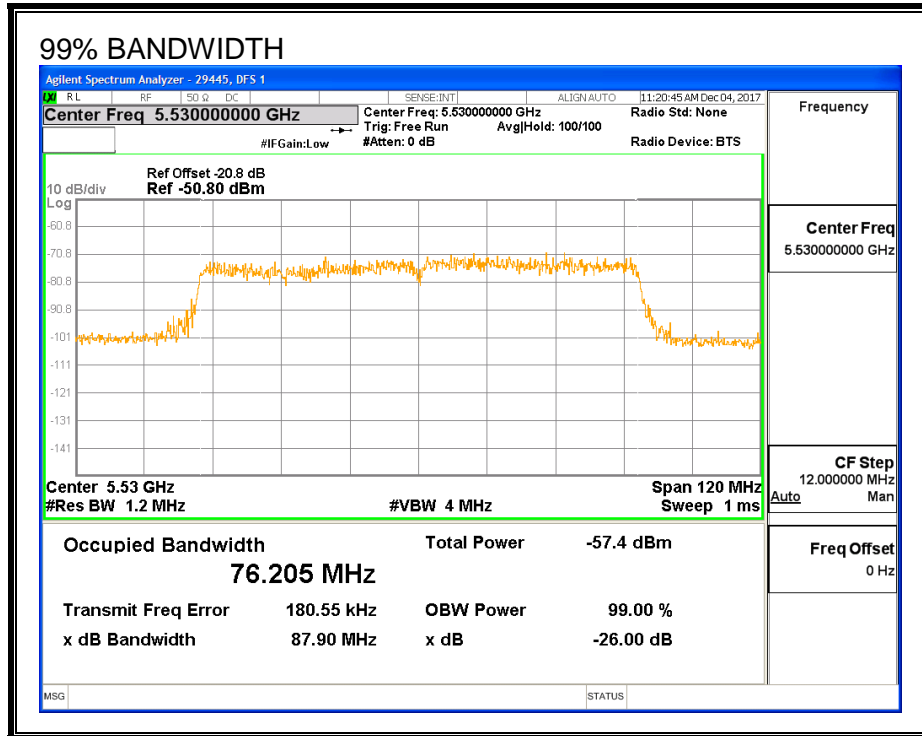

RESULTS

| FL | FH | Detection Bandwidth | 99% Power Bandwidth | Ratio of Detection BW to 99% Power BW | Minimum Limit |
|-------|-------|---------------------|---------------------|---------------------------------------|---------------|
| (MHz) | (MHz) | (MHz) | (MHz) | (%) | (%) |
| 5490 | 5570 | 80 | 76.205 | 105.0 | 100 |

DETECTION BANDWIDTH PROBABILITY

| DETECTION BANDWIDTH PROBABILITY RESULTS | | | | |
|--|-------------------------|------------------------|----------------------|-------------|
| Detection Bandwidth Test Results | | 29445 | DFS 1 | |
| FCC Type 0 Waveform: 1 us Pulse Width, 1428 us PRI, 18 Pulses per Burst | | | | |
| Frequency (MHz) | Number of Trials | Number Detected | Detection (%) | Mark |
| 5490 | 10 | 10 | 100 | FL |
| 5495 | 10 | 10 | 100 | |
| 5500 | 10 | 10 | 100 | |
| 5505 | 10 | 10 | 100 | |
| 5510 | 10 | 10 | 100 | |
| 5515 | 10 | 10 | 100 | |
| 5520 | 10 | 10 | 100 | |
| 5525 | 10 | 10 | 100 | |
| 5530 | 10 | 10 | 100 | |
| 5535 | 10 | 10 | 100 | |
| 5540 | 10 | 10 | 100 | |
| 5545 | 10 | 10 | 100 | |
| 5550 | 10 | 10 | 100 | |
| 5555 | 10 | 10 | 100 | |
| 5560 | 10 | 10 | 100 | |
| 5565 | 10 | 10 | 100 | |
| 5570 | 10 | 10 | 100 | FH |

6.4.3. IN-SERVICE MONITORING

RESULTS

| FCC Radar Test Summary | | | | | | | | | | |
|------------------------|------------------|---------------|-----------|-----------|---------------------|------|------|---------------|-----------------|-------------------------------|
| Signal Type | Number of Trials | Detection (%) | Limit (%) | Pass/Fail | Detection Bandwidth | | | Test Location | Employee Number | In-Service Monitoring Version |
| | | | | | FL | FH | OBW | | | |
| FCC Short Pulse Type 1 | 30 | 96.67 | 60 | Pass | 5490 | 5570 | 76.2 | DFS 1 | 29445 | Version 3.0 |
| FCC Short Pulse Type 2 | 30 | 76.67 | 60 | Pass | 5490 | 5570 | 76.2 | DFS 1 | 29445 | Version 3.0 |
| FCC Short Pulse Type 3 | 30 | 96.67 | 60 | Pass | 5490 | 5570 | 76.2 | DFS 1 | 29445 | Version 3.0 |
| FCC Short Pulse Type 4 | 30 | 90.00 | 60 | Pass | 5490 | 5570 | 76.2 | DFS 1 | 29445 | Version 3.0 |
| Aggregate | | 90.00 | 80 | Pass | | | | | | |
| FCC Long Pulse Type 5 | 30 | 100.00 | 80 | Pass | 5490 | 5570 | 76.2 | DFS 1 | 29445 | Version 3.0 |
| FCC Hopping Type 6 | 81 | 100.00 | 70 | Pass | 5490 | 5570 | | DFS 1 | 29445 | Version 3.0 |

TYPE 1 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 1 | | | | | | |
|---|------------------|----------|------------------|------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Test (A/B) | Frequency (MHz) | Successful Detection (Yes/No) |
| 1001 | 1 | 3066 | 18 | A | 5500 | Yes |
| 1002 | 1 | 578 | 92 | A | 5534 | Yes |
| 1003 | 1 | 918 | 58 | A | 5558 | Yes |
| 1004 | 1 | 778 | 68 | A | 5536 | Yes |
| 1005 | 1 | 738 | 72 | A | 5497 | Yes |
| 1006 | 1 | 858 | 62 | A | 5531 | Yes |
| 1007 | 1 | 818 | 65 | A | 5522 | No |
| 1008 | 1 | 518 | 102 | A | 5497 | Yes |
| 1009 | 1 | 938 | 57 | A | 5550 | Yes |
| 1010 | 1 | 838 | 63 | A | 5496 | Yes |
| 1011 | 1 | 658 | 81 | A | 5532 | Yes |
| 1012 | 1 | 598 | 89 | A | 5510 | Yes |
| 1013 | 1 | 758 | 70 | A | 5509 | Yes |
| 1014 | 1 | 878 | 61 | A | 5535 | Yes |
| 1015 | 1 | 538 | 99 | A | 5497 | Yes |
| 1016 | 1 | 695 | 76 | B | 5493 | Yes |
| 1017 | 1 | 3004 | 18 | B | 5538 | Yes |
| 1018 | 1 | 1895 | 28 | B | 5502 | Yes |
| 1019 | 1 | 1786 | 30 | B | 5494 | Yes |
| 1020 | 1 | 2001 | 27 | B | 5564 | Yes |
| 1021 | 1 | 827 | 64 | B | 5499 | Yes |
| 1022 | 1 | 2525 | 21 | B | 5491 | Yes |
| 1023 | 1 | 1480 | 36 | B | 5509 | Yes |
| 1024 | 1 | 2113 | 25 | B | 5520 | Yes |
| 1025 | 1 | 1198 | 45 | B | 5518 | Yes |
| 1026 | 1 | 1960 | 27 | B | 5546 | Yes |
| 1027 | 1 | 1174 | 45 | B | 5554 | Yes |
| 1028 | 1 | 871 | 61 | B | 5568 | Yes |
| 1029 | 1 | 1568 | 34 | B | 5568 | Yes |
| 1030 | 1 | 2589 | 21 | B | 5559 | Yes |

TYPE 2 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 2 | | | | | |
|---|------------------|----------|------------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Frequency (MHz) | Successful Detection (Yes/No) |
| 2001 | 1.4 | 157 | 26 | 5541 | No |
| 2002 | 1.1 | 230 | 27 | 5504 | Yes |
| 2003 | 3.5 | 215 | 29 | 5495 | Yes |
| 2004 | 1.4 | 211 | 23 | 5545 | Yes |
| 2005 | 2.1 | 201 | 29 | 5565 | Yes |
| 2006 | 4.4 | 163 | 24 | 5552 | No |
| 2007 | 1.2 | 156 | 23 | 5537 | Yes |
| 2008 | 3.6 | 165 | 29 | 5503 | Yes |
| 2009 | 2.8 | 163 | 28 | 5511 | Yes |
| 2010 | 1.4 | 176 | 27 | 5562 | Yes |
| 2011 | 4.9 | 221 | 24 | 5501 | No |
| 2012 | 3.9 | 158 | 27 | 5537 | Yes |
| 2013 | 3.5 | 169 | 24 | 5537 | Yes |
| 2014 | 4.7 | 190 | 28 | 5508 | No |
| 2015 | 2.6 | 206 | 25 | 5550 | Yes |
| 2016 | 2 | 193 | 29 | 5547 | Yes |
| 2017 | 4.2 | 212 | 27 | 5508 | Yes |
| 2018 | 3.9 | 204 | 25 | 5528 | Yes |
| 2019 | 2.2 | 190 | 26 | 5532 | No |
| 2020 | 4.2 | 185 | 28 | 5501 | No |
| 2021 | 4.9 | 175 | 27 | 5508 | Yes |
| 2022 | 5 | 175 | 25 | 5518 | Yes |
| 2023 | 1.8 | 169 | 24 | 5548 | Yes |
| 2024 | 4.3 | 178 | 23 | 5529 | Yes |
| 2025 | 3.4 | 176 | 26 | 5534 | No |
| 2026 | 4.2 | 189 | 25 | 5534 | Yes |
| 2027 | 1.4 | 153 | 25 | 5544 | Yes |
| 2028 | 4.6 | 170 | 28 | 5538 | Yes |
| 2029 | 4.1 | 181 | 25 | 5554 | Yes |
| 2030 | 1.2 | 203 | 29 | 5494 | Yes |

TYPE 3 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 3 | | | | | |
|---|------------------|----------|------------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Frequency (MHz) | Successful Detection (Yes/No) |
| 3001 | 8.2 | 461 | 17 | 5537 | Yes |
| 3002 | 7.7 | 423 | 17 | 5499 | Yes |
| 3003 | 9.8 | 483 | 18 | 5554 | Yes |
| 3004 | 9.5 | 457 | 17 | 5540 | Yes |
| 3005 | 7.8 | 412 | 16 | 5565 | Yes |
| 3006 | 9.9 | 399 | 18 | 5496 | Yes |
| 3007 | 6.4 | 367 | 18 | 5529 | Yes |
| 3008 | 8.7 | 500 | 18 | 5505 | Yes |
| 3009 | 9.6 | 363 | 17 | 5513 | Yes |
| 3010 | 8 | 258 | 18 | 5513 | Yes |
| 3011 | 7.1 | 384 | 16 | 5495 | Yes |
| 3012 | 7.9 | 292 | 16 | 5518 | Yes |
| 3013 | 7.3 | 431 | 17 | 5506 | Yes |
| 3014 | 8.3 | 485 | 17 | 5557 | Yes |
| 3015 | 7.8 | 268 | 16 | 5565 | No |
| 3016 | 7.1 | 335 | 17 | 5560 | Yes |
| 3017 | 6.9 | 382 | 18 | 5536 | Yes |
| 3018 | 6.4 | 344 | 16 | 5558 | Yes |
| 3019 | 8.5 | 404 | 17 | 5523 | Yes |
| 3020 | 8.2 | 378 | 16 | 5562 | Yes |
| 3021 | 8.7 | 333 | 18 | 5528 | Yes |
| 3022 | 8.6 | 320 | 17 | 5535 | Yes |
| 3023 | 9.2 | 288 | 17 | 5528 | Yes |
| 3024 | 7.4 | 421 | 16 | 5517 | Yes |
| 3025 | 8.3 | 284 | 16 | 5556 | Yes |
| 3026 | 8.9 | 429 | 17 | 5535 | Yes |
| 3027 | 9.9 | 305 | 18 | 5543 | Yes |
| 3028 | 6.6 | 464 | 18 | 5524 | Yes |
| 3029 | 6 | 352 | 16 | 5513 | Yes |
| 3030 | 7 | 288 | 16 | 5520 | Yes |

TYPE 4 DETECTION PROBABILITY

| Data Sheet for FCC Short Pulse Radar Type 4 | | | | | |
|---|------------------|----------|------------------|-----------------|-------------------------------|
| Waveform | Pulse Width (us) | PRI (us) | Pulses Per Burst | Frequency (MHz) | Successful Detection (Yes/No) |
| 4001 | 12.3 | 440 | 15 | 5567 | No |
| 4002 | 19.7 | 255 | 13 | 5567 | Yes |
| 4003 | 19.3 | 303 | 14 | 5552 | Yes |
| 4004 | 18.1 | 264 | 16 | 5516 | Yes |
| 4005 | 13.8 | 324 | 13 | 5548 | Yes |
| 4006 | 13.1 | 298 | 16 | 5544 | Yes |
| 4007 | 14.1 | 253 | 15 | 5549 | Yes |
| 4008 | 13.9 | 374 | 15 | 5553 | Yes |
| 4009 | 15.4 | 342 | 12 | 5550 | Yes |
| 4010 | 11.3 | 341 | 16 | 5555 | Yes |
| 4011 | 13.3 | 455 | 15 | 5500 | Yes |
| 4012 | 14.5 | 350 | 12 | 5539 | Yes |
| 4013 | 16.9 | 477 | 14 | 5532 | Yes |
| 4014 | 18.6 | 384 | 14 | 5519 | Yes |
| 4015 | 17.2 | 406 | 16 | 5565 | Yes |
| 4016 | 19.4 | 459 | 16 | 5546 | Yes |
| 4017 | 18.5 | 361 | 14 | 5523 | Yes |
| 4018 | 16.8 | 309 | 16 | 5530 | No |
| 4019 | 16.4 | 474 | 12 | 5525 | No |
| 4020 | 15.2 | 436 | 15 | 5493 | Yes |
| 4021 | 20 | 496 | 16 | 5524 | Yes |
| 4022 | 15.1 | 352 | 14 | 5503 | Yes |
| 4023 | 11.2 | 425 | 13 | 5491 | Yes |
| 4024 | 15.8 | 294 | 14 | 5509 | Yes |
| 4025 | 12.5 | 262 | 13 | 5505 | Yes |
| 4026 | 17.5 | 395 | 14 | 5548 | Yes |
| 4027 | 19.5 | 376 | 14 | 5495 | Yes |
| 4028 | 11.6 | 271 | 13 | 5533 | Yes |
| 4029 | 14 | 397 | 13 | 5507 | Yes |
| 4030 | 15.8 | 438 | 12 | 5518 | Yes |

TYPE 5 DETECTION PROBABILITY

| Data Sheet for FCC Long Pulse Radar Type 5 | | |
|---|------------------------|--------------------------------------|
| Trial | Frequency (MHz) | Successful Detection (Yes/No) |
| 1 | 5530 | Yes |
| 2 | 5530 | Yes |
| 3 | 5530 | Yes |
| 4 | 5530 | Yes |
| 5 | 5530 | Yes |
| 6 | 5530 | Yes |
| 7 | 5530 | Yes |
| 8 | 5530 | Yes |
| 9 | 5530 | Yes |
| 10 | 5530 | Yes |
| 11 | 5496 | Yes |
| 12 | 5498 | Yes |
| 13 | 5496 | Yes |
| 14 | 5498 | Yes |
| 15 | 5499 | Yes |
| 16 | 5498 | Yes |
| 17 | 5498 | Yes |
| 18 | 5500 | Yes |
| 19 | 5494 | Yes |
| 20 | 5496 | Yes |
| 21 | 5563 | Yes |
| 22 | 5565 | Yes |
| 23 | 5563 | Yes |
| 24 | 5563 | Yes |
| 25 | 5562 | Yes |
| 26 | 5562 | Yes |
| 27 | 5565 | Yes |
| 28 | 5560 | Yes |
| 29 | 5561 | Yes |
| 30 | 5560 | Yes |

Note: The Type 5 randomized parameters tested are shown in a separate document.

TYPE 6 DETECTION PROBABILITY

| Data Sheet for FCC Hopping Radar Type 6 | | | | |
|--|---------------------------------------|---|---------------------------------|--------------------------------------|
| 1 us Pulse Width, 333 us PRI, 9 Pulses per Burst, 1 Burst per Hop | | | | |
| NTIA August 2005 Hopping Sequence | | | | |
| Trial | Starting Index Within Sequence | Signal Generator Frequency (MHz) | Hops within Detection BW | Successful Detection (Yes/No) |
| 1 | 350 | 5490 | 9 | Yes |
| 2 | 825 | 5491 | 14 | Yes |
| 3 | 1300 | 5492 | 22 | Yes |
| 4 | 1775 | 5493 | 22 | Yes |
| 5 | 2250 | 5494 | 19 | Yes |
| 6 | 2725 | 5495 | 15 | Yes |
| 7 | 3200 | 5496 | 12 | Yes |
| 8 | 3675 | 5497 | 12 | Yes |
| 9 | 4150 | 5498 | 19 | Yes |
| 10 | 4625 | 5499 | 16 | Yes |
| 11 | 5100 | 5500 | 13 | Yes |
| 12 | 5575 | 5501 | 15 | Yes |
| 13 | 6050 | 5502 | 13 | Yes |
| 14 | 6525 | 5503 | 18 | Yes |
| 15 | 7000 | 5504 | 14 | Yes |
| 16 | 7475 | 5505 | 14 | Yes |
| 17 | 7950 | 5506 | 13 | Yes |
| 18 | 8425 | 5507 | 18 | Yes |
| 19 | 8900 | 5508 | 25 | Yes |
| 20 | 9375 | 5509 | 14 | Yes |
| 21 | 9850 | 5510 | 12 | Yes |
| 22 | 10325 | 5511 | 21 | Yes |
| 23 | 10800 | 5512 | 21 | Yes |
| 24 | 11275 | 5513 | 16 | Yes |
| 25 | 11750 | 5514 | 13 | Yes |
| 26 | 12225 | 5515 | 15 | Yes |
| 27 | 12700 | 5516 | 25 | Yes |
| 28 | 13175 | 5517 | 17 | Yes |
| 29 | 13650 | 5518 | 11 | Yes |
| 30 | 14125 | 5519 | 19 | Yes |
| 31 | 14600 | 5520 | 14 | Yes |
| 32 | 15075 | 5521 | 14 | Yes |
| 33 | 15550 | 5522 | 15 | Yes |
| 34 | 16025 | 5523 | 20 | Yes |
| 35 | 16500 | 5524 | 20 | Yes |
| 36 | 16975 | 5525 | 17 | Yes |
| 37 | 17450 | 5526 | 14 | Yes |
| 38 | 17925 | 5527 | 16 | Yes |
| 39 | 18400 | 5528 | 14 | Yes |

TYPE 6 DETECTION PROBABILITY (CONTINUED)

| | | | | |
|----|-------|------|----|-----|
| 40 | 18875 | 5529 | 16 | Yes |
| 41 | 19350 | 5530 | 22 | Yes |
| 42 | 19825 | 5531 | 17 | Yes |
| 43 | 20300 | 5532 | 14 | Yes |
| 44 | 20775 | 5533 | 9 | Yes |
| 45 | 21250 | 5534 | 19 | Yes |
| 46 | 21725 | 5535 | 18 | Yes |
| 47 | 22200 | 5536 | 11 | Yes |
| 48 | 22675 | 5537 | 13 | Yes |
| 49 | 23150 | 5538 | 13 | Yes |
| 50 | 23625 | 5539 | 15 | Yes |
| 51 | 24100 | 5540 | 17 | Yes |
| 52 | 24575 | 5541 | 18 | Yes |
| 53 | 25050 | 5542 | 16 | Yes |
| 54 | 25525 | 5543 | 20 | Yes |
| 55 | 26000 | 5544 | 17 | Yes |
| 56 | 26475 | 5545 | 18 | Yes |
| 57 | 26950 | 5546 | 15 | Yes |
| 58 | 27425 | 5547 | 19 | Yes |
| 59 | 27900 | 5548 | 21 | Yes |
| 60 | 28375 | 5549 | 14 | Yes |
| 61 | 28850 | 5550 | 17 | Yes |
| 62 | 29325 | 5551 | 20 | Yes |
| 63 | 29800 | 5552 | 14 | Yes |
| 64 | 30275 | 5553 | 17 | Yes |
| 65 | 30750 | 5554 | 15 | Yes |
| 66 | 31225 | 5555 | 20 | Yes |
| 67 | 31700 | 5556 | 17 | Yes |
| 68 | 32175 | 5557 | 20 | Yes |
| 69 | 32650 | 5558 | 22 | Yes |
| 70 | 33125 | 5559 | 18 | Yes |
| 71 | 33600 | 5560 | 21 | Yes |
| 72 | 34075 | 5561 | 20 | Yes |
| 73 | 34550 | 5562 | 15 | Yes |
| 74 | 35025 | 5563 | 24 | Yes |
| 75 | 35500 | 5564 | 19 | Yes |
| 76 | 35975 | 5565 | 23 | Yes |
| 77 | 36450 | 5566 | 14 | Yes |
| 78 | 36925 | 5567 | 16 | Yes |
| 79 | 37400 | 5568 | 17 | Yes |
| 80 | 37875 | 5569 | 18 | Yes |
| 81 | 38350 | 5570 | 14 | Yes |

6.5. APPLICABLE TESTS FOR SLAVE DEVICE CONFIGURATION

6.5.1. APPLICABILITY OF MASTER DEVICE CONFIGURATION TEST RESULTS

The EUT is identical for the two configurations: Master Device, and Slave with Radar Detection. Therefore the performance of the EUT in the Slave Device configuration, when the Slave detects a radar signal, is represented by the above tests of the Master Device Configuration.

6.5.2. ADDITIONAL APPLICABLE TESTS OF SLAVE DEVICE

Per KDB 905462 D02 section 5.1.2, clause c):

If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.

Therefore the following two test conditions must be performed to demonstrate compliance:

Channel shutdown tests to measure the performance of the Slave Device configuration, in response to the detection of a radar signal by the Master Device, are applicable.

Channel shutdown tests to measure the performance of the Master Device configuration, in response to the detection of a radar signal by the Slave Device, are applicable.


6.6. SLAVE DEVICE CONFIGURATION RESULTS FOR 20 MHz BANDWIDTH

6.6.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

6.6.2. RADAR WAVEFORM AND TRAFFIC


RADAR WAVEFORM

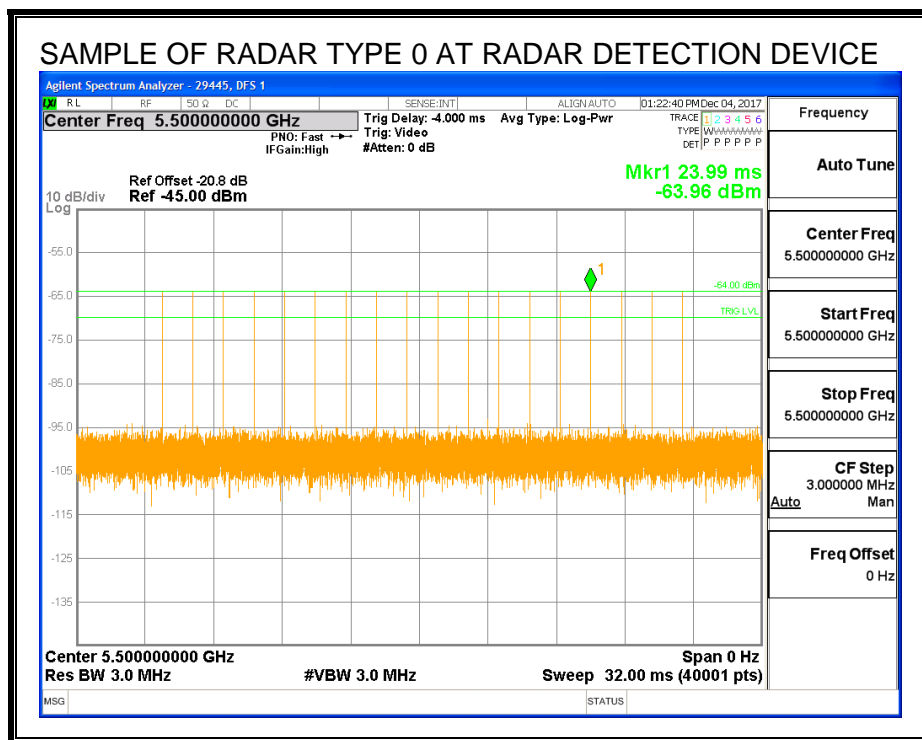

TRAFFIC

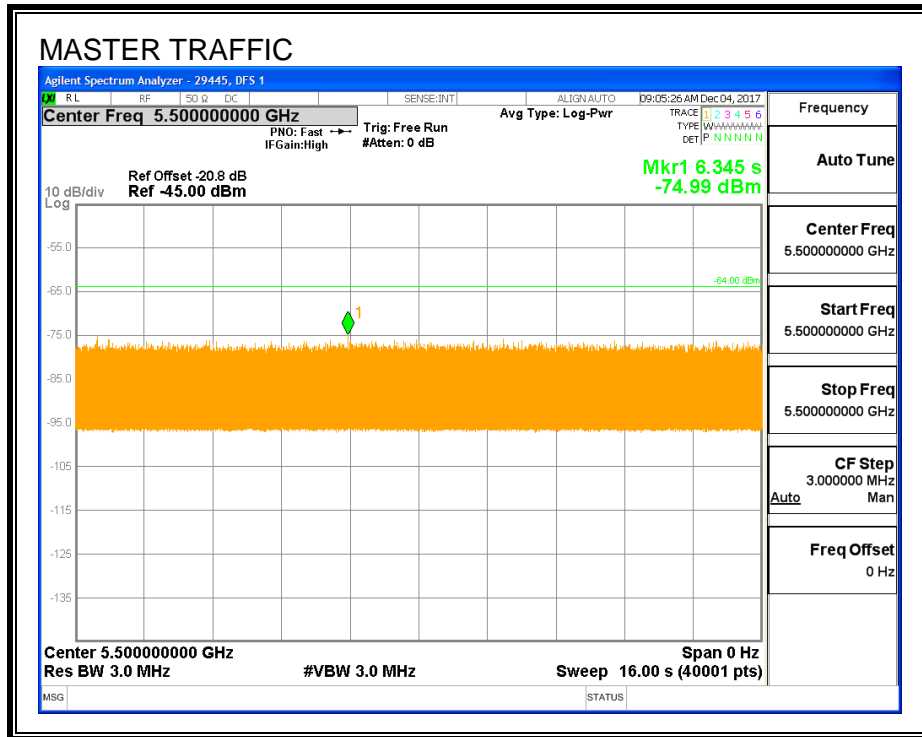


CHANNEL LOADING

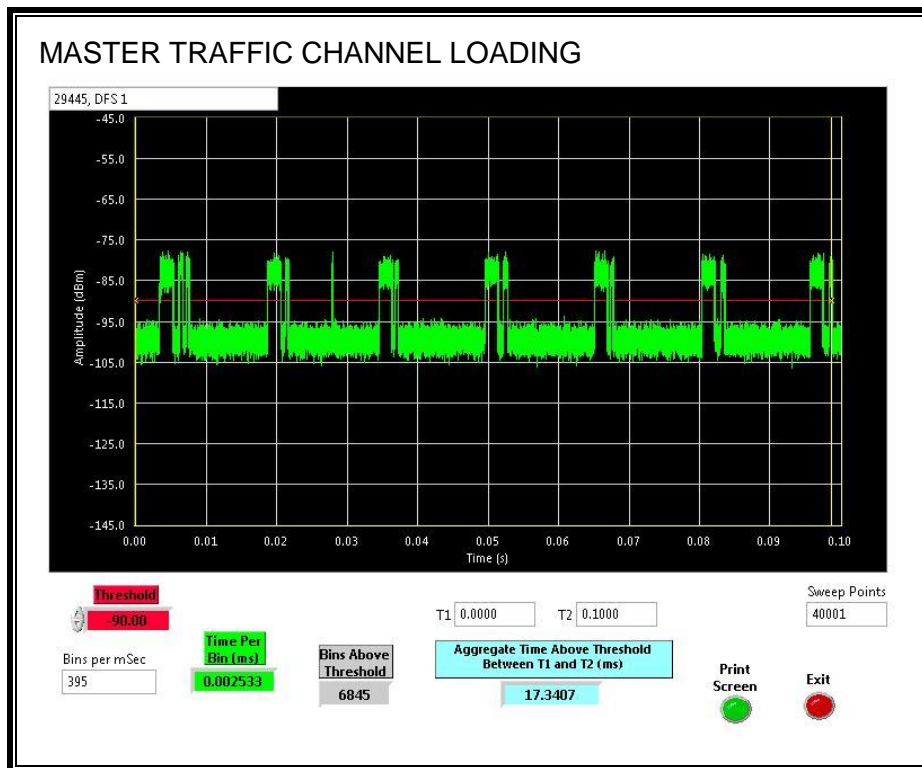


The level of traffic loading on the channel by the EUT is 17.34%.

TRAFFIC

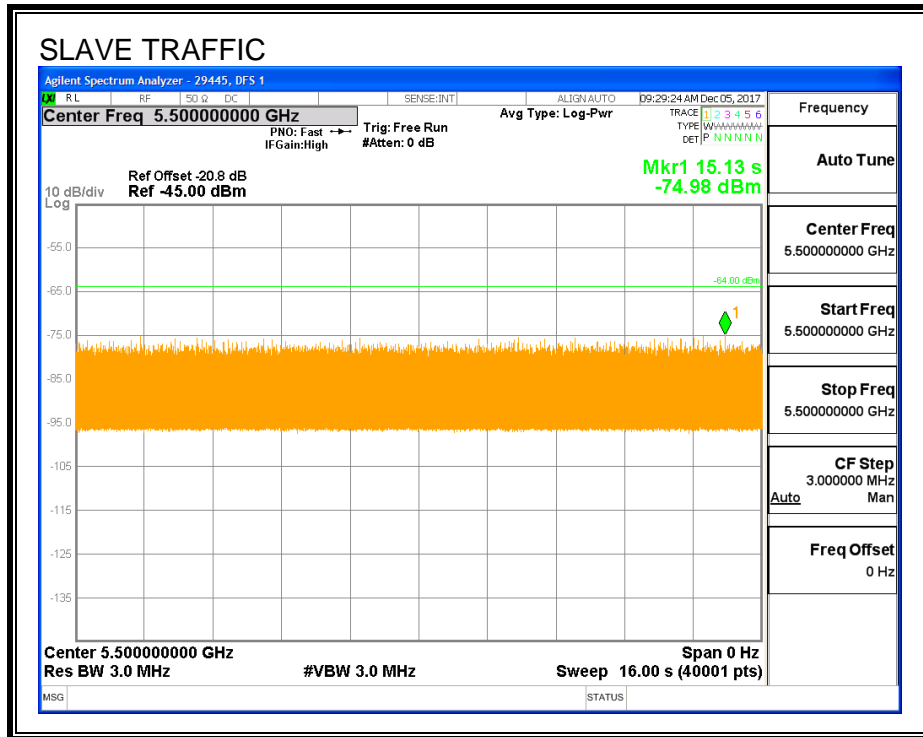

CHANNEL LOADING

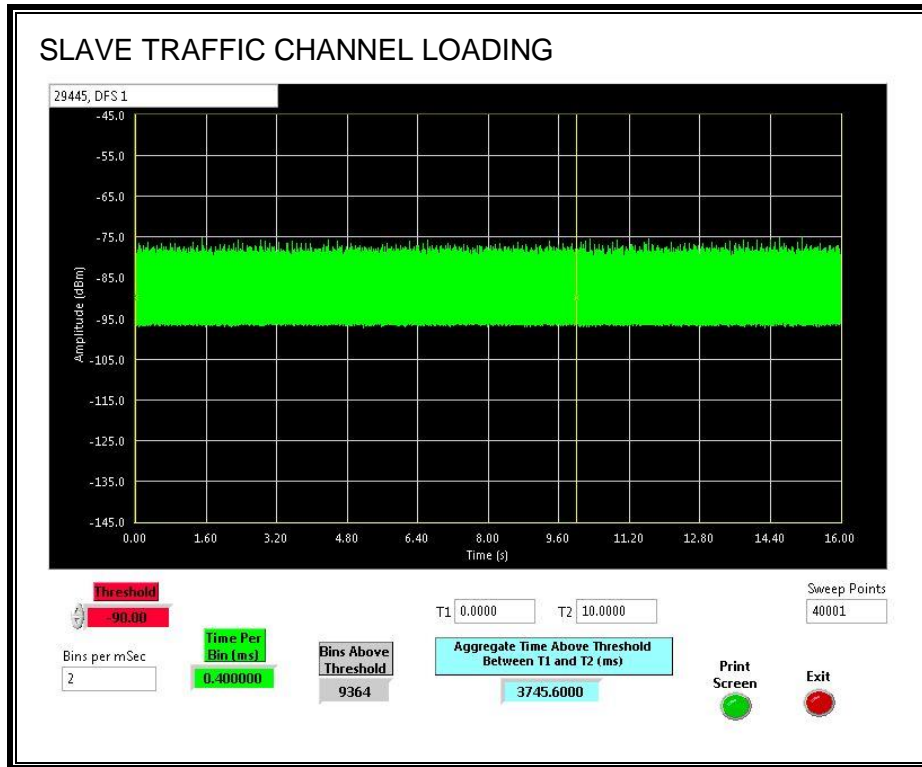

The level of traffic loading on the channel by the EUT is 37.45%.

6.6.3. MOVE AND CLOSING TIME OF SLAVE DEVICE IN RESPONSE TO DETECTION BY MASTER DEVICE

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


| Channel Move Time (sec) | Limit (sec) |
|----------------------------|----------------|
| 0.6228 | 10 |

| Aggregate Channel Closing Transmission Time (msec) | Limit (msec) |
|---|-----------------|
| 4.0 | 60 |

MOVE TIME

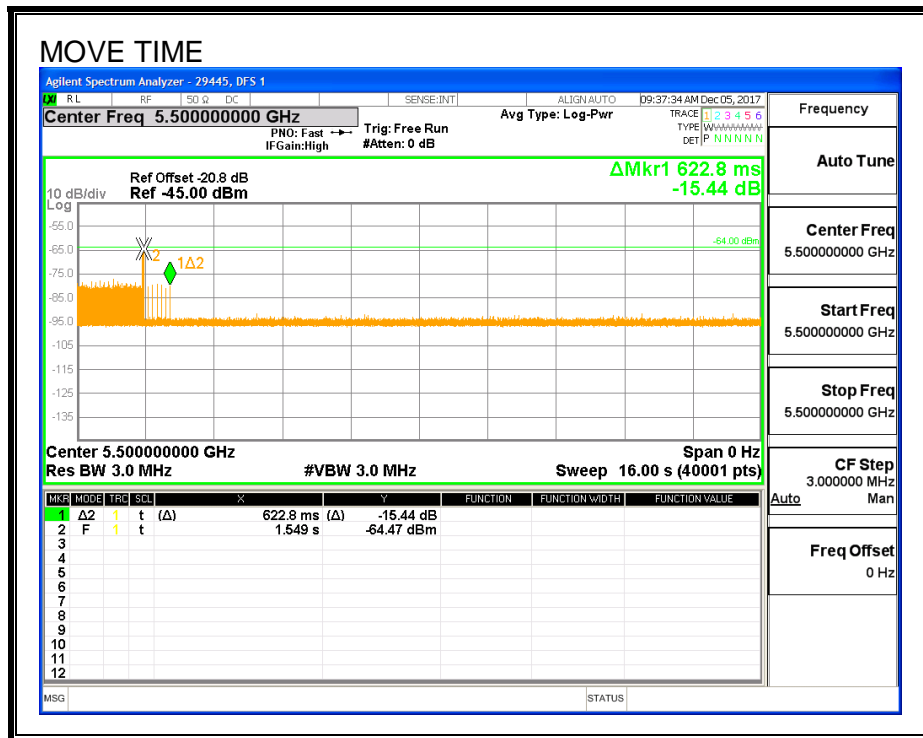


CHANNEL CLOSING TIME

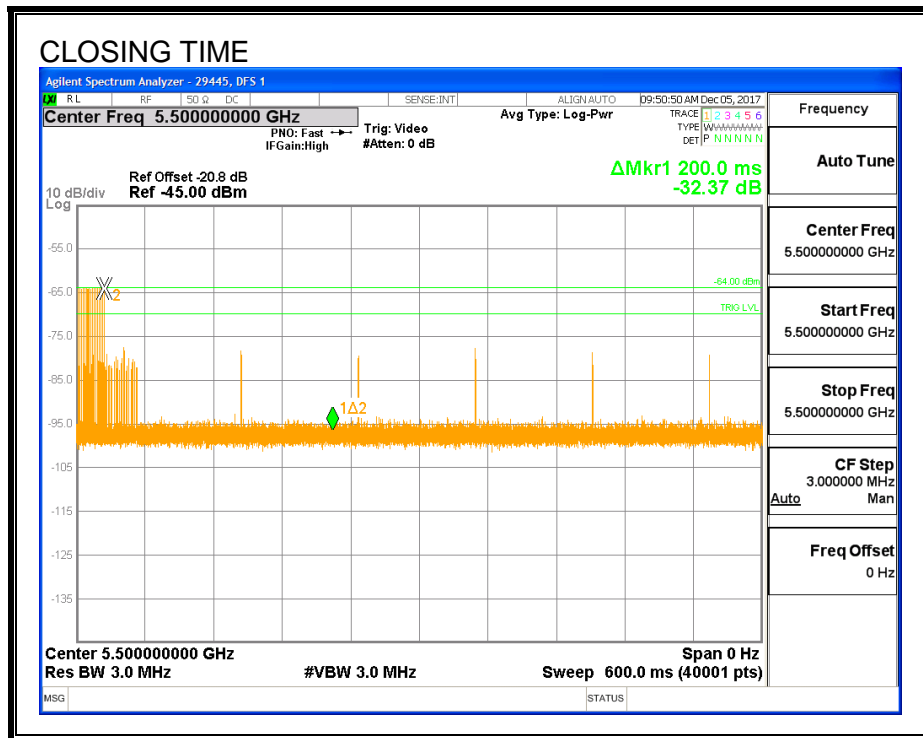

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.

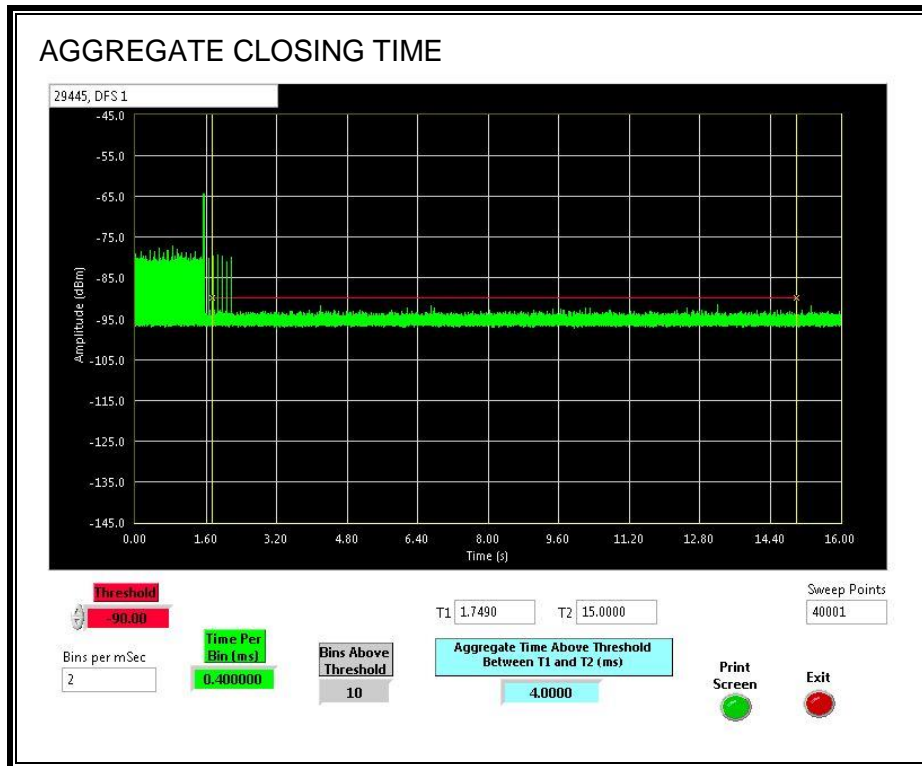

6.6.4. MOVE AND CLOSING TIME OF MASTER DEVICE IN RESPONSE TO DETECTION BY SLAVE DEVICE

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


| Channel Move Time (sec) | Limit (sec) |
|----------------------------|----------------|
| 0.5152 | 10 |

| Aggregate Channel Closing Transmission Time (msec) | Limit (msec) |
|---|-----------------|
| 5.2 | 60 |

MOVE TIME

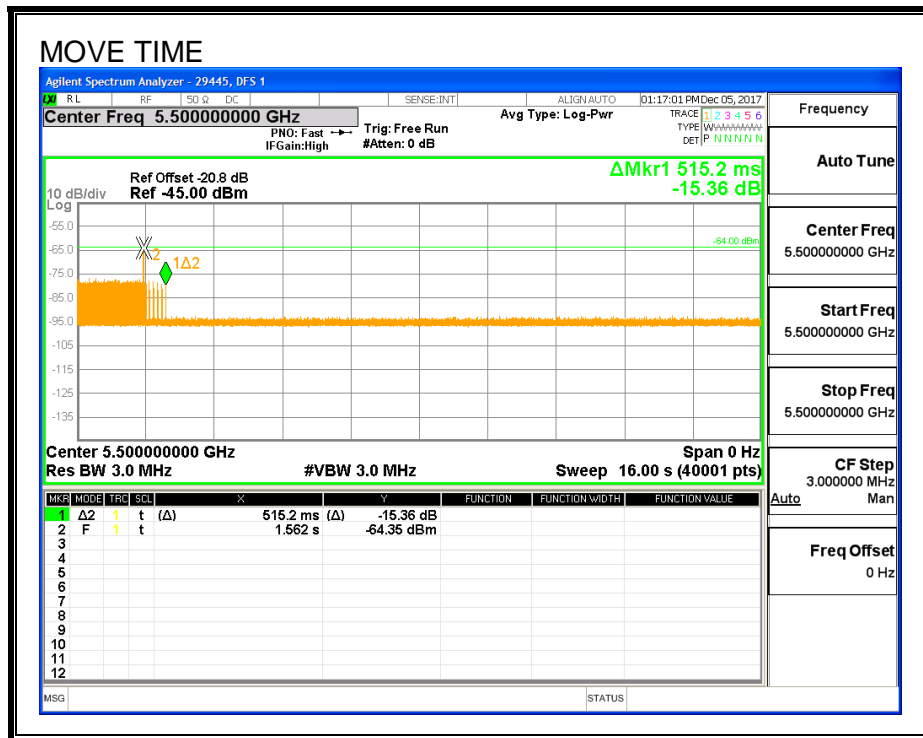


CHANNEL CLOSING TIME

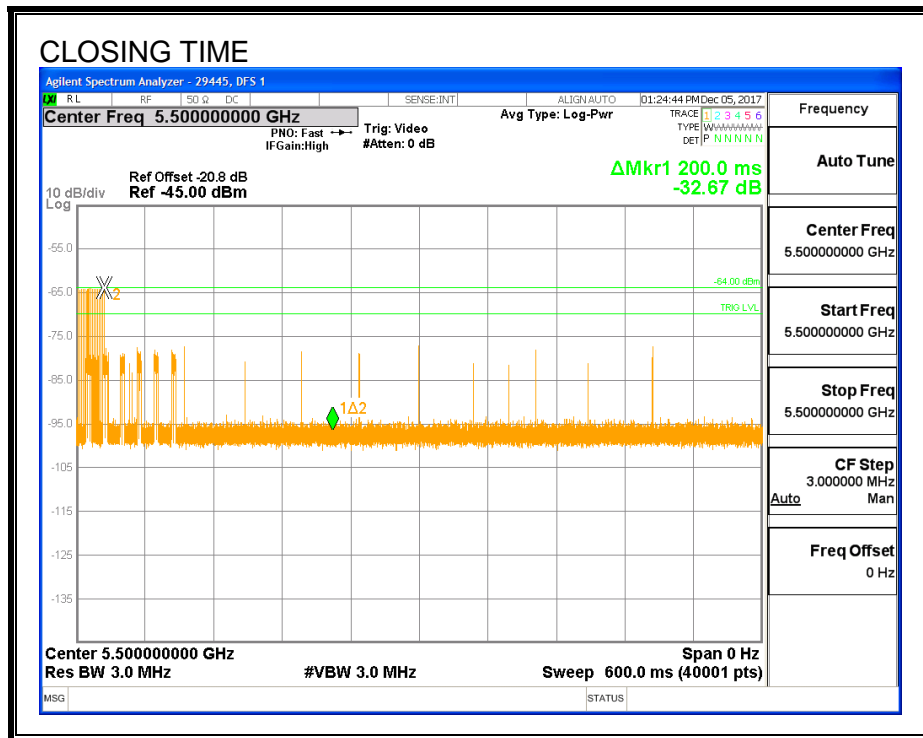

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.

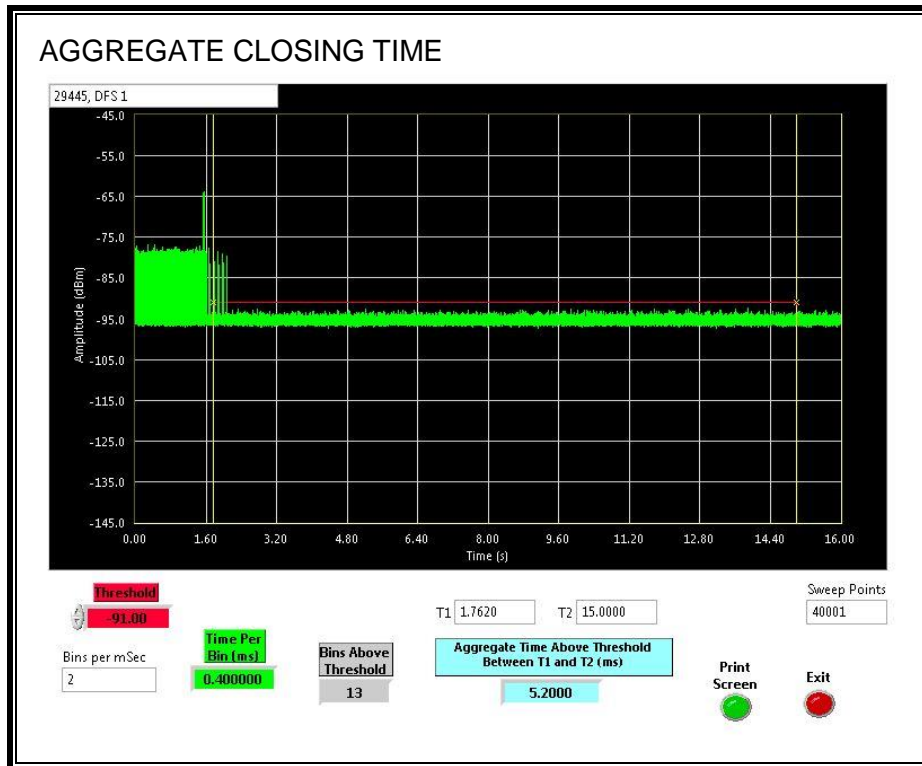


6.7. SLAVE DEVICE CONFIGURATION RESULTS FOR 40 MHz BANDWIDTH

6.7.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

6.7.2. RADAR WAVEFORM AND TRAFFIC


RADAR WAVEFORM

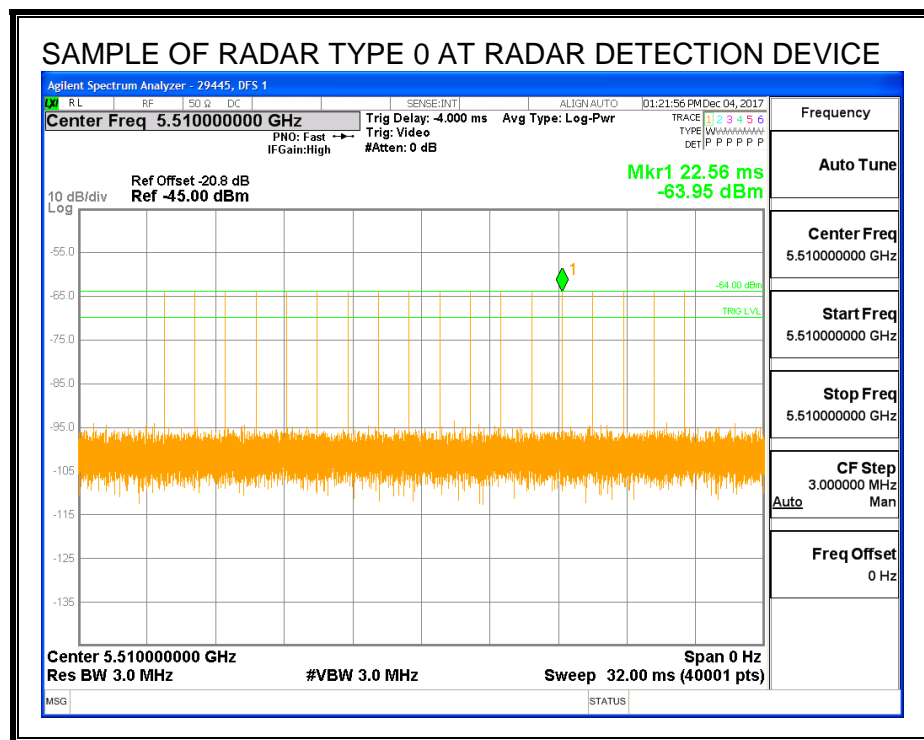

TRAFFIC

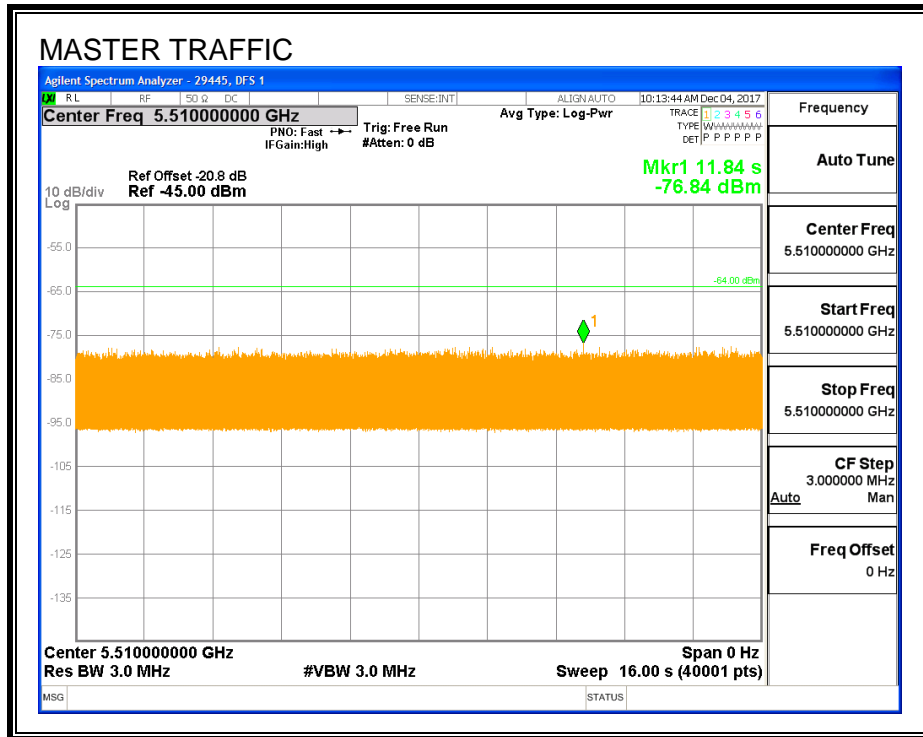


CHANNEL LOADING

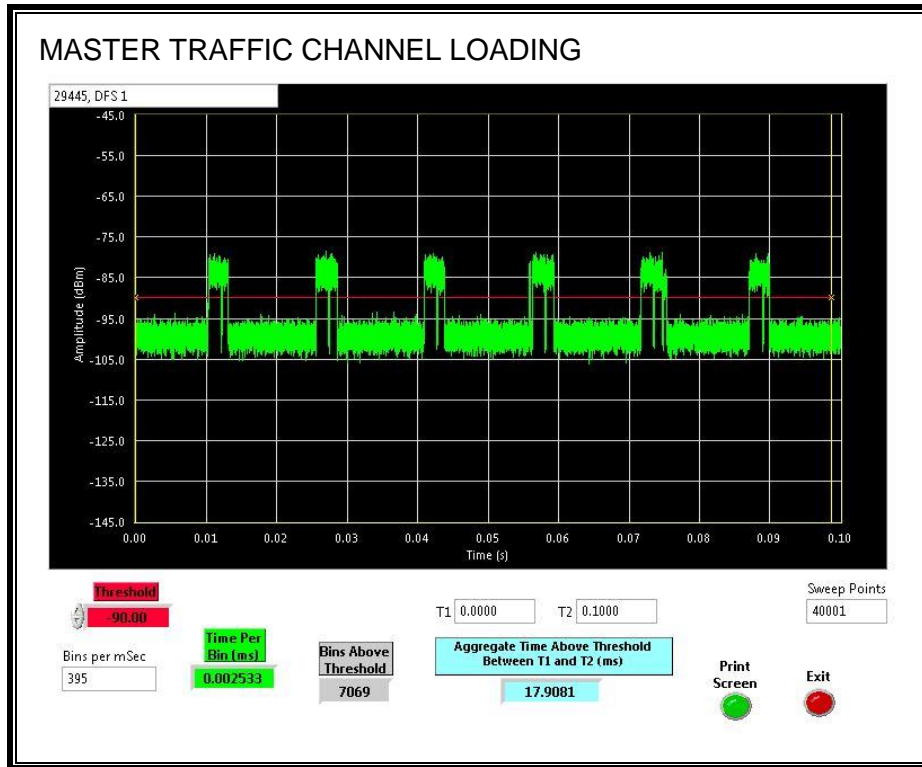


The level of traffic loading on the channel by the EUT is 17.9%.

TRAFFIC

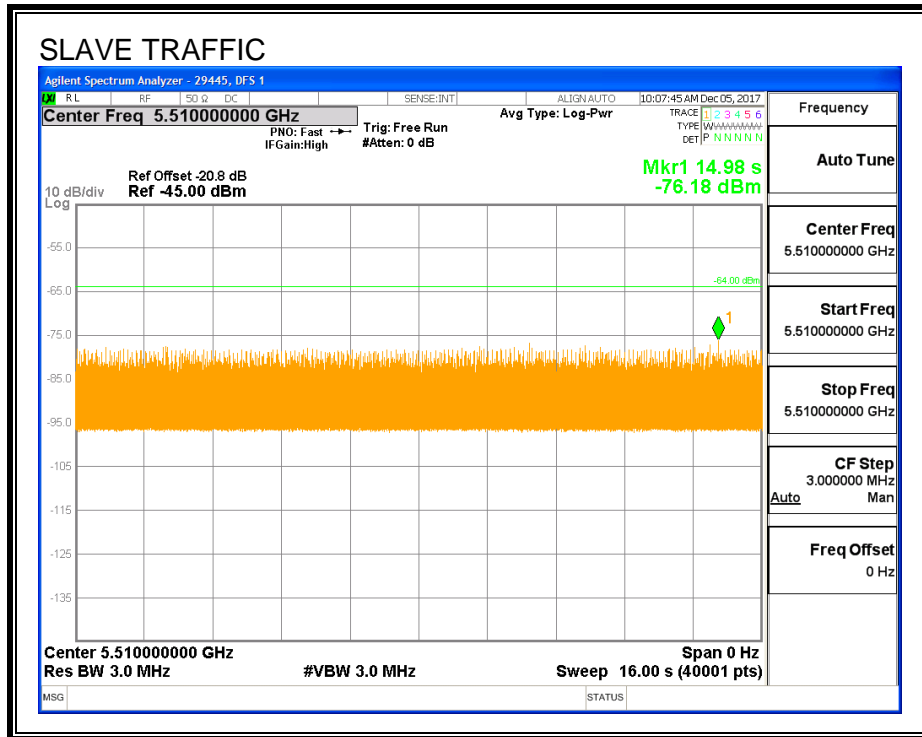

CHANNEL LOADING

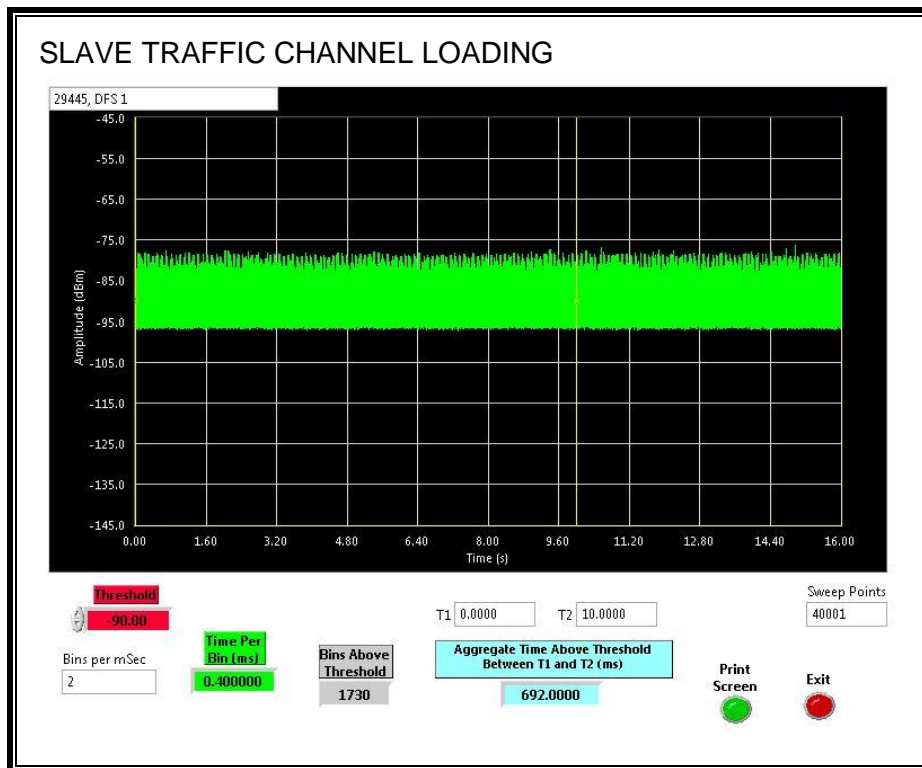

The level of traffic loading on the channel by the EUT is 6.92%.

The traffic loading of the Slave device became saturated at a level below the 17% requirement. Therefore the traffic loading by the Slave device that was measured represents the level attained while the Master device meets the 17% requirement.

6.7.3. MOVE AND CLOSING TIME OF SLAVE DEVICE IN RESPONSE TO DETECTION BY MASTER DEVICE

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


| Channel Move Time (sec) | Limit (sec) |
|----------------------------|----------------|
| 0.6204 | 10 |

| Aggregate Channel Closing Transmission Time (msec) | Limit (msec) |
|---|-----------------|
| 4.0 | 60 |

MOVE TIME

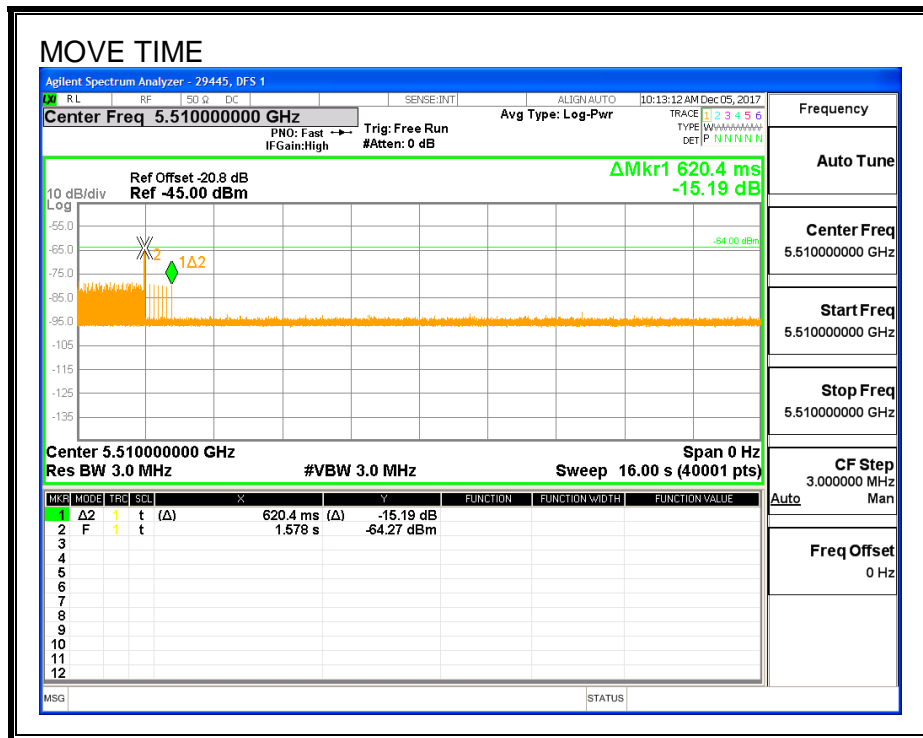


CHANNEL CLOSING TIME

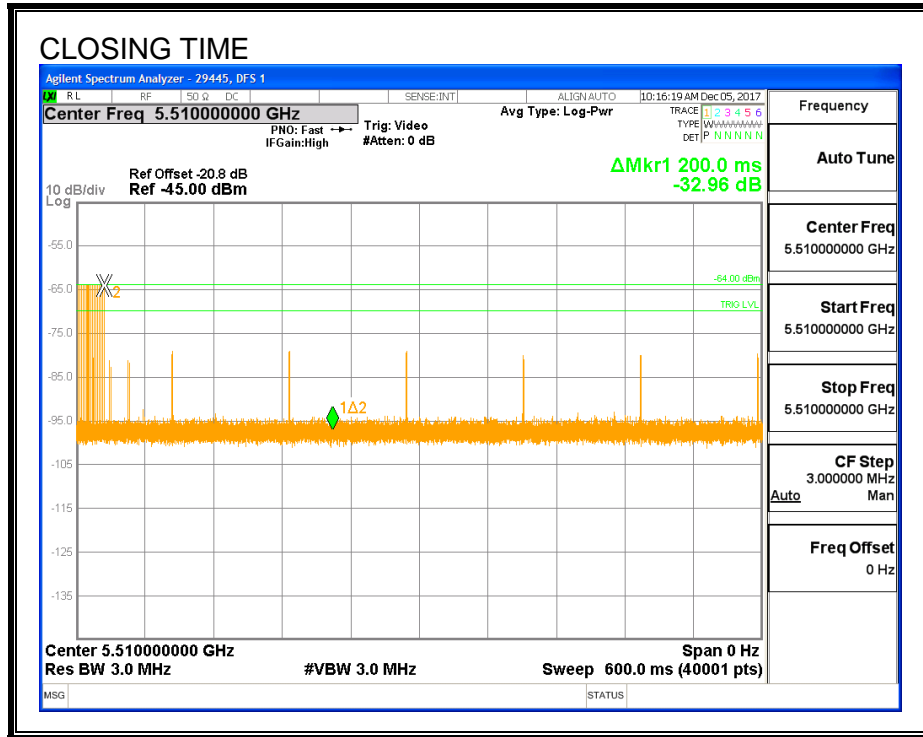

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.

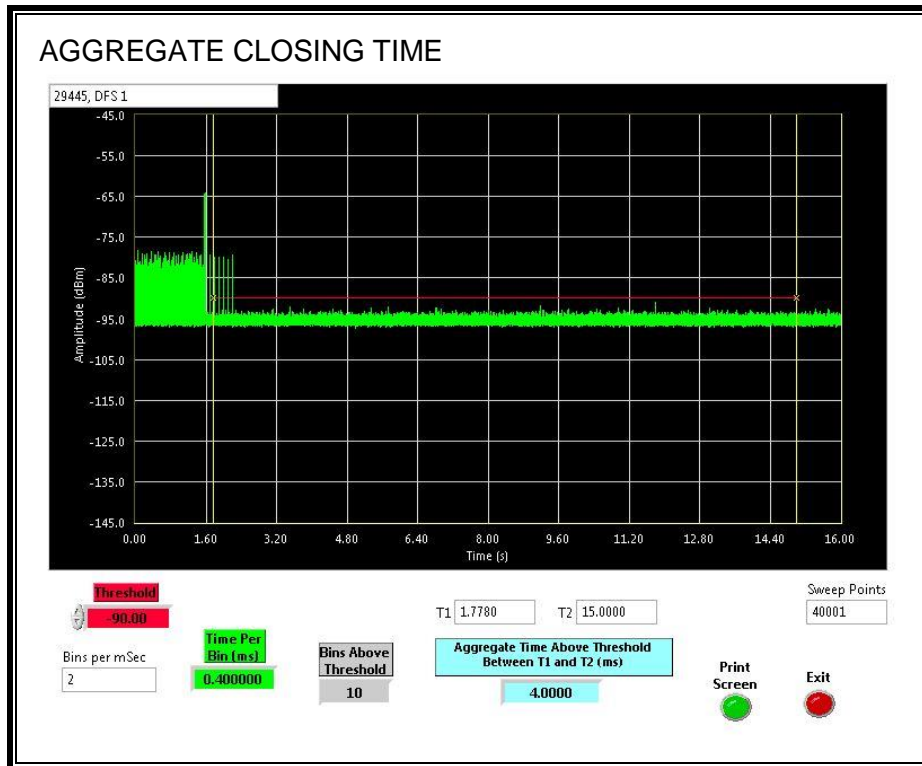

6.7.4. MOVE AND CLOSING TIME OF MASTER DEVICE IN RESPONSE TO DETECTION BY SLAVE DEVICE

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


| Channel Move Time (sec) | Limit (sec) |
|----------------------------|----------------|
| 0.5876 | 10 |

| Aggregate Channel Closing Transmission Time (msec) | Limit (msec) |
|---|-----------------|
| 7.6 | 60 |

MOVE TIME

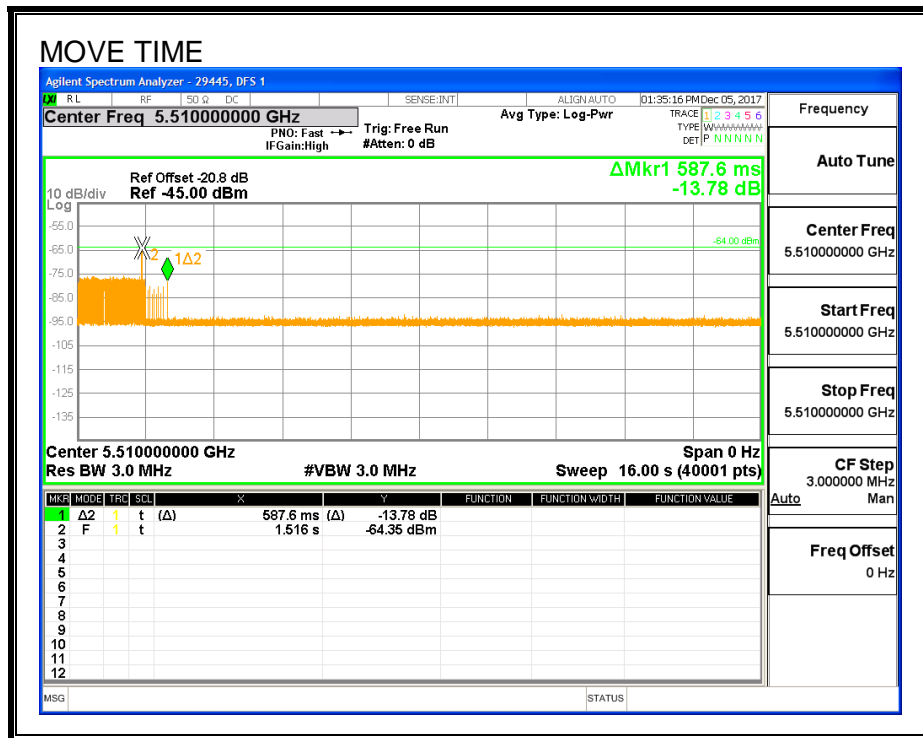


CHANNEL CLOSING TIME

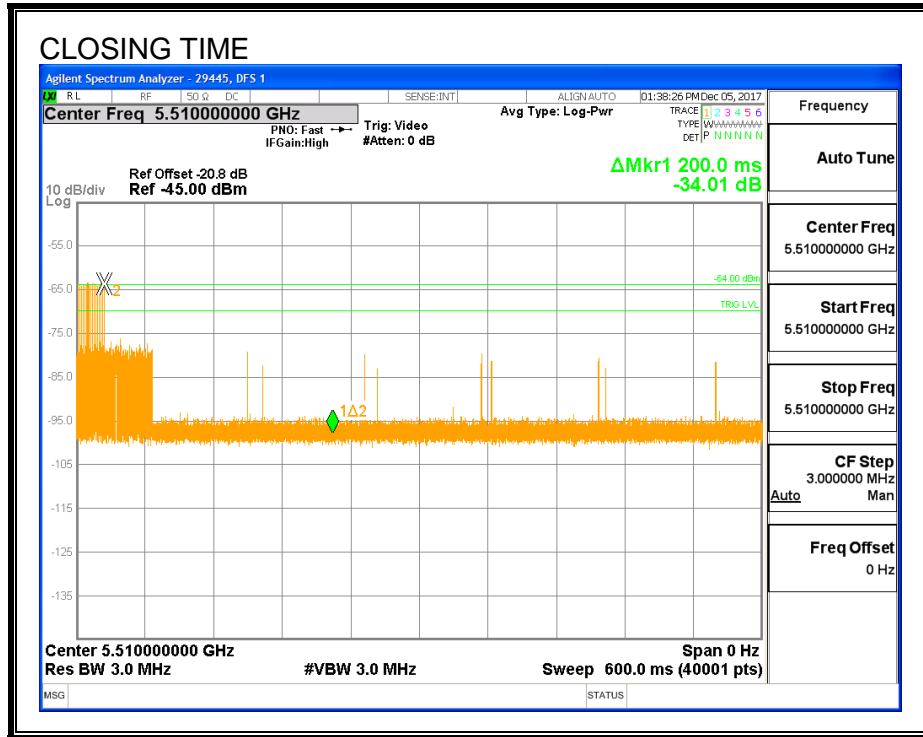

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.

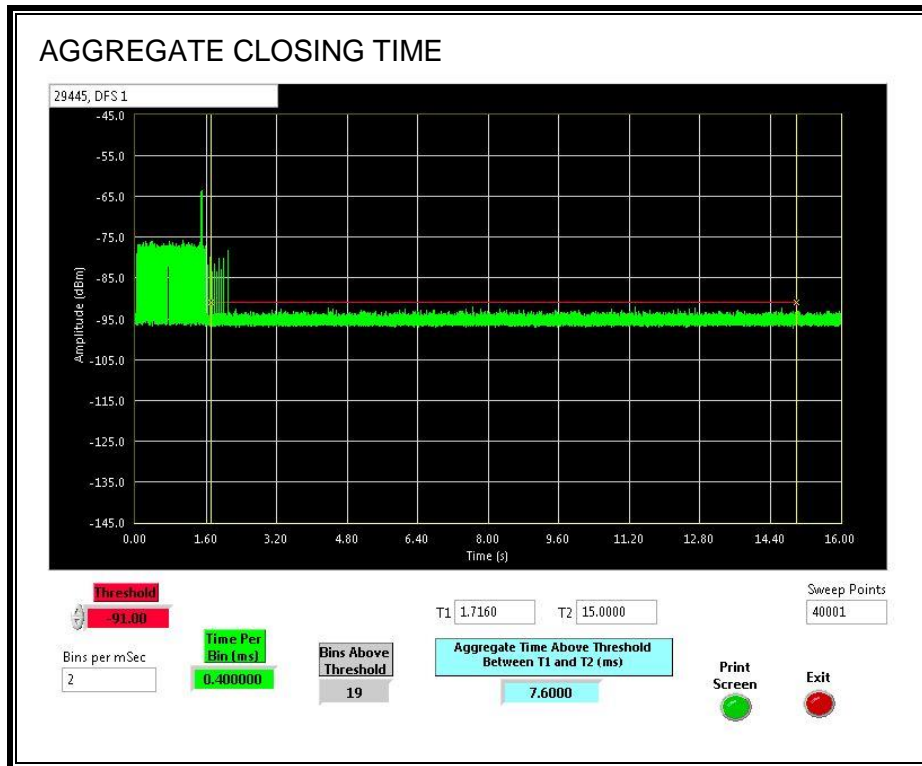


6.8. SLAVE DEVICE CONFIGURATION RESULTS FOR 80 MHz BANDWIDTH

6.8.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5530 MHz.

6.8.2. RADAR WAVEFORM AND TRAFFIC


RADAR WAVEFORM

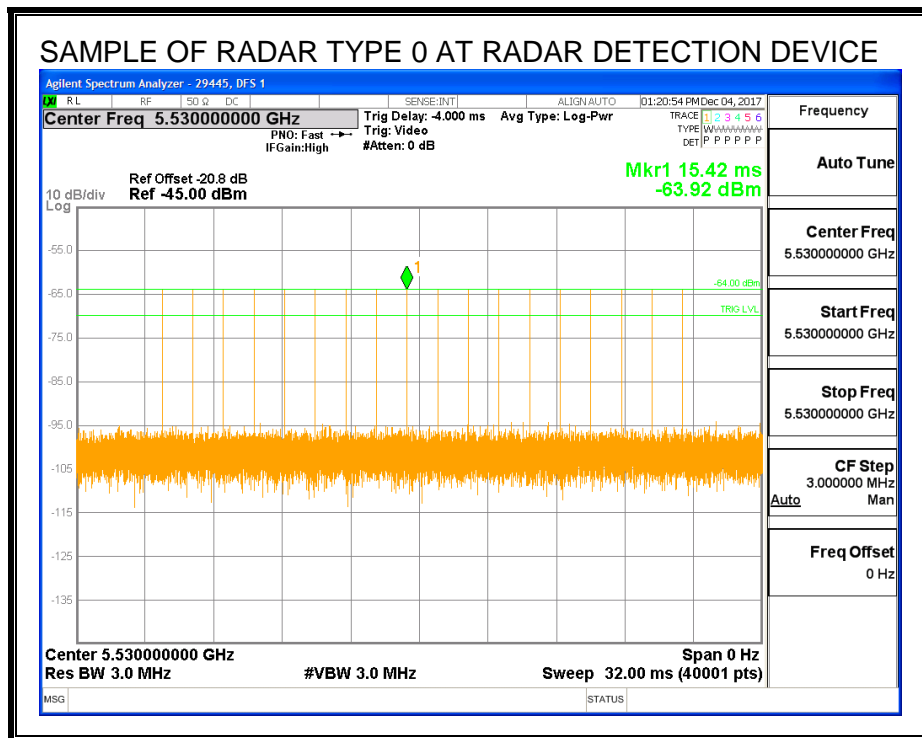

TRAFFIC

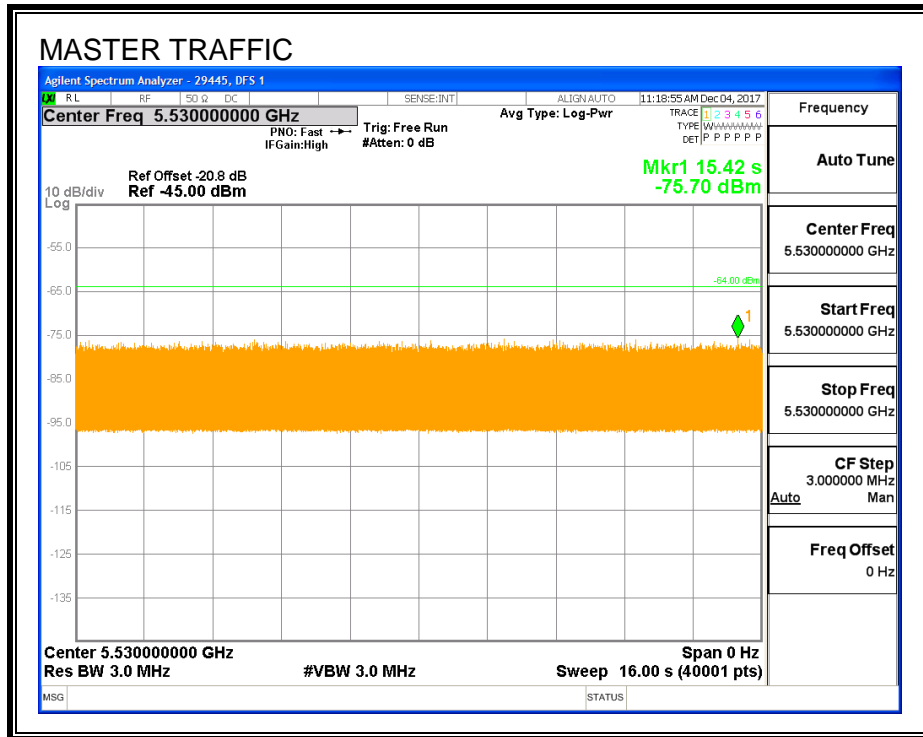


CHANNEL LOADING

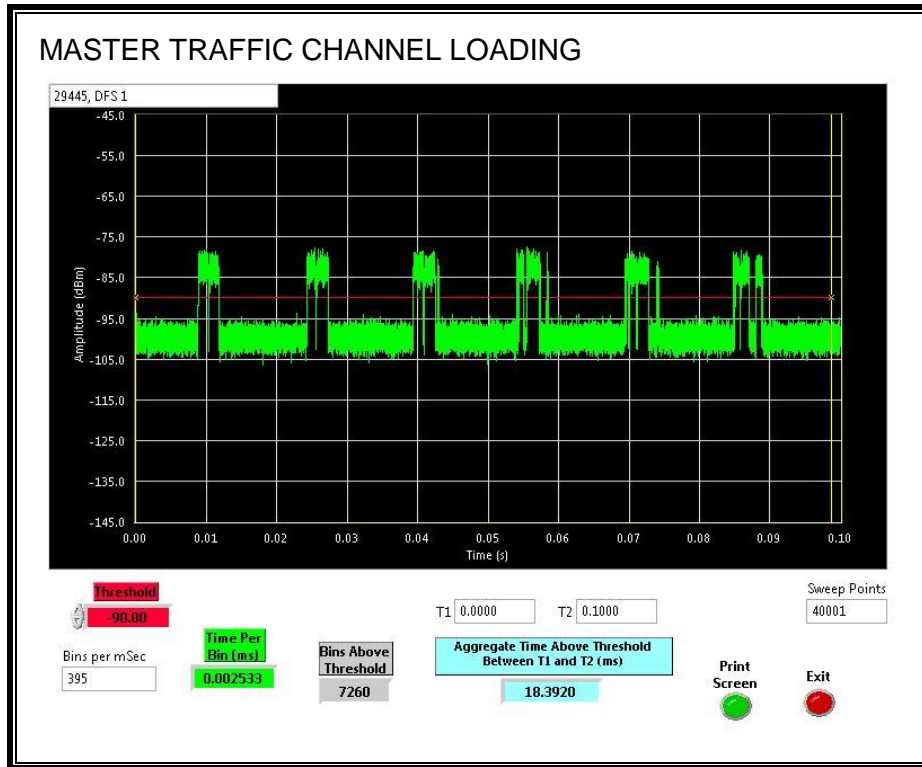


The level of traffic loading on the channel by the EUT is 18.39%.

TRAFFIC

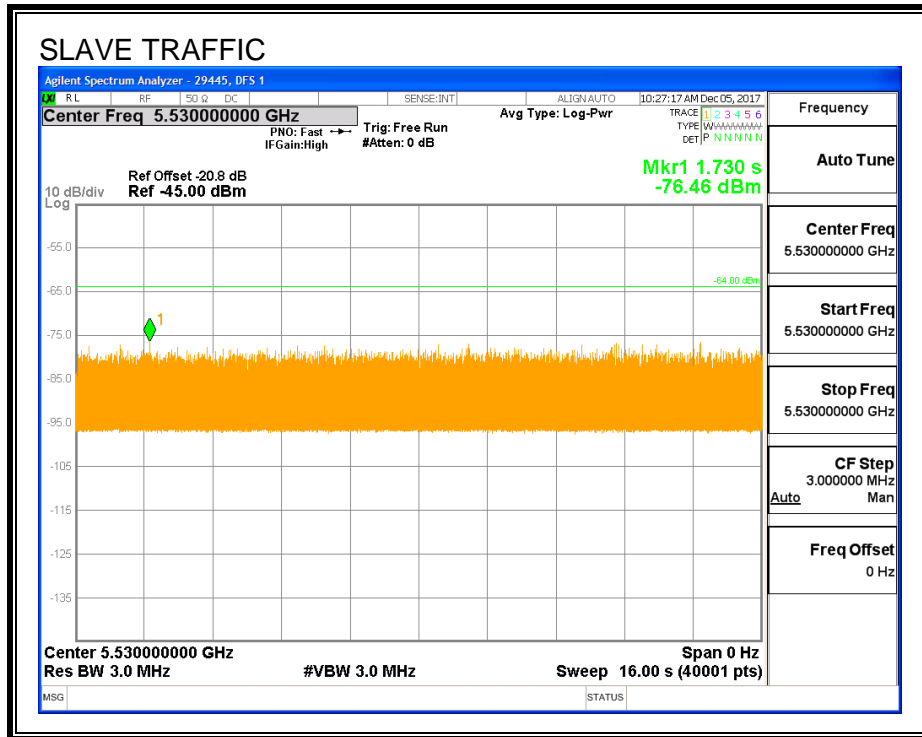

CHANNEL LOADING

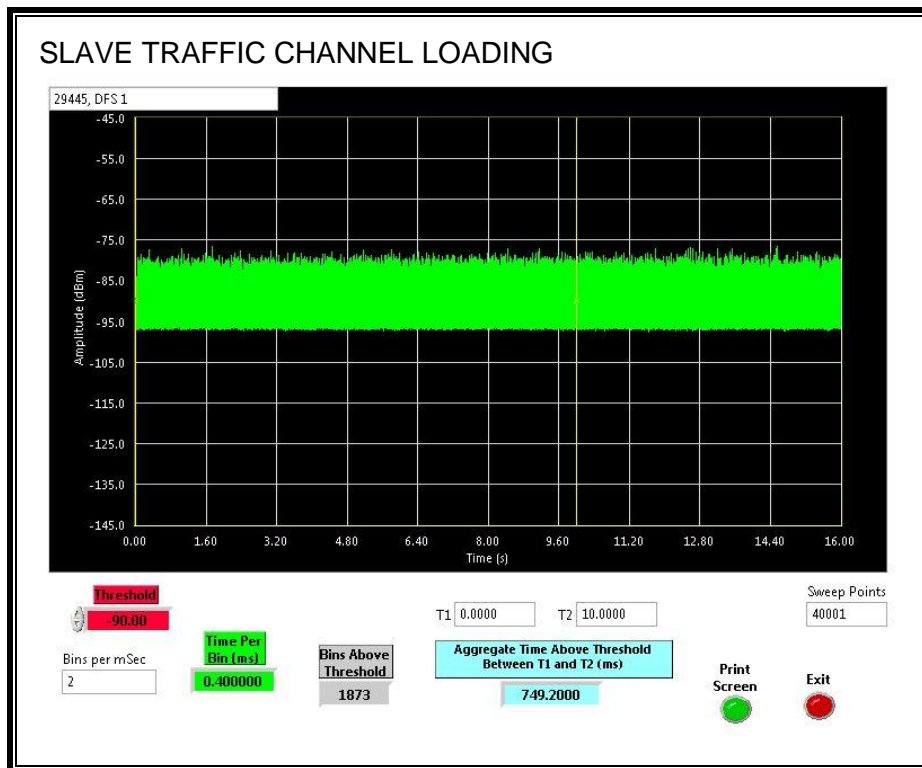

The level of traffic loading on the channel by the EUT is 7.49%.

The traffic loading of the Slave device became saturated at a level below the 17% requirement. Therefore the traffic loading by the Slave device that was measured represents the level attained while the Master device meets the 17% requirement.

6.8.3. MOVE AND CLOSING TIME OF SLAVE DEVICE IN RESPONSE TO DETECTION BY MASTER DEVICE

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


| Channel Move Time (sec) | Limit (sec) |
|----------------------------|----------------|
| 0.000 | 10 |

| Aggregate Channel Closing Transmission Time (msec) | Limit (msec) |
|---|-----------------|
| 0.0 | 60 |

MOVE TIME

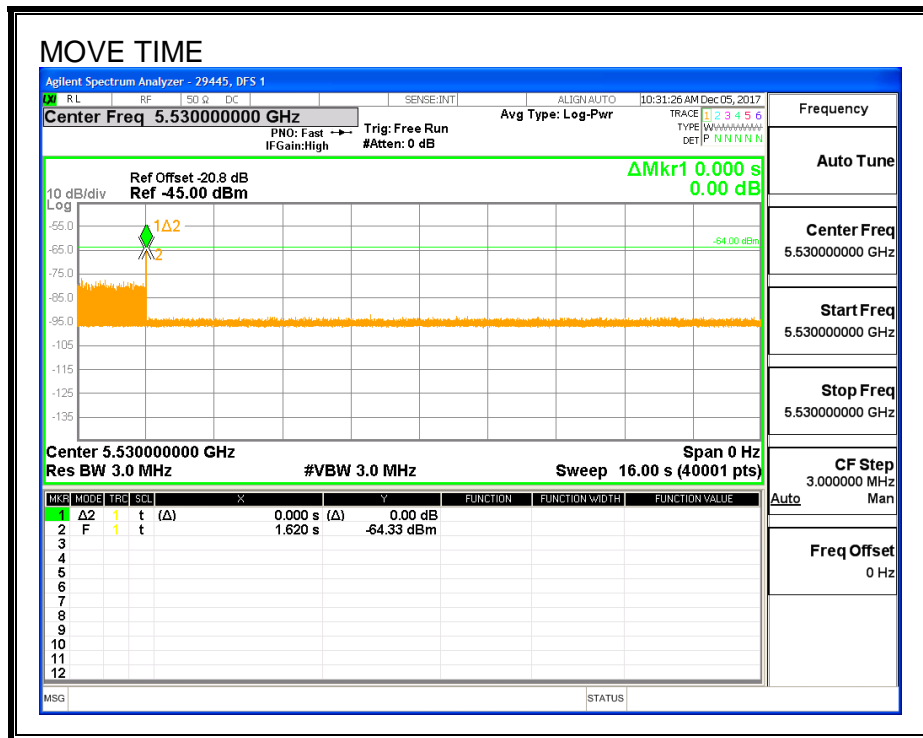


CHANNEL CLOSING TIME

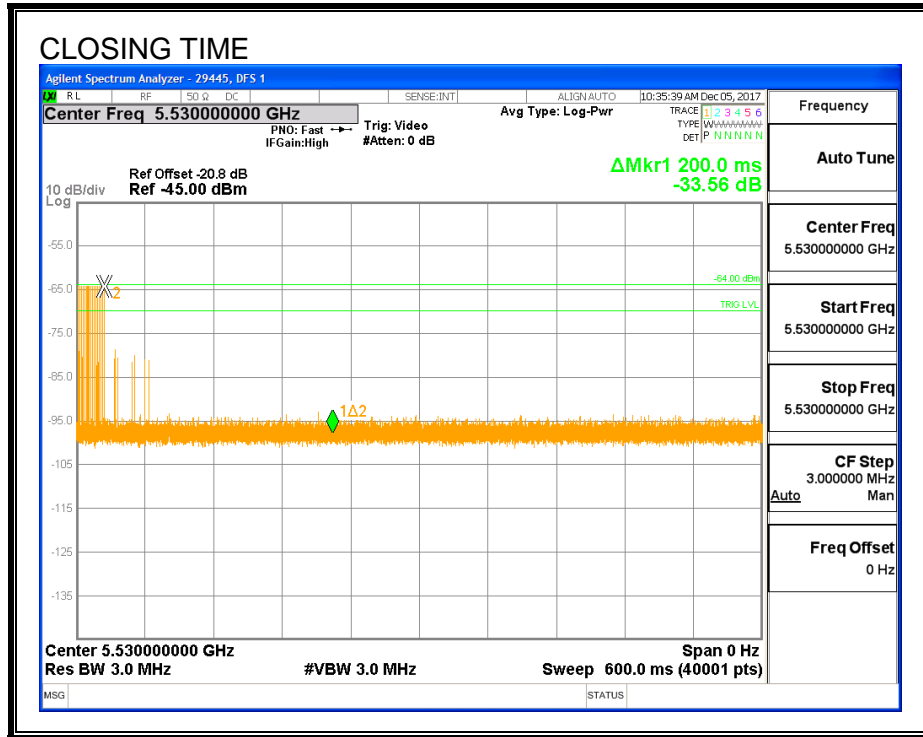

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


No transmissions are observed during the aggregate monitoring period.

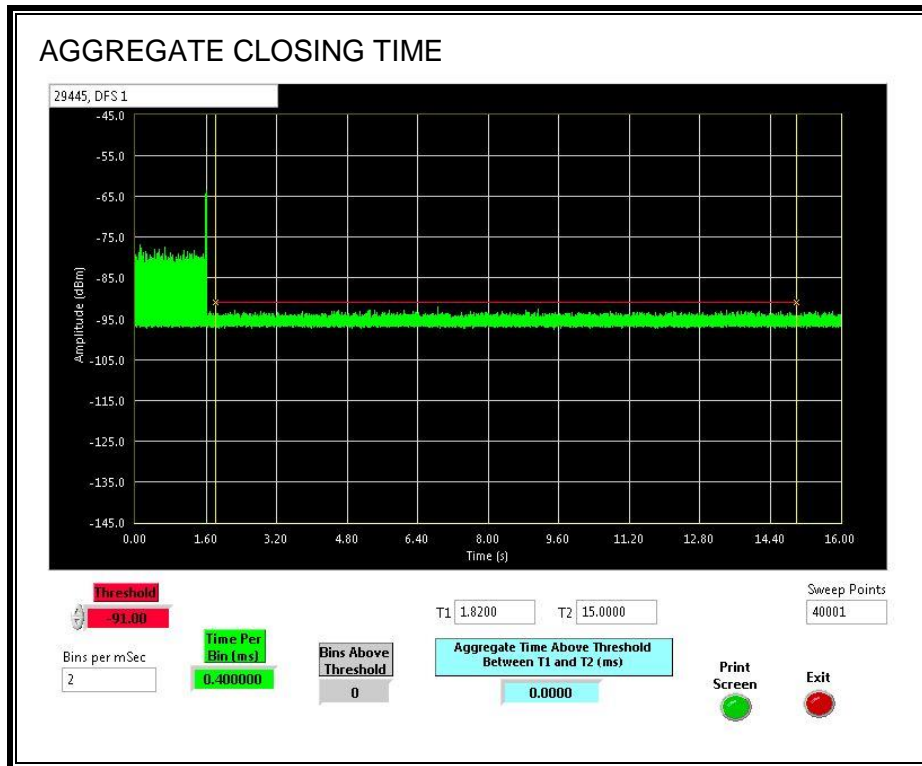

6.8.4. 30-MINUTE NON-OCCUPANCY PERIOD OF SLAVE IN RESPONSE TO DETECTION BY MASTER DEVICE

RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

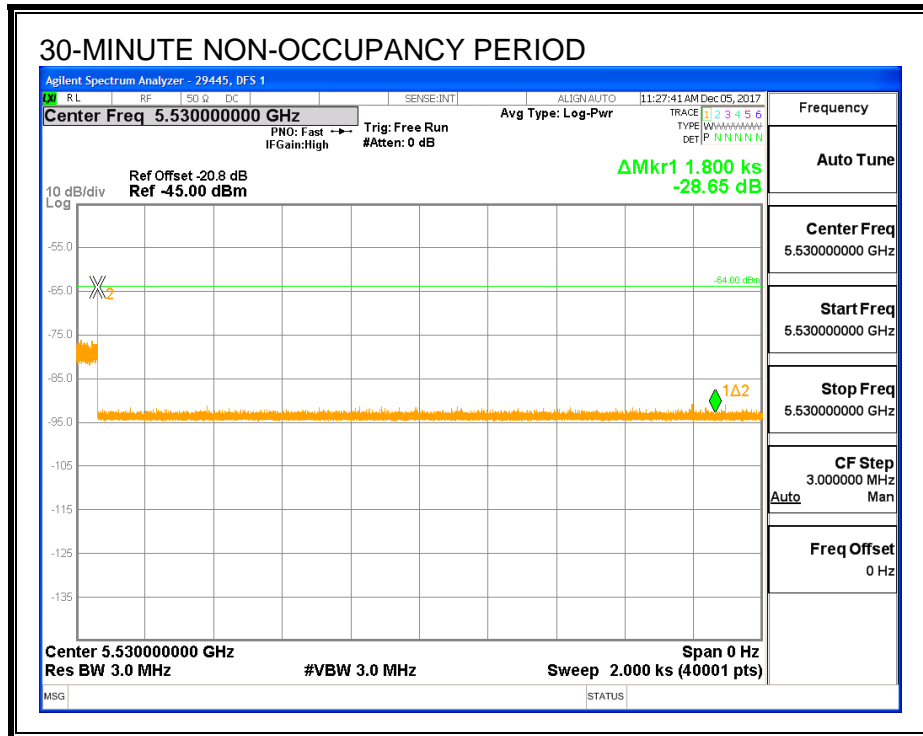

6.8.5. MOVE AND CLOSING TIME OF MASTER DEVICE IN RESPONSE TO DETECTION BY SLAVE DEVICE

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


| Channel Move Time (sec) | Limit (sec) |
|----------------------------|----------------|
| 0.6488 | 10 |

| Aggregate Channel Closing Transmission Time (msec) | Limit (msec) |
|---|-----------------|
| 4.4 | 60 |

MOVE TIME

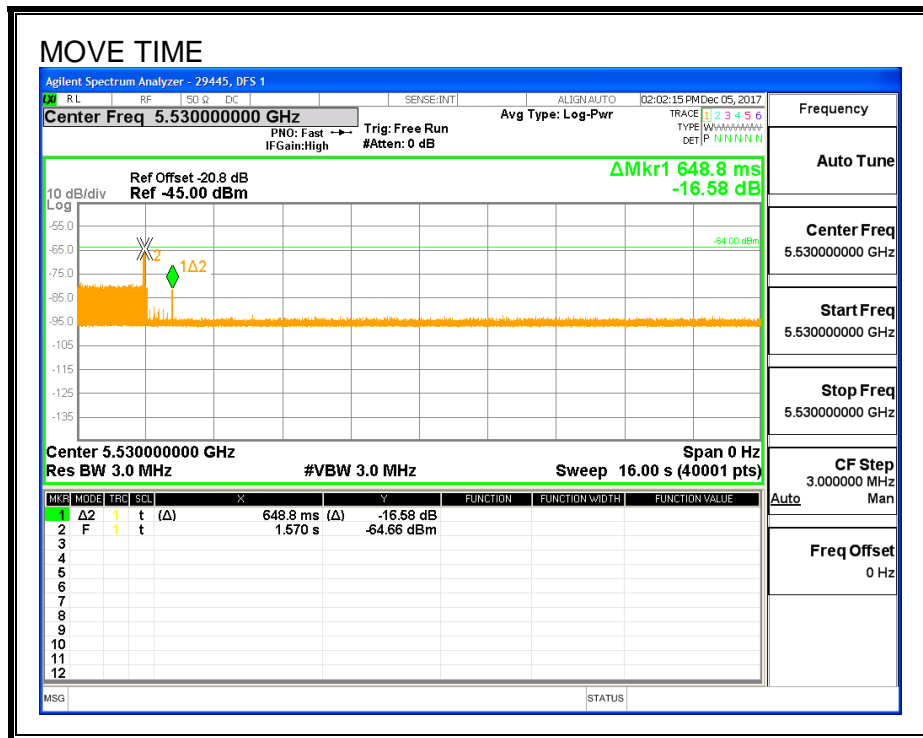


CHANNEL CLOSING TIME

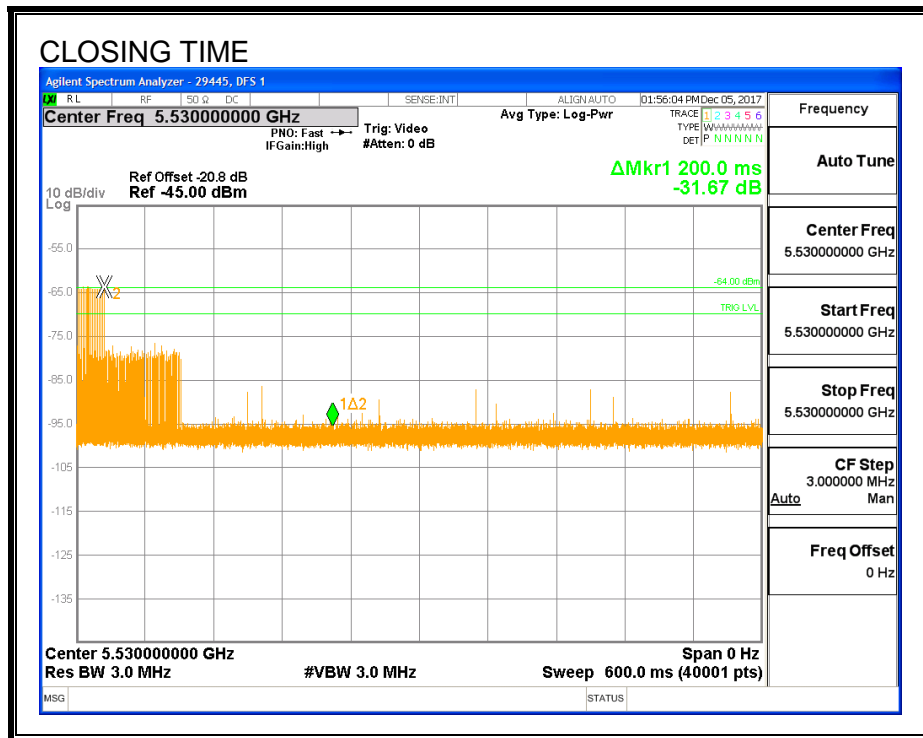

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME


Only intermittent transmissions are observed during the aggregate monitoring period.

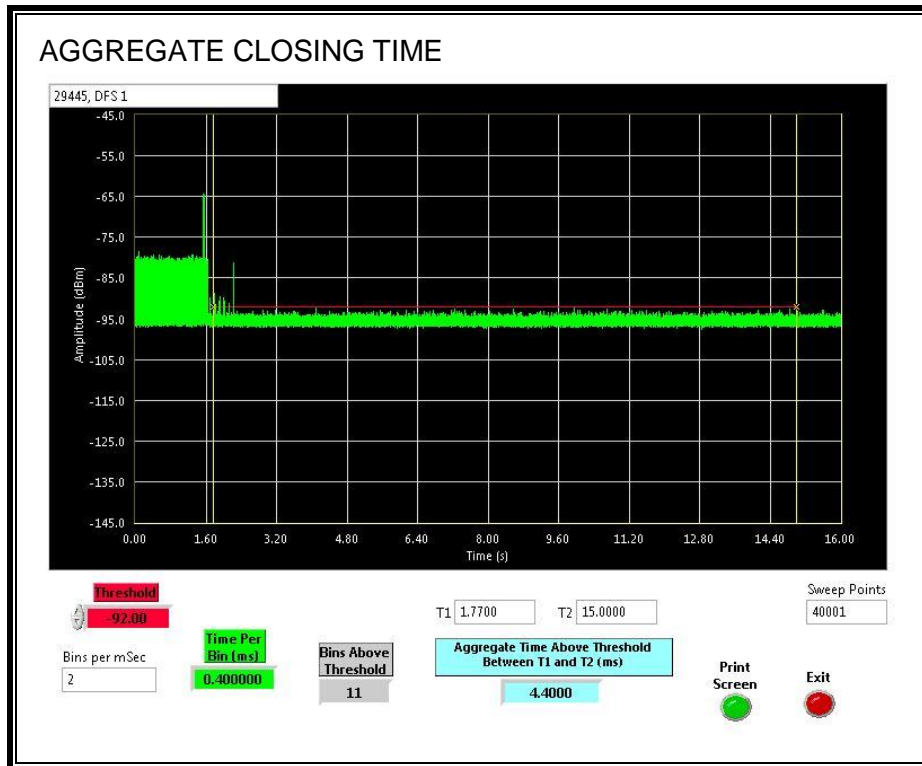

6.8.6. NON-OCCUPANCY PERIOD OF MASTER DEVICE IN RESPONSE TO DETECTION BY SLAVE DEVICE

RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

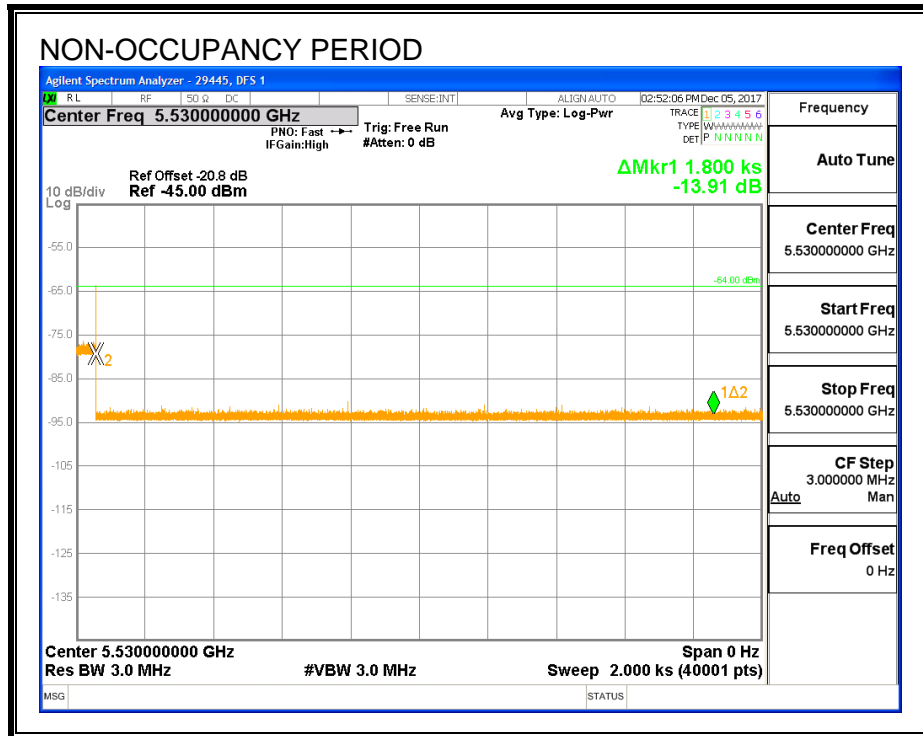

6.9. BRIDGE MODE RESULTS

Per KDB 905462, Section 5.1 (footnote 1):


Networks Access Points with Bridge and/or MESH modes of operation are permitted to operate in the DFS bands but must employ a DFS function. The functionality of the Bridge mode as specified in §15.403(a) must be validated in the DFS test report. Devices operating as relays must also employ DFS function. The method used to validate the functionality must be documented and validation data must be documented. Bridge mode can be validated by performing a test statistical performance check (Section 7.8.4) on any one of the radar types. This is an abbreviated test to verify DFS functionality. MESH mode operational methodology must be submitted in the application for certification for evaluation by the FCC.

The EUT does not support Bridge Mode therefore this test was not performed.

7. SETUP PHOTOS

7.1. MASTER DEVICE TESTING


DYNAMIC FREQUENCY SELECTION MEASUREMENT SETUP

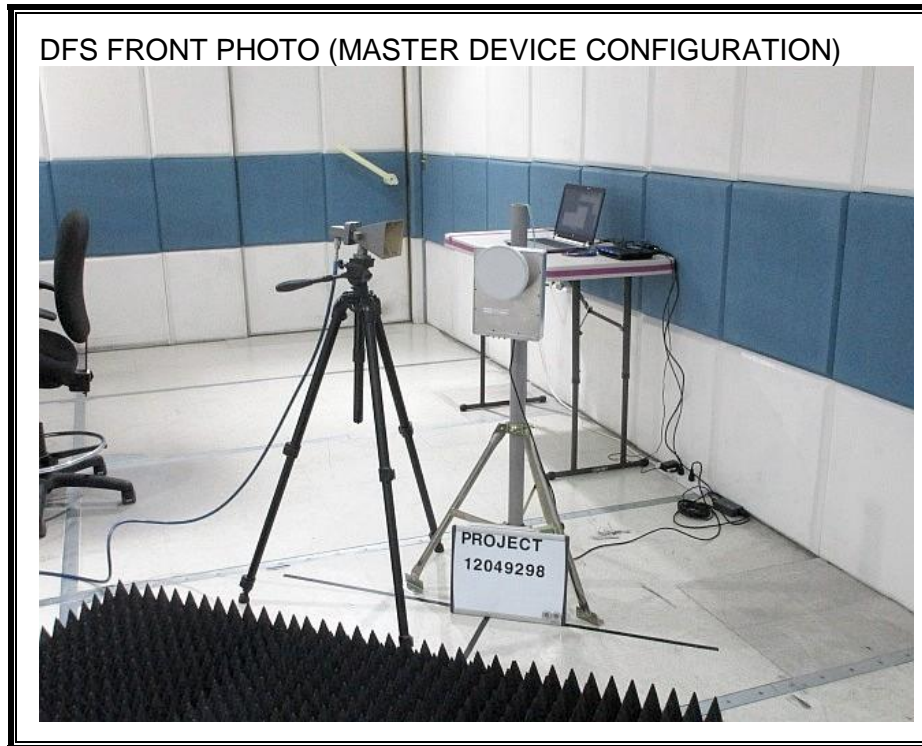




7.2. STANDARD SLAVE DEVICE TESTING

DYNAMIC FREQUENCY SELECTION MEASUREMENT SETUP

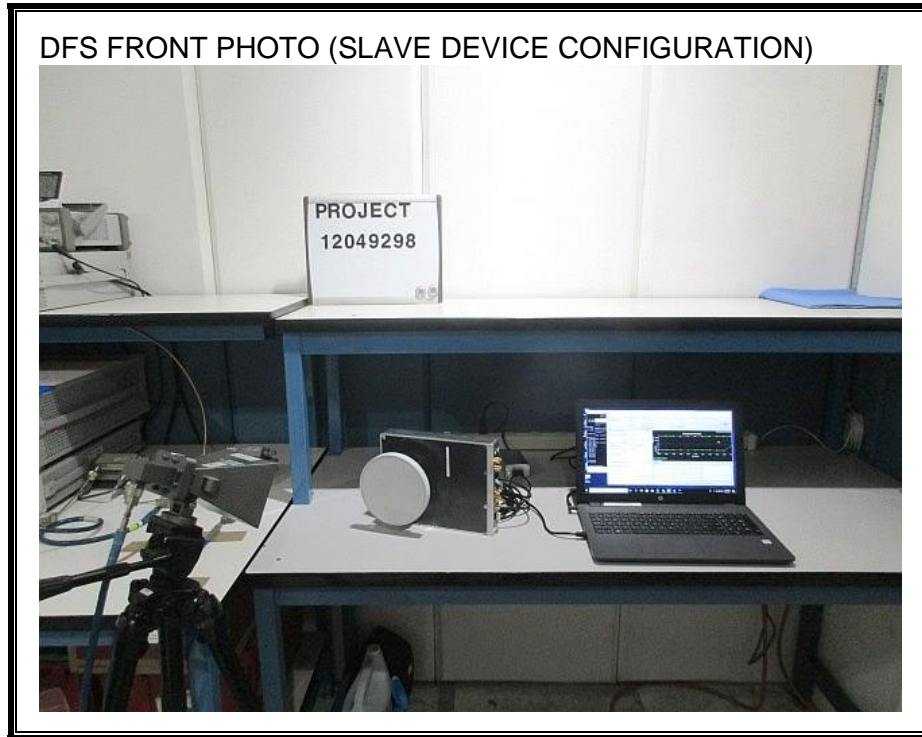


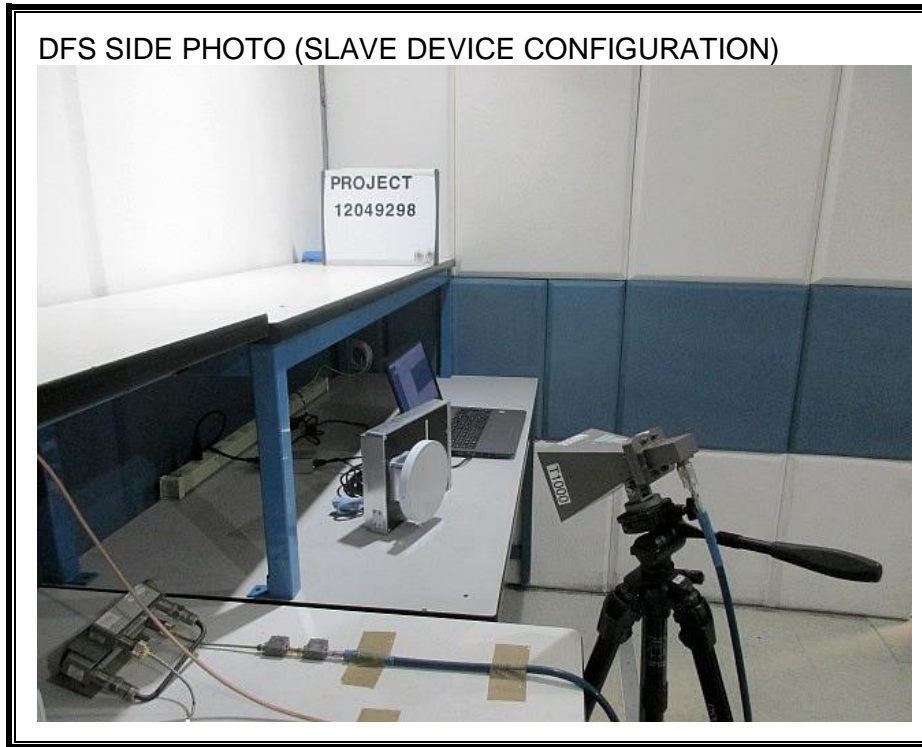

7.3. SLAVE DEVICE WITH RADAR DETECTION TESTING

7.3.1. SLAVE DEVICE BEING SUBJECTED TO RADAR


DYNAMIC FREQUENCY SELECTION MEASUREMENT SETUP

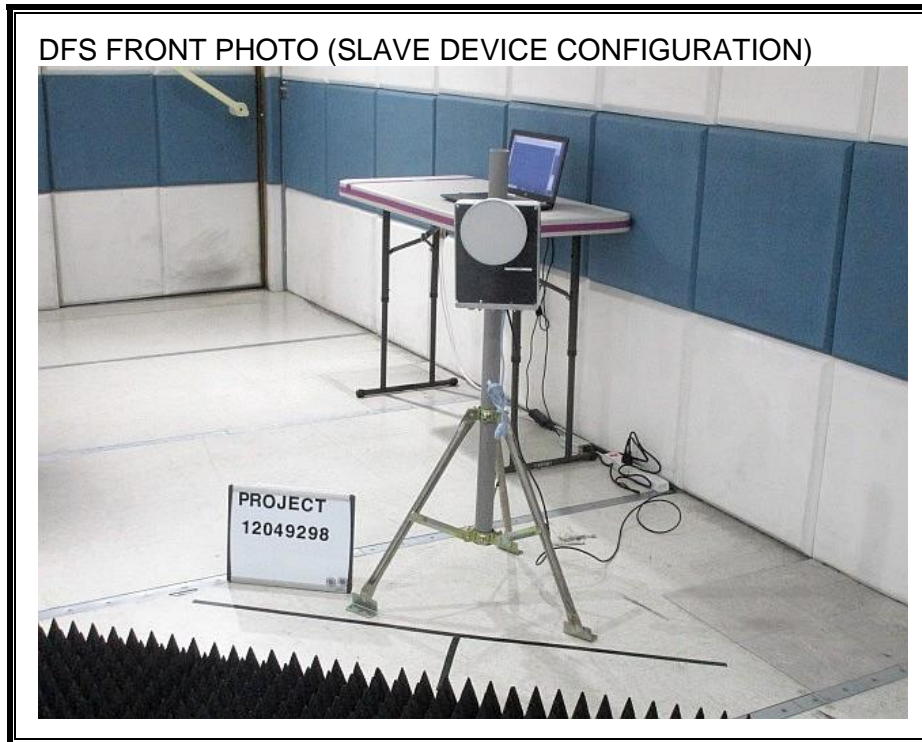



7.3.2. MASTER DEVICE IN RESPONSE TO DETECTION BY THE SLAVE DEVICE

DYNAMIC FREQUENCY SELECTION MEASUREMENT SETUP

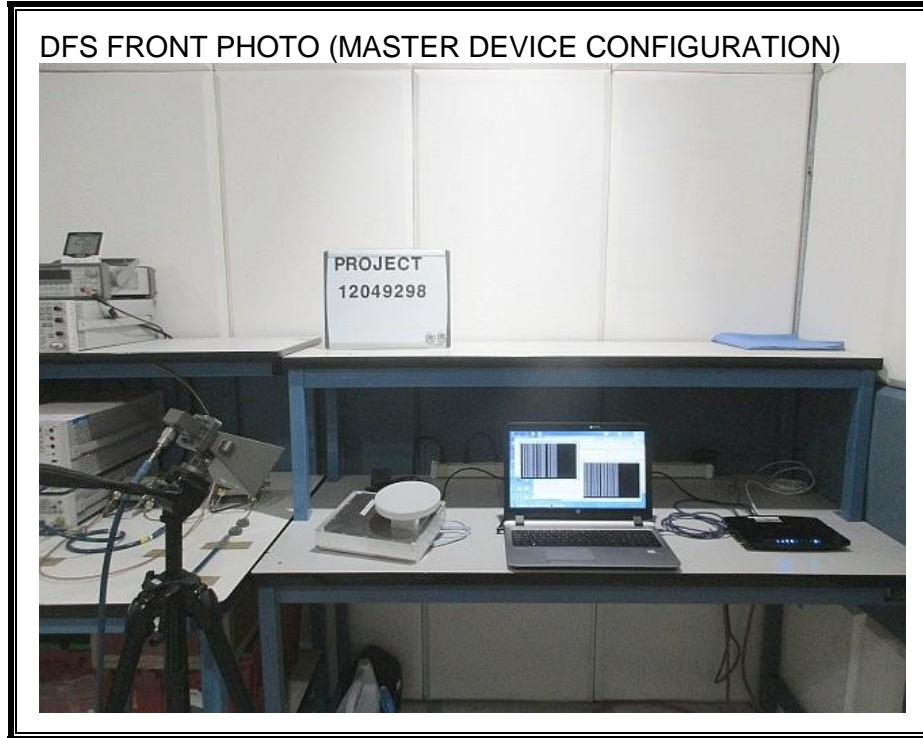



END OF REPORT