

*FCC PART 15, SUBPART B and C
TEST REPORT*

for

**FLATBED WIRELESS BALE LOADER –
TRANSMITTER**

PRODUCT NUMBER: D003-002-01

Prepared for
DIGITEC, INC.
2731 VAN DORN ROAD
MILFORD, NEBRASKA 68405

Prepared by: _____

JAMES ROSS

Approved by: _____

MICHAEL CHRISTENSEN

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: JULY 8, 2004

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	16	2	2	2	10	16	48

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	4
1. PURPOSE	5
2. ADMINISTRATIVE DATA	6
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
3. APPLICABLE DOCUMENTS	7
4. DESCRIPTION OF TEST CONFIGURATION	8
4.1 Description of Test Configuration - EMI	8
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. TEST PROCEDURES	13
7.1 Radiated Emissions (Spurious and Harmonics) Test	13
7.2 Bandwidth of the Fundamental	15
8. CONCLUSIONS	16



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos <ul style="list-style-type: none">• Test Setup Diagrams• Radiated Emissions Photos• Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Radiated Test Site



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested: Flatbed Wireless Bale Loader - Transmitter
 Product Number: D003-002-01
 S/N: N/A

Product Description: See Expository Statement.

Modifications: The EUT was not modified in order to meet the specifications.

Manufacturer: Digitec, Inc.
 2731 Van Dorn Road
 Milford, Nebraska 68405

Test Date: June 4, 2004

Test Specifications: EMI requirements
 CFR Title 47, Part 15 Subpart B; and Subpart C, Sections 15.205, 15.209, and 15.231

Test Procedure: ANSI C63.4

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	This test was not performed because the EUT operates on DC power only and cannot be plugged into the AC public mains.
2	Radiated RF Emissions, 10 kHz - 4340 MHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231.



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Flatbed Wireless Bale Loader - Transmitter Product Number: D003-002-01. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Digitec, Inc.

Monte Miller Electronic Engineer

Compatible Electronics, Inc.

James Ross Test Engineer
Michael Christensen Sr. Test Engineer

2.4 Date Test Sample was Received

The test sample was received prior to its qualification testing of June 4, 2004.

2.5 Disposition of the Test Sample

The test sample has not yet been returned to Digitec, Inc. as of the date of this report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
PCB	Printed Circuit Board
TX	Transmit
RX	Receive



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4: 2001	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

The Flatbed Wireless Bale Loader - Transmitter Product Number: D003-002-01 (EUT) was tested as a stand-alone device. The EUT was tested in three orthogonal axis. The EUT was continuously transmitting. The antenna is a "Splatch" antenna soldered onto the PCB. During normal operation, the EUT will turn off as soon as a button is no longer pressed on the EUT.

The final radiated data was taken in the mode above. Please see Appendix E for the data sheets.



4.1.1 **Cable Construction and Termination**

There are no external cables connected to the EUT.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIALNUMBER	FCC ID
FLATBED WIRELESS BALE LOADER - TRANSMITTER (EUT)	DIGITEC, INC.	D003-002-01	N/A	RHWD003-002-01



5.2 **EMI Test Equipment**

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Radiate Emissions Data Capture Program	Compatible Electronics	2.0	N/A	N/A	N/A
Spectrum Analyzer – Main Section	Hewlett Packard	8566B	3638A08784	June 20, 2003	1 Year
Spectrum Analyzer – Display Section	Hewlett Packard	85662A	3701A22279	June 20, 2003	1 Year
Quasi-Peak Adapter	Hewlett Packard	85650A	2430A00424	June 20, 2003	1 Year
Preamplifier	Com Power	PA-103	1582	March 11, 2004	1 Year
Microwave Preamplifier	Com-Power	PA-122	25196	March 4, 2004	1 Year
Loop Antenna	Com-Power	AL-130	17070	July 8, 2003	1 Year
Biconical Antenna	Com Power	AB-900	15226	April 21, 2004	1 Year
Log Periodic Antenna	Com Power	AL-100	16202	February 18, 2004	1 Year
Horn Antenna	Com-Power	AH-118	10085	January 8, 2004	1 Year
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A
Turntable	Com Power	TT-100	N/A	N/A	N/A
Computer	Hewlett Packard	4530	US91912319	N/A	N/A
Monitor	Hewlett Packard	D5258A	TW74500641	N/A	N/A



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.



7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer was used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com Power Preamplifier Model: PA-103 was used for frequencies from 30 MHz to 1 GHz, and the Com-Power Microwave Preamplifier Model: PA-122 was used for frequencies above 1 GHz. The spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 300 MHz	120 kHz	Biconical Antenna
300 MHz to 1 GHz	120 kHz	Log Periodic Antenna
1 GHz to 3.15 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results. The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.



Radiated Emissions (Spurious and Harmonics) Test (con't)

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain final test data. The final qualification data sheets are located in Appendix E.



7.2 Bandwidth of the Fundamental

The -20 dB bandwidth was checked to see that it was within 0.25% of the fundamental frequency for the EUT. Photos of the -20 dB bandwidth are located in Appendix E.



8. CONCLUSIONS

The Flatbed Wireless Baleloader - Transmitter Product Number: D003-002-01 meets all of the Class B specification limits defined in CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231.



APPENDIX A

LABORATORY RECOGNITIONS



LABORATORY RECOGNITIONS

Compatible Electronics has the following agency accreditations:

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031

Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

Compatible Electronics is recognized or on file with the following agencies:

Federal Communications Commission

Industry Canada

Radio-Frequency Technologies (Competent Body)



APPENDIX B

MODIFICATIONS TO THE EUT



MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.231 or FCC Class B specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made the EUT during testing.



APPENDIX C

ADDITIONAL MODELS COVERED UNDER THIS REPORT



ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Flatbed Wireless Bale Loader - Transmitter
Product Number: D003-002-01
S/N: N/A

There were no additional models covered under this report.



APPENDIX D


DIAGRAMS, CHARTS, AND PHOTOS



FIGURE 1: PLOT MAP AND LAYOUT OF RADIATED TEST SITE

OPEN LAND > 15 METERS

OPEN LAND > 15 METERS

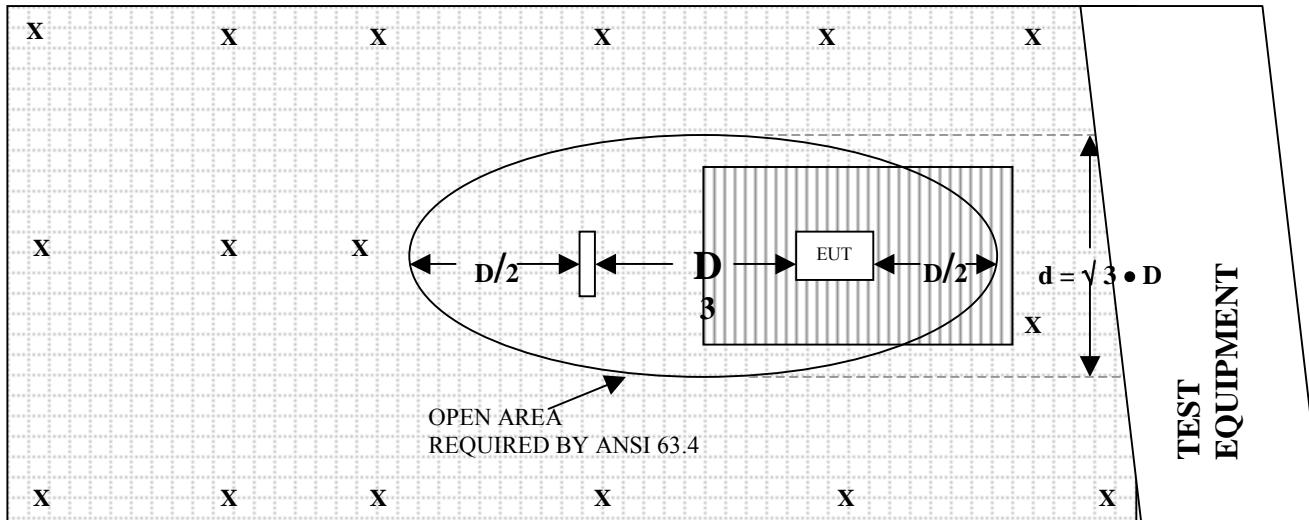

OPEN LAND > 15 METERS

 = GROUND RODS	 = GROUND SCREEN
 = TEST DISTANCE (meters)	 = WOOD COVER



COM-POWER AL-130**LOOP ANTENNA****S/N: 17070****CALIBRATION DATE: JULY 8, 2003**

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-40.0	11.5
0.01	-40.1	11.4
0.02	-41.3	10.2
0.05	-41.7	9.8
0.07	-41.3	10.2
0.1	-41.5	10.0
0.2	-43.8	7.7
0.3	-41.4	10.1
0.5	-41.3	10.2
0.7	-41.2	10.3
1	-40.8	10.7
2	-40.3	11.2
3	-40.6	10.9
4	-40.7	10.8
5	-40.1	11.4
10	-40.5	11.0
15	-41.3	10.2
20	-41.1	10.4
25	-41.7	9.8
30	-43.1	8.4



COM-POWER AB-900**BICONICAL ANTENNA****S/N: 15226****CALIBRATION DATE: APRIL 21, 2004**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	11.00	120	13.20
35	10.80	125	13.30
40	11.20	140	12.50
45	9.00	150	12.10
50	11.40	160	12.80
60	10.30	175	15.60
70	8.10	180	15.70
80	5.80	200	16.40
90	7.80	250	14.90
100	11.10	300	24.60



COM-POWER AL-100**LOG PERIODIC ANTENNA****S/N: 16202****CALIBRATION DATE: FEBRUARY 18, 2004**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
300	12.90	700	19.60
400	14.40	800	21.80
500	17.40	900	20.50
600	18.90	1000	22.70



COM-POWER AH-118
HORN ANTENNA
S/N: 10085
CALIBRATION DATE: JANUARY 8, 2004

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	24.5	10.0	38.7
1.5	26.7	10.5	39.2
2.0	30.8	11.0	39.2
2.5	30.3	11.5	40.3
3.0	30.3	12.0	41.2
3.5	30.7	12.5	41.7
4.0	31.3	13.0	41.5
4.5	32.6	13.5	41.7
5.0	33.9	14.0	41.6
5.5	34.3	14.5	44.2
6.0	34.3	15.0	47.6
6.5	39.4	15.5	42.5
7.0	37.1	16.0	42.3
7.5	38.6	16.5	41.7
8.0	39.4	17.0	43.9
8.5	39.3	17.5	48.7
9.0	38.7	18.0	52.4
9.5	38.7		



COM-POWER PA-103**PREAMPLIFIER****S/N: 1582****CALIBRATION DATE: MARCH 11, 2004**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	32.4	300	32.3
40	32.4	350	32.2
50	32.4	400	32.2
60	32.5	450	32.0
70	32.4	500	32.0
80	32.3	550	31.8
90	32.3	600	31.7
100	32.3	650	31.7
125	32.4	700	31.7
150	32.2	750	31.9
175	32.4	800	31.4
200	32.4	850	31.4
225	32.5	900	31.0
250	32.3	950	31.4
275	32.1	1000	31.4



COM-POWER PA-122**MICROWAVE PREAMPLIFIER****S/N: 25196****CALIBRATION DATE: MARCH 4, 2004**

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	32.1	6.0	28.9
1.1	32.0	6.5	29.3
1.2	31.8	7.0	29.7
1.3	31.6	7.5	29.8
1.4	31.5	8.0	29.9
1.5	31.4	8.5	30.2
1.6	31.2	9.0	30.3
1.7	31.0	9.5	29.9
1.8	30.8	10.0	29.3
1.9	30.7	11.0	28.5
2.0	30.5	12.0	30.5
2.5	30.0	13.0	31.1
3.0	29.7	14.0	29.9
3.5	29.2	15.0	29.8
4.0	28.6	16.0	29.1
4.5	28.4	17.0	28.0
5.0	28.3	18.0	26.0
5.5	28.5		






FRONT VIEW

DIGITEC, INC.
FLATBED WIRELESS BALE LOADER - TRANSMITTER
PRODUCT NUMBER: D003-002-01
FCC SUBPART B AND C - RADIATED EMISSIONS – 06-04-04

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



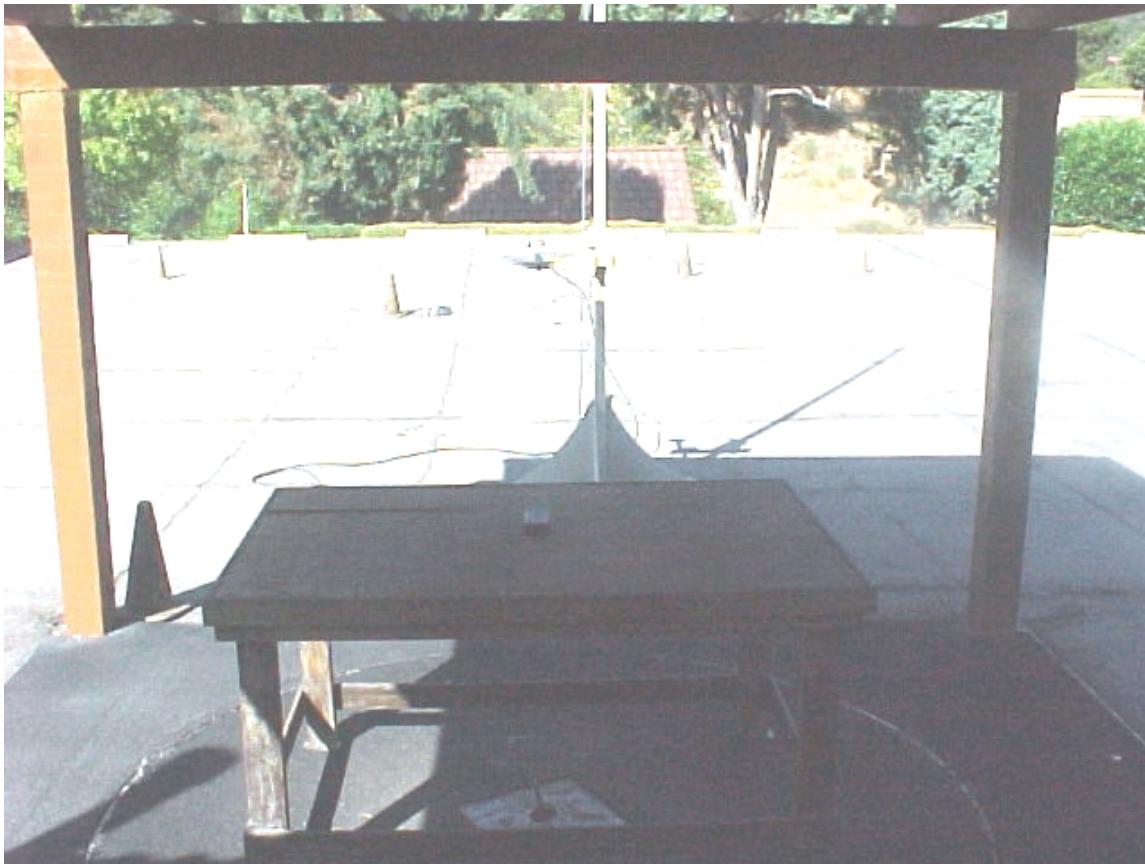

REAR VIEW

DIGITEC, INC.
FLATBED WIRELESS BALELOADER - TRANSMITTER
PRODUCT NUMBER: D003-002-01
FCC SUBPART B AND C - RADIATED EMISSIONS – 06-04-04

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS



APPENDIX E

DATA SHEETS



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	DIGITEC, INC.	DATE	6/4/04
EUT	FLATBED WIRELESS BALE LOADER - TRANSMITTER	DUTY CYCLE	50.64 %
MODEL	PRODUCT NUMBER: D003-002-01	PEAK TO AVG	-5.91012606 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	Michael Christensen	LAB	A

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 1 of PAGE 10



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	DIGITEC, INC.	DATE	6/4/04
EUT	FLATBED WIRELESS BALE LOADER - TRANSMITTER	DUTY CYCLE	50.64 %
MODEL	PRODUCT NUMBER: D003-002-01	PEAK TO AVG	-5.91012606 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	Michael Christensen	LAB	A

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 2 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	DIGITEC, INC.	DATE	6/4/04
EUT	FLATBED WIRELESS BALE LOADER - TRANSMITTER	DUTY CYCLE	50.64 %
MODEL	PRODUCT NUMBER: D003-002-01	PEAK TO AVG	-5.91012606 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	Michael Christensen	LAB	A

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 3 of PAGE 10



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	DIGITEC, INC.	DATE	6/4/04
EUT	FLATBED WIRELESS BALE LOADER - TRANSMITTER	DUTY CYCLE	50.64 %
MODEL	PRODUCT NUMBER: D003-002-01	PEAK TO AVG	-5.91012606 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	Michael Christensen	LAB	A

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 4 of PAGE 10

Report Number: B40604AI
part B and FCC Section 15.231 Test Report
Flatbed Wireless Bale Loader - Transmitter
Product Number: D003-002-01

Page E5



COMPATIBLE ELECTRONICS

FCC Part 15 Subpart B and FCC Section 15.231 Test Report Report Number: B40604A1

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	DIGITEC, INC.	DATE	6/4/04
EUT	FLATBED WIRELESS BALE LOADER - TRANSMITTER	DUTY CYCLE	50.64 %
MODEL	PRODUCT NUMBER: D003-002-01	PEAK TO AVG	-5.91012606 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	Michael Christensen	LAB	A

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 5 of PAGE 10

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	DIGITEC, INC.	DATE	6/4/04
EUT	FLATBED WIRELESS BALE LOADER - TRANSMITTER	DUTY CYCLE	50.64 %
MODEL	PRODUCT NUMBER: D003-002-01	PEAK TO AVG	-5.91012606 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	Michael Christensen	LAB	A

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 6 of PAGE 10



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	DIGITEC, INC.	DATE	6/4/04
EUT	FLATBED WIRELESS BALE LOADER - TRANSMITTER	DUTY CYCLE	50.64 %
MODEL	PRODUCT NUMBER: D003-002-01	PEAK TO AVG	-5.91012606 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	Michael Christensen	LAB	A

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 7 of PAGE 10





RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	DIGITEC, INC.	DATE	6/4/04
EUT	FLATBED WIRELESS BALE LOADER - TRANSMITTER	DUTY CYCLE	50.64 %
MODEL	PRODUCT NUMBER: D003-002-01	PEAK TO AVG	-5.91012606 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	Michael Christensen	LAB	A

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 8 of PAGE 10

Report Number: B40604A1
part B and FCC Section 15.231 Test Report
Flatbed Wireless Bale Loader - Transmitter
Product Number: D003-002-01

Page E9

Report Number: B40604A1
bpart B and FCC Section 15.231 Test Report
Flatbed Wireless Bale Loader - Transmitter
Product Number: D003-002-01



RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	DIGITEC, INC.	DATE	6/4/04
EUT	FLATBED WIRELESS BALE LOADER - TRANSMITTER	DUTY CYCLE	50.64 %
MODEL	PRODUCT NUMBER: D003-002-01	PEAK TO AVG	-5.91012606 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	Michael Christensen	LAB	A

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 9 of PAGE 10

Report Number: B40604A1
part B and FCC Section 15.231 Test Report
Flatbed Wireless Bale Loader - Transmitter
Product Number: D003-002-01

Page E10



COMPATIBLE ELECTRONICS

RADIATED EMISSIONS (FCC SECTION 15.205 AND 15.231)

COMPANY	DIGITEC, INC.	DATE	6/4/04
EUT	FLATBED WIRELESS BALE LOADER - TRANSMITTER	DUTY CYCLE	50.64 %
MODEL	PRODUCT NUMBER: D003-002-01	PEAK TO AVG	-5.91012606 dB
S/N	N/A	TEST DIST.	3 Meters
TEST ENGINEER	Michael Christensen	LAB	A

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = SPEC LIMIT - CORRECTED READING

PAGE 10 of PAGE 10



RADIATED EMISSIONS

DATA SHEETS



Test Location : Compatible Electronics **Page** : 1/1
Customer : Digitec, Inc. **Date** : 6/04/04
Manufacturer : Digitec, Inc. **Time** : 16:47:17
Eut name : Flatbed Wireless Bale Loader - Transmitter **Lab** : A
Product Number : D003-002-01 **Test Distance** : 3.0 Meters
Serial # : N/A
Specification : FCC Class B
Distance correction factor (20 * log(test/spec)) : 0.00
Test Mode : Spurious Emissions From the EUT
 9 kHz to 3200 MHz - Vertical and Horizontal Polarization


Pol	Freq	Rdng	Cable	Ant	Amp	Cor'd	Limit	Delta
	MHz	dBuV	loss	factor	gain	rdg = R	= L	R-L



-20 dB BANDWIDTH


PHOTOS



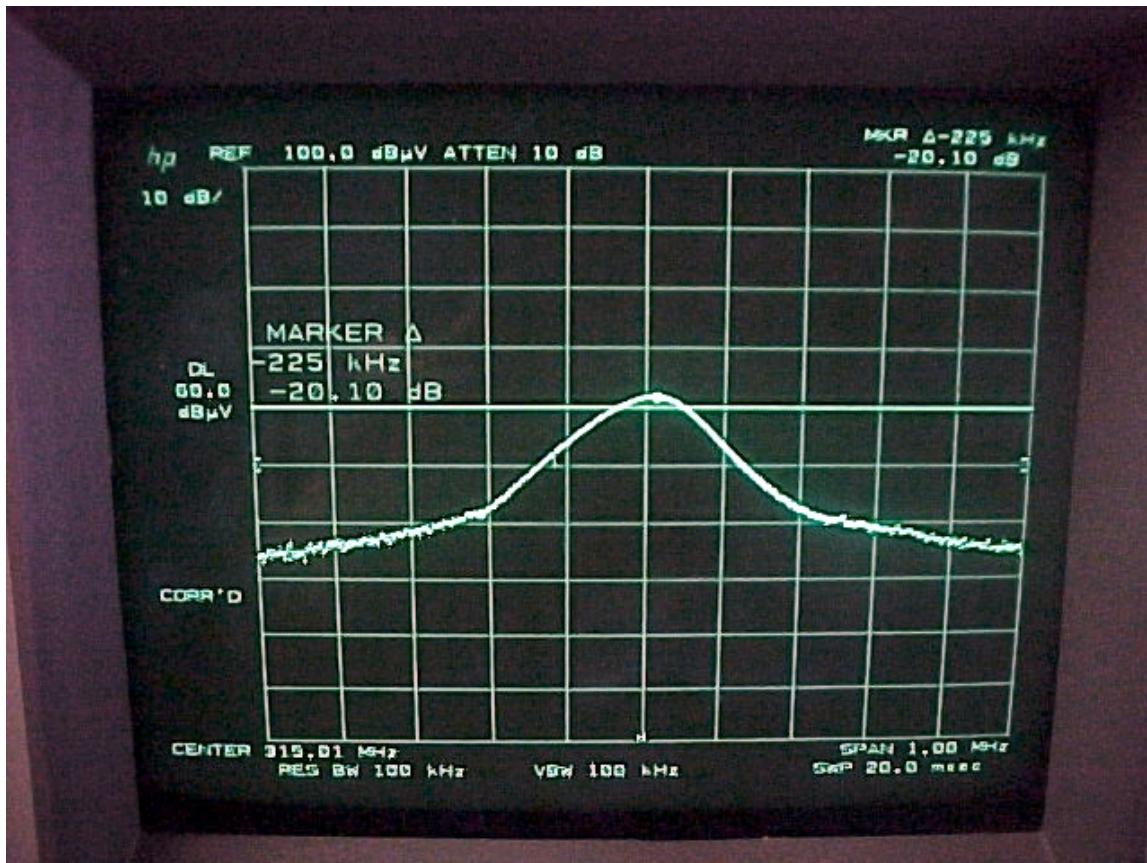

DIGITEC, INC.
FLATBED WIRELESS BALE LOADER - TRANSMITTER
PRODUCT NUMBER: D003-002-01
FCC SUBPART B AND C - -20 dB BANDWIDTH - 06-04-04

PHOTOGRAPH SHOWING THE -20 dB BANDWIDTH

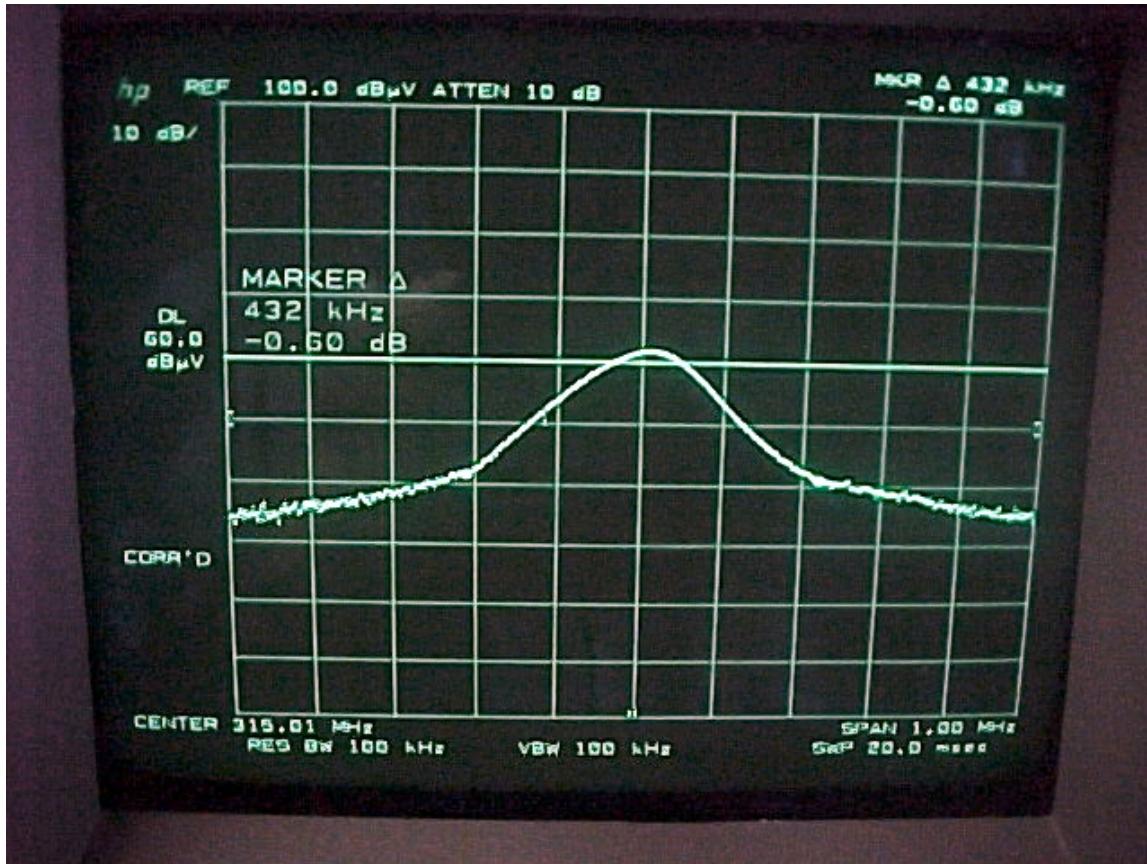

DIGITEC, INC.
FLATBED WIRELESS BALE LOADER - TRANSMITTER
PRODUCT NUMBER: D003-002-01
FCC SUBPART B AND C - -20 dB BANDWIDTH - 06-04-04

PHOTOGRAPH SHOWING THE -20 dB BANDWIDTH