








Produkte  
Products

15 kHz

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@0
Test Voltage:	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

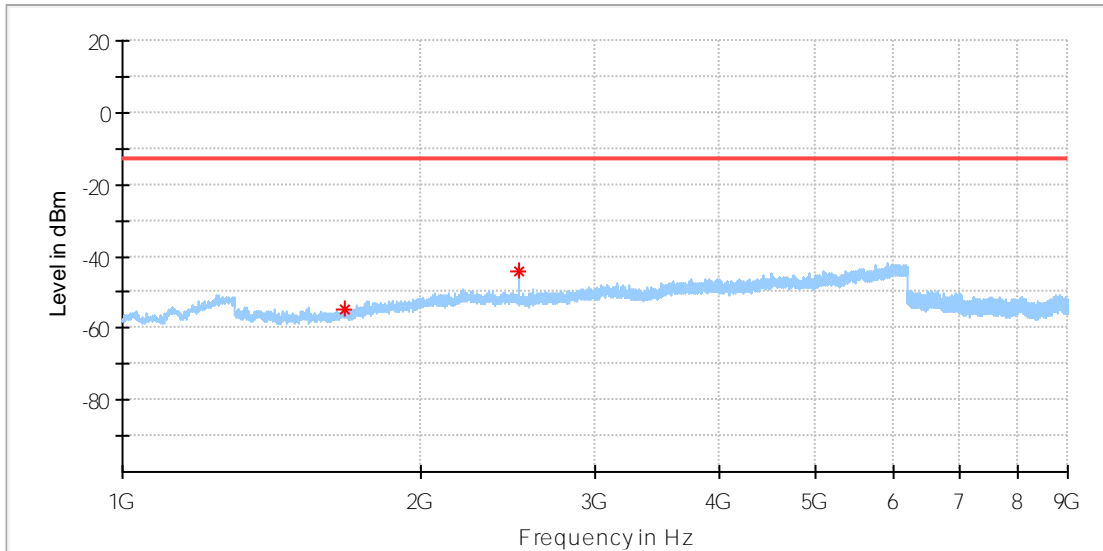


## Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1673.000000	-55.03	-13.00	42.03	100.0	H	337.0	-92.5
2509.500000	-44.27	-13.00	31.27	100.0	H	52.0	-88.3

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

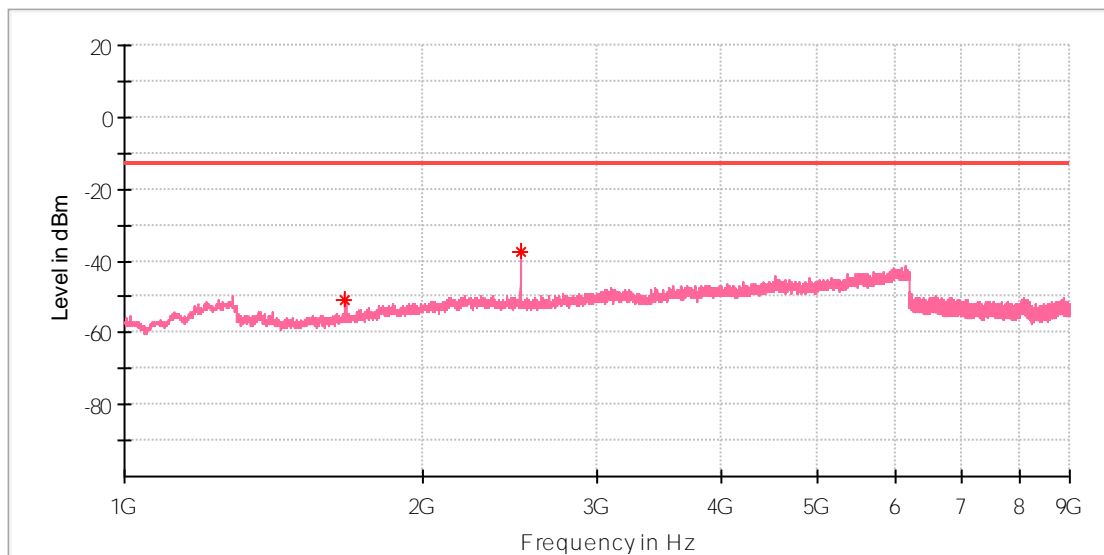


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1672.500000	-50.92	-13.00	37.92	100.0	V	184.0	-92.2
2509.500000	-37.47	-13.00	24.47	100.0	V	212.0	-88.2

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@11
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

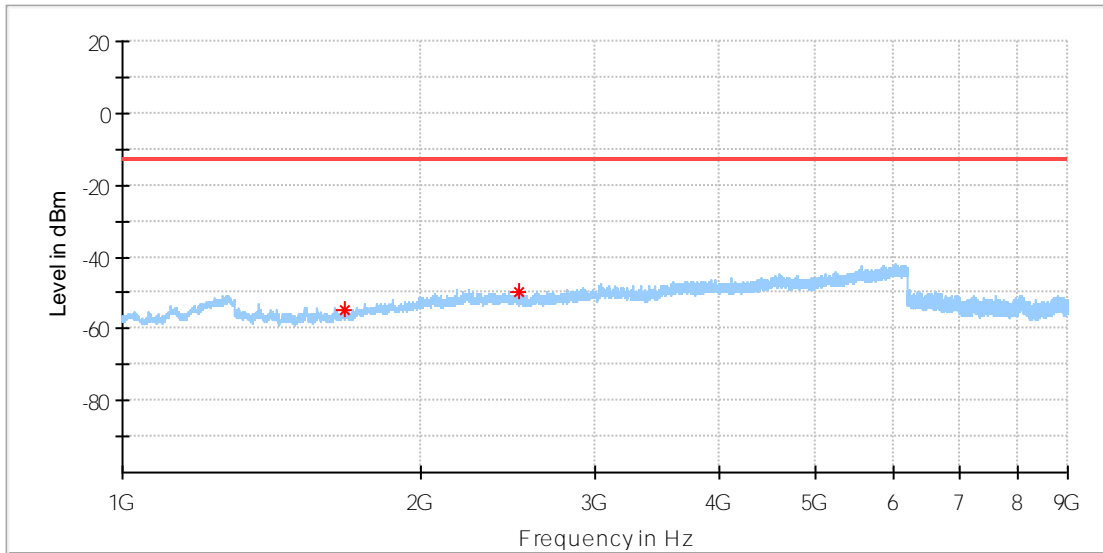


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1673.000000	-54.87	-13.00	41.87	100.0	H	230.0	-92.5
2509.500000	-49.61	-13.00	36.61	100.0	H	15.0	-88.3

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@11
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

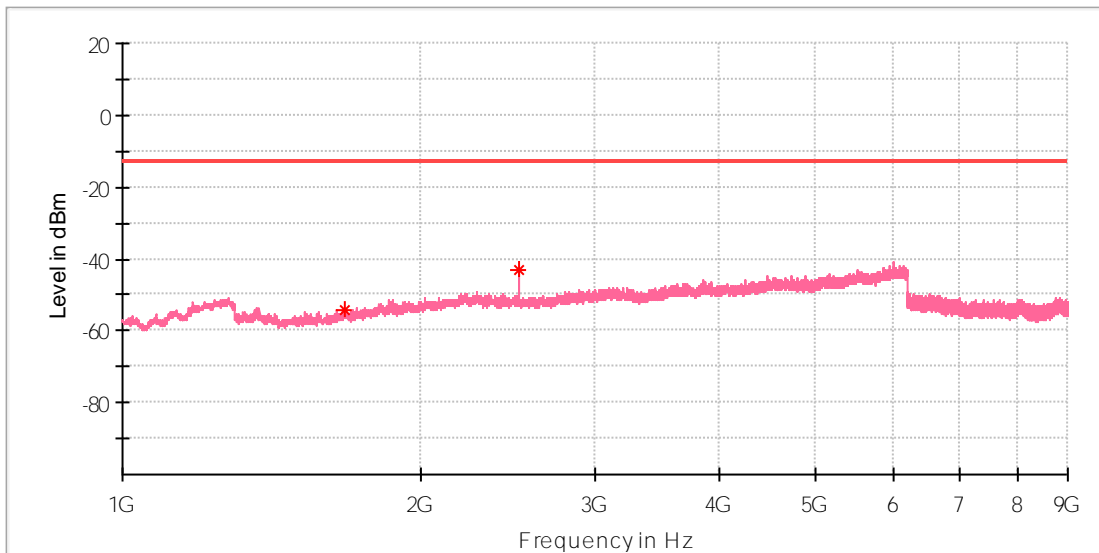


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1673.500000	-54.08	-13.00	41.08	100.0	V	11.0	-92.2
2509.500000	-43.05	-13.00	30.05	100.0	V	227.0	-88.2

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz QPSK 12@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

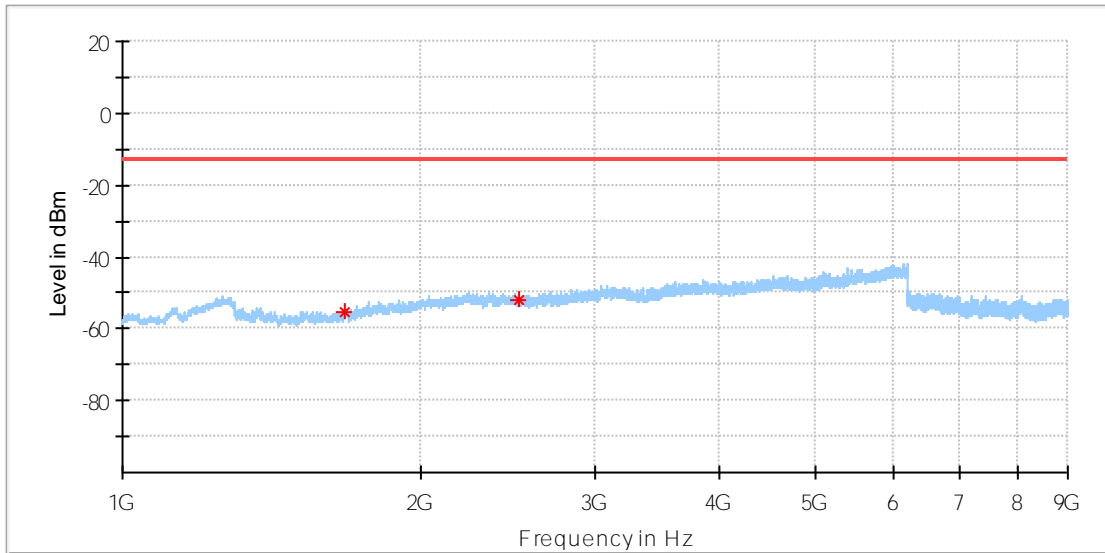

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1675.000000	-55.13	-13.00	42.13	100.0	H	255.0	-92.5
2509.500000	-51.74	-13.00	38.74	100.0	H	192.0	-88.3



# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz QPSK 12@0
Test Voltage:	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

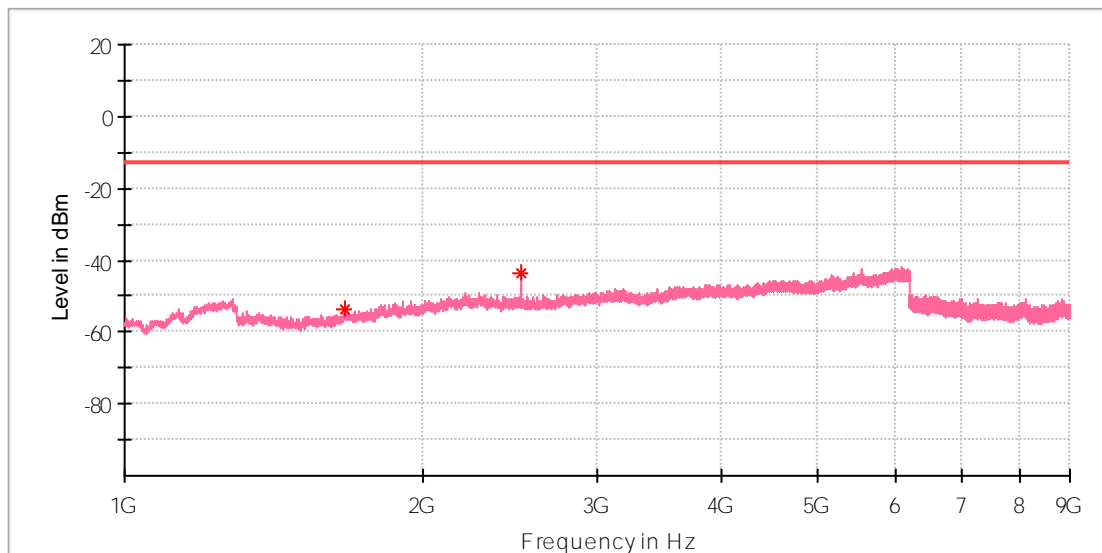

## Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1672.500000	-53.76	-13.00	40.76	100.0	V	36.0	-92.2
2510.000000	-43.90	-13.00	30.90	100.0	V	293.0	-88.2


Produkte  
Products

High Channel  
3.75 kHz

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 3.75kHz QPSK 1 @0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

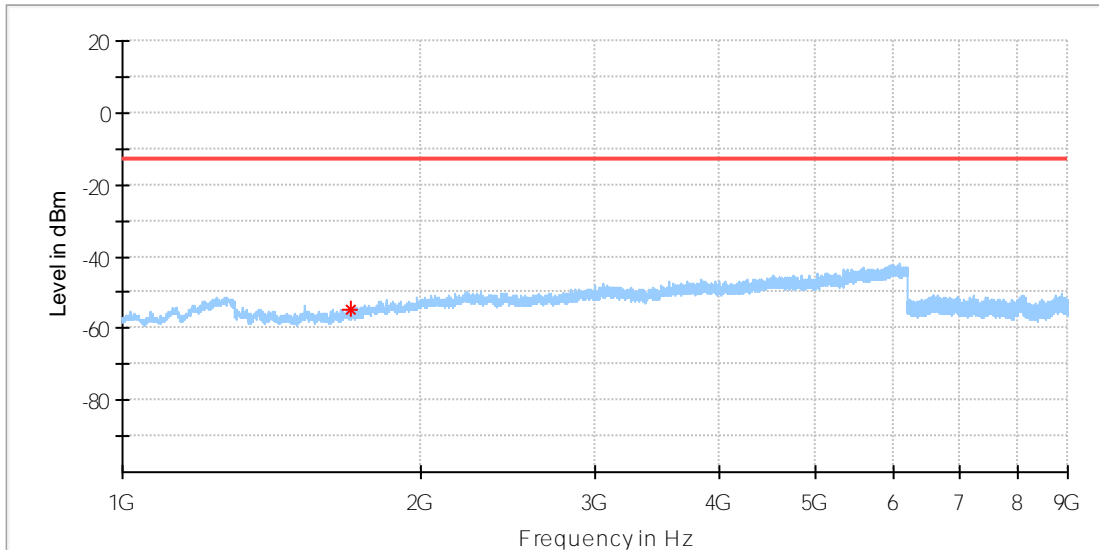

## Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	DET 2 (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1697.000000	-54.72	--	-13.00	41.72	100.0	H	30.0	-92.4


## Final Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
--	--	--	--	--		--	--

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 3.75kHz QPSK 1 @0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

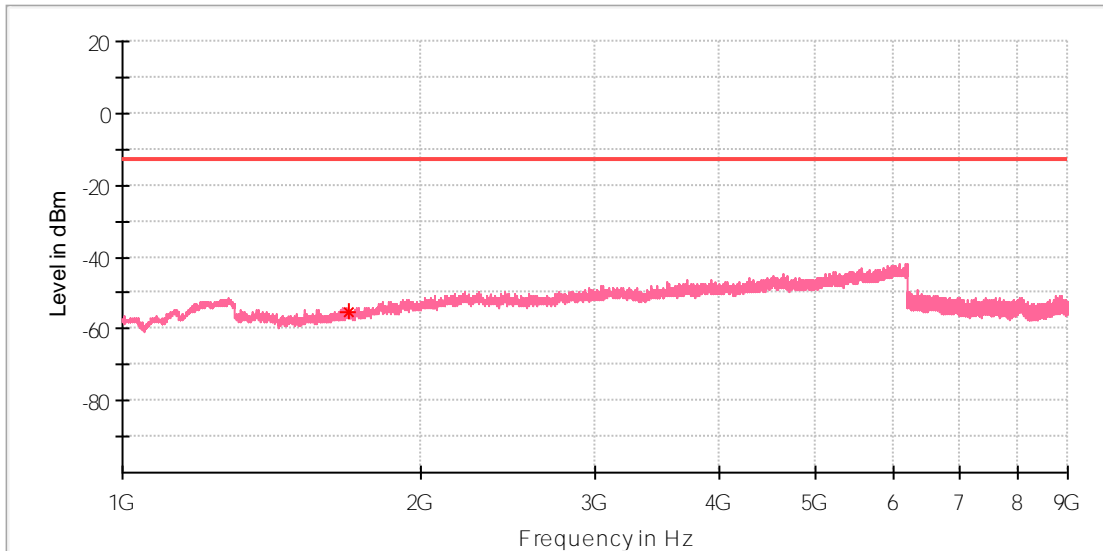

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	DET 2 (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1694.000000	-55.36	--	-13.00	42.36	100.0	V	347.0	-92.1

## Final\_Result

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
---	---	---	---	---		--	--






Produkte  
Products

15 kHz

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

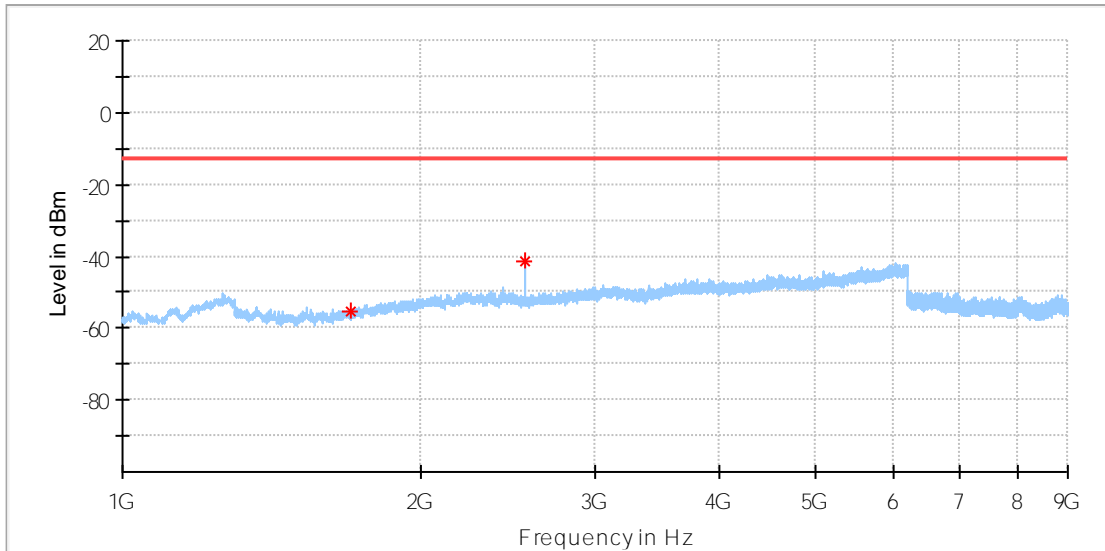


## Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1698.000000	-55.62	-13.00	42.62	100.0	H	309.0	-92.4
2546.500000	-41.24	-13.00	28.24	100.0	H	302.0	-88.3

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1 @0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

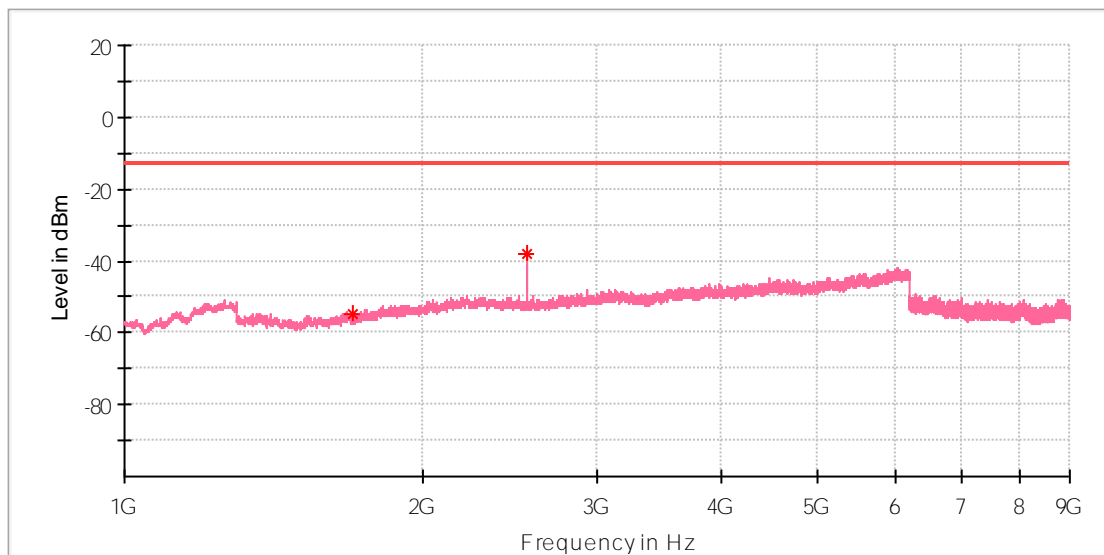


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1700.500000	-54.98	-13.00	41.98	100.0	V	239.0	-92.0
2546.000000	-38.24	-13.00	25.24	100.0	V	23.0	-88.4

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@11
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

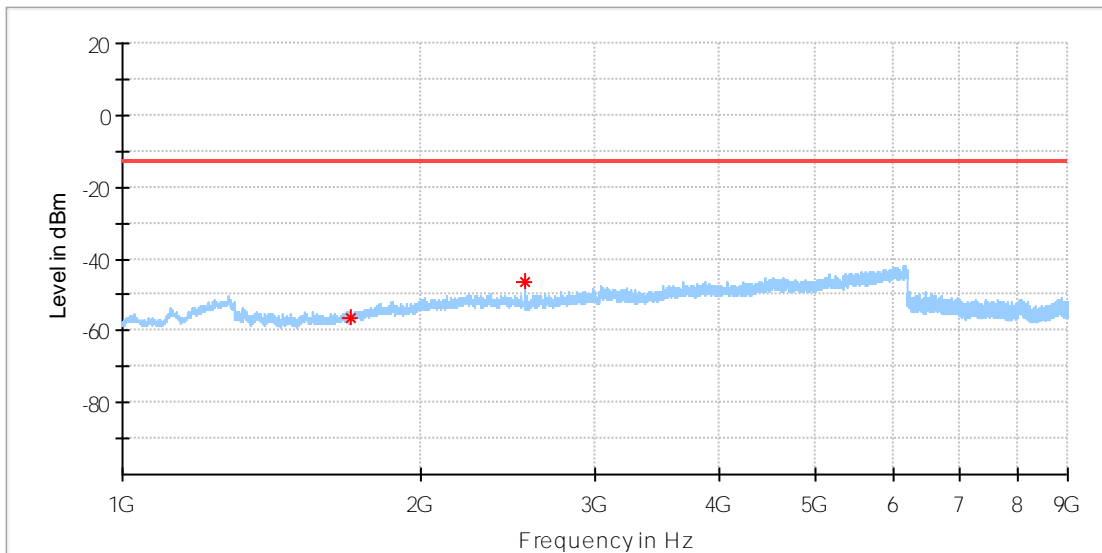

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1698.000000	-56.22	-13.00	43.22	100.0	H	51.0	-92.4
2546.500000	-46.58	-13.00	33.58	100.0	H	44.0	-88.3



# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz BPSK 1@11
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

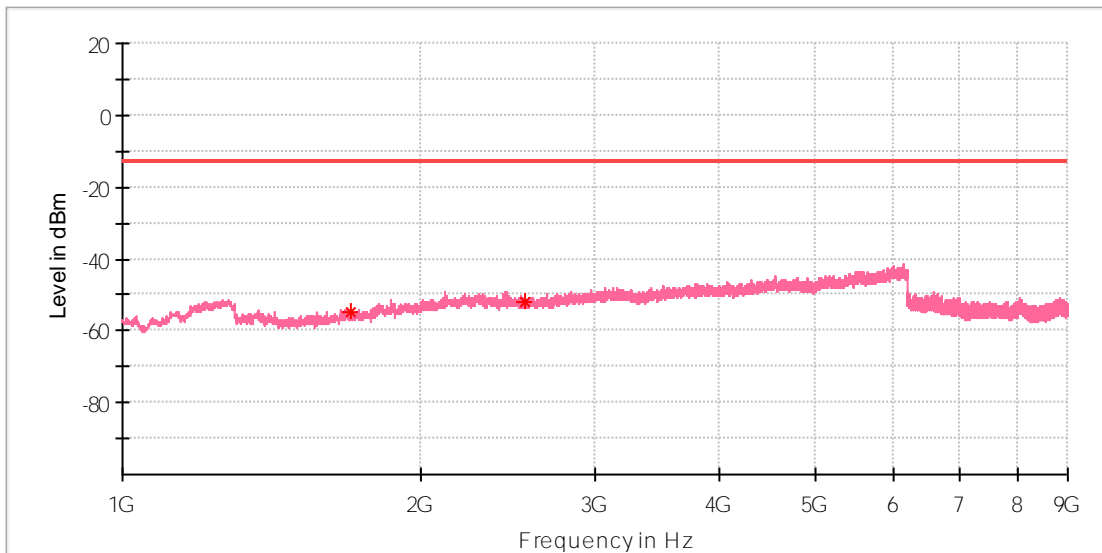


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1699.500000	-54.51	-13.00	41.51	100.0	V	129.0	-92.1
2547.000000	-52.16	-13.00	39.16	100.0	V	254.0	-88.4

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz QPSK 12@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

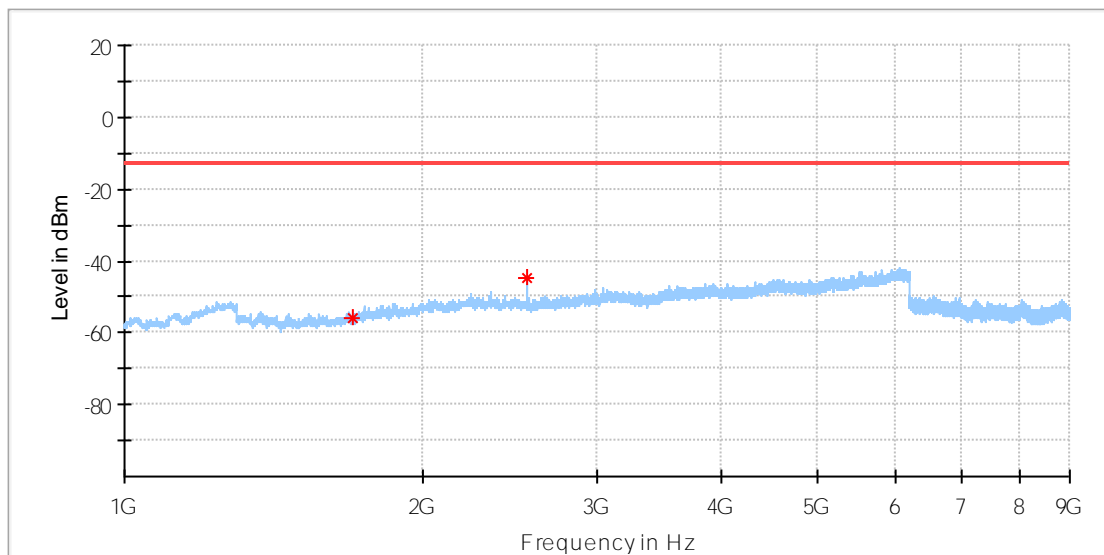


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1697.000000	-56.04	-13.00	43.04	100.0	H	245.0	-92.4
2547.000000	-44.93	-13.00	31.93	100.0	H	349.0	-88.3

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX High 15kHz QPSK 12@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 22 and RSS-132 Issue 3
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

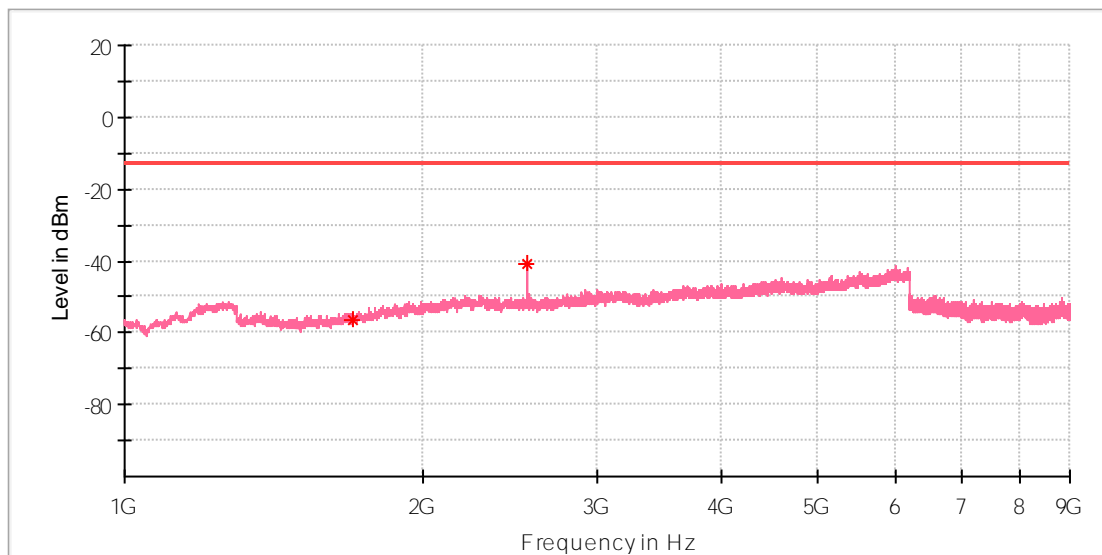

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1698.000000	-56.24	-13.00	43.24	100.0	V	170.0	-92.1
2546.500000	-40.98	-13.00	27.98	100.0	V	37.0	-88.4


## Appendix L.4: Field Strength of Spurious Radiation for Band 12

Below 1 GHz  
 BPSK

# Test Report

### EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX 15kHz BPSK 1 @0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

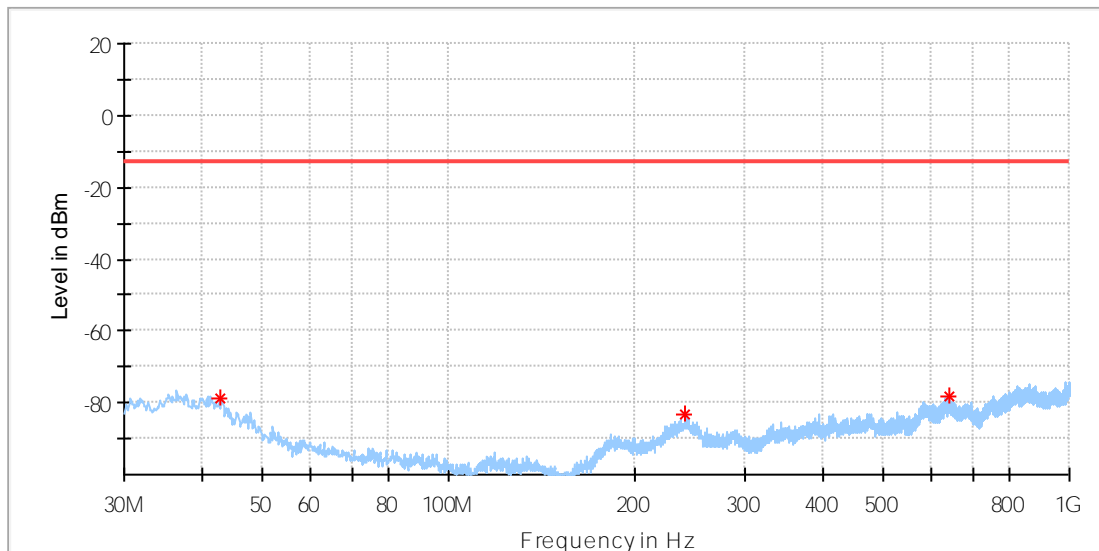


### Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.731250	-78.81	-13.00	65.81	100.0	H	41.0	-112.8
240.732500	-83.18	-13.00	70.18	100.0	H	50.0	-110.3
642.191250	-78.34	-13.00	65.34	100.0	H	0.0	-104.6

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-VW
Test Mode:	TX 15kHz BPSK 1 @0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

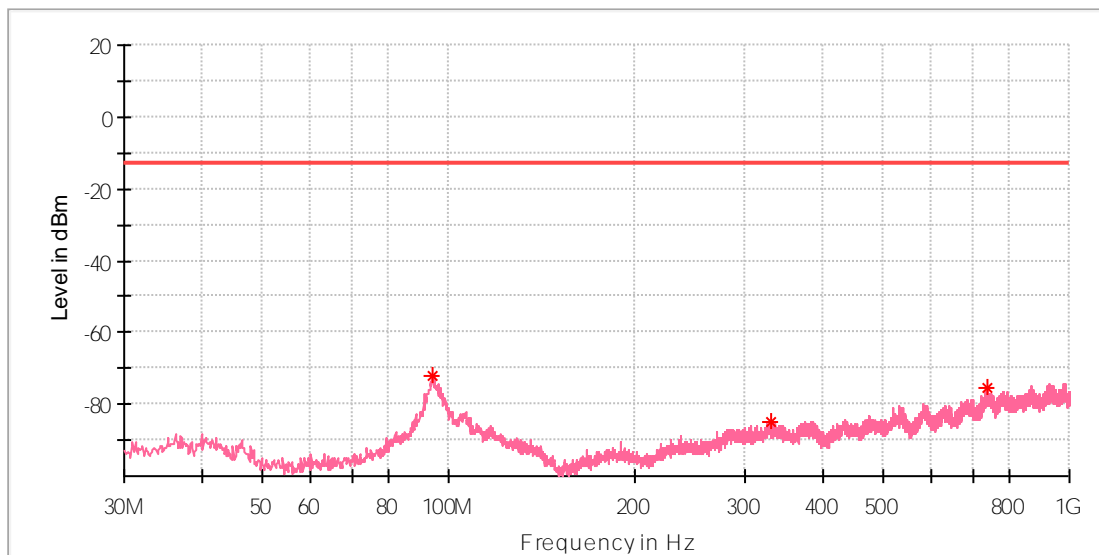

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
94.141250	-72.30	-13.00	59.30	100.0	V	347.0	-99.7
330.700000	-84.65	-13.00	71.65	100.0	V	352.0	-112.1
738.463750	-75.54	-13.00	62.54	100.0	V	279.0	-102.0

QPSK

## Test Report

### EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX 15kHz QPSK 1@0
Test Voltage:	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

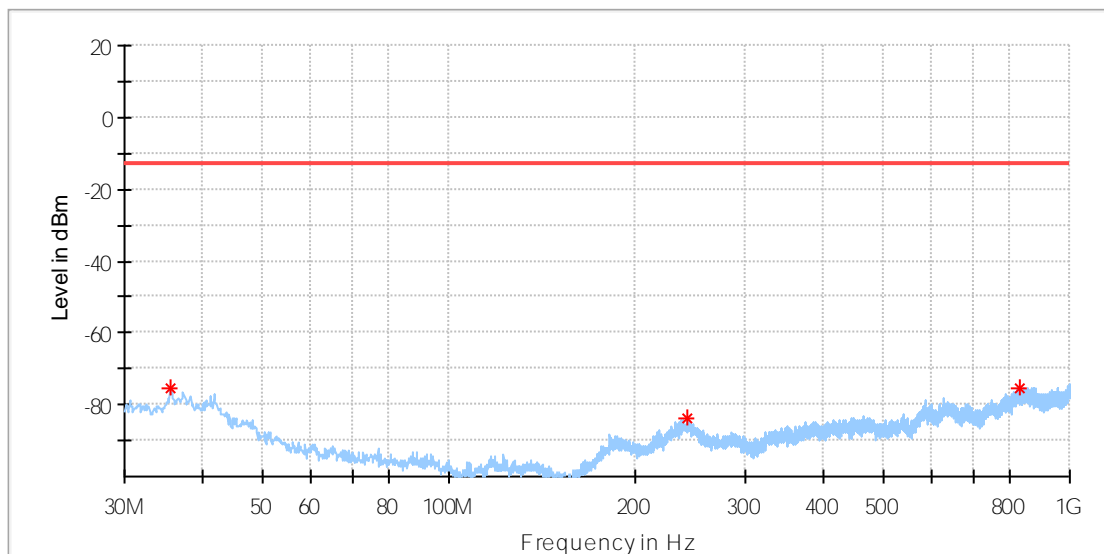


### Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
35.577500	-75.72	-13.00	62.72	100.0	H	208.0	-113.8
241.945000	-83.90	-13.00	70.90	100.0	H	306.0	-110.1
828.188750	-75.45	-13.00	62.45	100.0	H	86.0	-101.9

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX 15kHz QPSK 1@0
Test Voltage:	DC 3.8V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

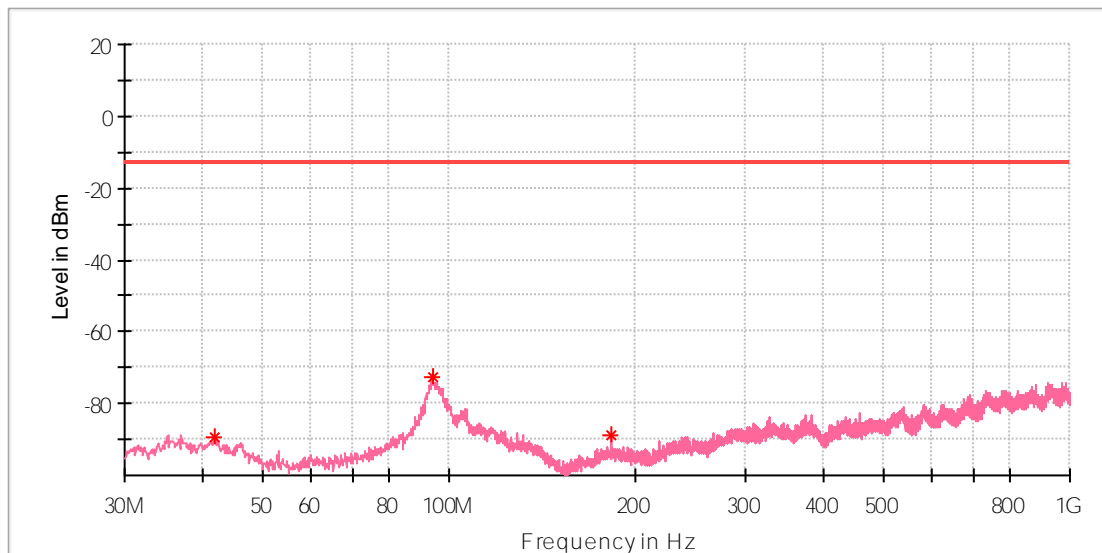

## Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.003750	-89.30	-13.00	76.30	100.0	V	160.0	-123.2
94.262500	-72.65	-13.00	59.65	100.0	V	0.0	-99.6
182.290000	-89.11	-13.00	76.11	100.0	V	133.0	-120.0


Produkte  
Products

Above 1 GHz  
Low Channel  
3.75 kHz

## Test Report

### EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX Low 3.75kHzQPSK 1 @0
Test Voltage:	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

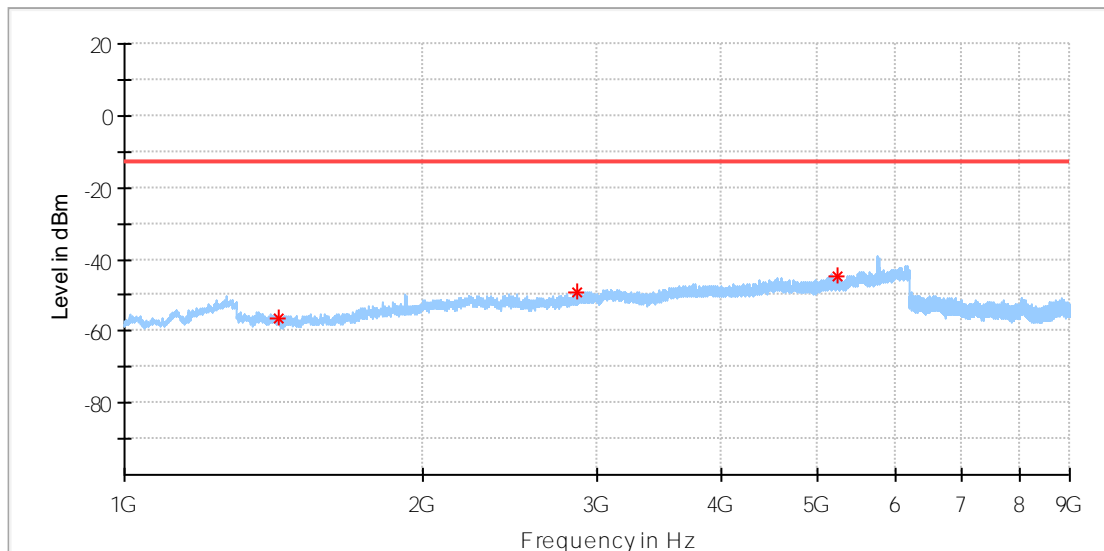

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1432.000000	-56.46	-13.00	43.46	100.0	H	246.0	-93.5
2866.500000	-49.46	-13.00	36.46	100.0	H	309.0	-86.9
5235.000000	-44.72	-13.00	31.72	100.0	H	309.0	-83.1



# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-VW
Test Mode:	TX Low 3.75kHzQPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

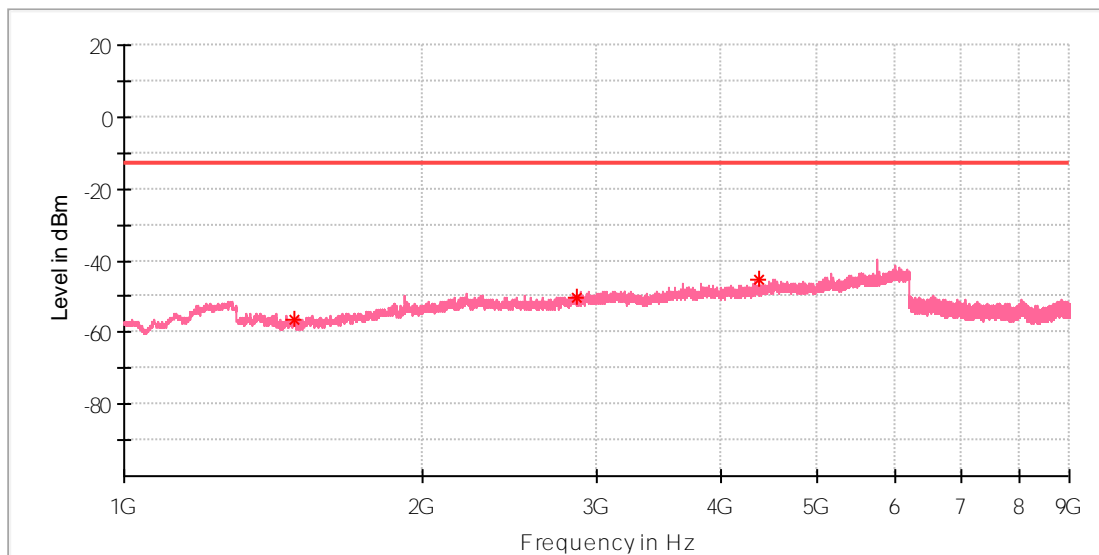


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1482.000000	-56.53	-13.00	43.53	100.0	V	303.0	-93.9
2867.500000	-50.22	-13.00	37.22	100.0	V	241.0	-86.8
4377.000000	-45.47	-13.00	32.47	100.0	V	88.0	-84.6

# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX Low 3.75kHzQPSK 1 @47
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

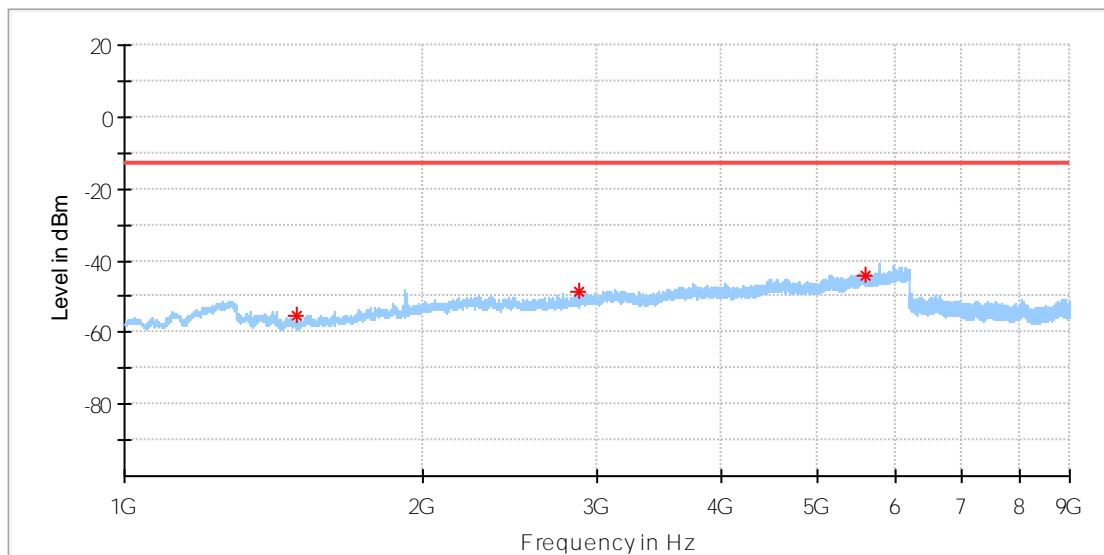


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1489.500000	-55.53	-13.00	42.53	100.0	H	189.0	-93.8
2882.000000	-48.89	-13.00	35.89	100.0	H	71.0	-86.8
5595.500000	-44.42	-13.00	31.42	100.0	H	29.0	-81.9

# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX Low 3.75kHzQPSK 1@47
Test Voltage:	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

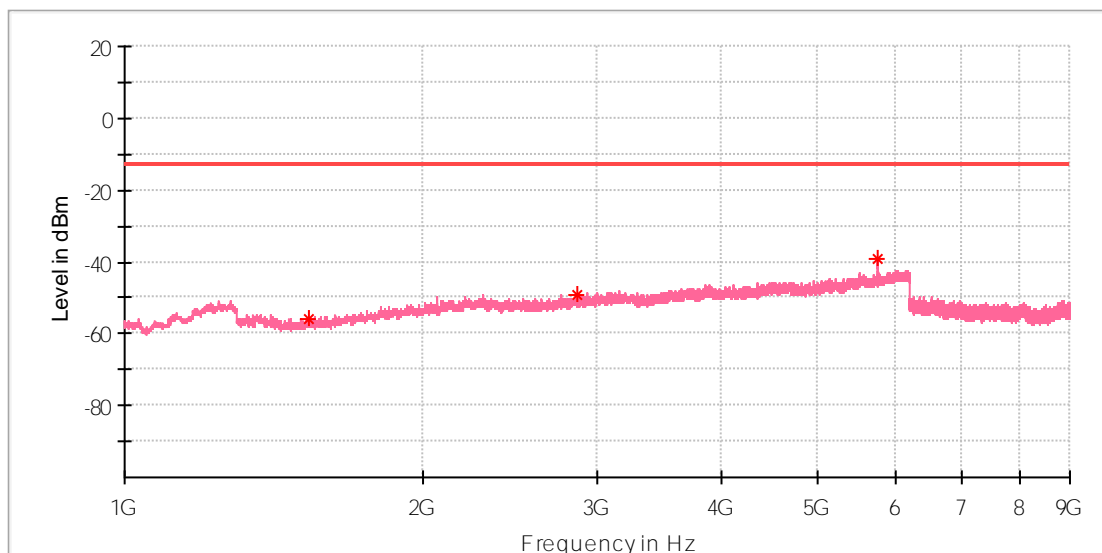

## Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1535.000000	-55.99	-13.00	42.99	100.0	V	348.0	-93.2
2866.500000	-49.11	-13.00	36.11	100.0	V	209.0	-86.8
5762.500000	-39.38	-13.00	26.38	100.0	V	10.0	-81.9


Produkte  
Products

15 kHz

## Test Report

### EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Low 15kHz BPSK 1 @0
Test Voltage:	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

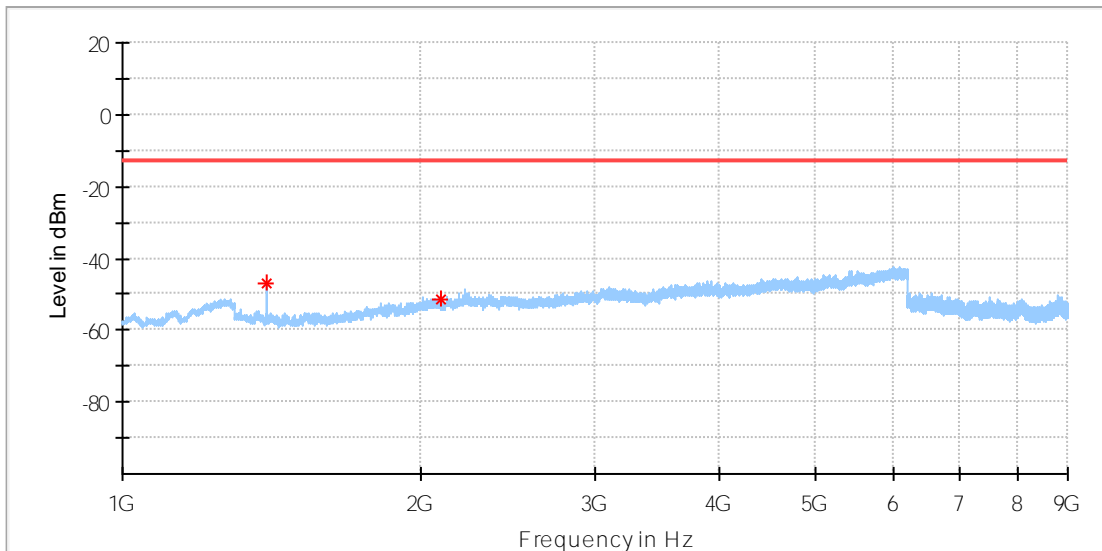


### Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1398.000000	-47.11	-13.00	34.11	100.0	H	60.0	-93.0
2095.500000	-51.55	-13.00	38.55	100.0	H	46.0	-88.8

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Low 15kHz BPSK 1 @0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

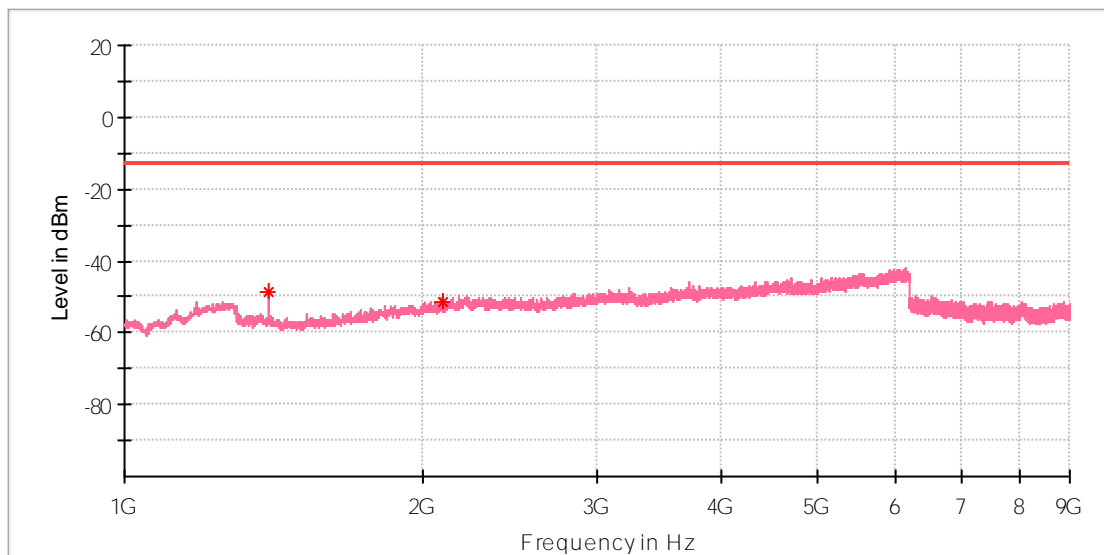


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1398.000000	-48.44	-13.00	35.44	100.0	V	174.0	-92.9
2097.000000	-51.48	-13.00	38.48	100.0	V	174.0	-88.6

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Low 15kHz BPSK 1 @11
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

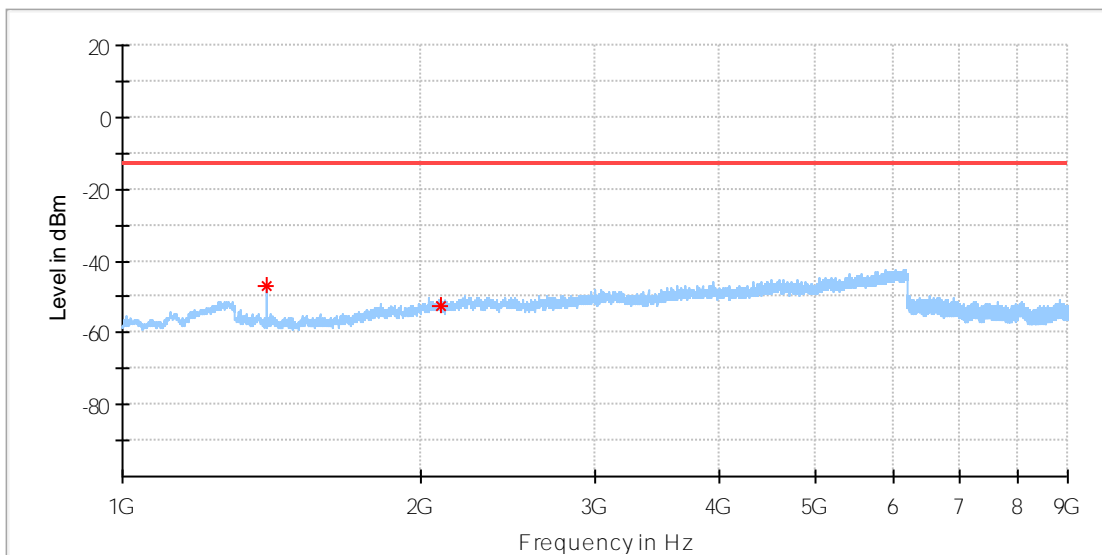


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1398.000000	-46.94	-13.00	33.94	100.0	H	260.0	-93.0
2097.500000	-52.39	-13.00	39.39	100.0	H	107.0	-88.8

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Low 15kHz BPSK 1 @11
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

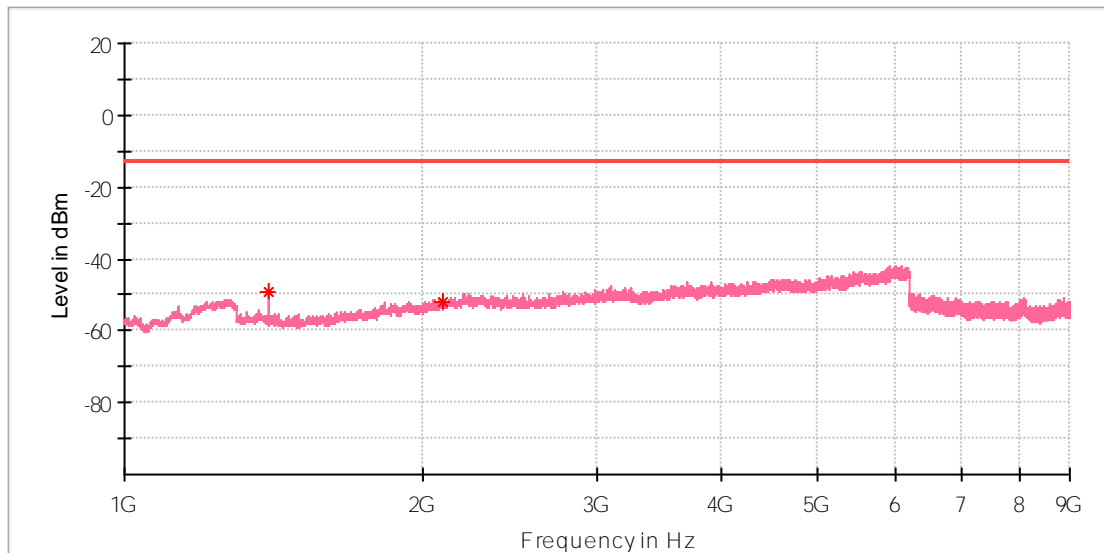


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1398.000000	-49.43	-13.00	36.43	100.0	V	170.0	-92.9
2097.000000	-52.22	-13.00	39.22	100.0	V	239.0	-88.6

# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-VW
Test Mode:	TX Low 15kHz QPSK 12@0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

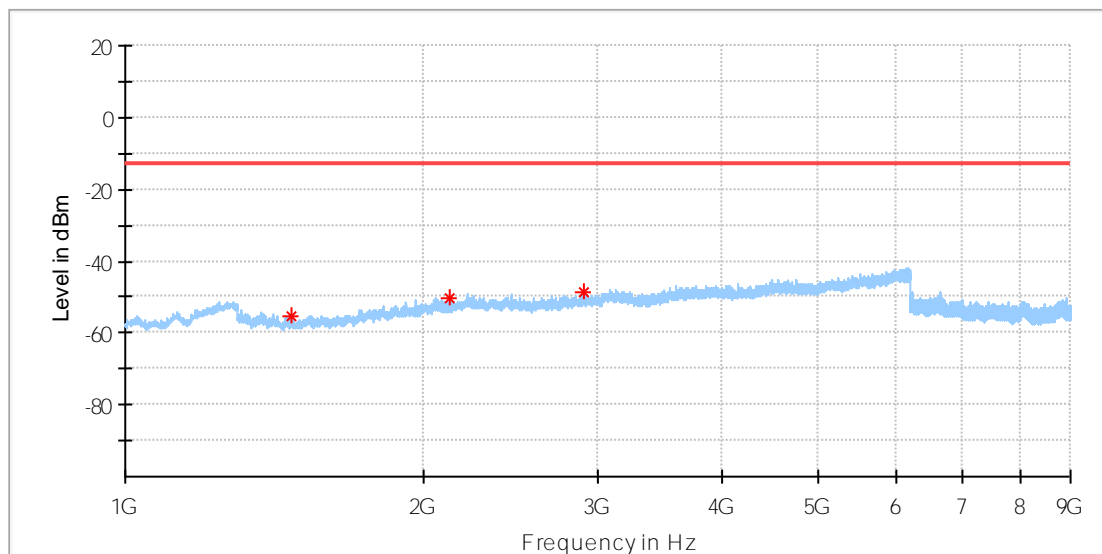

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1470.500000	-55.13	-13.00	42.13	100.0	H	33.0	-93.3
2128.500000	-50.54	-13.00	37.54	100.0	H	345.0	-88.2
2903.000000	-48.91	-13.00	35.91	100.0	H	74.0	-86.9



# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-VV
Test Mode:	TX Low 15kHz QPSK 12@0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

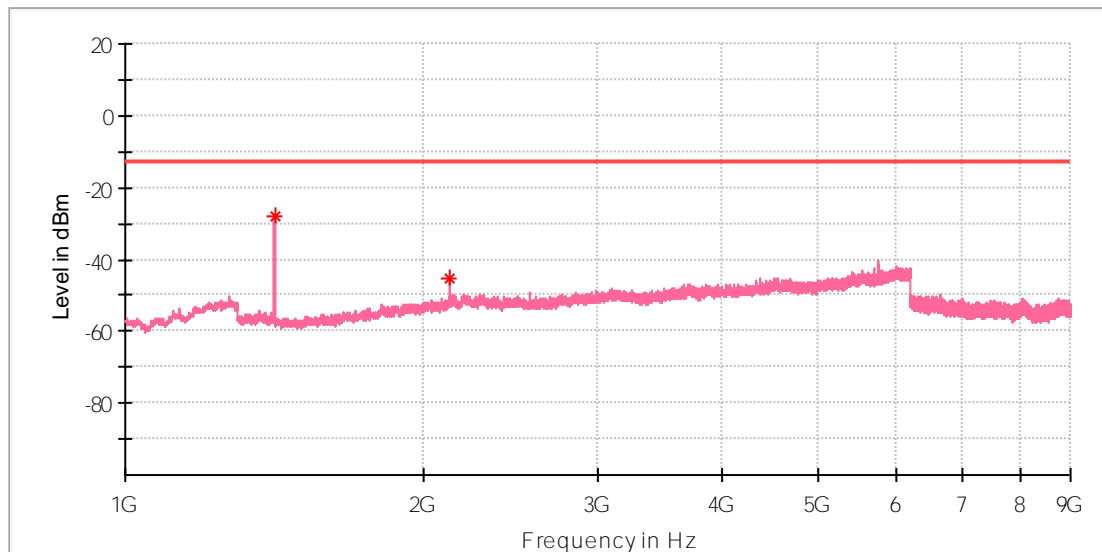

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1415.000000	-27.73	-13.00	14.73	100.0	V	288.0	-92.9
2122.500000	-45.33	-13.00	32.33	100.0	V	329.0	-88.0


Produkte  
Products

Mid Channel  
3.75 kHz

## Test Report

### EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX Mid 3.75kHz QPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

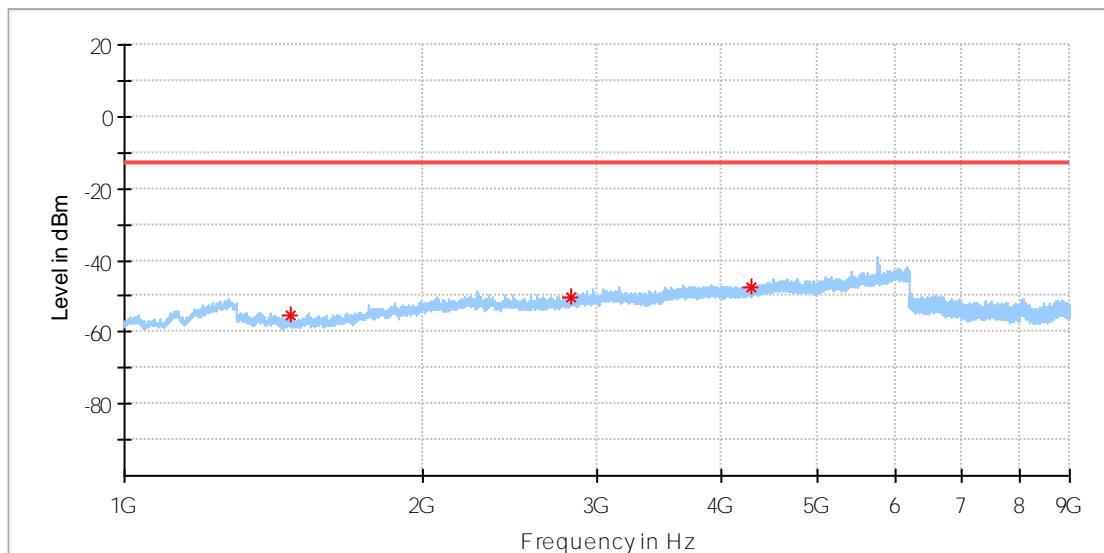


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1468.500000	-55.31	-13.00	42.31	100.0	H	0.0	-93.3
2827.500000	-50.29	-13.00	37.29	100.0	H	163.0	-87.5
4297.500000	-47.50	-13.00	34.50	100.0	H	323.0	-85.2

# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX Mid 3.75kHz QPSK 1 @0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

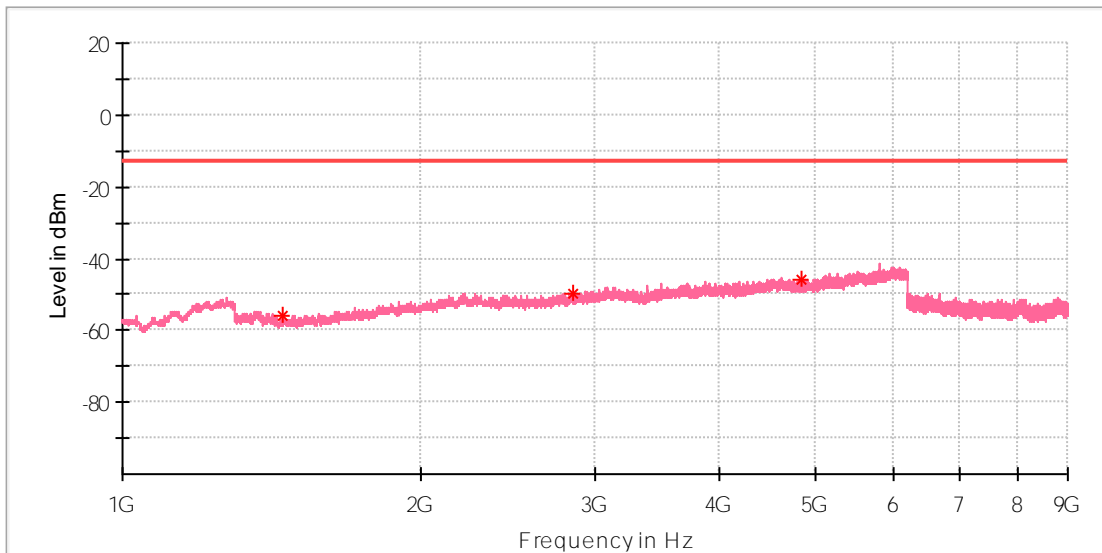


## Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1454.000000	-55.95	-13.00	42.95	100.0	V	0.0	-93.8
2847.500000	-49.94	-13.00	36.94	100.0	V	114.0	-87.3
4852.500000	-45.78	-13.00	32.78	100.0	V	37.0	-84.0

# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX Mid 3.75kHz QPSK 1 @47
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

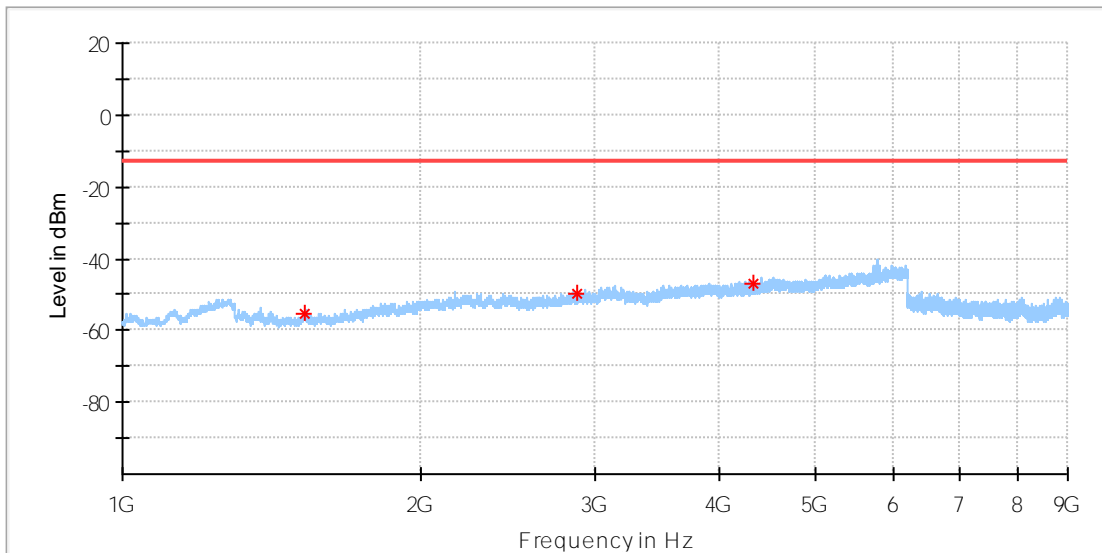


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1524.500000	-55.28	-13.00	42.28	100.0	H	95.0	-92.9
2880.000000	-49.98	-13.00	36.98	100.0	H	345.0	-86.8
4338.500000	-46.83	-13.00	33.83	100.0	H	137.0	-85.0

# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX Mid 3.75kHz QPSK 1 @47
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

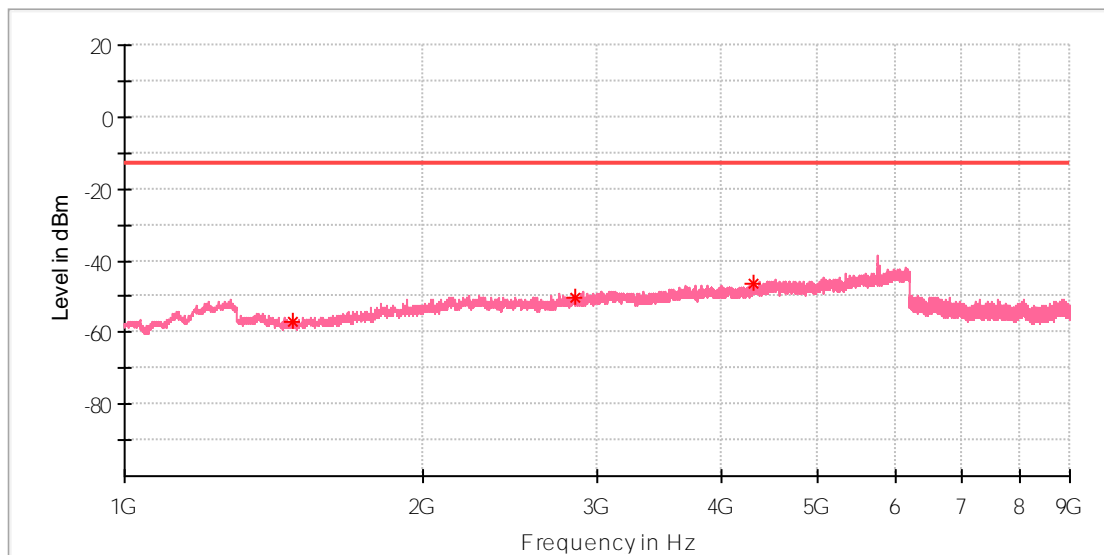

## Critical Freqs


Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1481.000000	-56.85	-13.00	43.85	100.0	V	174.0	-93.9
2856.000000	-50.18	-13.00	37.18	100.0	V	160.0	-87.1
4320.000000	-46.18	-13.00	33.18	100.0	V	272.0	-85.0

15 kHz

## Test Report

### EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

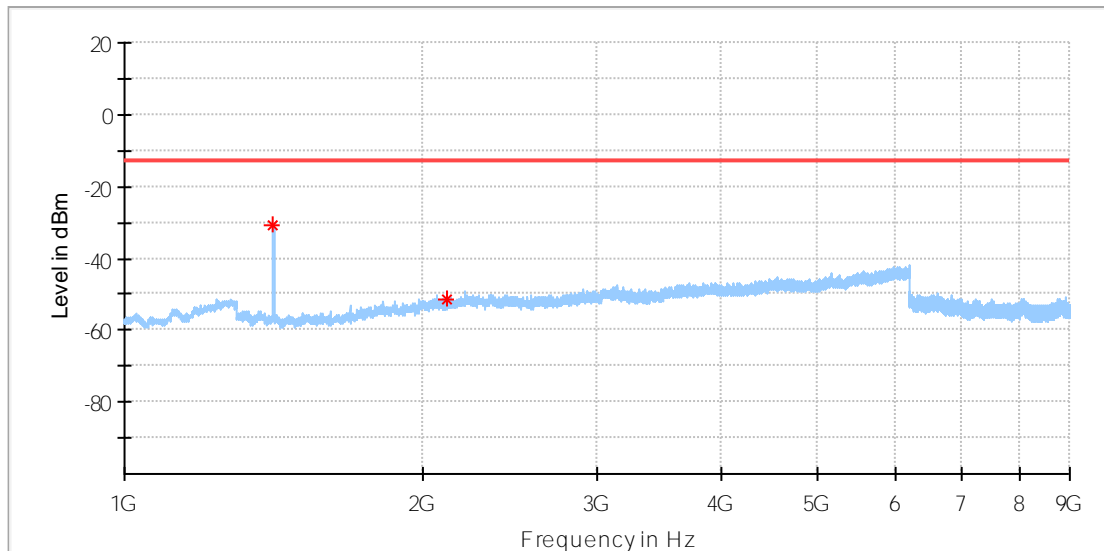


### Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1414.500000	-30.91	-13.00	17.91	100.0	H	274.0	-92.5
2120.000000	-51.29	-13.00	38.29	100.0	H	51.0	-88.6

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@0
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

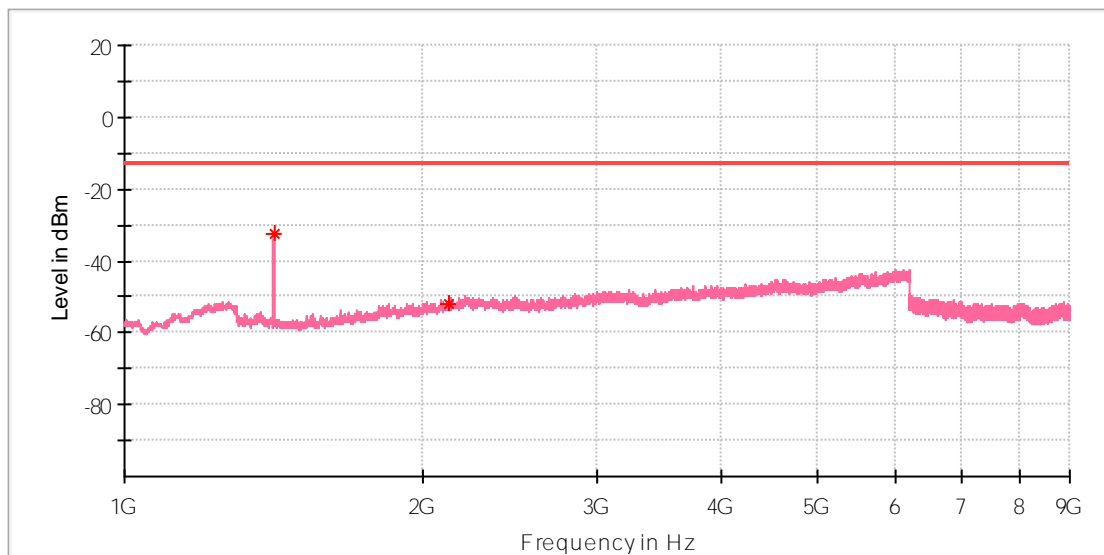


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1415.000000	-32.73	-13.00	19.73	100.0	V	169.0	-92.9
2122.500000	-52.05	-13.00	39.05	100.0	V	176.0	-88.0

# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@11
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

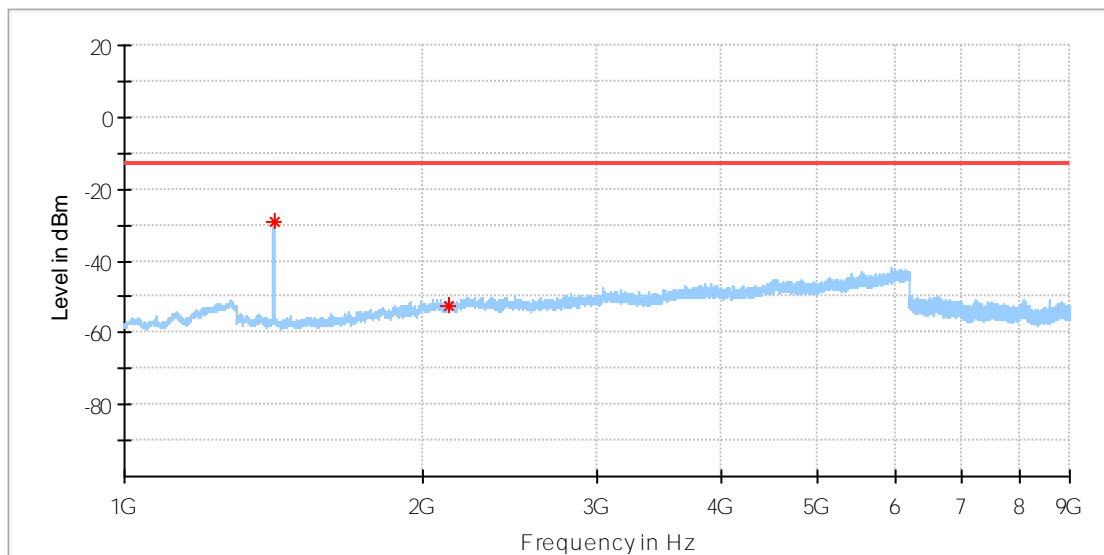

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1415.000000	-29.30	-13.00	16.30	100.0	H	264.0	-92.5
2122.500000	-52.32	-13.00	39.32	100.0	H	347.0	-88.5



# Test Report

## EUT Information

EUT Name:	DATA TERMINAL MODULE
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz BPSK 1@11
Test Voltage::	DC 3.8V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

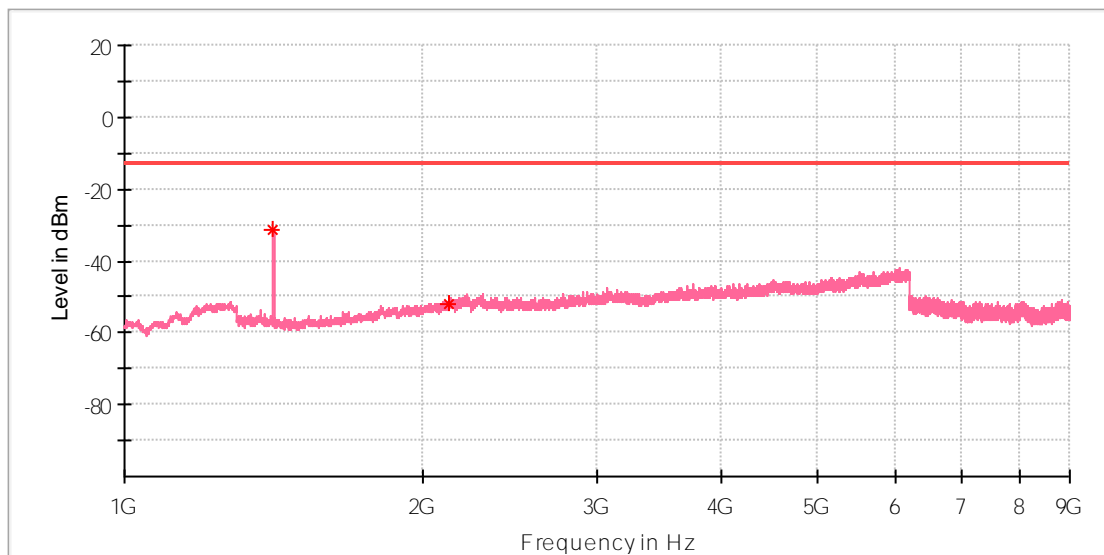


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1414.500000	-31.58	-13.00	18.58	100.0	V	176.0	-92.9
2123.500000	-51.82	-13.00	38.82	100.0	V	142.0	-88.0

# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz QPSK 12@0
Test Voltage:	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

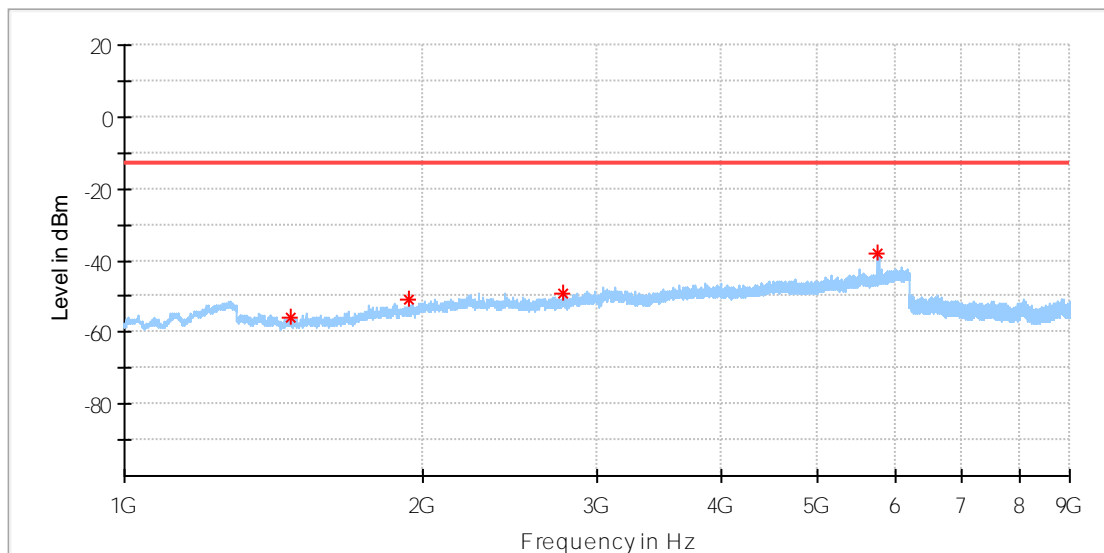


## Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1474.500000	-55.75	-13.00	42.75	100.0	H	279.0	-93.4
1938.000000	-50.69	-13.00	37.69	100.0	H	36.0	-90.0
2778.000000	-49.03	-13.00	36.03	100.0	H	154.0	-87.5
5763.000000	-37.81	-13.00	24.81	100.0	H	175.0	-81.7

# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX Mid 15kHz QPSK 12@0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

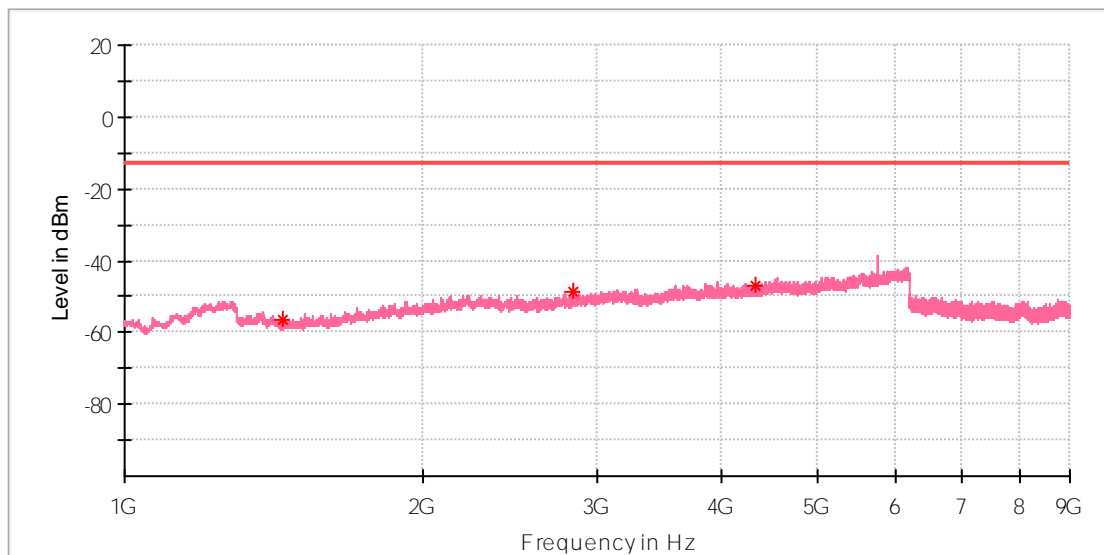

## Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1447.000000	-56.22	-13.00	43.22	100.0	V	267.0	-93.8
2835.500000	-48.66	-13.00	35.66	100.0	V	100.0	-87.4
4325.500000	-46.76	-13.00	33.76	100.0	V	302.0	-84.9


Produkte  
Products

High Channel  
3.75 kHz

## Test Report

### EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX High 3.75kHz QPSK 1 @0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

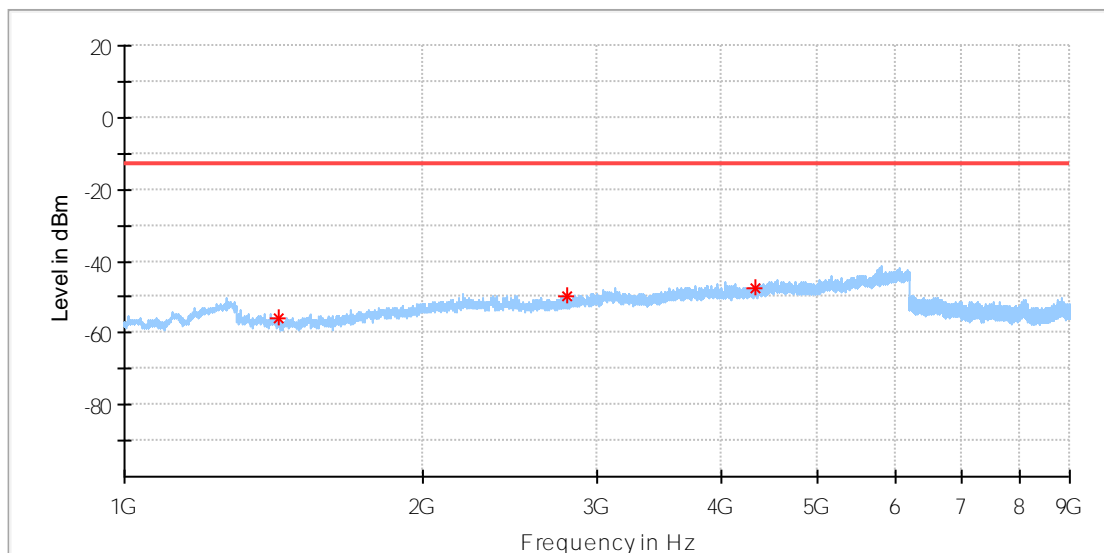


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1429.000000	-55.86	-13.00	42.86	100.0	H	44.0	-93.4
2803.000000	-49.94	-13.00	36.94	100.0	H	246.0	-87.4
4330.500000	-47.29	-13.00	34.29	100.0	H	58.0	-85.1

# Test Report

## EUT Information

EUT Name:	Speaker
Model:	ME310G1-WW
Test Mode:	TX High 3.75kHz QPSK 1 @0
Test Voltage::	DC 3.8V
Remark:	Temp 23 Humi:42%
Test Standard:	FCC Part 27 and RSS-139 Issue 3 and RSS-130 Issue 2
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

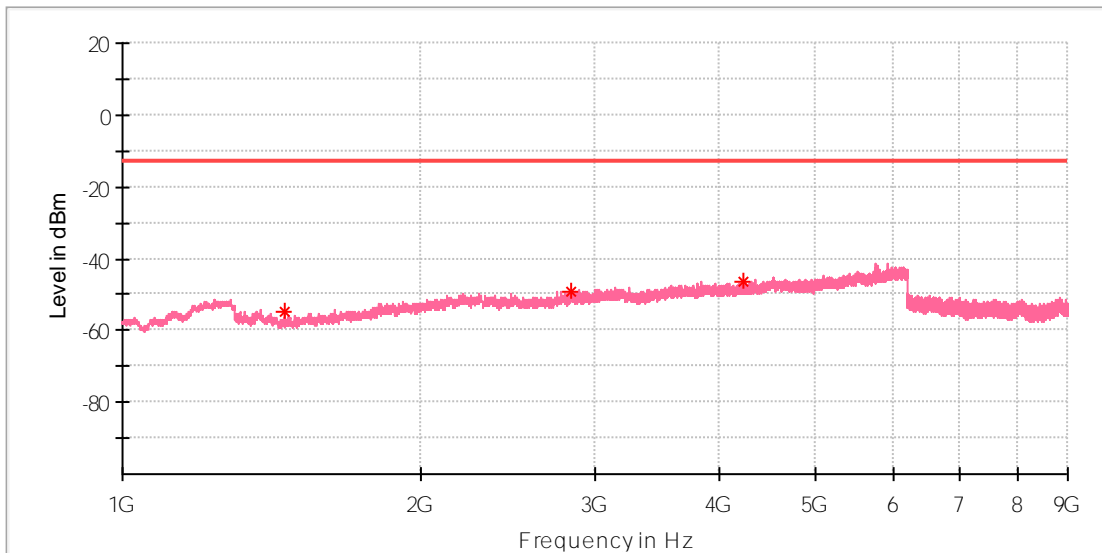

## Critical Freqs

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1459.000000	-55.06	-13.00	42.06	100.0	V	211.0	-93.8
2840.000000	-49.26	-13.00	36.26	100.0	V	142.0	-87.4
4230.000000	-46.57	-13.00	33.57	100.0	V	148.0	-85.2