



REV.	POSITION	DESCRIPTION	REVD.	CHKD.	APPD.	DATE	3D UPDATE
A0			Cary			11-01-2023	

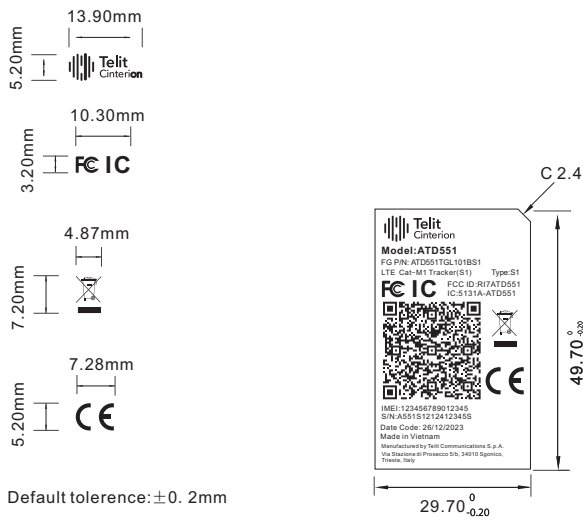

Default tolerance: ±0.2mm

### Definition of S/N

S/N : A551S1 21 24 12345 S

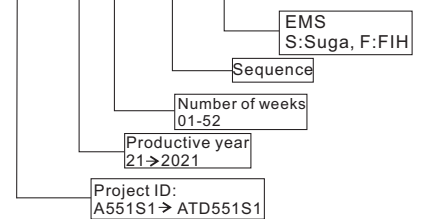

### Notes:

- Material: Printable 75#PET, Matte
- White background with black print, printed on the Face stock, TTR:B110CR
- The QR code contains ICC ID, IMEI, S/N  
ICC ID: 12345678901234567890, IMEI: 123456789012345, S/N: A551S1212412345S
- Operating temperature: -40°C ~ + 80°C
- All materials and processes must comply with RoHs and REACH
- Alcohol friction resistance test:  
It rubbed against the felted wool which has been immersed into absolute alcohol and with 500g weights back and forth for 50 times in the direction of 90 degree vertical.
- Rubber friction resistance test:  
It rubbed against the rubber and with 500g weights back and forth for 50 times in the direction of 90 degree vertical

### Label rules for ATD551S1 :

- The below parts are variable
  - QR code: According to the actual production
  - IMEI: According to the actual production
  - S/N: According to the actual production
  - Date Code: According to the actual production date



<b>PART NAME:</b> ATD551S0 product label Printing file	<b>UNITS:</b> mm	<b>SHEET:</b> 1/1	<b>DRAWN:</b> Cary
<b>PART NO.:</b>	<b>MATERIAL:</b> /	<b>SCALE:</b> 1:1	<b>CHECKED:</b> Nick
	<b>MODEL:</b> ATD551S0	A4	<b>APPROVED:</b>

label location

