

REV.	DESCRIPTION	REVD:	CHKD:	APPD:	DATE
A0		Cary			2023-12-21



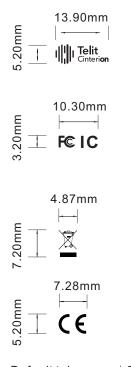

29. 70 0

C 2.4

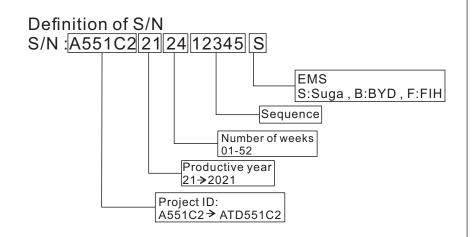

Default tolerence: ±0. 2mm

## Notes:

- 1.Material: Printable 75#PET, Matte
- 2. White background with black print, printed on the Face stock, TTR:B110CR
- 3. The QR code contains ICC ID, IMEI, S/N ICC ID:12345678901234567890,IMEI: 123456789012345,S/N:A551C2212412345S
- 4. Operating temperature: −40°C ~+80 °C
- 5. All materials and processes must comply with RoHs and REACH
- 6. Alcohol friction resistance test: It rubbed against the felted wool which has been immersed into absolute alcohol and with 500g weights back and forth for 50 times in the direction of 90 degree vertical.
- 7. Rubber friction resistance test:
  It rubbed against the rubber and with 500g weights back and forth for 50 times in the direction of 90 degree vertical



## Label rules for ATD551C1:

- The below parts are variable
  - QR code: According to the actual production
  - IMEI: According to the actual production
  - S/N: According to the actual production
  - Date Code: According to the actual production date

PART NAME:	UNITS: mm	SHEET: 1/1	DRAWN: Cary	
ATD551D product label  PART NO.:	MATERIAL: XX	SCALE: 1:1	CHECKED:	
PART NO	MODEL: ATD551C1	<b>◯ ♦</b> A4	APPROVED: Nick	

