



Report No.: FG270608G

FCC RADIO TEST REPORT

FCC ID : RI7FN990A40 Equipment : 5G NR Module

Brand Name :

Telit

Model Name : FN990A40 Marketing Name : FN990A40

Applicant : Telit Communications S.p.A.

Viale Stazione di Prosecco 5/b, Trieste 34010, Italy

Manufacturer : Telit Communications S.p.A.

Viale Stazione di Prosecco 5/b, Trieste 34010, Italy

Standard : FCC 47 CFR Part 2, and 90(S)

The product was received on Jul. 19, 2022 and testing was performed from Jul. 29, 2022 to Nov. 23, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Louis Win

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

TEL: 886-3-327-3456 Page Number : 1 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

Table of Contents

Report No. : FG270608G

His	tory c	f this test report	3
Su	mmar	y of Test Result	4
1	Gene	eral Description	5
	1.1	Feature of Equipment Under Test	5
	1.2	Modification of EUT	
	1.3	Testing Site	5
	1.4	Applied Standards	6
2	Test	Configuration of Equipment Under Test	7
	2.1	Test Mode	7
	2.2	Connection Diagram of Test System	
	2.3	Support Unit used in test configuration and system	8
	2.4	Measurement Results Explanation Example	8
	2.5	Frequency List of Low/Middle/High Channels	g
3	Cond	ducted Test Items	10
	3.1	Measuring Instruments	10
	3.2	Conducted Output Power Measurement and ERP Measurement	11
	3.3	Peak-to-Average Ratio	12
	3.4	99% Occupied Bandwidth and 26dB Bandwidth Measurement	13
	3.5	Emissions Mask Measurement	14
	3.6	Emissions Mask – Out Of Band Emissions Measurement	15
	3.7	Frequency Stability Measurement	16
	3.8	Field Strength of Spurious Radiation Measurement	17
4	List o	of Measuring Equipment	20
5	Unce	ertainty of Evaluation	22
Ар	pendi	x A. Test Results of Conducted Test	
Αp	pendi	x B. Test Results of Radiated Test	
Ap	nendi:	x C. Test Setup Photographs	

TEL: 886-3-327-3456 Page Number : 2 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

History of this test report

Report No.: FG270608G

Report No.	Version	Description	Issue Date	
FG270608G	01	Initial issue of report	Dec. 07, 2022	

TEL: 886-3-327-3456 Page Number : 3 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

Summary of Test Result

Report No.: FG270608G

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046 §90.635	Conducted Output Power and Effective Radiated Power	Pass	-
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	-
3.5	§2.1051 §90.691	Emission masks – In-band emissions	Pass	-
3.6	§2.1051 §90.691	Emission masks – Out of band emissions	Pass	-
3.7	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	Pass	-
3.8	§2.1053 §90.691	Field Strength of Spurious Radiation	Pass	43.32 dB under the limit at 3257.000 MHz

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
 It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- 2. The measurement uncertainty please refer to report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Avis Chuang Report Producer: Lucy Wu

TEL: 886-3-327-3456 Page Number : 4 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

1 General Description

1.1 Feature of Equipment Under Test

WCDMA/LTE/5G NR, and GNSS

Product Feature								
Antenna Type	WWAN: Dipole Antenna GPS/Glonass/BDS/Galileo/SBAS: Dipole Antenna							
Antenna Gain	LTE Band 26: 3.5 dBi							

Report No.: FG270608G

Remark: The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
Test Site No.	TH03-HY
Test Engineer	George Chen
Temperature (°C)	22.8~24.5
Relative Humidity (%)	51~58

Test Site	Sporton International Inc. Wensan Laboratory				
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855				
Toot Cita Na	Sporton Site No.				
Test Site No.	03CH13-HY (TAF Code: 3786)				
Test Engineer	Rain Lee, Jacky Hong and Mancy Chou				
Temperature (°C)	20~25				
Relative Humidity (%)	50~60				
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.				

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

TEL: 886-3-327-3456 Page Number : 5 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

1.4 Applied Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

Report No.: FG270608G

- FCC 47 CFR Part 2, 90
- ANSI / TIA-603-E
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- FCC KDB 414788 D01 Radiated Test Site v01r01
- Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

Remark:

- All the test items were validated and recorded in accordance with the standards without any modification during the testing.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
- 3. The TAF code is not including all the FCC KDB listed without accreditation.

TEL: 886-3-327-3456 Page Number : 6 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in two config (Ant. Horizontal and Ant. Vertical), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.


Report No.: FG270608G

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Conducted			Bandwidth (MHz)				Modulation			RB # Test Chann			nnel				
Test Cases	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	Н
Max. Output Power	26	٧	v	v	v	v	-	v	٧	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	26				v	v	-	v	>	v	v			v		٧	
26dB and 99% Bandwidth	26	٧	v	v	v	v	-	v	٧	v	v			v	v	v	
Emission masks In-band emissions	26	٧	v	v	v	v	-	v	٧	v	v	v		v	v		v
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v				v			v	v	٧
Frequency Stability	26	ı	-		v	v	-	v						v		v	
E.R.P.	26					v	-	v	٧	v	v		I	Max.	Powe	er	
Radiated Spurious Emission	26		Worst Case V								v	v	٧				
Remark	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. 4. One representative bandwidth is selected to perform PAR and frequency stability.																

TEL: 886-3-327-3456 Page Number : 7 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

2.2 Connection Diagram of Test System

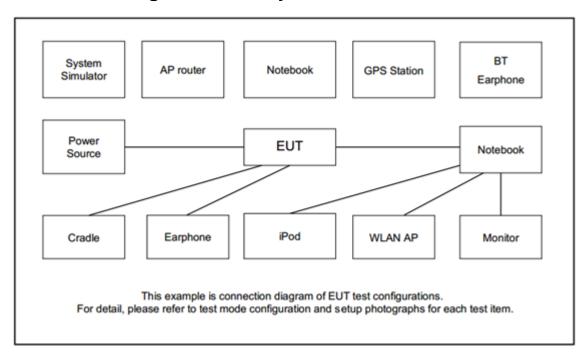

Report No.: FG270608G

2.3 Support Unit used in test configuration and system

Item	Equipment Brand Name		Model No.	FCC ID Data Cable		Power Cord	
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m	
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m	
3.	Power supply	GW Instek	GPE-2323	N/A	N/A	Unshielded, 1.8m	

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

= 4.2 + 10 = 14.2 (dB)

TEL: 886-3-327-3456 Page Number : 8 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List												
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest								
45	Channel	26765	-	-								
15	Frequency	821.5	-	-								
40	Channel	-	26740	-								
10	Frequency	-	819	-								
5	Channel	26715	26740	26765								
5	Frequency	816.5	819	821.5								
3	Channel	26705	26740	26775								
3	Frequency	815.5	819	822.5								
1 1	Channel	26697	26740	26783								
1.4	Frequency	814.7	819	823.3								

Report No.: FG270608G

	LTE Band 26 Ch	annel and Frequen	ıcy List	
BW [MHz]	Channel/Frequency(MHz)	-	cross-rule channels	
15	Channel	-	26790	-
15	Frequency	-	824	-
10	Channel	-	26790	-
10	Frequency	-	824	-
5	Channel	-	26790	-
5	Frequency	-	824	-
3	Channel	-	26790	-
3	Frequency	-	824	-
1.4	Channel	-	26790	-
1.4	Frequency	-	824	-

TEL: 886-3-327-3456 Page Number : 9 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.


3.1.1 Test Setup

3.1.2 Conducted Output Power




Report No.: FG270608G

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, Emissions Mask – Out Of Band Emissions, and Conducted Spurious Emission

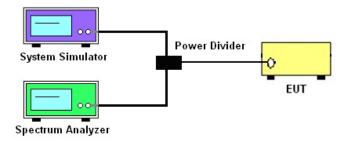

3.1.4 Frequency Stability

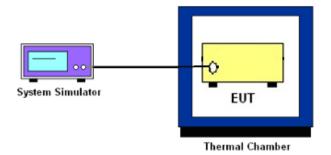

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 10 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

3.2 Conducted Output Power Measurement and ERP Measurement

3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Report No.: FG270608G

The output power of mobile transmitters must not exceed 100 Watts for LTE Band 26.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

TEL: 886-3-327-3456 Page Number : 11 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Reporting only

3.3.2 Test Procedures

- 1. The EUT was connected to spectrum and system simulator via a power divider.
- 2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.

Report No.: FG270608G

- 3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 4. Record the deviation as Peak to Average Ratio.

TEL: 886-3-327-3456 Page Number : 12 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Report No.: FG270608G

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.4.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

TEL: 886-3-327-3456 Page Number : 13 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

3.5 Emissions Mask Measurement

3.5.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)

Report No.: FG270608G

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 $\log_{10}(f/6.1)$ decibels or 50 + 10 $\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{Log}_{10}$ (P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.5.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- 3. Set RBW and VBW 3 times of RBW to make the measurement with the spectrum analyzer's, and according to KDB 971168 D02 Misc Rev Approve License Devices v02r01 standards, set RBW = 300 Hz to make offsets less than 37.5 kHz from a channel edge, RBW = 100 kHz to make offsets greater than 37.5 kHz, that is allowed.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

TEL: 886-3-327-3456 Page Number : 14 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

3.6 Emissions Mask - Out Of Band Emissions Measurement

3.6.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

Report No.: FG270608G

3.6.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. For testing below 1GHz, make the measurement with the spectrum analyzer's RBW = 100 kHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. For testing above 1GHz, make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 8. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 15 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Report No.: FG270608G

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the base station.
- The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 Page Number : 16 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

3.8 Field Strength of Spurious Radiation Measurement

3.8.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

Report No.: FG270608G

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43+10log₁₀(P[Watts]) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.8.2 Test Procedures

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. For testing below 1GHz, make the measurement with the spectrum analyzer's RBW = 100 kHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. For testing above 1GHz, make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12. ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 17 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022


3.8.3 Test Setup

For radiated test below 30MHz

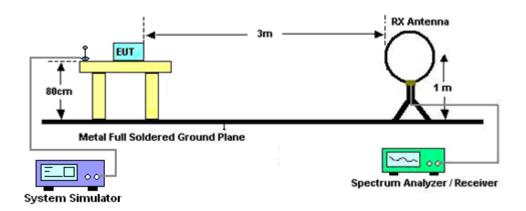


Report No.: FG270608G

For radiated test from 30MHz to 1GHz

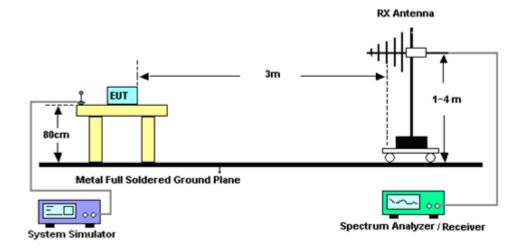

TEL: 886-3-327-3456 Page Number : 18 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

For radiated test above 1GHz

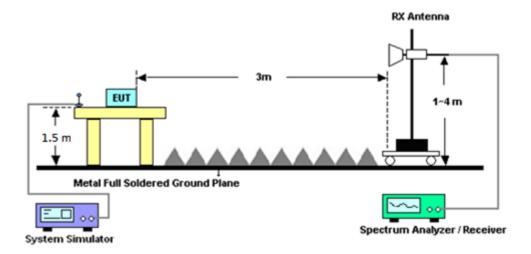

Report No.: FG270608G

3.8.4 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

TEL: 886-3-327-3456 Page Number : 19 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	May 13, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	May 12, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz~30MHz	Mar. 10, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Mar. 09, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 21, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Feb. 20, 2023	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 15, 2021	Jul. 29, 2022 ~ Aug. 02, 2022	Dec. 14, 2022	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	40103 & 07	30MHz~1GHz	Apr. 24, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Apr. 23, 2023	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	41912 & 05	30MHz~1GHz	Feb. 06, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Feb. 05, 2023	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303B	TP200889	N/A	Sep. 30, 2021	Jul. 29, 2022 ~ Aug. 02, 2022	Sep. 29, 2022	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 17, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	May 16, 2023	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY532701 47	1GHz~26.5GHz	Oct. 26, 2021	Jul. 29, 2022 ~ Aug. 02, 2022	Oct. 25, 2022	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY553705 26	10Hz~44GHz	Mar. 18, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Mar. 17, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN12	1.53GHz Low Pass Filter	Sep. 14, 2021	Jul. 29, 2022 ~ Aug. 02, 2022	Sep. 13, 2022	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-108 0-1200-15000 -60SS	SN3	1.2GHz High Pass Filter	Jun. 30, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Jun. 29, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN2	3GHz High Pass Filter	Jul. 12, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Jul. 11, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 09, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 09, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/ 4	30MHz~18GHz	Feb. 09, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jul. 29, 2022 ~ Aug. 02, 2022	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Jul. 29, 2022 ~ Aug. 02, 2022	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jul. 29, 2022 ~ Aug. 02, 2022	N/A	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-021 14	1-18GHz	Aug. 04, 2021	Jul. 29, 2022 ~ Aug. 02, 2022	Aug. 03, 2022	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-121 2	1GHz~18GHz	Mar. 10, 2022	Jul. 29, 2022 ~ Aug. 02, 2022	Mar. 09, 2023	Radiation (03CH13-HY)

Report No.: FG270608G

TEL: 886-3-327-3456 Page Number : 20 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyzer	Anritsu	MT8821C	626202528 0	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 29, 2021	Aug. 13, 2022~ Oct. 27, 2022	Oct. 28, 2022	Conducted (TH03-HY)
Radio Communication Analyzer	Anritsu	MT8821C	626202535 3	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 13, 2022	Oct. 28, 2022~ Nov. 23, 2022	Oct. 12, 2023	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101908	10Hz~40GHz	Oct. 01, 2021	Aug. 13, 2022~ Sep. 26, 2022	Sep. 30, 2022	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101908	10Hz~40GHz	Sep. 27, 2022	Sep. 27, 2022~ Nov. 23, 2022	Sep. 26, 2023	Conducted (TH03-HY)
Thermal Chamber	ESPEC	SH-641	92013720	-40°C ~90°C	Sep. 09, 2021	Aug. 13, 2022~ Sep. 07, 2022	Sep. 08, 2022	Conducted (TH03-HY)
Thermal Chamber	ESPEC	SH-641	92013720	-40°C ~90°C	Sep. 07, 2022	Sep. 08, 2022~ Nov. 23, 2022	Sep. 06, 2023	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPP-2323	GES90603 7	0V~64V ; 0A~6A	Jan. 06, 2022	Aug. 13, 2022~ Nov. 23, 2022	Jan. 05, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 07, 2022	Aug. 13, 2022~ Nov. 23, 2022	Jan. 06, 2023	Conducted (TH03-HY)

Report No.: FG270608G

TEL: 886-3-327-3456 Page Number : 21 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.40 dB
Confidence of 95 % (0 = 200(y))	

Report No.: FG270608G

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.81 dB

TEL: 886-3-327-3456 Page Number : 22 of 22 FAX: 886-3-328-4978 Issue Date : Dec. 07, 2022

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power & ERP)

	LTE	Band 26 N	laximum A	verage Po	wer [dBm] (GT - LC	= 3.5 dB)	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
15	1	0		22.70	-	-		
15	1	37		22.69	-	-		
15	1	74		22.64	-	-		
15	36	0	QPSK	21.86	-	-	24.05	0.2541
15	36	20		21.79	-	-		
15	36	39	-	21.85	-	-		
15	75	0		21.83	-	-		
15	1	0		21.95	-	-		
15	1	37		22.07	-	-		
15	1	74		21.99	-	-		
15	36	0	16-QAM	20.76	-	-	23.42	0.2198
15	36	20		20.83	-	-		
15	36	39		20.85	-	-		
15	75	0		20.82	-	-		
15	1	0		20.92	-	-		
15	1	37		20.88	-	-		
15	1	74		20.93	-	-		
15	36	0	64-QAM	19.74	-	-	22.28	0.1690
15	36	20		19.81	-	-		
15	36	39		19.84	-	-		
15	75	0		19.84	-	-		
15	1	0		17.64	-	-		
15	1	37		17.47	-	-		
15	1	74		17.53	-	-		
15	36	0	256-QAM	17.54	-	-	18.99	0.0793
15	36	20		17.52	-	-		
15	36	39		17.54	-	-	1	
15	75	0		17.42	-	-		
Limit	P	ower < 100	W		Result		Pa	ISS



	LTE	Band 26 N	/laximum A	verage Po	wer [dBm] (GT - LC :	= 3.5 dB)	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
10	1	0		-	22.85	-		
10	1	25		-	22.59	-		
10	1	49		-	22.64	-		
10	25	0	QPSK	-	21.72	-	24.20	0.2630
10	25	12		-	21.59	ı		
10	25	25		-	21.65	-		
10	50	0		-	21.60	-		
10	1	0		-	21.79	-		
10	1	25		-	21.99	-		
10	1	49		-	22.00	-		
10	25	0	16-QAM	-	20.70	-	23.35	0.2163
10	25	12		-	20.76	-		
10	25	25		-	20.74	-		
10	50	0		-	20.62	ı		
10	1	0		-	20.72	ı		
10	1	25		-	20.90	ı		
10	1	49		-	20.77	1		
10	25	0	64-QAM	-	19.75	ı	22.25	0.1679
10	25	12		-	19.67	ı		
10	25	25		-	19.80	-		
10	50	0		-	19.75	-		
10	1	0		-	17.98	-		
10	1	25		-	17.86	-		
10	1	49		-	17.89	-		
10	25	0	256-QAM	-	17.86	-	19.33	0.0857
10	25	12		-	17.67	-		
10	25	25		-	17.78	-	1	
10	50	0		-	17.86	-		
Limit	P	ower < 100	W		Result		Pa	ISS



	LTE	Band 26 N	/laximum A	verage Po	wer [dBm] (GT - LC :	= 3.5 dB)	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
5	1	0		22.67	22.75	22.72		
5	1	12		22.49	22.46	22.58		
5	1	24		22.48	22.44	22.43		
5	12	0	QPSK	21.79	21.89	21.82	24.10	0.2570
5	12	7		21.77	21.68	21.87		
5	12	13		21.83	21.91	21.75		
5	25	0		21.77	21.78	21.72	1	
5	1	0		21.85	21.78	21.82		
5	1	12		21.97	21.96	22.02		
5	1	24		21.82	21.81	21.86		
5	12	0	16-QAM	20.67	20.62	20.66	23.37	0.2173
5	12	7		20.71	20.67	20.65		
5	12	13		20.68	20.75	20.58		
5	25	0		20.72	20.66	20.68		
5	1	0		20.80	20.81	20.86		
5	1	12		20.72	20.65	20.81		
5	1	24		20.73	20.79	20.63		
5	12	0	64-QAM	19.63	19.65	19.70	22.21	0.1663
5	12	7		19.66	19.68	19.65		
5	12	13		19.70	19.68	19.77		
5	25	0		19.79	19.71	19.69		
5	1	0		17.47	17.48	17.37	_	
5	1	12		17.42	17.43	17.39		
5	1	24		17.48	17.52	17.56		
5	12	0	256-QAM	17.47	17.57	17.39	18.92	0.0780
5	12	7		17.40	17.41	17.46		
5	12	13		17.47	17.39	17.50	1	
5	25	0		17.42	17.48	17.37		
Limit	P	ower < 100	W		Result		Pa	ISS



	LTE	Band 26 N	laximum A	verage Po	wer [dBm] (GT - LC	= 3.5 dB)	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
3	1	0		22.53	22.51	22.47		
3	1	8		22.61	22.66	22.54		
3	1	14		22.49	22.42	22.56		
3	8	0	QPSK	21.73	21.81	21.77	24.01	0.2518
3	8	4		21.70	21.63	21.72		
3	8	7		21.78	21.71	21.78		
3	15	0		21.76	21.79	21.66		
3	1	0		21.78	21.79	21.78		
3	1	8		21.97	21.87	21.99		
3	1	14		21.99	21.94	22.08		
3	8	0	16-QAM	20.61	20.65	20.66	23.43	0.2203
3	8	4		20.79	20.82	20.85		
3	8	7		20.72	20.69	20.65		
3	15	0		20.74	20.67	20.80		
3	1	0		20.81	20.83	20.81		
3	1	8		20.78	20.69	20.70		
3	1	14		20.76	20.76	20.80		
3	8	0	64-QAM	19.72	19.65	19.76	22.18	0.1652
3	8	4		19.63	19.63	19.71		
3	8	7		19.68	19.69	19.72		
3	15	0		19.70	19.66	19.60		
3	1	0		17.47	17.46	17.55		
3	1	8		17.36	17.46	17.42		
3	1	14		17.52	17.59	17.44		
3	8	0	256-QAM	17.43	17.39	17.36	18.94	0.0783
3	8	4		17.33	17.36	17.41		
3	8	7		17.38	17.47	17.45	1	
3	15	0		17.24	17.23	17.15		
Limit	P	ower < 100	W		Result		Pa	ISS



	LTE	Band 26 N	laximum A	verage Po	wer [dBm] (GT - LC :	= 3.5 dB)	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
1.4	1	0		22.86	22.90	22.95		
1.4	1	3		22.87	22.89	22.85		
1.4	1	5		22.84	22.86	22.87		
1.4	3	0	QPSK	22.88	22.98	22.84	24.34	0.2716
1.4	3	1		22.89	22.85	22.83		
1.4	3	3		22.89	22.85	22.99		
1.4	6	0		21.88	21.98	21.88		
1.4	1	0		22.18	22.09	22.25		
1.4	1	3		22.21	22.31	22.12		
1.4	1	5		22.13	22.23	22.15		
1.4	3	0	16-QAM	22.02	22.04	22.10	23.66	0.2323
1.4	3	1		22.05	22.10	22.08		
1.4	3	3		22.00	21.97	21.94		
1.4	6	0		20.94	20.93	20.84		
1.4	1	0		21.05	21.01	21.04		
1.4	1	3		21.05	21.11	21.06		
1.4	1	5		21.05	21.13	21.10		
1.4	3	0	64-QAM	21.00	21.06	21.04	22.48	0.1770
1.4	3	1		21.00	20.95	20.91		
1.4	3	3		20.99	20.94	21.00		
1.4	6	0		19.93	19.90	19.94		
1.4	1	0		17.46	17.45	17.52		
1.4	1	3		17.42	17.49	17.34		
1.4	1	5		17.42	17.46	17.48		
1.4	3	0	256-QAM	17.52	17.49	17.52	18.87	0.0771
1.4	3	1		17.38	17.32	17.46		
1.4	3	3		17.37	17.31	17.32		
1.4	6	0		17.37	17.46	17.27		
Limit	P	ower < 100	W	-	Result		Pa	iss



	LTE Band	d 26 Strado	dle Maxim	um Averag	ge Power [dBm] (GT ·	· LC = 3.5 dB)
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
15	1	0		-	22.60	-		
15	1	37		-	22.69	-		
15	1	74		-	22.62	-		
15	36	0	QPSK	-	21.87	-	24.04	0.2535
15	36	20		-	21.78	-		
15	36	39		•	21.95	-		
15	75	0		•	21.83	-		
15	1	0		1	22.01	-		
15	1	37		•	22.08	-		
15	1	74		•	21.91	-		
15	36	0	16-QAM	-	20.84	-	23.43	0.2203
15	36	20		-	20.87	-		
15	36	39		-	20.90	-		
15	75	0		-	20.76	-		
15	1	0		-	21.00	-		
15	1	37		-	20.91	-		
15	1	74		ı	20.95	-		
15	36	0	64-QAM	•	19.79	-	22.35	0.1718
15	36	20		-	19.85	-		
15	36	39		-	19.92	-		
15	75	0		-	19.88	-		
15	1	0		ı	17.73	-		
15	1	37		1	17.52	-		
15	1	74		-	17.46	-		
15	36	0	256-QAM	Ī	17.51	-	19.08	0.0809
15	36	20		ı	17.45	-		
15	36	39		1	17.54	-	1	
15	75	0		1	17.38	-		
Limit	R	eporting on	nly		Result		N.	/A



	LTE Band	d 26 Strado	dle Maxim	um Averaç	ge Power [dBm] (GT -	- LC = 3.5 dB)
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
10	1	0		-	22.63	-		
10	1	25		-	22.62	-		
10	1	49		-	22.48	-		
10	25	0	QPSK	-	21.74	-	23.98	0.2500
10	25	12		-	21.73	-		
10	25	25		-	21.82	-		
10	50	0		-	21.75	-		
10	1	0		-	21.90	-		
10	1	25		-	21.99	-		
10	1	49		-	21.89	-		
10	25	0	16-QAM	-	20.53	-	23.34	0.2158
10	25	12		-	20.71	-		
10	25	25		-	20.75	-		
10	50	0		-	20.88	-		
10	1	0		-	20.97	-		
10	1	25		-	20.94	-		
10	1	49		-	20.90	-		
10	25	0	64-QAM	-	19.59	-	22.32	0.1706
10	25	12		-	19.77	-		
10	25	25		-	19.85	-		
10	50	0		-	19.76	-		
10	1	0		-	17.49	-		
10	1	25		-	17.51	-		
10	1	49		-	17.43	-		
10	25	0	256-QAM	-	17.40	-	18.92	0.0780
10	25	12		-	17.44	-		
10	25	25		-	17.57	-		
10	50	0		-	17.21	-		
Limit	R	eporting on	nly		Result	•	N	/A



	LTE Band	d 26 Strado	dle Maxim	um Averaç	je Power [dBm] (GT -	- LC = 3.5 dB)
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
5	1	0		-	22.74	-		
5	1	12		-	22.42	-		
5	1	24		-	22.52	-		
5	12	0	QPSK	-	21.77	-	24.09	0.2564
5	12	7		-	21.69	-		
5	12	13		-	21.93	-		
5	25	0		-	21.83	-	1	
5	1	0		-	21.82	-		
5	1	12		-	22.00	-		
5	1	24		-	21.83	-		
5	12	0	16-QAM	-	20.77	-	23.35	0.2163
5	12	7		-	20.78	-		
5	12	13		-	20.61	-		
5	25	0		-	20.80	-		
5	1	0		-	20.72	-		
5	1	12		-	20.74	-		
5	1	24		-	20.68	-		
5	12	0	64-QAM	-	19.71	-	22.09	0.1618
5	12	7		-	19.60	-		
5	12	13		-	19.68	-		
5	25	0		-	19.69	-		
5	1	0		-	17.38	-	_	
5	1	12		-	17.44	-		
5	1	24		-	17.38	-		
5	12	0	256-QAM	-	17.54	-	18.89	0.0774
5	12	7		-	17.31	-		
5	12	13		-	17.45	-		
5	25	0		-	17.38	-		
Limit	R	eporting on	ıly		Result		N	/A



	LTE Band	d 26 Strado	dle Maxim	um Averaç	je Power [dBm] (GT -	- LC = 3.5 dB)
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
3	1	0		-	22.55	-		
3	1	8		-	22.60	-		
3	1	14		-	22.49	-		
3	8	0	QPSK	-	21.65	-	23.95	0.2483
3	8	4		-	21.75	-		
3	8	7		-	21.80	-		
3	15	0		-	21.84	-		
3	1	0		ı	21.68	-		
3	1	8		-	22.01	-		
3	1	14		-	21.99	-		
3	8	0	16-QAM	-	20.69	-	23.36	0.2168
3	8	4		-	20.79	-		
3	8	7		ı	20.69	-		
3	15	0		ı	20.78	-		
3	1	0		-	20.71	-		
3	1	8		-	20.88	-		
3	1	14		1	20.83	-		
3	8	0	64-QAM	ı	19.79	-	22.23	0.1671
3	8	4		1	19.68	-		
3	8	7		ı	19.65	-		
3	15	0			19.65	-		
3	1	0			17.41	-		
3	1	8		-	17.33	-		
3	1	14		-	17.54	-		
3	8	0	256-QAM	-	17.36	-	18.89	0.0774
3	8	4		-	17.37	-		
3	8	7		-	17.28	-		
3	15	0		-	17.18	-		
Limit	R	eporting on	ıly		Result		N.	/A



	LTE Band	d 26 Strado	dle Maxim	um Averaç	je Power [dBm] (GT -	- LC = 3.5 dB)
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
1.4	1	0		-	22.84	-		
1.4	1	3		-	22.80	-		
1.4	1	5		-	22.78	-		
1.4	3	0	QPSK	-	22.81	-	24.33	0.2710
1.4	3	1		-	22.98	-		
1.4	3	3		-	22.86	-		
1.4	6	0		-	21.96	-		
1.4	1	0		-	22.15	-		
1.4	1	3		-	22.30	-		
1.4	1	5		-	22.19	-		
1.4	3	0	16-QAM	-	22.06	-	23.65	0.2317
1.4	3	1		-	22.07	-		
1.4	3	3		-	21.98	-		
1.4	6	0		-	20.87	-		
1.4	1	0		-	21.05	-		
1.4	1	3		-	20.98	-		
1.4	1	5		-	20.95	-		
1.4	3	0	64-QAM	-	20.99	-	22.40	0.1738
1.4	3	1		-	20.90	-		
1.4	3	3		-	20.92	-		
1.4	6	0		-	19.85	-		
1.4	1	0		-	17.38	-		
1.4	1	3		-	17.41	-		
1.4	1	5		-	17.49	-		
1.4	3	0	256-QAM	-	17.58	-	18.93	0.0782
1.4	3	1		-	17.31	-		
1.4	3	3		-	17.31	-	1	
1.4	6	0		-	17.29	_		
Limit	R	eporting on	nly		Result		N.	/A




LTE Band 26

Peak-to-Average Ratio

Mode					
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.55	5.65	6.23	6.49	PASS

Report No.: FG270608G

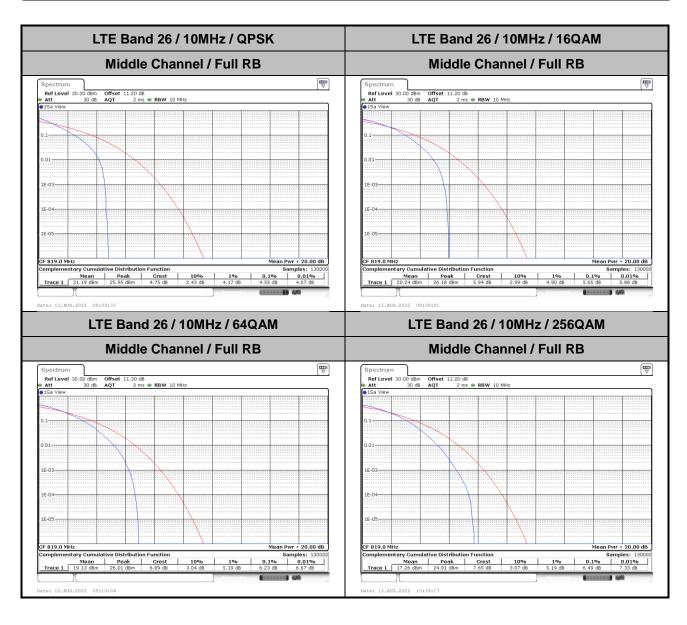

TEL: 886-3-327-3456 Page Number: A2-1 of 37

FAX: 886-3-328-4978

26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Low CH	-	-	-	-	-	-	-	-	14.27	14.27	-	-
Middle CH	1.29	1.31	2.96	3.05	5.26	4.93	10.03	9.99	-	-	-	-
Mode	LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Low CH	-	-	-	-	-	-	-	-	14.99	14.45	-	-
Middle CH	1.33	1.36	3.10	3.10	4.95	5.04	9.85	9.85	-	-	-	-

Report No.: FG270608G

TEL: 886-3-327-3456 Page Number : A2-2 of 37

FAX: 886-3-328-4978

LTE Band 26 Middle Channel / 1.4MHz / QPSK Middle Channel / 1.4MHz / 16QAM Ref Level 30.00 dBm Offset 11.20 dB RBW 30 kHz
Att 30 db SWT 63.2 με VBW 100 kHz Mode Auto FFT
SGL Count 100/100
GPIK Max 16.21 dB 15.48 dBr 10 dBm 622. -10 dBm--30 dBm 40 dBm -50 dBm-
 X-value
 Y-value
 Function

 818.9413 MHz
 15.48 dBm
 ndb down

 818.3147 MHz
 -10.56 dBm
 ndb

 819.6294 MHz
 -10.59 dBm
 Q factor
 Type Ref Trc Type Ref Trc
 X-value
 Y-value
 Function

 818.6364 MHz
 16.21 dBm
 ndB down
 Middle Channel / 3MHz / QPSK Middle Channel / 3MHz / 16QAM **T** Count 100/100 17.52 dBn 819.52150 MH 26.00 d 2.961000000 MH 276. -20 dBm 40 dBm CF 819.0 MHz Span 6.0 MHz Span 6.0 MHz Type | Ref | Trc | Function n ndB down Function ndB down Date: 13.AUG.2022 08:07:58 Middle Channel / 5MHz / QPSK Middle Channel / 5MHz / 16QAM Offset 11.20 dB ● RBW 100 kHz SWT 19 µs ● VBW 300 kHz Mode Auto FFT Att 30 dB
 SGL Count 100/100
 1Pk Max M1[1] 14.69 dB 819.03000 M 14.61 dBr 821.18800 MH dBm--10 dBm 30 dBm Function Result 5.255 MHz
 X-value
 Y-value
 Function


 819.03 MHz
 14.69 dBm
 ndB down

 Type
 Ref
 Trc
 X-value
 Y-value
 Function

 M1
 1
 821.188 MHz
 14.61 dBm
 nd8 down
 Type | Ref | Trc |

Report No.: FG270608G

TEL: 886-3-327-3456 Page Number : A2-3 of 37 FAX: 886-3-328-4978

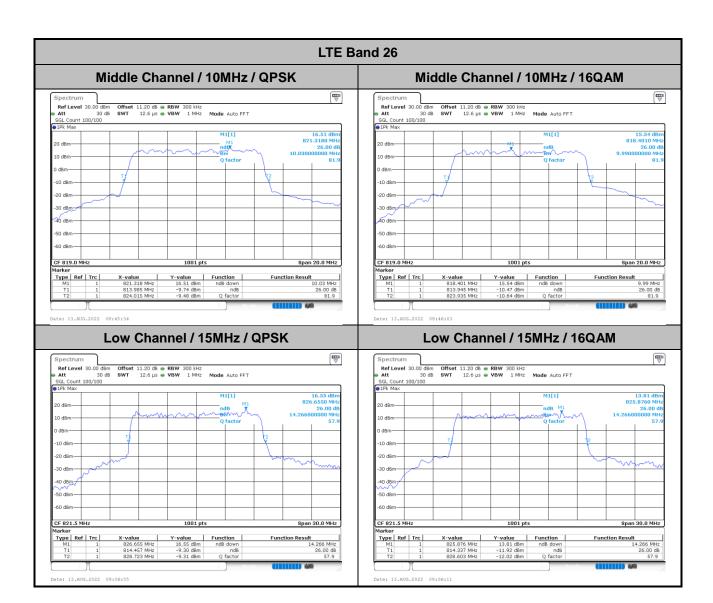

Report No.: FG270608G

TEL: 886-3-327-3456 Page Number: A2-4 of 37

FAX: 886-3-328-4978

LTE Band 26 Middle Channel / 1.4MHz / 64QAM Middle Channel / 3MHz / 64QAM Ref Level 30.00 dBm Offset 11.20 dB • RBW 100 kHz Att SQL Count 100/100 SWY 19 µs • VBW 300 kHz Mode Auto FFT SGL Count 100/100 M1[1] 14.85 dBr 10 dBm 617 264. -10 dBm--10 dBm -30 dBm -50 dBm-
 X-value
 Y-value
 Function

 818.7818 MHz
 13.45 dBm
 ndB down

 818.3399 MHz
 -12.54 dBm
 ndB

 819.6657 MHz
 -12.56 dBm
 Q factor

 X-value
 Y-value
 Function

 820.2647 MHz
 14.85 dBm
 nd8 down

 817.4715 MHz
 -10.96 dBm
 nd8

 820.5764 MHz
 -11.27 dBm
 Q factor
 Type Ref Trc Type Ref Trc Middle Channel / 5MHz / 64QAM Middle Channel / 10MHz / 64QAM **T** Ref Level 30.00 dBm Att 30 dB SGL Count 100/100 165 -20 dBm-40 dBm--50 dBm-CF 819.0 MHz Span 10.0 MHz Span 20.0 MHz Y-value 13.29 dBm -12.80 dBm -12.51 dBm X-value 819.959 MHz 814.165 MHz 824.015 MHz Y-value 15.39 dBm -10.49 dBm -10.59 dBm Function m ndB down Type | Ref | Trc | Date: 13.AUG.2022 08:44:06 Low Channel / 15MHz / 64QAM M1[1] 13.57 dBr 823.4180 MH Function Result 14.985 MHz Type | Ref | Trc |
 X-value
 Y-value
 Function

 823.418 MHz
 13.57 dBm
 ndB down

Report No.: FG270608G

TEL: 886-3-327-3456 Page Number: A2-5 of 37

LTE Band 26 Middle Channel / 1.4MHz / 256QAM Middle Channel / 3MHz / 256QAM M1[1] 11.97 dB M1[1] 12.63 dBr 602 263. -10 dBm--50 dBm-Function Result 1.3594 MHz 26.00 dB 602.5
 X-value
 Y-value
 Function

 819.0196 MHz
 11.97 dBm
 ndB down

 818.3455 MHz
 -14.16 dBm
 ndB

 819.7049 MHz
 -13.93 dBm
 Q factor

 X-value
 Y-value
 Function

 817.7532 MHz
 12.63 dbm
 nd8 down

 817.4416 MHz
 -13.57 dbm
 nd8 dswn

 820.5465 MHz
 -13.38 dbm
 Q factor
 Type Ref Trc Middle Channel / 5MHz / 256QAM Middle Channel / 10MHz / 256QAM 11.19 dBr 818.23100 MH 26.00 d 5.035000000 MH 162. -20 dBm-40 dBm -50 dBm CF 819.0 MHz Span 10.0 MHz Span 20.0 MHz
 Y-value
 Function

 11.19 dBm
 nd8 down

 -15.00 dBm
 nd8

 -14.63 dBm
 Q factor
 X-value 817.901 MHz 813.985 MHz 823.835 MHz Type | Ref | Trc | Date: 13.AUG.2022 10:30:17 Low Channel / 5MHz / 256QAM Ref Level 30.0 Att M1[1] 11.15 dB 823.6280 MF
 X-value
 Y-value
 Function

 823.628 MHz
 11.15 dbm
 nd8 down

 814.397 MHz
 -14.43 dbm
 nd8

 828.843 MHz
 -14.99 dbm
 Q factor
 Function Result 14.446 MHz Type Ref Trc

Report No.: FG270608G

TEL: 886-3-327-3456 Page Number : A2-6 of 37

Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Low CH	-	-	-	-	-	-	-	-	13.49	13.43	-	-
Middle CH	1.09	1.09	2.73	2.70	4.51	4.50	9.05	9.01	-	-	-	-
Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Low CH	-	-	-	-	-	-	-	-	13.37	13.46	-	-
Middle CH	1.09	1.09	2.70	2.72	4.51	4.51	8.95	8.99	-	-	-	-

Report No.: FG270608G

TEL: 886-3-327-3456 Page Number : A2-7 of 37

LTE Band 26 Middle Channel / 1.4MHz / QPSK Middle Channel / 1.4MHz / 16QAM **□** Ref Level 30.00 dBm
Att 30 dB
SGL Count 100/100
Pk Max 15.61 dBr 818.97760 MH 1.090909091 MH 10 dBm -10 dBm -10 dBm -20 dBm--40 dBm 40 dBm -60 dBm 1001 pts CF 819.0 MHz Span 2.8 MHz CF 819.0 MHz Span 2.8 MHz X-value 818.9776 MHz 818.45455 MHz 819.54545 MHz Y-value 2 15.61 dBm 2 7.98 dBm 2 9.10 dBm Type Ref Trc Function Result Type Ref Trc Middle Channel / 3MHz / QPSK Middle Channel / 3MHz / 16QAM SGL Count 100/100 0 dBm--20 dBm--40 dBm--50 dBm-CF 819.0 MH CF 819.0 MHz 1001 pts Span 6.0 MHz
 X-value
 Y-value
 Function

 818.6763 MHz
 16.71 dBm

 817.63337 MHz
 10.63 dBm
 Occ Bw

 820.36064 MHz
 10.61 dBm
 Type | Ref | Trc | Function Result Function **Function Result** 2.727272727 MHz 2.703296703 MHz Middle Channel / 5MHz / QPSK Middle Channel / 5MHz / 16QAM Ref Level 30.00 dBm Offset 11.20 dB RBW 100 kHz
Att SGL Count 100/100 SWT 19 µs VBW 300 kHz Mode Auto FFT
SGL Count 100/100 14.70 dBr 820.38900 MH 4.505494505 MH 14.82 dBn 818.93000 MH 4.495504496 MH M1[1] M1[1] -10 dBm 30 dBm -60 dBm-CF 819.0 MHz
 Type
 Ref
 Trc
 X-value
 Y-value
 Function


 M1
 1
 820.389 MHz
 14.70 dBm

 Type
 Ref
 Trc
 X-value
 Y-value
 Function


 M1
 1
 818.93 MHz
 14.82 dBm
 Function Result 14.82 dBm 8.68 dBm Occ Bw 8.82 dBm 820.389 MHz 14.70 dBm 816.75225 MHz 11.31 dBm Occ Bw 821.25774 MHz 9.04 dBm 4.505494505 MHz 4.495504496 MHz 1111111 4/8

Report No.: FG270608G

TEL: 886-3-327-3456 Page Number : A2-8 of 37

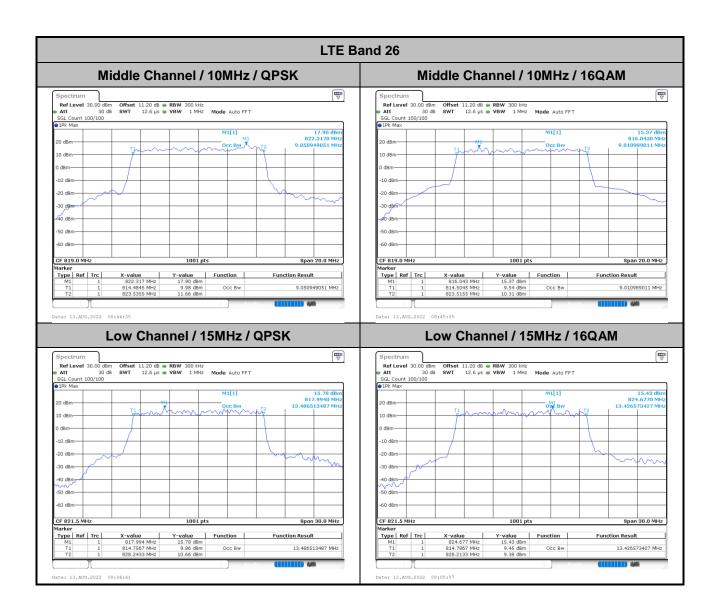

TEL: 886-3-327-3456 Page Number: A2-9 of 37

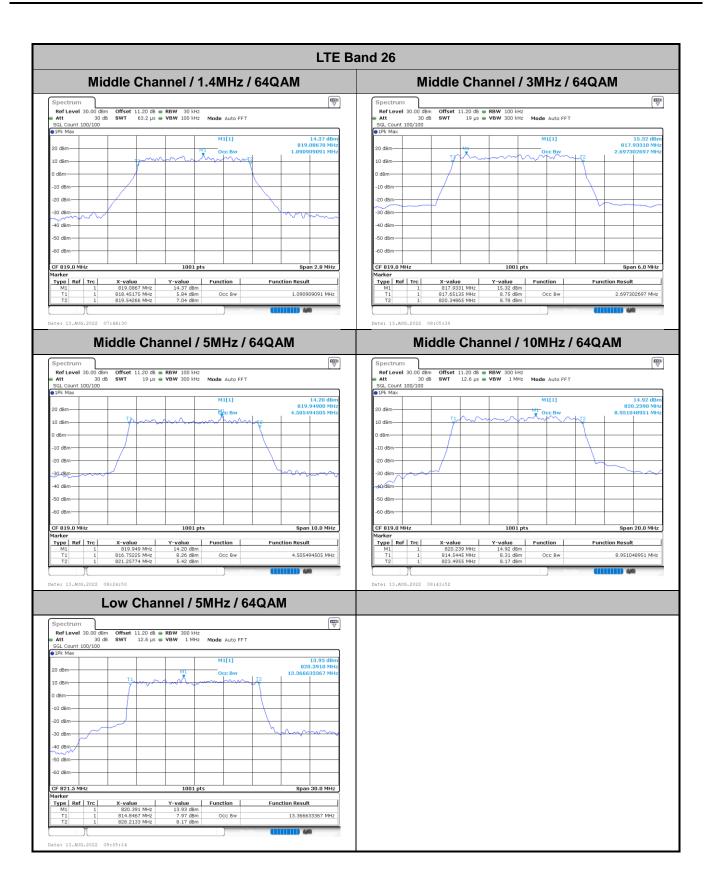

TEL: 886-3-327-3456 Page Number : A2-10 of 37

LTE Band 26 Middle Channel / 1.4MHz / 256QAM Middle Channel / 3MHz / 256QAM Spectrum

Ref Level 30.00 dBm

Att 30 dB

SGL Count 100/100

1Pk Max 10 dBm -10 dBm--10 dBm -20 dBm-90 dBm∙ -40°d8m -40 dBm--60 dBm 1001 pts CF 819.0 MHz Span 2.8 MHz CF 819.0 MHz X-value 818.572 MHz 818.45175 MHz 819.54545 MHz | Y-value | Function |
2	11.62 dBm	
2	2.97 dBm	Occ Bw
2	5.30 dBm	
 X-value
 Y-value

 819.6653 MHz
 14.07 d8m

 817.65734 MHz
 6.87 d8m

 820.37862 MHz
 7.06 d8m
 Type Ref Trc **Function Result** Type Ref Trc Middle Channel / 5MHz / 256QAM Middle Channel / 10MHz / 256QAM SGL Count 100/100 12.01 dB 818.45100 MH 4.505494505 MH 0 dBm--20 dBm-46 dBm-40 dBpp -50 dBm-CF 819.0 MH CF 819.0 MHz 1001 pts 1001 pts
 X-value
 Y-value
 Function

 818.451 MHz
 12.01 dBm
 916.75224 MHz

 916.75224 MHz
 5.91 dBm
 Occ Bw

 821.26773 MHz
 6.15 dBm

 X-value
 Y-value

 822.716 MHz
 13.54 dBm


 814.5445 MHz
 6.41 dBm

 823.5355 MHz
 6.94 dBm
 Type Ref Trc Function Function Result **Function Result** 4.505494505 MHz Occ Bw 8.991008991 MHz Low Channel / 15MHz / 256QAM **□** Ref Level 30.00 M1[1] Type Ref Trc 10.75 dBm 5.32 dBm Occ Bw 7.10 dBm 13.456543457 MHz 44

Report No.: FG270608G


TEL: 886-3-327-3456 Page Number : A2-11 of 37 FAX: 886-3-328-4978

Emission masks - In-band emissions

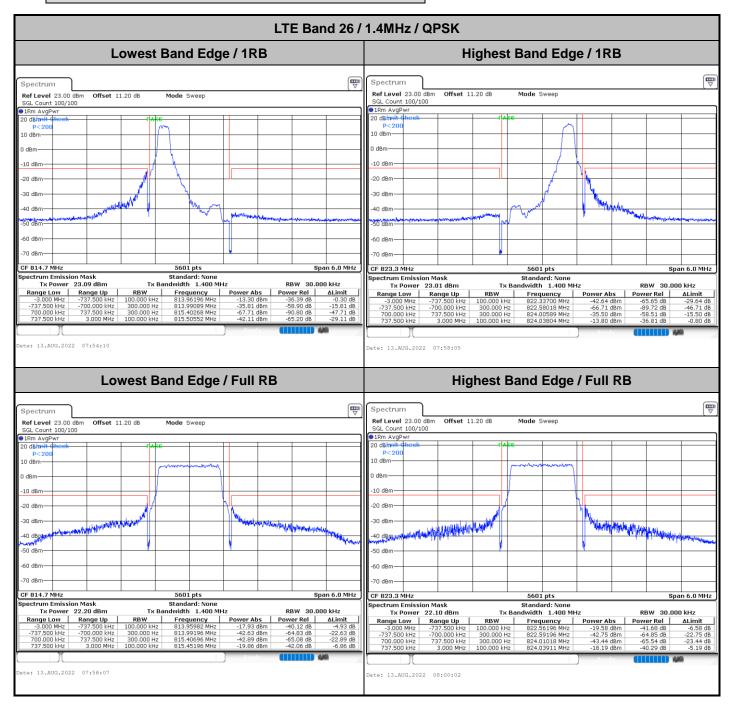


Report No.: FG270608G


TEL: 886-3-327-3456 Page Number: A2-12 of 37

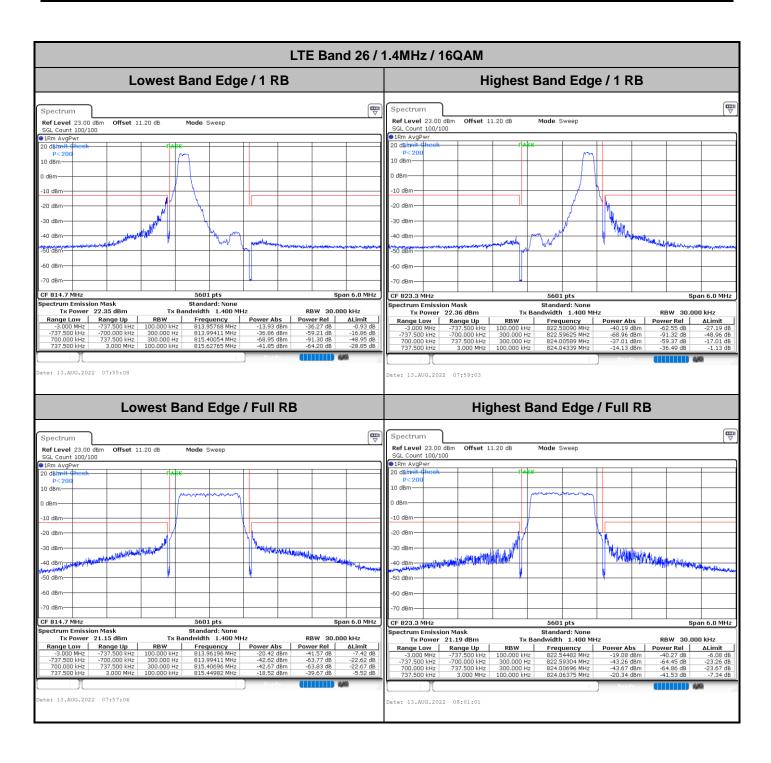


TEL: 886-3-327-3456 Page Number : A2-13 of 37

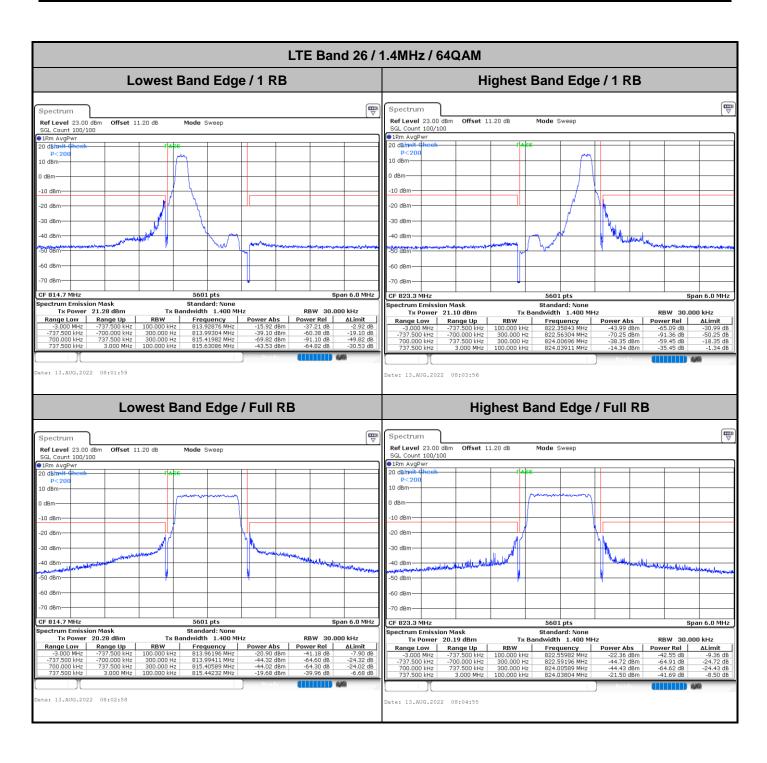


TEL: 886-3-327-3456 Page Number : A2-14 of 37

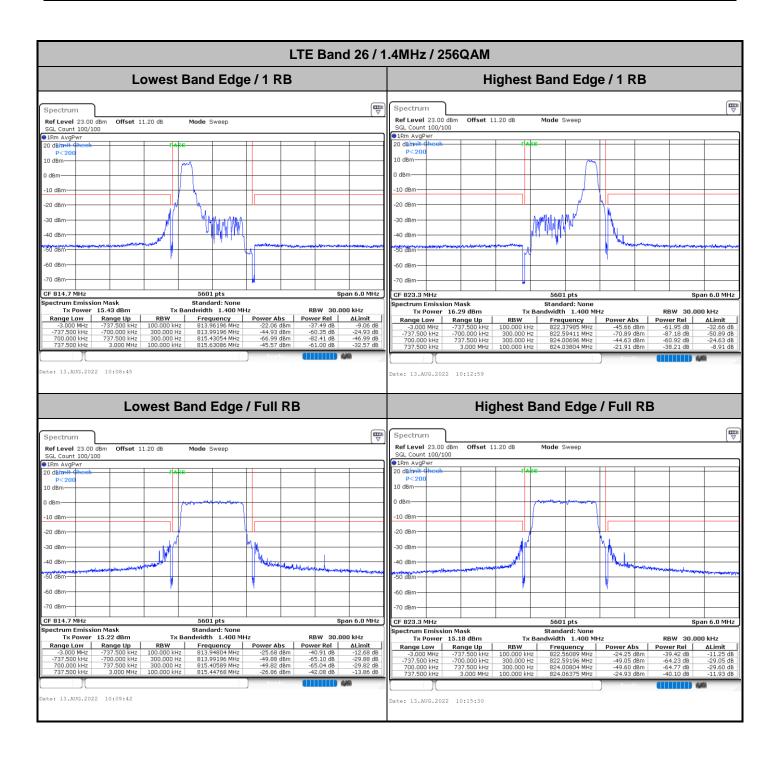


TEL: 886-3-327-3456 Page Number: A2-15 of 37

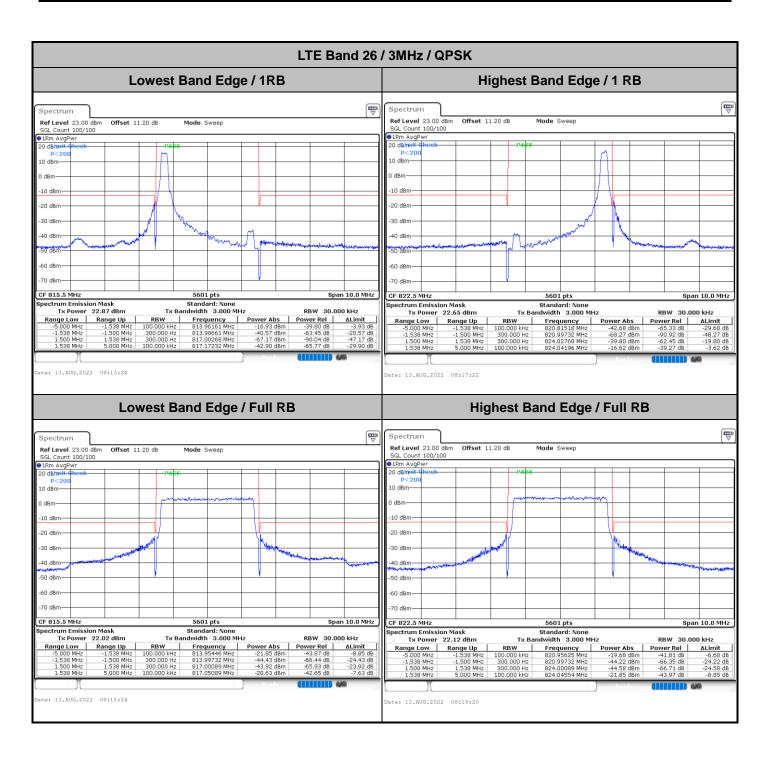


TEL: 886-3-327-3456 Page Number: A2-16 of 37

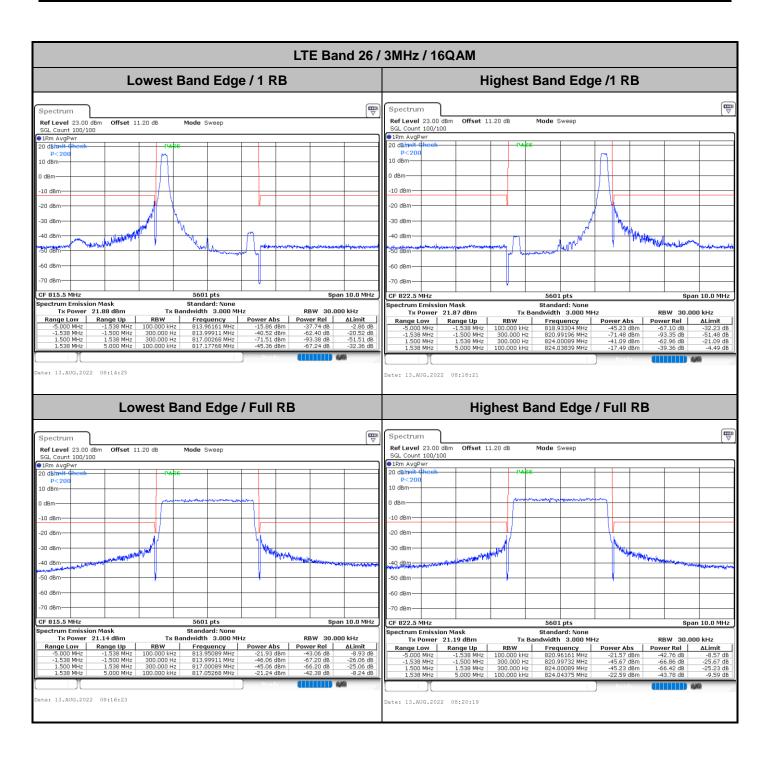


TEL: 886-3-327-3456 Page Number: A2-17 of 37

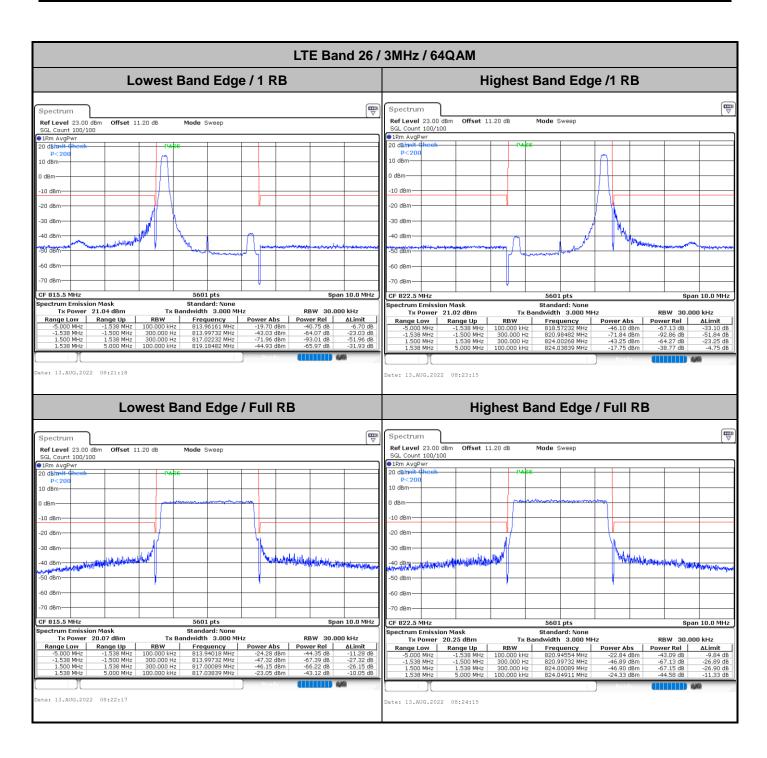


TEL: 886-3-327-3456 Page Number : A2-18 of 37

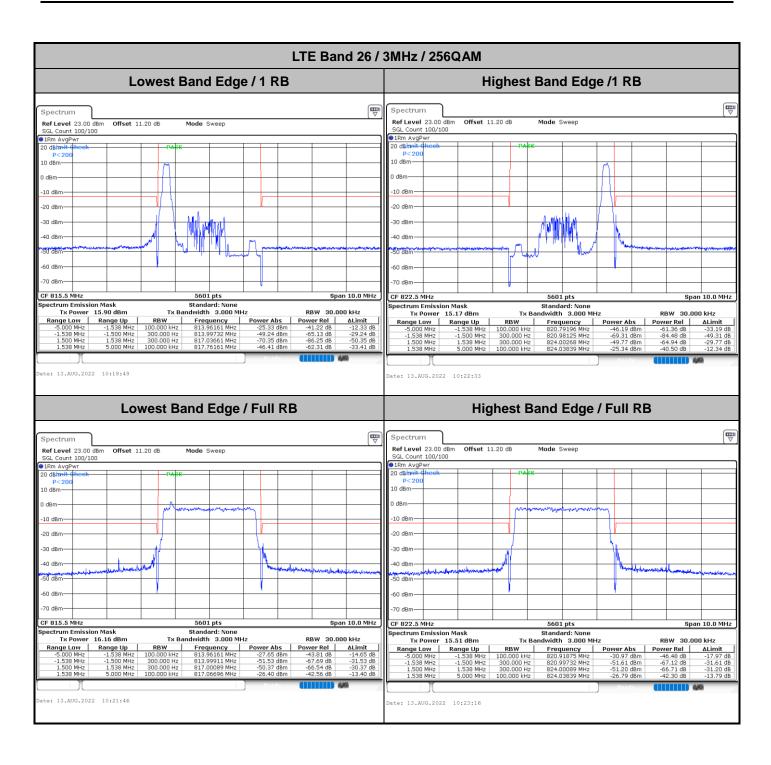


TEL: 886-3-327-3456 Page Number : A2-19 of 37

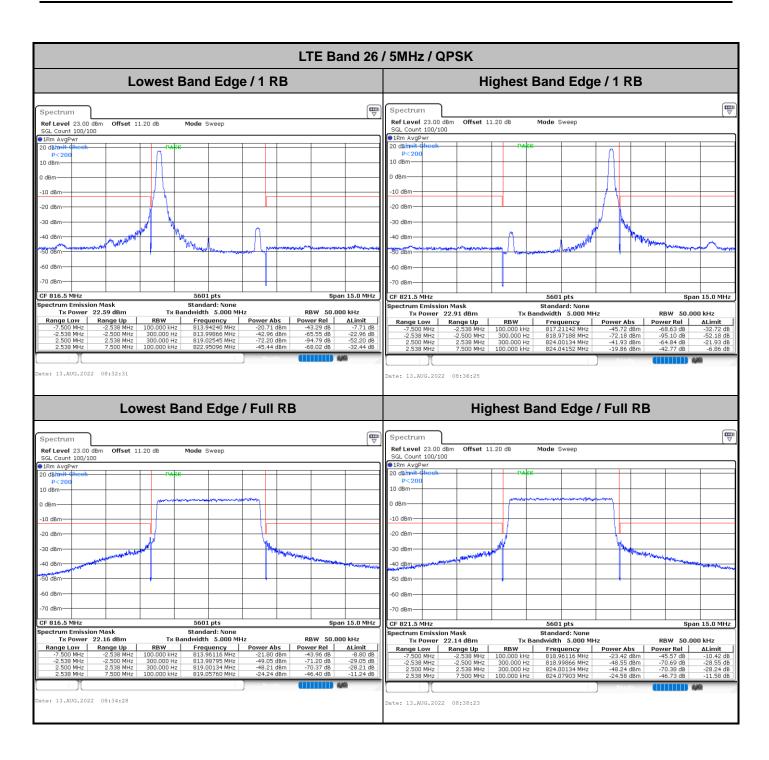

TEL: 886-3-327-3456 Page Number : A2-20 of 37

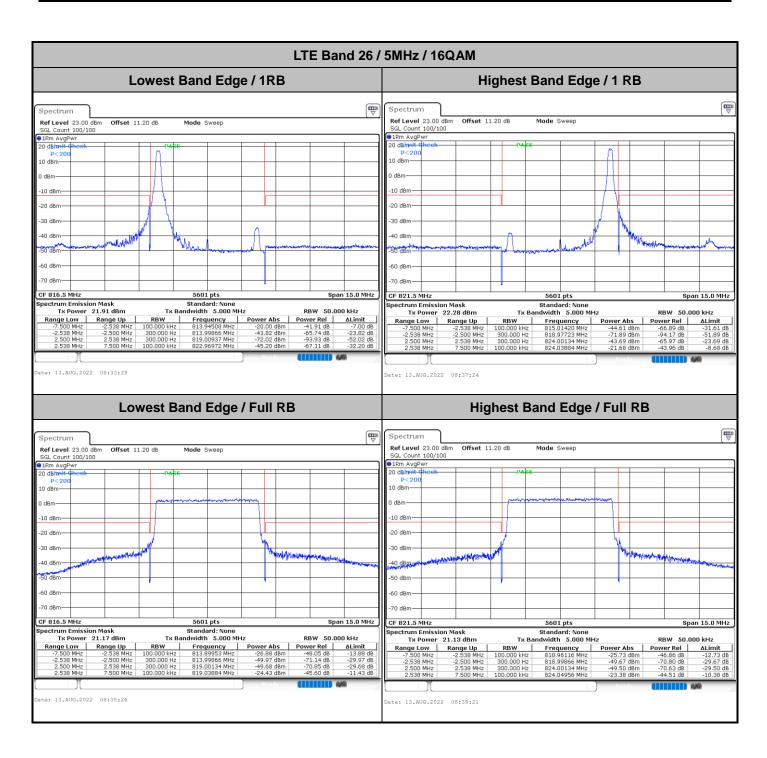

TEL: 886-3-327-3456 Page Number : A2-21 of 37

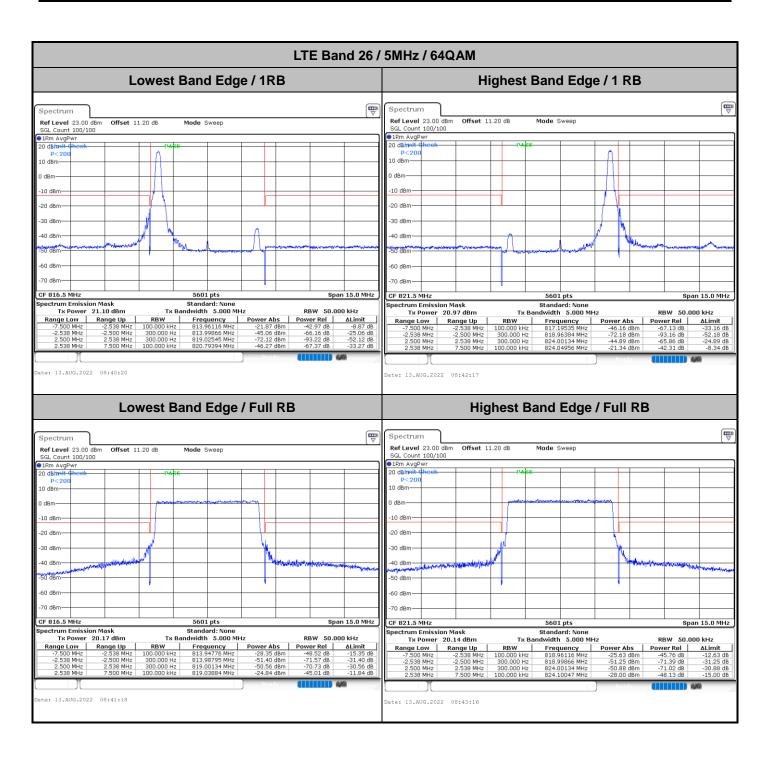

TEL: 886-3-327-3456 Page Number : A2-22 of 37