



FCC LISTED,
REGISTRATION
NUMBER: 905266

IC LISTED,
REGISTRATION
NUMBER: IC 4621

**CENTRO DE
TECNOLOGÍA DE LAS
COMUNICACIONES, S.A.**

Parque Tecnológico de Andalucía,
c/Severo Ochoa nº 2
29590 Campanillas/ Málaga/ España
Tel. 952 61 91 00 - Fax 952 61 91 13
MÁLAGA, C.I.F. A29 507 456
Registro Mercantil Tomo 1169 Libro 82
Folio 133 Hoja MA3729

TEST REPORT

Report No.: 23546RET

TEST NAME: FCC PART 22, PART 24 & PART 15 (Electromagnetic emissions)

Product : GSM/GPRS MODULE
Trade Mark : TELIT
Model/type Ref. : GC864-QUAD
GC-864 PY
Manufacturer : TELIT COMMUNICATIONS S.p.A
Requested by : TELIT COMMUNICATIONS S.p.A
Other identification of the product : FCC ID: RI7GC864
IC: 5131A-GC864
Serial number: 359449009999026
Standard(s) : FCC Part 22 & 24
FCC Part 15, Subpart B y C

This test report includes 4 annexes and therefore the total number of pages is 50

IMPORTANT: No parts of this report may be reproduced or quoted out of context, and must not be reproduced except in full without the written approval of Centro de Tecnología de las Comunicaciones, S.A. (CETECOM).

Date: 2006-07-24	Test operator	Revised by:	Approved by:
	A. Llamas/R. López	J.C. Soler Consultant	A. Rodrigo Technical Director
			Page: 1 of 9

INDEX

1. COMPETENCE AND GUARANTEES	3
2. GENERAL CONDITIONS	3
3. CHARACTERISTICS OF THE TEST	3
3.1 TEST REQUESTED.....	3
3.2 REQUIREMENTS AND METHOD	4
4. IDENTIFICATION DATA SUPPLIED BY THE APPLICANT	5
4.1 APPLICANT.....	5
4.2 REPRESENTATIVE	5
4.3 TEST SAMPLES SUPPLIER.....	5
4.4 IDENTIFICATION OF ITEM/ITEMS TESTED	6
5. USAGE OF SAMPLES, PERIOD OF TESTING AND ENVIRONMENTAL CONDITIONS	6
5.1 USAGE OF SAMPLES	6
5.2 PERIOD OF TESTING	7
5.3 ENVIROMENTAL CONDITIONS.....	7
6. TEST RESULTS	8
7. REMARKS AND COMMENTS.....	8
8. SUMMARY.....	9

ANNEXES

ANNEX A. TEST RESULTS FOR FCC PART 22

ANNEX B. TEST RESULTS FOR FCC PART 24

ANNEX C. MEASURING RESULTS FOR ELECTROMAGNETIC EMISSION

ANNEX D. PHOTOGRAPHS

1. COMPETENCE AND GUARANTEES

Centro de Tecnología de las Comunicaciones (CETECOM), S.A. is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 905266.

Centro de Tecnología de las Comunicaciones (CETECOM), S.A. is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621.

In order to assure the traceability to other national and international laboratories, CETECOM has a calibration and maintenance programme for its measuring equipment.

CETECOM guarantees the reliability of the data presented in this report, which is the result of measurements and tests performed to the item under test on the date and under the conditions stated on the report and is based on the knowledge and technical facilities available at CETECOM at the time of execution of the test.

CETECOM is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the item under test and the results of the test.

2. GENERAL CONDITIONS

1. This report only refers to the item that has undergone the test.
2. This report does not constitute or imply by its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without written approval of CETECOM.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of CETECOM and the Accreditation Bodies.

3. CHARACTERISTICS OF THE TEST

3.1 TEST REQUESTED

1. Measurements for PCS 850 and PCS 1900 devices according to FCC parts 22 and 24:
 - Radiated RF output power.
 - Radiated emissions.
2. Continuous conducted emission, power leads:
 - Standard: FCC Rules and Regulations 47 CFR Part 15
 - Limit: Class B
 - Method: FCC Rules and Regulations 47 CFR Part 15, Subpart B y C
3. Radiated emission, electromagnetic field:
 - Standard: FCC Rules and Regulations 47 CFR Part 15
 - Limit: Class B

Report No.: 23546RET		Page: 3 of 9
Date: 2006-07-24		

Method: FCC Rules and Regulations 47 CFR Part 15, Subpart B

3.2 REQUIREMENTS AND METHOD

The test has been carried out according to the following documents and standards:

1. FCC part 22.
2. FCC part 24.
3. FCC Rules and Regulations 47 CFR Part 15, Subpart B: Limits and methods of measurements for radio frequency devices. Unintentional radiators.
4. FCC Rules and Regulations 47 CFR Part 15, Subpart C: Limits and methods of measurements for radio frequency devices. Intentional radiators.

Radiated testing was performed in Cetecom's semi-anechoic chamber. This site has been fully described in a report submitted to the FCC and was accepted in a letter dated July 25, 2002. Radiated measurements were made in accordance with the general procedures of ANSI C63.4: 2003 and substitution method according to TIA/EIA 603-C: 2004.

The testing procedures used are:

1. PEEM001: Medida de la tensión perturbadora en bornes de alimentación según EN 55022.
2. PEEM002: Medida del campo perturbador radiado según EN 55022.

Uncertainty (factor k=2) was calculated according to the following CETECOM's internal documents:

1. PODT000: Procedimiento para el cálculo de incertidumbres de medida
2. FEM12_07: Formato de cálculo de incertidumbre a aplicar en la medida de la tensión perturbadora en bornes de alimentación según EN 55022.
3. FEM13_08: Formato de cálculo de incertidumbre a aplicar en la medida del campo perturbador radiado según EN 55022.
4. FET298_01: Formato de cálculo de incertidumbre a aplicar en la medida del campo perturbador radiado entre 1 y 25 GHz.

The instrumentation used to perform the testing is listed below:

1. Semianechoic Absorber Lined Chamber IR 11. BS.
2. Control Chamber IR 12.BC.
3. Spectrum Analyzer Agilent E4440A.
4. Bilog antenna CHASE CBL6111.
5. Antenna tripod EMCO 11968C.
6. Antenna mast EM 1072 NMT.
7. Rotating table EM 1084-4. ON.
8. Double-ridge Guide Horn antenna 1-18 GHz HP 11966E.
9. Double-ridge Guide Horn antenna 18-40 GHz Agilent 119665J.
10. RF pre-amplifier Miteq AFS5-04001300-15-10P-6.

Report No.:
23546RET

Date: 2006-07-24

Page: 4 of 9

11. RF pre-amplifier Miteq JS4-12002600-30-5A.
12. EMI Test Receiver R&S ESIB26.
13. Universal Radio communication Tester R&S CMU200.
14. 10 dB attenuator HP 8491B.
15. Multi Device Controller EMCO 2090.
16. DC Power supply R & S NGPE 40/40.
17. Transient limiter. HP 11947A.
18. Line Impedance Stabilization Network (L.I.S.N.) R&S. ESH2-Z5.

4. IDENTIFICATION DATA SUPPLIED BY THE APPLICANT

Identification data in this section has been supplied by the client.

4.1 APPLICANT

Name or Company: TELIT Communications S.p.A.

V.A.T.: 03711600266

Address: Via Stazione di Prosecco 5/b

City: Trieste

Postal code: 34010

Country: ITALY

Telephone: +39 040 4192111

Fax: +39 040 4192 383

4.2 REPRESENTATIVE

Name: Andrea Fragiacomio

4.3 TEST SAMPLES SUPPLIER

Name or Company: Same as indicated in point 4.1.

Samples undergoing test have been selected by: **the client.**

4.4 IDENTIFICATION OF ITEM/ITEMS TESTED

Product: GSM/GPRS module

Trade mark: TELIT **Model:** GC864-QUAD, GC-864 PY

Hw version: 3 **SW version:** PS: 05.03.04 / AL: 7.01.207 B001 GC864 QUAD

Other identification of the product: FCC ID: RI7GC864 IC: 5131A-GC864

Manufacturer: TELIT Communications S.p.A.

Country of manufacture: ITALY

Manufacture site: Via Stazione di Prosecco 5/b, Trieste, ITALY

Description: GPRS class 10 modem, 850/900/1800/1900MHz, with connectors.

5. USAGE OF SAMPLES, PERIOD OF TESTING AND ENVIRONMENTAL CONDITIONS

5.1 USAGE OF SAMPLES

Sample M/01 is formed by the following elements:

<u>Control No.</u>	<u>Description</u>	<u>Model</u>	<u>Serial No.</u>	<u>Date of reception</u>
24383/02	Evaluation Board with GPRS module	GC864-QUAD	359449009999026	26/05/06
23548/23	Antenna with sma type connector	1RR0100056TLB	---	23/03/06

Sample S/01 is composed of the following elements:

<u>Control No.</u>	<u>Description</u>	<u>Model</u>	<u>Serial No.</u>	<u>Date of reception</u>
24383/02	Evaluation Board with GPRS module	GC864-QUAD	359449009999026	26/05/06

During the tests were used next ancillary equipments:

<u>Control No.</u>	<u>Description</u>	<u>Model</u>	<u>Serial No.</u>	<u>Date of reception</u>
23548/23	Antenna with sma type connector	1RR0100056TLB	---	23/03/06
23133/-	Portable PC	Toshiba PS610E-NGYSC-SP	13123012G	---

1. Sample M/01 has undergone the following test(s).
Radiated measurements indicated in annex A and B.
2. Sample S/01 has undergone the following test(s):
Continuous conducted emission, power leads in annex C.
Radiated emission, electromagnetic field in annex C.

5.2 PERIOD OF TESTING

The performed test started on 2006-06-12 and finished on 2006-06-16.

The tests as detailed in this report have been performed at CETECOM.

5.3 ENVIROMENTAL CONDITIONS

In the control chamber the following limits were not exceeded during the test:

Temperature	Min. = 24 °C Max. = 24 °C
Relative humidity	Min. = 48 % Max. = 48 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

In the semianechoic chamber (21 meters x 11 meters x 8 meters) the following limits were not exceeded during the test.

Temperature	Min. = 25 °C Max. = 25 °C
Relative humidity	Min. = 51 % Max. = 51 %
Air pressure	Min. = 1020 mbar Max. = 1020 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 30 °C
Relative humidity	Min. = 45 % Max. = 60 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

6. TEST RESULTS

Abbreviations used in the VERDICT column of the following tables are:

- P** Pass
- F** Fail
- NA** not applicable
- NM** not measured

FCC PART 22 PARAGRAPH	VERDICT			
	NA	P	F	NM
Clause 22.913: RF output power	P			
Clause 22.917: Radiated emissions	P			

FCC PART 24 PARAGRAPH	VERDICT			
	NA	P	F	NM
Clause 24.232: RF output power	P			
Clause 24.238: Radiated emissions	P			

MEASURING RESULTS FOR ELECTROMAGNETIC EMISSION	VERDICT			
	NA	P	F	NM
Continuous conducted emission, power leads. Class B and C	P			
Radiated emission, electromagnetic field . Class B	P			

7. REMARKS AND COMMENTS

None.

Report No.: 23546RET		Page: 8 of 9
Date: 2006-07-24		

8. SUMMARY

Based on the results of the performed test, stated in annex A the item under test is **IN COMPLIANCE** with the specifications listed in section 3.1 “TEST REQUESTED”.

NOTE: The results presented in this Test Report apply only to the particular item under test declared in section 4.4 “IDENTIFICATION OF ITEM/ITEMS TESTED” of this document, as presented for test on the date(s) declared in section 5, “USAGE OF SAMPLES, PERIOD OF TESTING AND ENVIRONMENTAL CONDITIONS”.

Report No.: 23546RET		Page: 9 of 9
-------------------------	--	--------------

Date: 2006-07-24

ANNEX A
TEST RESULTS FOR FCC PART 22

Report No: 23546RET

Report No:
23546RET

Date: 2006-07-24

Page: 1 of 12

Annex A

INDEX

	Page
TEST CONDITIONS	3
RF Output Power (E.R.P.)	4
Radiated emissions	5

Report No:
23546RET

Date: 2006-07-24

Page: 2 of 12

Annex A

TEST CONDITIONS

Power supply (V):

$$V_{\text{nom}} = 3.8 \text{ Vdc}$$

Type of power supply = DC Voltage from external power supply

Type of antenna = external connectable antenna with sma type connector

TEST FREQUENCIES:

Lowest channel (128): 824.2 MHz

Middle channel (190): 836.6 MHz

Highest channel (251): 848.8 MHz

Report No:
23546RET

Date: 2006-07-24

Page: 3 of 12

Annex A

RF Output Power (E.R.P.)

SPECIFICATION

§2.1046 and 22.913

METHOD

For radiated measurements the EUT was placed on a 1 m high non-conductive stand inside an anechoic chamber. The measuring antenna was placed at 3 m distance and the maximum field strength was measured for the three channels. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT and GMSK modulated signal.

The Effective Radiated Power (E.R.P.) is obtained by using the Substitution Method according to ANSI/TIA/EIA-603-C: 2004.

RESULTS

MAXIMUM EFFECTIVE RADIATED POWER E.R.P. (RADIATED).

Channel	Lowest	Middle	Highest
Maximum peak power (dBm)	31.19	31.93	31.88
Maximum peak power (W)	1.31	1.56	1.54
Measurement uncertainty (dB)	± 3.8		

Verdict: PASS

Report No: 23546RET		Page: 4 of 12
Date: 2006-07-24		Annex A

Radiated emissions

SPECIFICATION

§ 22.917

METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 1 GHz and at 1 m distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded. The radiated emissions were measured with peak detector and 1 MHz bandwidth.

Each detected emissions were substituted by the Substitution method, in accordance with the ANSI/TIA/EIA-603-C: 2004.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB, P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43 + 10 \log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

Report No: 23546RET		Page: 5 of 12
Date: 2006-07-24		Annex A

RESULTS

1. CHANNEL: LOWEST (824.2MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

Carrier level (dBm) = 31.19

Spurious frequency (MHz)	Level (dBm)	Polarization	Attenuation below carrier (dBc)
1648.550	-35.04	Vertical	66.23

2. CHANNEL: MIDDLE (836.6 MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

Carrier level (dBm) = 31.93

Spurious frequency (MHz)	Level (dBm)	Polarization	Attenuation below carrier (dBc)
1672.980	-32.87	Vertical	69.18

3. CHANNEL: HIGHEST (848.8 MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

Carrier level (dBm) = 31.88

Spurious frequency (MHz)	Level (dBm)	Polarization	Attenuation below carrier (dBc)
1697.830	-34.71	Vertical	66.59

Verdict: PASS

Report No:
23546RET


Date: 2006-07-24

Page: 6 of 12

Annex A

FREQUENCY RANGE 30 MHz-1000 MHz.

CHANNEL: LOWEST (824.2 MHz)

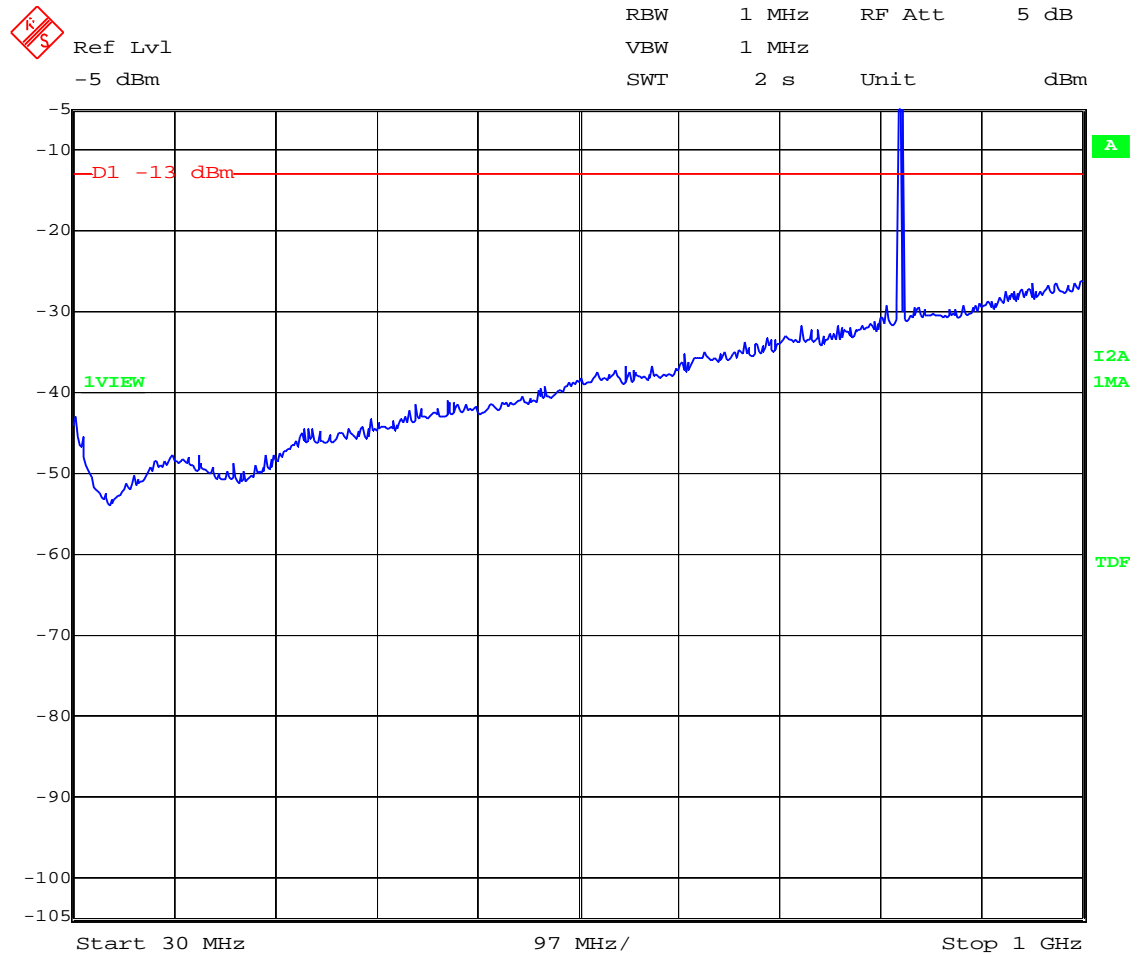


Date: 12.JUN.2006 12:00:16

Note: The peak above the limit is the carrier frequency.

Report No: 23546RET Date: 2006-07-24		Page: 7 of 12 Annex A
--	--	------------------------------

CHANNEL: MIDDLE (836.6 MHz)

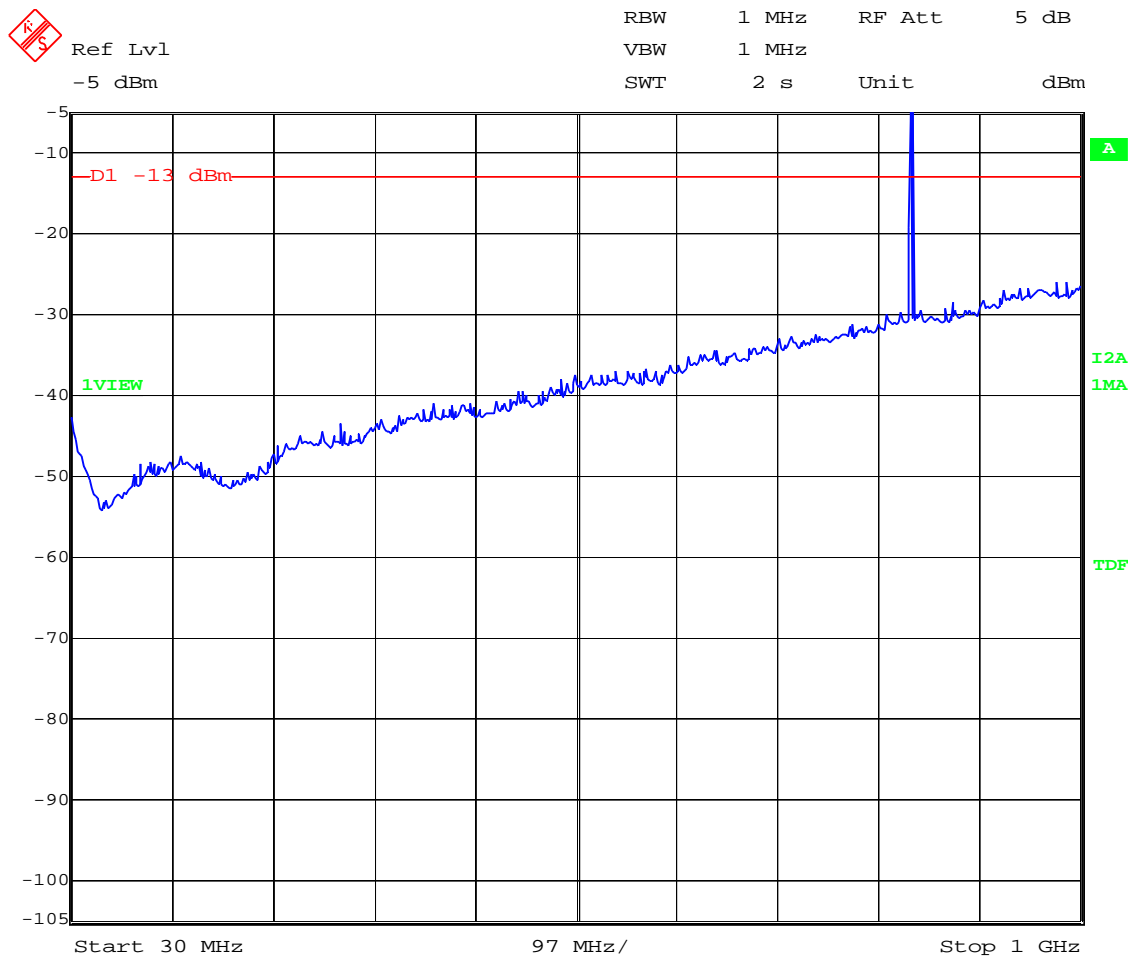


Date: 12.JUN.2006 12:02:42

Note: The peak above the limit is the carrier frequency.

Report No: 23546RET Date: 2006-07-24		Page: 8 of 12 Annex A
--	--	------------------------------

CHANNEL: HIGHEST (848.8 MHz)

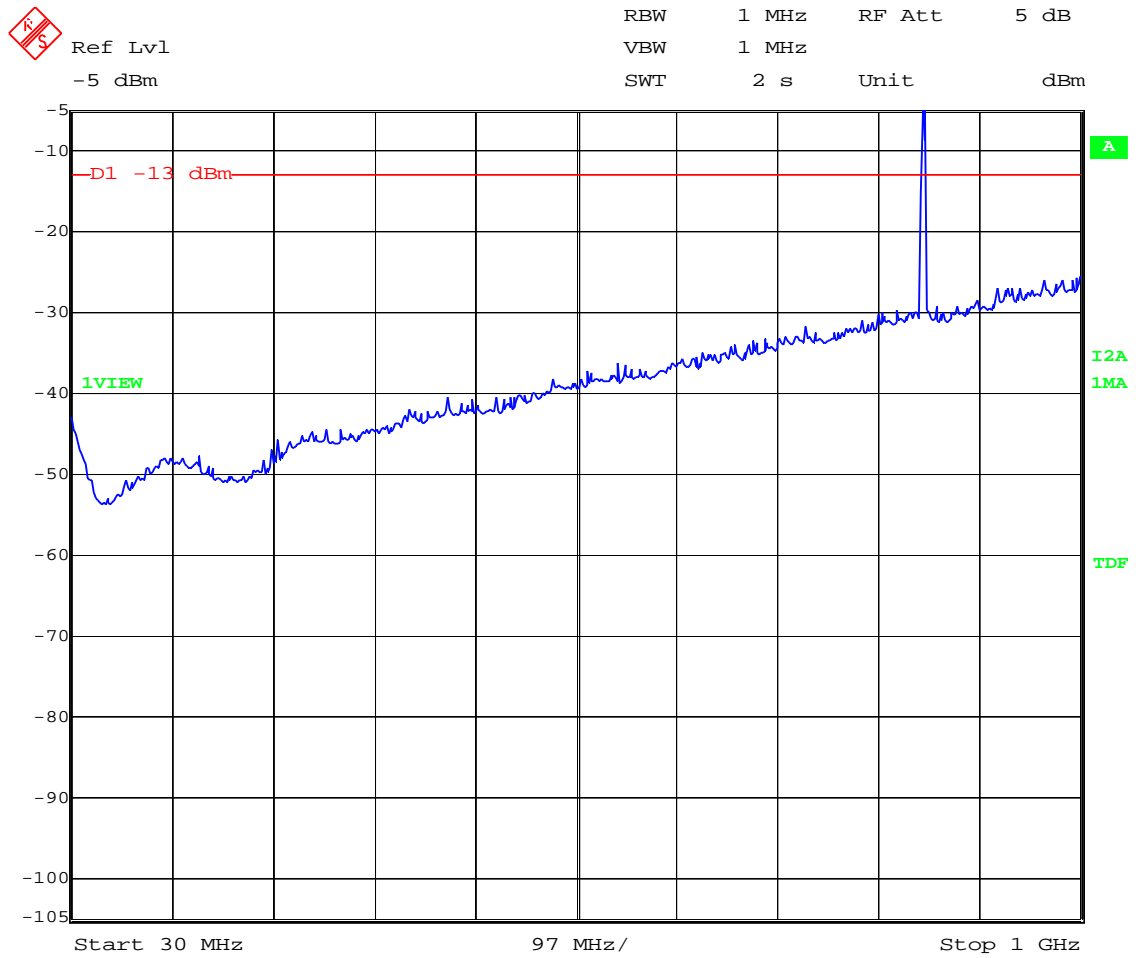


Date: 12.JUN.2006 12:06:05

Note: The peak above the limit is the carrier frequency.


Report No: 23546RET Date: 2006-07-24		Page: 9 of 12 Annex A
--	--	------------------------------

FREQUENCY RANGE 1 GHz to 3 GHz.

CHANNEL: LOWEST (824.2 MHz)

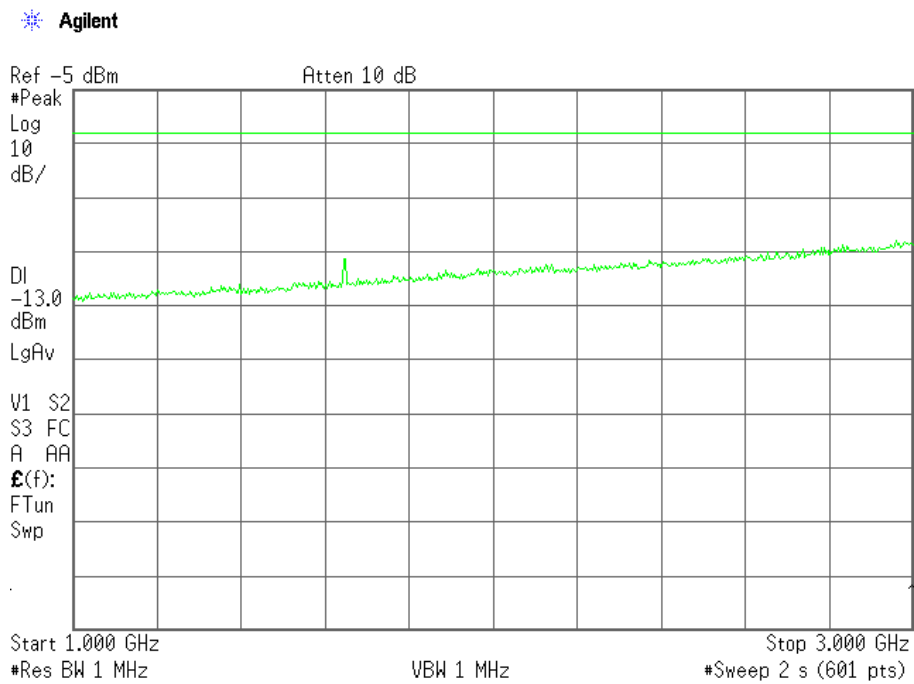

CHANNEL: MIDDLE (836.6 MHz)

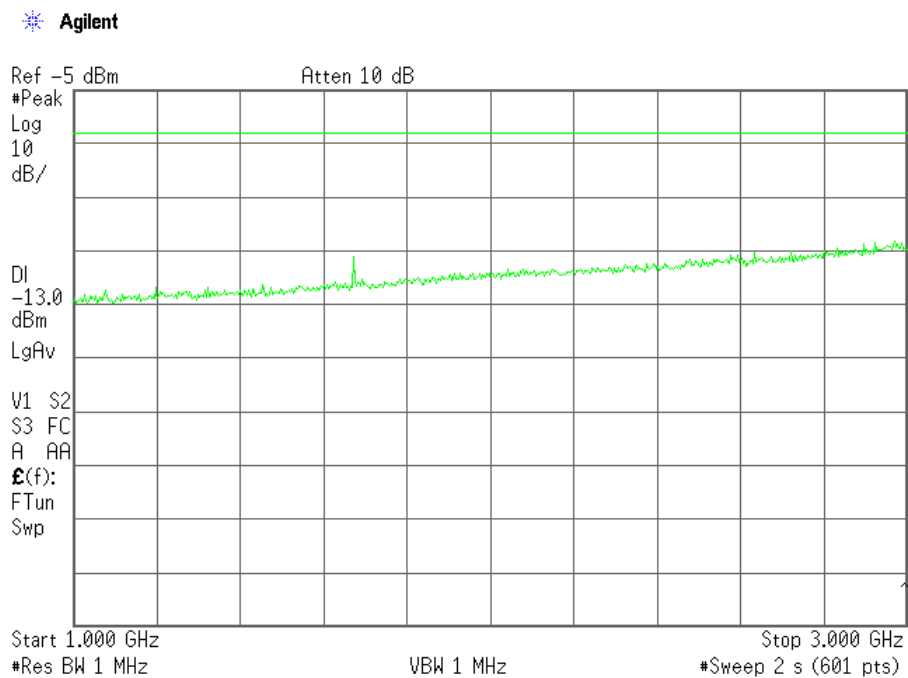


Report No:
23546RET

Date: 2006-07-24

Page: 10 of 12

Annex A

CHANNEL: HIGHEST (848.8 MHz)

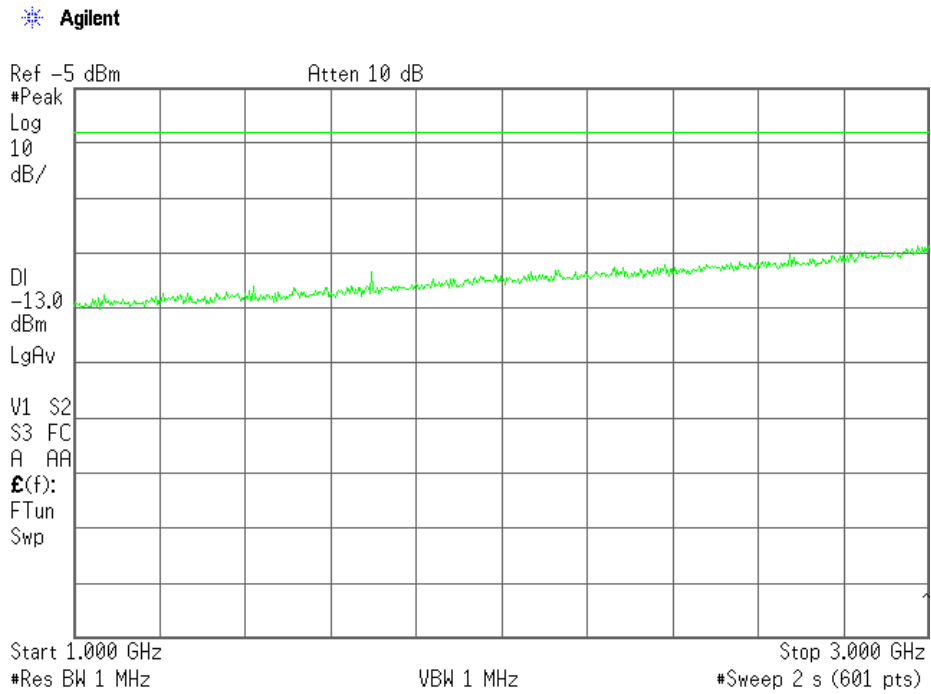

Report No:
23546RET


Page: 11 of 12

Date: 2006-07-24

Annex A

FREQUENCY RANGE 3 GHz to 12.75 GHz.

* Agilent

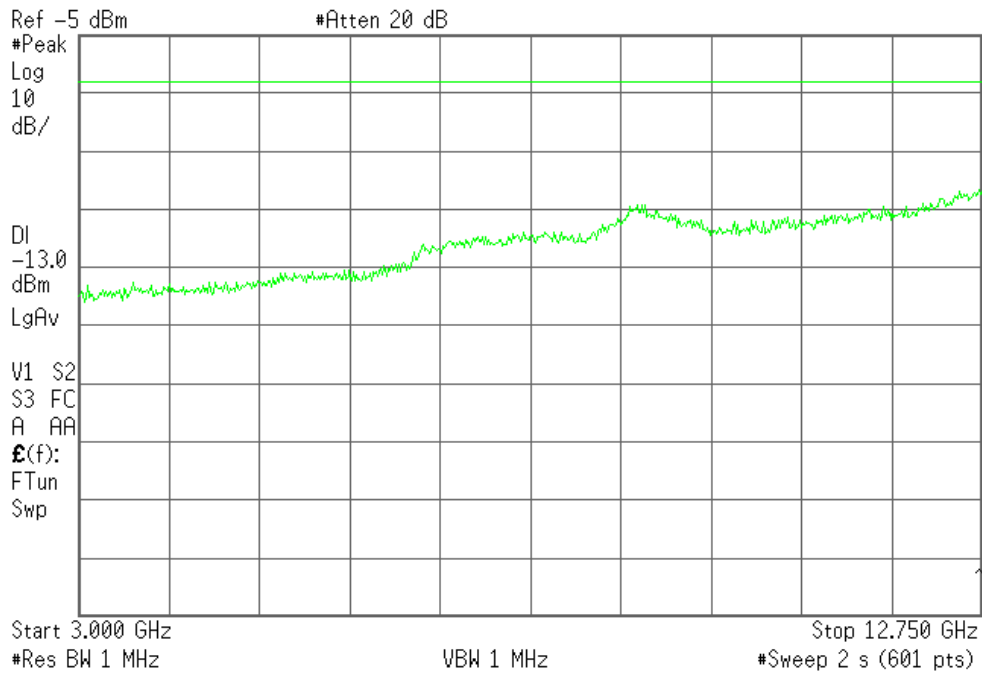

(This plot is valid for all three channels).

Report No:
23546RET

Date: 2006-07-24

Page: 12 of 12

Annex A

**ANNEX B
TEST RESULTS FOR FCC PART 24**

Report No: 23546RET

Report No:
23546RET

Date: 2006-07-24

Page: 1 of 11

Annex B

INDEX

	Page
TEST CONDITIONS	3
RF Output Power (E.I.R.P.).....	4
Radiated emissions	5

Report No:
23546RET

Date: 2006-07-24

Page: 2 of 11

Annex B

TEST CONDITIONS

Power supply (V):

$$V_{\text{nom}} = 3.8 \text{ Vdc}$$

Type of power supply = DC Voltage from external power supply

Type of antenna = external connectable antenna with sma type connector

TEST FREQUENCIES:

Lowest channel (512): 1850.2 MHz

Middle channel (662): 1880.2 MHz

Highest channel (810): 1909.8 MHz

Report No: 23546RET		Page: 3 of 11
Date: 2006-07-24		Annex B

RF Output Power (E.I.R.P.)

SPECIFICATION

§2.1046 and 24.232

METHOD

For radiated measurements the EUT was placed on a 1 m high non-conductive stand inside an anechoic chamber. The measuring antenna was placed at 1 m distance and the maximum field strength was measured for the three channels. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT and GMSK modulated signal.

The Effective Isotropic Radiated Power (E.I.R.P.) is obtained by using the Substitution Method according to ANSI/TIA/EIA-603-C: 2004.

RESULTS

MAXIMUM EQUIVALENT ISOTROPIC RADIATED POWER E.I.R.P. (RADIATED).

Channel	Lowest	Middle	Highest
Maximum peak power (dBm)	23.04	23.18	24.33
Maximum peak power (W)	0.2	0.21	0.27
Measurement uncertainty (dB)	± 4.0		

Verdict: PASS

Report No:
23546RET

Date: 2006-07-24

Page: 4 of 11

Annex B

Radiated emissions

SPECIFICATION

§ 24.238

METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 1 GHz and at 1 m distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded. The radiated emissions were measured with peak detector and 1 MHz bandwidth.

Each detected emissions were substituted by the Substitution method, in accordance with the ANSI/TIA/EIA-603-C: 2004.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB, P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43+10\log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

Report No: 23546RET		Page: 5 of 11
Date: 2006-07-24		Annex B

RESULTS

1. CHANNEL: LOWEST (1850.2MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE (1880.2 MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.

No spurious signals were found in all the range.

3. CHANNEL: HIGHEST (1909.8 MHz).

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.


Frequency range 1 GHz-20 GHz.

No spurious signals were found in all the range.

Verdict: PASS

Report No: 23546RET Date: 2006-07-24		Page: 6 of 11 Annex B
--	--	------------------------------

FREQUENCY RANGE 30 MHz-1000 MHz.

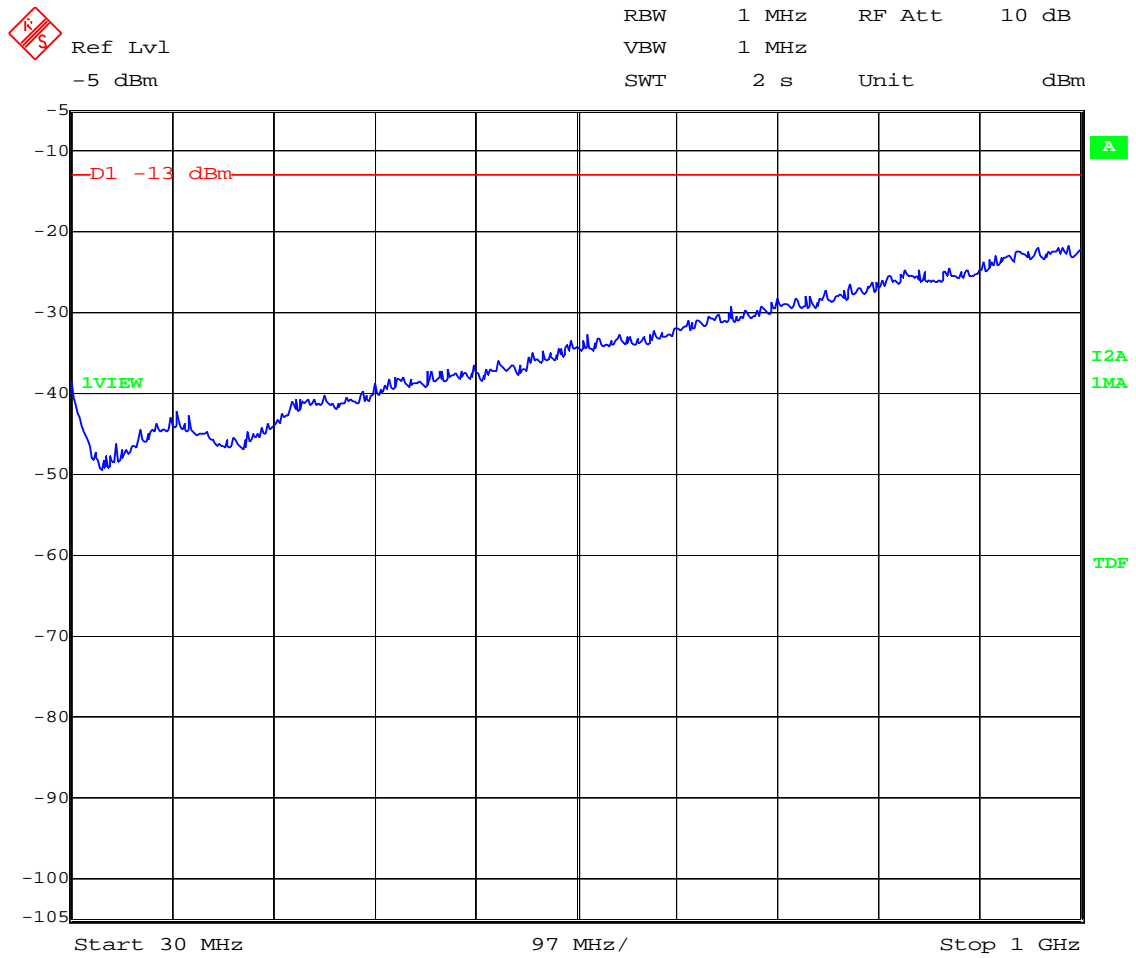


Date: 12.JUN.2006 13:13:15

(This plot is valid for all three channels).

Report No: 23546RET Date: 2006-07-24		Page: 7 of 11 Annex B
--	--	------------------------------


FREQUENCY RANGE 1 GHz to 3 GHz.

CHANNEL: LOWEST (1850.2 MHz)

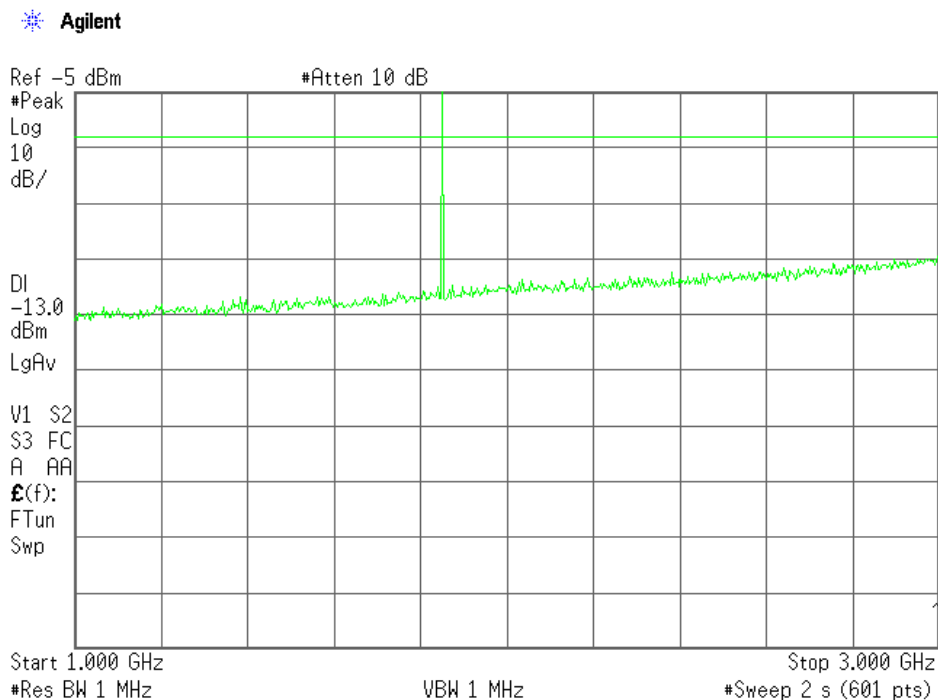

Note: The peak above the limit is the carrier frequency.


CHANNEL: MIDDLE (1880.2 MHz)

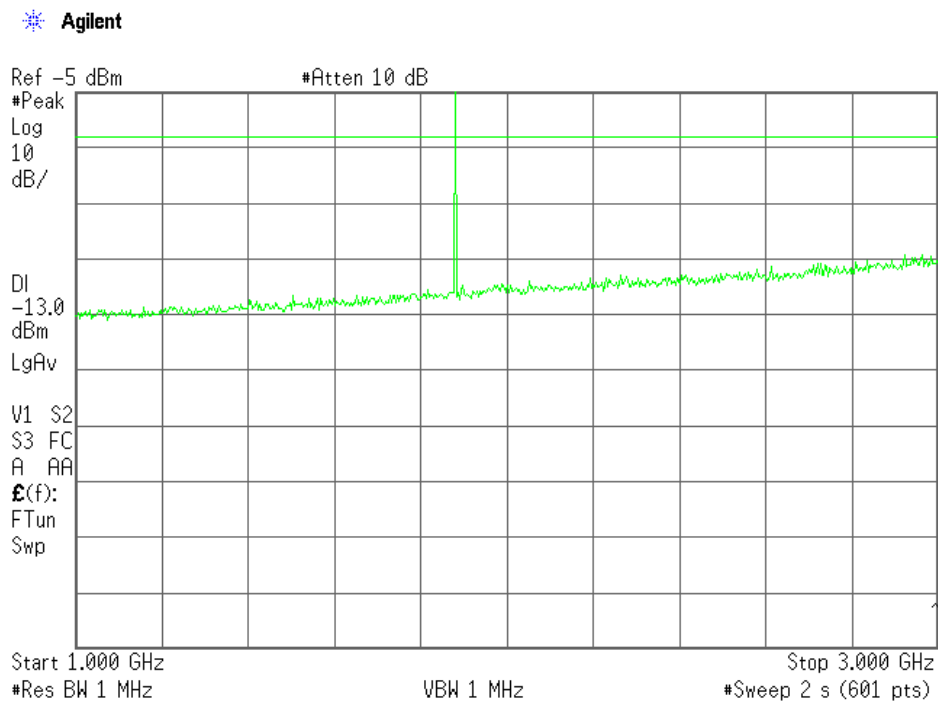

Note: The peak above the limit is the carrier frequency.

<p>Report No: 23546RET</p> <p>Date: 2006-07-24</p>		<p>Page: 8 of 11</p> <p>Annex B</p>
--	--	-------------------------------------

CHANNEL: HIGHEST (1909.8 MHz)

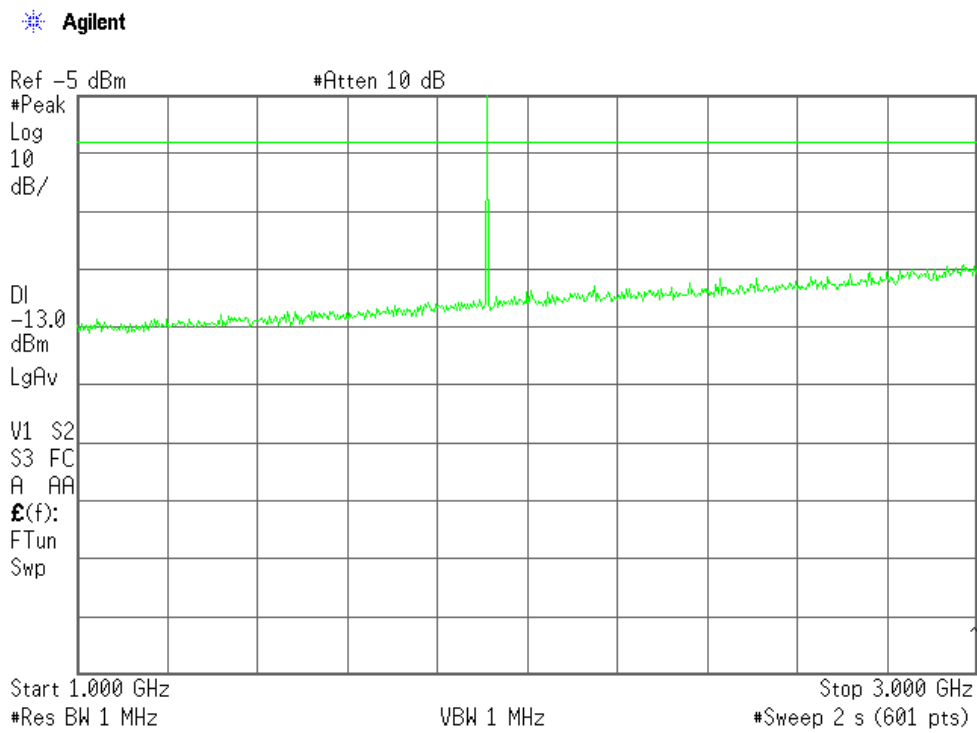


Note: The peak above the limit is the carrier frequency.

Report No: 23546RET Date: 2006-07-24		Page: 9 of 11 Annex B
--	--	------------------------------

FREQUENCY RANGE 3 GHz to 12.75 GHz.


Agilent

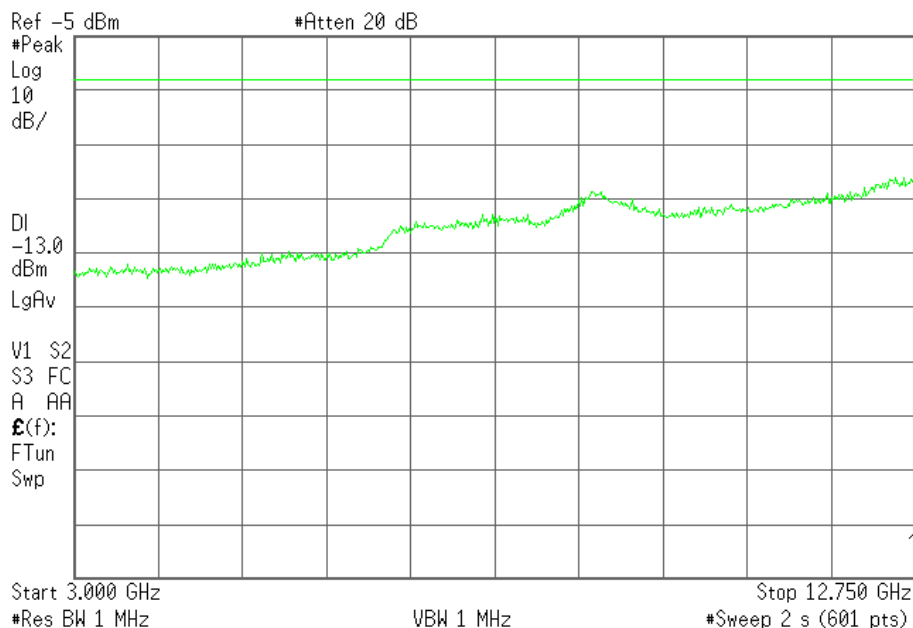

(This plot is valid for all three channels).

FREQUENCY RANGE 12.75 GHz TO 18 GHz.

Agilent

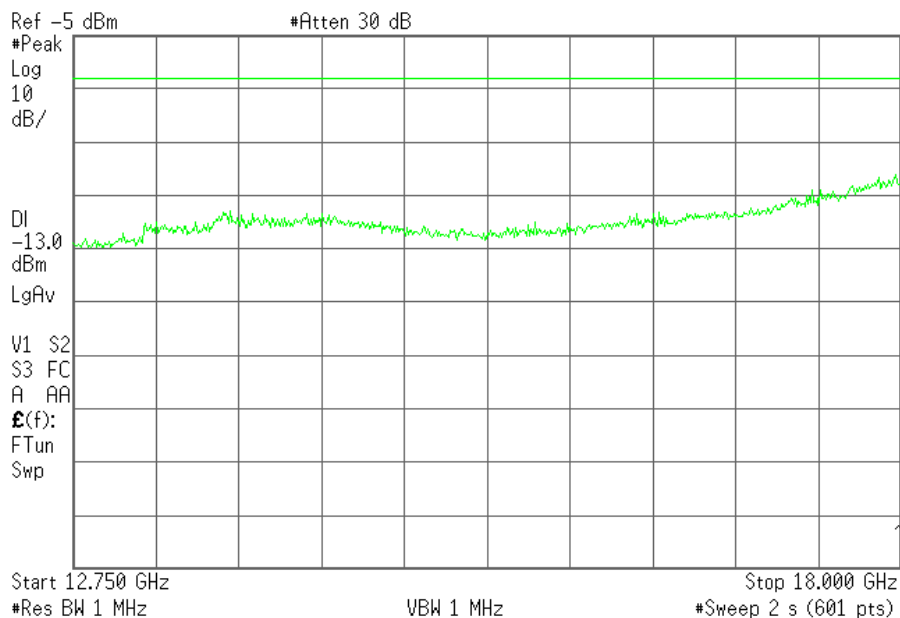


(This plot is valid for all three channels).

<p>Report No: 23546RET</p> <p>Date: 2006-07-24</p>		<p>Page: 10 of 11</p> <p>Annex B</p>
--	--	--------------------------------------

FREQUENCY RANGE 18 GHz TO 20 GHz.

Agilent

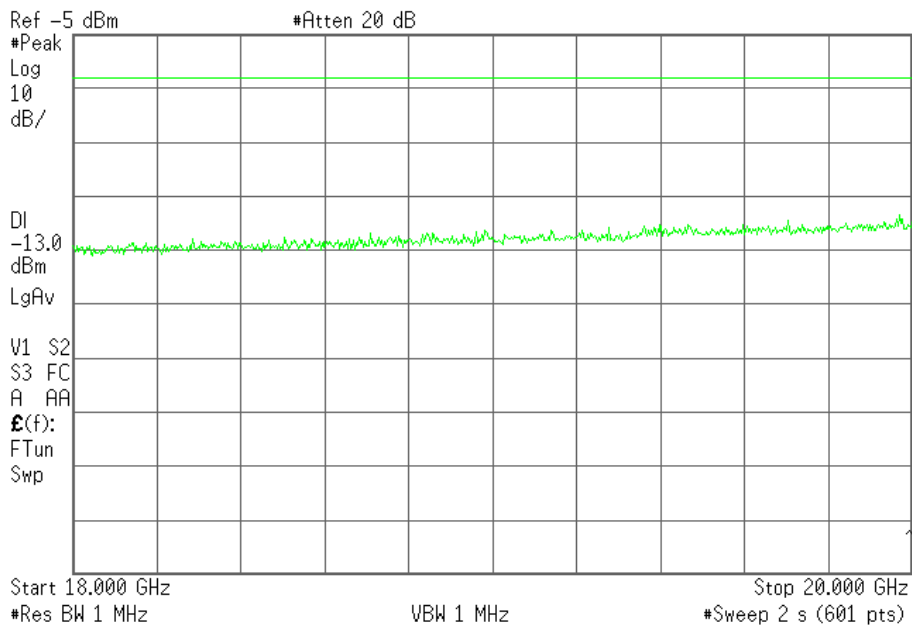

(This plot is valid for all three channels).

Report No:
23546RET

Date: 2006-07-24

Page: 11 of 11

Annex B

ANNEX C
MEASURING RESULTS FOR
ELECTROMAGNETIC EMISSION

Report No: 23546RET

For the sample under test, named S/01, and that was formed by the elements described in the clause “Identification of the tested item/items” of this test report.

Report No: 23546RET		Page: 1 of 12
Date: 2006-07-24		Annex C

INDEX:

1. - CONTINUOUS CONDUCTED EMISSION, POWER LEADS ON THE SAMPLE
S/01.....3

2. - RADIATED EMISSION, ELECTROMAGNETIC FIELD ON THE SAMPLE
S/01.....8

Report No: 23546RET Date: 2006-07-24		Page: 2 of 12 Annex C
--	--	------------------------------

1. - CONTINUOUS CONDUCTED EMISSION, POWER LEADS ON THE SAMPLE S/01**LIMITS OF INTERFERENCE**

The applied limit for continuous conducted emissions in power leads, according with the requirements of FCC Rules and Regulations 47 CFR Part 15, Subpart B in the frequency range 0,15 to 30 MHz, for Class B equipment was:

Frequency range (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0,15 to 0,5	66-56	56-46
0,5 to 5	56	46
5 to 30	60	50

TEST METHOD

According to Part 15, Subpart B of FCC Rules.

OPERATING MODES OF EUT**Different tested operating modes (OM)**

- OM#03: EUT ON. TCH 850 MHz mode.
- OM#04: EUT ON. TCH 1900 MHz mode.

TEST RESULTS

CCmmnxxx: CC, Conduction condition^o; mm: sample number; nn: operation mode; xx: wire.

- OM#03.

CDmmnxxx	Description	Result
CC0103H+	Interference voltage on Positive wire	PASS
CC0103H-	Interference voltage on Negative wire	PASS

- OM#04.

CDmmnxxx	Description	Result
CC0104H+	Interference voltage on Positive wire	PASS
CC0104H-	Interference voltage on Negative wire	PASS

Report No: 23546RET		Page: 3 of 12
Date: 2006-07-24		Annex C

GRAPH RESULTS


Continuous conducted emission: CC0103H+ (Peak and Average)

EMC32 Report

Test Information

Proyecto: 24383 IEM 002
 Empresa: TELIT COMMUNICATIONS
 Muestra: M/01
 Modo operacion: MO#03
 Fecha: 2006-07-24 12:39
 Setup: EMI conducted
 Mode: EUT ON. TCH 850 MHz. Positive noise.

EC FCC Clase B ESIB26 CC

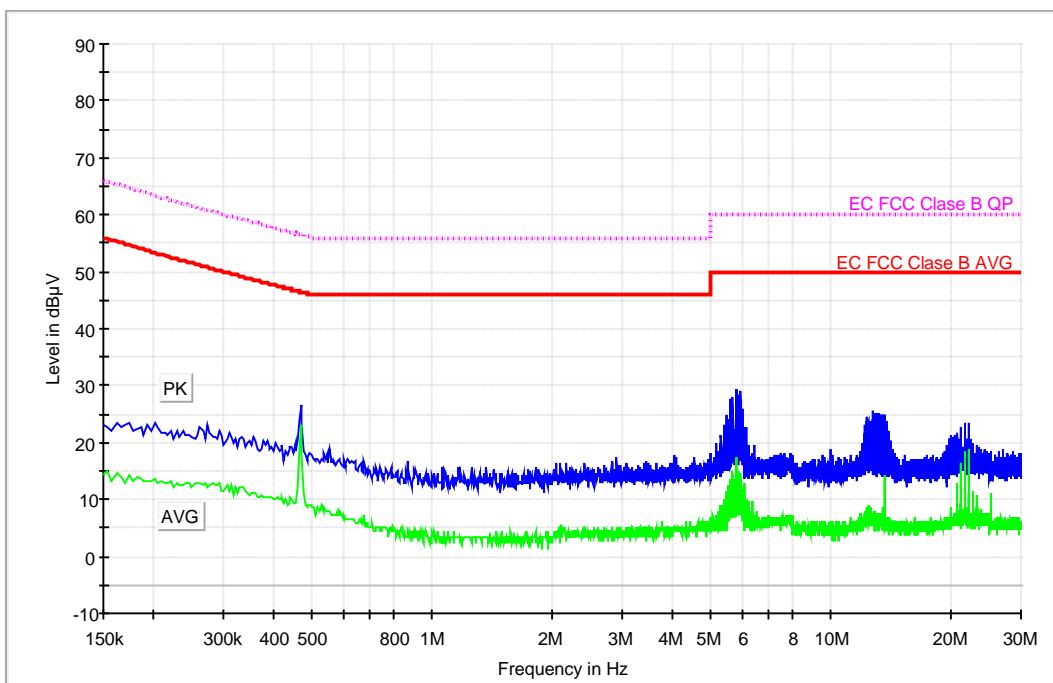

Max PK

Frequency (MHz)	MaxPeak-ClearWrite (dBµV)	Average-ClearWrite (dBµV)
0.470000	26.7	23.1
5.586000	27.8	11.7
5.626000	25.5	13.7
5.702000	27.9	15.1
5.778000	29.4	15.1
5.818000	28.9	17.3
5.894000	28.4	15.1
5.970000	29.1	14.6
6.006000	26.0	9.6
12.774000	25.5	6.1

Report No: 23546RET		Page: 4 of 12
Date: 2006-07-24		Annex C


Continuous conducted emission: CC0103H- (Peak and Average)

EMC32 Report

Test Information

Proyecto: 24383 IEM 002
 Empresa: TELIT COMUNICATIONS
 Muestra: M/01
 Modo operacion: MO#03
 Fecha: 2006-06-19 17:30
 Setup: EMI conducted
 Mode: EUT ON. TCH 850. Negative noise.

EC FCC Class B ESIB26 CC

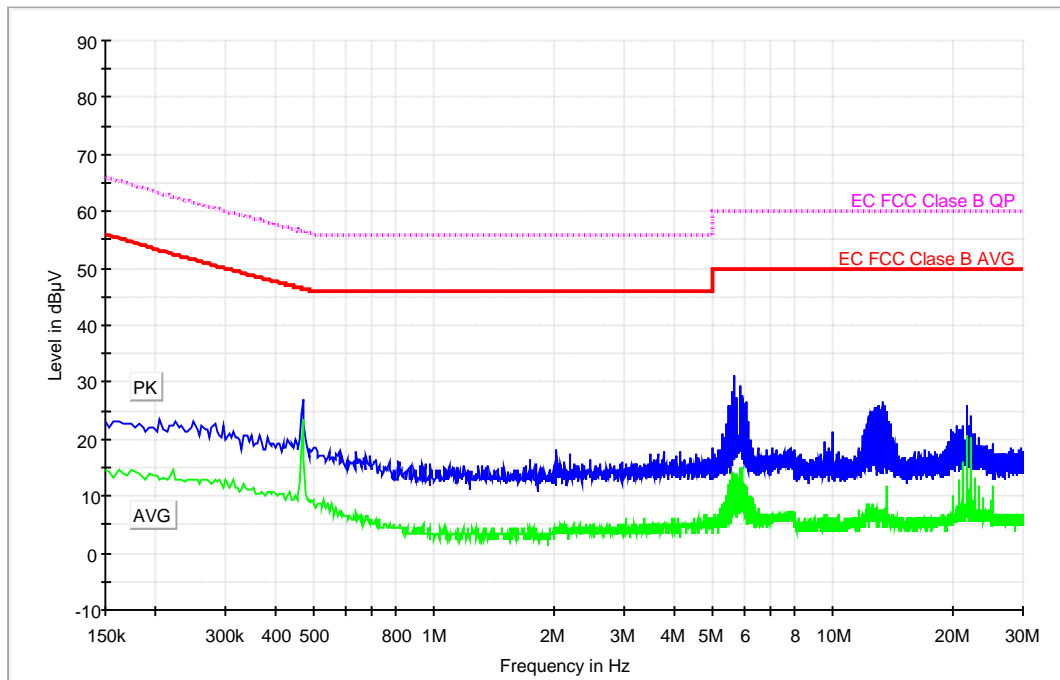

Max PK

Frequency (MHz)	MaxPeak-ClearWrite (dBµV)	Average-ClearWrite (dBµV)
0.470000	26.8	23.5
5.614000	28.3	14.3
5.694000	31.0	13.7
5.730000	27.4	14.0
5.846000	29.3	15.1
5.922000	27.4	14.8
5.962000	27.8	12.4
6.038000	26.4	12.1
6.074000	26.5	11.3
13.402000	26.5	5.4

Report No: 23546RET		Page: 5 of 12
Date: 2006-07-24		Annex C


Continuous conducted emission: CC0104H+ (Peak and Average)

EMC32 Report

Test Information

Proyecto: 24383 IEM 002
 Empresa: TELIT COMMUNICATIONS
 Muestra: M/01
 Modo operacion: MO#04
 Fecha: 2006-06-19 17:38
 Setup: EMI conducted
 Mode: EUT ON. TCH 1900 MHz. Positive noise.

EC FCC Class B ESIB26 CC

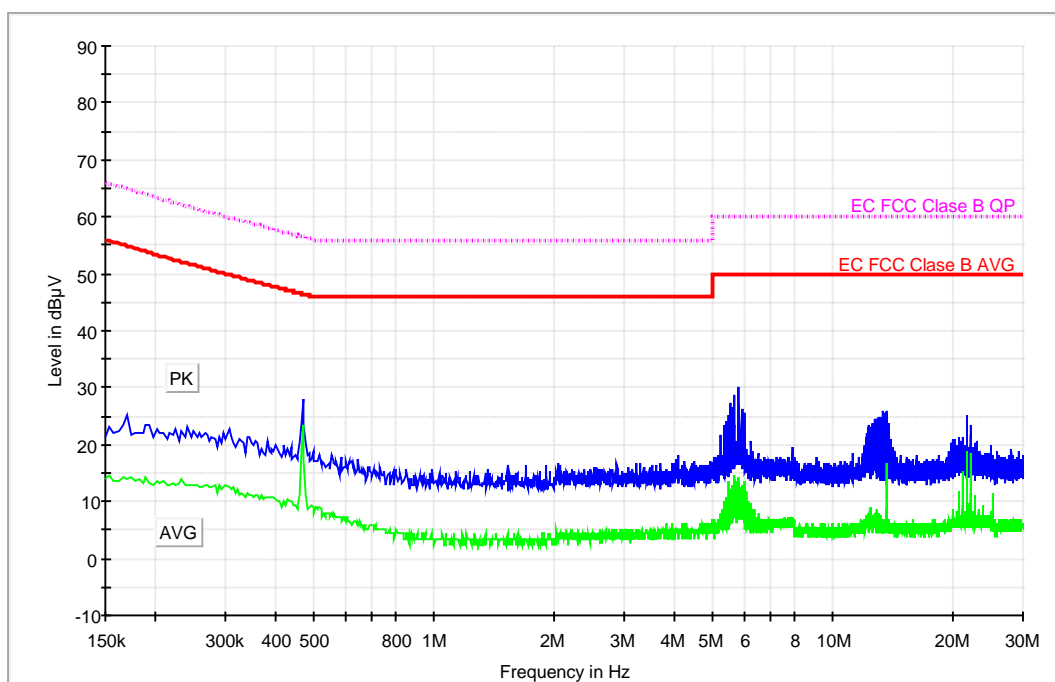

Max PK

Frequency (MHz)	MaxPeak-ClearWrite (dBµV)	Average-ClearWrite (dBµV)
0.470000	28.1	23.4
5.522000	27.3	12.1
5.566000	26.6	12.1
5.598000	26.5	12.8
5.674000	28.7	14.6
5.790000	27.1	14.3
5.826000	30.3	10.9
5.906000	26.1	12.8
5.950000	26.1	12.4
13.678000	25.8	15.2

Report No: 23546RET		Page: 6 of 12
Date: 2006-07-24		Annex C


Continuous conducted emission: CC0104H- (Peak and Average)

EMC32 Report

Test Information

Proyecto: 24383 IEM 002
 Empresa: TELIT COMMUNICATIONS
 Muestra: M/01
 Modo operacion: MO#04
 Fecha: 2006-06-19 17:22
 Setup: EMI conducted
 Mode: EUT ON. IDLE 1900 MHz. Negative noise.

EC FCC Class B ESIB26 CC

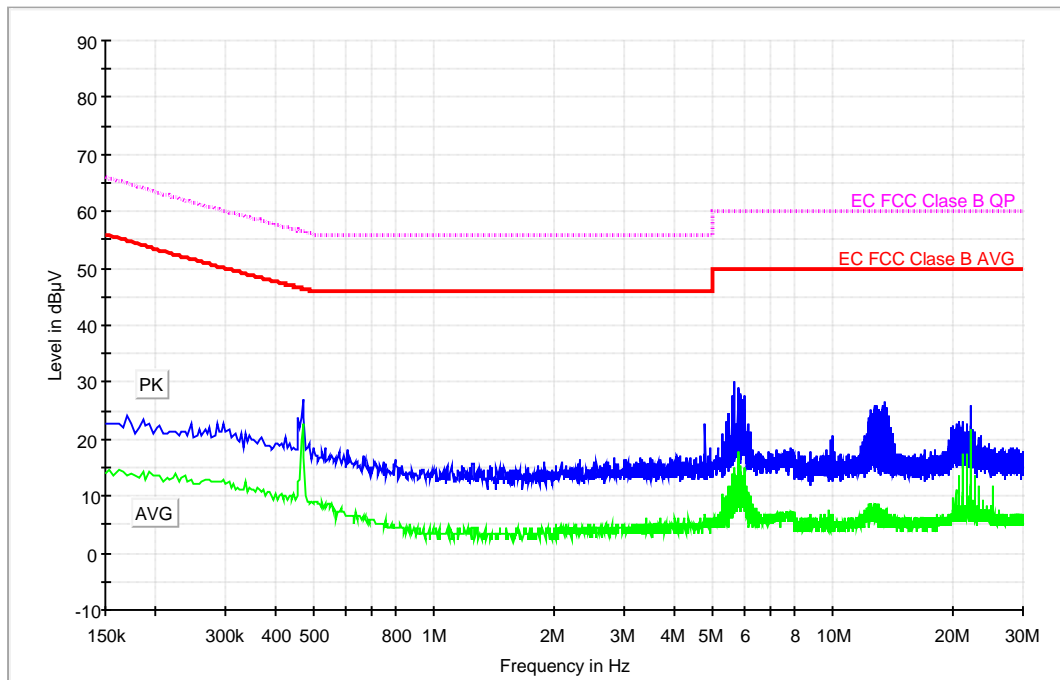

Max PK

Frequency (MHz)	MaxPeak-ClearWrite (dBµV)	Average-ClearWrite (dBµV)
5.622000	27.8	14.0
5.698000	30.0	14.8
5.774000	27.3	15.4
5.814000	28.9	17.7
5.822000	28.6	17.1
5.866000	26.9	8.0
5.878000	27.5	13.4
5.890000	28.2	15.4
5.918000	27.1	13.4
6.006000	27.8	14.8

Report No: 23546RET		Page: 7 of 12
Date: 2006-07-24		Annex C

2. - RADIATED EMISSION, ELECTROMAGNETIC FIELD ON THE SAMPLE S/01

LIMITS OF INTERFERENCE

The applied limit for radiated emissions, 3 m distance, according with the requirements of FCC Rules and Regulations 47 CFR Part 15, Subpart B in the frequency range 30 MHz to 12,5 GHz, for Class B equipment, which is a transmitter in a band over 500 MHz, was:

Frequency range (MHz)	Limit for 3 m ($\mu\text{V/m}$)	Limit for 3 m ($\text{dB}\mu\text{V/m}$)
30 to 88	100	40
88 to 216	150	43,52
216 to 960	200	46,02
Above 960	500	53,98

TEST METHOD

According to Part 15, Subpart B of FCC Rules.

OPERATING MODES OF EUT

Different tested operating modes (OM)

- OM#01: EUT ON. IDLE 850 MHz mode.

TEST RESULTS

CRmmnn: CR, Radiated Condition; mm: sample number; nn: operation mode.

- OM#01.

CRmmnn	Description	Result
CR0101	[30 MHz - 1000 MHz]	PASS
CR0101	[1 GHz – 12,5 GHz]	PASS

Report No: 23546RET		Page: 8 of 12
Date: 2006-07-24		Annex C

GRAPH RESULTS


Radiated emission: CR0101 (30 MHz – 1000 MHz)

EMC32 Report

Test Information

Proyecto: 24383iem.002
 Empresa: TELIT COMUNICATIONS
 Muestra: M/01
 Modo operacion: MO#01
 Fecha: 2006-06-09 16:35
 Setup: EMI radiated
 Mode: EUT ON. Idle mode.

FCC class B

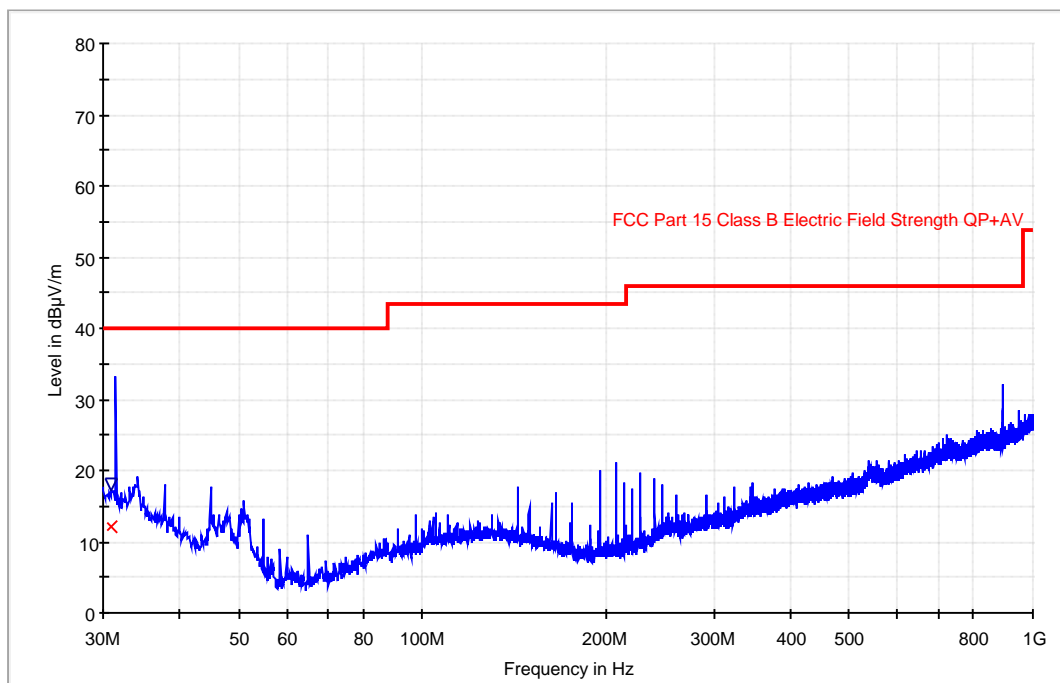

Maximized

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)
31.014028	12.2	17.9	184.00	H	39.0

Report No: 23546RET		Page: 9 of 12
Date: 2006-07-24		Annex C

DataReduction Detector1

Frequency (MHz)	MaxPeak-ClearWrite (dB μ V/m)	Antenna height (cm)	Polarity	Turntable position (deg)
31.500000	33.1	150.00	H	-2.0
45.000000	17.8	150.00	V	93.0
51.000000	15.9	150.00	V	93.0
55.000000	13.3	150.00	V	93.0
65.000000	11.0	150.00	V	93.0
143.000000	17.8	150.00	V	-2.0
162.500000	15.4	150.00	V	-2.0
165.700000	16.8	150.00	V	-2.0
175.500000	15.5	150.00	V	-2.0
195.000000	19.9	150.00	V	-2.0
208.000000	21.1	150.00	H	93.0
214.500000	18.3	150.00	H	93.0
221.000000	17.4	150.00	H	93.0
227.500000	19.8	150.00	H	93.0
240.500000	18.9	150.00	H	-2.0
247.000000	18.1	150.00	H	93.0
260.000000	16.7	150.00	H	93.0
890.400000	32.3	150.00	V	93.0


Radiated emission: CR0101 (1 GHz – 12,5 GHz). Horizontal polarization

EMC32 Report

Test Information

Proyecto: 24383iem.002
 Empresa: TELIT COMMUNICATIONS
 Muestra: M/01
 Modo operacion: MO#01
 Fecha: 2006-06-09 18:20
 Setup: EMI radiated
 Mode: EUT ON. Idle mode. Horizontal polarization.

FCC 1-12.5GHz

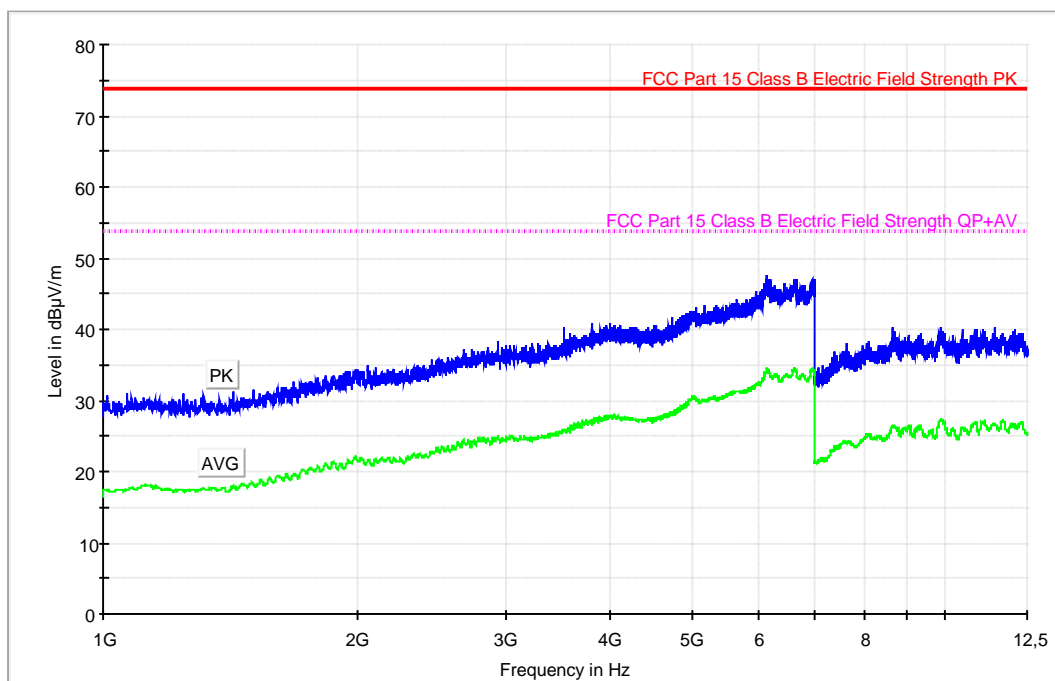

Max PK

Frequency (MHz)	MaxPeak-ClearWrite (dBµV/m)	Average-ClearWrite (dBµV/m)
6140.000000	47.5	34.6
9874.000000	40.3	27.2

Report No: 23546RET		Page: 11 of 12
Date: 2006-07-24		Annex C


Radiated emission: CR0101 (1 GHz – 12,5 GHz) Vertical Polarization

EMC32 Report

Test Information

Proyecto: 24383iem.001
 Empresa: TELIT COMMUNICATIONS
 Muestra: M/01
 Modo operacion: MO#01
 Fecha: 2006-06-09 18:15
 Setup: EMI radiated
 Mode: EUT ON. Idle mode. Vertical polarization.

FCC 1-12.5GHz

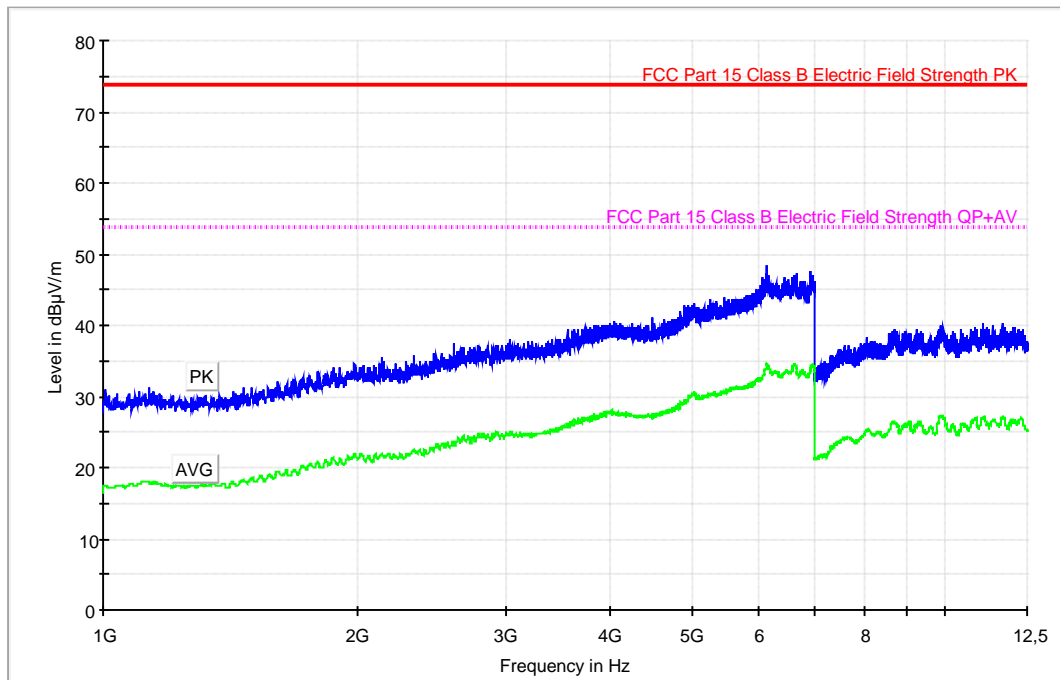

Max PK

Frequency (MHz)	MaxPeak-ClearWrite (dBµV/m)	Average-ClearWrite (dBµV/m)
6139.000000	48.5	34.6
11088.000000	40.4	26.8

Report No: 23546RET		Page: 12 of 12
Date: 2006-07-24		Annex C

ANNEX D

PHOTOGRAPHS (Number of photographs: 5)

Report No.: 23546RET


Report No.:
23546RET

Date: 2006-07-24

Page: 1 of 6

Annex D

1. Equipment (front view)

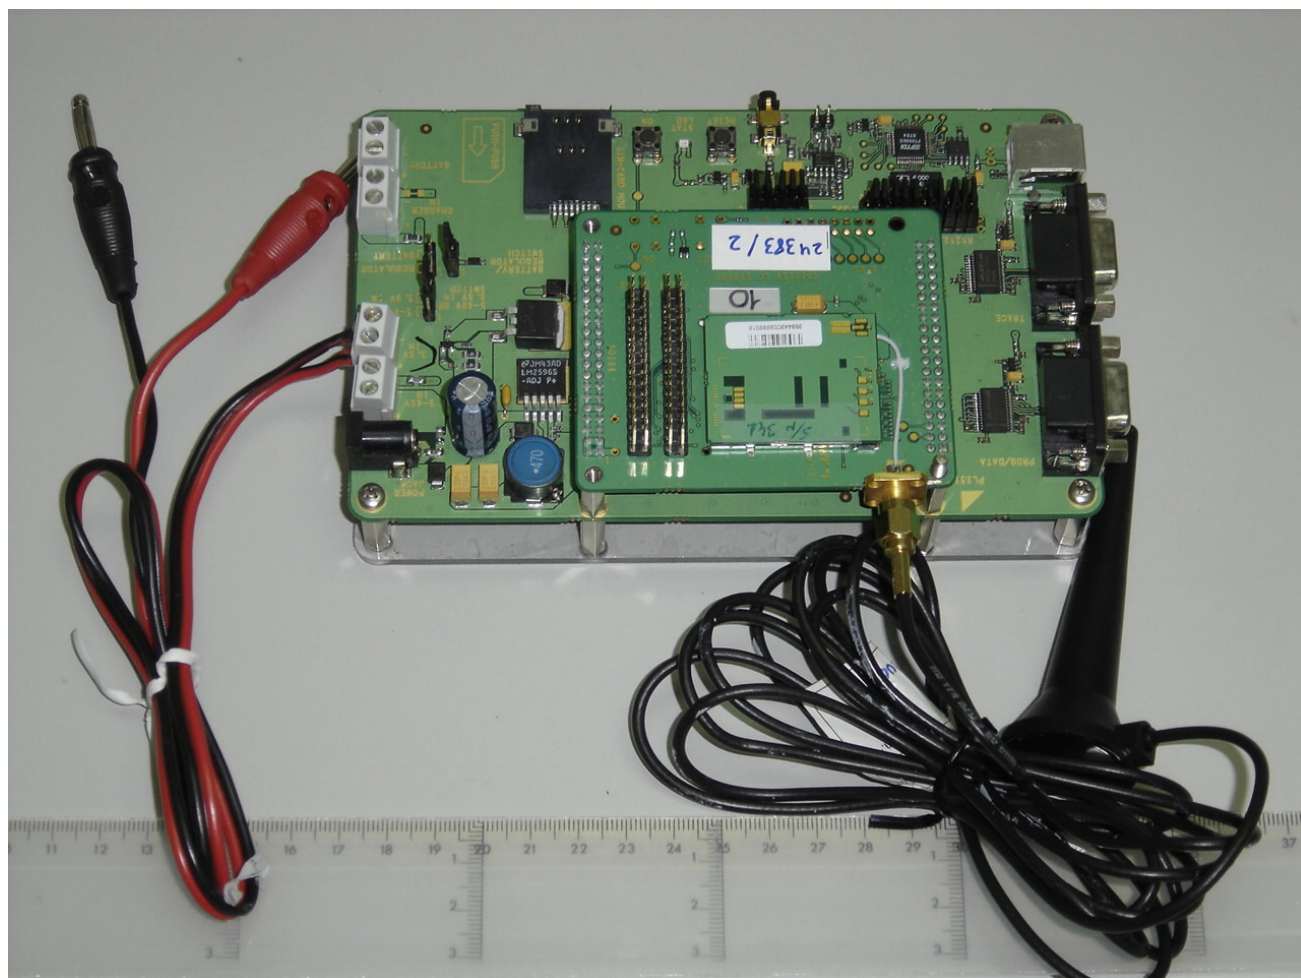

Report No.:
23546RET


Date: 2006-07-24

FET18_00.DOC

Page: 2 of 6

Annex D

2. Equipment (back view)

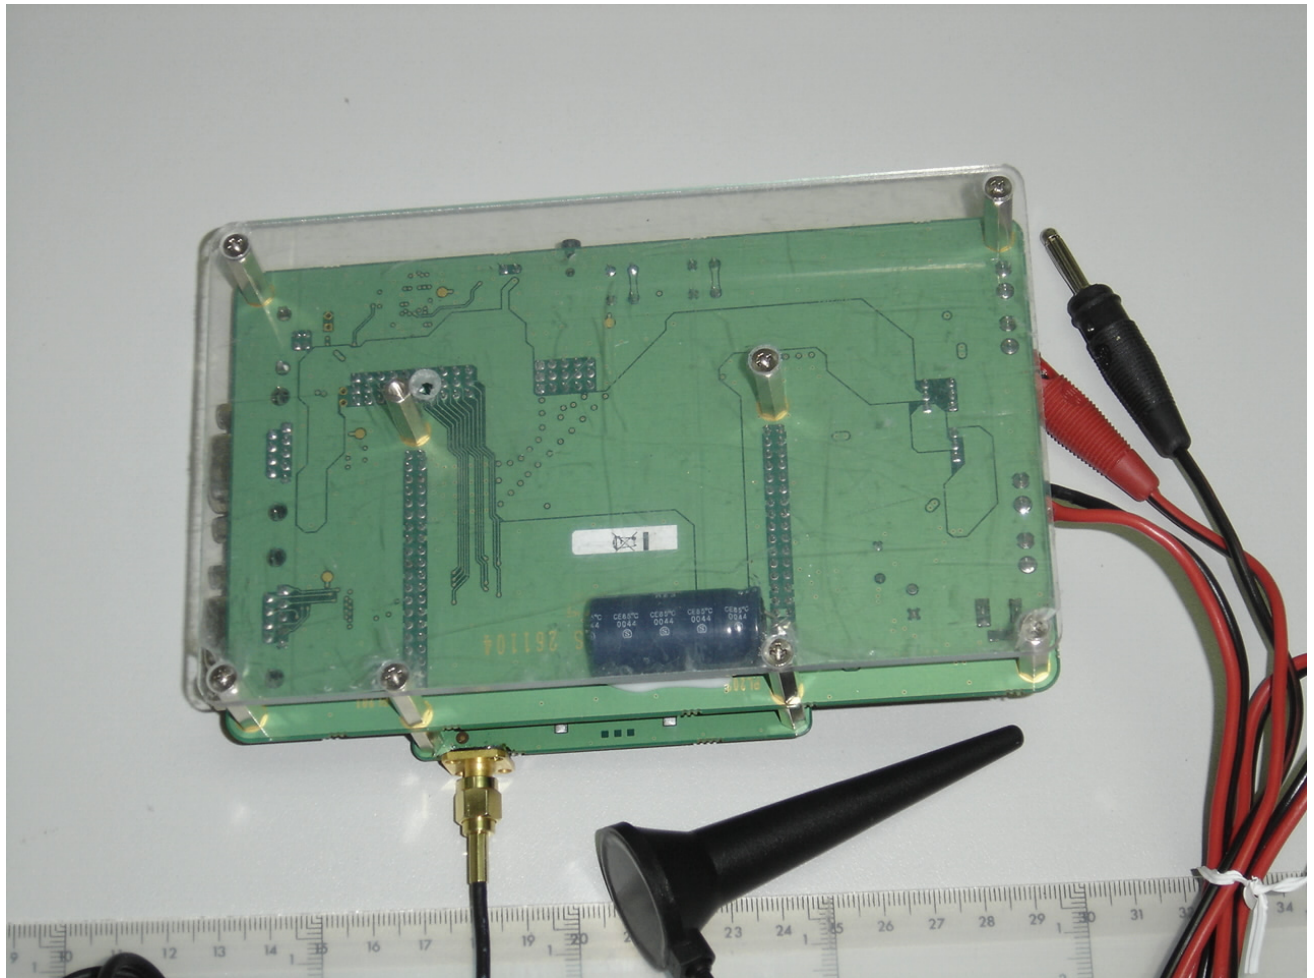

Report No.:
23546RET

Date: 2006-07-24

FET18_00.DOC

Page: 3 of 6

Annex D

3. General test set-up for radiated measurements.



Report No.:
23546RET


Date: 2006-07-24

FET18_00.DOC

Page: 4 of 6

Annex D

4. Test set-up for radiated measurements below 1 GHz.

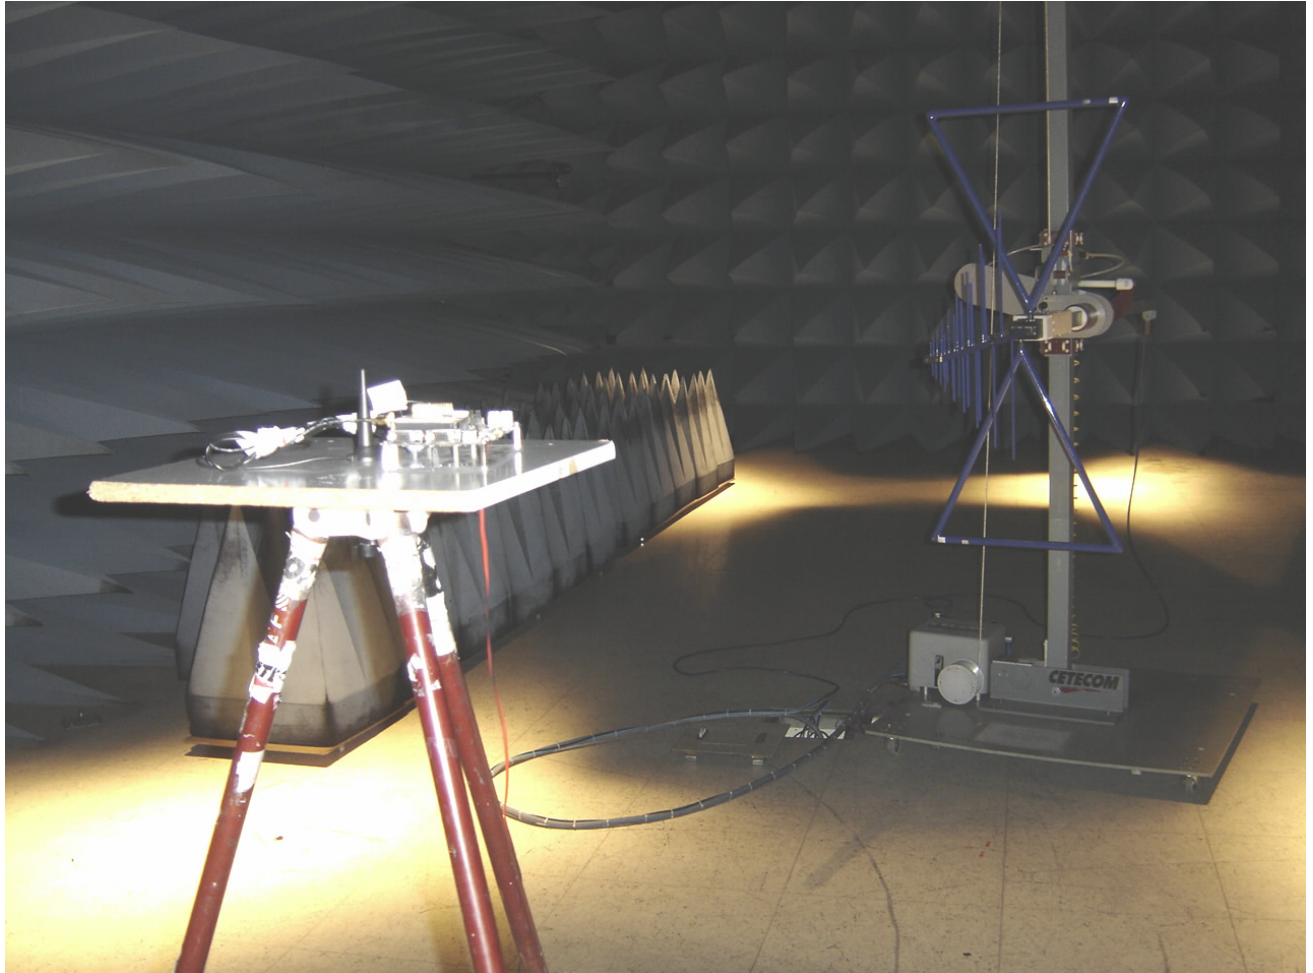

Report No.:
23546RET


Date: 2006-07-24

FET18_00.DOC

Page: 5 of 6

Annex D

5. Test set-up for radiated measurements above 1 GHz.

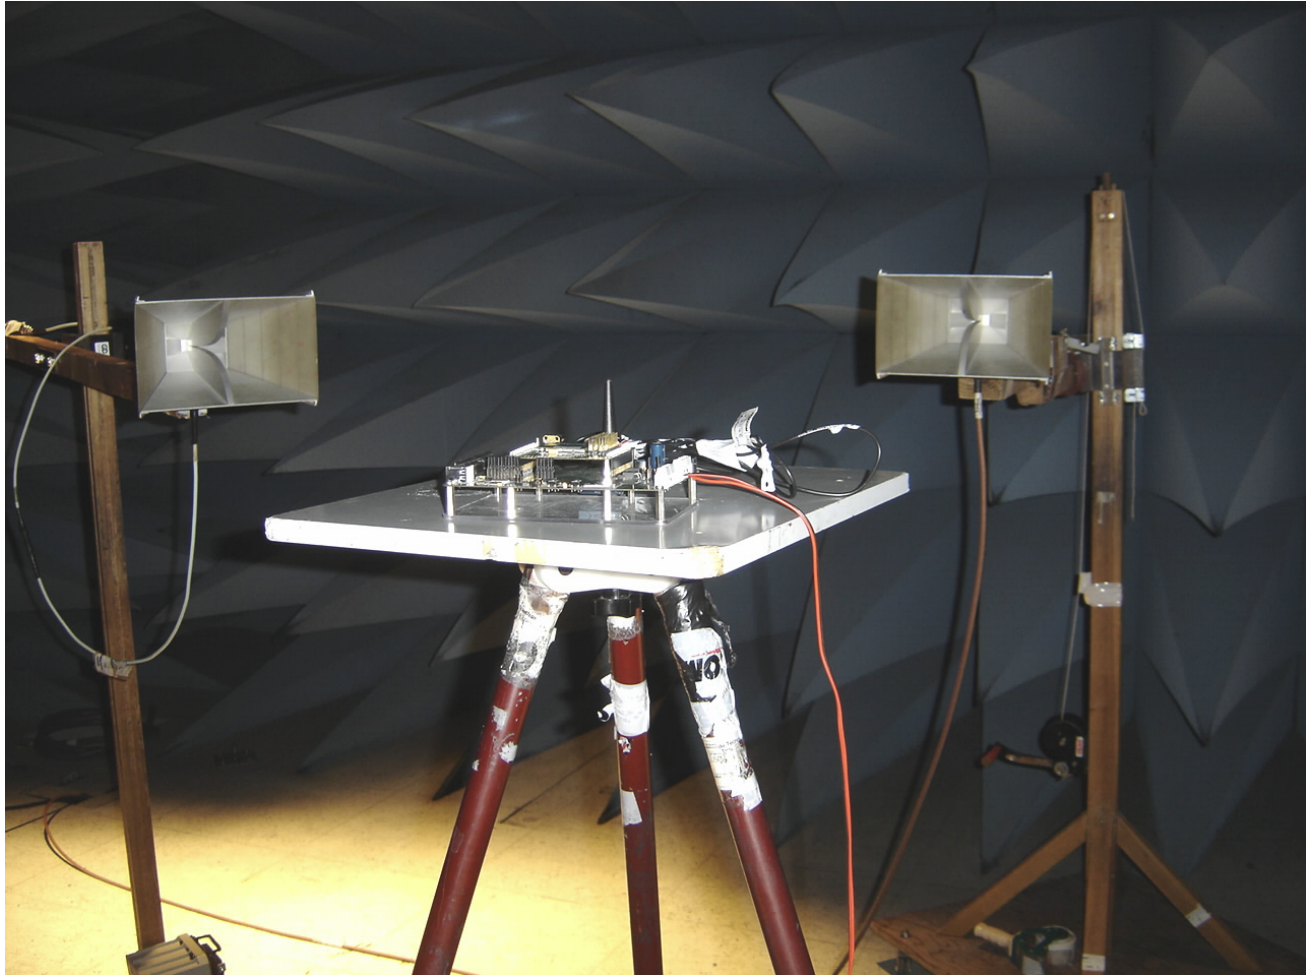

Report No.:
23546RET

Date: 2006-07-24

FET18_00.DOC

Page: 6 of 6

Annex D