



**TEST REPORT
FROM
RFI GLOBAL SERVICES LTD**

Test of: GE865

To: FCC Part 24: 2008 Subpart E, RSS-Gen Issue 2 June 2007 and
RSS-133 Issue 5 February 2009

Test Report Serial No:
RFI/RPT2/RP74296JD04B

Supersedes Test Report Serial No:
RFI/RPT1/RP74296JD04B

This Test Report Is Issued Under The Authority Of Brian Watson, Operations Director:		
Checked By:	A.HENRIQUES	
Signature:		
Date of Issue:	04 June 2009	

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001
Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number:2117901

This page has been left intentionally blank.

Table of Contents

1. Customer Information 4

2. Summary of Testing 5

3. Equipment Under Test (EUT) 7

4. Operation and Monitoring of the EUT during Testing 9

5. Measurements, Examinations and Derived Results 10

6. Measurement Uncertainty 25

Appendix 1. Test Equipment Used 26

1. Customer Information









Company Name:	Telit Communications S.p.A.
Address:	Via Stazione di Prosecco, 5/B I - 34010 Sgonico (Trieste) Italy

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR24
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2008: Part 24 Subpart E (Personal Communication Services)
Specification Reference:	RSS-Gen Issue 2 June 2007
Specification Title:	General Requirements and Information for the Certification of Radiocommunication Equipment
Specification Reference:	RSS-133 Issue 5 Feb 2009
Specification Title:	2 GHz Personal Communications Services
Specification Reference:	SRSP-510 Issue 5 Feb 2009
Specification Title:	Technical Requirements for Personal Communications Services in the Bands 1850-1915 MHz and 1930-1995 MHz
Site Registration:	FCC: 209735 Industry Canada: 3245B-2
Location of Testing:	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	14 April to 17 April 2009

2.2. Summary of Test Results

FCC Reference (47CFR)	IC Reference	Measurement	Port Type	Result
Part 15.109	RSS-Gen 4.10/6 RSS-133 6.6	Idle Mode Radiated Spurious Emissions	Enclosure	
Part 2.1046(a)	RSS-133 6.4 SRSP-510 5.1.2	Transmitter Carrier Output Power	Antenna Terminals	
Part 24.235	RSS-133 6.3 RSS Gen 4.7	Transmitter Frequency Stability (Temperature & Voltage Variation)	Antenna	
Part 2.1049/24.238	RSS-Gen 4.6.1	Transmitter Occupied Bandwidth	Antenna	
Part 2.1053/24.238	RSS-133 6.5	Transmitter Out of Band Radiated Emissions	Antenna	
Part 2.1053/24.238	RSS 133 6.5	Transmitter Band Edge Radiated Emissions	Antenna	
Key to Results				
 = Complied  = Did not comply				

2.3. Methods and Procedures

Reference:	ANSI/TIA-603-C-2004
Title:	Land Mobile Communications Equipment, Measurements and performance Standards
Reference:	ANSI C63.4 (2003)
Title:	American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Telit
Model Name or Number:	GE865
IMEI Number:	357938029002359
Hardware Version Number:	1
Software Version Number:	10.00.000-B006
Industry Canada ID Number:	5131A-GE865
FCC ID Number:	RI7GE865

3.2. Description of EUT

The equipment under test is a quad band GSM/GPRS modem mounted on a Telit EVK2 development board. The EUT is mounted to the development board on four support posts and connected by two 40 pin connectors.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	PCS1900		
Type of Radio Device:	Transceiver		
Mode:	GSM/GPRS		
Modulation Type:	GMSK		
Channel Spacing:	200 kHz		
Power Supply Requirement(s):	Nominal	3.23 V	
	Minimum	3.80 V	
	Maximum	4.37 V	
Maximum Output Power (EIRP):	GSM	29.6 dBm	
	GPRS	29.6 dBm	
Transmit Frequency Range:	1850 to 1910 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	512	1850.2
	Middle	660	1879.8
	Top	810	1909.8
Receive Frequency Range:	1930 to 1990 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	512	1930.2
	Middle	660	1959.8
	Top	810	1989.8

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Development board
Model Name or Number:	EVK2
Serial Number:	113920002257

Description:	Monopole antenna with magnetic base
Model Name or Number:	Not stated
Serial Number:	Not stated
Cable Length and Type:	2.5 metres / RG174 coaxial terminated with SMA male
Connected to Port:	RF output port on EUT

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Idle mode.
- Constantly transmitting at full power on bottom, centre and top channels as required.
- Occupied bandwidth, output power and band edge tests were performed with the EUT in GSM single timeslot circuit switched and GPRS Multislot Class 10 with the unit transmitting on two timeslots in the uplink.
- Transmitter radiated spurious emissions pre-scans were performed with the EUT transmitting in circuit switched mode. Final measurements were performed with the EUT in circuit switched and GPRS modes.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- Connected to a GSM/GPRS system simulator, operating in transceiver mode.
- A GSM test SIM was fitted to the EUT for all tests.
- Powered from a bench power supply connected to the 3.8V IN port on the development board.
- A $\frac{1}{4}$ wave antenna on a magnetic base was supplied by the Client. The coaxial cable from the antenna was connected to the EUT RF port (SMA connector). The antenna and associated magnetic base were placed onto a flat metal plate measuring 150mm x 150mm, all radiated tests were performed in this configuration. Tests were performed with the antenna mounted vertically and horizontally to maximise radiated emissions.
- There is no integral antenna on the EUT.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

5.2. Test Results

5.3. Idle Mode Radiated Spurious Emissions

Test Summary:

FCC Part:	15.109
Frequency Range:	30 MHz to 1000 MHz
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes

Environmental Conditions:


Temperature (°C):	25
Relative Humidity (%):	29

Results:

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
947.515	Horizontal	41.3	46.0	4.7	Complied

Note(s):

- No spurious emissions were detected above the noise floor of the measuring receiver; therefore, the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above.

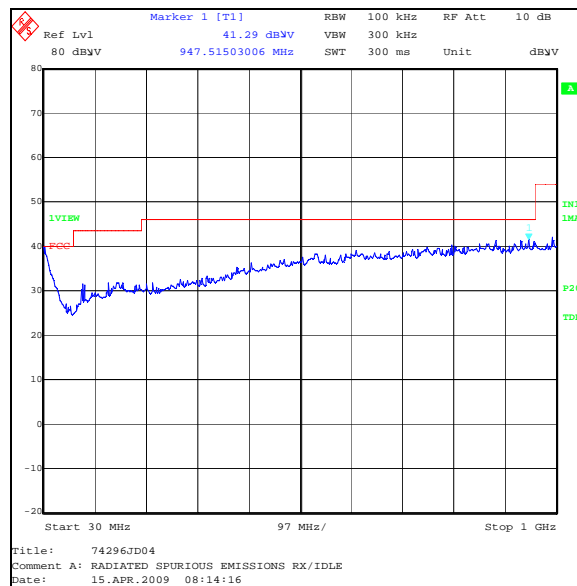

Idle Mode Radiated Spurious Emissions (continued)**Test Summary:**

FCC Part:	15.109
Frequency Range:	1 GHz to 12.75 GHz
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	29




Results: Highest Peak Level

Frequency (GHz)	Antenna Polarity	Detector Level (dBμV)	Transducer Factor (dB)	Peak Level (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Result
12.502	Horizontal	40.8	12.8	53.6	54.0	0.4	Complied

Note(s):

1. No spurious emissions were detected above the noise floor of the measuring receiver; therefore, the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.

Idle Mode Radiated Spurious Emissions (continued)

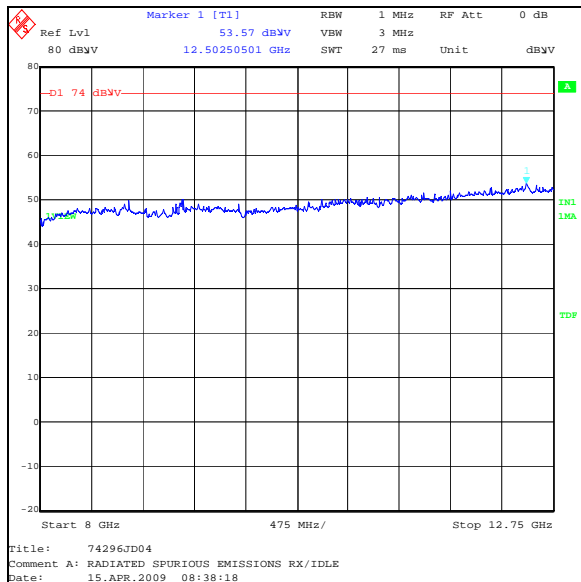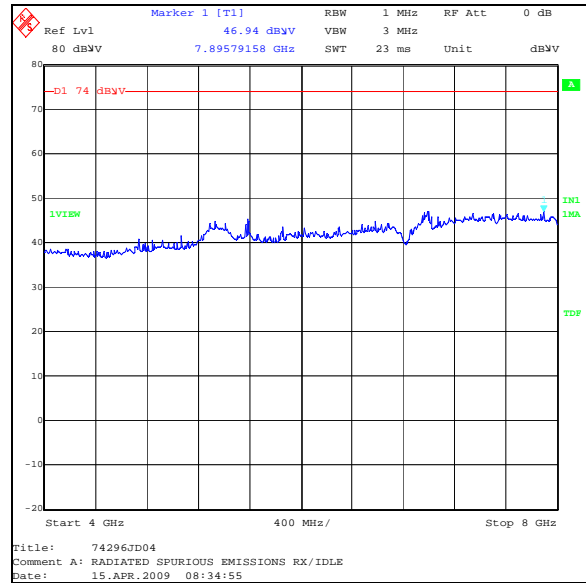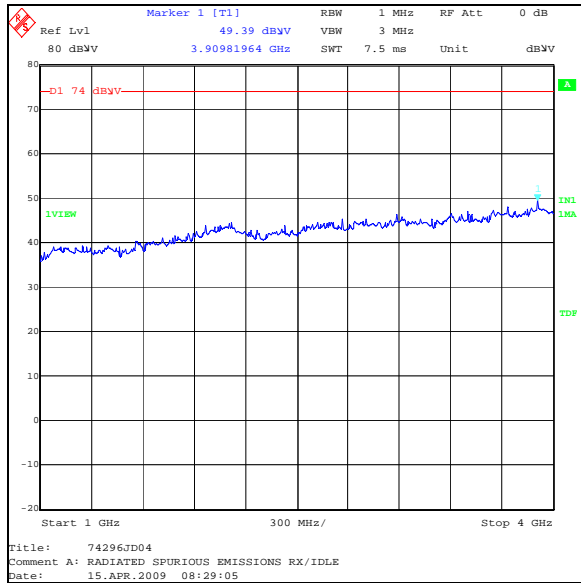

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

5.4. Transmitter Carrier Output Power**Test Summary:**

FCC Part:	2.1046(a)
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.1 referencing FCC CFR Part 2.1046(a)

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	32

Results: GSM Circuit Switched

Channel	Measured Frequency (MHz)	Maximum Antenna Gain (dB)	Conducted RF O/P Power (dBm)	Calculated EIRP (dBm)	Limit EIRP (dBm)	Margin (dB)	Result
Bottom	1850.2	3.0	29.4	32.4	33.0	0.6	Complied
Middle	1879.8	3.0	29.0	32.0	33.0	1.0	Complied
Top	1909.8	3.0	28.9	31.9	33.0	1.1	Complied

Results: GPRS

Channel	Measured Frequency (MHz)	Maximum Antenna Gain (dB)	Conducted RF O/P Power (dBm)	Calculated EIRP (dBm)	Limit EIRP (dBm)	Margin (dB)	Result
Bottom	1850.2	3.0	29.4	32.4	33.0	0.6	Complied
Middle	1879.8	3.0	29.0	32.0	33.0	1.0	Complied
Top	1909.8	3.0	28.8	31.8	33.0	1.2	Complied

Note(s):

1. The conducted output power was added to the maximum allowable gain stated by the client and compared against the FCC Part 24 EIRP limit.

5.5. Transmitter Frequency Stability (Temperature Variation)**Test Summary:**

FCC Part:	24.235
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	28

Results: Bottom Channel (1850.2 MHz)

Temperature (°C)	Frequency Error (Hz)	Measured Frequency (MHz)	Lower Band Edge Limit (MHz)	Margin (MHz)	Result
-30	63	1850.200063	1850.0	0.200063	Complied
-20	67	1850.200067	1850.0	0.200067	Complied
-10	66	1850.200066	1850.0	0.200066	Complied
0	71	1850.200071	1850.0	0.200071	Complied
10	69	1850.200069	1850.0	0.200069	Complied
20	64	1850.200064	1850.0	0.200064	Complied
30	69	1850.200069	1850.0	0.200069	Complied
40	62	1850.200062	1850.0	0.200062	Complied
50	58	1850.200058	1850.0	0.200058	Complied

Results: Top Channel (1909.8 MHz)

Temperature (°C)	Frequency Error (Hz)	Measured Frequency (MHz)	Upper Band Edge Limit (MHz)	Margin (MHz)	Result
-30	62	1909.800062	1910.0	0.199938	Complied
-20	72	1909.800072	1910.0	0.199928	Complied
-10	71	1909.800071	1910.0	0.199929	Complied
0	67	1909.800067	1910.0	0.199933	Complied
10	46	1909.800046	1910.0	0.199954	Complied
20	64	1909.800064	1910.0	0.199936	Complied
30	58	1909.800058	1910.0	0.199942	Complied
40	70	1909.800070	1910.0	0.199930	Complied
50	69	1909.800069	1910.0	0.199931	Complied

5.6. Transmitter Frequency Stability (Voltage Variation)**Test Summary:**

FCC Part:	24.235
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

Environmental Conditions:

Temperature (°C):	28
Relative Humidity (%):	29

Results: Bottom Channel (1850.2 MHz)

Supply Voltage (V)	Frequency Error (Hz)	Measured Frequency (MHz)	Lower Band Edge Limit (MHz)	Margin (MHz)	Result
3.23	72	1850.200072	1850.0	0.200072	Complied
4.37	62	1850.200062	1850.0	0.200062	Complied

Results: Top Channel (1909.8 MHz)

Supply Voltage (V)	Frequency Error (Hz)	Measured Frequency (MHz)	Upper Band Edge Limit (MHz)	Margin (MHz)	Result
3.23	83	1909.800083	1910.0	0.199917	Complied
4.37	69	1909.800069	1910.0	0.199931	Complied

5.7. Transmitter Occupied Bandwidth

Test Summary:

FCC Part:	24.238
Test Method Used:	As detailed in ANSI C63.4 Section 13.1.7 and relevant annexes referencing FCC CFR Part 2.1049 (see note below)

Environmental Conditions:


Temperature (°C):	27
Relative Humidity (%):	31

Results: GSM Circuit Switched

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1879.8	246.493

Note(s):

- In lieu of the test method detailed in ANSI C63.4 Section 13.1.7 the 99% occupied bandwidth was measured using the Occupied Bandwidth function of the spectrum analyser.

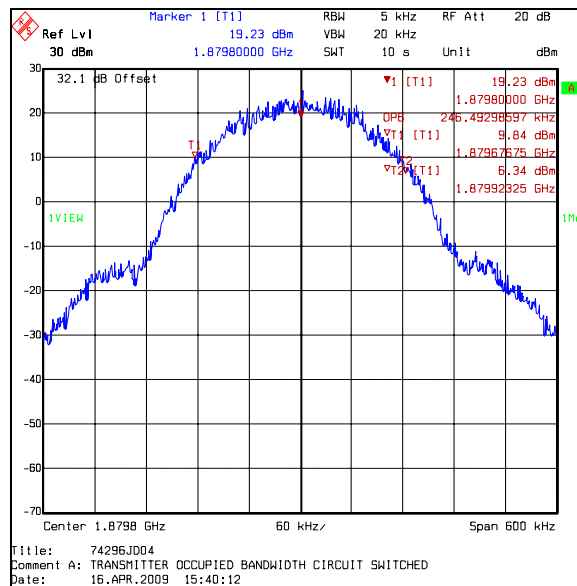

Transmitter Occupied Bandwidth (continued)

Test Summary:

FCC Part:	24.238
Test Method Used:	As detailed in ANSI C63.4 Section 13.1.7 and relevant annexes referencing FCC CFR Part 2.1049 (see note below)

Environmental Conditions:


Temperature (°C):	27
Relative Humidity (%):	31

Results: GPRS

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	1879.8	246.493

Note(s):

- In lieu of the test method detailed in ANSI C63.4 Section 13.1.7 the 99% occupied bandwidth was measured using the Occupied Bandwidth function of the spectrum analyser.

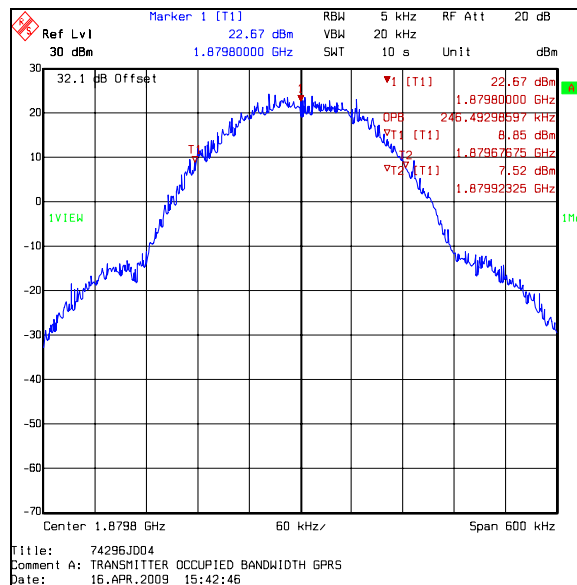

5.8. Transmitter Out of Band Radiated Emissions**Test Summary:**

FCC Part:	2.1053 & 24.238
Frequency Range:	30 MHz to 20 GHz
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Parts 2.1053 and 24.238

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	25

Results: Bottom Channel GSM Circuit Switched

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dBm)	Result
3700.405	-44.9	-13.0	31.9	Complied
5550.785	-39.6	-13.0	26.6	Complied

Results: Middle Channel GSM Circuit Switched

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dBm)	Result
3759.605	-43.5	-13.0	30.5	Complied
5639.445	-38.6	-13.0	25.6	Complied

Results: Top Channel GSM Circuit Switched

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dBm)	Result
3819.654	-43.7	-13.0	30.7	Complied
5729.494	-36.7	-13.0	23.7	Complied

Transmitter Out of Band Radiated Emissions (continued)**Results: Bottom Channel GPRS**

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dBm)	Result
3700.405	-44.9	-13.0	31.9	Complied
5550.635	-40.9	-13.0	27.9	Complied

Results: Middle Channel GPRS

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dBm)	Result
3759.605	-43.9	-13.0	30.9	Complied
5639.435	-37.7	-13.0	24.7	Complied





Results: Top Channel GPRS

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dBm)	Result
3819.654	-43.7	-13.0	30.7	Complied
5729.544	-36.5	-13.0	23.5	Complied

Note(s):



1. Pre-scans were performed with the EUT transmitting in circuit switched mode at maximum power on the top channel.
2. The transmitter fundamental is shown on the 1 GHz to 4 GHz plot at approximately 1909.8 MHz.

Transmitter Out of Band Radiated Emissions (continued)

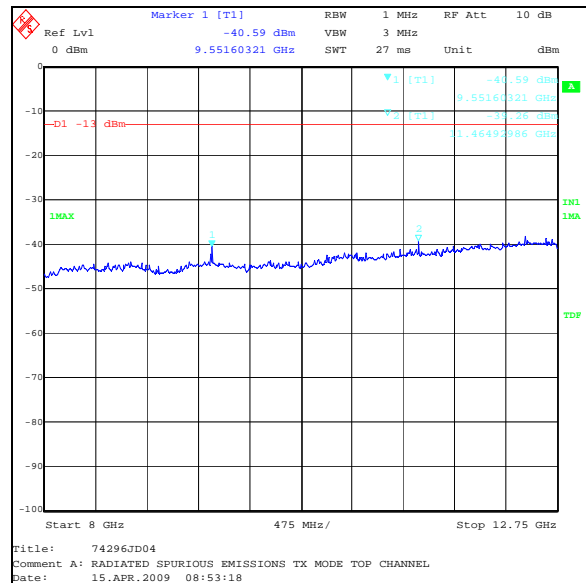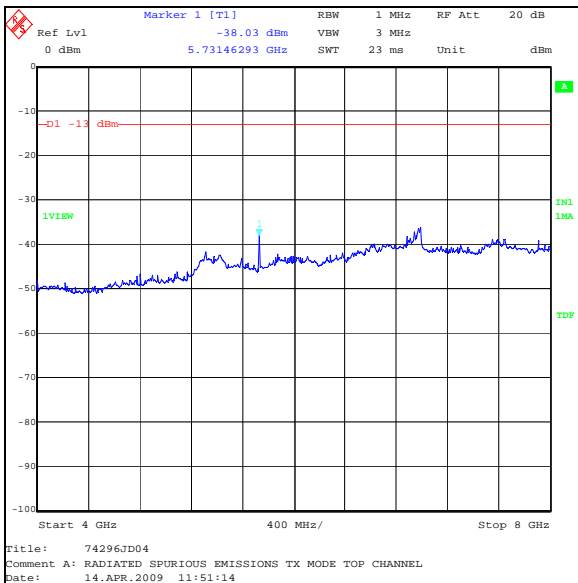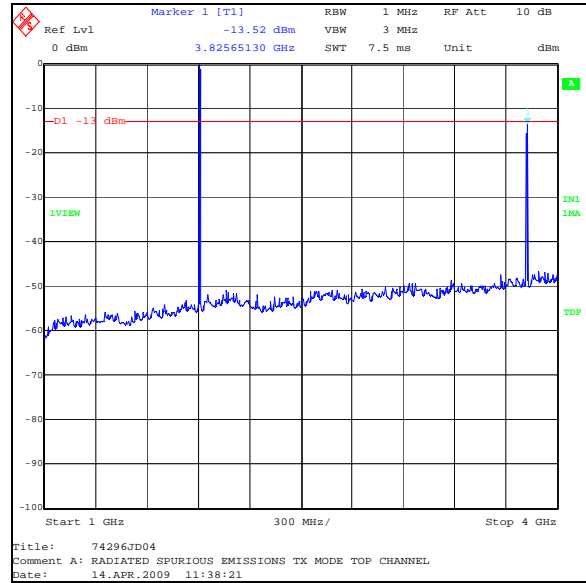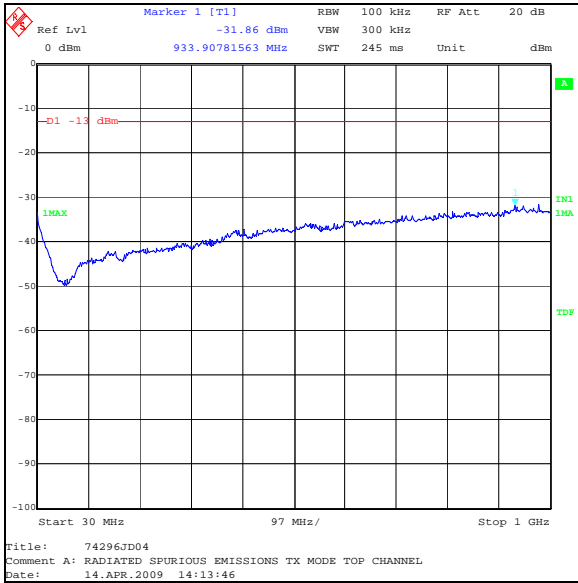

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Out of Band Radiated Emissions (continued)

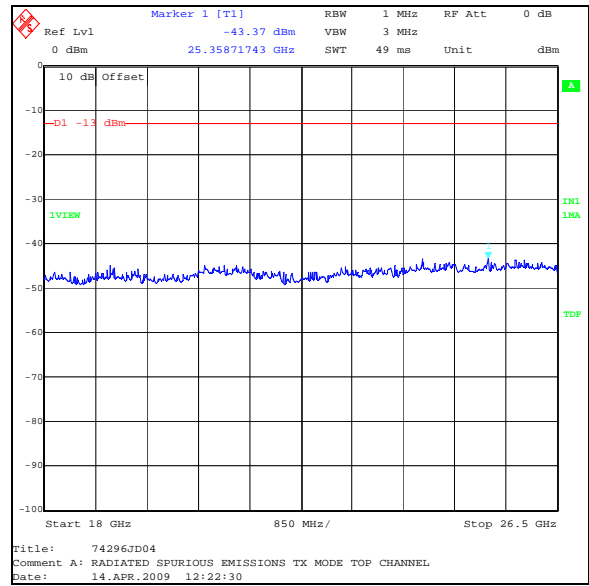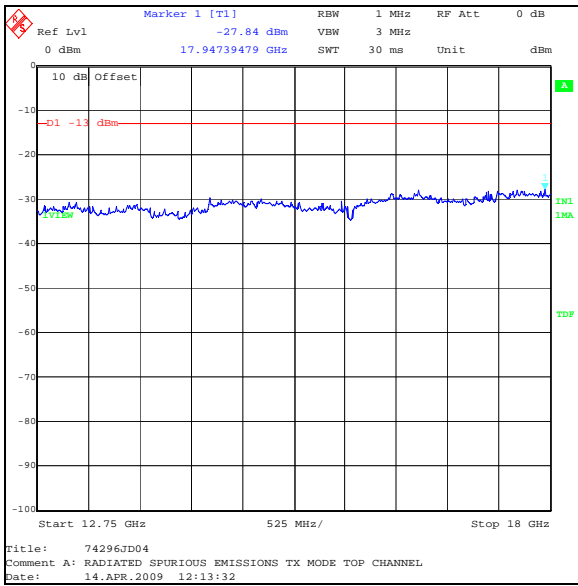

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.9. Transmitter Radiated Emissions at Band Edges

Test Summary:

FCC Part:	2.1053 & 24.238
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Parts 2.1053 and 24.238

Environmental Conditions:



Temperature (°C):	27
Relative Humidity (%):	31

Results: GSM - Bottom Band Edge

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dBm)	Result
1850	-14.2	-13.0	1.2	Complied

Results: GSM - Top Band Edge

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dBm)	Result
1910	-17.0	-13.0	4.0	Complied

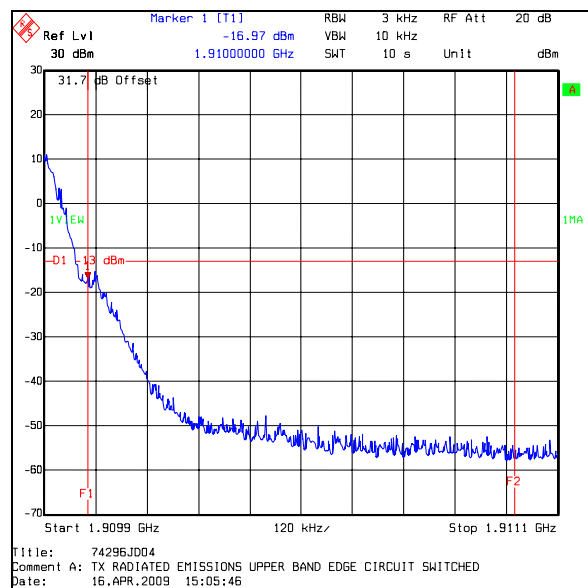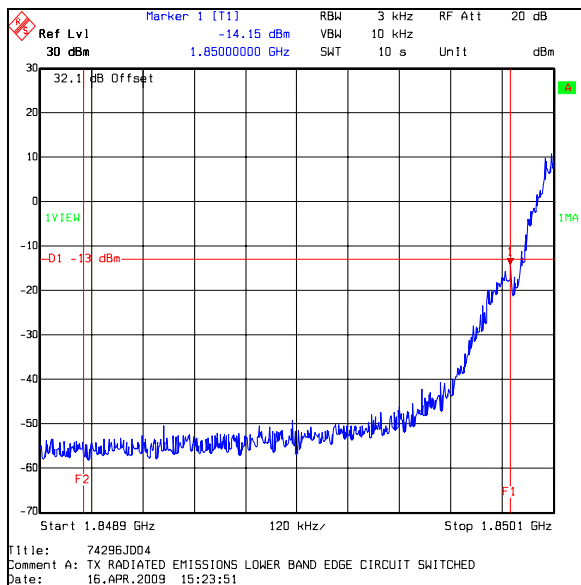

Transmitter Radiated Emissions at Band Edges (continued)

Test Summary:

FCC Part:	2.1053 & 24.238
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Parts 2.1053 and 24.238

Environmental Conditions:



Temperature Variation (°C):	27
Relative Humidity Variation (%):	31

Results: GPRS - Bottom Band Edge

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dBm)	Result
1850	-16.4	-13.0	3.4	Complied

Results: GPRS - Top Band Edge

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dBm)	Result
1910	-17.8	-13.0	4.8	Complied

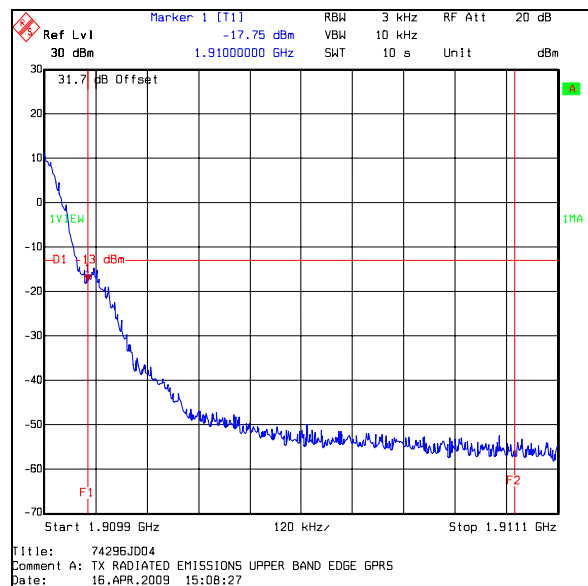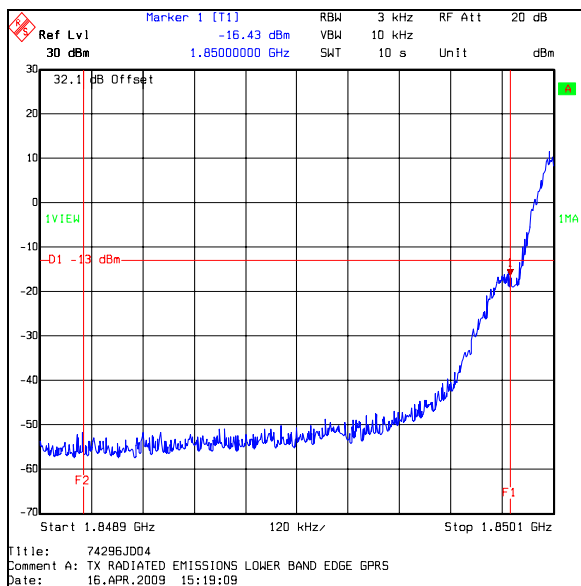

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Conducted Output Power	Not applicable	95%	±0.28 dB
Frequency Stability	Not applicable	95%	±0.92 ppm
Occupied Bandwidth	Not applicable	95%	±0.92 ppm
Radiated Spurious Emissions	30 MHz to 26 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A1299	Antenna	Schaffner	CBL6143	5094	28 Jul 2008	12
A1368	Directional Coupler	Pasternack Enterprises	PE2214-10	None	Calibrated before use	-
A1391	Attenuator	Huber + Suhner	757987	6810.17.B	Calibrated before use	-
A1392	Attenuator	Huber + Suhner	757456	6820.17.B	Calibrated before use	-
A1534	Pre Amplifier	Hewlett Packard	8449B OPT H02	3008A00405	Calibrated before use	-
A1818	Antenna	EMCO	3115	00075692	25 Oct 2008	12
A1933	High Pass Filter	AtlanTEC RF	AFH-03000	30R-JFBN07-001	14 Oct 2008	12
A244	Attenuator	Schaffner	6820-17-B	None	Calibrated before use	
A436	Antenna	Flann	20240-20	330	24 Apr 2006	36
E013	Environmental Chamber	Sanyo	ATMOS chamber	None	Calibrated before use	-
K0001	5m SA Chamber	Rainford EMC	N/A	N/A	13 Aug 2008	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	26 Aug 2008	12
L0990	Comms Test Set	R&S	CMU 200	S220447	18 Feb 2009	12
M1068	Thermometer	Iso-Tech	RS55	93102884	09 Jul 2008	12
M1124	Spectrum Analyser	Rohde & Schwarz	ESIB26	100046K	09 Mar 2009	12
M1242	Spectrum Analyser	Rohde & Schwarz	FSEM30	845986/022	09 Dec 2008	12
M1269	Multimeter	Fluke	179	90250210	09 Apr 2009	12

NB In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.