

FCC LISTED, REGISTRATION NUMBER: 905266 IC LISTED REGISTRATION NUMBER IC 4621A-1	AT4 wireless, S.A. Parque Tecnológico de Andalucía, c/ Severo Ochoa nº 2 29590 Campanillas/ Málaga/ España Tel. 952 61 91 00 - Fax 952 61 91 13 MÁLAGA, C.I.F. A29 507 456 Registro Mercantil de Málaga, Tomo 1169, Libro 82, Folio 133, Hoja MA3729
TEST REPORT REFERENCE STANDARD: USA FCC Part 22 & Part 24 CANADA IC RSS-132, RSS-133	
NIE : Approved by (name / position & signature) : Elaboration date :	35012RRF.001 A. Llamas / RF Lab. manager 2012-03-08
Identification of item tested : Trademark : Model and/or type reference : Serial number : Other identification of the product : Features : Description :	Gateway GSM/GPRS – 802.15.4 TELIT GG864-2.4 141460000281 Commercial name: GG864-2.4 HW version: Rev2 SW version: P4.01.0001_A2.00.06 FCC ID: RI7GG864 IC ID: 5131A-GG864 Gateway GSM/GPRS – 802.15.4. Frequency range 2410-2475 MHz, 12 V external power supply. Gateway GSM/GPRS – 802.15.4
Applicant : Address : CIF/NIF/Passport : Contact person: : Telephone / Fax : e-mail: :	TELIT COMMUNICATIONS SPA Loc. Sa illetta, s.s. 195 km 2.300 09122 - Cagliari - ITALY 03711600266 Gianmarco Melosu +39 0704603246 Gianmarco.melosu@telit.com
Test samples supplier :	Same as applicant
Manufacturer : Address : Contact person: Telephone / Fax :	TELIT RF TECHNOLOGIES Rue Evariste Galois – Emerald Square Bâtiment D, 06410 Sophia-Antipolis,, FRANCE Xavier TATOPOULOS (xavier.tatopoulos@telit.com) +33.(0) 497213318

Test method requested: See Standard

Standard: USA FCC Part 22 10-01-10 Edition.
 USA FCC Part 24 10-01-10 Edition.
 CANADA IC RSS-132 Issue 2, Sep. 2005.
 CANADA IC RSS-133 Issue 5, Feb. 2009.

Test procedure: 1. PERF000
 2. PERF005

Non-standardized test method: N/A

Used instrumentation

		Last Cal.	Cal. due date
1.	Semianechoic Absorber Lined Chamber IR 11. BS	N.A.	N.A.
2.	Control Chamber IR 12.BC	N.A.	N.A.
3.	Hybrid Bilog antenna Sunol Sciences Corporation JB6	2011/05	2014/05
4.	Antenna mast EM 1072 NMT	N.A.	N.A.
5.	Rotating table EM 1084-4. ON	N.A.	N.A.
6.	Double-ridge Guide Horn antenna 1-18 GHz HP 11966E	2011/05	2014/05
7.	Double-ridge Guide Horn antenna 18-40 GHz Agilent 119665J	2011/09	2014/09
8.	EMI Test Receiver R&S ESIB26	2011/11	2013/11
9.	Universal Radio communication Tester R&S CMU200	2011/05	2013/05
10.	Multi Device Controller EMCO 2090	N.A.	N.A.
11.	Spectrum Analyzer Agilent E4440A	2010/02	2012/02
12.	Power amplifier AMF-4D-00400600-50-30P	2011/04	2013/04
13.	Hybrid Bilog antenna Sunol Sciences Corporation JB6	2009/06	2012/06
14.	RF generator Agilent ESG E4438C	2010/09	2012/09
15.	Climatic chamber HERAEUS VM 07/100	2010/02	2013/02
16.	RF pre-amplifier Miteq AFS5-04001300-15-10P-6.	2010/07	2012/07
17.	RF pre-amplifier Schaffner CPA 9231.	2011/06	2013/06
18.	RF pre-amplifier Miteq JS4-12002600-30-5A.	2010/07	2012/07

Report template No.: FDT08_12

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless, S.A.

INDEX

Competences and guarantees	4
General conditions	4
Uncertainty.....	4
Usage of samples.....	4
Testing period	5
Environmental conditions	5
Summary	6
Remarks and comments	6
Testing verdicts	6
APPENDIX A: Test results for FCC parts 22 & 24	7

Competences and guarantees

AT4 wireless, S.A. is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 905266.

AT4 wireless, S.A. is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621A-1.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance programme for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Uncertainty

Uncertainty (factor k=2) was calculated according to the AT4 wireless internal document PODT000.

Usage of samples

Samples undergoing test have been selected by: **the client**.

Sample M/01 is composed of the following elements

<u>Control No.</u>	<u>Description</u>	<u>Model / Type</u>	<u>Serial No.</u>	<u>Date of reception</u>
32694/13	Equipment board	GG864-2.4	141460000281	05/04/2011
32694/04	Plastic housing	---	---	05/04/2011
32694/01	2.4 GHz antenna	---	---	05/04/2011
32694/03	GSM antenna	---	---	05/04/2011

1. Sample M/01 has undergone the following test(s) specified in subclause "Test method requested":
FCC part 22 and part 24 / IC RSS-132 Issue 2 and IC RSS-133 Issue 5 tests indicated in appendix A.

Testing period

The performed test started on 2012-01-12 and finished on. 2012-01-13

The tests have been performed at AT4 wireless.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 22.0 °C Max. = 22.5 °C
Relative humidity	Min. = 43.7 % Max. = 44.8 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

In the semianechoic chamber (21 meters x 11 meters x 8 meters), the following limits were not exceeded during the test.

Temperature	Min. = 18.6 °C Max. = 19.8 °C
Relative humidity	Min. = 40 % Max. = 45 %
Air pressure	Min. = 1018 mbar Max. = 1018 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements the following limits were not exceeded during the test:

Temperature	Min. = 23.8°C Max. = 23.1 °C
Relative humidity	Min. = 45.7 % Max. = 46.8 %
Air pressure	Min. = 1020 mbar Max. = 1020 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

Summary

Considering the results of the performed test according to standards USA FCC Part 22 and Part 24, Canada IC RSS-132 and RSS-133, the item under test is **IN COMPLIANCE** with the requested specifications specified in the standard.

NOTE: The results presented in this Test Report apply only to the particular item under test established in page 1 of this document, as presented for test on the date(s) shown in section, “USAGE OF SAMPLES, TESTING PERIOD AND ENVIRONMENTAL CONDITIONS”.

Remarks and comments

1. None.

Testing verdicts

Not applicable: NA

Pass.....: P

Fail: F

Not measured.....: NM

FCC PART 22/IC RSS-132 PARAGRAPH	VERDICT			
	NA	P	F	NM
Clause 22.913/RSS-132 Clause 4.4: RF output power		P		
Clause 2.1047/RSS-132 Clause 4.2: Modulation characteristics		P		
Clause 22.355/RSS-132 Clause 4.3: Frequency stability		P		
Clause 2.1049: Occupied Bandwidth		P		
Clause 22.917/RSS-132 Clause 4.5: Spurious emissions at antenna terminals		P		
Clause 22.917/RSS-132 Clause 4.5: Radiated emissions		P		

FCC PART 24/IC RSS-133 PARAGRAPH	VERDICT			
	NA	P	F	NM
Clause 24.232/RSS-133 Clause 6.4: RF output power		P		
Clause 2.1047/RSS-133 Clause 6.2: Modulation characteristics		P		
Clause 24.235/RSS-133 Clause 6.3: Frequency stability		P		
Clause 2.1049: Occupied Bandwidth		P		
Clause 24.238/RSS-133 Clause 6.5: Spurious emissions at antenna terminals		P		
Clause 24.238/RSS-133 Clause 6.5: Radiated emissions		P		

APPENDIX A: Test results for FCC parts 22 & 24

INDEX

TEST RESULTS FOR FCC PART 22 AND IC RSS-132	9
TEST CONDITIONS	9
RF Output Power (conducted and E.R.P.)	10
Modulation Characteristics	14
Frequency Stability	15
Occupied Bandwidth	16
Spurious emissions at antenna terminals	19
Spurious emissions at antenna terminals at Block Edges	22
Radiated emissions	24
TEST RESULTS FOR FCC PART 24 AND RSS-133	29
TEST CONDITIONS	29
RF Output Power (conducted and E.I.R.P.)	30
Modulation Characteristics	34
Frequency Stability	35
Occupied Bandwidth	36
Spurious emissions at antenna terminals	39
Spurious emissions at antenna terminals at Block Edges	42
Radiated emissions	44

TEST RESULTS FOR FCC PART 22 AND IC RSS-132

TEST CONDITIONS

Power supply (V):

$$V_{\text{nom}} = 12.0 \text{ Vdc}$$

$$V_{\text{max}} = 15.0 \text{ Vdc}$$

$$V_{\text{min}} = 5.0 \text{ Vdc}$$

The subscripts nom, min and max indicate voltage test conditions (nominal, minimum and maximum respectively, as declared by the applicant).

Type of power supply = DC Voltage from external power supply

Type of antenna = external connectable antenna

TEST FREQUENCIES:

Lowest channel (128): 824.2 MHz

Middle channel (190): 836.6 MHz

Highest channel (251): 848.8 MHz

RF Output Power (conducted and E.R.P.)

SPECIFICATION

§2.1046 and 22.913.

The Effective Radiated Power (E.R.P.) of mobile transmitter and auxiliary test transmitter must not exceed 7 Watts (38.45 dBm).

METHOD

The conducted RF output power measurements were made at the RF output terminals of the EUT using an attenuator, power splitter and spectrum analyser. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT.

For radiated measurements the EUT was placed on a 1 m high non-conductive stand inside an anechoic chamber. The measuring antenna was placed at 3 m distance and the maximum field strength was measured for the three channels. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT.

The Effective Radiated Power (E.R.P.) is obtained by using the Substitution Method according to ANSI/TIA/EIA-603-C: 2004.

RESULTS

MAXIMUM OUTPUT POWER (CONDUCTED). See plots in next pages.

Channel	Lowest	Middle	Highest
Measured maximum peak power (dBm) at antenna port	32.75	32.91	33.25
Maximum peak power (W)	1.88	1.95	2.11
Measurement uncertainty (dB)	±0.5		

MAXIMUM EFFECTIVE RADIATED POWER E.R.P. (RADIATED).

Substitution method data

Frequency (MHz) at max. reading	Max. Instrument reading (dBm)	Polarization	(1) RF Generator +power amplifier output (dBm)	(2) Cable loss (dB)	(3) Substitution antenna gain Gd (respect to $\lambda/2$ dipole) (dB)	E.R.P. (dBm) = (1) - (2) + (3)
824.20341	-14.85	Vertical	24.20	0.3	4.75	28.65
836.61503	-14.73	Vertical	24.82	0.3	4.75	29.27
848.90521	-14.43	Vertical	24.92	0.3	4.85	29.47


RBW = VBW = 1 MHz

Channel	Lowest	Middle	Highest
Measured maximum peak power E.R.P.(dBm) with antenna connected at antenna port	28.65	29.27	29.47
Maximum peak power (W)	0.73	0.84	0.88
Measurement uncertainty (dB)	± 3.8		


Verdict: PASS

PEAK OUTPUT POWER (CONDUCTED).


Lowest Channel.

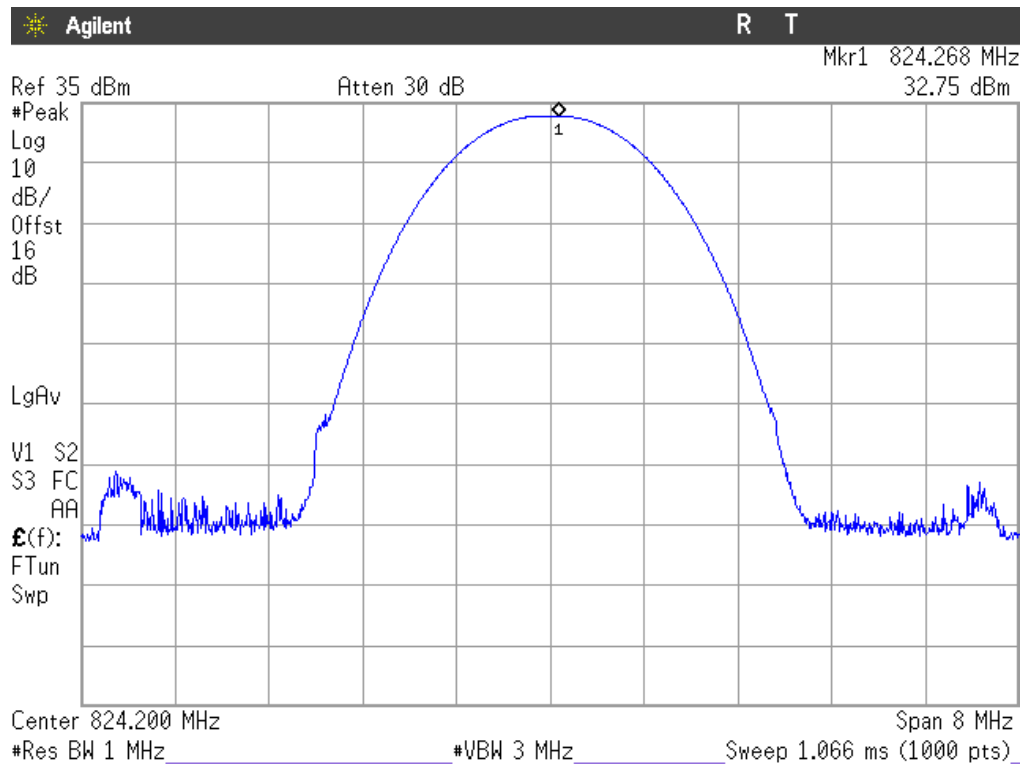

Middle Channel.

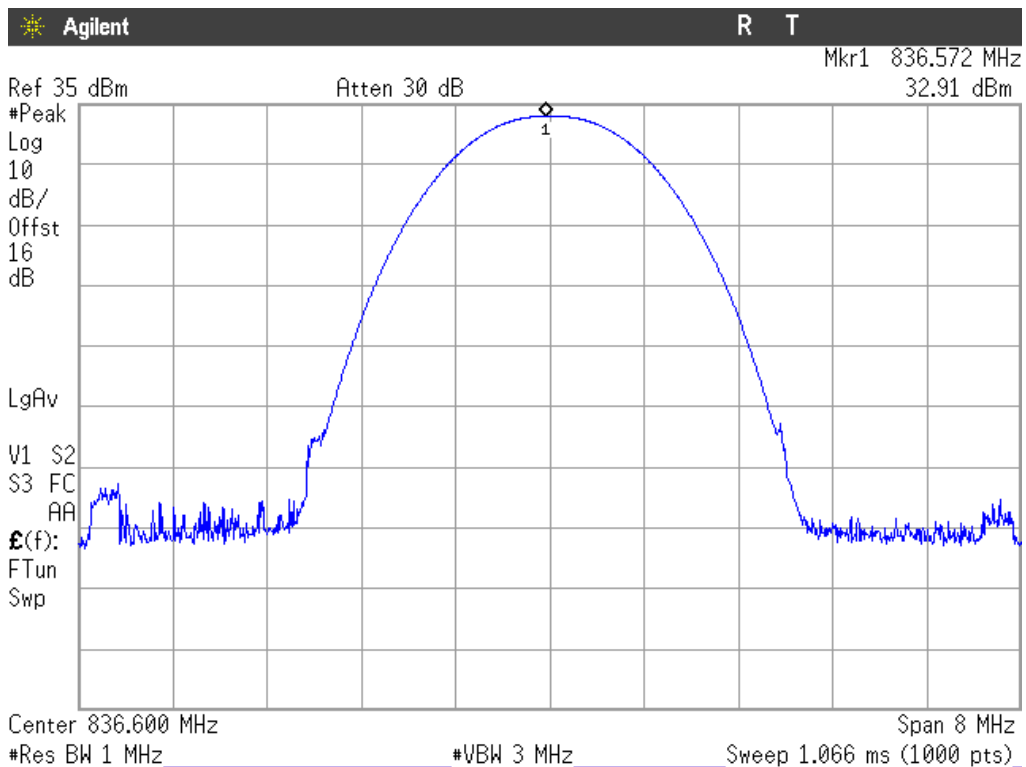

Highest Channel.

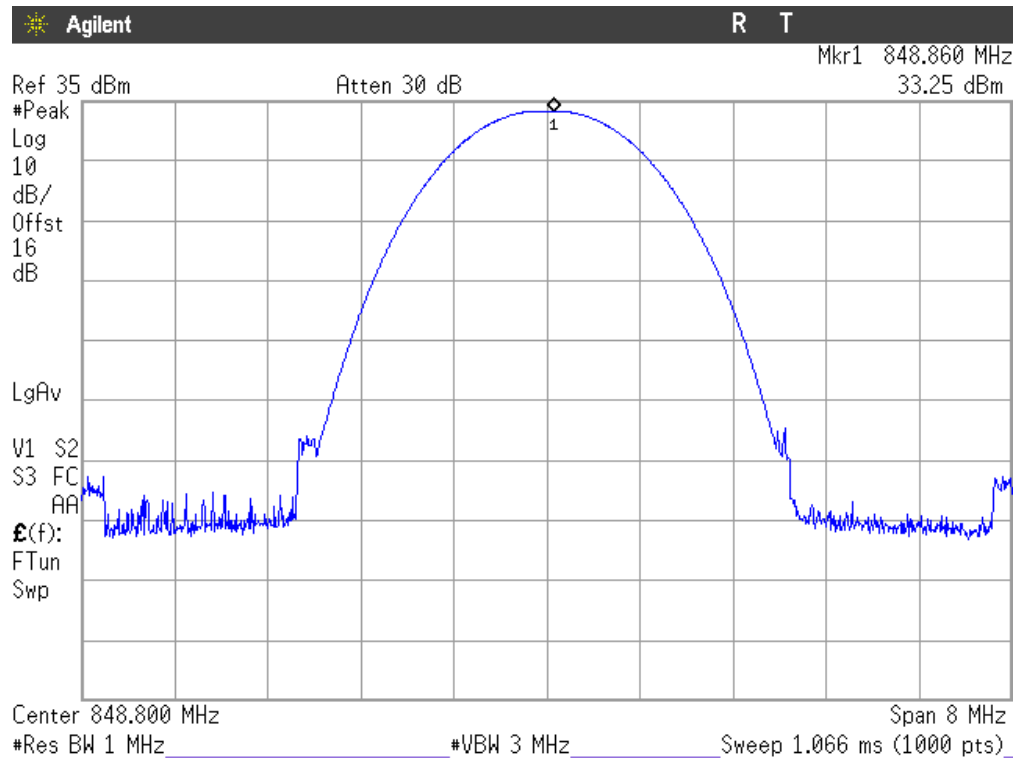

Modulation Characteristics

SPECIFICATION


§2.1047

METHOD

The EUT operates with GSM/GPRS (GMSK) modulation mode, in which the information is digitised and coded into a bit stream.

RESULTS

The following plot shows the modulation scheme in the EUT.

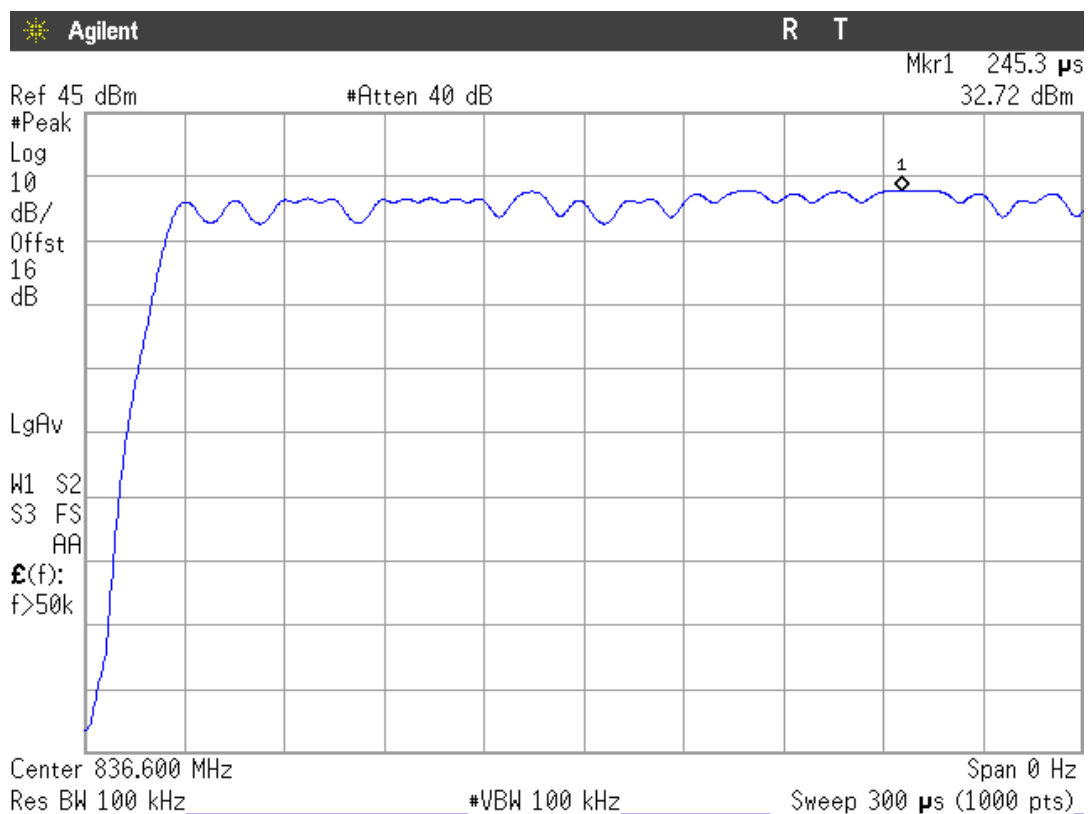

Frequency Stability

SPECIFICATION

§2.1055 and §22.355

METHOD

The frequency tolerance measurements over temperature variations were made over the temperature range of -30°C to $+50^{\circ}\text{C}$. The EUT was placed inside a climatic chamber and the temperature was raised hourly in 10°C steps from -30°C up to $+50^{\circ}\text{C}$.

The EUT was set in “call mode” in the middle channel using the Universal Radio Communication tester R&S CMU200 and the maximum frequency error was measured using the frequency meter of CMU200.

RESULTS

Frequency stability over temperature variations.

Temperature ($^{\circ}\text{C}$)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
+50	-14	-0.0167	-0.00000167
+40	-17	-0.0203	-0.00000203
+30	-15	-0.0179	-0.00000179
+20	-19	-0.0227	-0.00000227
+10	-14	-0.0167	-0.00000167
0	-28	-0.0335	-0.00000335
-10	-24	-0.0287	-0.00000287
-20	-18	-0.0215	-0.00000215
-30	-16	-0.0191	-0.00000191

Frequency stability over voltage variations.

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	15.0	-19	-0.0227	-0.00000227
Vmin	5.0	-14	-0.0167	-0.00000167

Occupied Bandwidth

SPECIFICATION

§2.1049


METHOD

The EUT was configured to transmit a modulated carrier signal. An IF bandwidth of 3 kHz was used to determine the occupied bandwidth. The 99% occupied bandwidth and the -26 dBc bandwidth were measured directly using the built-in bandwidth measuring option of spectrum analyser E4440A.


RESULTS (See plots in next pages).

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	243.75	240.82	242.14
-26 dBc bandwidth (kHz)	318.13	311.27	313.10
Measurement uncertainty (kHz)	<±1.67		


Lowest Channel

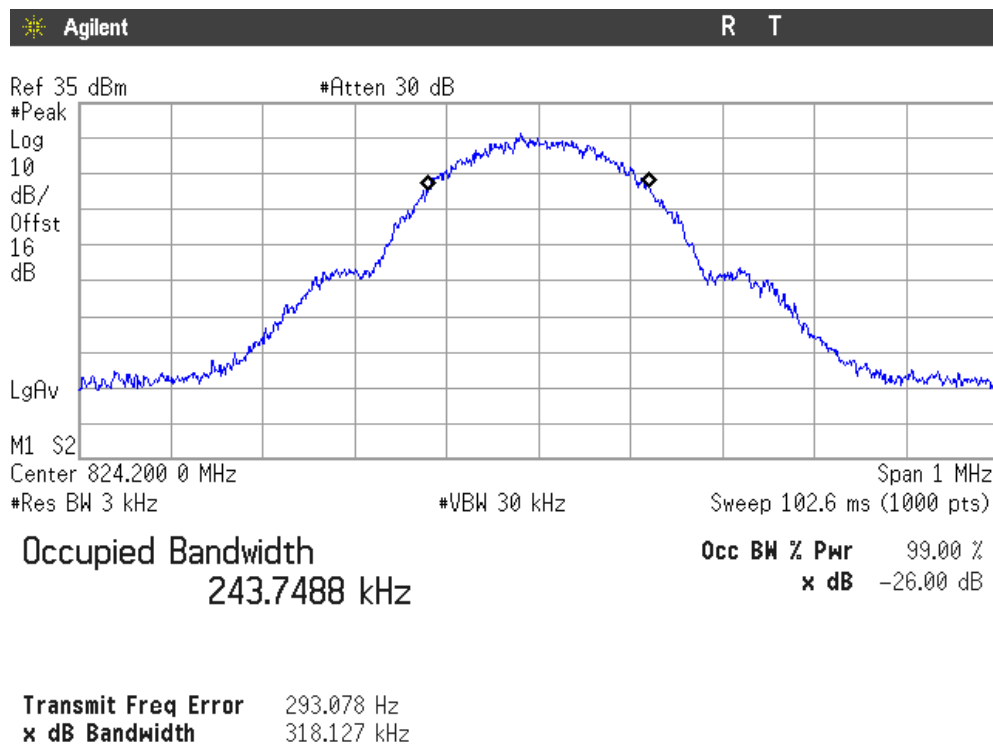

Middle Channel

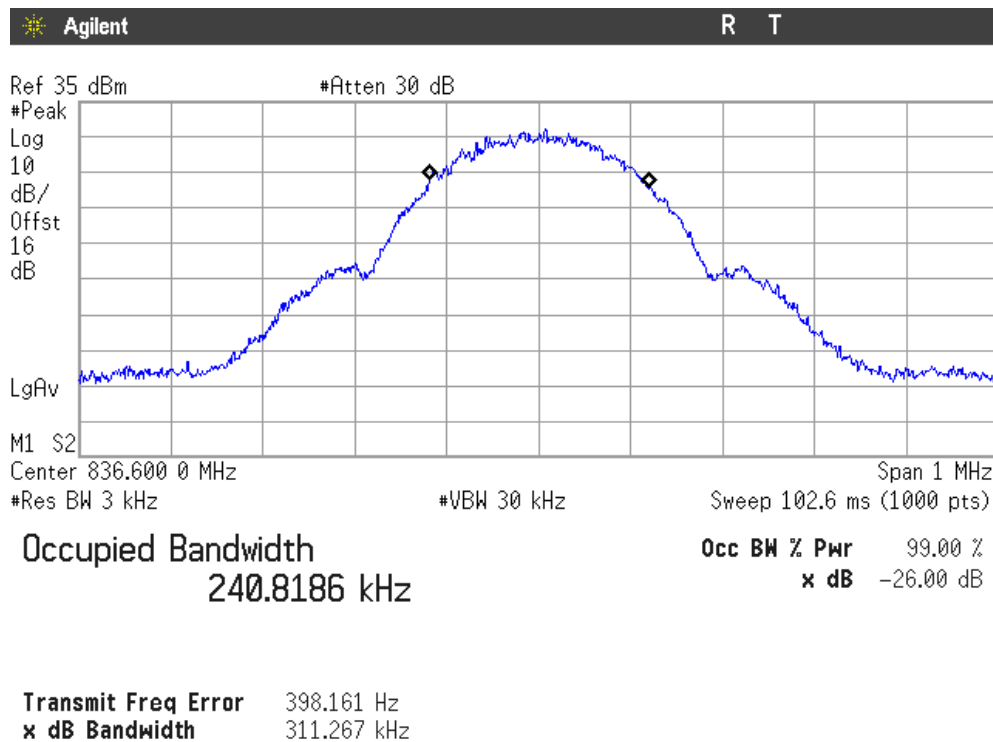

Highest Channel

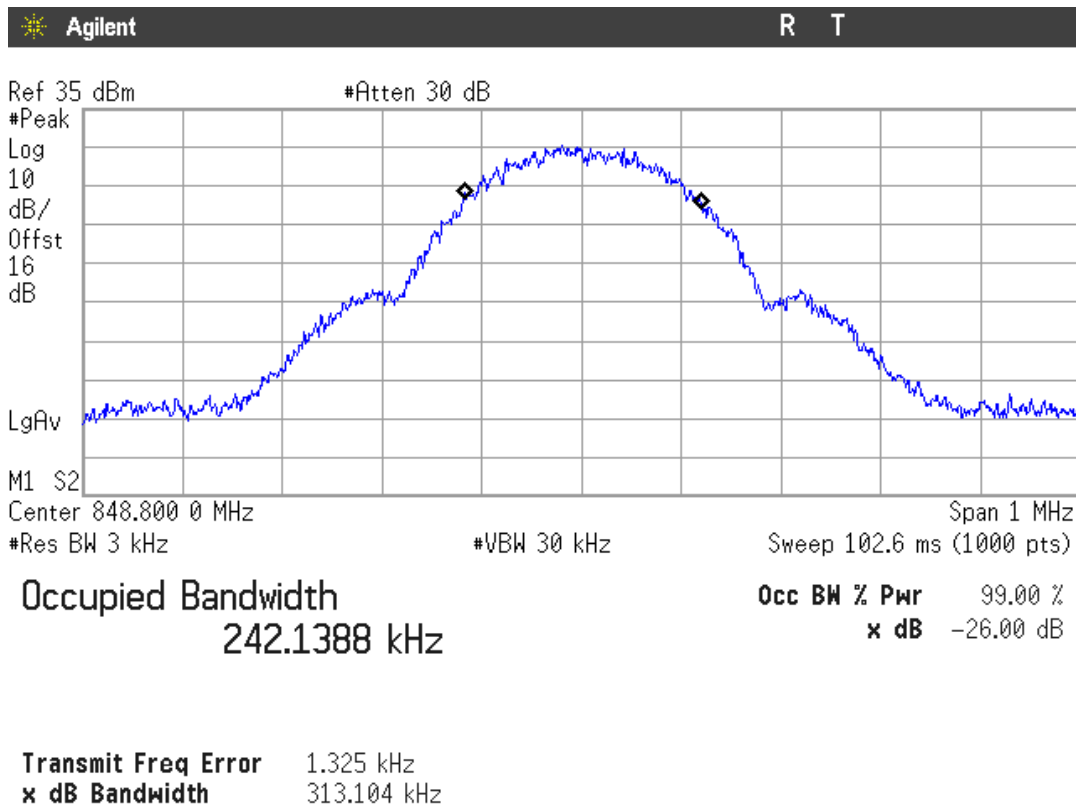

Spurious emissions at antenna terminals

SPECIFICATION

§2.1051 and §22.917

METHOD

The EUT RF output connector was connected to a spectrum analyser using a 50 ohm attenuator and the resolution bandwidth of the spectrum analyser was set to at least 100 kHz. The spectrum was investigated from 30 MHz to 10 GHz.

The reading of the spectrum analyser is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyser.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43+10\log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

RESULTS (see plots in next pages)

1. CHANNEL: LOWEST

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE


No spurious signals were found in all the range.

3. CHANNEL: HIGHEST

No spurious signals were found in all the range.


Verdict: PASS

1. CHANNEL: LOWEST

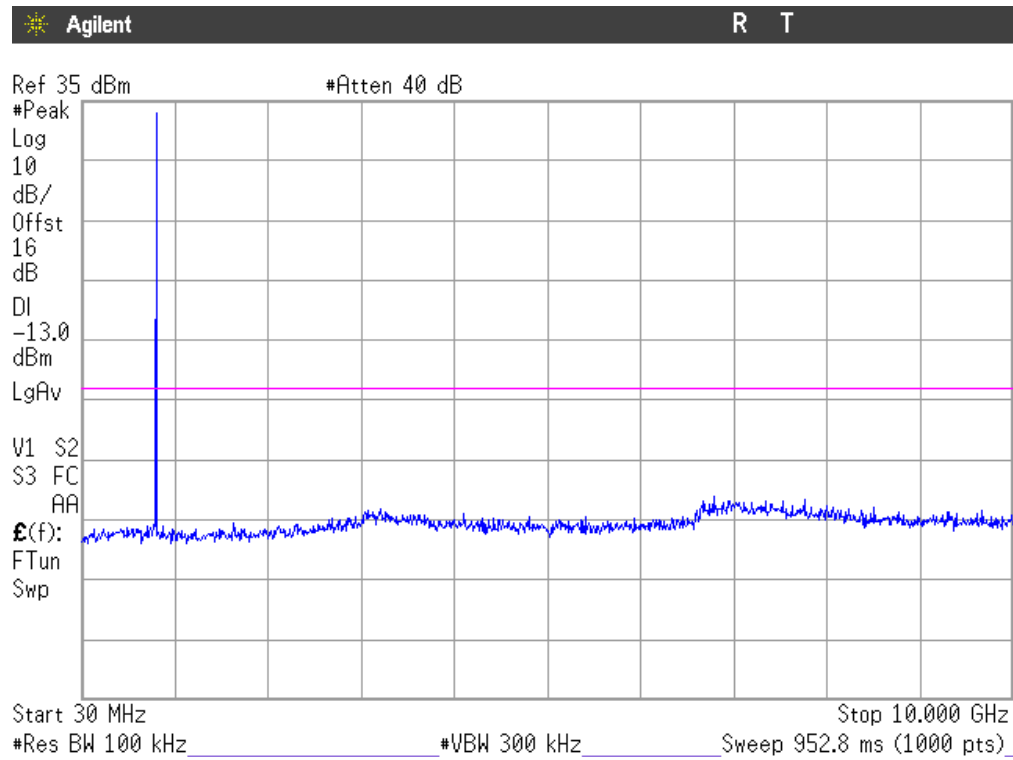


Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE

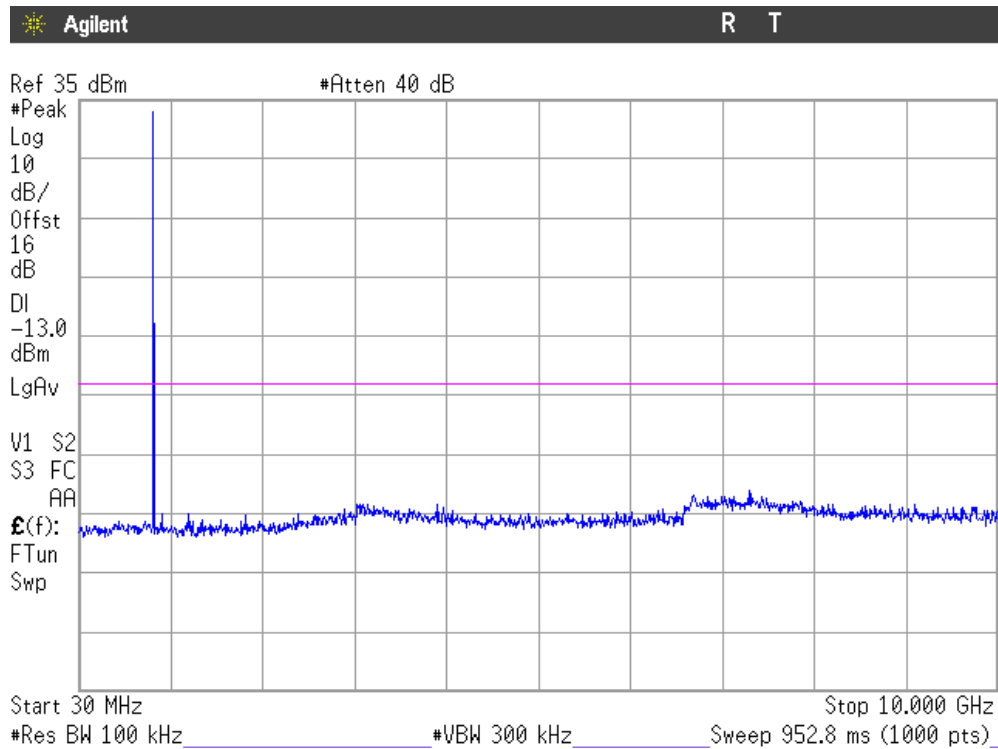

Note: The peak above the limit is the carrier frequency.

3. CHANNEL: HIGHEST

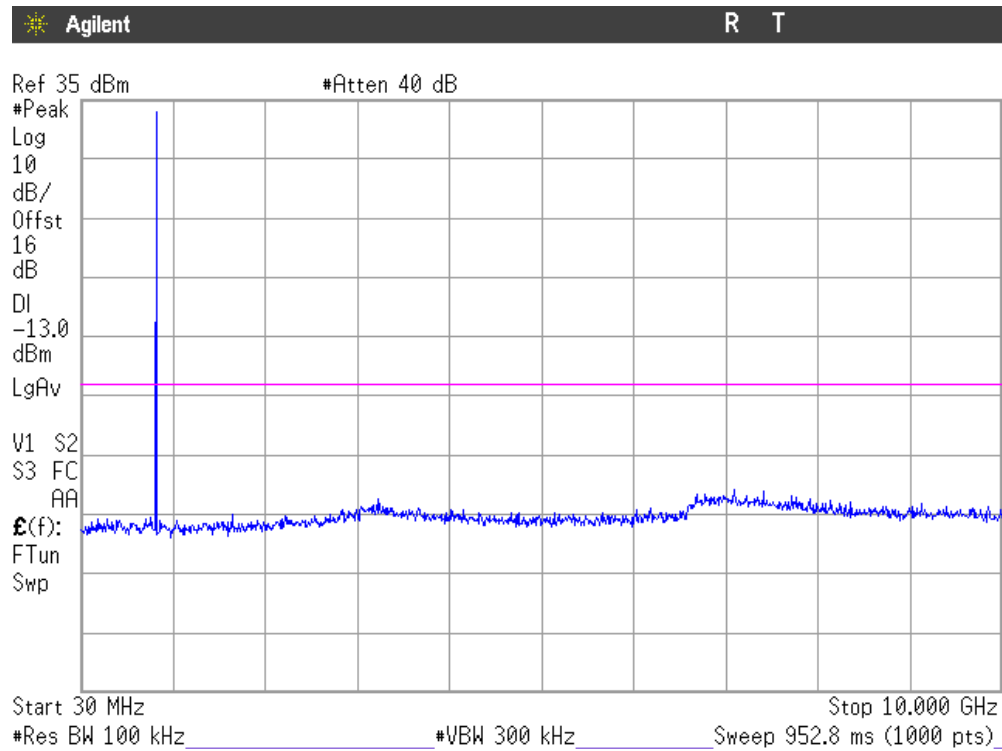

Note: The peak above the limit is the carrier frequency.

Spurious emissions at antenna terminals at Block Edges

SPECIFICATION

§2.1051 and §22.917

METHOD

As indicated in FCC part 22. in the 1 MHz bands immediately outside and adjacent to the frequency block or band a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A resolution bandwidth of 3.3 kHz was used.

Measurement Limit:

According to specification. the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power. the specified minimum attenuation becomes $43+10\log (P_o)$. and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$


RESULTS (see plots in next pages)

Maximum measured level at lowest Block Edge at antenna port (dBm)	-19.40
---	--------

Maximum measured level at highest Block Edge at antenna port (dBm)	-19.69
--	--------


Measurement uncertainty = ± 1.57 dB.

CHANNEL LOWEST

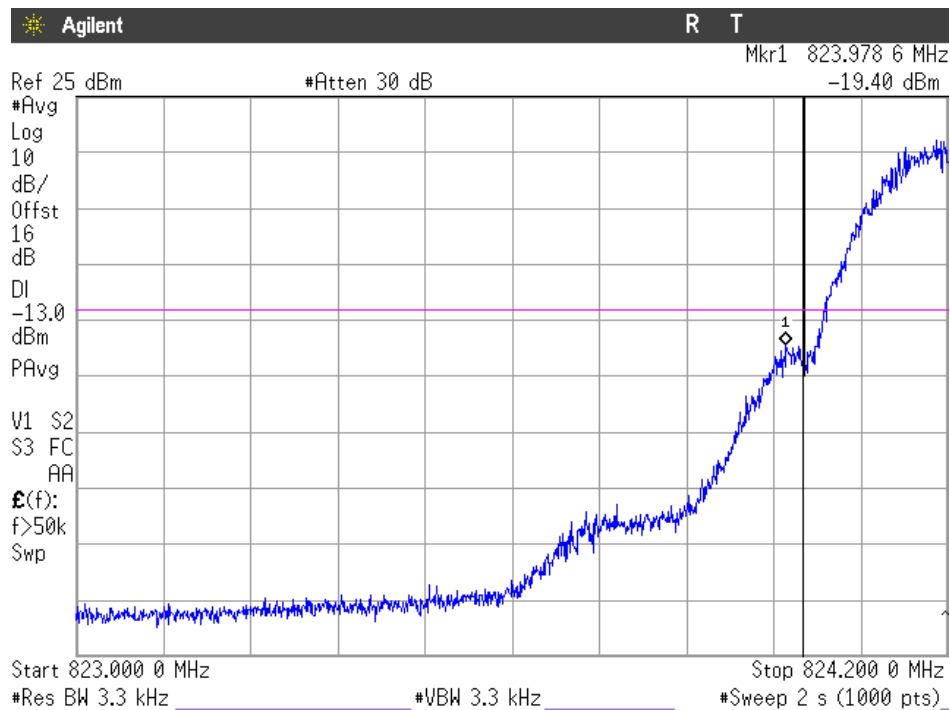

NOTE: The equipment transmits at the maximum output power

CHANNEL HIGHEST

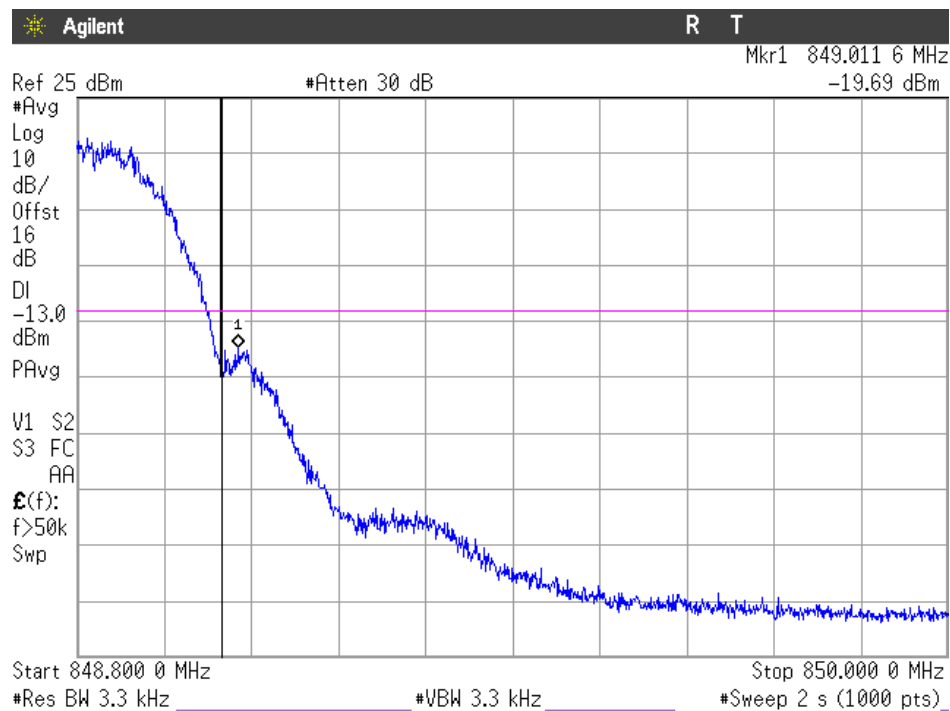

NOTE: The equipment transmits at the maximum output power

Verdict: PASS

Radiated emissions

SPECIFICATION

§ 22.917

METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 1 GHz and at 1 m distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded. The radiated emissions were measured with peak detector and 1 MHz bandwidth.

Each detected emissions were substituted by the Substitution method. in accordance with the ANSI/TIA/EIA-603-C: 2004.

Measurement Limit:

According to specification. the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power. the specified minimum attenuation becomes $43+10\log (P_o)$. and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

RESULTS

1. CHANNEL: LOWEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

No spurious signals were found in all the range.

3. CHANNEL: HIGHEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.


Frequency range 1 GHz-12.75 GHz.

No spurious signals were found in all the range.

Verdict: PASS


FREQUENCY RANGE 30 MHz-1000 MHz.

CHANNEL: LOWEST

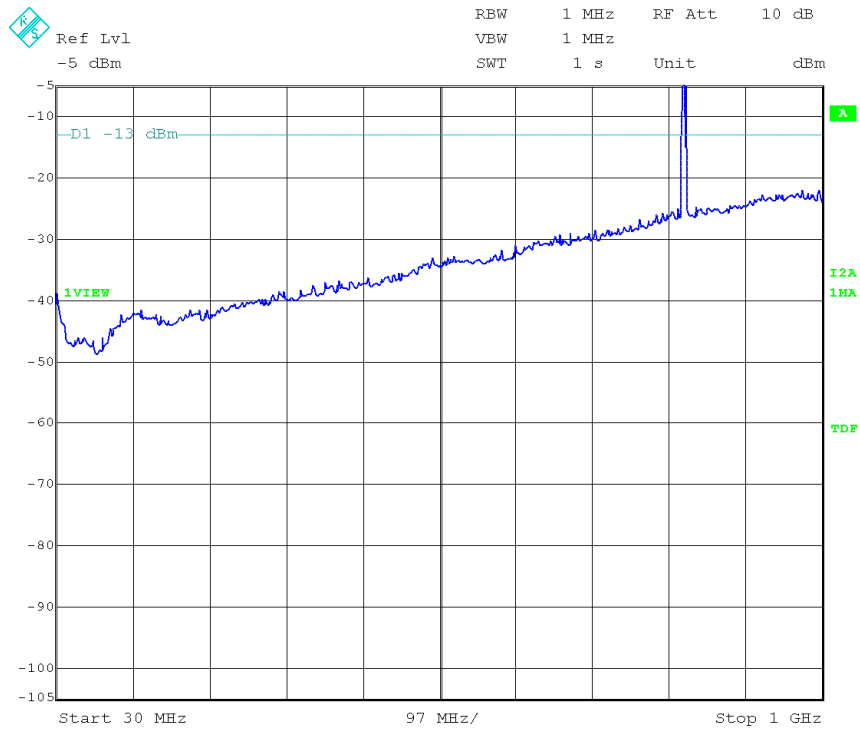


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

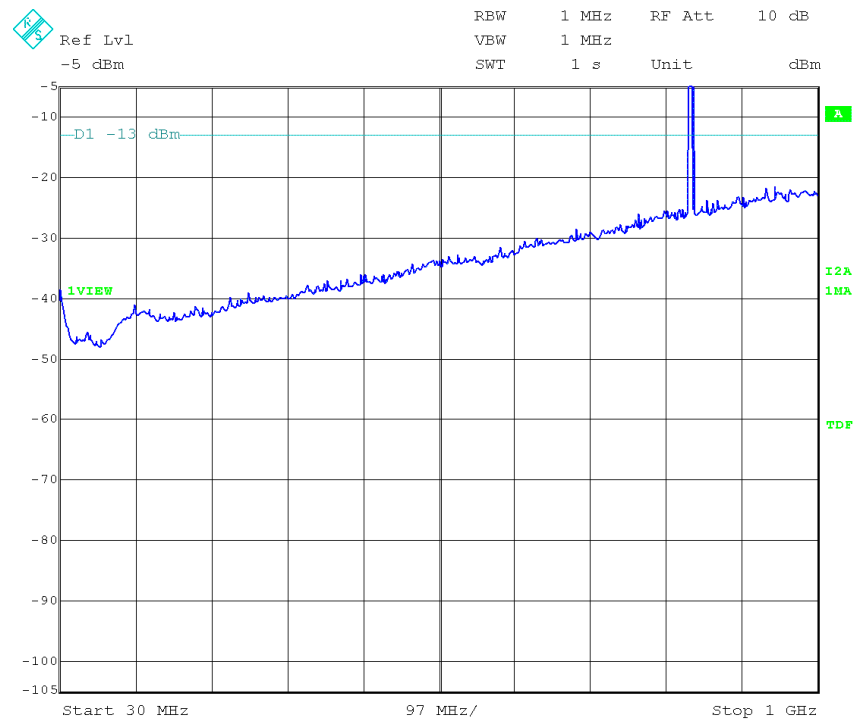


Note: The peak above the limit is the carrier frequency.

CHANNEL: HIGHEST

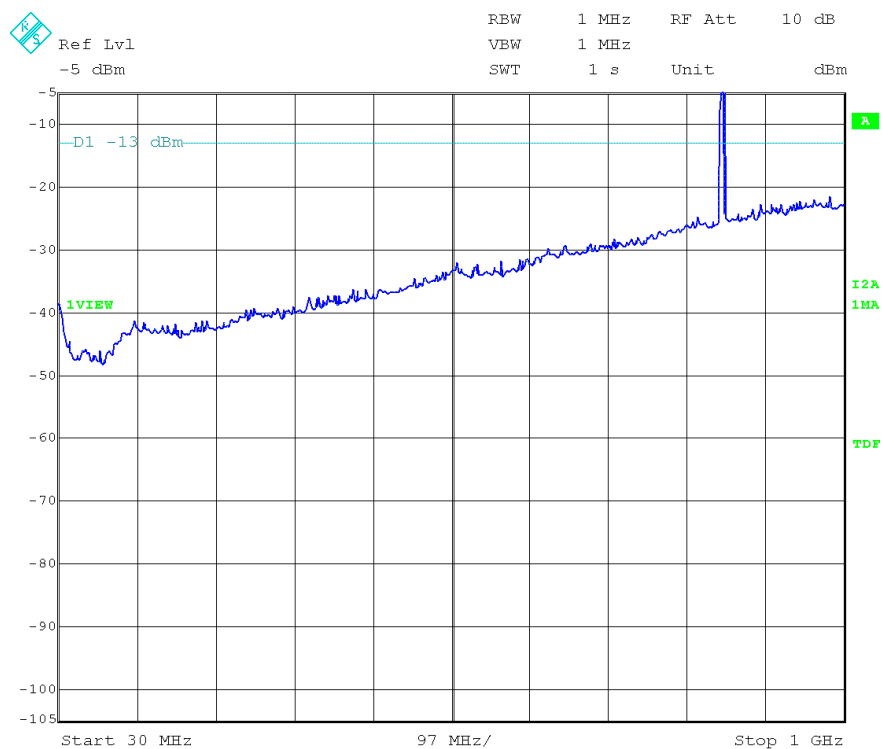


Note: The peak above the limit is the carrier frequency.

FREQUENCY RANGE 1 GHz to 3 GHz.

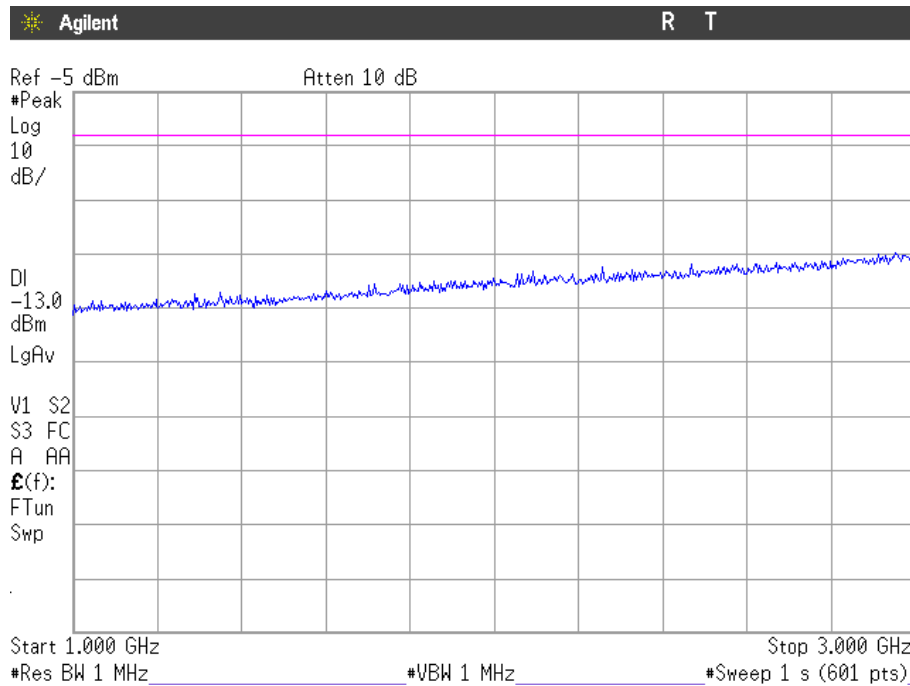

(This plot is valid for all three channels and all modulations)

FREQUENCY RANGE 3 GHz to 12.75 GHz.

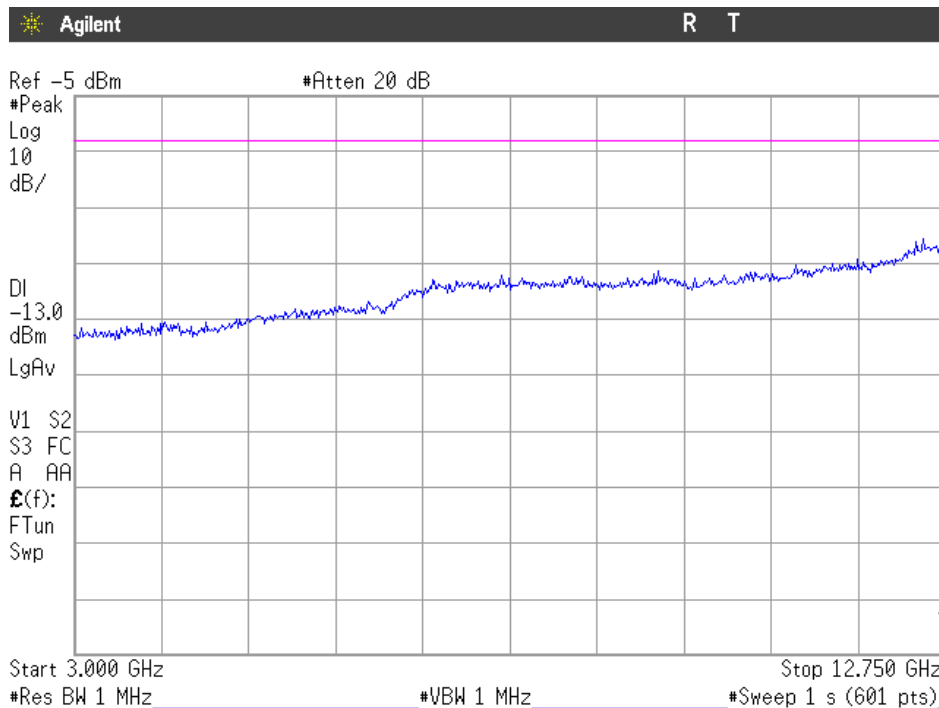

(This plot is valid for all three channels and all modulations)

TEST RESULTS FOR FCC PART 24 AND RSS-133

TEST CONDITIONS

Power supply (V):

$$V_{\text{nom}} = 12.0 \text{ Vdc}$$

$$V_{\text{max}} = 15.0 \text{ Vdc}$$

$$V_{\text{min}} = 5.0 \text{ Vdc}$$

The subscripts nom. min and max indicate voltage test conditions (nominal, minimum and maximum respectively, as declared by the applicant).

Type of power supply = DC Voltage from external power supply

Type of antenna = external connectable antenna

TEST FREQUENCIES:

Lowest channel (512): 1850.2 MHz

Middle channel (662): 1880.2 MHz

Highest channel (810): 1909.8 MHz

RF Output Power (conducted and E.I.R.P.)

SPECIFICATION

§2.1046 and 24.232

Mobile/portable stations are limited to 2 Watts (33 dBm) Effective Isotropic Radiated Power (E.I.R.P.) peak power.

METHOD

The conducted RF output power measurements were made at the RF output terminals of the EUT using an attenuator, power splitter and spectrum analyser. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT.

For radiated measurements the EUT was placed on a 1 m high non-conductive stand inside an anechoic chamber. The measuring antenna was placed at 1 m distance and the maximum field strength was measured for the three channels. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT.

The Effective Isotropic Radiated Power (E.I.R.P.) is obtained by using the Substitution Method according to ANSI/TIA/EIA-603-C: 2004.

RESULTS

MAXIMUM OUTPUT POWER (CONDUCTED). See plots in next pages.

Channel	Lowest	Middle	Highest
Measured maximum peak power (dBm) at antenna port	28.41	29.10	29.00
Maximum peak power (W)	0.69	0.81	0.79
Measurement uncertainty (dB)	±0.5		

MAXIMUM EFFECTIVE ISOTROPIC RADIATED POWER E.I.R.P. (RADIATED).

Substitution method data

Frequency (MHz) at max. reading	Max. Instrument reading (dBm)	Polarization	(1) RF Generator +power amplifier output (dBm)	(2) Cable loss (dB)	(3) Substitution antenna gain G_i (respect to isotropic radiator) (dB)	E.I.R.P. (dBm) = (1) – (2) + (3)
1850.208	-8.23	Vertical	16.17	0.5	8.6	24.27
1880.242	-8.57	Vertical	16.33	0.5	8.3	24.13
1909.817	-7.23	Vertical	18.07	0.5	8.0	25.57


RBW = VBW = 1 MHz

Channel	Lowest	Middle	Highest
Measured maximum peak power E.I.R.P. (dBm) with antenna connected at antenna port	24.27	24.13	25.57
Maximum peak power (W)	0.27	0.26	0.36
Measurement uncertainty (dB)	± 4.09		


Verdict: PASS

PEAK OUTPUT POWER (CONDUCTED).


Lowest Channel.

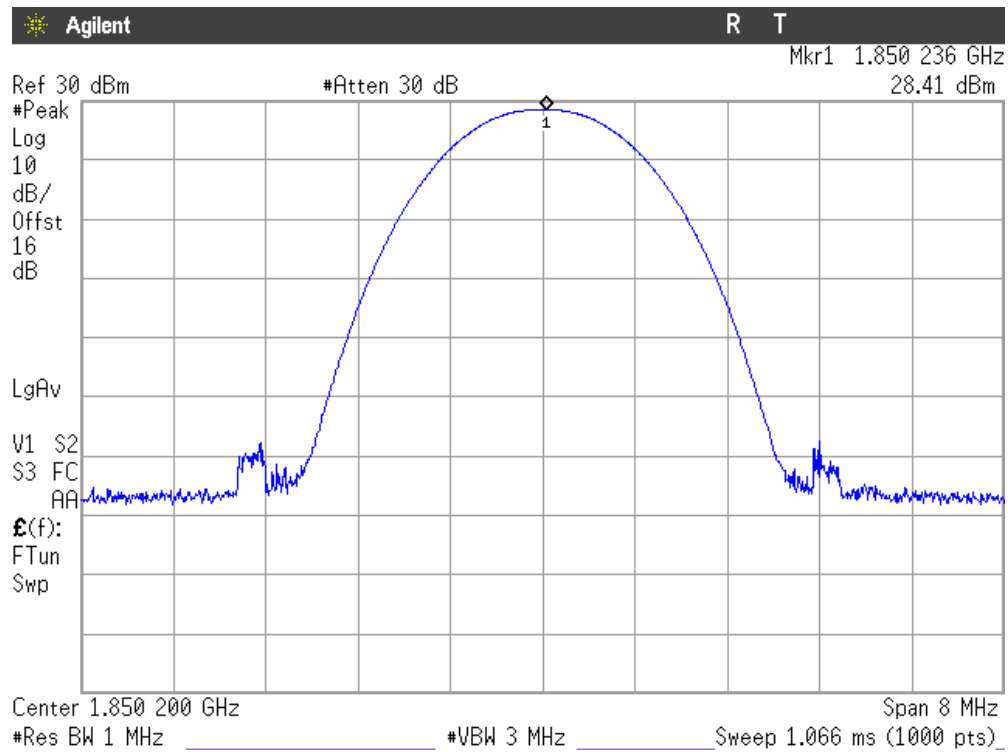

Middle Channel.

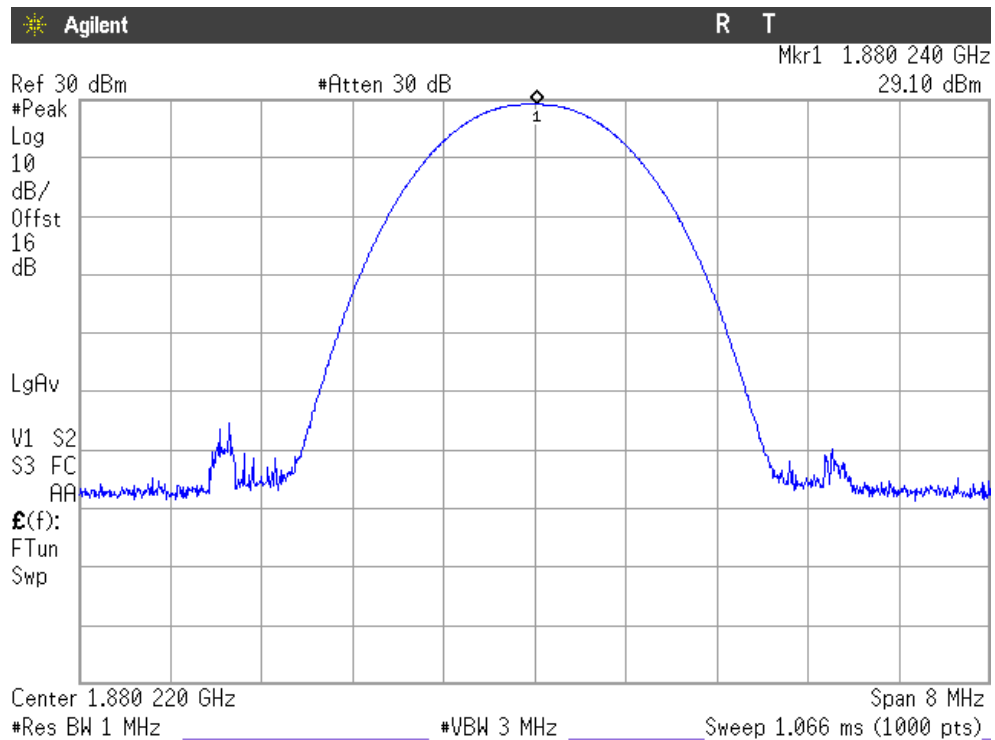

Highest Channel.

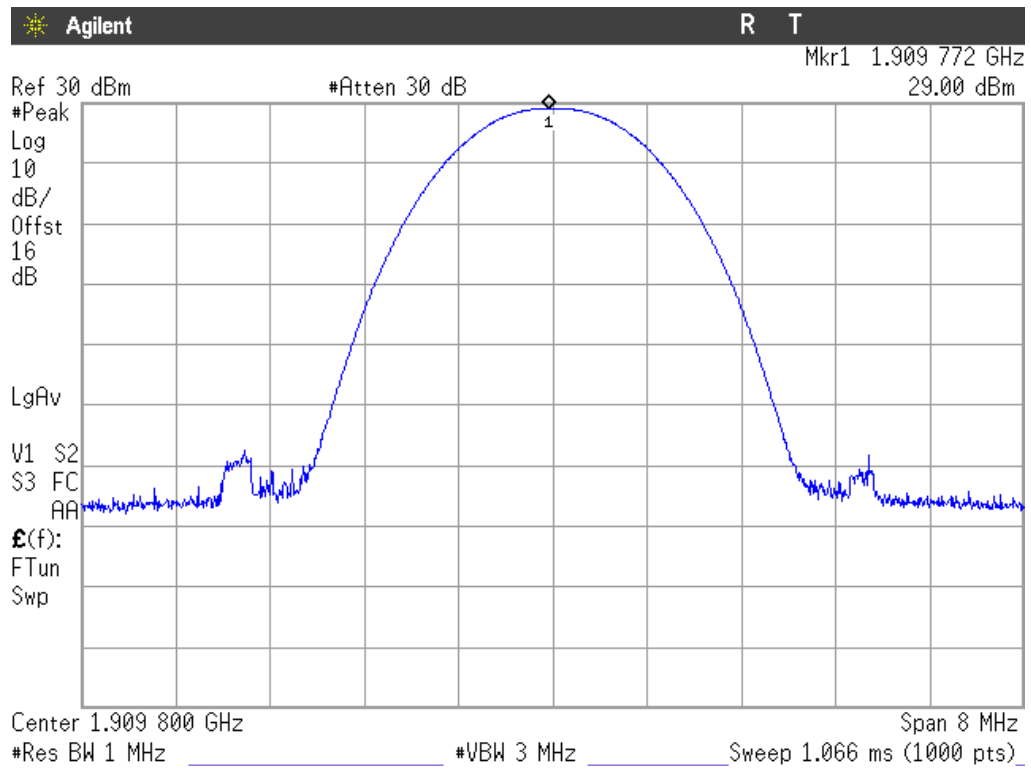

Modulation Characteristics

SPECIFICATION


§2.1047

METHOD

The EUT operates with GSM/GPRS (GMSK) modulation mode in which the information is digitised and coded into a bit stream.

RESULTS

The following plot shows the modulation schemes in the EUT.

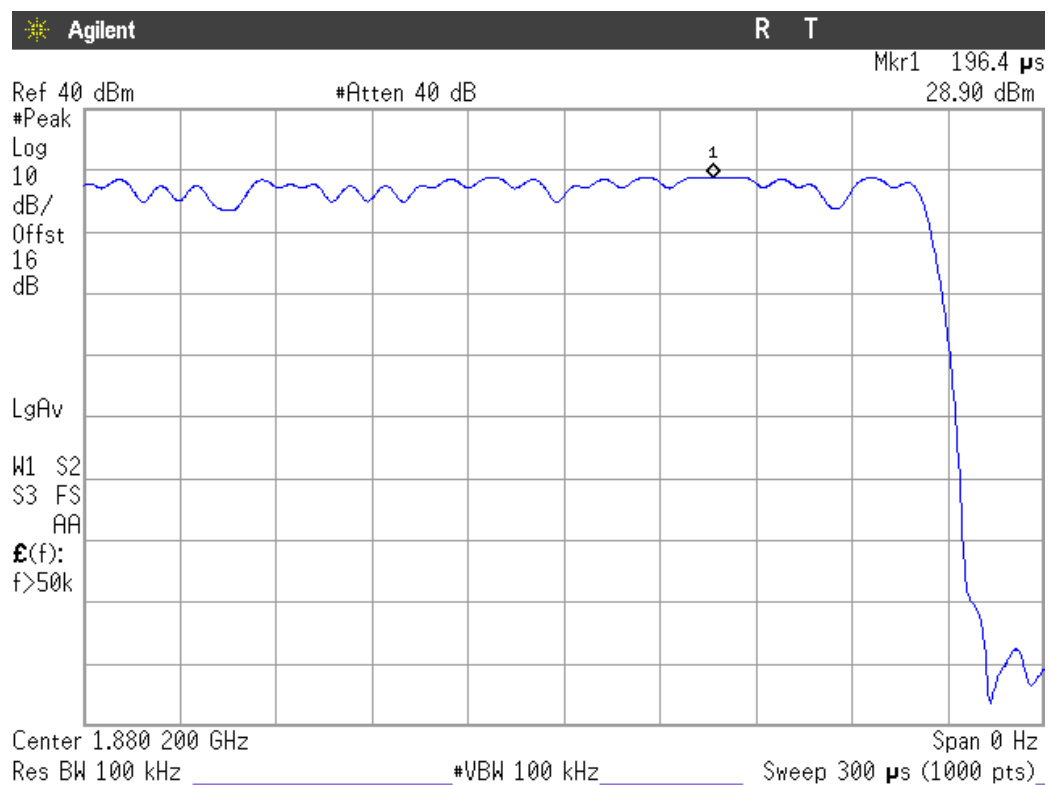

Frequency Stability

SPECIFICATION

§2.1055 and 24.235

METHOD

The frequency tolerance measurements over temperature variations were made over the temperature range of -30°C to $+50^{\circ}\text{C}$. The EUT was placed inside a climatic chamber and the temperature was raised hourly in 10°C steps from -30°C up to $+50^{\circ}\text{C}$.

The EUT was set in “call mode” in the middle channel using the Universal Radio Communication tester R&S CMU200 and the maximum frequency error was measured using the frequency meter of CMU200.

RESULTS

Frequency stability over temperature variations.

Temperature ($^{\circ}\text{C}$)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
+50	-17	-0.0203	-0.00000203
+40	-14	-0.0167	-0.00000167
+30	-18	-0.0215	-0.00000215
+20	-21	-0.0251	-0.00000251
+10	-25	-0.0299	-0.00000299
0	-8	-0.0096	-0.00000096
-10	-11	-0.0131	-0.00000131
-20	-22	-0.0263	-0.00000263
-30	-20	-0.0239	-0.00000239

Frequency stability over voltage variations.

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	15.0	-24	-0.0128	-0.00000128
Vmin	5.0	-19	-0.0101	-0.00000101

Occupied Bandwidth

SPECIFICATION

§2.1049


METHOD

The EUT was configured to transmit a modulated carrier signal. An IF bandwidth of 3 kHz was used to determine the occupied bandwidth. The 99% occupied bandwidth and the -26 dBc bandwidth were measured directly using the built-in bandwidth measuring option of spectrum analyser E4440A.


RESULTS

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	242.20	242.28	242.34
-26 dBc bandwidth (kHz)	318.37	315.40	315.11
Measurement uncertainty (kHz)	<±1.67		


Lowest Channel

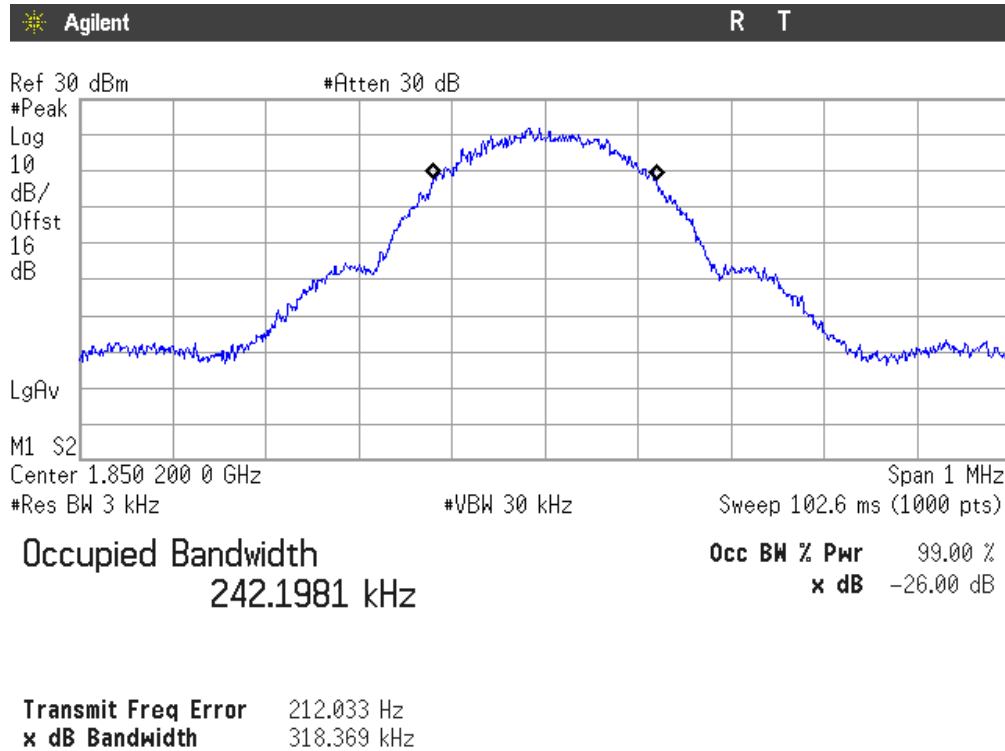

Middle Channel

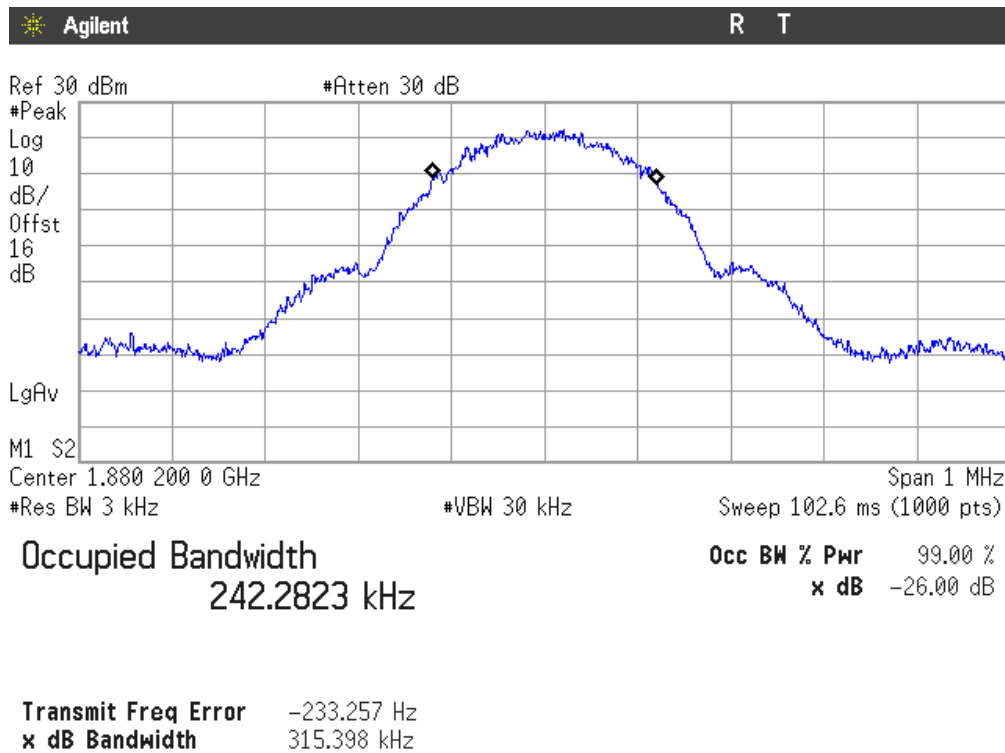

Highest Channel

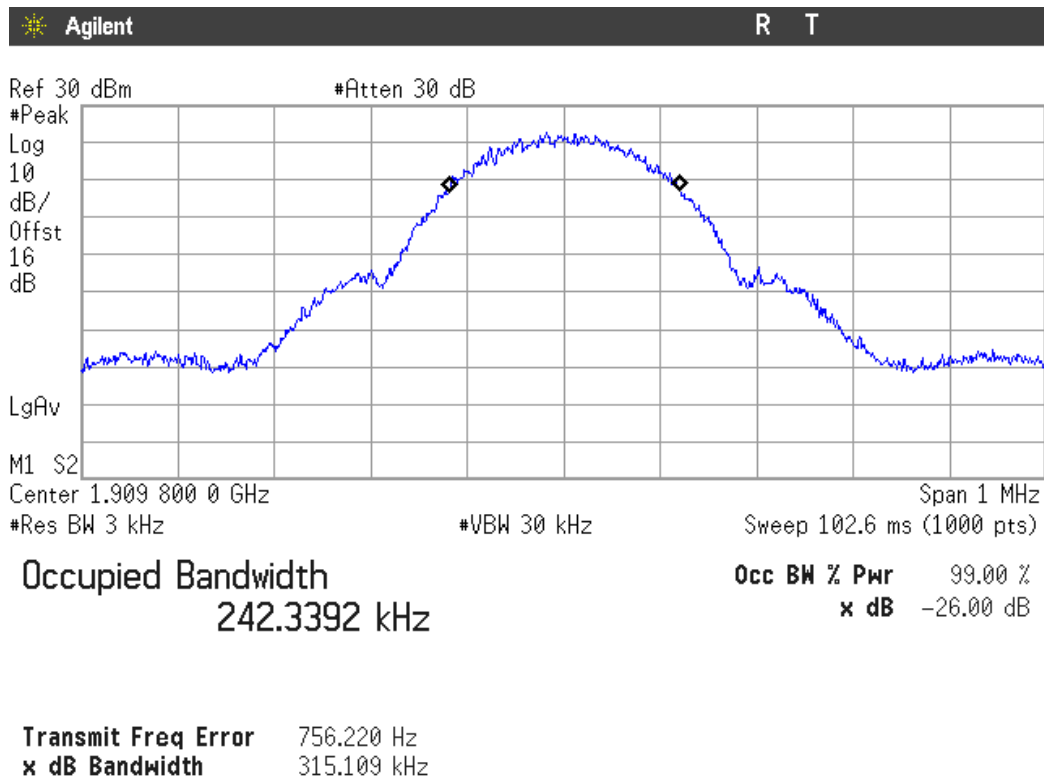

Spurious emissions at antenna terminals

SPECIFICATION

§2.1051 and §24.238

METHOD

The EUT RF output connector was connected to a spectrum analyser using an 50 ohm attenuator and the resolution bandwidth of the spectrum analyser was set to 1 MHz. The spectrum was investigated from 30 MHz to 20 GHz.

The reading of the spectrum analyser is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyser.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43+10\log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

RESULTS (see plots in next pages)

1. CHANNEL: LOWEST

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE


No spurious signals were found in all the range.

3. CHANNEL: HIGHEST

No spurious signals were found in all the range.


Verdict: PASS

1. CHANNEL: LOWEST

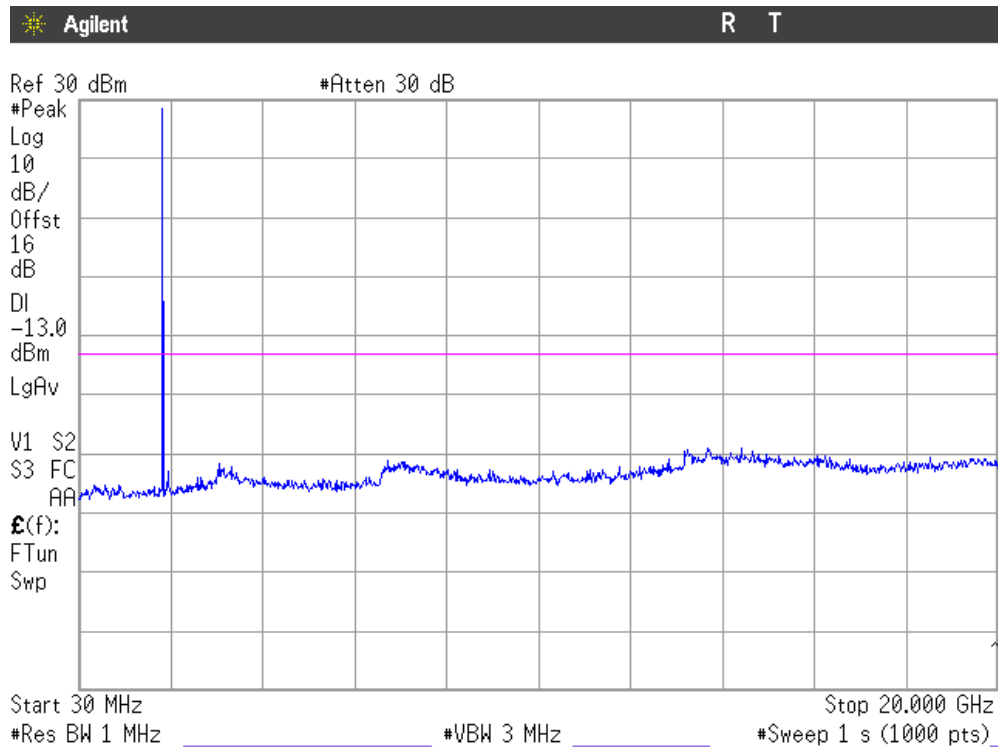


Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE

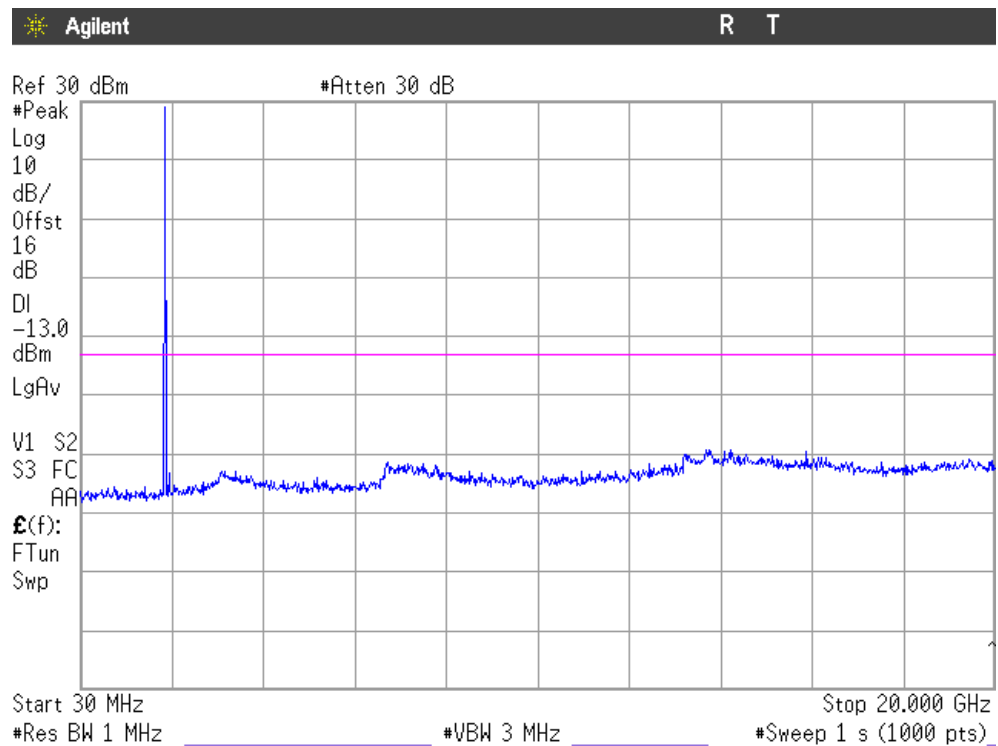

Note: The peak above the limit is the carrier frequency.

3. CHANNEL: HIGHEST

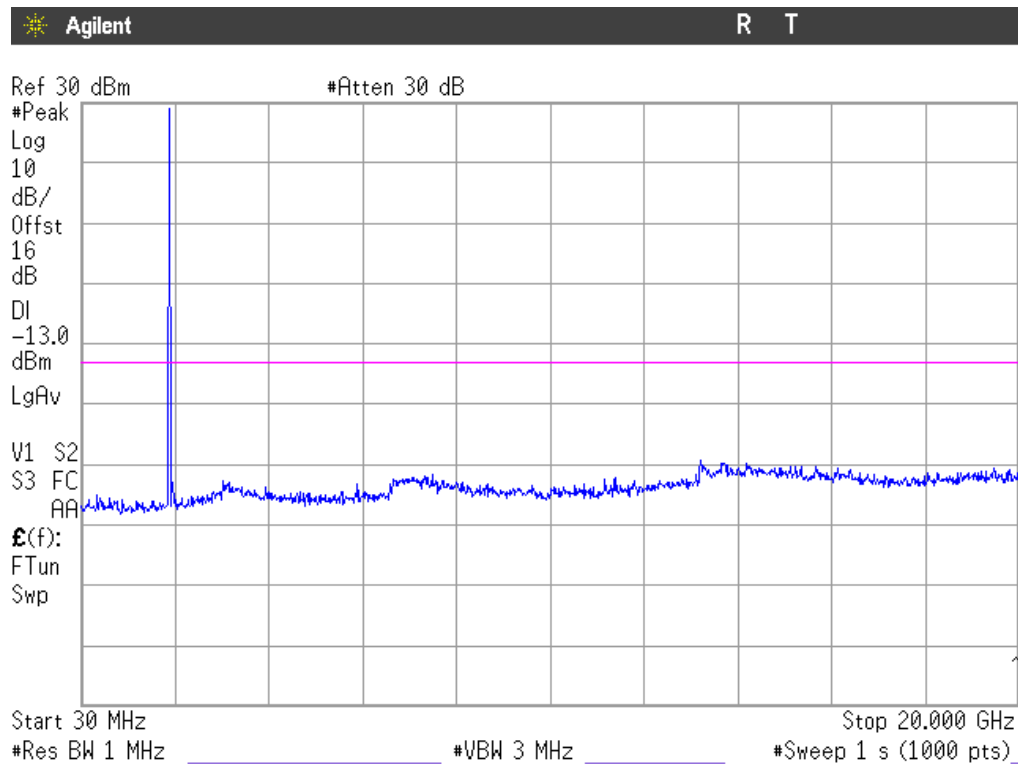

Note: The peak above the limit is the carrier frequency.

Spurious emissions at antenna terminals at Block Edges

SPECIFICATION

§2.1051 and §24.238

METHOD

As indicated in FCC part 24 in the 1 MHz bands immediately outside and adjacent to the frequency block or band a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A resolution bandwidth of 3.3 kHz was used.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43+10\log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$


RESULTS (see plots in next pages)

Maximum measured level at lowest Block Edge at antenna port (dBm)	-22.78
---	--------

Maximum measured level at highest Block Edge at antenna port (dBm)	-24.06
--	--------


Measurement uncertainty = ± 1.57 dB.

CHANNEL LOWEST

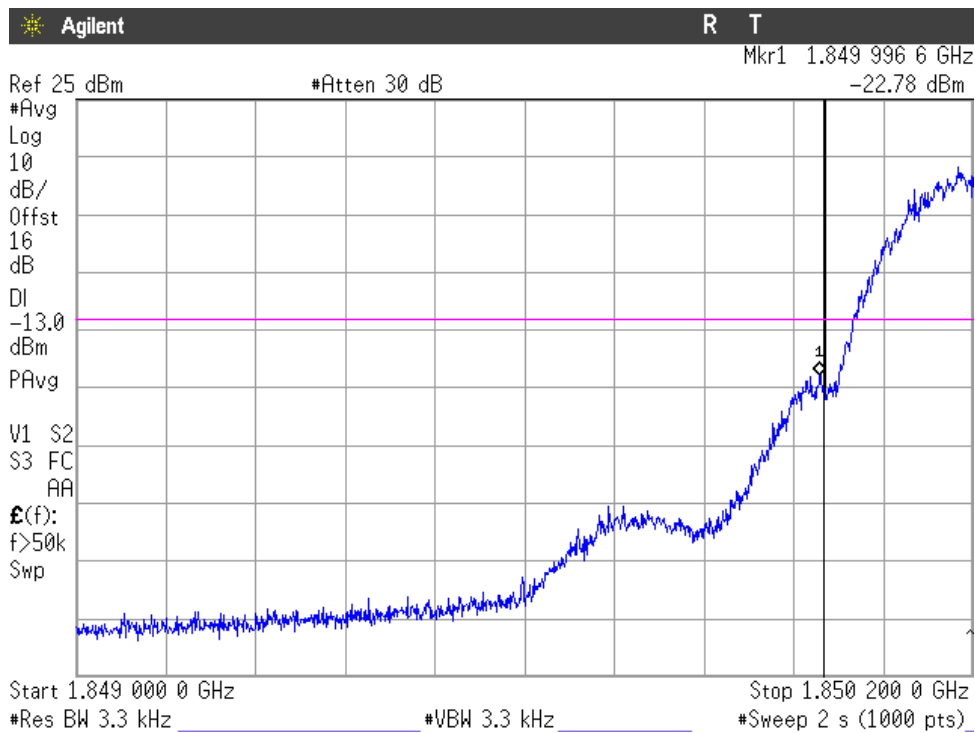

NOTE: The equipment transmits at the maximum output power

CHANNEL HIGHEST

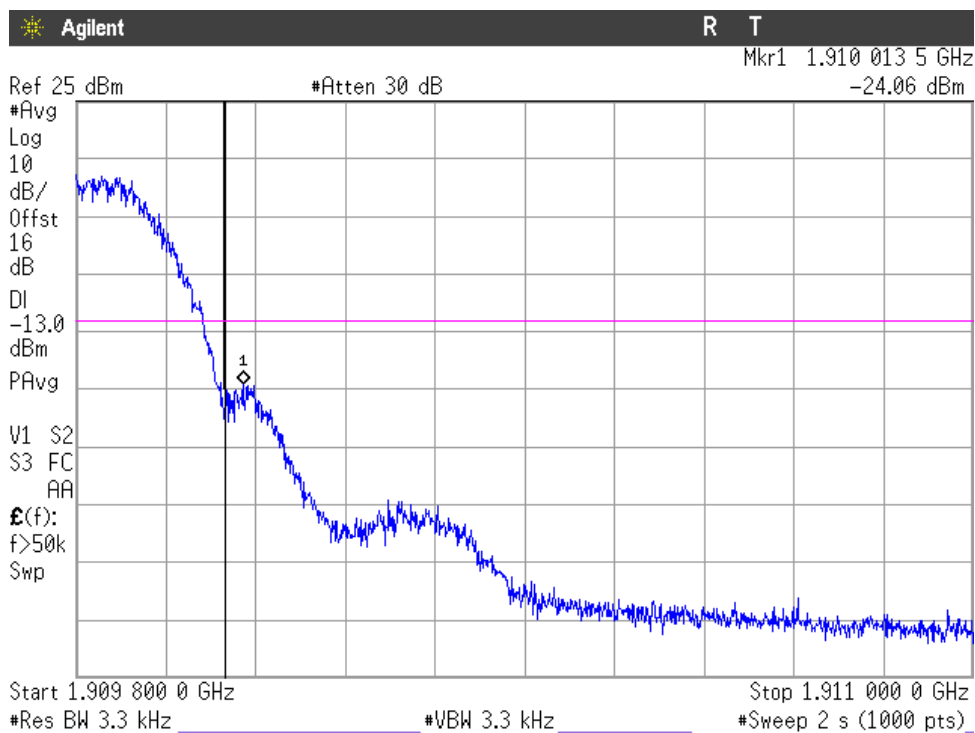

NOTE: The equipment transmits at the maximum output power

Verdict: PASS

Radiated emissions

SPECIFICATION

§ 24.238

METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 1 GHz and at 1 m distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded. The radiated emissions were measured with peak detector and 1 MHz bandwidth.

Each detected emissions were substituted by the Substitution method. in accordance with the ANSI/TIA/EIA-603-C: 2004.

Measurement Limit:

According to specification. the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power. the specified minimum attenuation becomes $43+10\log (P_o)$. and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

RESULTS

1. CHANNEL: LOWEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.

Substitution method data

Frequency (MHz)	Instrument reading (dBm)	Polarization	(1) Generator output (dBm)	(2) Cable loss (dB)	(3) Substitution antenna gain G_i (respect to isotropic radiator) (dB)	E.I.R.P. (dBm) = (1) - (2) + (3)
3700.250	-49.25	Vertical	-44.35	2.60	10.2	-36.75

2. CHANNEL: MIDDLE

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.

Substitution method data

Frequency (MHz)	Instrument reading (dBm)	Polarization	(1) Generator output (dBm)	(2) Cable loss (dB)	(3) Substitution antenna gain G_i (respect to isotropic radiator) (dB)	E.I.R.P. (dBm) = (1) - (2) + (3)
3760.558	-48.57	Vertical	-43.67	2.60	10.2	-36.07

3. CHANNEL: HIGHEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.


Substitution method data

Frequency (MHz)	Instrument reading (dBm)	Polarization	(1) Generator output (dBm)	(2) Cable loss (dB)	(3) Substitution antenna gain G_i (respect to isotropic radiator) (dB)	E.I.R.P. (dBm) = (1) - (2) + (3)
3819.517	-49.97	Vertical	-45.07	2.60	10.2	-37.47

Verdict: PASS


FREQUENCY RANGE 1 GHz to 3 GHz.

CHANNEL: LOWEST

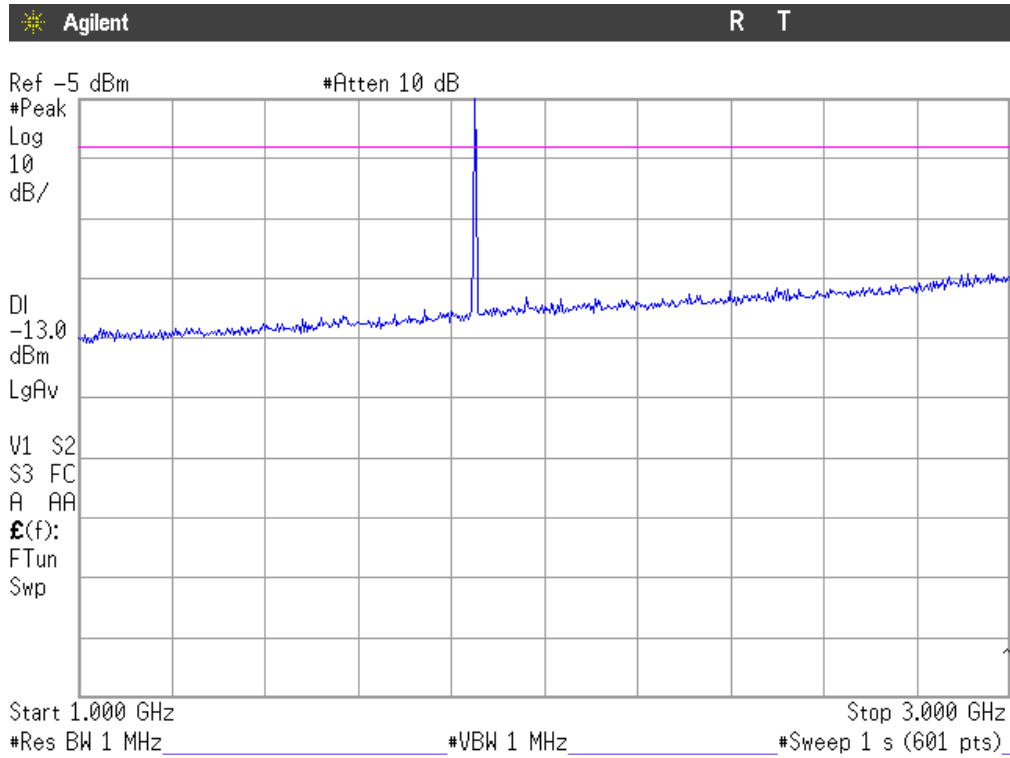


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

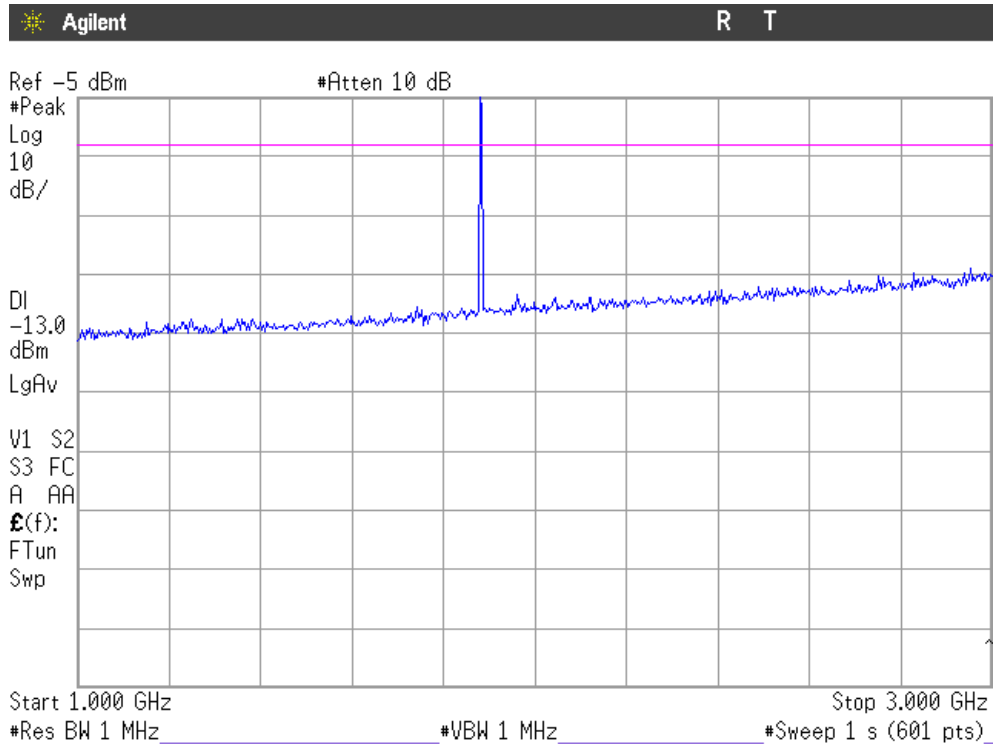

Note: The peak above the limit is the carrier frequency.


CHANNEL: HIGHEST

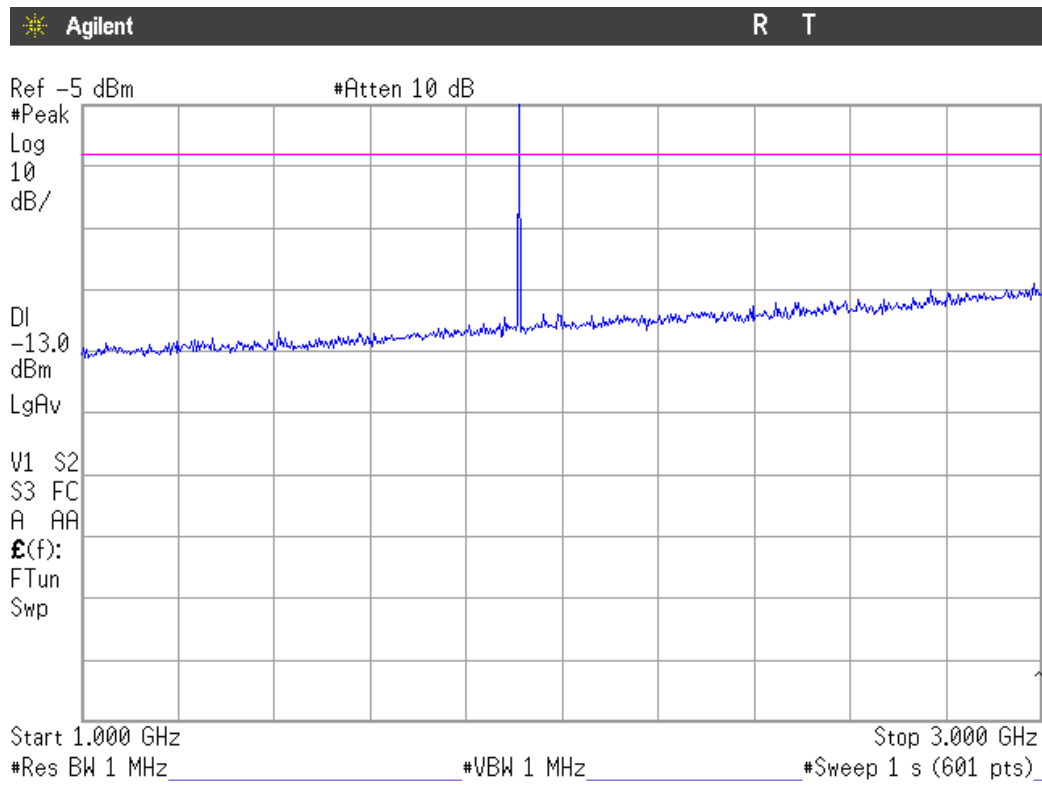


Note: The peak above the limit is the carrier frequency.

FREQUENCY RANGE 3 GHz to 12.75 GHz.


CHANNEL: LOWEST

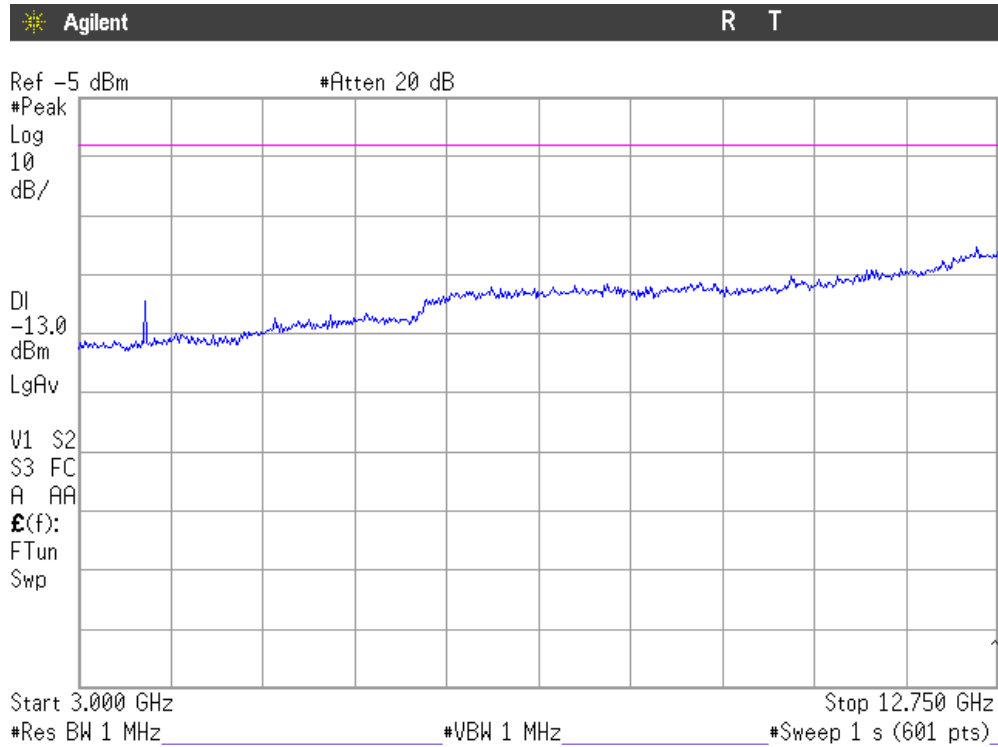


CHANNEL: MIDDLE

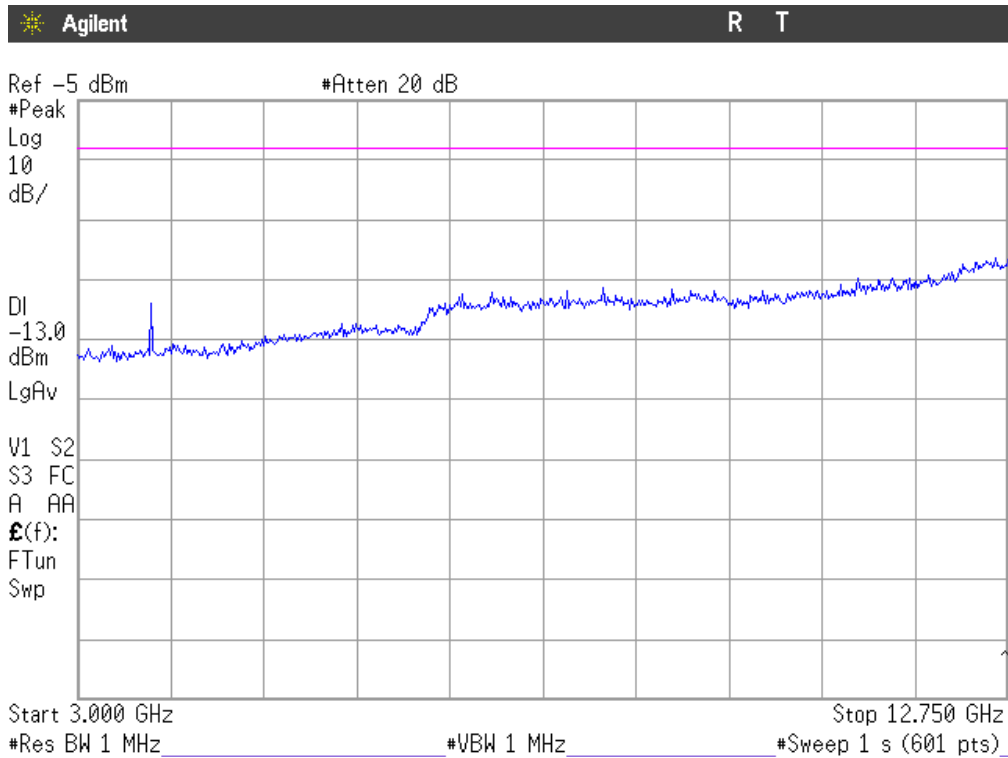

CHANNEL: HIGHEST

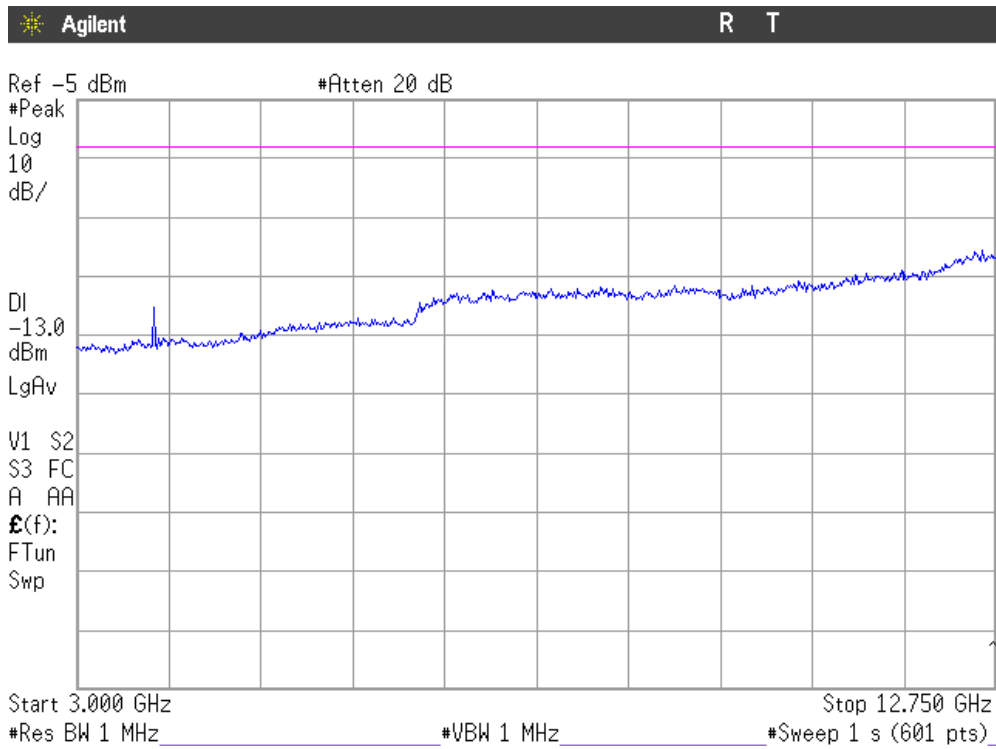


FREQUENCY RANGE 12.75 GHz TO 18 GHz.

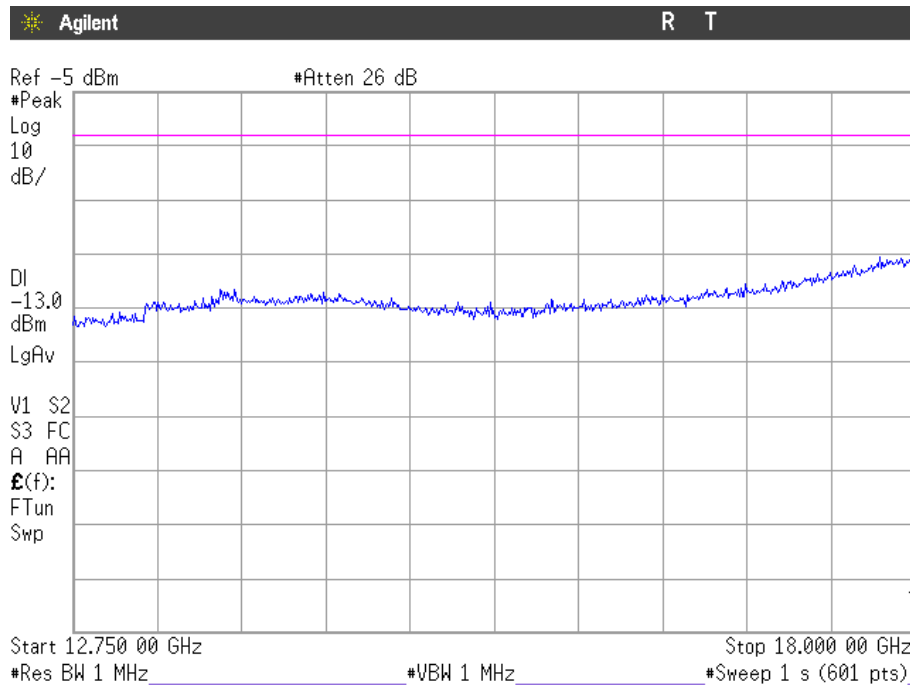

(This plot is valid for all three channels and all modulations).

FREQUENCY RANGE 18 GHz TO 20 GHz.

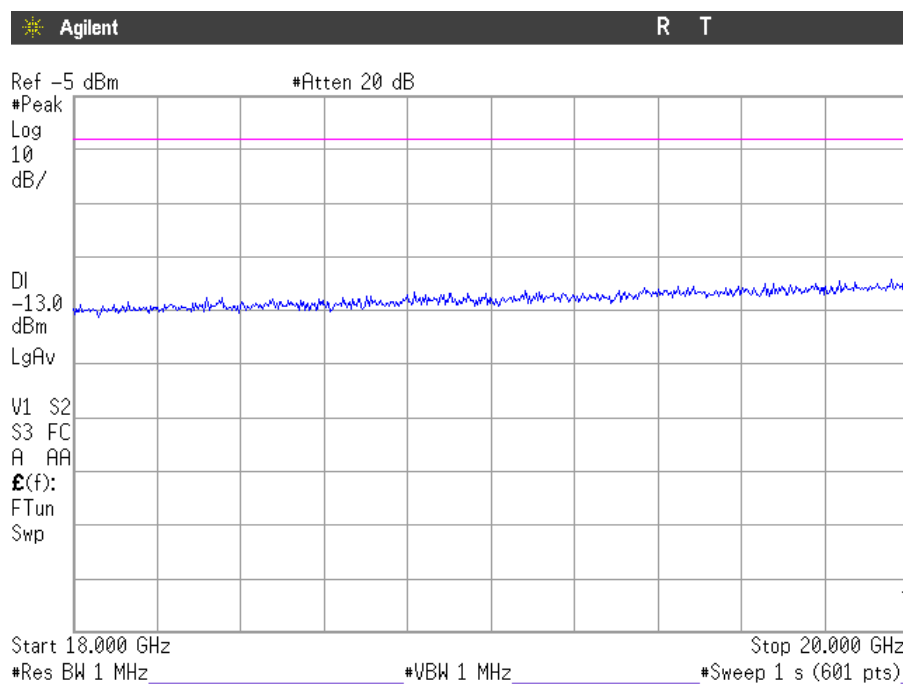

(This plot is valid for all three channels and all modulations).