

**FCC LISTED, REGISTRATION
NUMBER: 905266**

**IC LISTED REGISTRATION NUMBER
IC 4621A-1**

AT4 wireless, S.A.

Parque Tecnológico de Andalucía,
c/ Severo Ochoa nº 2

29590 Campanillas/ Málaga/ España

Tel. 952 61 91 00 - Fax 952 61 91 13

MÁLAGA, C.I.F. A29 507 456

Registro Mercantil de Málaga, Tomo 1169,

Libro 82, Folio 133, Hoja MA3729

TEST REPORT

REFERENCE STANDARD:

USA FCC Part 15.247, 15.109

CANADA RSS-210, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz.

Licence-Exempt Radio Apparatus (All Frequency Bands): Category I Equipment.

General Requirements and Information for the Certification of Radio Apparatus.

NIE..... : 35012RRF.002
Approved by
(name / position & signature) : A. Llamas / RF Lab. Manager
Elaboration date : 2012-03-08

Identification of item tested : Gateway GSM/GPRS – 802.15.4
Trademark : TELIT
Model and/or type reference : GG864-2.4
Serial number : 141460000281
Other identification of the product : Commercial name: GG864-2.4
 HW version: Rev2
 SW version: P4.01.0001_A2.00.06
 FCC ID: RI7GG864
 IC ID: 5131A-GG864
Features : Gateway GSM/GPRS – 802.15.4. Frequency range 2410-2475 MHz, 12 V external power supply.
Description : Gateway GSM/GPRS – 802.15.4

Applicant : TELIT COMMUNICATIONS SPA
Address..... : Loc. Sa illetta, s.s. 195 km 2.300 09122 - Cagliari - ITALY
CIF/NIF/Passport..... : 03711600266
Contact person: Gianmarco Melosu
Telephone / Fax..... : +39 0704603246
e-mail: : Gianmarco.melosu@telit.com

Test samples supplier : Same as applicant

Manufacturer : TELIT RF TECHNOLOGIES

Address..... : Rue Evariste Galois – Emerald Square Bâtiment D, 06410 Sophia-Antipolis, FRANCE

Contact person: Xavier TATOPOULOS (xavier.tatopoulos@telit.com)

Telephone / Fax..... : +33.(0) 497213318

Test method requested	See Standard					
Standard	USA FCC Part 15.247 10-01-09 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.109 10-01-09 Edition: Receiver radiated emission. CANADA RSS-210 Issue 8 (December 2010). CANADA RSS-Gen Issue 3 (December 2010). Guidelines for measurement of Digital Transmission Systems operating under section 15.247 dated March 23, 2005. ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices.					
Test procedure	PERF010					
Non-standardized test method	N/A					
Used instrumentation					Last Cal. date	Cal. due date
	1.	Spectrum analyser	Agilent	PSA E4440A	2010/02	2012/02
	2.	DC power supply	R&S	NGPE 40/40	2011/11	2014/11
	3.	Semianechoic Absorber Lined Chamber		IR 11. BS	N.A.	N.A.
	4.	Control Chamber		IR 12.BC	N.A.	N.A.
	5.	Hybrid Bilog antenna	Sunol Sciences Corporation	JB6	2011/05	2014/05
	6.	Antenna mast		EM 1072 NMT	N.A.	N.A.
	7.	Rotating table		EM 1084-4. ON	N.A.	N.A.
	8.	Double-ridge Guide Horn antenna		1-18 GHz HP 11966E	2011/05	2014/05
	9.	Double-ridge Guide Horn antenna		18-40 GHz Agilent 119665J	2011/09	2014/09
	10.	EMI Test Receiver	R&S	ESIB26	2011/11	2013/11
	11.	RF pre-amplifier	Miteq	JS4-12002600-30-5A.	2010/07	2012/07
	12.	Multi Device Controller	EMCO	2090	N.A.	N.A.
	13.	Spectrum Analyzer	Agilent	E4440A	2010/02	2012/02
	14.	RF pre-amplifier	Miteq	AFS5-04001300-15-10P-6.	2010/07	2012/07
	15.	RF pre-amplifier	Schaffner	CPA 9231A.	2011/06	2013/06

Report template No.: FDT08_12

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless, S.A.

INDEX

Competences and guarantees	4
General conditions	4
Uncertainty	4
Usage of samples	4
Testing period	4
Environmental conditions	5
Summary	6
Remarks and comments	6
Testing verdicts	6
APPENDIX A: Test result	7

Competences and guarantees

AT4 wireless is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 905266.

AT4 wireless is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621A-1.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance programme for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Uncertainty

Uncertainty (factor k=2) was calculated according to the AT4 wireless internal document PODT000.

Usage of samples

Samples undergoing test have been selected by: **the client**.

Sample M/01 is composed of the following elements

<u>Control No.</u>	<u>Description</u>	<u>Model / Type</u>	<u>Serial No.</u>	<u>Date of reception</u>
32694/13	Equipment board	GG864-2.4	141460000281	05/04/2011
32694/04	Plastic housing	---	---	05/04/2011
32694/01	2.4 GHz antenna	---	---	05/04/2011
32694/03	GSM antenna	---	---	05/04/2011

1. Sample M/01 has undergone following test(s).
All tests indicated in appendix A.

Testing period

The performed test started on 2012-01-13 and finished on 2012-01-31.

The tests have been performed at AT4 wireless.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 22.1 °C Max. = 23.2 °C
Relative humidity	Min. = 43.2 % Max. = 44.5 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

In the semianechoic chamber (21 meters x 11 meters x 8 meters), the following limits were not exceeded during the test.

Temperature	Min. = 20.2 °C Max. = 21.3 °C
Relative humidity	Min. = 38 % Max. = 41 %
Air pressure	Min. = 1019 mbar Max. = 1019 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements the following limits were not exceeded during the test:

Temperature	Min. = 21.6 °C Max. = 22.4 °C
Relative humidity	Min. = 44.6 % Max. = 47.3 %
Air pressure	Min. = 1019 mbar Max. = 1019 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

Summary

Considering the results of the performed test according to standard USA FCC Parts 15.247 and 15.109 / RSS-210, the item under test is **IN COMPLIANCE** with the requested specifications specified in the standard.

NOTE: The results presented in this Test Report apply only to the particular item under test established in page 1 of this document, as presented for test on the date(s) shown in section, "USAGE OF SAMPLES, TESTING PERIOD AND ENVIRONMENTAL CONDITIONS".

Remarks and comments

None.

Testing verdicts

Not applicable: NA
 Pass.....: P
 Fail: F
 Not measured.....: NM

FCC PART 15 PARAGRAPH / RSS-210		VERDICT			
		NA	P	F	NM
Section 15.247 Subclause (a) (2) / RSS-210 A8.2. (a)	6 dB Bandwidth		P		
Section 15.247 Subclause (b) / RSS-210 A8.4. (4)	Maximum output power and antenna gain		P		
Section 15.247 Subclause (d) / RSS-210 A8.5.	Emission limitations conducted (Transmitter)		P		
Section 15.247 Subclause (d) / RSS-210 A8.5.	Band-edge emissions compliance (Transmitter)		P		
Section 15.247 Subclause (e) / RSS-210 A8.2. (b)	Power spectral density		P		
Section 15.247 Subclause (d) / RSS-210 A8.5.	Emission limitations radiated (Transmitter)		P		
Section 15.109 / RSS-210 2.5.	Radiated emission limits for receiver		P		

APPENDIX A: Test result

INDEX

TEST CONDITIONS.....	9
99 % and 26 dB Bandwidth	10
Section 15.247 Subclause (a) (2). 6 dB Bandwidth / RSS-210 A8.2. (a).....	13
Section 15.247 Subclause (b). Maximum output power and antenna gain / RSS-210 A8.4. (4)	16
Section 15.247 Subclause (d). Emission limitations conducted (Transmitter) / RSS-210 A8.5.	21
Section 15.247 Subclause (d). Band-edge emissions compliance (Transmitter) / RSS-210 A8.5.	23
Section 15.247 Subclause (e). Power spectral density / RSS-210 A8.2. (b)	28
Section 15.247 Subclause (d). Emission limitations radiated (Transmitter) / RSS-210 A8.5.....	31
Section 15.109. Receiver spurious radiation / RSS-210 2.5.....	42

TEST CONDITIONS

Power supply (V):

$$V_{\text{nominal}} = 12.0 \text{ Vdc}$$

Type of power supply = DC voltage from external power supply.

Type of antenna = External connectable antenna.

Declared Gain for antenna = 2.2 dBi

TEST FREQUENCIES:

Lowest channel: 2410 MHz

Middle channel: 2440 MHz

Highest channel: 2475 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4: 2009.

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyzer.

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive (wooden) platform one meter above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


99 % and 26 dB Bandwidth

RESULTS


(see next plots).

	Lowest frequency 2410 MHz	Middle frequency 2440 MHz	Highest frequency 2475 MHz
99% bandwidth (MHz)	2.5581	2.5303	2.5260
26 dB bandwidth (MHz)	4.539	4.374	4.472
Measurement uncertainty (kHz)	±21.7		


Lowest Channel

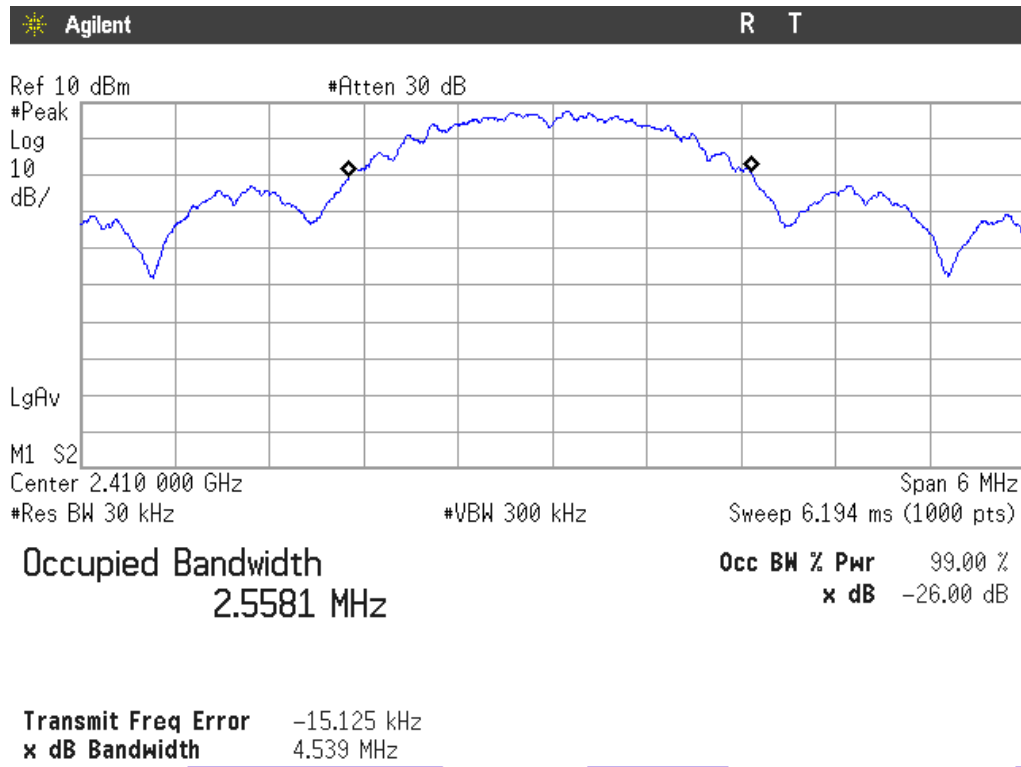

Middle Channel

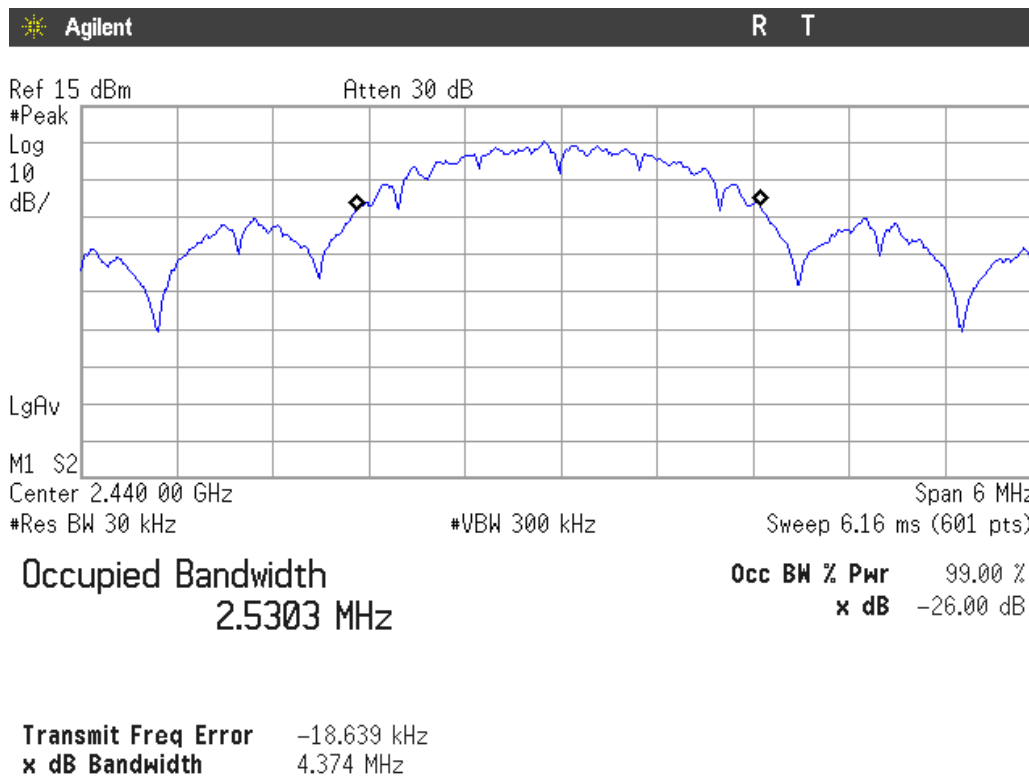

Highest channel

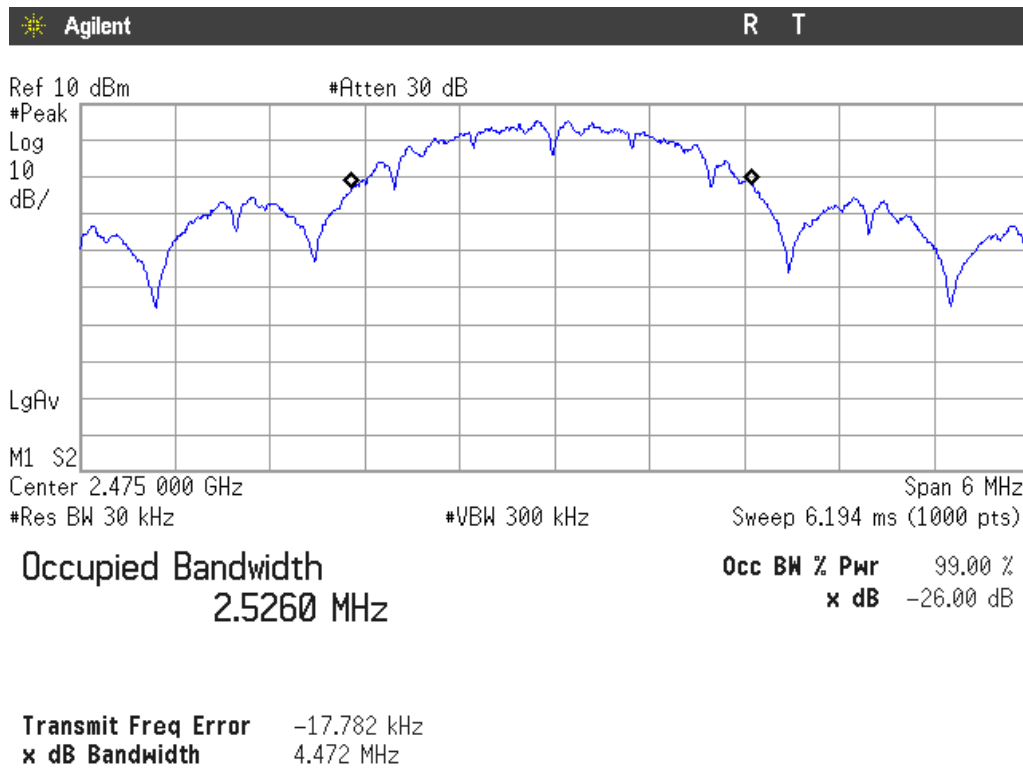

Section 15.247 Subclause (a) (2). 6 dB Bandwidth / RSS-210 A8.2. (a)

SPECIFICATION

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


6 dB Bandwidth (see next plots).

	Lowest frequency 2410 MHz	Middle frequency 2440 MHz	Highest frequency 2475 MHz
6 dB Spectrum bandwidth (kHz)	1597	1592	1597
Measurement uncertainty (kHz)	±21.7		

Verdict: PASS


6 dB BANDWIDTH.

Lowest Channel

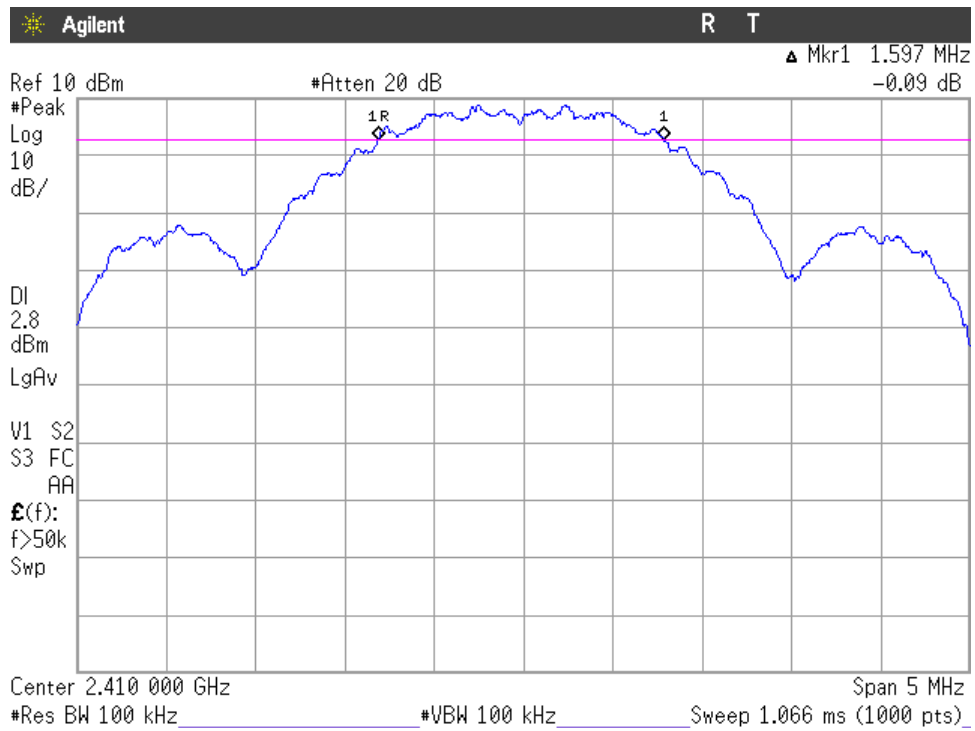


6 dB BANDWIDTH.

Middle Channel

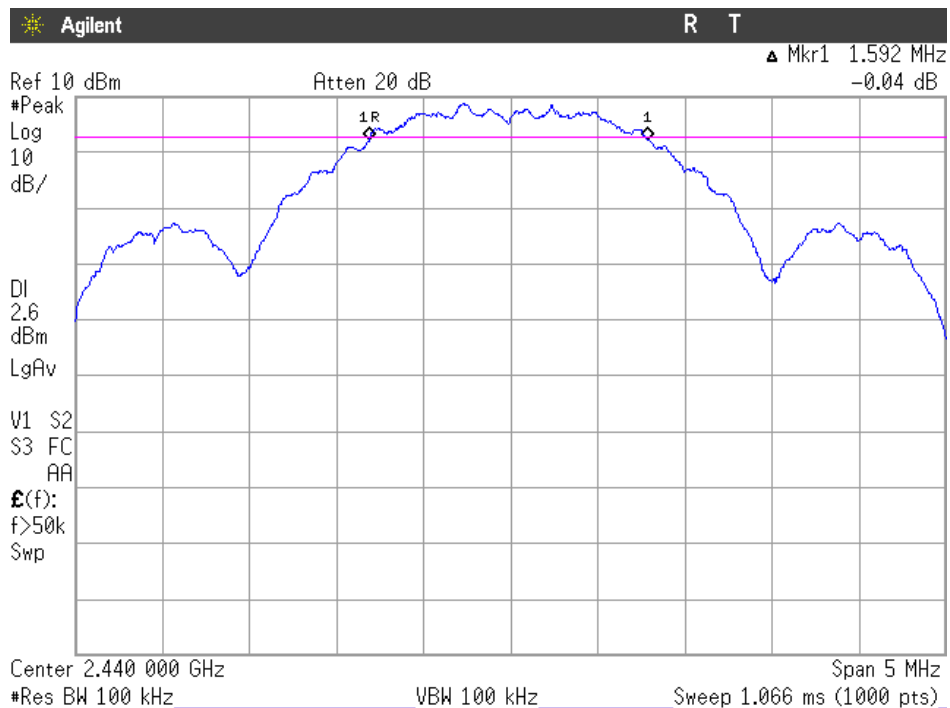

6 dB BANDWIDTH.

Highest Channel

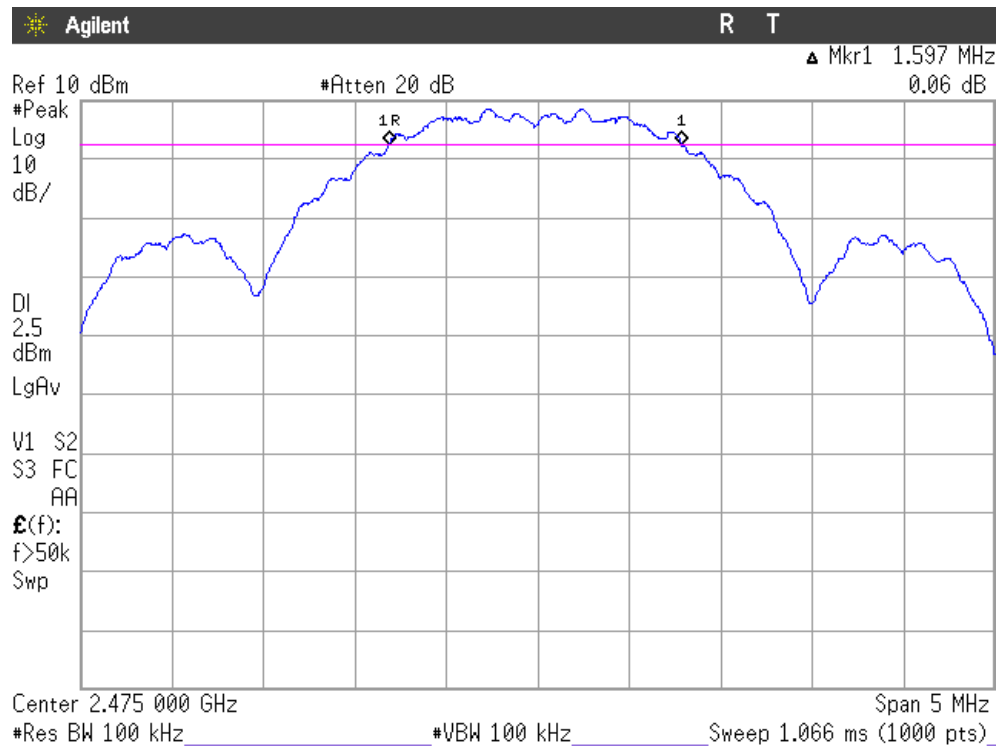

**Section 15.247 Subclause (b). Maximum output power and antenna gain / RSS-210 A8.4.
(4)**

SPECIFICATION

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).

RESULTS

MAXIMUM OUTPUT POWER (CONDUCTED). See next plots.

	Lowest frequency 2410 MHz	Middle frequency 2440 MHz	Highest frequency 2475 MHz
Maximum power (dBm)	12.92	12.68	12.65
Measurement uncertainty (dB)	±1.5		

The maximum declared antenna gain for this device is 2.2 dBi, therefore the maximum theoretical radiated power (EIRP) in the three measurement channels for this device is 15.12 dBm or 32.51 mW.

The actual maximum radiated power (EIRP) was measured for the lowest, middle and highest frequency.

MAXIMUM OUTPUT POWER (RADIATED). See next plots.

	Lowest frequency 2410 MHz	Middle frequency 2440 MHz	Highest frequency 2475 MHz
Maximum EIRP power (dBm)	15.30	14.48	15.19
Measurement uncertainty (dB)	±4.09		


Maximum declared antenna gain: 2.2 dBi

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


Verdict: PASS

1. CONDUCTED PEAK POWER.


Lowest frequency

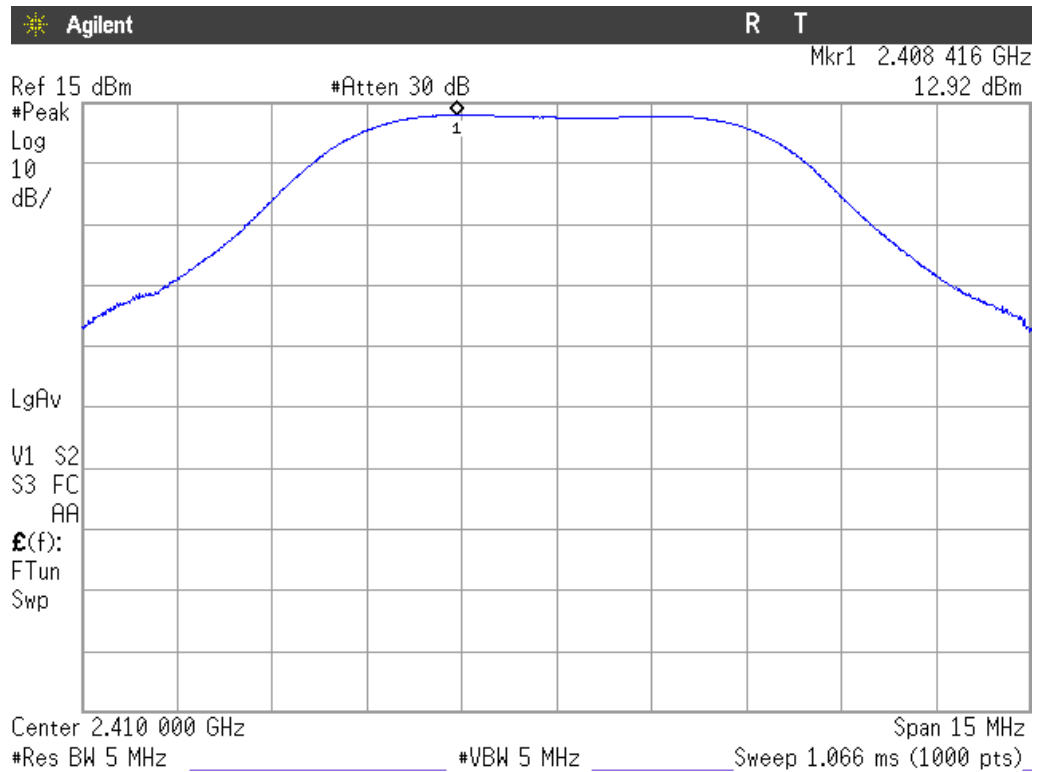

Middle frequency

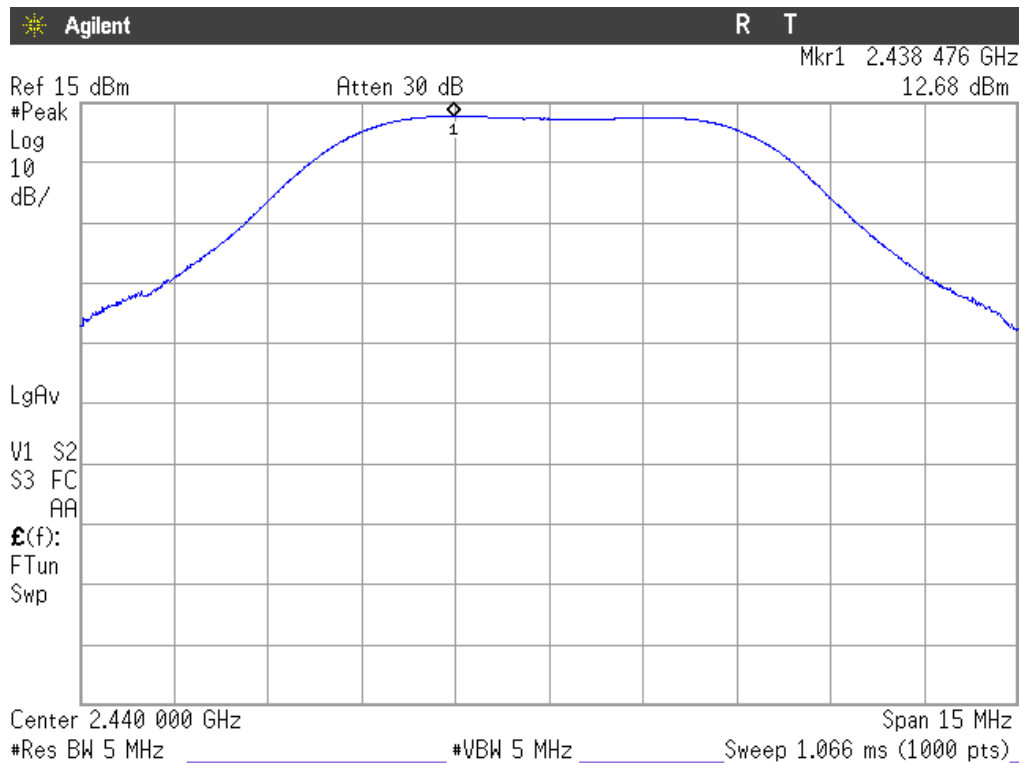


Highest frequency

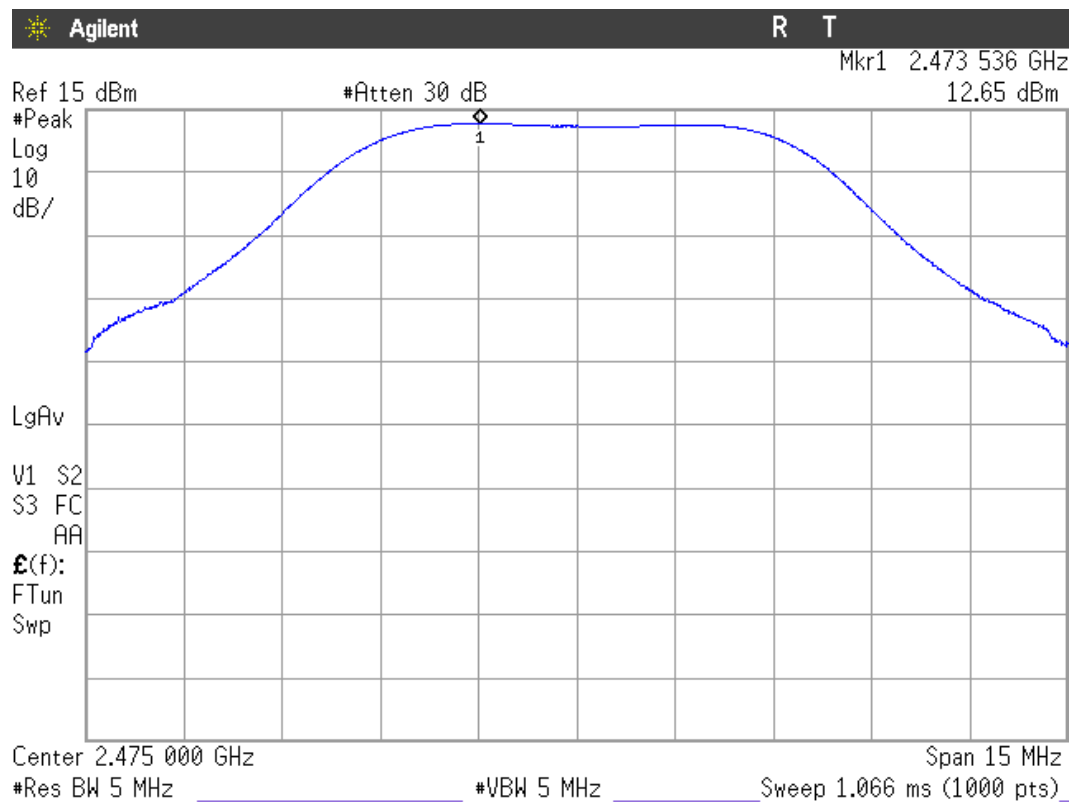


2. RADIATED PEAK POWER.


Lowest frequency

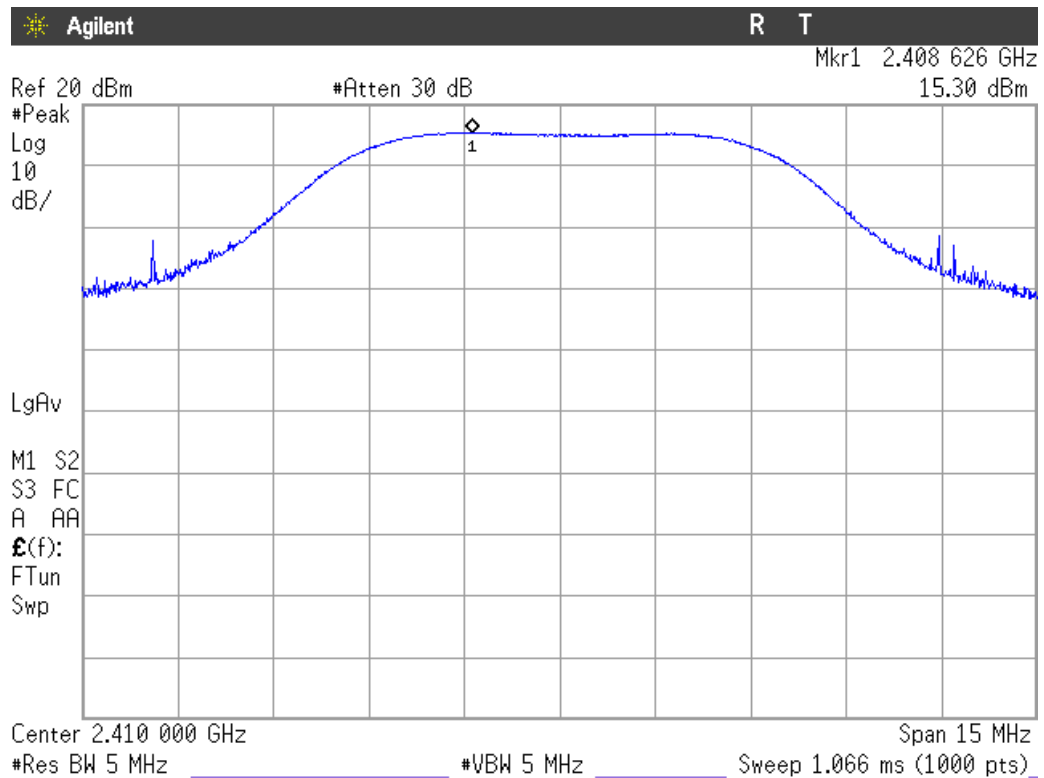

Middle frequency

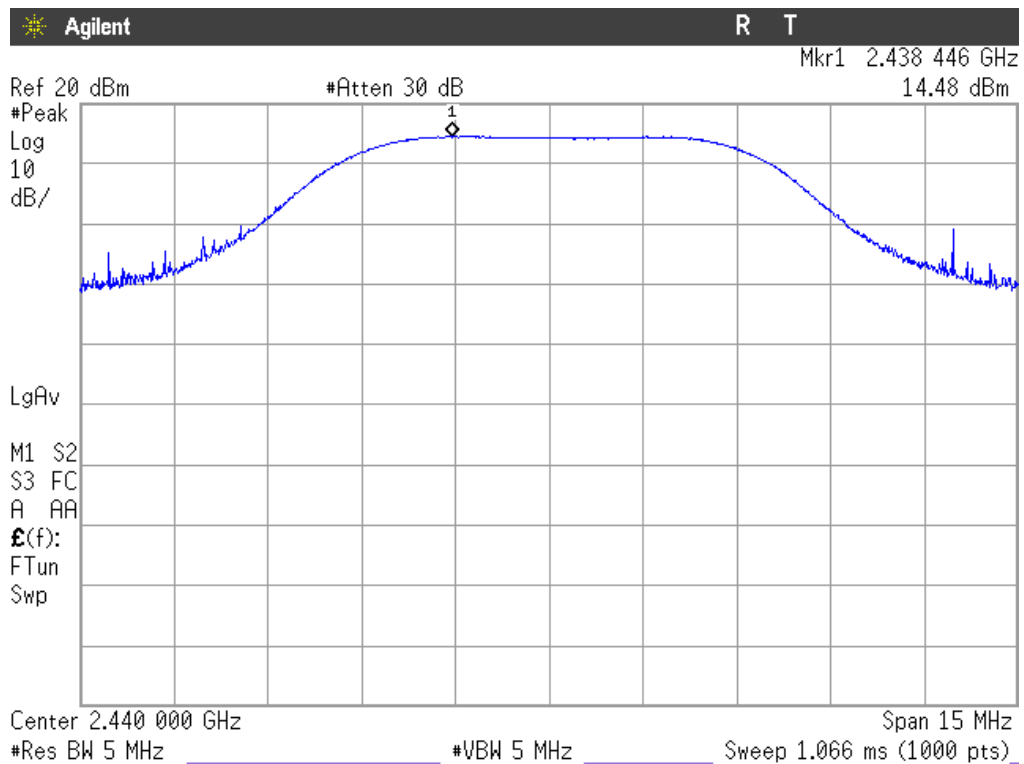

Highest frequency

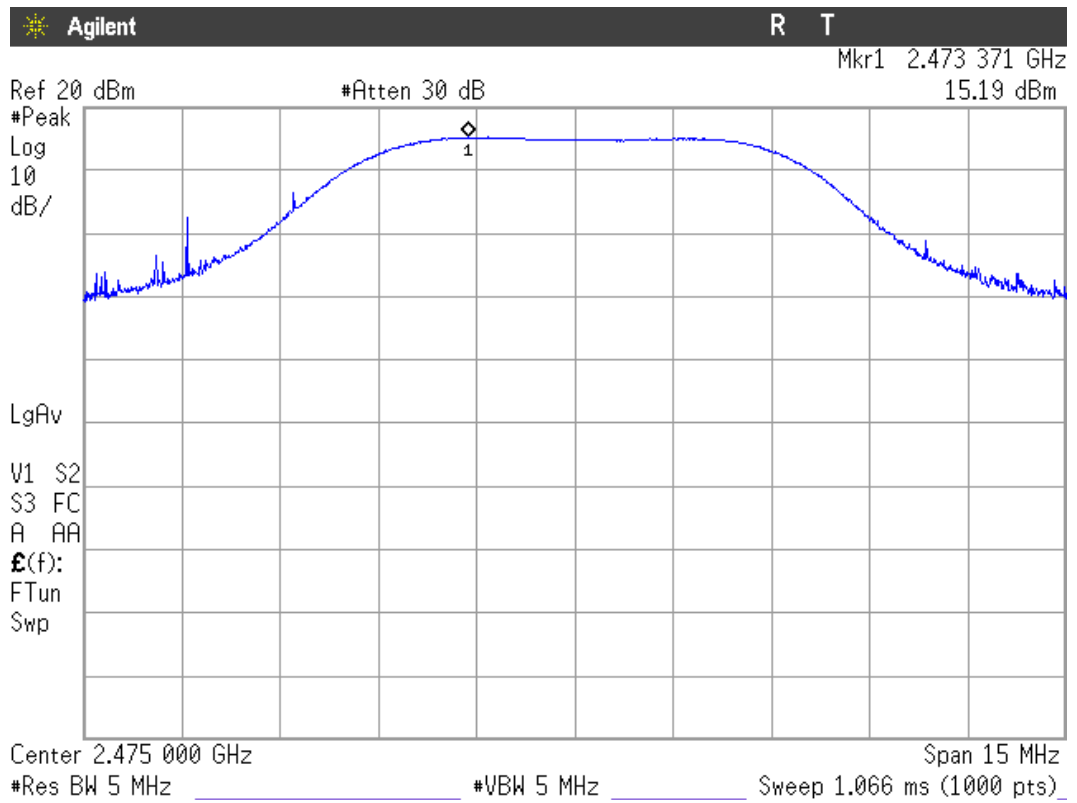


Section 15.247 Subclause (d). Emission limitations conducted (Transmitter) / RSS-210 A8.5.

SPECIFICATION

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


RESULTS:

Lowest Channel

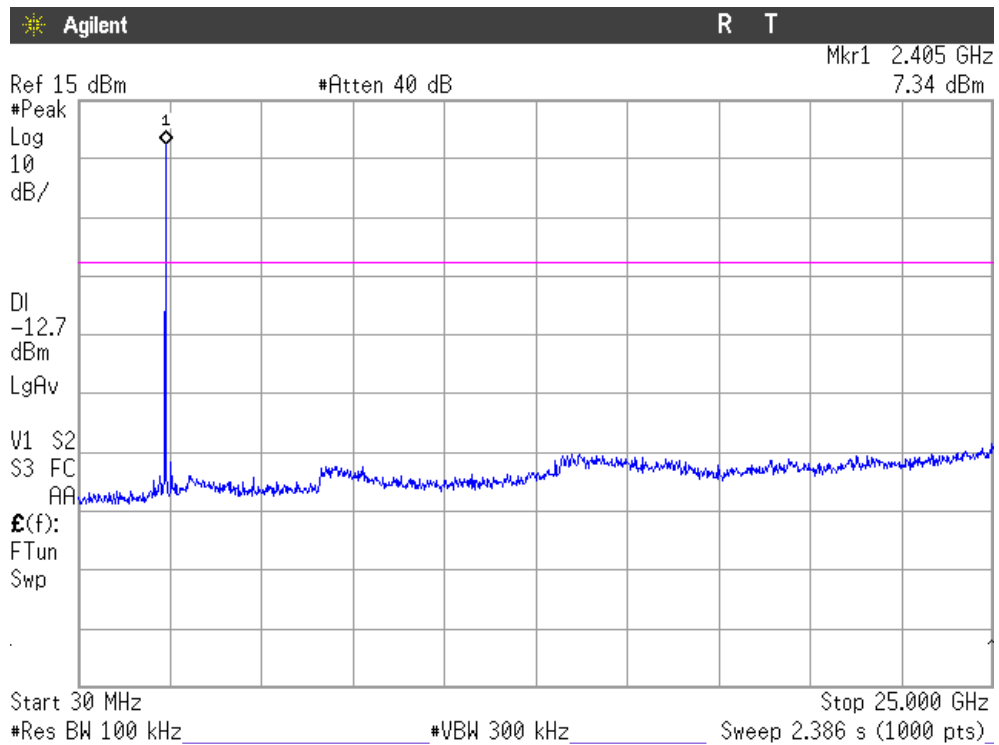


Note: The peak above the limit is the carrier frequency.

Middle Channel

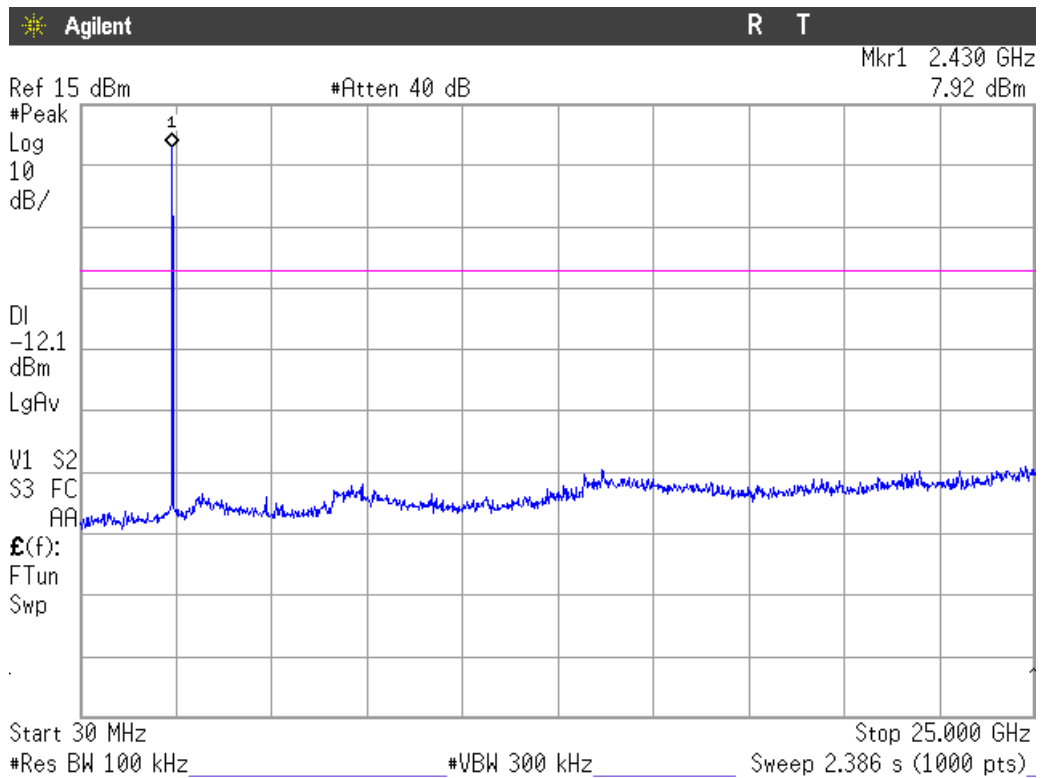

Note: The peak above the limit is the carrier frequency.

Highest Channel

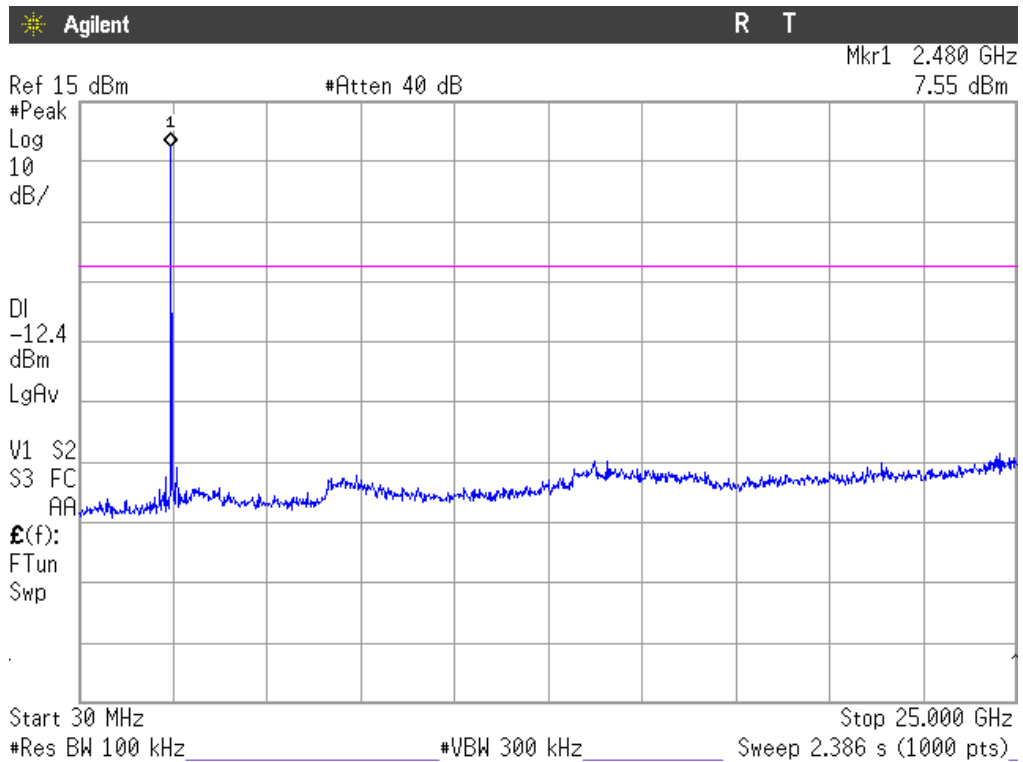

Note: The peak above the limit is the carrier frequency.

Verdict: PASS

Section 15.247 Subclause (d). Band-edge emissions compliance (Transmitter) / RSS-210 A8.5.


SPECIFICATION

Emissions outside the frequency band in which the intentional radiator is operating shall be at least 20dB below the highest level of the desired power.

RESULTS:

1. LOW FREQUENCY SECTION. CONDUCTED.


See next plot.

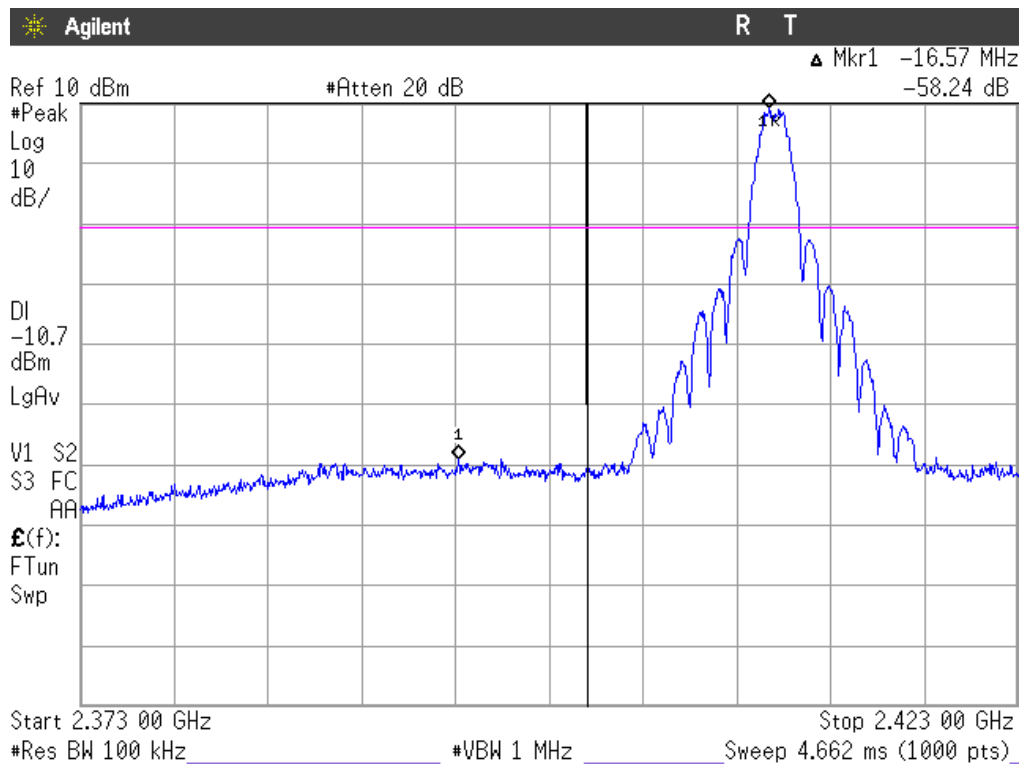

Verdict: PASS

2. HIGH FREQUENCY SECTION. CONDUCTED.

See next plot.

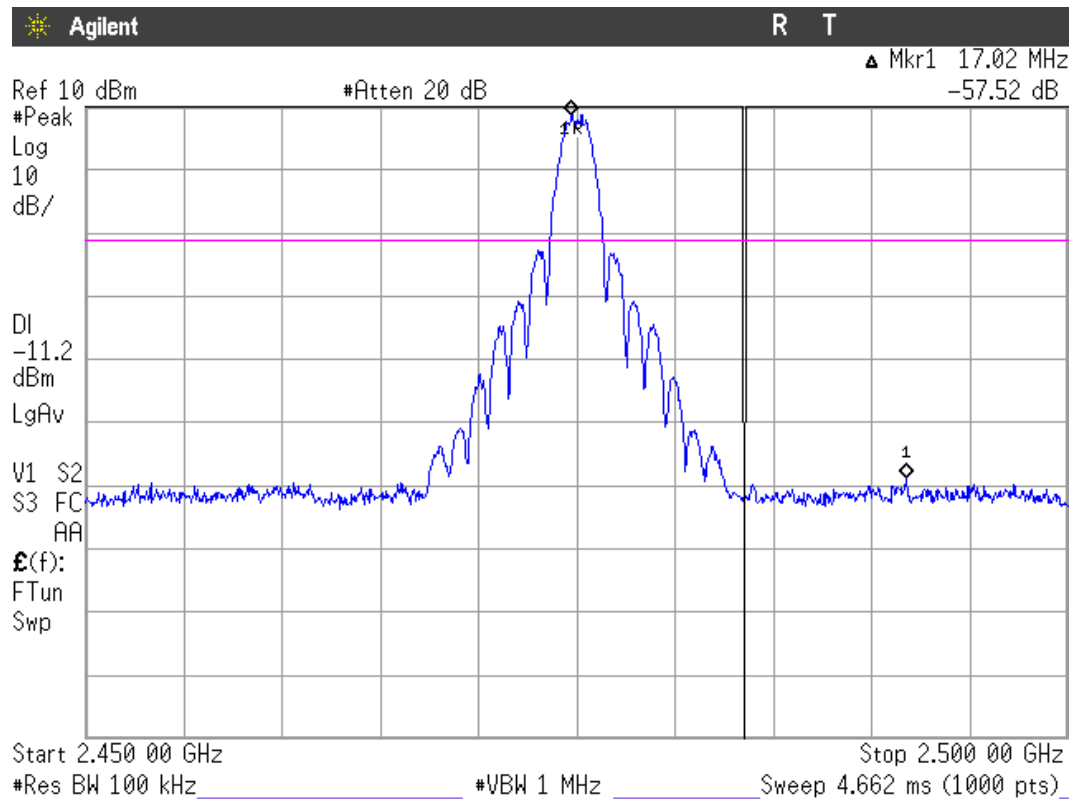


Verdict: PASS

Band-edge compliance of radiated emissions

Maximum peak and average field strength of fundamental emission at 3 m distance.


HIGHEST CHANNEL

Maximum field strength at 3 m. Peak value.

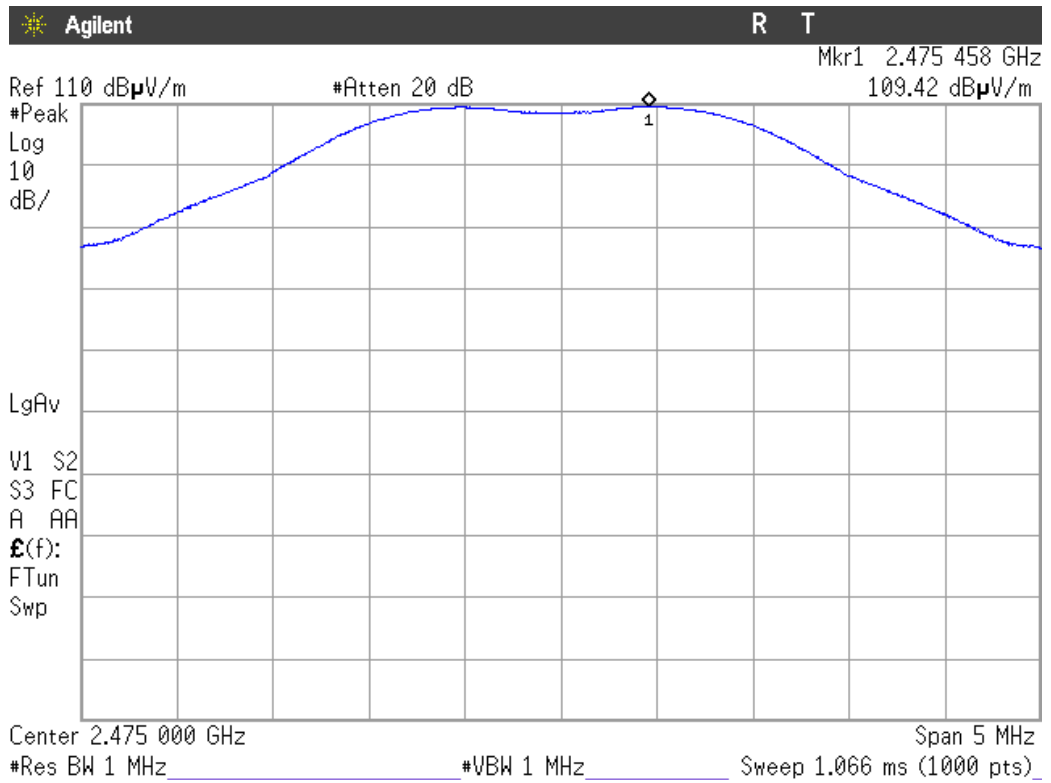


Note: The correction factor is already included in the spectrum analyzer as a transducer factor so that the marker shows directly the field strength level.

Maximum field strength at 3 m. Average value.

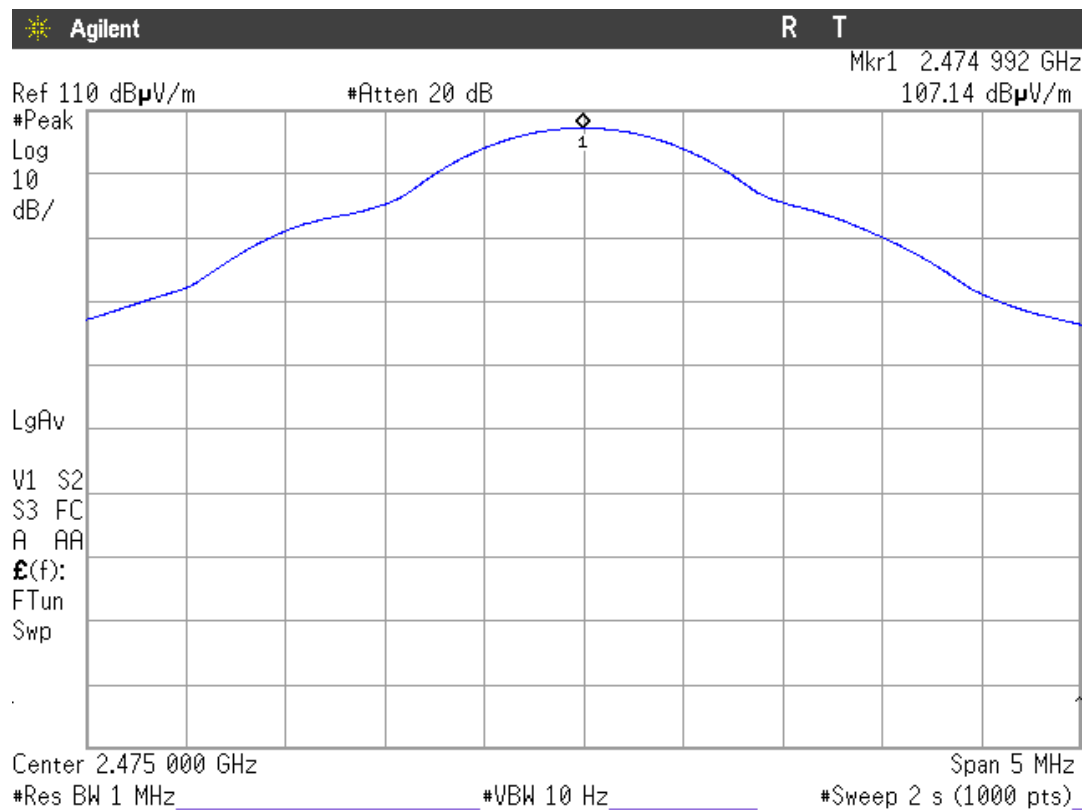

Note: The correction factor is already included in the spectrum analyzer as a transducer factor so that the marker shows directly the field strength level.

BAND-EDGE COMPLIANCE. RADIATED. Marker-Delta Method.

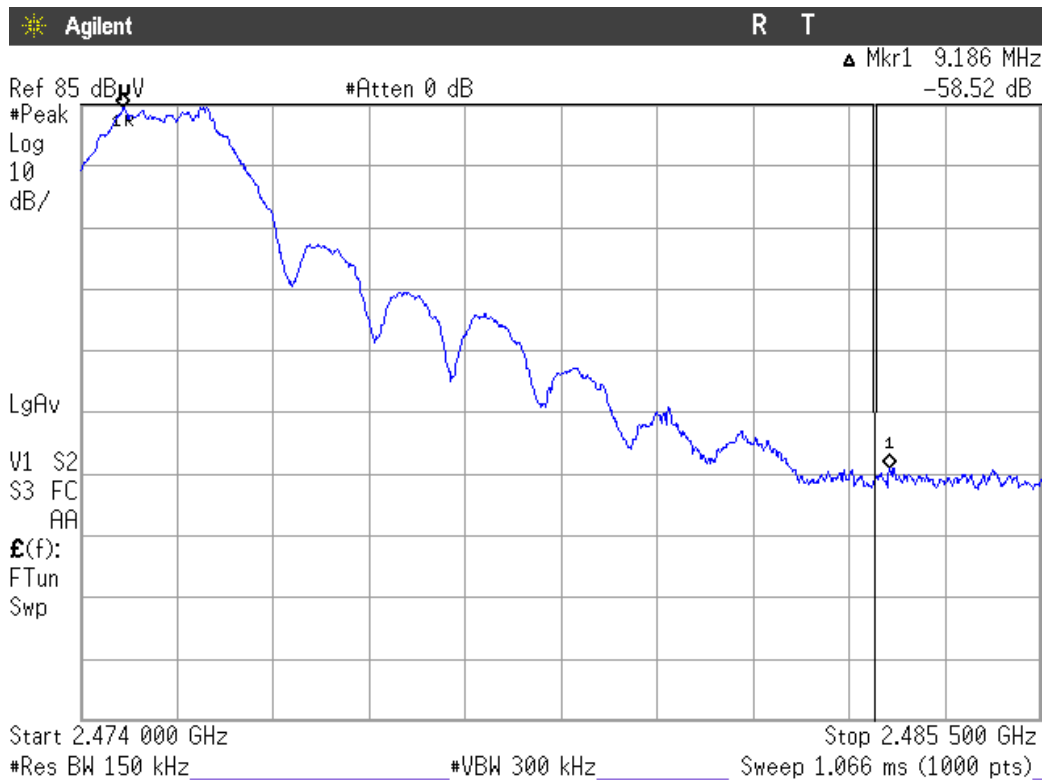

Note: No correction is applied for this relative measurement.

Band edge compliance of radiated emissions

Fundamental max. average value 3 m	Delta value	Calculated value 3 m	Limit
107.14 dBμV/m	58.52 dB	48.62	54 dBμV/m

Fundamental max. Peak value 3 m	Delta value	Calculated value 3 m	Limit
109.42 dBμV/m	58.52 dB	50.90	74 dBμV/m

Verdict: PASS

Section 15.247 Subclause (e). Power spectral density / RSS-210 A8.2. (b)

SPECIFICATION

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS


Power spectral density (see next plots).

	Lowest frequency	Middle frequency	Highest frequency
	2410 MHz	2440 MHz	2475 MHz
Power spectral density (dBm) in 3 kHz bandwidth	-2.40	-2.80	-2.85
Measurement uncertainty (dB)	±1.5		


Verdict: PASS

Power spectral density.


Lowest Channel

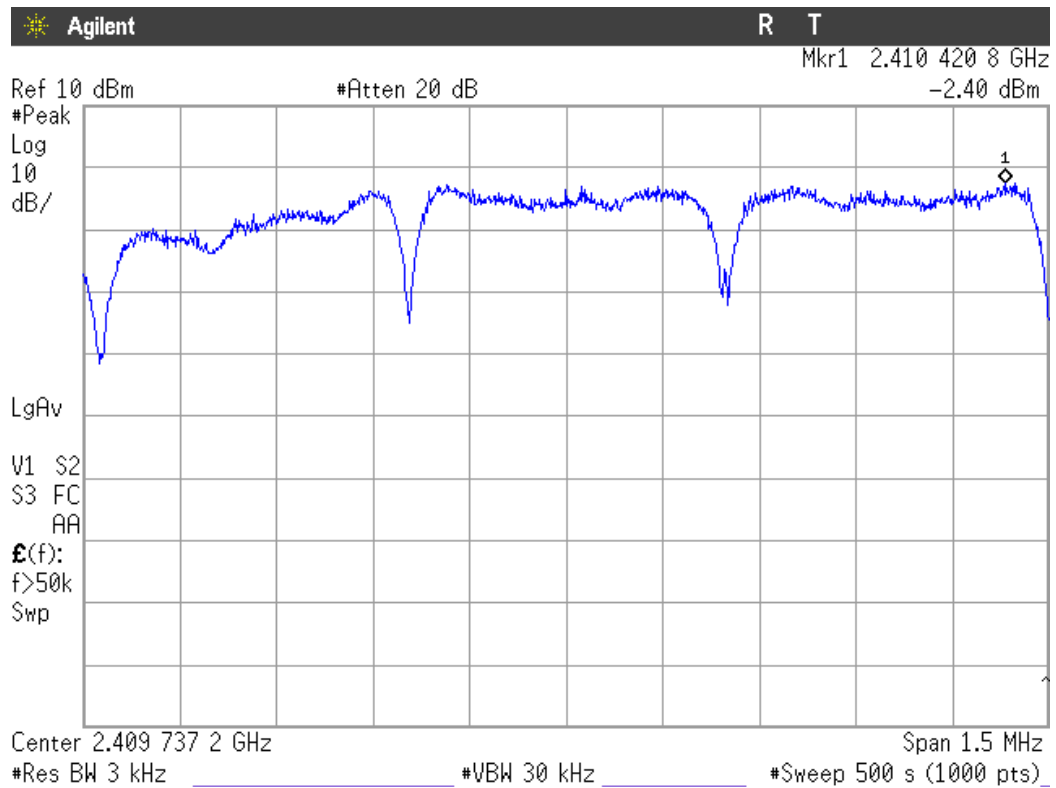

Middle Channel

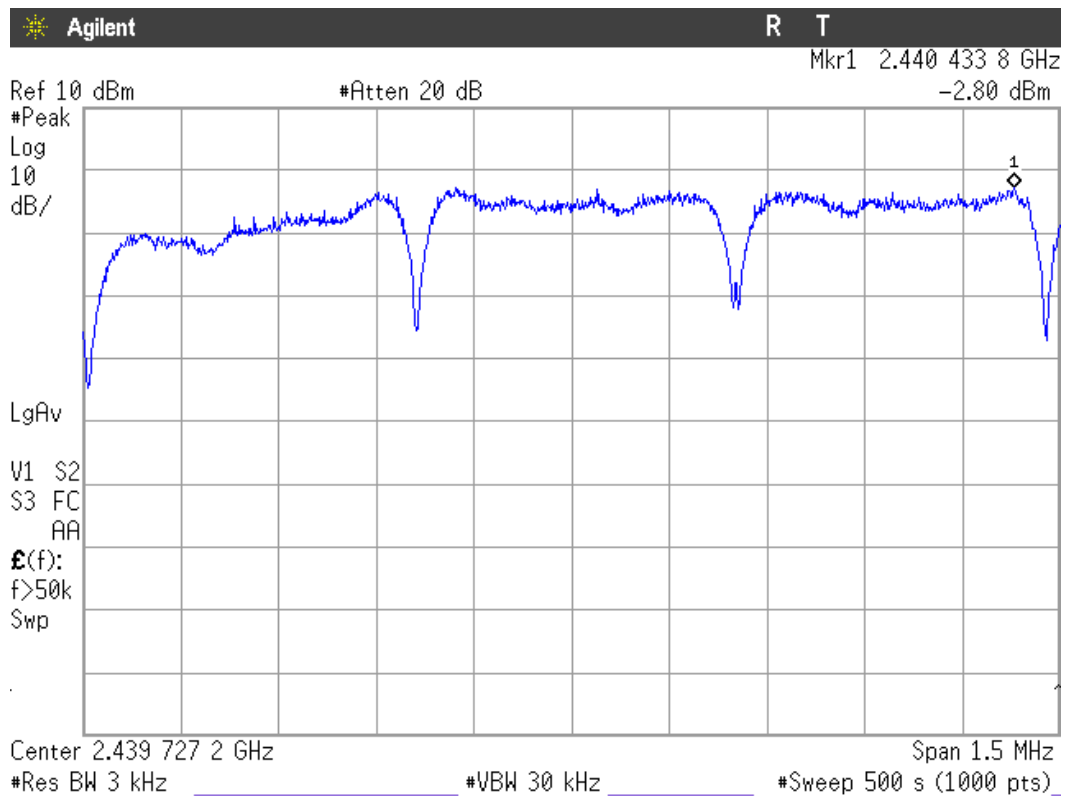

Highest Channel

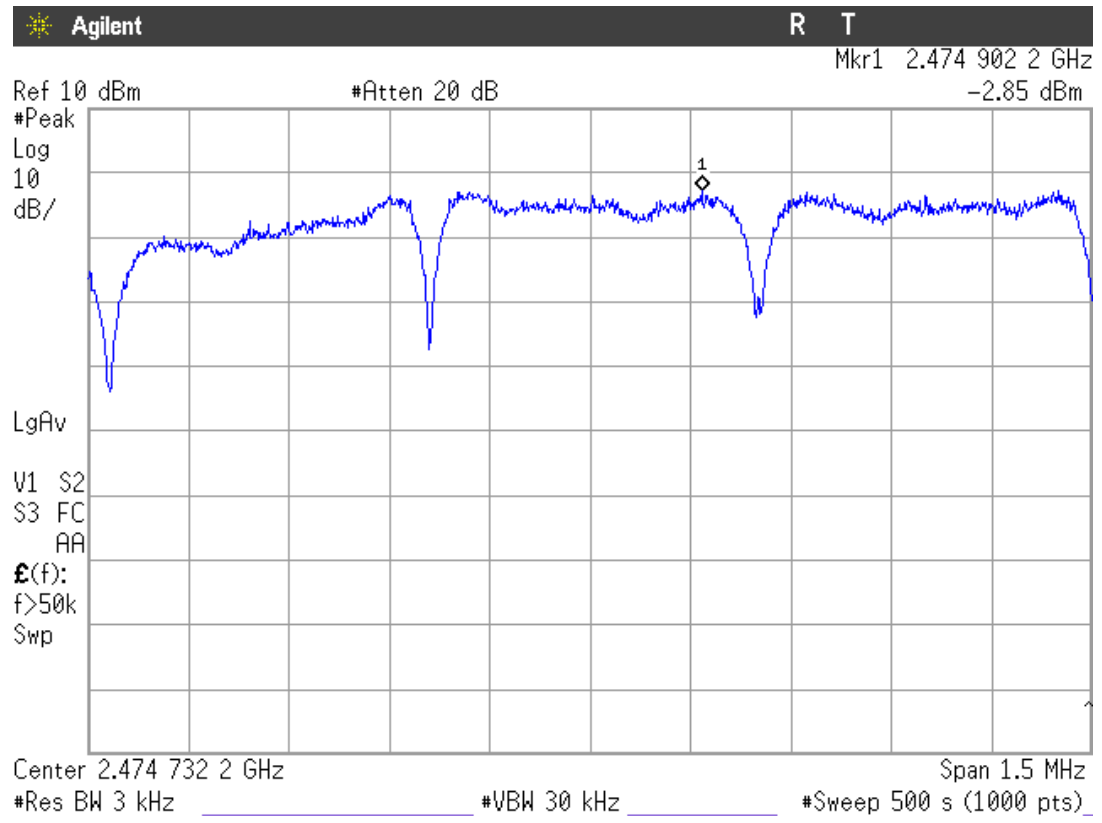

Section 15.247 Subclause (d). Emission limitations radiated (Transmitter) / RSS-210 A8.5.

SPECIFICATION

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

The equipment transmits continuously in the selected channel so it is not necessary a duty cycle correction factor.

Frequency range 30 MHz-1000 MHz.

The spurious signals detected do not depend on the operating channel.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
39.7194	V	Quasi-peak	22.28	± 3.8
51.3828	V	Quasi-peak	24.04	± 3.8
199.1182	V	Quasi-peak	17.98	± 3.8
300.2004	V	Quasi-peak	19.82	± 3.8

Frequency range 1 GHz-25 GHz

1. CHANNEL: LOWEST (2410 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2.261321	V	Peak	54.06	± 4.09
2.261321	V	Average	48.49	± 4.09
2.265311	V	Peak	53.94	± 4.09
2.265311	V	Average	48.48	± 4.09
2.336065	V	Peak	43.86	± 4.09
2.336065	V	Average	34.44	± 4.09
2.340352	V	Peak	45.42	± 4.09
2.340352	V	Average	35.62	± 4.09
2.553612	V	Peak	56.45	± 4.09
2.553612	V	Average	51.43	± 4.09
2.557652	V	Peak	56.56	± 4.09
2.557652	V	Average	50.72	± 4.09
4.819109	V	Peak	48.89	± 4.09
4.819109	V	Average	42.27	± 4.09
4.820911	V	Peak	48.21	± 4.09
4.820911	V	Average	42.06	± 4.09
7.228509	V	Peak	47.72	± 4.09
7.228509	V	Average	38.30	± 4.09
7.231451	V	Peak	47.30	± 4.09
7.231451	V	Average	38.25	± 4.09

2. CHANNEL: MIDDLE (2440 MHz).


Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2.312084	V	Peak	45.83	± 4.09
2.312084	V	Average	37.98	± 4.09
2.376155	V	Peak	46.31	± 4.09
2.376155	V	Average	37.03	± 4.09
4.879029	V	Peak	46.97	± 4.09
4.879029	V	Average	40.72	± 4.09
4.880911	V	Peak	47.04	± 4.09
4.880911	V	Average	40.79	± 4.09

3. CHANNEL: HIGHEST (2475 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
2.323289	V	Peak	55.23	± 4.09
2.323289	V	Average	49.34	± 4.09
2.232703	V	Peak	54.75	± 4.09
2.232703	V	Average	48.72	± 4.09
2.62365	V	Peak	53.59	± 4.09
2.62365	V	Average	47.08	± 4.09
2.627442	V	Peak	54.60	± 4.09
2.627442	V	Average	47.81	± 4.09
4.949159	V	Peak	46.54	± 4.09
4.949159	V	Average	38.74	± 4.09
4.950941	V	Peak	46.67	± 4.09
4.950941	V	Average	39.04	± 4.09

Verdict: PASS


FREQUENCY RANGE 30 MHz-1000 MHz.

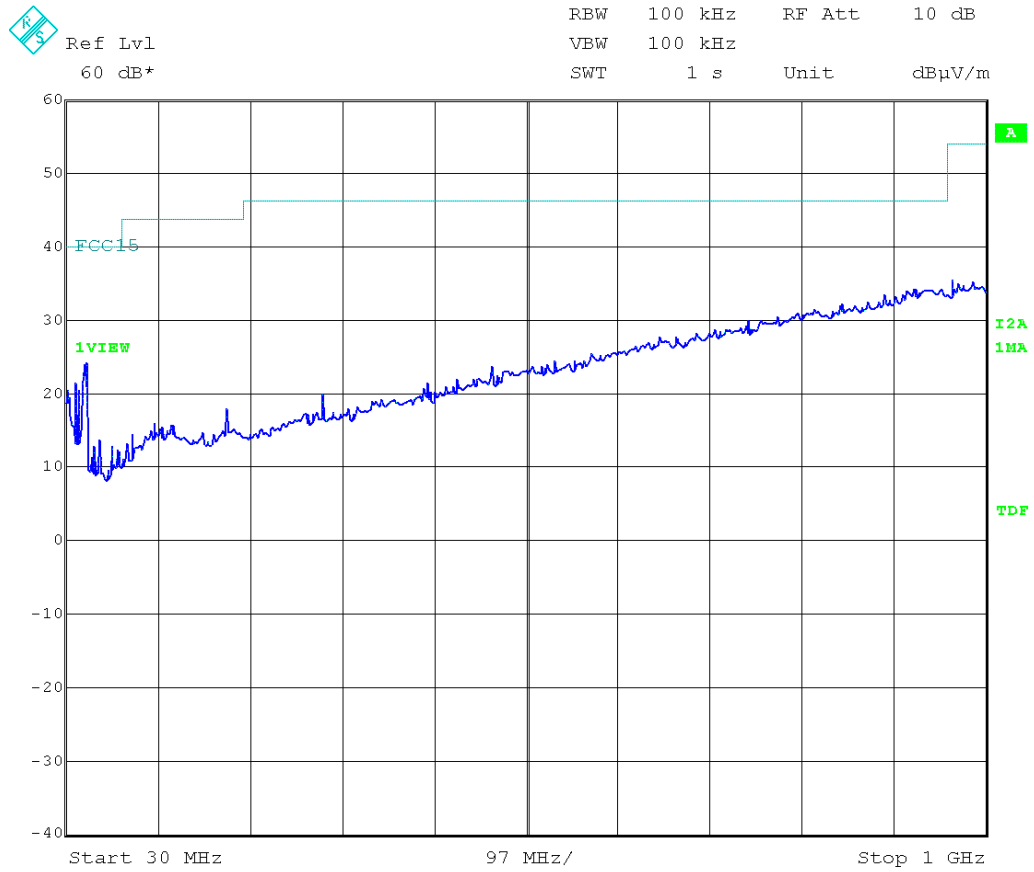

(This plot is valid for all three channels).


FREQUENCY RANGE 1 GHz to 3 GHz.

CHANNEL: Lowest (2410 MHz).

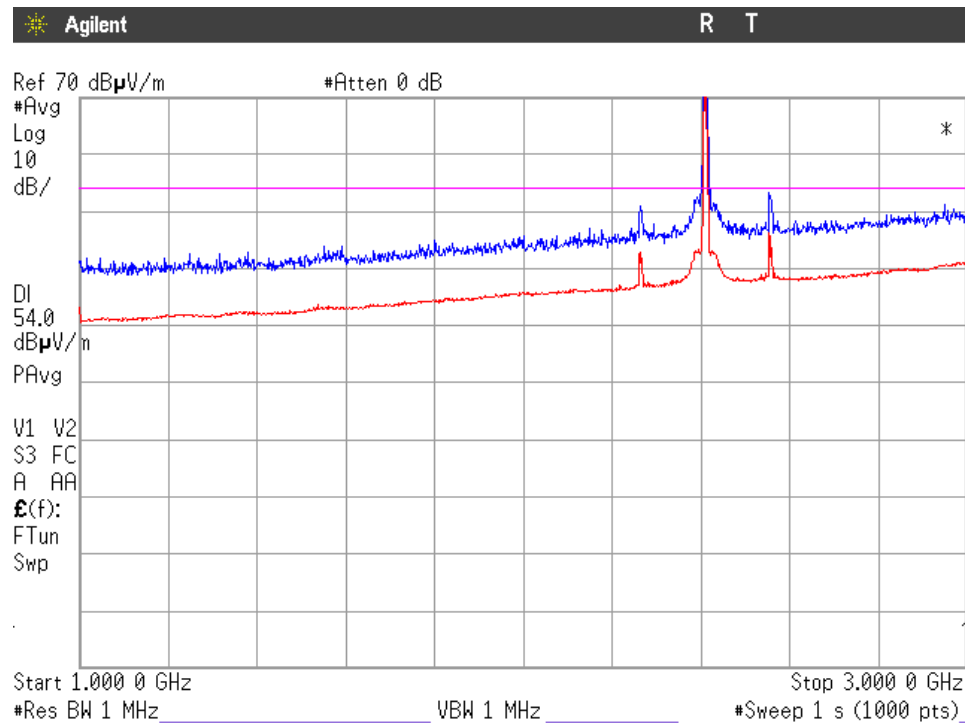


Note: The peak shown in the plot above the limit is the carrier frequency.

CHANNEL: Middle (2440 MHz).

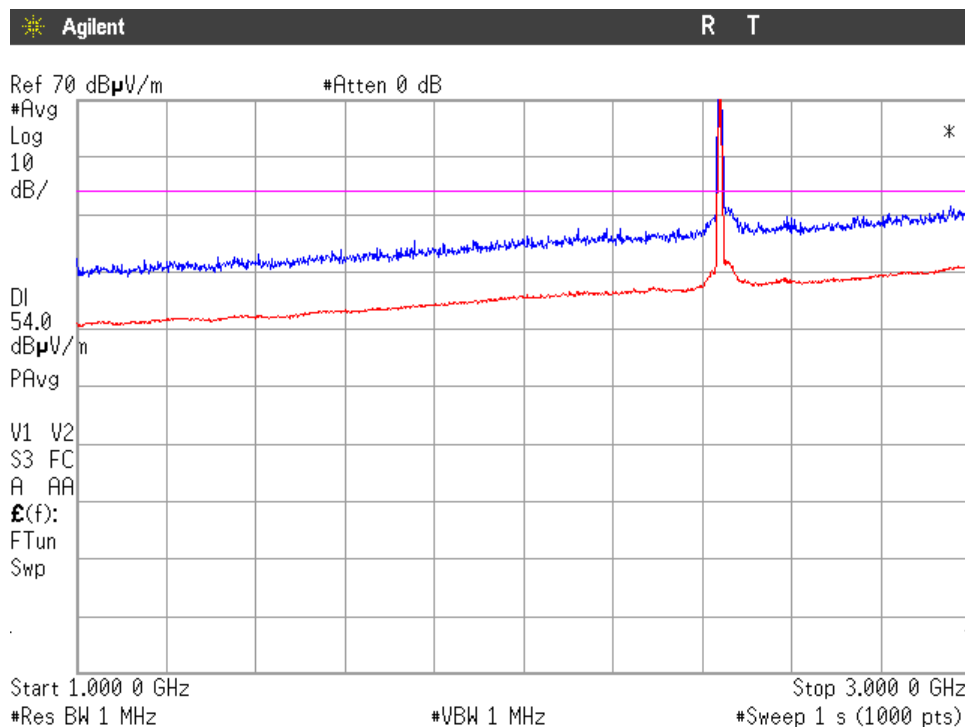

Note: The peak shown in the plot above the limit is the carrier frequency.


CHANNEL: Highest (2475 MHz).

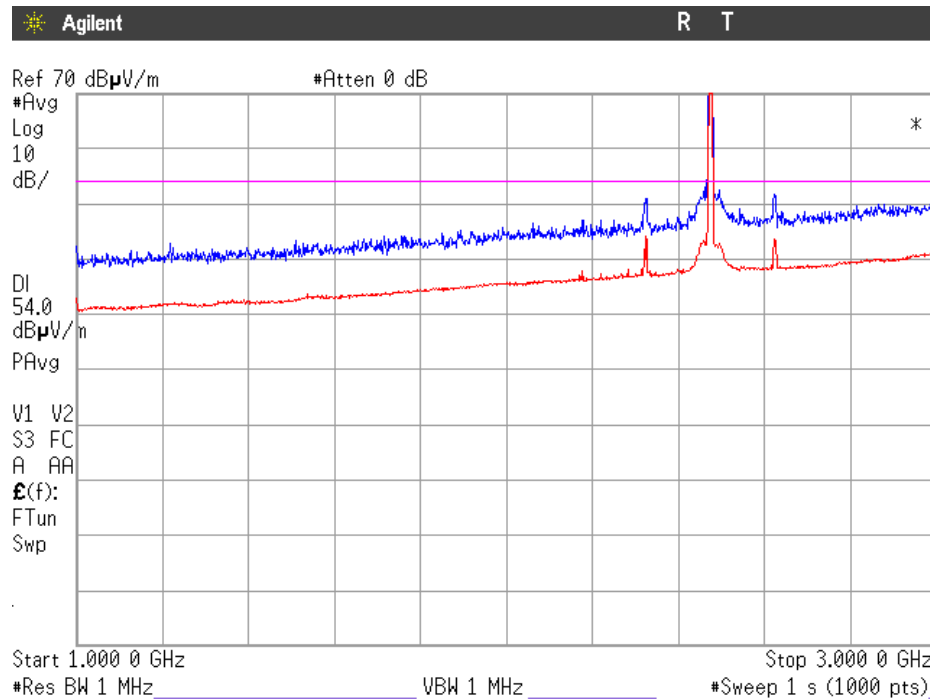


Note: The peak shown in the plot above the limit is the carrier frequency.

FREQUENCY RANGE 3 GHz to 12.75 GHz.


CHANNEL: Lowest (2410 MHz).

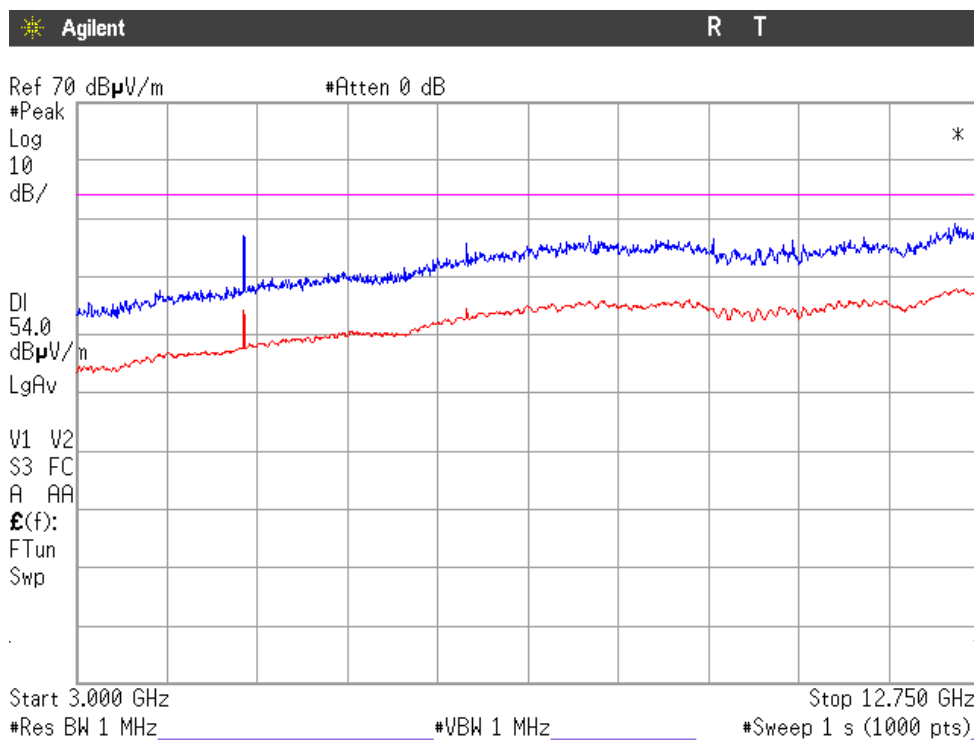


CHANNEL: Middle (2440 MHz).

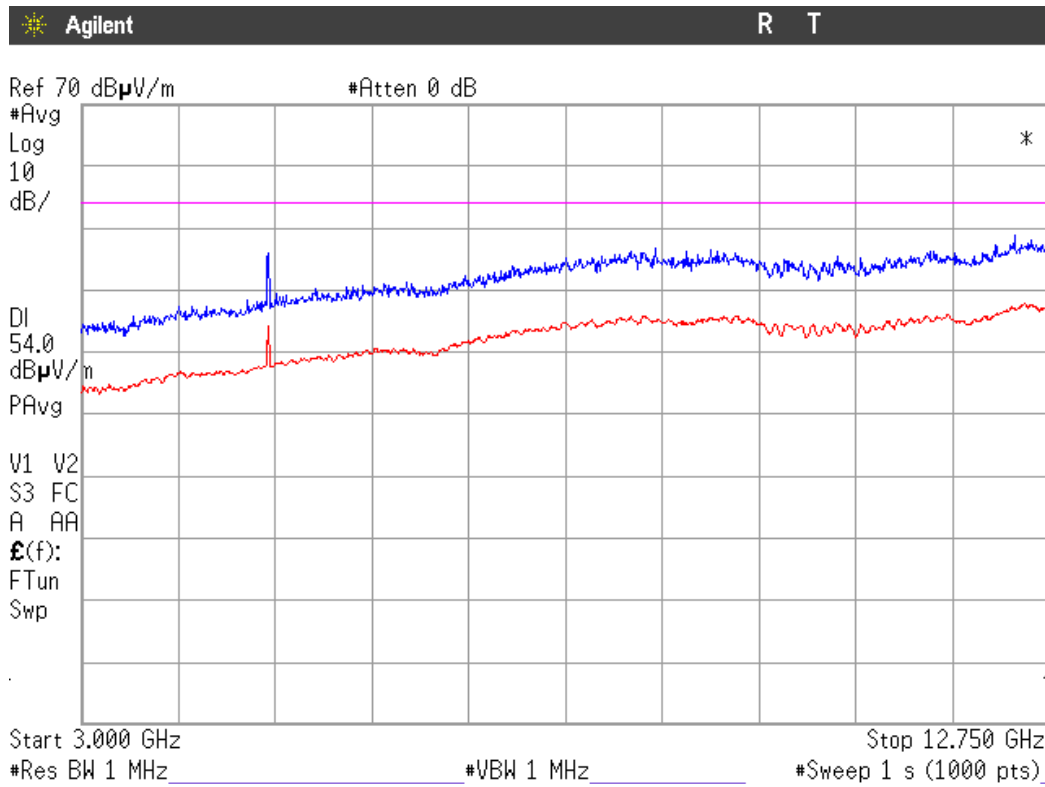

CHANNEL: Highest (2475 MHz).

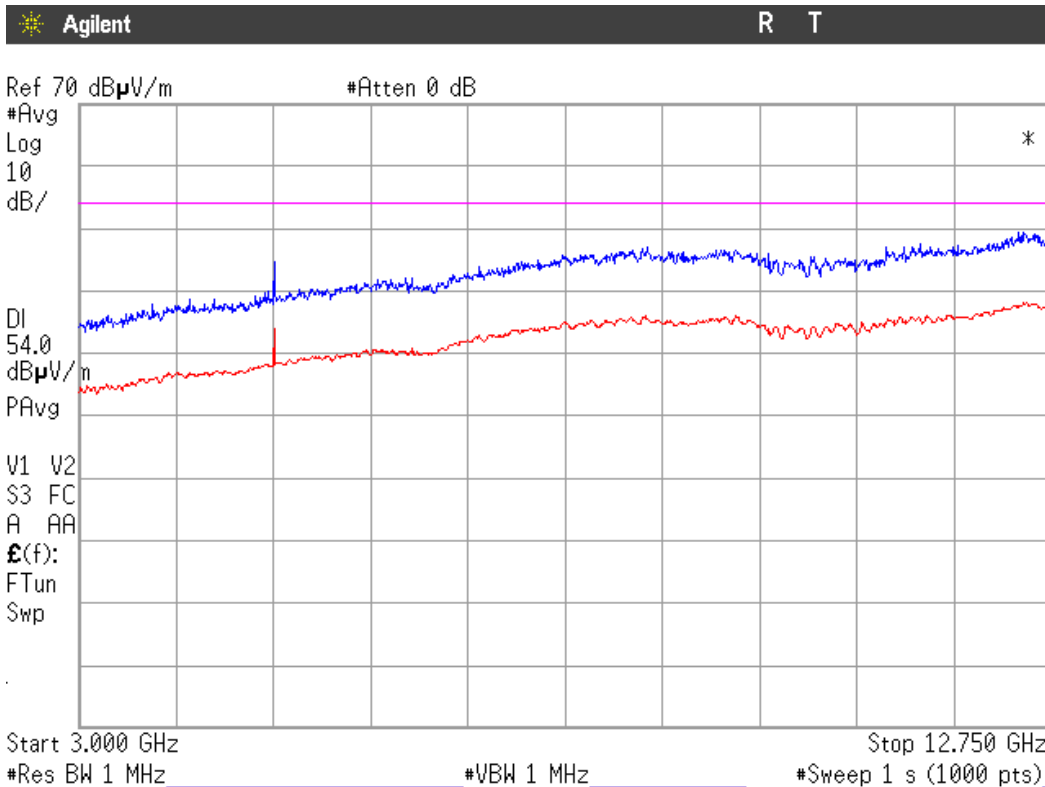


FREQUENCY RANGE 12.75 GHz to 18 GHz.

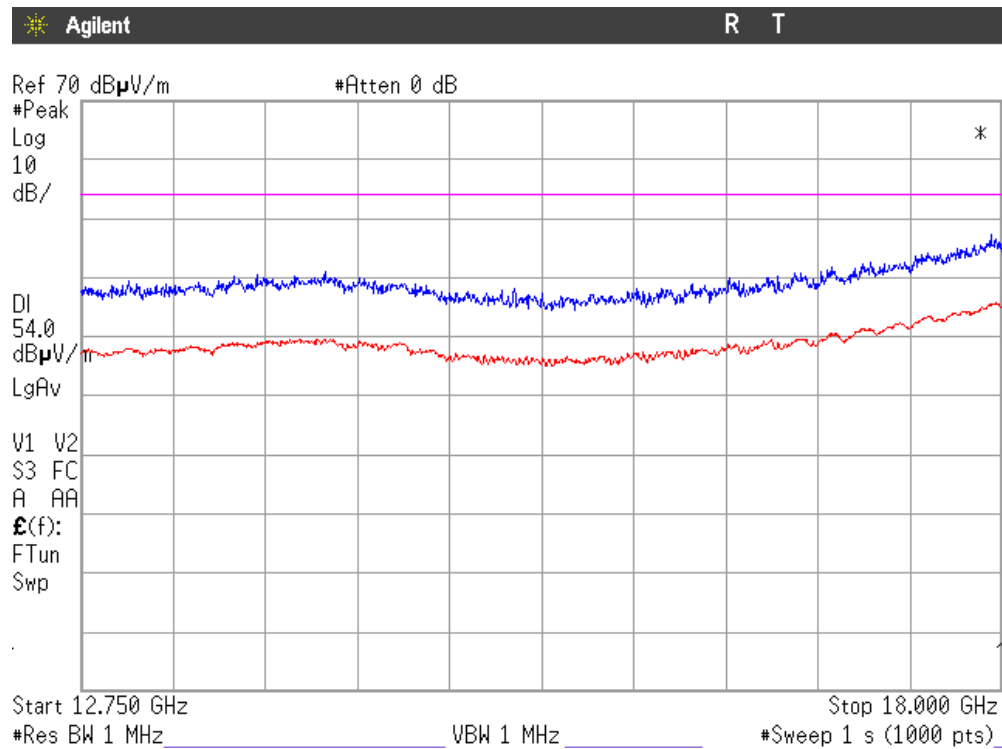

(This plot is valid for all three channels).


FREQUENCY RANGE 18 GHz to 25 GHz.

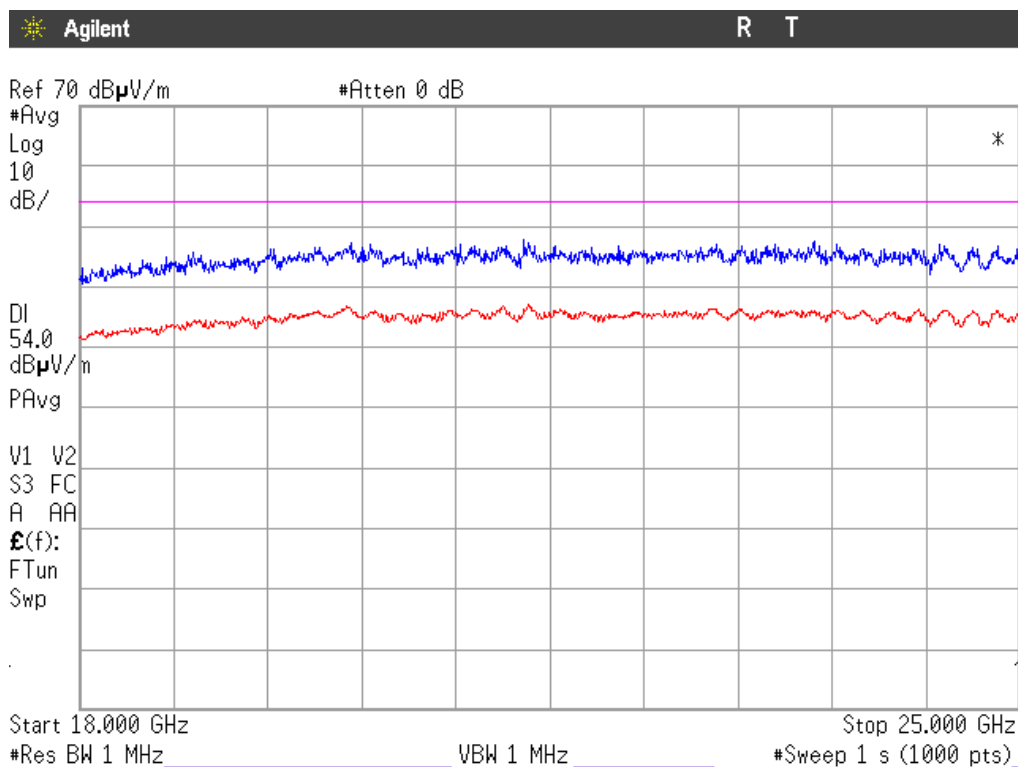


(This plot is valid for all three channels).

FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)


CHANNEL: Lowest (2410 MHz).

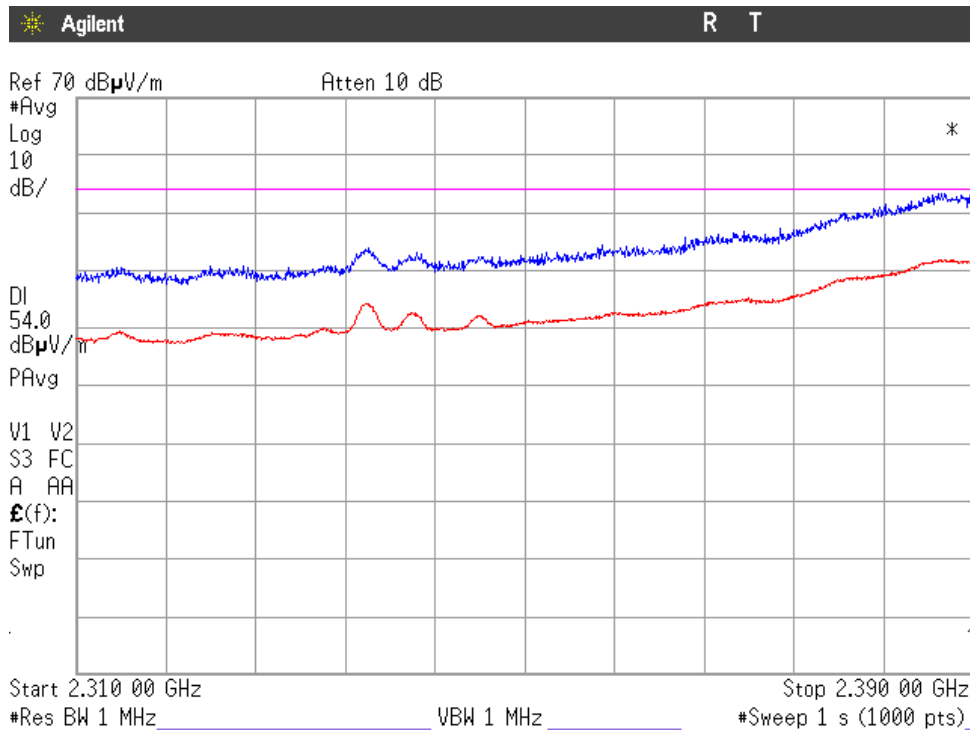

CHANNEL: Middle (2440 MHz).

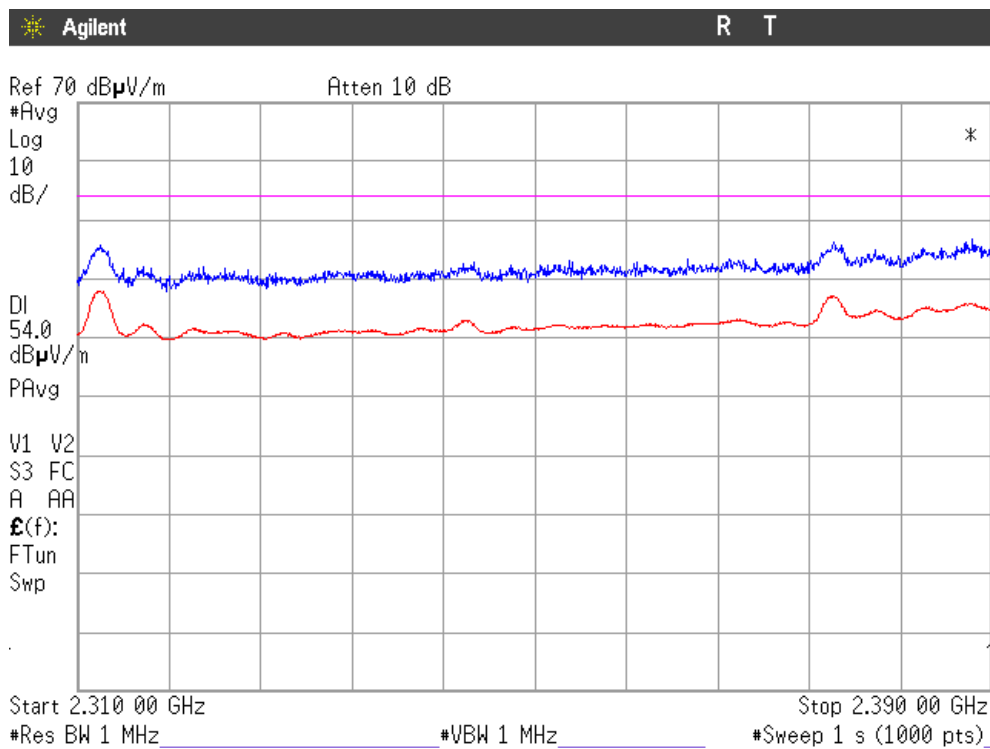


CHANNEL: Highest (2475 MHz).

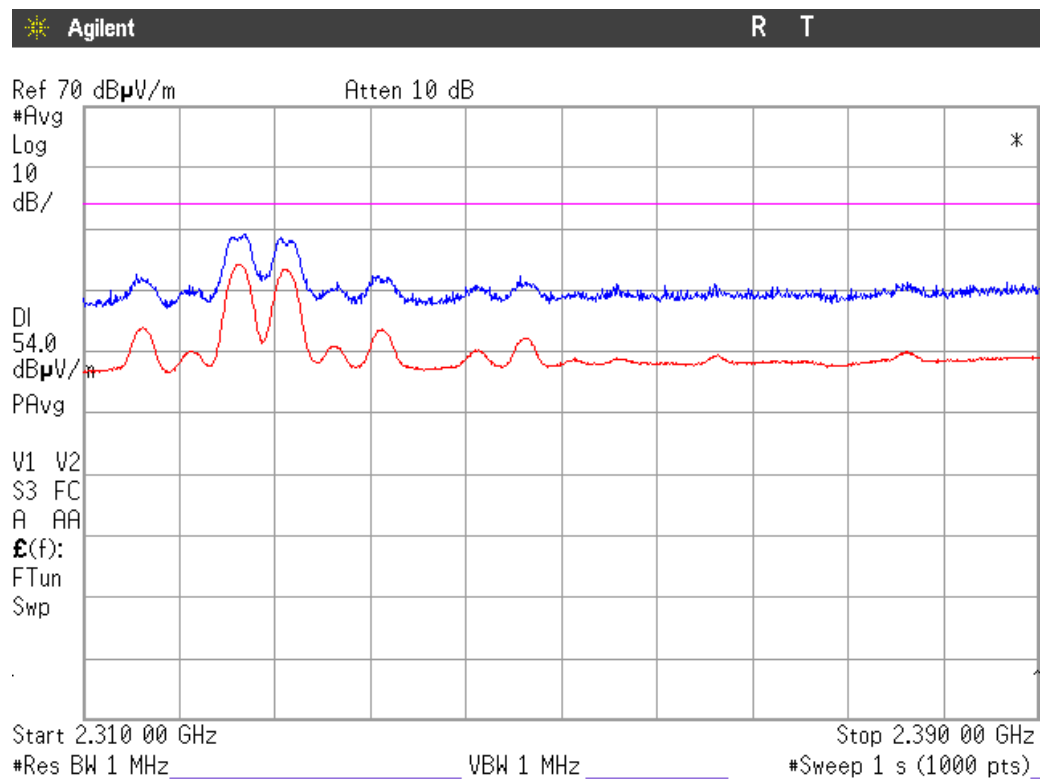


FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND)


CHANNEL: Lowest (2410 MHz).

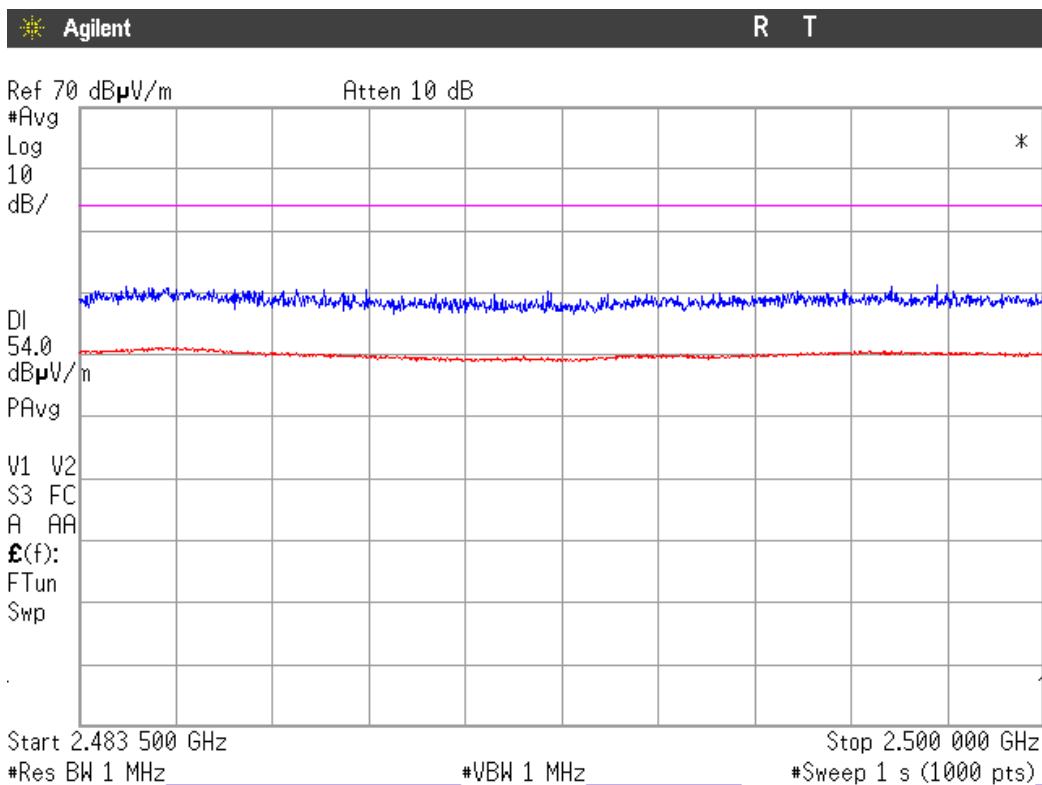

CHANNEL: Middle (2440 MHz).

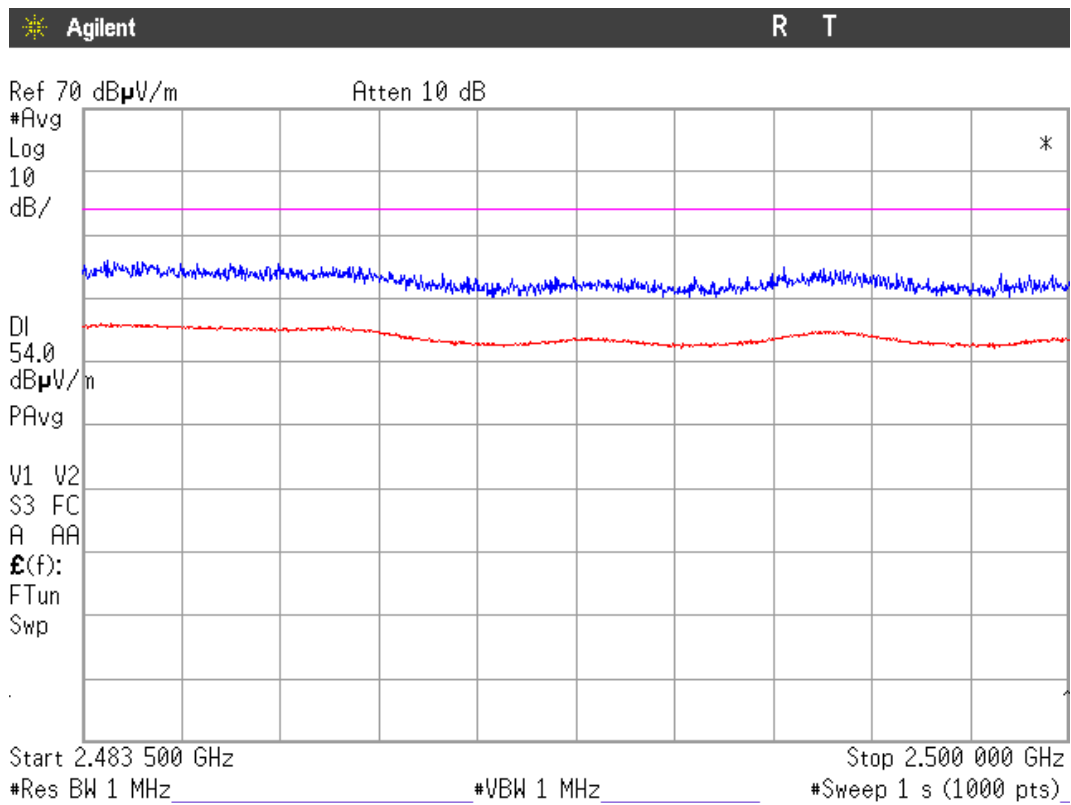

CHANNEL: Highest (2475 MHz).

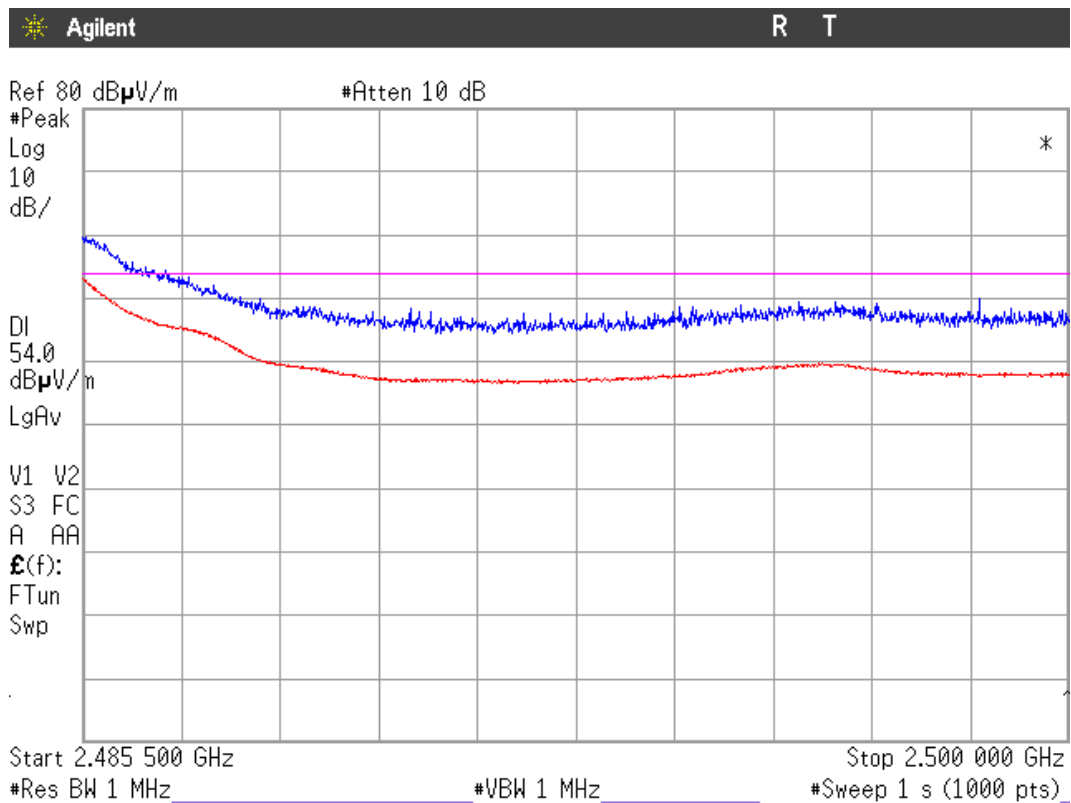

Section 15.109. Receiver spurious radiation / RSS-210 2.5.

SPECIFICATION

The field strength shall not exceed the following values:

Frequency Range (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Field strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyser. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz-1000 MHz.

The spurious signals detected do not depend on the operating channel.


Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
39.7194	V	Quasi-peak	23.59	± 3.8
51.3828	V	Quasi-peak	25.84	± 3.8
64.9899	V	Quasi-peak	17.20	± 3.8
199.1182	V	Quasi-peak	18.40	± 3.8
300.2004	V	Quasi-peak	20.12	± 3.8

Frequency range 1 GHz-25 GHz.

No spurious signals were found in all the range.


Verdict: PASS.

FREQUENCY RANGE 30 MHz-1000 MHz.

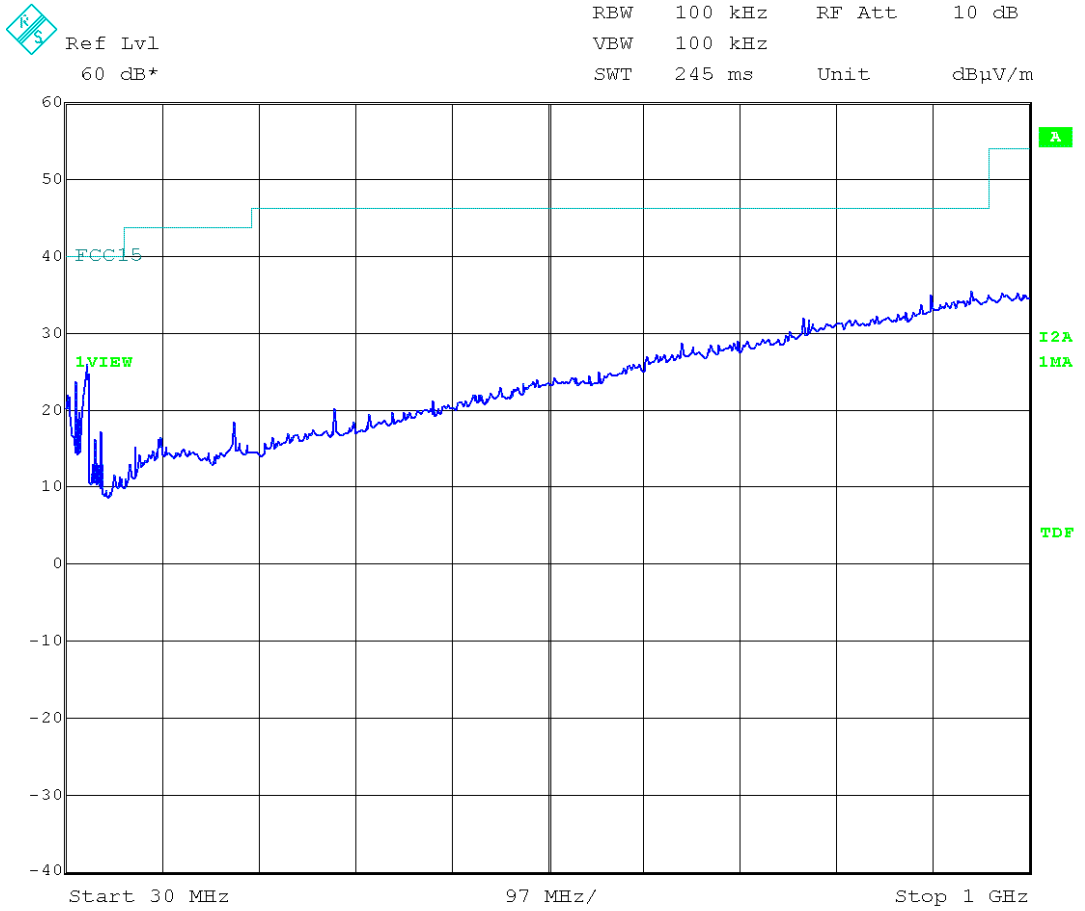


(This plot is valid for all three channels).

FREQUENCY RANGE 1 GHz-12.75 GHz.

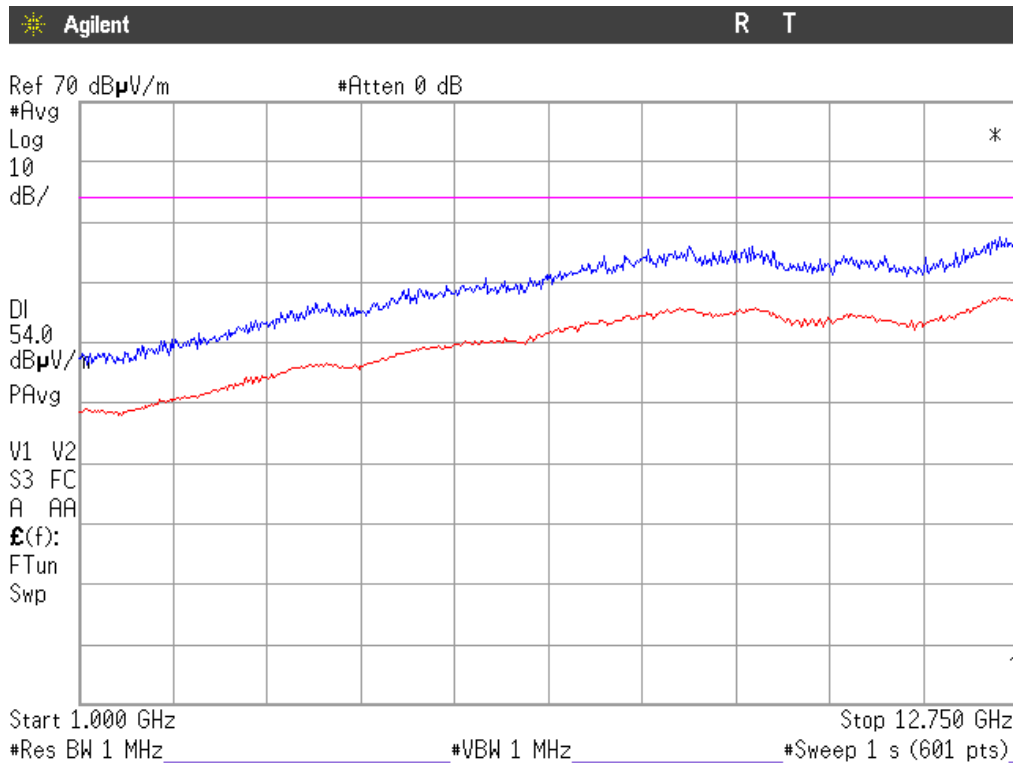


(This plot is valid for all three channels).

FREQUENCY RANGE 12.75 GHz-18 GHz.

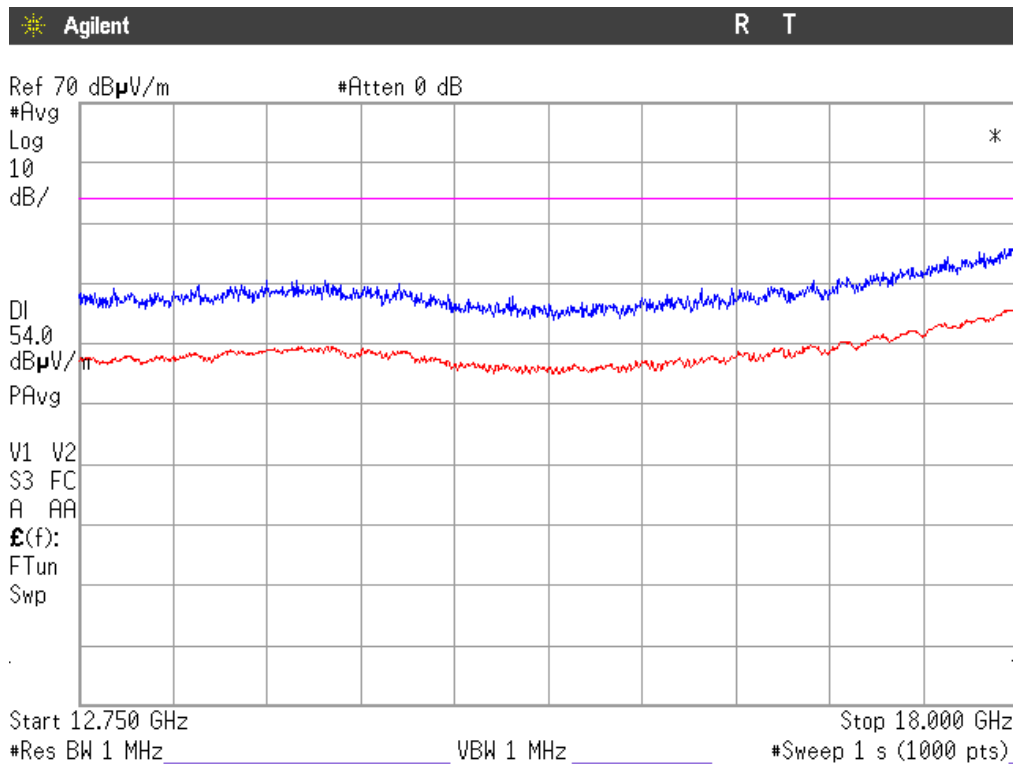


(This plot is valid for all three channels).

FREQUENCY RANGE 18 GHz-25 GHz.

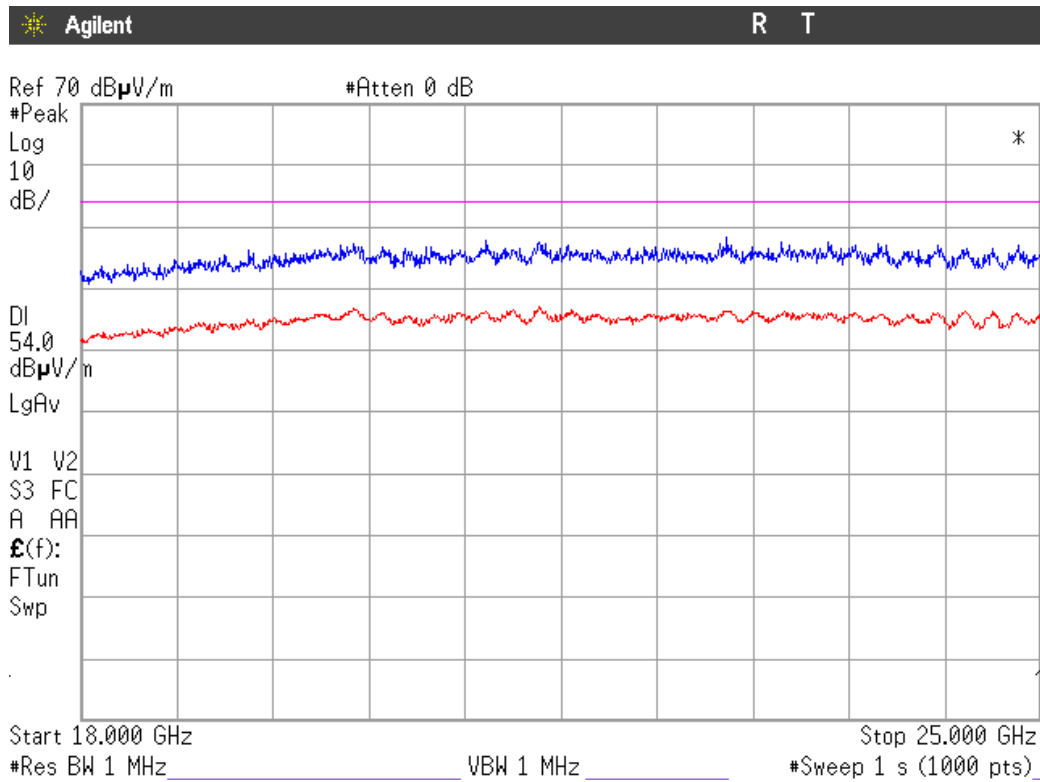


(This plot is valid for all three channels).

FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)

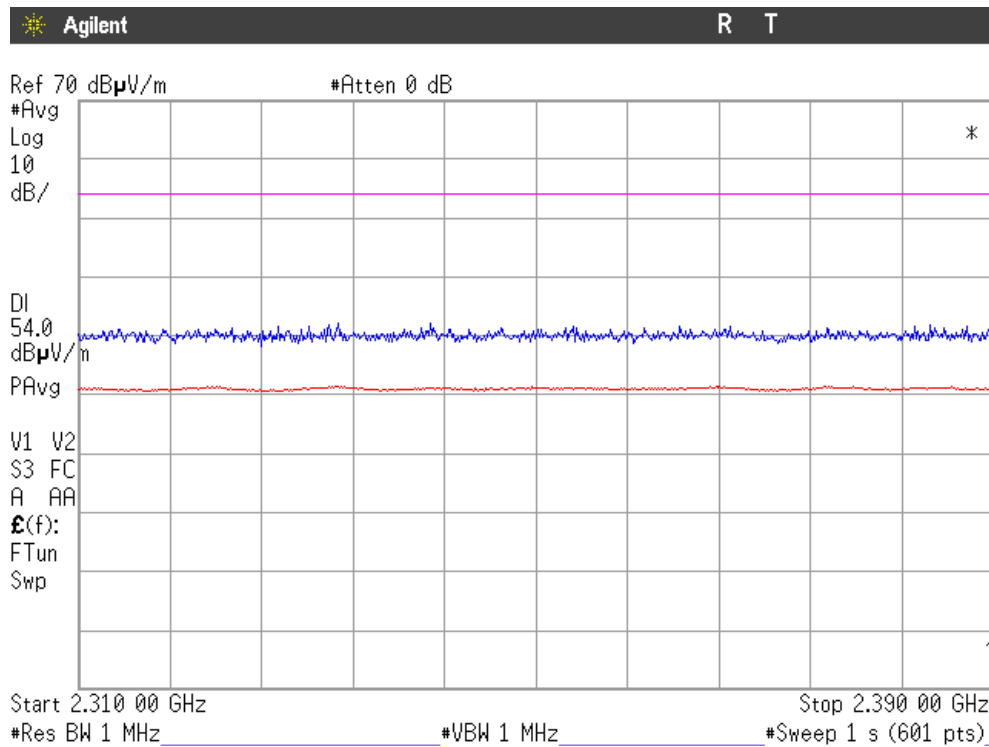

(This plot is valid for all three channels).

FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND)

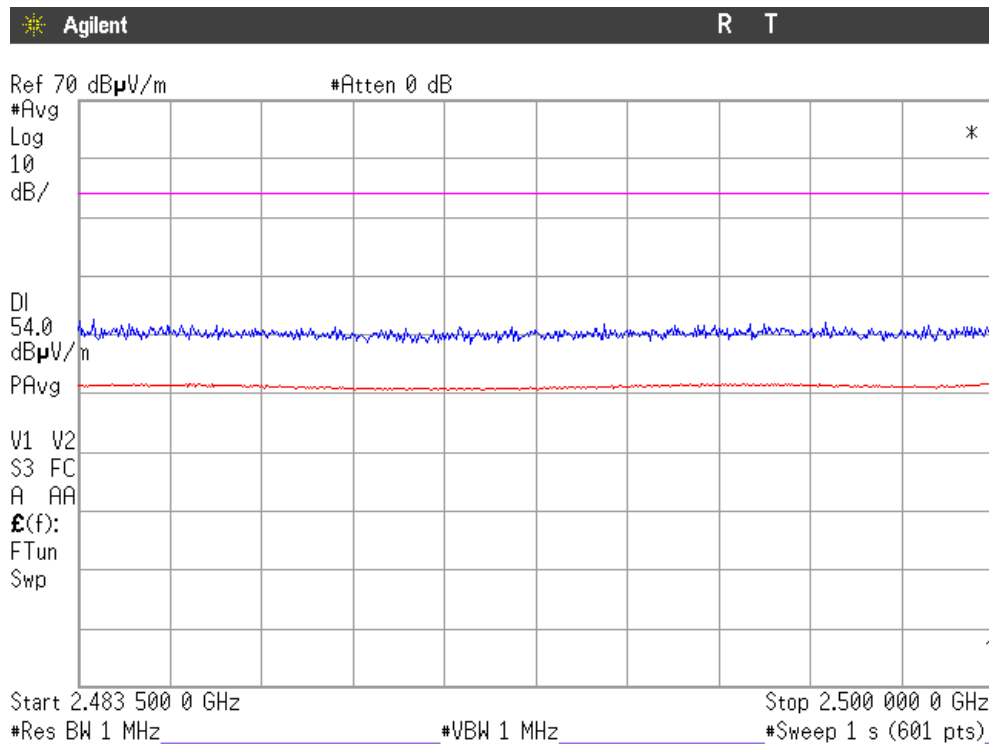

(This plot is valid for all three channels).