

FCC 47 CFR PART 27

Test Report

Product Type : Wireless module
Applicant : Telit Communications S.p.A.
Address : Viale Stazione di Prosecco 5/b, 34010, Trieste, Italy
Trade name : Telit
Model No. : HE920-NA
Test Specification : FCC 47 CFR PART 27 SUBPART L: Oct. 2011
RSS-139 Issue 2, February 2009
RSS-Gen Issue 3, December 2010
ANSI/TIA-603-C-2004
Application Purpose : Class II Permissive Change
Receive Date : Nov. 20, 2013
Test Period : Nov. 25 ~ Dec. 03, 2013
Issue Date : Feb. 26, 2014

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jan. 27, 2014	Initial Issue	
01	Feb. 26, 2014	Revised class II permissive change description and chapter 5 data.	Peggy Chang

Verification of Compliance

Issued Date: 02/26/2014


Product Type : Wireless module
Applicant : Telit Communications S.p.A.
Address : Viale Stazione di Prosecco 5/b, 34010, Trieste, Italy
Trade Name : Telit
Model Number : HE920-NA
FCC ID : RI7HE920NA
IC : 5131A-HE920NA
EUT Rated Voltage : DC 3.8V
Test Voltage : DC 3.8V
Applicable Standard : FCC 47 CFR PART 27 SUBPART L: Oct. 2011
CANADA RSS-139 Issue 2, February 2009
CANADA RSS-Gen Issue 3, December 2010
ANSI/TIA-603-C-2004
Application Purpose : Class II Permissive Change
Test Result : Complied
Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 22H, Part 24E.

The test results of this report relate only to the tested sample identified in this report.


Approved By



(Manager)

(Cran Yang)

Reviewed By

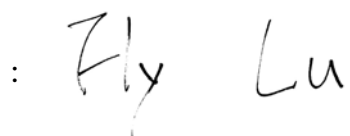

(Testing Engineer)

(Fly Lu)

TABLE OF CONTENTS

1	General Information	6
1.1.	EUT Description	6
1.2.	Mode of Operation.....	7
1.3.	EUT Exercise Software	7
1.4.	Configuration of Test System Details.....	7
1.5.	Test Site Environment.....	8
1.6.	Summary of Test Result	8
2	RF Output Power Test.....	9
2.1.	Limit.....	9
2.2.	Test Instruments	9
2.3.	Test Setup	9
2.4.	Test Procedure	10
2.5.	Uncertainty	10
2.6.	Test Result.....	11
3	Effective Radiated Power / Equivalent Isotropic Radiated Power Test	12
3.1.	Limit.....	12
3.2.	Test Instruments	12
3.3.	Test Setup	12
3.4.	Test Procedure	13
3.5.	Uncertainty	13
3.6.	Test Result.....	14
4	Peak to Average Ratio Test	15
4.1.	Limit.....	15
4.2.	Test Instruments	15
4.3.	Setup.....	15
4.4.	Test Procedure	16
4.5.	Uncertainty	16
4.6.	Test Result.....	16
4.7.	Test Graphs.....	17
5	Emission Bandwidth & Occupied Bandwidth Test.....	18
5.1.	Limit.....	18
5.2.	Test Instruments	18
5.3.	Setup	18
5.4.	Test Procedure	18
5.5.	Uncertainty	19
5.6.	Test Result.....	19

6	Band Edge Test	21
6.1.	Limit.....	21
6.2.	Test Instruments	21
6.3.	Setup	21
6.4.	Test Procedure	22
6.5.	Uncertainty	22
6.6.	Test Result.....	23
7	Conducted Spurious Emission Test	24
7.1.	Limit.....	24
7.2.	Test Instruments	24
7.3.	Setup	24
7.4.	Test Procedure	25
7.5.	Uncertainty	25
7.6.	Test Result.....	25
8	Field Strength of Spurious Radiation Test	27
8.1.	Limit.....	27
8.2.	Test Instruments	27
8.3.	Setup	28
8.4.	Test Procedure	28
8.5.	Uncertainty	28
8.6.	Test Result.....	29
9	Frequency Stability (Temperature & Voltage Variation) Test	33
9.1.	Limit.....	33
9.2.	Test Instruments	33
9.3.	Setup	33
9.4.	Test Procedure	33
9.5.	Uncertainty	34
9.6.	Test Result.....	34

1 General Information

1.1. EUT Description

Applicant		Telit Communications S.p.A.			
Applicant Address		Viale Stazione di Prosecco 5/b, 34010, Trieste, Italy			
Manufacturer		Telit Communications S.p.A.			
Manufacturer Address		Viale Stazione di Prosecco 5/b, 34010, Trieste, Italy			
Product Type		Wireless module			
Trade Name		Telit			
Model Number		HE920-NA			
Class II Permissive Change Description		<p>[Hardware changes] From version 1.00 to 1.10 For HE920-NA, three duplexers respectively for WCDMA FDD II, IV, V have been replaced with smaller ones and several related matching values have been changed. For both HE920-NA, WCDMA Rx diversity antenna switch has been replaced with smaller one from same vendor. For both HE920-NA, PCB has been modified just to reflect the changes described above. GSM and all other parts are 100% same as before.</p> <p>[Software changes] From version 14.10.001 to 14.12.000-B028 For HE920-NA, Qualcomm MDM6200 baseline upgraded to 3.5. Captured differences below have nothing to do with protocols. For HE920-NA, GPRS and EGPRS multi slot class changed from 33 to 10 For HE920-NA, DTM mode class changed from 11 to 9 For HE920-NA, GPS disabled All other changes are related to AT command interfaces and have no influences on previous certifications.</p>			
FCC ID		RI7HE920NA			
IC		5131A-HE920NA			
Mode	WCDMA (RMC 12.2K)	Band	UL Frequency (MHz)	DL Frequency (MHz)	Modulation
		IV	1712.4 ~ 1752.6	2112.4 ~ 2152.6	QPSK
Type of Antenna		Dipole Antenna			
Antenna Gain (dBi)		2.7 dBi			
Max. RF Output Power		27.04 dBm / 0.506 W			
Max. EIRP		29.74 dBm / 0.942 W			
Emission Designator		4M18F9W			

1.2. Mode of Operation

ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: WCDMA Band IV Link Mode
Mode 2: Receive Link Mode

Note: Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Tested System Details


The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1.	Universal Radio Communication Tester	R&S	CMU200	109369	N/A

1.3. EUT Exercise Software

1.	Setup the EUT and Base Station (CMU200) as shown on 1.4.
2.	Turn on the power of all equipment.

1.4. Configuration of Test System Details

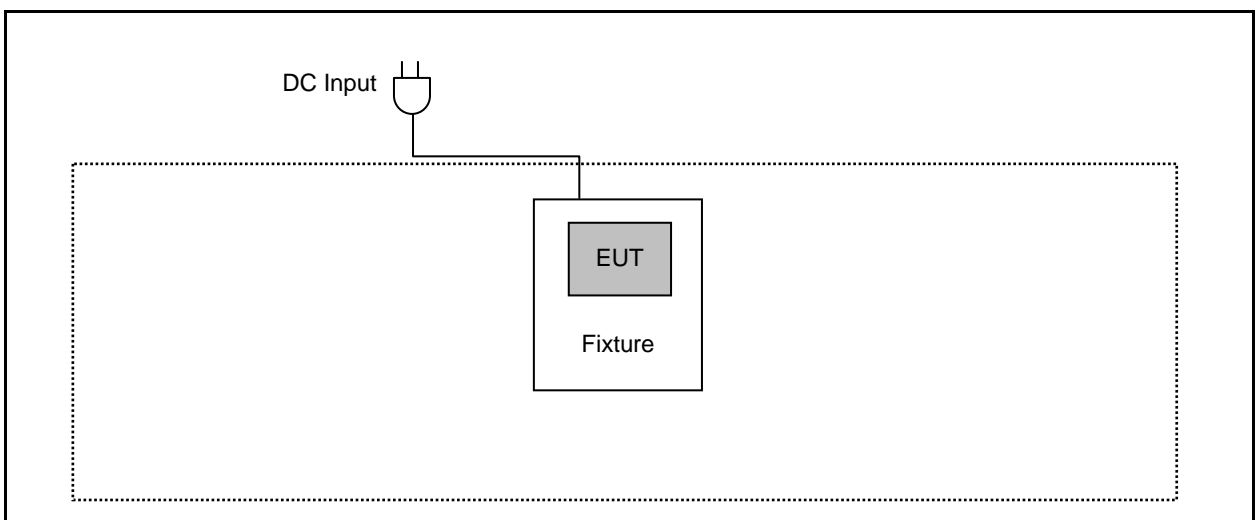

1.5. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

1.6. Summary of Test Result

Description	FCC Rule	IC Rule	Limit	Result
Conducted Output Power	§2.1046	N/A	N/A	Pass
Equivalent Isotropic Radiated Power	§27.50(d)(2)	RSS-139 (6.4) SRSP-513(5.1.2)	< 1 Watts	Pass
Peak to average ratio	§27.50(d)	RSS-139 (6.4)	< 13 dB	Pass
Emission Bandwidth & Occupied Bandwidth	§2.1049 §27.53(g)	N/A	N/A	Pass
Band Edge Measurement	§2.1051 §27.53(g)	RSS-139 (6.5)	$< 43 + 10 \log_{10}(P[\text{Watts}])$	Pass
Conducted Emission	§2.1051 §27.53(g)	RSS-139 (6.5)	$< 43 + 10 \log_{10}(P[\text{Watts}])$	Pass
Field Strength of Spurious Radiation	§2.1053 §27.53(g)	RSS-139 (6.5)	$< 43 + 10 \log_{10}(P[\text{Watts}])$	Pass
Frequency Stability for Temperature & Voltage	§2.1055 §27.54	RSS-139(6.3)	< 2.5 ppm	Pass

2 RF Output Power Test

2.1. Limit

N/A


2.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	08/07/2012	(2)
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/19/2012	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/19/2012	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

2.3. Test Setup

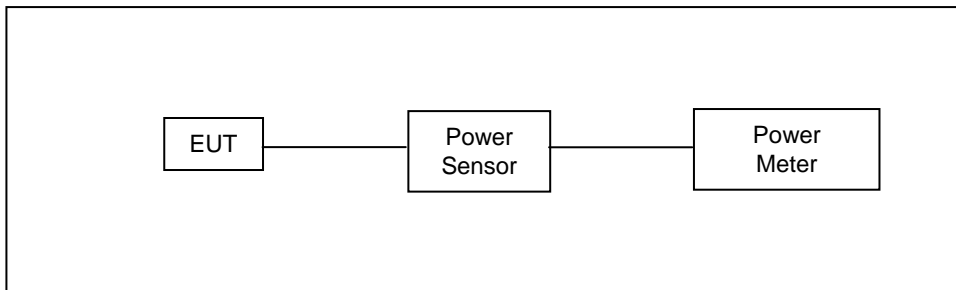

2.4. Test Procedure

The measurement is made according to ANSI/TIA-603-C-2004 as follows:

1. The transmitter output was connected to power meter and base station through power divider.
2. Set base station for EUT at WCDMA Band IV, power level was set to maximum.
3. Select lowest, middle, and highest channels for each band.

HSDPA Data Devices setup

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1,2)}$	CM (dB) ⁽³⁾	MRP (dB) ⁽³⁾
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	12/15 ⁽⁴⁾	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note

1. Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
2. For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) 21`h HS-DPCCH test in clause 5.13.1A and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$ and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$
3. CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
4. For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Table 1. Setup for Release 5 HSDPA

2.5. Uncertainty

The measurement uncertainty is defined as for RF output power measurement is 1.2 dB.

2.6. Test Result

Model Number	HE920-NA					
Test Item	RF Output Power					
Date of Test	11/25/2013				Test Site	TE05
Bands	Sub-Test	Frequency (MHz)	Average Power		Peak Power	
			(dBm)	(W)	(dBm)	(W)
WCDMA IV (RMC 12.2K)	-----	1712.4	23.85	0.243	27.04	0.506
		1732.6	23.75	0.237	26.98	0.499
		1752.6	23.54	0.226	26.86	0.485
HSDPA IV	1	1712.4	22.81	0.191	26.02	0.400
		1732.6	22.69	0.186	25.91	0.390
		1752.6	22.52	0.179	25.80	0.380
	2	1712.4	22.83	0.192	26.04	0.402
		1732.6	22.71	0.187	25.92	0.391
		1752.6	22.52	0.179	25.80	0.380
	3	1712.4	22.32	0.171	25.53	0.357
		1732.6	22.19	0.166	25.41	0.348
		1752.6	22.01	0.159	25.29	0.338
	4	1712.4	22.31	0.170	25.52	0.356
		1732.6	22.18	0.165	25.40	0.347
		1752.6	22.00	0.158	25.28	0.337
HSUPA IV	1	1712.4	22.36	0.172	25.53	0.357
		1732.6	22.27	0.169	25.47	0.352
		1752.6	22.01	0.159	25.31	0.340
	2	1712.4	20.35	0.108	23.52	0.225
		1732.6	20.26	0.106	23.46	0.222
		1752.6	20.02	0.100	23.32	0.215
	3	1712.4	21.37	0.137	24.54	0.284
		1732.6	21.27	0.134	24.47	0.280
		1752.6	21.02	0.126	24.32	0.270
	4	1712.4	20.33	0.108	23.50	0.224
		1732.6	20.23	0.105	23.43	0.220
		1752.6	20.00	0.100	23.30	0.214
	5	1712.4	22.37	0.173	25.54	0.358
		1732.6	22.29	0.169	25.49	0.354
		1752.6	22.01	0.159	25.31	0.340

Note: The testing result was used peak detector.

3 Effective Radiated Power / Equivalent Isotropic Radiated Power Test

3.1. Limit

For FCC Part 27.50(d)(2): The EIRP of mobile transmitters are limited to 1 watt for 1710~1755 MHz.


3.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	109369	08/07/2012	(2)
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/19/2012	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/19/2012	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

3.3. Test Setup

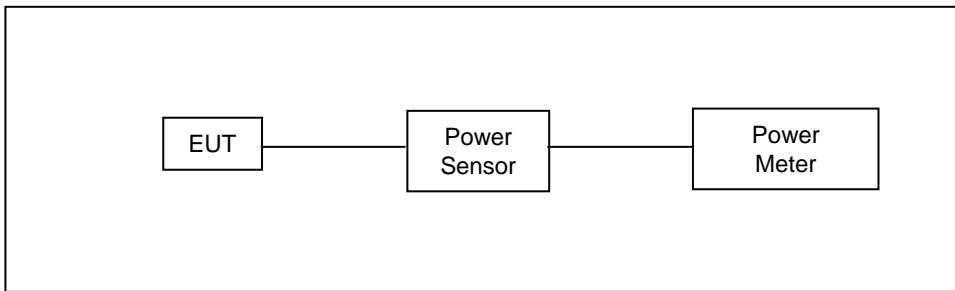

3.4. Test Procedure

The measurement is made according to ANSI/TIA-603-C-2004 as follows:

1. The transmitter output was connected to power meter and base station through power divider.
2. Set base station for EUT at WCDMA Band IV, power level was set to maximum.
3. Select lowest, middle, and highest channels for each band.

HSDPA Data Devices setup

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1,2)}$	CM (dB) ⁽³⁾	MRP (dB) ⁽³⁾
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	12/15 ⁽⁴⁾	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note

1. Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
2. For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude(EVM) 21`h HS-DPCCH test in clause 5.13.1A and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$ and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$
3. CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
4. For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Table 2. Setup for Release 5 HSDPA

3.5. Uncertainty

The measurement uncertainty is defined as for RF output power measurement is 1.2 dB.

3.6. Test Result

Model Number	HE920-NA						
Test Item	E.I.R.P.						
Test Mode	Mode 1						
Date of Test	12/03/2013				Test Site	TE01	
Bands	Modulation Type	Frequency (MHz)	Peak Conducted power (dBm)	Antenna Gain (dBi)	EIRP		Limit
					(dBm)	(W)	
WCDMA IV (RMC 12.2K)	QPSK	1712.4	27.04	2.70	29.74	0.942	< 1W
		1732.6	26.98	2.70	29.68	0.929	< 1W
		1752.6	26.86	2.70	29.56	0.904	< 1W

Note: EIRP = Peak Conducted power + Antenna Gain

4 Peak to Average Ratio Test

4.1. Limit

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.


4.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/16/2013	(1)
Wideband Radio Communication Test	R & S	CMW500	103168	11/05/2013	(1)
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

4.3. Setup

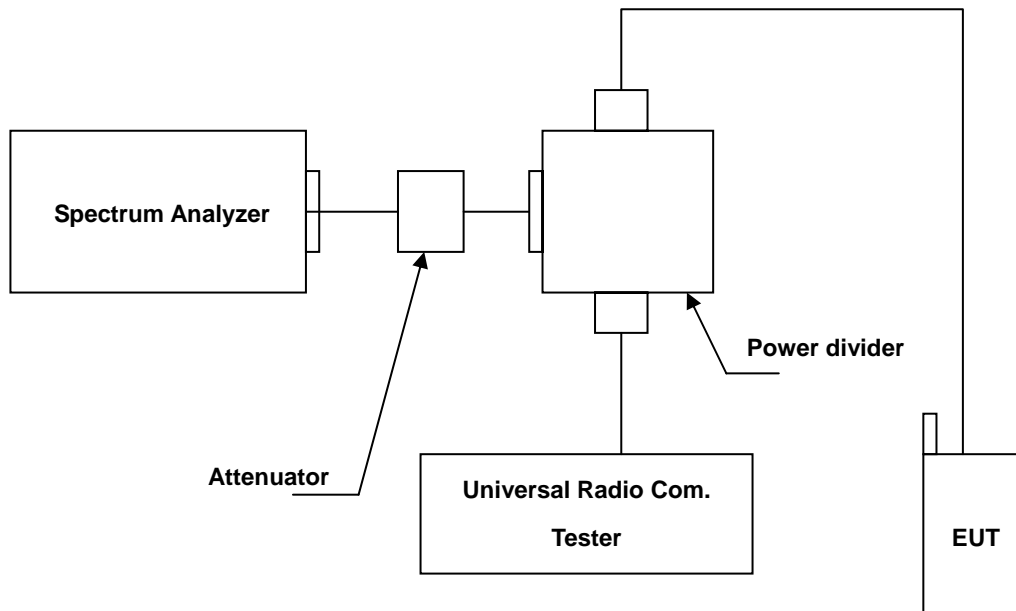

4.4. Test Procedure

The measurement is made according to FCC rules part 27:

- a. Set resolution/measurement bandwidth signal's occupied bandwidth;
- b. Set the number of counts to a value that stabilizes the measured CCDF curve;
- c. Record the maximum PAPR level associated with a probability of 0.1%.

4.5. Uncertainty

The measurement uncertainty is defined as for Conducted Power measurement is 1.2 dB.

4.6. Test Result

Model Number	HE920-NA				
Test Item	Peak to Average Ratio				
Test Mode	Mode 1				
Date of Test	12/11/2013			Test Site	TE05
Bands	Channel	Frequency (MHz)	Peak to Average Ratio (dB)	Limit (dB)	
WCDMA IV	1312	1712.4	3.07	< 13	
	1413	1732.6	3.21	< 13	
	1513	1752.6	3.15	< 13	

4.7. Test Graphs

Mode 1																	
1712.4 MHz	<p>Average Power 23.56 dBm 53.55 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>1.68 dB</td></tr> <tr><td>1.0 %</td><td>2.60 dB</td></tr> <tr><td>0.1 %</td><td>3.07 dB</td></tr> <tr><td>0.01 %</td><td>3.32 dB</td></tr> <tr><td>0.001 %</td><td>3.46 dB</td></tr> <tr><td>0.0001 %</td><td>3.58 dB</td></tr> <tr><td>Peak</td><td>3.58 dB</td></tr> <tr><td></td><td>27.14 dBm</td></tr> </table> <p>Center Freq: 1.712400000 GHz Trig: Free Run Counts: 1.56 M5.00 Mpt Info BW: 5.0000 MHz</p>	10.0 %	1.68 dB	1.0 %	2.60 dB	0.1 %	3.07 dB	0.01 %	3.32 dB	0.001 %	3.46 dB	0.0001 %	3.58 dB	Peak	3.58 dB		27.14 dBm
10.0 %	1.68 dB																
1.0 %	2.60 dB																
0.1 %	3.07 dB																
0.01 %	3.32 dB																
0.001 %	3.46 dB																
0.0001 %	3.58 dB																
Peak	3.58 dB																
	27.14 dBm																
1732.6 MHz	<p>Average Power 23.35 dBm 52.82 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>1.72 dB</td></tr> <tr><td>1.0 %</td><td>2.70 dB</td></tr> <tr><td>0.1 %</td><td>3.21 dB</td></tr> <tr><td>0.01 %</td><td>3.47 dB</td></tr> <tr><td>0.001 %</td><td>3.62 dB</td></tr> <tr><td>0.0001 %</td><td>3.70 dB</td></tr> <tr><td>Peak</td><td>3.75 dB</td></tr> <tr><td></td><td>27.10 dBm</td></tr> </table> <p>Center Freq: 1.740000000 GHz Trig: Free Run Counts: 4.94 M5.00 Mpt Info BW: 5.0000 MHz</p>	10.0 %	1.72 dB	1.0 %	2.70 dB	0.1 %	3.21 dB	0.01 %	3.47 dB	0.001 %	3.62 dB	0.0001 %	3.70 dB	Peak	3.75 dB		27.10 dBm
10.0 %	1.72 dB																
1.0 %	2.70 dB																
0.1 %	3.21 dB																
0.01 %	3.47 dB																
0.001 %	3.62 dB																
0.0001 %	3.70 dB																
Peak	3.75 dB																
	27.10 dBm																
1752.6 MHz	<p>Average Power 23.43 dBm 53.21 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>1.70 dB</td></tr> <tr><td>1.0 %</td><td>2.66 dB</td></tr> <tr><td>0.1 %</td><td>3.15 dB</td></tr> <tr><td>0.01 %</td><td>3.40 dB</td></tr> <tr><td>0.001 %</td><td>3.54 dB</td></tr> <tr><td>0.0001 %</td><td>3.65 dB</td></tr> <tr><td>Peak</td><td>3.69 dB</td></tr> <tr><td></td><td>27.12 dBm</td></tr> </table> <p>Center Freq: 1.752600000 GHz Trig: Free Run Counts: 3.43 M5.00 Mpt Info BW: 5.0000 MHz</p>	10.0 %	1.70 dB	1.0 %	2.66 dB	0.1 %	3.15 dB	0.01 %	3.40 dB	0.001 %	3.54 dB	0.0001 %	3.65 dB	Peak	3.69 dB		27.12 dBm
10.0 %	1.70 dB																
1.0 %	2.66 dB																
0.1 %	3.15 dB																
0.01 %	3.40 dB																
0.001 %	3.54 dB																
0.0001 %	3.65 dB																
Peak	3.69 dB																
	27.12 dBm																

5 Emission Bandwidth & Occupied Bandwidth Test

5.1. Limit

The Occupied Bandwidth Limit:

N/A.


5.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Universal Radio Communication Tester	R & S	CMU200	109369	08/07/2012	(2)
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/16/2013	(1)
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power Divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

5.3. Setup

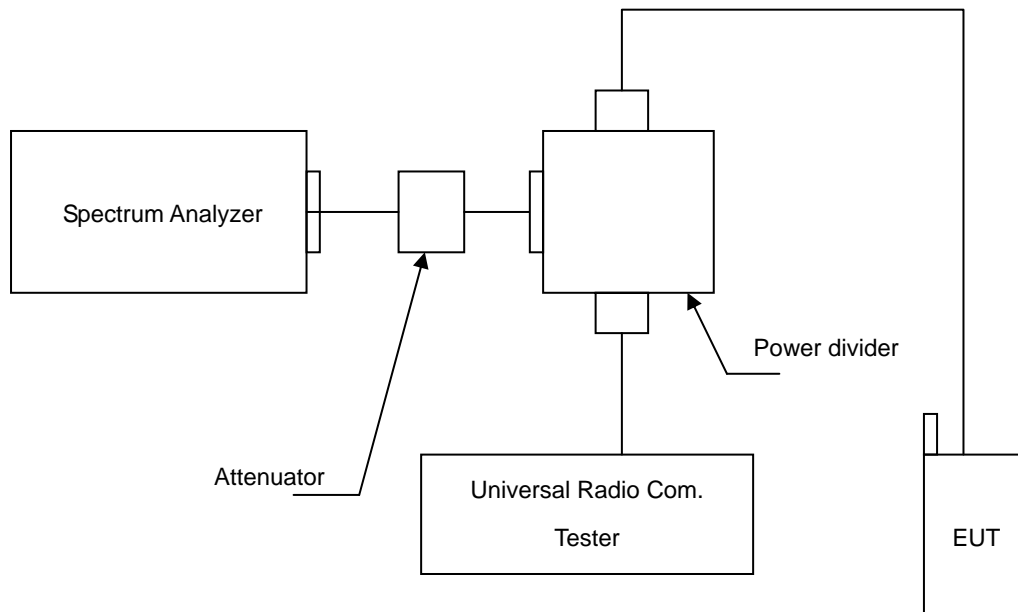

5.4. Test Procedure

The measurement is made according to FCC rules part 27:




1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers was measured.

5.5. Uncertainty

The measurement uncertainty is defined as $\pm 10\text{Hz}$

5.6. Test Result

Model Number	HE920-NA				
Test Item	Emission Bandwidth & Occupied Bandwidth				
Test Mode	Mode 1				
Date of Test	11/25/2013			Test Site	TE05
Channel No.	Frequency (MHz)	-26dB Bandwidth (MHz)	99 % Bandwidth (MHz)	Limit	Note
1312	1712.4	4.691	4.1403	N/A	RBW:517kHz , VBW:150kHz
1413	1732.6	4.670	4.1446	N/A	RBW:51kHz , VBW:150kHz
1513	1752.6	4.691	4.1824	N/A	RBW:51kHz , VBW:150kHz

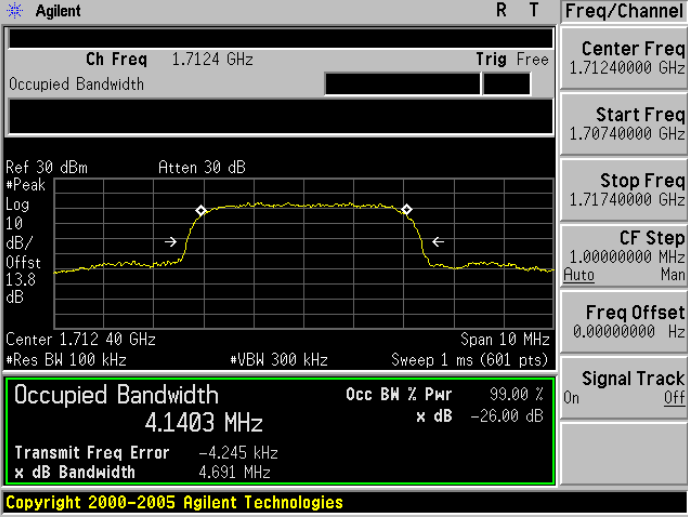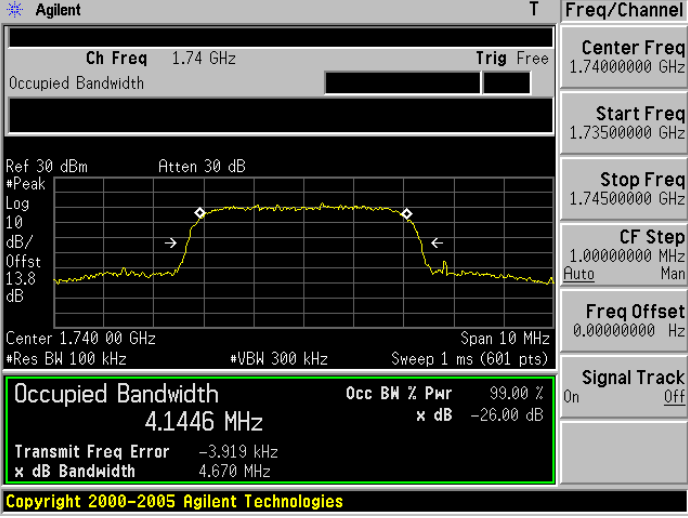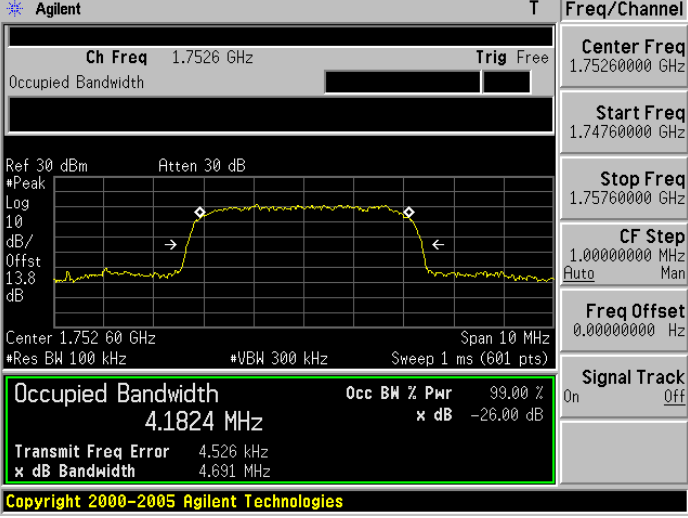Mode 1	
<p>CH 1312</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 1.7124 GHz Trig Free</p> <p>Center Freq 1.71240000 GHz</p> <p>Start Freq 1.70740000 GHz</p> <p>Stop Freq 1.71740000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>CH1413</p>	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 1.74 GHz Trig Free</p> <p>Center Freq 1.74000000 GHz</p> <p>Start Freq 1.73500000 GHz</p> <p>Stop Freq 1.74500000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>CH1513</p>	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 1.7526 GHz Trig Free</p> <p>Center Freq 1.75260000 GHz</p> <p>Start Freq 1.74760000 GHz</p> <p>Stop Freq 1.75760000 GHz</p> <p>CF Step 1.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Copyright 2000-2005 Agilent Technologies</p>

6 Band Edge Test

6.1. Limit

The Band Edge Limit:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.


6.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Universal Radio Communication Tester	R & S	CMU200	109369	08/07/2012	(2)
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/16/2013	(1)
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power Divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

6.3. Setup

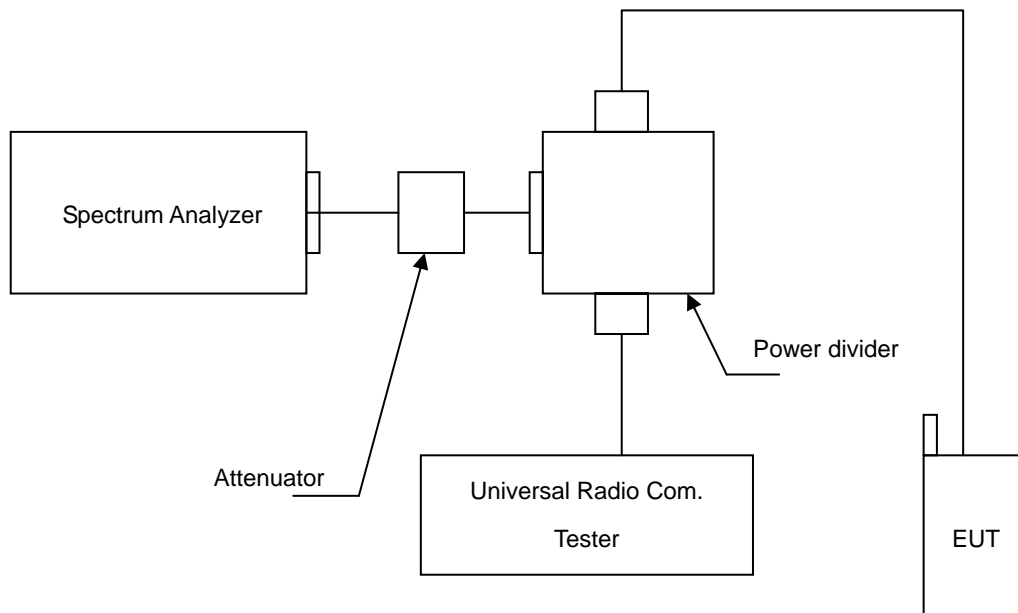

6.4. Test Procedure

The measurement is made according to FCC rules part 27:



1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly BW/100.
3. The band edge setting:RB=47 kHz; VB=150 kHz for WCDMA Band IV.

6.5. Uncertainty

The measurement uncertainty is defined as $\pm 10\text{Hz}$

6.6. Test Result

Model Number	HE920-NA				
Test Item	Band Edge				
Test Mode	Mode 1				
Date of Test	11/25/2013	Test Site		TE05	
Band	Channel	Frequency (MHz)	Band Edge (dBm)	Limit (dBm)	Result
Lower	1312	1710.00	-35.76	-13	Pass
Higher	1513	1755.00	-38.45	-13	Pass

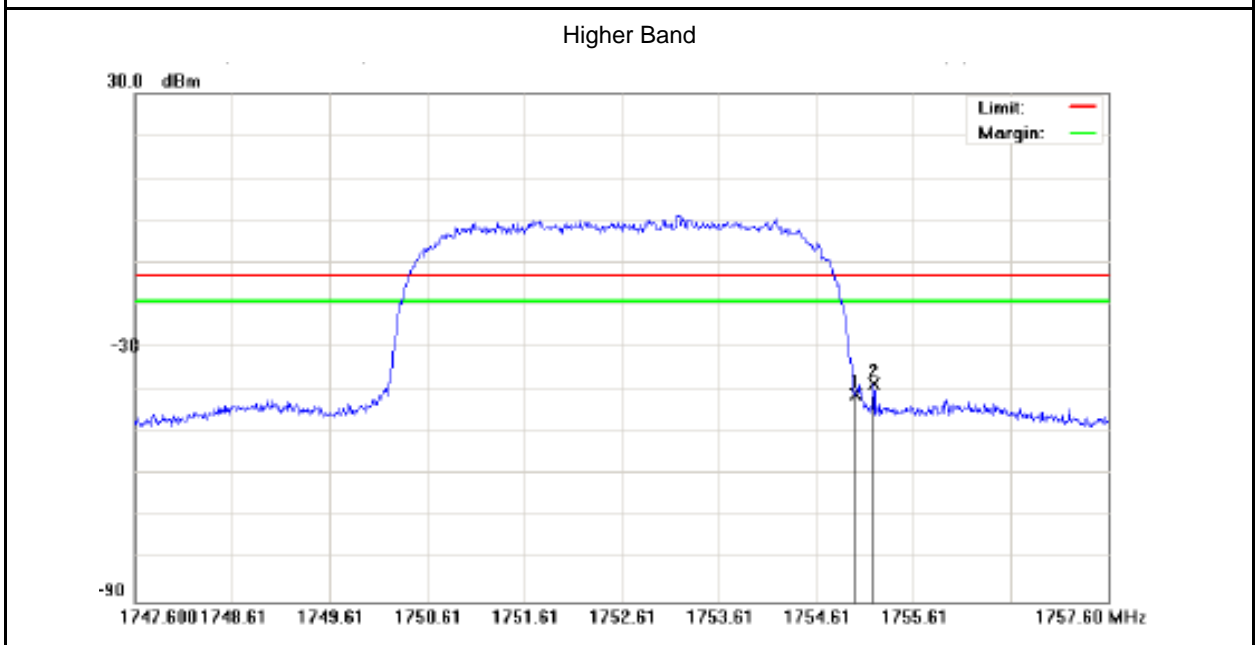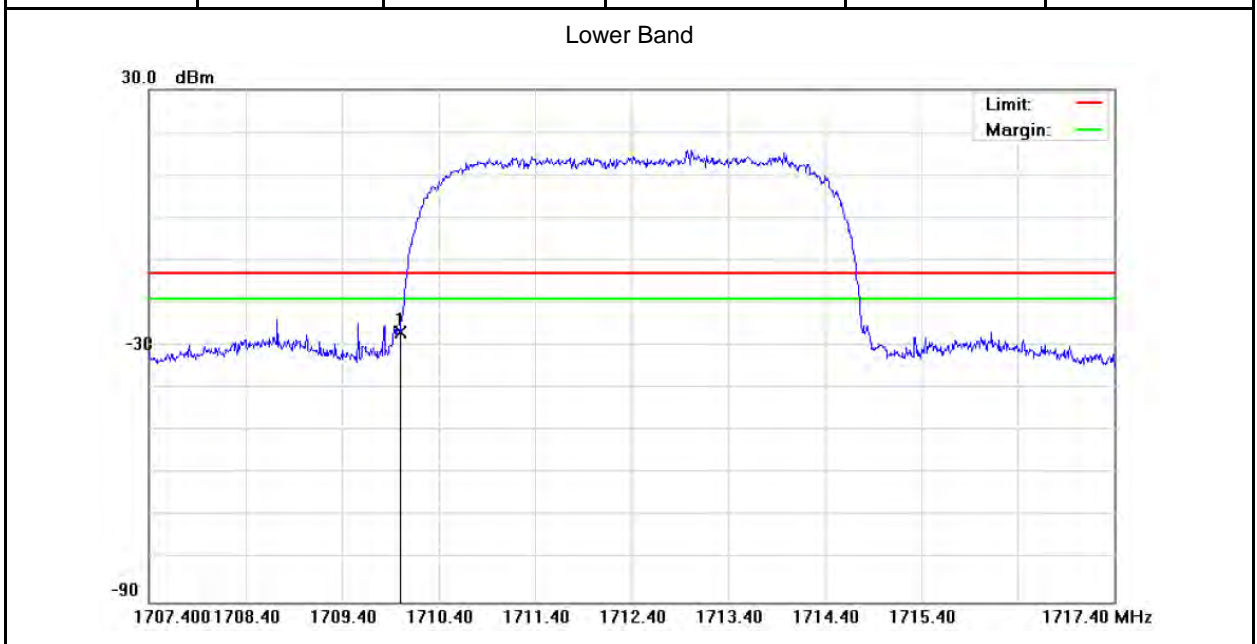

7 Conducted Spurious Emission Test

7.1. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

7.2. Test Instruments


Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Universal Radio Communication Tester	R & S	CMU200	109369	08/07/2012	(2)
Spectrum Analyzer	Agilent	E4445A	MY46181986	05/16/2013	(1)
Attenuator	RADIALL	R41572000	0603033073	N.C.R.	-----
Power Divider	Agilent	87302C	3239A00760	N.C.R.	-----
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.


Note: N.C.R. = No Calibration Request.

7.3. Setup

Below 2.8GHz

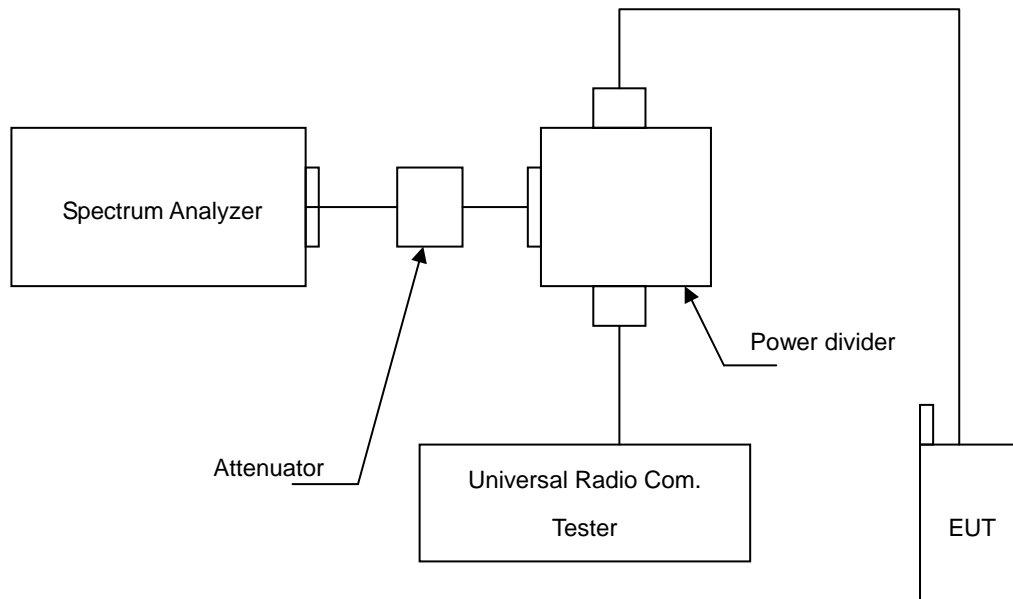

Above 2.8GHz

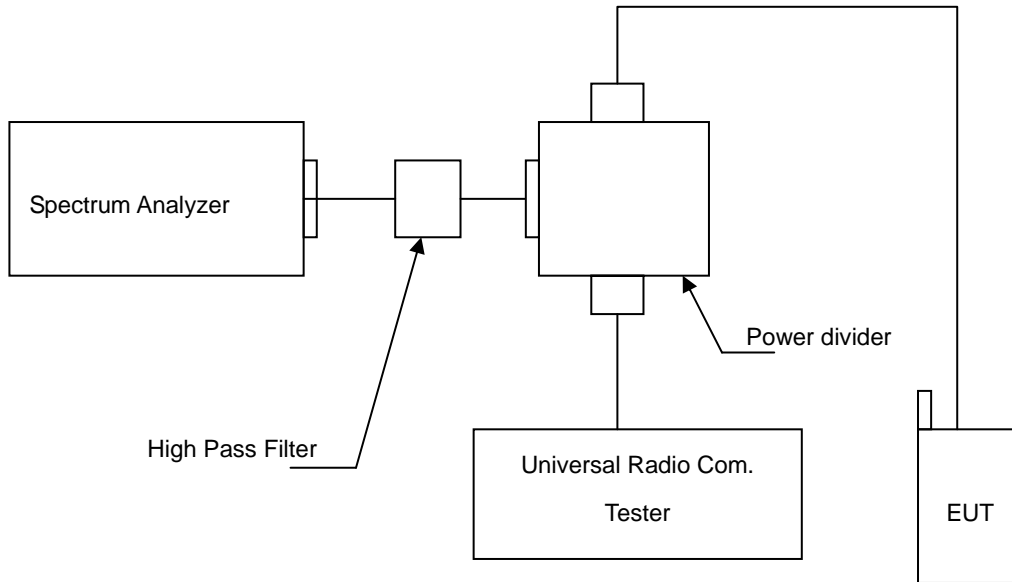

7.4. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.
4. Test setting at WCDMA Band IV RB=1MHz, VB=1MHz.

7.5. Uncertainty

The measurement uncertainty is evaluated as ± 2.24 dB.

7.6. Test Result


Model Number	HE920-NA		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 1		
Date of Test	11/25/2013	Test Site	TE05

File :HE920-NA(CH1312)

Data :#1

Date: 2013/11/25

Time: 上午 11:57:35

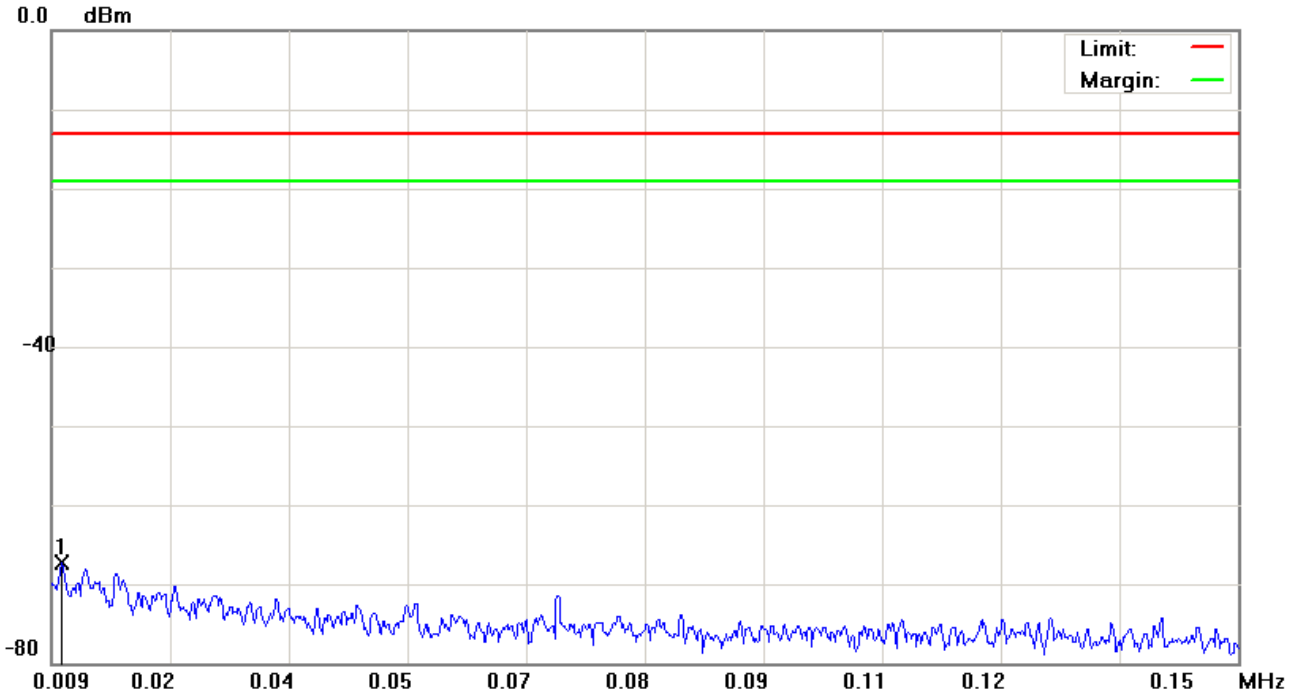

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1 KHz VBW: 3 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0102	-78.72	11.34	-67.38	-13.00	-54.38			peak


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1312)

Data :#2

Date: 2013/11/25

Time: 上午 11:57:59

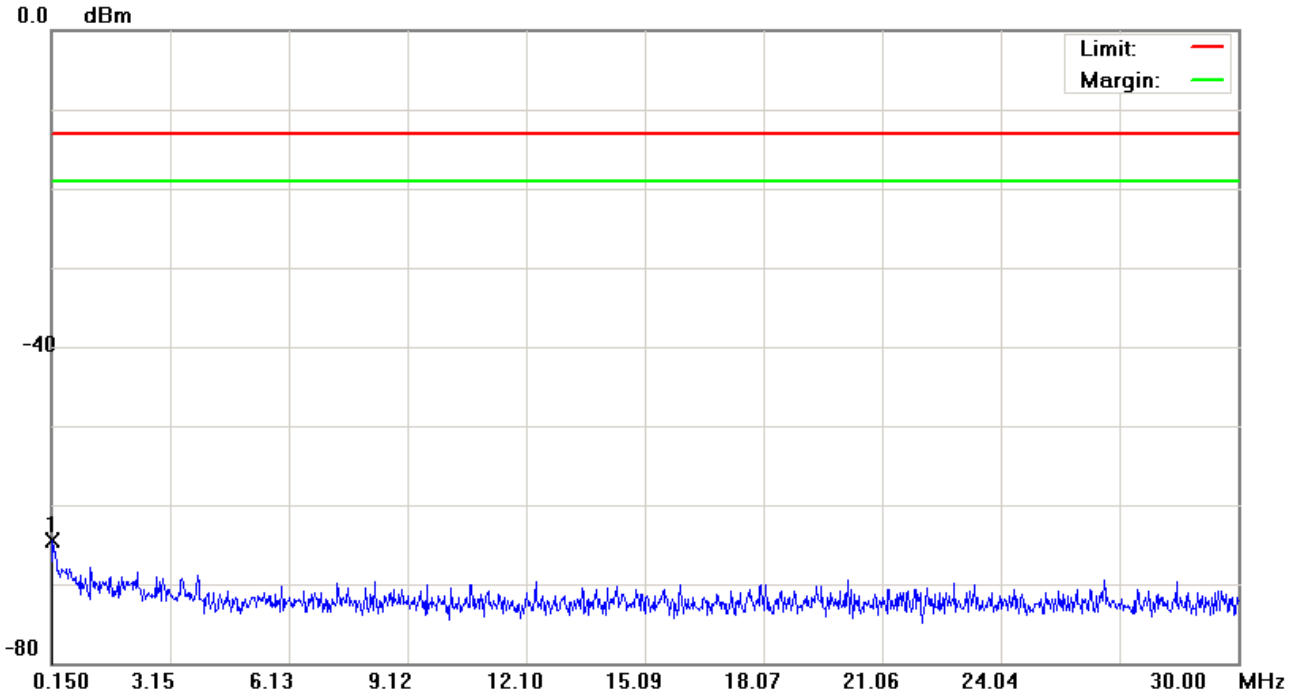

Site: site #1

 Polarization: **Conducted power**

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: Wireless module

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: HE920-NA

Mode: WCDMA Band IV

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	0.1650	-76.98	12.46	-64.52	-13.00	-51.52	peak			


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1312)

Data :#3

Date: 2013/11/25

Time: 上午 11:58:23

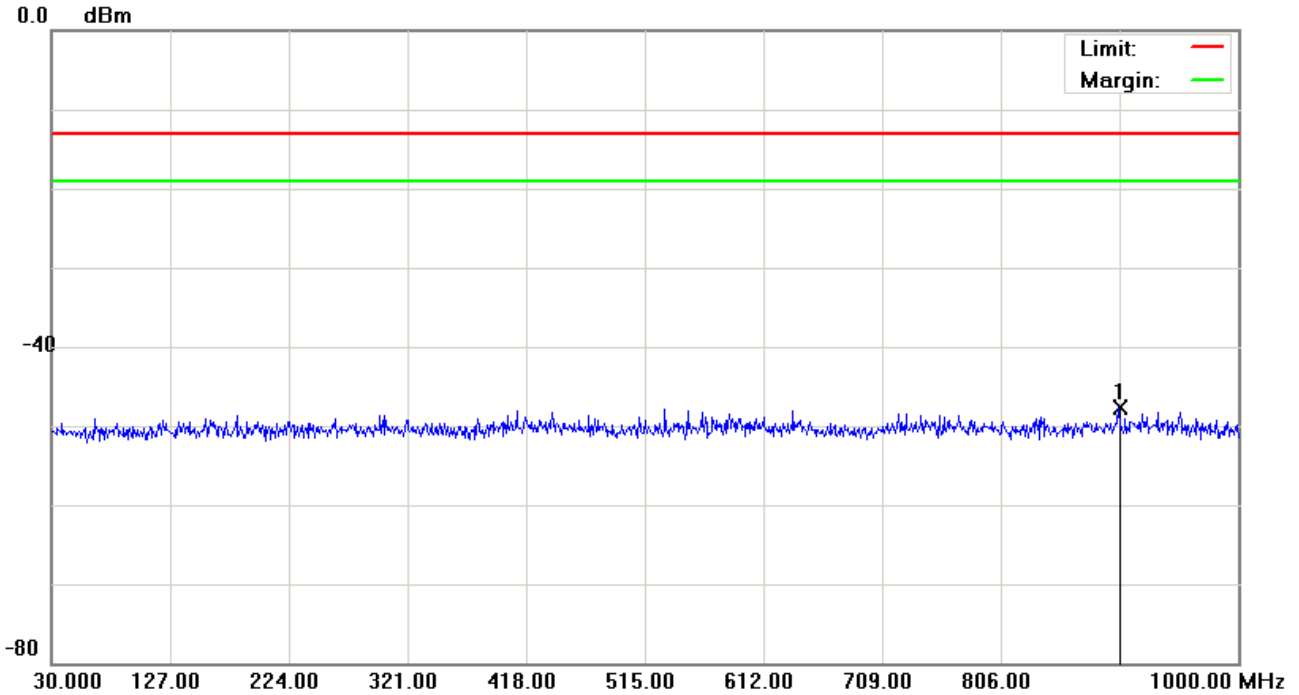

Site: site #1

 Polarization: **Conducted power**

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: Wireless module

Distance:

RBW: 100 KHz VBW: 300 KHz

M/N: HE920-NA

Mode: WCDMA Band IV

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	902.5150	-60.96	13.24	-47.72	-13.00	-34.72	peak			


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1312)

Data :#4

Date: 2013/11/25

Time: 下午 01:16:39

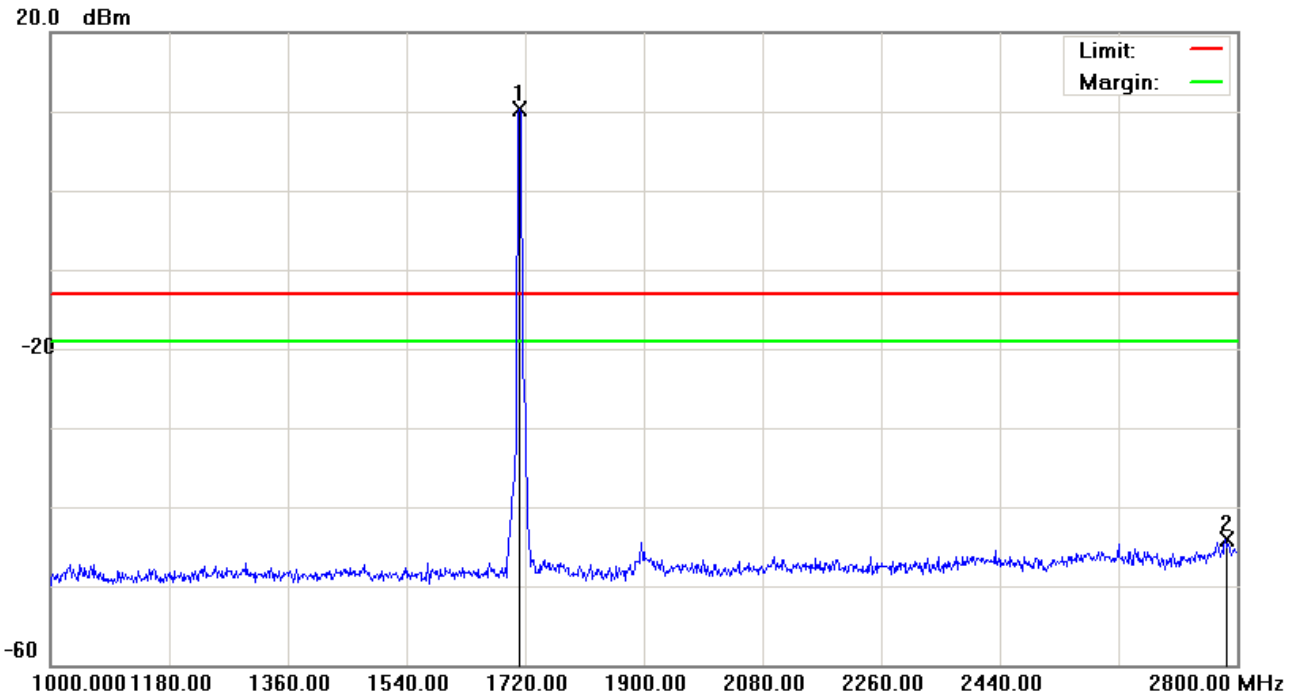

Site: site #1

 Polarization: Conducted power

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: Wireless module

Distance:

RBW: 1000 KHz VBW: 3000 KHz

M/N: HE920-NA

Mode: WCDMA Band IV

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	1711.000	5.89	4.35	10.24	-13.00	23.24	peak		Tx
2		2782.900	-49.98	5.88	-44.10	-13.00	-31.10	peak		


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1312)

Data :#5

Date: 2013/11/25

Time: 上午 09:17:51

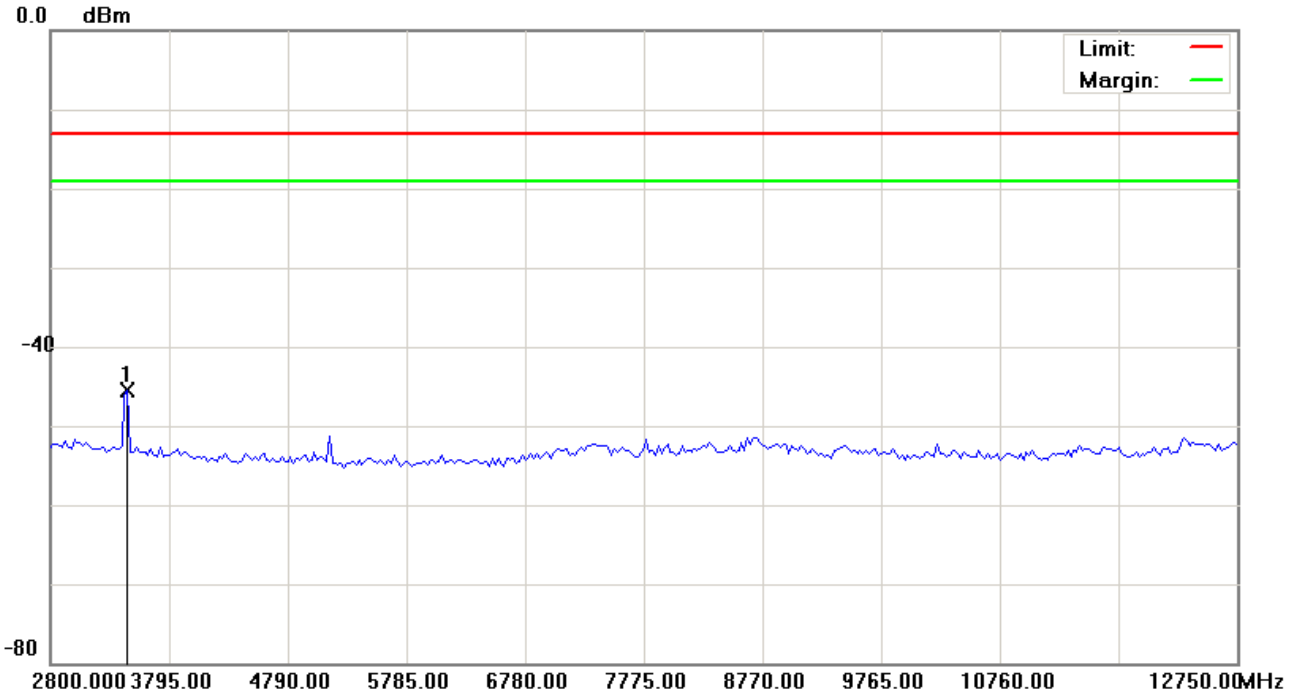

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	3446.750	-50.65	5.08	-45.57	-13.00	-32.57			peak

*:Maximum data x:Over limit !:over margin


File :HE920-NA(CH1312)

Data :#6

Date: 2013/11/25

Time: 上午 09:18:13

0.0 dBm

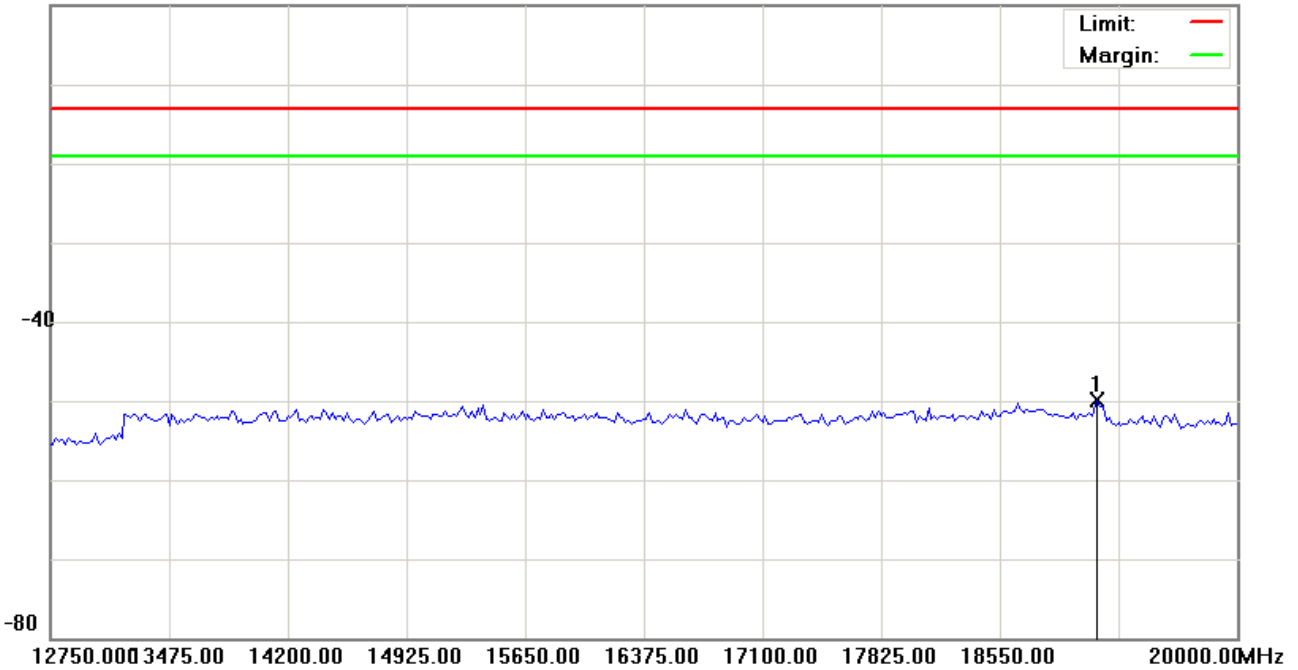

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	19148.125	-57.04	7.20	-49.84	-13.00	-36.84			peak


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1450)

Data :#1

Date: 2013/11/25

Time: 上午 11:59:13

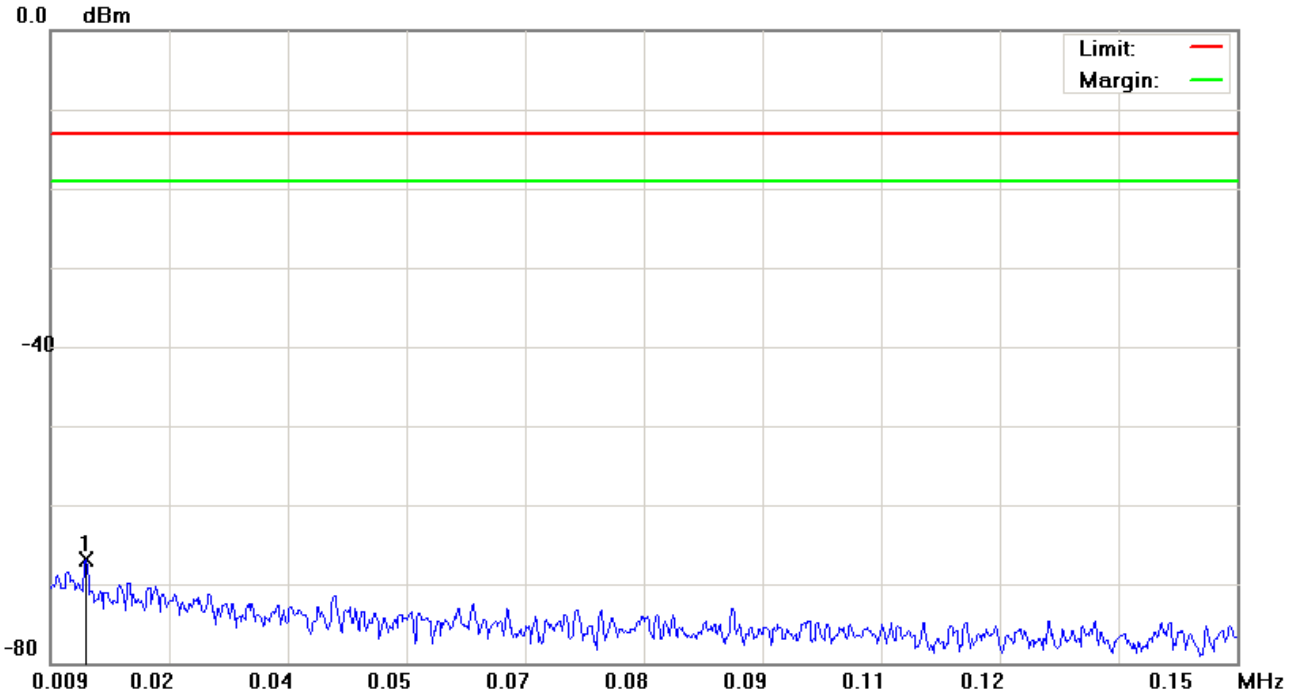

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1 KHz VBW: 3 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0132	-78.31	11.37	-66.94	-13.00	-53.94			peak


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1450)

Data :#2

Date: 2013/11/25

Time: 上午 11:59:37

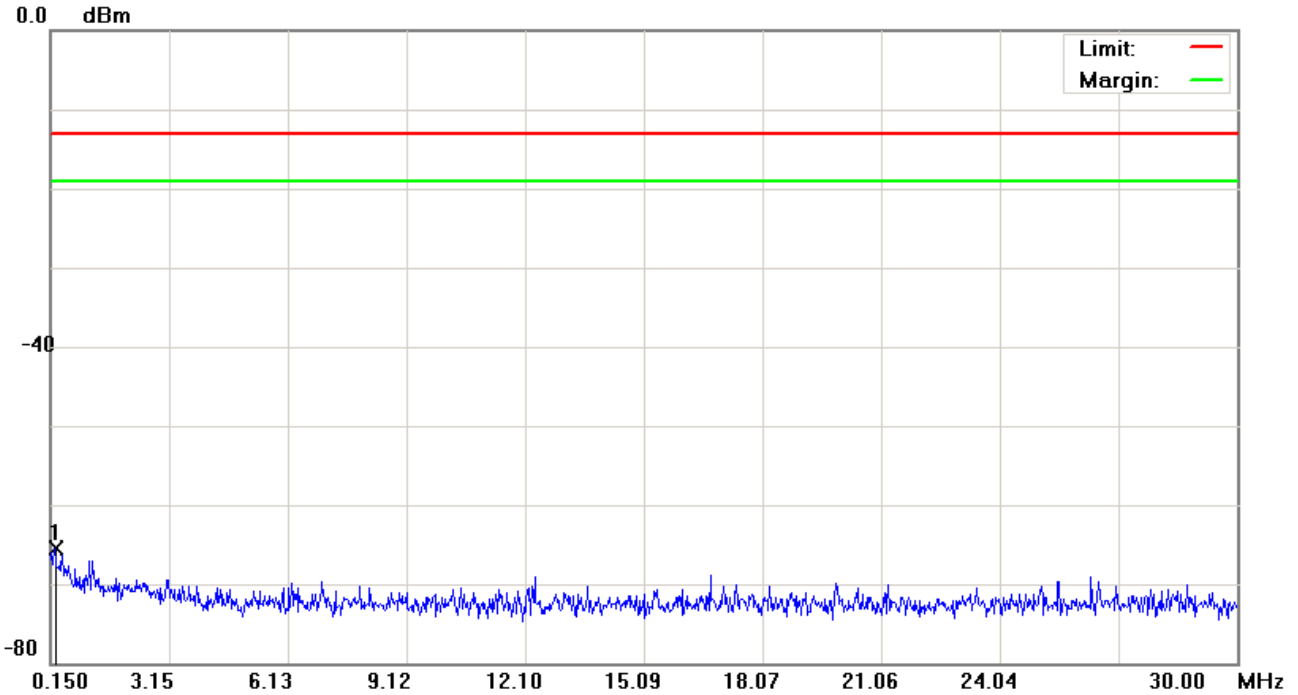

Site: site #1

 Polarization: **Conducted power**

Temperature: 26 °C

Limit: FCC Part 27 conducted(9k-26.5G)

Power: DC 3.8V

Humidity: 55 %

EUT: Wireless module

Distance:

RBW: 10 KHz VBW: 30 KHz

M/N: HE920-NA

Mode: WCDMA Band IV

Note:

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.2545	-78.05	12.53	-65.52	-13.00	-52.52	peak		


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1450)

Data :#3

Date: 2013/11/25

Time: 下午 12:00:01

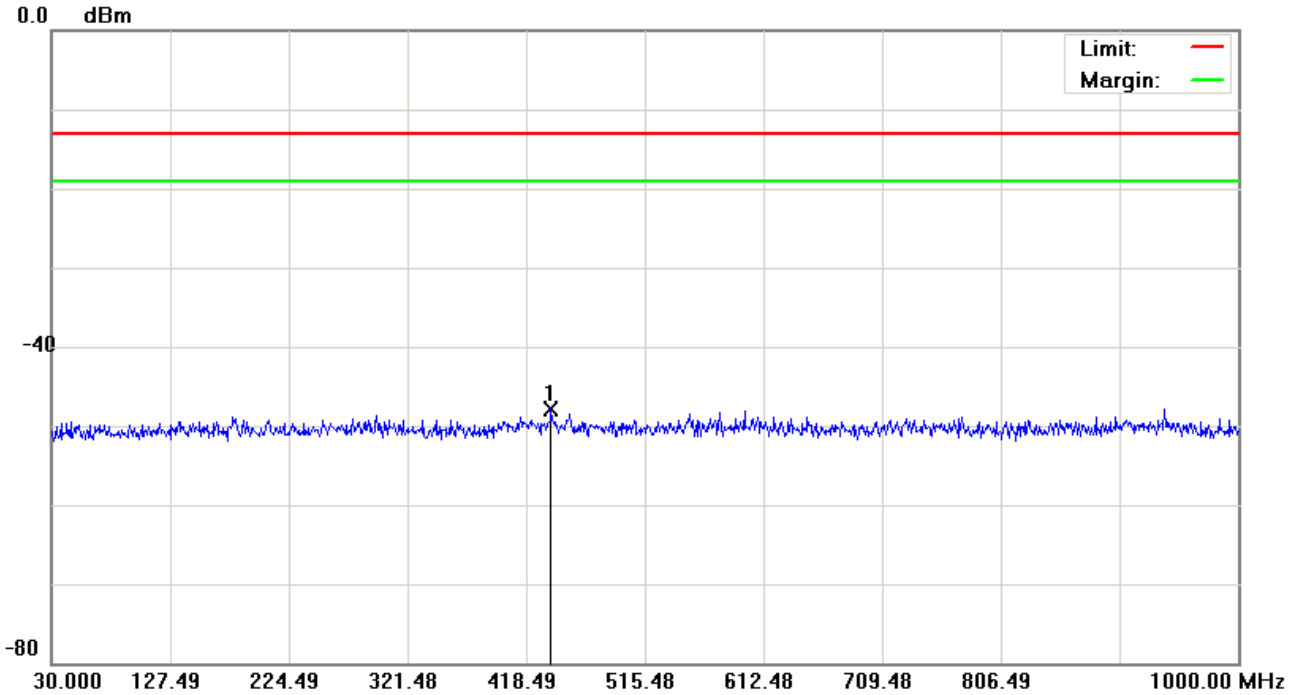

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 100 KHz VBW: 300 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	438.3700	-61.06	13.22	-47.84	-13.00	-34.84	peak		


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1450)

Data :#4

Date: 2013/11/25

Time: 下午 01:18:28

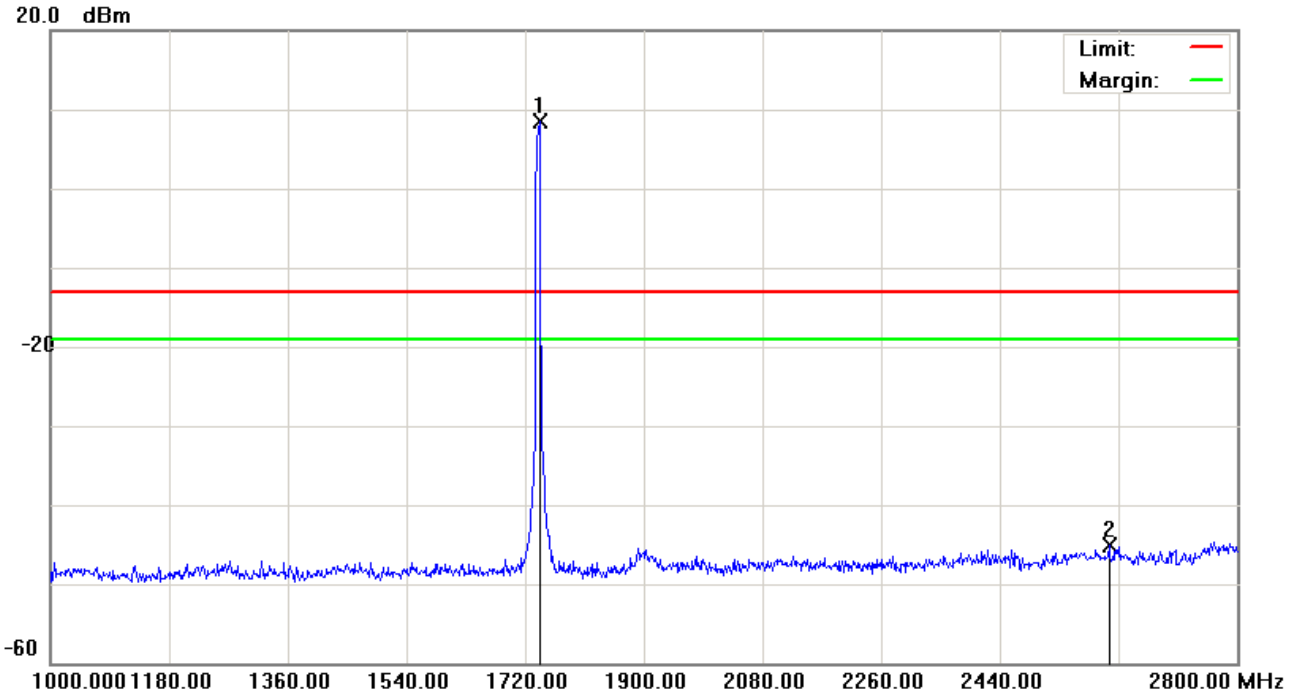

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	1741.600	3.78	4.67	8.45	-13.00	21.45	peak			Tx
2		2605.600	-50.53	5.45	-45.08	-13.00	-32.08	peak			


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1450)

Data :#5

Date: 2013/11/25

Time: 上午 09:19:14

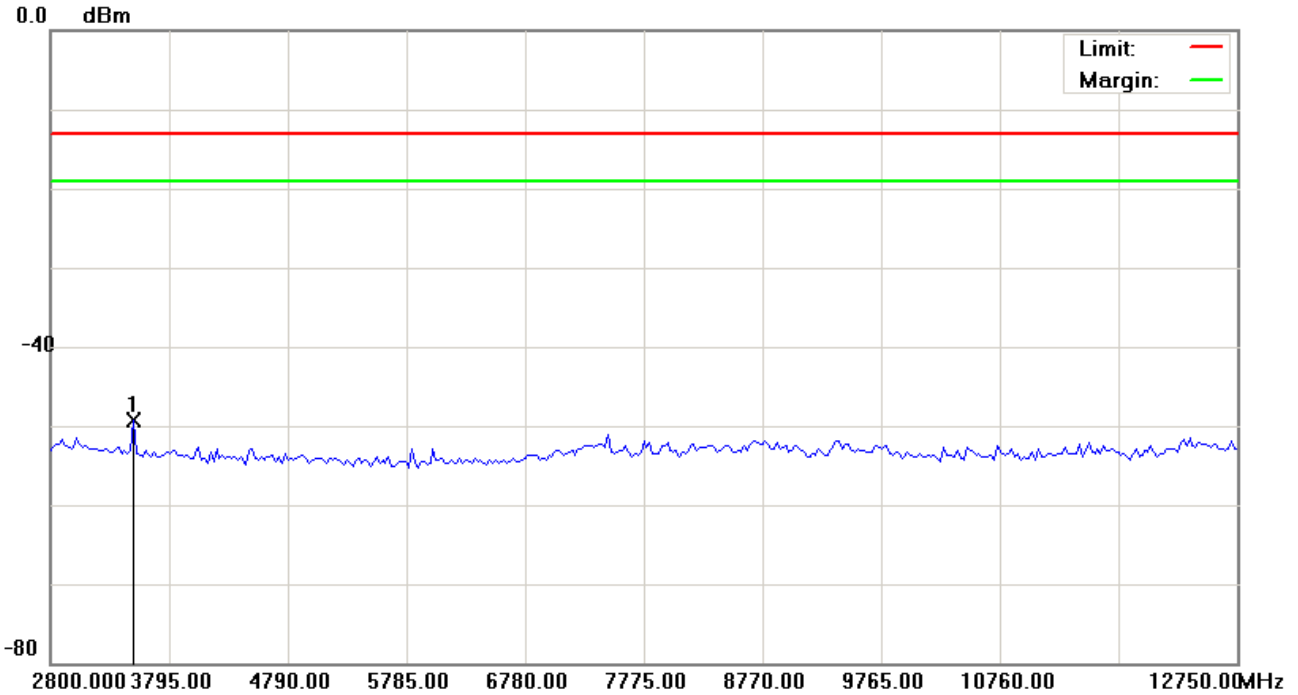

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	3496.500	-54.25	4.97	-49.28	-13.00	-36.28	peak			


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1450)

Data :#6

Date: 2013/11/25

Time: 上午 09:19:35

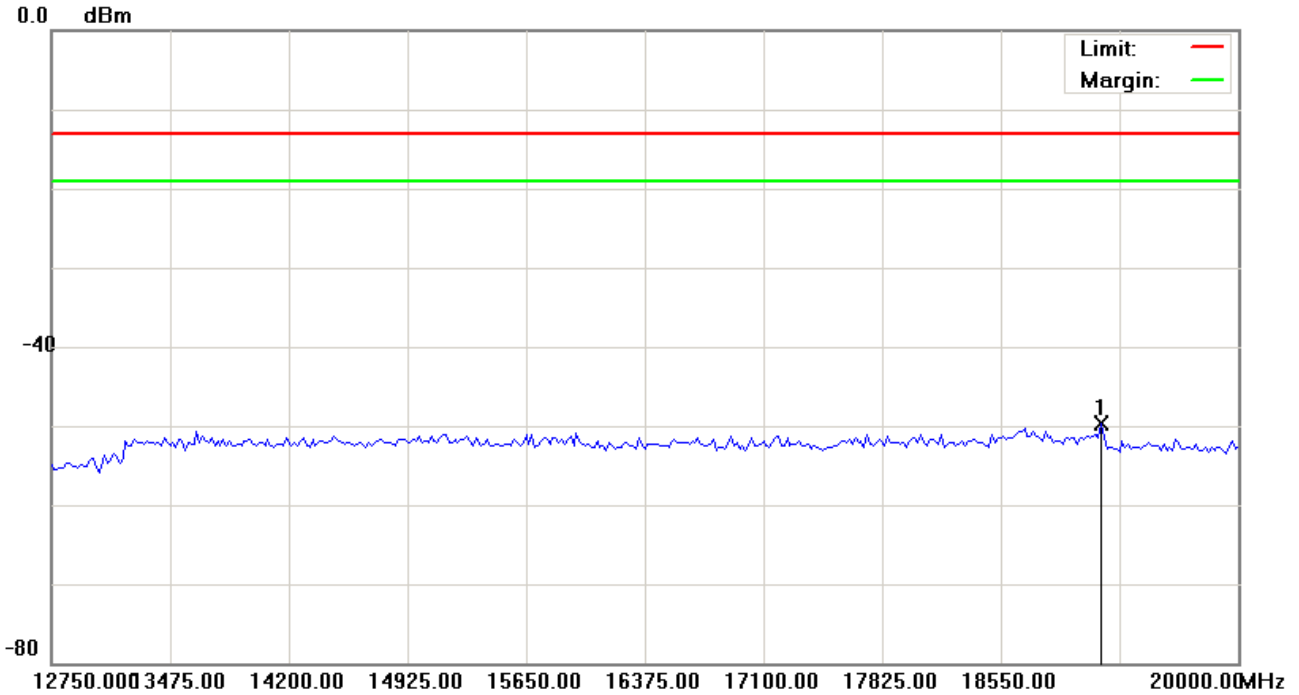

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	19166.250	-56.97	7.20	-49.77	-13.00	-36.77			peak


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1513)

Data :#1

Date: 2013/11/25

Time: 下午 12:03:44

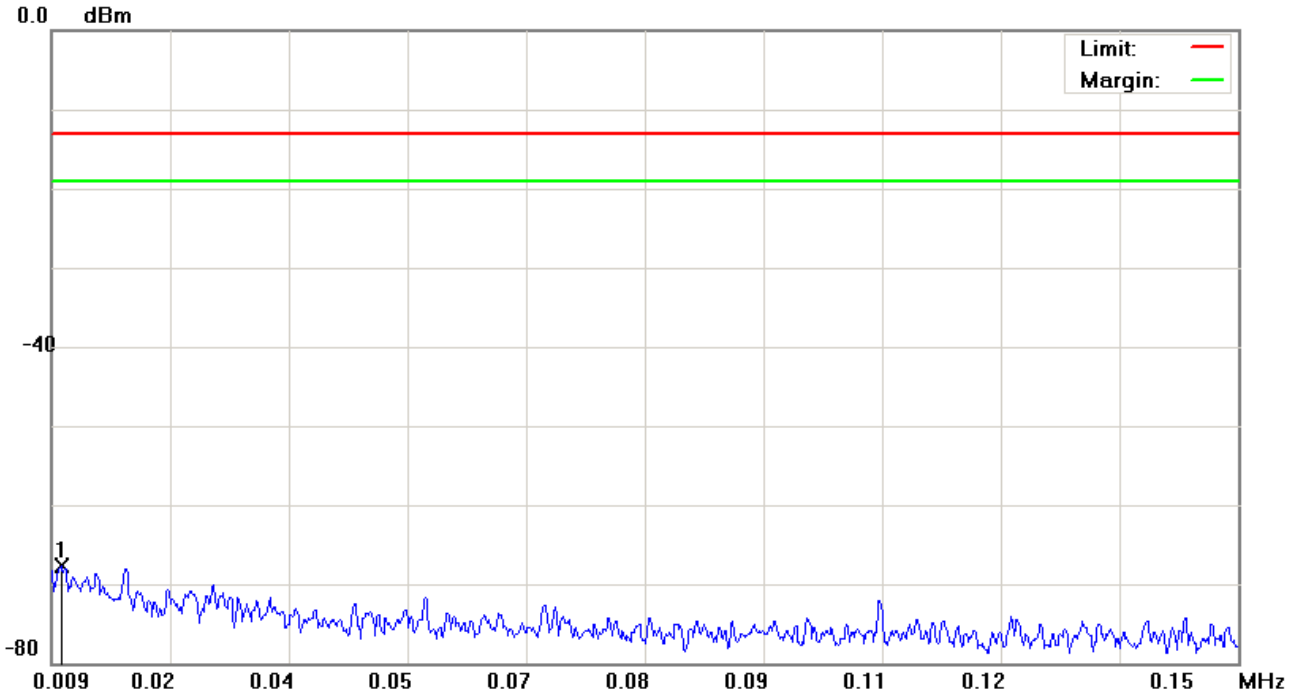

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1 KHz VBW: 3 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.0101	-79.12	11.34	-67.78	-13.00	-54.78			peak


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1513)

Data :#2

Date: 2013/11/25

Time: 下午 12:04:08

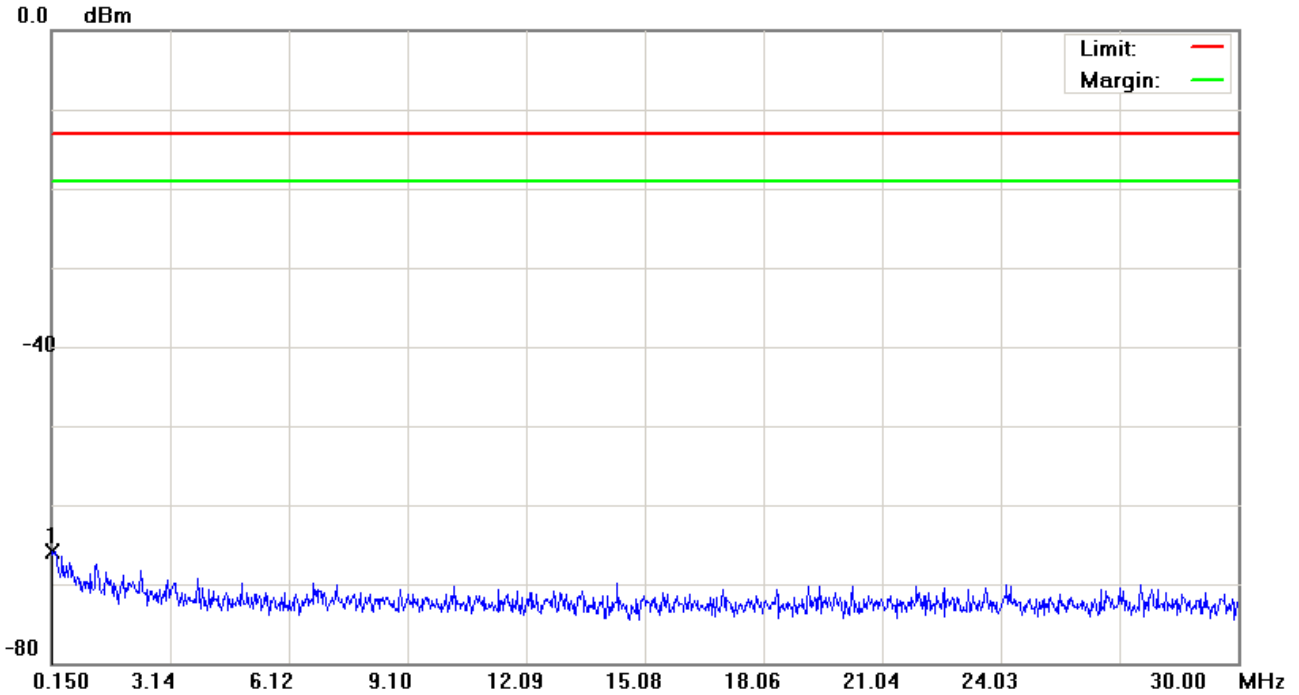

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 10 KHz VBW: 30 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	0.1798	-78.34	12.45	-65.89	-13.00	-52.89	peak		

*:Maximum data x:Over limit !:over margin


File :HE920-NA(CH1513)

Data :#3

Date: 2013/11/25

Time: 下午 12:04:32

0.0 dBm

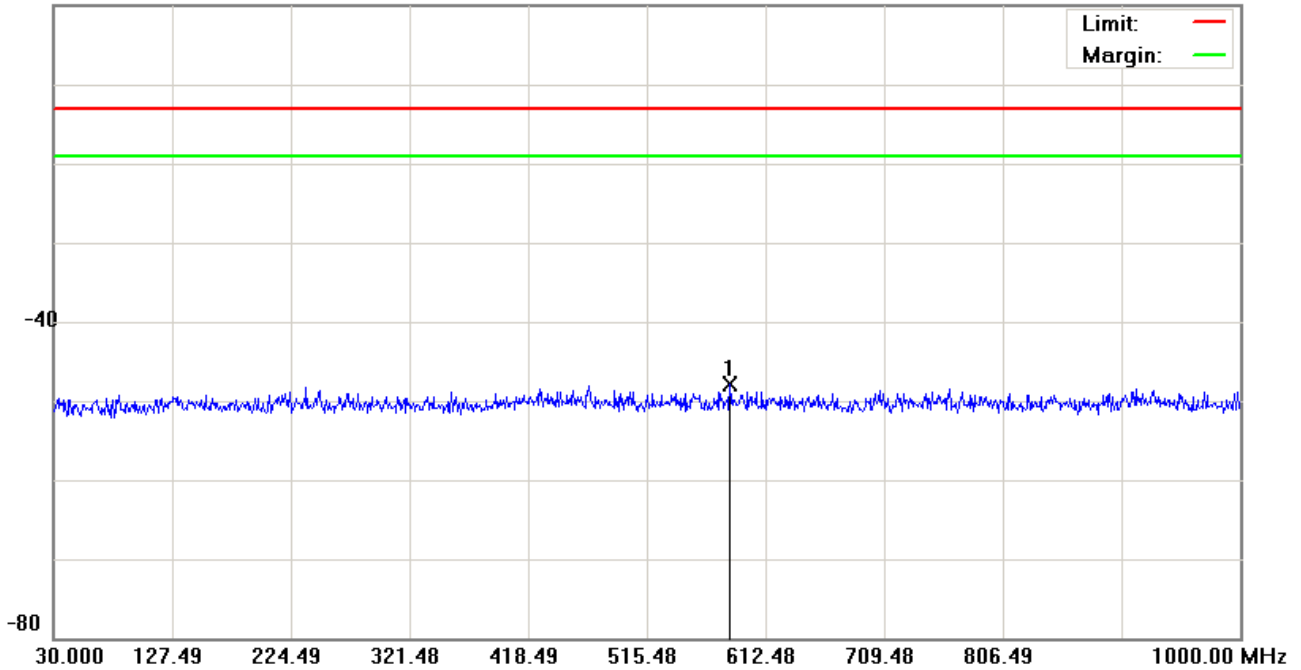

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 100 KHz VBW: 300 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	582.9000	-61.12	13.18	-47.94	-13.00	-34.94	peak			


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1513)

Data :#4

Date: 2013/11/25

Time: 下午 01:20:54

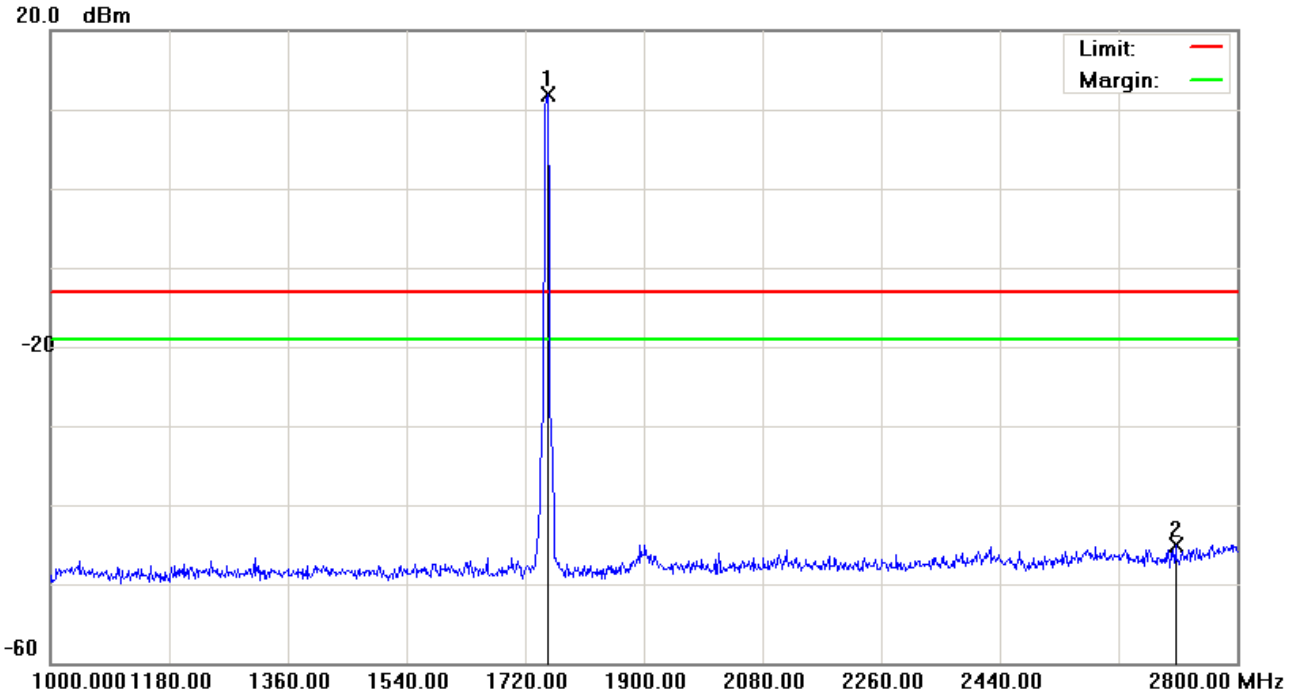

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	1754.200	7.20	4.62	11.82	-13.00	24.82	peak			Tx
2		2707.300	-49.75	4.74	-45.01	-13.00	-32.01	peak			


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1513)

Data :#5

Date: 2013/11/25

Time: 上午 09:20:22

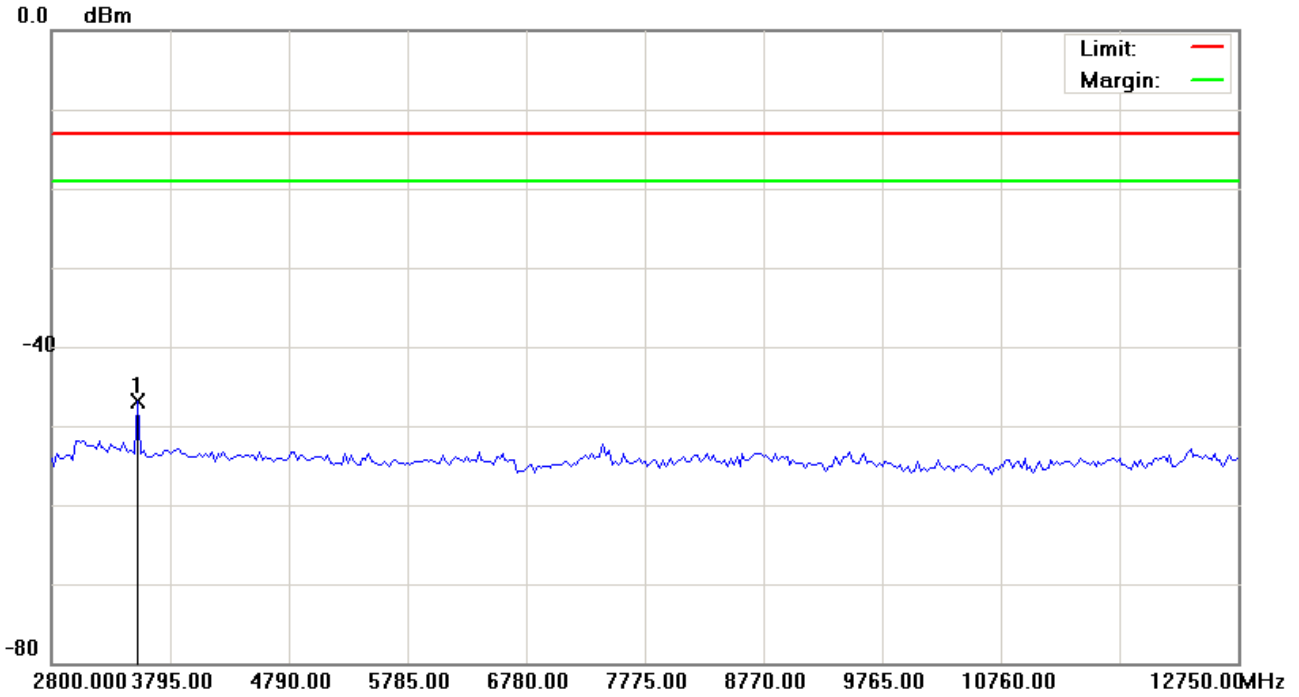

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	3521.375	-51.89	4.95	-46.94	-13.00	-33.94	peak			


*:Maximum data x:Over limit !:over margin

File :HE920-NA(CH1513)

Data :#6

Date: 2013/11/25

Time: 上午 09:20:43

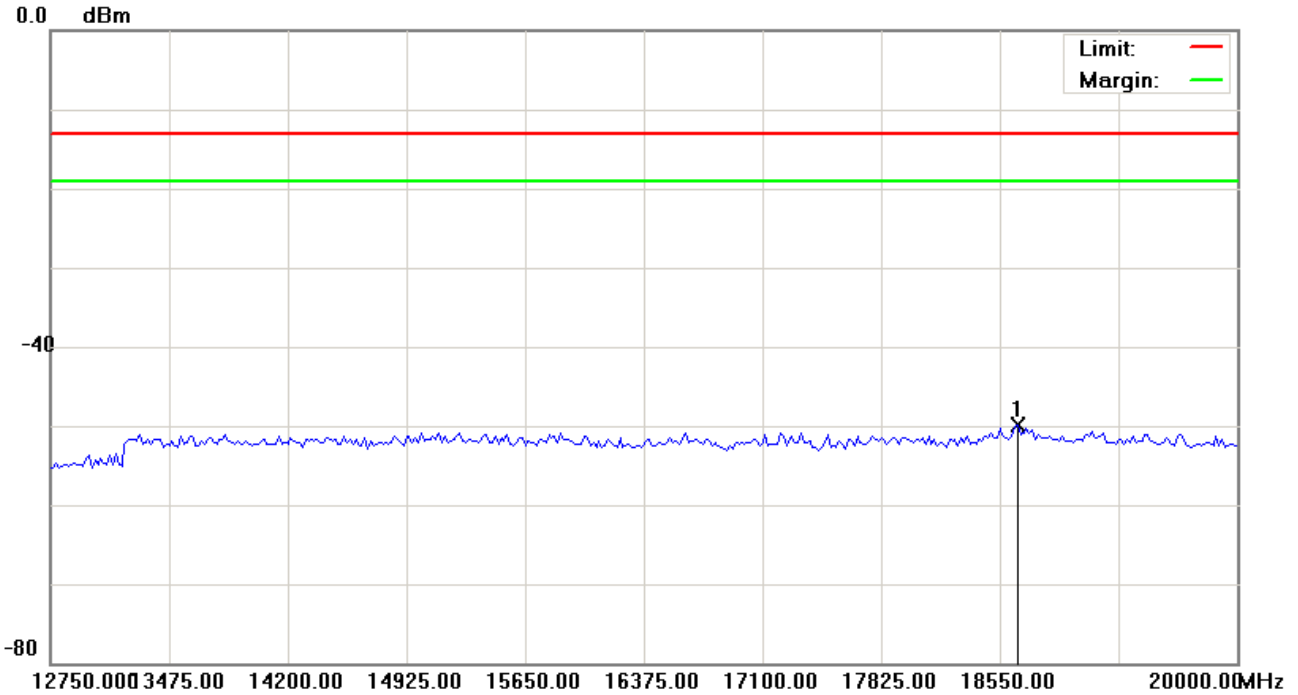

Site: site #1	Polarization: Conducted power	Temperature: 26 °C
Limit: FCC Part 27 conducted(9k-26.5G)	Power: DC 3.8V	Humidity: 55 %
EUT: Wireless module	Distance:	RBW: 1000 KHz VBW: 3000 KHz
M/N: HE920-NA		
Mode: WCDMA Band IV		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	18658.750	-56.99	7.06	-49.93	-13.00	-36.93			peak

*:Maximum data x:Over limit !:over margin

Band	CH	Frequency (MHz)	Measurement (dBm)	Antanna Gain (dBi)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Over (dB)
WCDMA Band IV	1312	0.0102	-67.38	2.70	-64.68	-66.83	-13.00	-53.83
		0.1650	-64.52	2.70	-61.82	-63.97	-13.00	-50.97
		902.5150	-47.72	2.70	-45.02	-47.17	-13.00	-34.17
		2782.9000	-44.10	2.70	-41.40		-13.00	-28.40
		3446.7500	-45.57	2.70	-42.87		-13.00	-29.87
		19148.1250	-49.84	2.70	-47.14		-13.00	-34.14
	1413	0.0132	-66.94	2.70	-64.24	-66.39	-13.00	-53.39
		0.2545	-65.52	2.70	-62.82	-64.97	-13.00	-51.97
		438.3700	-47.84	2.70	-45.14	-47.29	-13.00	-34.29
		2605.6000	-45.08	2.70	-42.38		-13.00	-29.38
		3496.5000	-49.28	2.70	-46.58		-13.00	-33.58
		19166.2500	-49.77	2.70	-47.07		-13.00	-34.07
	1513	0.0101	-67.78	2.70	-65.08	-67.23	-13.00	-54.23
		0.1798	-65.89	2.70	-63.19	-65.34	-13.00	-52.34
		582.9000	-47.94	2.70	-45.24	-47.39	-13.00	-34.39
		2707.3000	-45.01	2.70	-42.31		-13.00	-29.31
		3521.3750	-46.94	2.70	-44.24		-13.00	-31.24
		18658.7500	-49.93	2.70	-47.23		-13.00	-34.23

8 Field Strength of Spurious Radiation Test

8.1. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


8.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/21/2013	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/21/2013	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2013	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2013	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/16/2013	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/10/2013	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/13/2013	(1)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

8.3. Setup

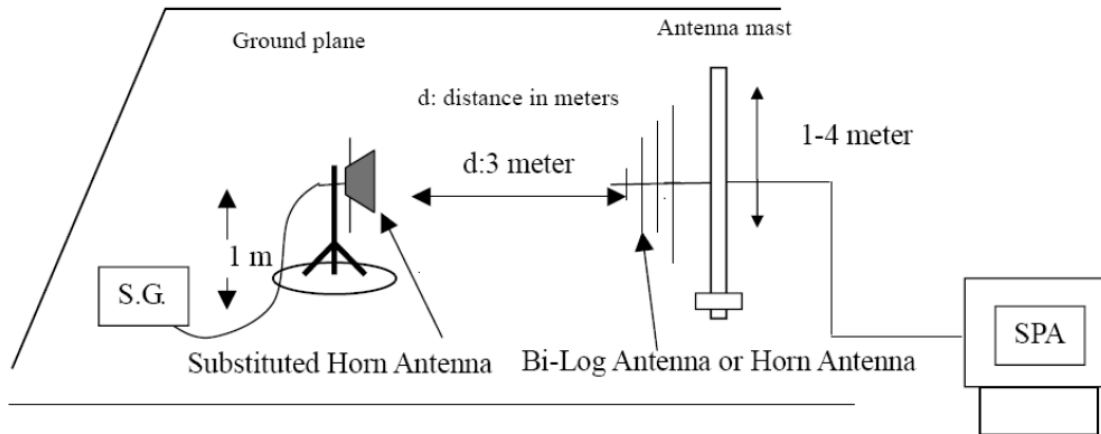

8.4. Test Procedure

The measurement is made according to ANSI/TIA-603-C-2004 as follows:

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

Units	dBm
Resolution Bandwidth	1 MHz
Video Bandwidth	Auto
Sweep Time	Auto

8.5. Uncertainty

The measurement uncertainty is defined as for Field Strength of Spurious Radiation measurement is $\pm 3.072 \text{ dB}$.

8.6. Test Result

Standard:	FCC Part 27	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 3.8V
Model Number:	HE920-NA	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	12/03/2013
Frequency:	1712.4 MHz	Test By:	Fly Lu

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
126.0000	-72.43	-5.04	-77.47	-13.00	-64.47	peak	H
260.0000	-71.90	-4.34	-76.24	-13.00	-63.24	peak	H
400.0000	-77.80	2.55	-75.25	-13.00	-62.25	peak	H
536.0000	-80.22	8.13	-72.09	-13.00	-59.09	peak	H
730.0000	-81.29	7.85	-73.44	-13.00	-60.44	peak	H
958.5000	-81.73	14.83	-66.90	-13.00	-53.90	peak	H
2884.000	-72.21	17.45	-54.76	-13.00	-41.76	peak	H
4336.000	-73.11	20.80	-52.31	-13.00	-39.31	peak	H
6676.000	-74.02	31.23	-42.79	-13.00	-29.79	peak	H
126.0000	-67.22	10.40	-56.82	-13.00	-43.82	peak	V
200.0000	-80.64	10.15	-70.49	-13.00	-57.49	peak	V
400.0000	-72.39	1.33	-71.06	-13.00	-58.06	peak	V
490.0000	-73.76	2.56	-71.20	-13.00	-58.20	peak	V
655.0000	-79.16	9.19	-69.97	-13.00	-56.97	peak	V
934.0000	-79.79	12.48	-67.31	-13.00	-54.31	peak	V
2896.000	-71.78	19.48	-52.30	-13.00	-39.30	peak	V
4372.000	-72.20	25.72	-46.48	-13.00	-33.48	peak	V
6544.000	-73.30	29.34	-43.96	-13.00	-30.96	peak	V

Standard:	FCC Part 27	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 3.8V
Model Number:	HE920-NA	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	12/03/2013
Frequency:	1732.6 MHz	Test By:	Fly Lu

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
126.0000	-72.94	-5.04	-77.98	-13.00	-64.98	peak	H
260.0000	-71.47	-4.34	-75.81	-13.00	-62.81	peak	H
400.0000	-77.56	2.55	-75.01	-13.00	-62.01	peak	H
559.0000	-80.06	7.84	-72.22	-13.00	-59.22	peak	H
650.0000	-80.43	6.99	-73.44	-13.00	-60.44	peak	H
912.0000	-81.61	14.47	-67.14	-13.00	-54.14	peak	H
2896.000	-72.55	17.47	-55.08	-13.00	-42.08	peak	H
4756.000	-73.86	22.45	-51.41	-13.00	-38.41	peak	H
6652.000	-73.95	31.13	-42.82	-13.00	-29.82	peak	H
126.0000	-68.90	10.40	-58.50	-13.00	-45.50	peak	V
165.5000	-72.77	7.48	-65.29	-13.00	-52.29	peak	V
200.0000	-81.03	10.15	-70.88	-13.00	-57.88	peak	V
400.0000	-72.17	1.33	-70.84	-13.00	-57.84	peak	V
490.0000	-73.33	2.56	-70.77	-13.00	-57.77	peak	V
728.0000	-78.46	10.72	-67.74	-13.00	-54.74	peak	V
3040.000	-71.29	20.46	-50.83	-13.00	-37.83	peak	V
4768.000	-74.23	26.69	-47.54	-13.00	-34.54	peak	V
6916.000	-74.25	30.33	-43.92	-13.00	-30.92	peak	V

Standard:	FCC Part 27	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 3.8V
Model Number:	HE920-NA	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	12/03/2013
Frequency:	1752.6 MHz	Test By:	Fly Lu

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
126.0000	-71.19	-5.04	-76.23	-13.00	-63.23	peak	H
260.0000	-71.23	-4.34	-75.57	-13.00	-62.57	peak	H
400.0000	-77.47	2.55	-74.92	-13.00	-61.92	peak	H
584.0000	-79.11	7.68	-71.43	-13.00	-58.43	peak	H
764.5000	-78.81	9.34	-69.47	-13.00	-56.47	peak	H
943.5000	-81.28	14.85	-66.43	-13.00	-53.43	peak	H
2992.000	-70.99	17.72	-53.27	-13.00	-40.27	peak	H
4444.000	-72.54	20.98	-51.56	-13.00	-38.56	peak	H
6628.000	-73.98	31.02	-42.96	-13.00	-29.96	peak	H
126.0000	-72.43	10.40	-62.03	-13.00	-49.03	peak	V
164.5000	-73.53	8.44	-65.09	-13.00	-52.09	peak	V
200.0000	-80.45	10.15	-70.30	-13.00	-57.30	peak	V
260.0000	-73.40	-1.56	-74.96	-13.00	-61.96	peak	V
400.0000	-71.50	1.33	-70.17	-13.00	-57.17	peak	V
734.0000	-79.62	10.60	-69.02	-13.00	-56.02	peak	V
3040.000	-70.52	20.46	-50.06	-13.00	-37.06	peak	V
4960.000	-73.40	27.03	-46.37	-13.00	-33.37	peak	V
6844.000	-74.55	30.16	-44.39	-13.00	-31.39	peak	V

Standard:	RSS-Gen	Test Distance:	3m
Test item:	Radiated Emission	Power:	DC 3.8V
Model Number:	HE920-NA	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	12/03/2013
		Test By:	Fly Lu

Frequency (MHz)	Reading (dBm)	Correct Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark	Ant.Polar. H / V
2799.000	34.37	5.40	39.77	74.00	-34.23	peak	H
4619.000	33.29	11.19	44.48	74.00	-29.52	peak	H
6663.000	32.14	18.21	50.35	74.00	-23.65	peak	H
2778.000	36.90	5.34	42.24	74.00	-31.76	peak	V
4612.000	34.52	11.16	45.68	74.00	-28.32	peak	V
6761.000	32.22	18.70	50.92	74.00	-23.08	peak	V

9 Frequency Stability (Temperature & Voltage Variation) Test

9.1. Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.


9.2. Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Remark
Universal Radio Communication Tester	R & S	CMU200	109369	08/07/2012	(2)
Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	08/07/2013	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

Note: N.C.R. = No Calibration Request.

9.3. Setup

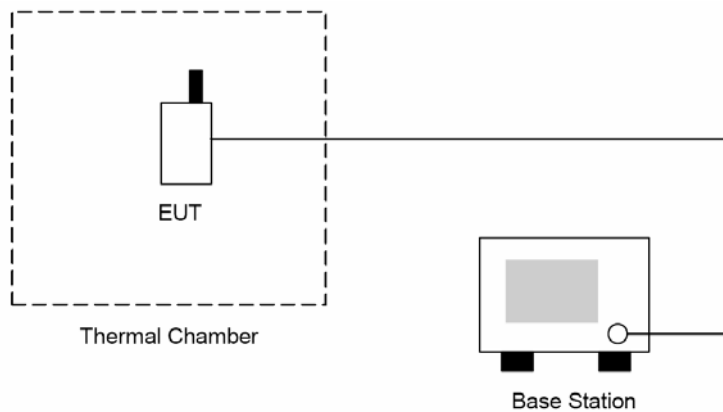

9.4. Test Procedure

The measurement is made according to FCC rules part 22 and 24:

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was note within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected as the following section.
5. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
6. The temperature tests were performed for the worst case.
7. Test data was recorded.

9.5. Uncertainty

The measurement uncertainty is defined as for Frequency Stability (Temperature Variation) measurement is $\pm 10\text{Hz}$.

9.6. Test Result

Model Number	HE920-NA					
Test Item	Frequency Stability (Temperature & Voltage Variation)					
Test Mode	Mode 1					
Date of Test	11/27/2013				Test Site	TE05
Level	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
Normal	3.80	-20	-14	-0.008	± 2.5	Pass
Normal	3.80	-10	-20	-0.011	± 2.5	Pass
Normal	3.80	0	19	0.011	± 2.5	Pass
Normal	3.80	10	16	0.009	± 2.5	Pass
High Voltage	4.20	20	21	0.012	± 2.5	Pass
Normal	3.80	20	26	0.015	± 2.5	Pass
Low Voltage	3.40	20	17	0.010	± 2.5	Pass
Normal	3.80	30	-24	-0.014	± 2.5	Pass
Normal	3.80	40	11	0.006	± 2.5	Pass
Normal	3.80	50	17	0.010	± 2.5	Pass
Normal	3.80	55	21	0.012	± 2.5	Pass