


FCC/IC Test Report

FCC ID : RI7LE910C1NS
IC : 5131A-LE910C1NS
Equipment : LTE Module
Model No. : LE910C1-NS
Brand Name : Telit
Applicant : TELIT COMMUNICATIONS S.P.A.
Address : Viale Stazione di Prosecco 5/B, Trieste 34010
Italy
Standard : 47 CFR FCC Part 22 Subpart H
RSS-132 Issue 3 January 2013
Received Date : Apr. 07, 2017
Tested Date : Apr. 07 ~ Apr. 16, 2017

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition and Location Information.....	10
2.2	The Worst Test Modes and Channel Details	10
3	TEST RESULTS.....	11
3.1	Effective Radiated Power	11
3.2	Radiated Emissions.....	16
3.3	Conducted Emissions.....	24
3.4	Band Edge.....	29
3.5	Occupied and 26 dB Bandwidth	46
3.6	Peak to Average Ratio	51
3.7	Frequency Stability.....	56
4	TEST LABORATORY INFORMATION	61

Release Record

Report No.	Version	Description	Issued Date
FG740703P22	Rev. 01	Initial issue	Apr. 24, 2017

Summary of Test Results

FCC Rules	IC Rules	Test Items	Measured	Result
2.1046 / 22.913(a)(2)	---	Effective Radiated Power	Power[dBm] : 21.81	Pass
---	RSS-132 Section 5.4	Equivalent Isotropically Radiated Power	Power[dBm] : 23.96	Pass
2.1053 / 22.917(a)	RSS-132 Section 5.5	Radiated Emissions	Meet the requirement of limit	Pass
2.1051 / 22.917(a)	RSS-132 Section 5.5	Conducted Emissions	Meet the requirement of limit	Pass
2.1051 / 22.917(a)	RSS-132 Section 5.5	Band Edge	Meet the requirement of limit	Pass
2.1049 / 22.917(a)	RSS-132 Section 5.5	Occupied Bandwidth	Meet the requirement of limit	Pass
---	RSS-132 Section 5.4	Peak to Average Ratio	Meet the requirement of limit	Pass
2.1055 / 22.355	RSS-132 Section 5.3	Frequency Stability	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

Operating Frequency	LTE Band 5: Channel Bandwidth: 1.4MHz: 824.7 MHz ~ 848.3 MHz Channel Bandwidth: 3MHz: 825.5 MHz ~ 847.5 MHz Channel Bandwidth: 5MHz: 826.5 MHz ~ 846.5 MHz Channel Bandwidth: 10MHz: 829 MHz ~ 844 MHz
Modulation	QPSK, 16QAM (Uplink)
Release Version	10
Duplex Mode	FDD
UE Category	Cat. 1
H/W Version	CS1762C
S/W Version	25.00.241

1.1.2 Maximum ERP and Emission Designator

Mode	Modulation	Maximum ERP (W)	Emission Designator
LTE Band 5, CB: 1.4MHz	QPSK	0.144	1M08G7D
LTE Band 5, CB: 1.4MHz	16QAM	0.108	1M08W7D
LTE Band 5, CB: 3MHz	QPSK	0.148	2M69G7D
LTE Band 5, CB: 3MHz	16QAM	0.114	2M69W7D
LTE Band 5, CB: 5MHz	QPSK	0.147	4M49G7D
LTE Band 5, CB: 5MHz	16QAM	0.113	4M49W7D
LTE Band 5, CB: 10MHz	QPSK	0.152	8M94G7D
LTE Band 5, CB: 10MHz	16QAM	0.126	4M93W7D

1.1.3 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)	Remark
1	Dipole	R-SMA	0.46	---

1.1.4 EUT Operational Condition

Supply Voltage	3.8Vdc from host		
Operational Voltage	<input checked="" type="checkbox"/> Vnom (3.8 V)	<input checked="" type="checkbox"/> Vmax (4.2 V)	<input checked="" type="checkbox"/> Vmin (3.4 V)
Operational Climatic	<input checked="" type="checkbox"/> Tnom (20°C)	<input checked="" type="checkbox"/> Tmax (85°C)	<input checked="" type="checkbox"/> Tmin (-40°C)


1.1.5 Operating Channel List

LTE Band 5		
Channel Bandwidths (MHz)	Channel	Frequency (MHz)
1.4	20407	824.7
1.4	20525	836.5
1.4	20643	848.3
3	20415	825.5
3	20525	836.5
3	20635	847.5
5	20425	826.5
5	20525	836.5
5	20625	846.5
10	20450	829.0
10	20525	836.5
10	20600	844.0

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	DC Power Supply	GW INSTEK	GPC-6030D	---	---

1.3 Test Setup Chart

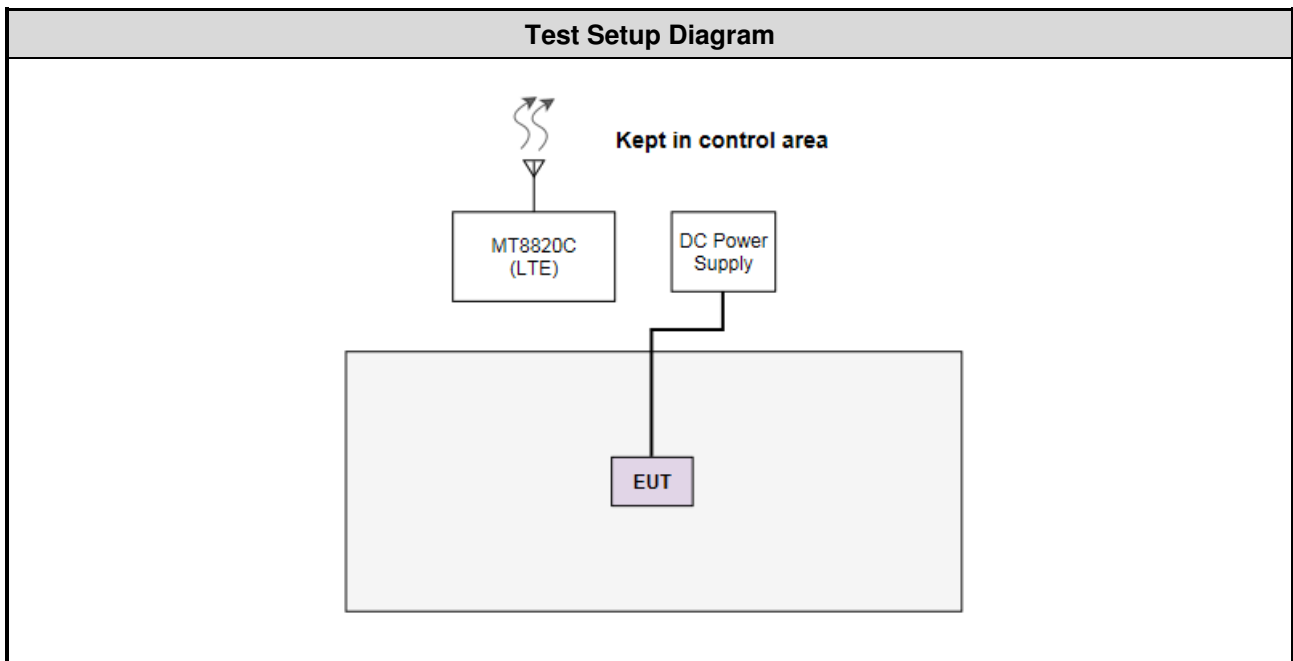

1.4 The Equipment List

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Mar. 15, 2017	Mar. 14, 2018
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 09, 2016	Sep. 08, 2017
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 21, 2016	Nov. 20, 2017
Power Meter	Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017
Power Sensor	Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017
Radio Communication Analyzer	Anritsu	MT8820C	6201465544	Aug. 19, 2016	Aug. 18, 2017
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 25, 2016	Nov. 24, 2017
Receiver	R&S	ESR3	101658	Nov. 24, 2016	Nov. 23, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 04, 2016	Aug. 03, 2017
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 21, 2016	Dec. 20, 2017
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017
Preamplifier	EMC	EMC02325	980225	Aug. 05, 2016	Aug. 04, 2017
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2016	Oct. 05, 2017
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 09, 2016	Dec. 08, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 09, 2016	Dec. 08, 2017
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 09, 2016	Dec. 08, 2017
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	16052	Dec. 09, 2016	Dec. 08, 2017
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 09, 2016	Dec. 08, 2017
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 09, 2016	Dec. 08, 2017
Radio Communication Analyzer	Anritsu	MT8820C	6201465544	Aug. 19, 2016	Aug. 18, 2017
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards.

47 CFR FCC Part 22 Subpart H

RSS-132 Issue 3 January 2013

RSS-Gen Issue 4 November 2014

SRSP-503 Issue 7 September 2008

ANSI C63.4-2014

ANSI/TIA-603-D 2010

ANSI C63.26-2015

FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.134 Hz
Conducted power	± 0.808 dB
Frequency error	± 34.134 Hz
Temperature	± 0.6 °C
Conducted emission	± 2.670 dB
AC conducted emission	± 2.90 dB
Radiated emission ≤ 1 GHz	± 3.66 dB
Radiated emission > 1 GHz	± 5.63 dB

2 Test Configuration

2.1 Testing Condition and Location Information

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	24°C / 60-62%	Kevin Lee Vincent Yeh
RF Conducted	TH01-WS	22°C / 63%	Alex Huang

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

LTE Band 5			
Test item	Channel Bandwidths	Modulation	Test channel
Effective Radiated Power Conducted Emissions	1.4 MHz 3 MHz	QPSK / 16QAM QPSK / 16QAM	20407 / 20525 / 20643 20415 / 20525 / 20635
Occupied Bandwidth	5 MHz 10 MHz	QPSK / 16QAM QPSK / 16QAM	20425 / 20525 / 20625 20450 / 20525 / 20600
Peak to Average Ratio			
Radiated Emission ≤ 1GHz	1.4 MHz 3 MHz 5 MHz 10 MHz	QPSK QPSK QPSK QPSK	20525 20525 20525 20525
Radiated Emission > 1GHz	1.4 MHz 3 MHz 5 MHz 10 MHz	QPSK QPSK QPSK QPSK	20407 / 20525 / 20643 20415 / 20525 / 20635 20425 / 20525 / 20625 20450 / 20525 / 20600
Band Edge	1.4 MHz 3 MHz 5 MHz 10 MHz	QPSK / 16QAM QPSK / 16QAM QPSK / 16QAM QPSK / 16QAM	20407 / 20643 20415 / 20635 20425 / 20625 20450 / 20600
Frequency Stability	1.4 MHz 3 MHz 5 MHz 10 MHz	QPSK QPSK QPSK QPSK	20525 20525 20525 20525
Note:			
1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The Y-plane results were found as the worst case and were shown in this report.			

3 Test Results

3.1 Effective Radiated Power

3.1.1 Limit of Effective Radiated Power

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

3.1.2 Test Procedures

For Conducted power measurement:


1. The EUT links up with simulator and is set to maximum output power level at low / middle / high channel.
2. Measure the output power of low / middle / high channel of the EUT.

For ERP measurement:

ERP can be calculated by below formula from KDB 412172 D01.

1. $EIRP = P_T + G_T - L_C$
 P_T = transmitter output power, in dBm.
 G_T = gain of the transmitting antenna, in dBi (EIRP).
 L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.
2. $ERP = EIRP - 2.15 \text{ dB}$.

3.1.3 Test Setup



3.1.4 Test Result of Effective Radiated Power (dBm)

Channel Bandwidth: 1.4MHz

Mode	Channel	RB	RB Offset	Conducted Average Power (dBm)	Ant. Gain (dB)	E.I.R.P Power (dBm)	E.R.P Power (dBm)	E.R.P Power (W)	E.R.P Limit (W)
QPSK	20407	1	0	22.53	0.46	22.99	20.84	0.121	7
		1	2	22.63	0.46	23.09	20.94	0.124	7
		1	5	22.58	0.46	23.04	20.89	0.123	7
		3	0	22.42	0.46	22.88	20.73	0.118	7
		3	1	22.44	0.46	22.90	20.75	0.119	7
		3	2	22.50	0.46	22.96	20.81	0.121	7
		6	0	21.43	0.46	21.89	19.74	0.094	7
	20525	1	0	22.97	0.46	23.43	21.28	0.134	7
		1	2	23.27	0.46	23.73	21.58	0.144	7
		1	5	23.08	0.46	23.54	21.39	0.138	7
		3	0	22.98	0.46	23.44	21.29	0.135	7
		3	1	23.18	0.46	23.64	21.49	0.141	7
		3	2	23.14	0.46	23.60	21.45	0.140	7
		6	0	22.06	0.46	22.52	20.37	0.109	7
	20643	1	0	22.80	0.46	23.26	21.11	0.129	7
		1	2	23.18	0.46	23.64	21.49	0.141	7
		1	5	22.80	0.46	23.26	21.11	0.129	7
		3	0	22.73	0.46	23.19	21.04	0.127	7
		3	1	22.89	0.46	23.35	21.20	0.132	7
		3	2	22.91	0.46	23.37	21.22	0.132	7
		6	0	21.94	0.46	22.40	20.25	0.106	7
16QAM	20407	1	0	21.58	0.46	22.04	19.89	0.097	7
		1	2	21.66	0.46	22.12	19.97	0.099	7
		1	5	21.37	0.46	21.83	19.68	0.093	7
		3	0	21.52	0.46	21.98	19.83	0.096	7
		3	1	21.65	0.46	22.11	19.96	0.099	7
		3	2	21.57	0.46	22.03	19.88	0.097	7
		6	0	20.53	0.46	20.99	18.84	0.077	7
	20525	1	0	21.88	0.46	22.34	20.19	0.104	7
		1	2	22.02	0.46	22.48	20.33	0.108	7
		1	5	21.96	0.46	22.42	20.27	0.106	7
		3	0	21.64	0.46	22.10	19.95	0.099	7
		3	1	21.87	0.46	22.33	20.18	0.104	7
		3	2	21.87	0.46	22.33	20.18	0.104	7
		6	0	20.71	0.46	21.17	19.02	0.080	7
	20643	1	0	21.64	0.46	22.10	19.95	0.099	7
		1	2	21.83	0.46	22.29	20.14	0.103	7
		1	5	21.69	0.46	22.15	20.00	0.100	7
		3	0	21.72	0.46	22.18	20.03	0.101	7
		3	1	21.73	0.46	22.19	20.04	0.101	7
		3	2	21.80	0.46	22.26	20.11	0.103	7
		6	0	20.70	0.46	21.16	19.01	0.080	7

Channel Bandwidth: 3MHz

Mode	Channel	RB	RB Offset	Conducted Average Power (dBm)	Ant. Gain (dB)	E.I.R.P Power (dBm)	E.R.P Power (dBm)	E.R.P Power (W)	E.R.P Limit (W)
QPSK	20415	1	0	22.59	0.46	23.05	20.90	0.123	7
		1	7	22.92	0.46	23.38	21.23	0.133	7
		1	14	22.69	0.46	23.15	21.00	0.126	7
		8	0	21.56	0.46	22.02	19.87	0.097	7
		8	4	21.59	0.46	22.05	19.90	0.098	7
		8	7	21.55	0.46	22.01	19.86	0.097	7
		15	0	21.67	0.46	22.13	19.98	0.100	7
	20525	1	0	23.16	0.46	23.62	21.47	0.140	7
		1	7	23.39	0.46	23.85	21.70	0.148	7
		1	14	23.25	0.46	23.71	21.56	0.143	7
		8	0	22.10	0.46	22.56	20.41	0.110	7
		8	4	22.16	0.46	22.62	20.47	0.111	7
		8	7	22.12	0.46	22.58	20.43	0.110	7
		15	0	22.09	0.46	22.55	20.40	0.110	7
	20635	1	0	22.93	0.46	23.39	21.24	0.133	7
		1	7	22.97	0.46	23.43	21.28	0.134	7
		1	14	22.89	0.46	23.35	21.20	0.132	7
		8	0	21.97	0.46	22.43	20.28	0.107	7
		8	4	21.95	0.46	22.41	20.26	0.106	7
		8	7	21.95	0.46	22.41	20.26	0.106	7
		15	0	21.74	0.46	22.20	20.05	0.101	7
16QAM	20415	1	0	21.63	0.46	22.09	19.94	0.099	7
		1	7	21.97	0.46	22.43	20.28	0.107	7
		1	14	21.72	0.46	22.18	20.03	0.101	7
		8	0	20.54	0.46	21.00	18.85	0.077	7
		8	4	20.65	0.46	21.11	18.96	0.079	7
		8	7	20.68	0.46	21.14	18.99	0.079	7
		15	0	20.65	0.46	21.11	18.96	0.079	7
	20525	1	0	21.83	0.46	22.29	20.14	0.103	7
		1	7	22.26	0.46	22.72	20.57	0.114	7
		1	14	21.92	0.46	22.38	20.23	0.105	7
		8	0	20.88	0.46	21.34	19.19	0.083	7
		8	4	20.83	0.46	21.29	19.14	0.082	7
		8	7	20.89	0.46	21.35	19.20	0.083	7
		15	0	20.93	0.46	21.39	19.24	0.084	7
	20635	1	0	21.43	0.46	21.89	19.74	0.094	7
		1	7	21.86	0.46	22.32	20.17	0.104	7
		1	14	21.58	0.46	22.04	19.89	0.097	7
		8	0	20.84	0.46	21.30	19.15	0.082	7
		8	4	20.97	0.46	21.43	19.28	0.085	7
		8	7	21.11	0.46	21.57	19.42	0.087	7
		15	0	20.84	0.46	21.30	19.15	0.082	7

Channel Bandwidth: 5MHz

Mode	Channel	RB	RB Offset	Conducted Average Power (dBm)	Ant. Gain (dB)	E.I.R.P Power (dBm)	E.R.P Power (dBm)	E.R.P Power (W)	E.R.P Limit (W)
QPSK	20425	1	0	22.73	0.46	23.19	21.04	0.127	7
		1	12	22.87	0.46	23.33	21.18	0.131	7
		1	24	22.58	0.46	23.04	20.89	0.123	7
		12	0	21.68	0.46	22.14	19.99	0.100	7
		12	6	21.64	0.46	22.10	19.95	0.099	7
		12	11	21.67	0.46	22.13	19.98	0.100	7
		25	0	21.72	0.46	22.18	20.03	0.101	7
	20525	1	0	23.09	0.46	23.55	21.40	0.138	7
		1	12	23.37	0.46	23.83	21.68	0.147	7
		1	24	23.10	0.46	23.56	21.41	0.138	7
		12	0	22.08	0.46	22.54	20.39	0.109	7
		12	6	22.16	0.46	22.62	20.47	0.111	7
		12	11	22.18	0.46	22.64	20.49	0.112	7
		25	0	22.08	0.46	22.54	20.39	0.109	7
	20625	1	0	22.92	0.46	23.38	21.23	0.133	7
		1	12	22.98	0.46	23.44	21.29	0.135	7
		1	24	22.97	0.46	23.43	21.28	0.134	7
		12	0	21.92	0.46	22.38	20.23	0.105	7
		12	6	21.95	0.46	22.41	20.26	0.106	7
		12	11	21.99	0.46	22.45	20.30	0.107	7
		25	0	21.92	0.46	22.38	20.23	0.105	7
16QAM	20425	1	0	21.48	0.46	21.94	19.79	0.095	7
		1	12	21.81	0.46	22.27	20.12	0.103	7
		1	24	21.64	0.46	22.10	19.95	0.099	7
		12	0	20.68	0.46	21.14	18.99	0.079	7
		12	6	20.67	0.46	21.13	18.98	0.079	7
		12	11	20.69	0.46	21.15	19.00	0.079	7
		25	0	20.82	0.46	21.28	19.13	0.082	7
	20525	1	0	22.12	0.46	22.58	20.43	0.110	7
		1	12	22.23	0.46	22.69	20.54	0.113	7
		1	24	22.13	0.46	22.59	20.44	0.111	7
		12	0	21.00	0.46	21.46	19.31	0.085	7
		12	6	21.13	0.46	21.59	19.44	0.088	7
		12	11	21.09	0.46	21.55	19.40	0.087	7
		25	0	21.08	0.46	21.54	19.39	0.087	7
	20625	1	0	21.84	0.46	22.30	20.15	0.104	7
		1	12	22.05	0.46	22.51	20.36	0.109	7
		1	24	21.92	0.46	22.38	20.23	0.105	7
		12	0	20.94	0.46	21.40	19.25	0.084	7
		12	6	20.92	0.46	21.38	19.23	0.084	7
		12	11	20.98	0.46	21.44	19.29	0.085	7
		25	0	20.99	0.46	21.45	19.30	0.085	7

Channel Bandwidth: 10MHz

Mode	Channel	RB	RB Offset	Conducted Average Power (dBm)	Ant. Gain (dB)	E.I.R.P Power (dBm)	E.R.P Power (dBm)	E.R.P Power (W)	E.R.P Limit (W)
QPSK	20450	1	0	22.81	0.46	23.27	21.12	0.129	7
		1	24	23.10	0.46	23.56	21.41	0.138	7
		1	49	23.01	0.46	23.47	21.32	0.136	7
		25	0	21.77	0.46	22.23	20.08	0.102	7
		25	12	21.75	0.46	22.21	20.06	0.101	7
		25	24	21.70	0.46	22.16	20.01	0.100	7
		50	0	21.64	0.46	22.10	19.95	0.099	7
	20525	1	0	22.98	0.46	23.44	21.29	0.135	7
		1	24	23.50	0.46	23.96	21.81	0.152	7
		1	49	23.27	0.46	23.73	21.58	0.144	7
		25	0	21.91	0.46	22.37	20.22	0.105	7
		25	12	22.12	0.46	22.58	20.43	0.110	7
		25	24	22.14	0.46	22.60	20.45	0.111	7
		50	0	22.10	0.46	22.56	20.41	0.110	7
	20600	1	0	23.07	0.46	23.53	21.38	0.137	7
		1	24	23.23	0.46	23.69	21.54	0.143	7
		1	49	22.91	0.46	23.37	21.22	0.132	7
		25	0	22.03	0.46	22.49	20.34	0.108	7
		25	12	21.88	0.46	22.34	20.19	0.104	7
		25	24	21.97	0.46	22.43	20.28	0.107	7
		50	0	22.01	0.46	22.47	20.32	0.108	7
16QAM	20450	1	0	21.55	0.46	22.01	19.86	0.097	7
		1	24	22.13	0.46	22.59	20.44	0.111	7
		1	49	21.89	0.46	22.35	20.20	0.105	7
		27	0	20.73	0.46	21.19	19.04	0.080	7
		27	12	20.69	0.46	21.15	19.00	0.079	7
		27	23	20.76	0.46	21.22	19.07	0.081	7
	20525	1	0	22.11	0.46	22.57	20.42	0.110	7
		1	24	22.71	0.46	23.17	21.02	0.126	7
		1	49	22.19	0.46	22.65	20.50	0.112	7
		27	0	21.11	0.46	21.57	19.42	0.087	7
		27	12	21.15	0.46	21.61	19.46	0.088	7
		27	23	21.06	0.46	21.52	19.37	0.086	7
	20600	1	0	22.24	0.46	22.70	20.55	0.114	7
		1	24	22.34	0.46	22.80	20.65	0.116	7
		1	49	21.99	0.46	22.45	20.30	0.107	7
		27	0	21.13	0.46	21.59	19.44	0.088	7
		27	12	21.08	0.46	21.54	19.39	0.087	7
		27	23	20.91	0.46	21.37	19.22	0.084	7

Note: Uplink support to 5Mbps only, RB setup of 16QAM is up to 27RB.

3.2 Radiated Emissions

3.2.1 Limit of Radiated Emissions


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.
4. After finding the max radiated emission, substitution method will be used for getting effective radiated power. EUT will be removed and substitution antenna will be placed at same position. Signal generator will output CW signal to substitution antenna through a RF cable. Rotate turntable and move antenna to find maximum radiated emission. Adjust output power of signal generator to let the maximum radiated emission is same as step 3. Record the output power level.
5. E.I.R.P = output power of step 4 + gain of substitution antenna – cable loss of RF cable. ERP can be calculated by below formula:
 $E.R.P = E.I.R.P - 2.15dB$.

3.2.3 Test Setup

Radiated Emissions below 1 GHz

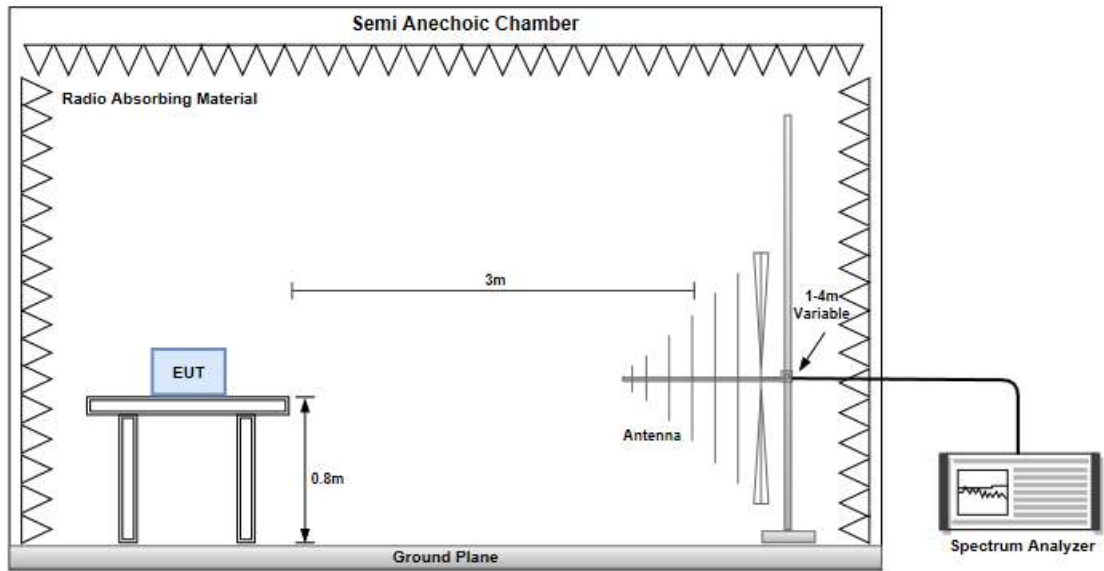

Radiated Emissions above 1 GHz

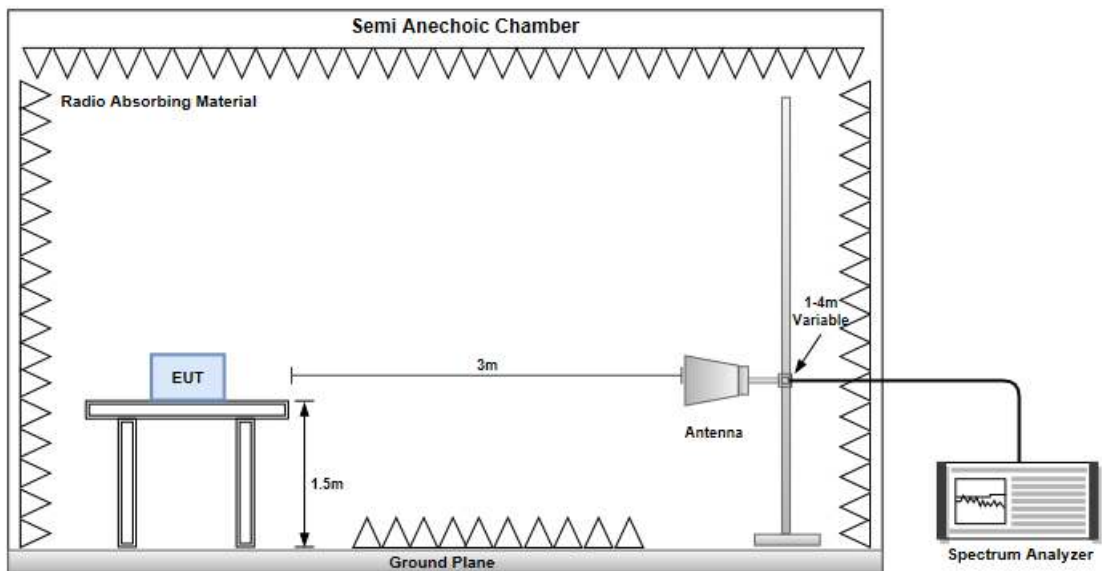

3.2.4 Test Result of Radiated Emissions below 1GHz

Mode							
LTE Band 5, CB:1.4MHz, 1RB, Offset 2, Channel:20525							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
30.97	H	-60.08	-13.00	-47.08	-65.85	-43.96	-13.97
118.27	H	-67.95	-13.00	-54.95	-64.40	-65.07	-0.73
293.84	H	-68.89	-13.00	-55.89	-65.61	-71.04	4.30
440.31	H	-66.05	-13.00	-53.05	-67.30	-67.96	4.06
562.53	H	-63.57	-13.00	-50.57	-66.66	-65.28	3.86
674.08	H	-62.55	-13.00	-49.55	-67.10	-64.18	3.78
32.91	V	-58.45	-13.00	-45.45	-53.88	-42.80	-13.50
90.14	V	-62.08	-13.00	-49.08	-60.18	-60.71	0.78
236.61	V	-61.41	-13.00	-48.41	-61.58	-63.69	4.43
549.92	V	-61.81	-13.00	-48.81	-67.13	-63.63	3.97
628.49	V	-59.76	-13.00	-46.76	-66.95	-61.33	3.72
765.26	V	-59.22	-13.00	-46.22	-66.82	-60.53	3.46

NOTE: ERP = S.G power value + correction factor - 2.15.

Mode							
LTE Band 5, CB:3MHz, 1RB, Offset 7, Channel:20525							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
30.97	H	-57.44	-13.00	-44.44	-63.21	-41.32	-13.97
123.12	H	-69.12	-13.00	-56.12	-65.75	-66.06	-0.91
289.96	H	-68.75	-13.00	-55.75	-65.34	-70.92	4.32
440.31	H	-64.17	-13.00	-51.17	-65.42	-66.08	4.06
577.08	H	-63.86	-13.00	-50.86	-67.17	-65.45	3.74
661.47	H	-62.52	-13.00	-49.52	-66.92	-64.19	3.82
45.52	V	-60.44	-13.00	-47.44	-56.27	-46.70	-11.59
93.05	V	-51.69	-13.00	-38.69	-49.81	-50.18	0.64
229.82	V	-62.98	-13.00	-49.98	-63.04	-65.24	4.41
418.97	V	-65.38	-13.00	-52.38	-66.53	-67.41	4.18
568.35	V	-60.40	-13.00	-47.40	-66.45	-62.06	3.81
651.77	V	-60.21	-13.00	-47.21	-67.30	-61.91	3.85

NOTE: ERP = S.G power value + correction factor - 2.15.

Mode							
LTE Band 5, CB:5MHz, 1RB, Offset 12, Channel:20525							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
31.94	H	-59.04	-13.00	-46.04	-64.79	-43.16	-13.73
123.12	H	-67.71	-13.00	-54.71	-64.34	-64.65	-0.91
291.90	H	-68.43	-13.00	-55.43	-65.08	-70.59	4.31
437.40	H	-65.46	-13.00	-52.46	-66.67	-67.39	4.08
561.56	H	-63.73	-13.00	-50.73	-66.80	-65.45	3.87
680.87	H	-62.68	-13.00	-49.68	-67.30	-64.29	3.76
32.91	V	-60.13	-13.00	-47.13	-55.56	-44.48	-13.50
90.14	V	-61.87	-13.00	-48.87	-59.97	-60.50	0.78
236.61	V	-62.66	-13.00	-49.66	-62.83	-64.94	4.43
364.65	V	-66.18	-13.00	-53.18	-66.73	-68.36	4.33
559.62	V	-60.69	-13.00	-47.69	-66.39	-62.43	3.89
630.43	V	-58.71	-13.00	-45.71	-65.89	-60.29	3.73

NOTE: ERP = S.G power value + correction factor - 2.15.

Mode							
LTE Band 5, CB:10MHz, 1RB, Offset 24, Channel:20525							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
39.70	H	-59.04	-13.00	-46.04	-64.65	-44.56	-12.33
118.27	H	-68.66	-13.00	-55.66	-65.11	-65.78	-0.73
180.35	H	-59.58	-13.00	-46.58	-56.29	-59.77	2.34
361.74	H	-67.32	-13.00	-54.32	-67.44	-69.50	4.33
547.01	H	-63.82	-13.00	-50.82	-66.67	-65.65	3.98
662.44	H	-62.25	-13.00	-49.25	-66.66	-63.92	3.82
33.88	V	-59.07	-13.00	-46.07	-54.52	-43.65	-13.27
92.08	V	-61.85	-13.00	-48.85	-59.97	-60.39	0.69
235.64	V	-62.21	-13.00	-49.21	-62.36	-64.48	4.42
420.91	V	-61.73	-13.00	-48.73	-62.91	-63.75	4.17
515.97	V	-62.63	-13.00	-49.63	-66.38	-64.57	4.09
631.40	V	-58.51	-13.00	-45.51	-65.70	-60.09	3.73

NOTE: ERP = S.G power value + correction factor - 2.15.

3.2.5 Test Result of Radiated Emissions above 1GHz

Mode							
LTE Band 5, CB:1.4MHz, 1RB, Offset 2, Channel:20407							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1649.40	H	-58.68	-13.00	-45.68	-61.75	-61.33	4.80
2474.10	H	-55.18	-13.00	-42.18	-63.32	-59.09	6.06
4123.50	H	-52.09	-13.00	-39.09	-64.19	-56.50	6.56
1649.40	V	-53.15	-13.00	-40.15	-56.04	-55.80	4.80
2474.10	V	-54.90	-13.00	-41.90	-63.07	-58.81	6.06
4123.50	V	-51.25	-13.00	-38.25	-63.70	-55.66	6.56

Mode							
LTE Band 5, CB:1.4MHz, 1RB, Offset 2, Channel:20525							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1673.00	H	-57.65	-13.00	-44.65	-60.87	-60.06	4.56
2509.50	H	-51.44	-13.00	-38.44	-59.59	-55.36	6.07
4182.50	H	-52.27	-13.00	-39.27	-64.27	-56.64	6.52
1673.00	V	-52.21	-13.00	-39.21	-55.24	-54.62	4.56
2509.50	V	-49.92	-13.00	-36.92	-58.04	-53.84	6.07
4182.50	V	-51.26	-13.00	-38.26	-63.70	-55.63	6.52

Mode							
LTE Band 5, CB:1.4MHz, 1RB, Offset 2, Channel:20643							
Frequency (MHz)	Antenna Polarity.	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1696.60	H	-58.13	-13.00	-45.13	-61.48	-60.91	4.93
2544.90	H	-45.50	-13.00	-32.50	-53.65	-49.43	6.08
4241.50	H	-53.47	-13.00	-40.47	-65.66	-57.81	6.49
1696.60	V	-51.56	-13.00	-38.56	-54.73	-54.34	4.93
2544.90	V	-42.83	-13.00	-29.83	-50.90	-46.76	6.08
4241.50	V	-53.31	-13.00	-40.31	-65.92	-57.65	6.49

NOTE: ERP = S.G power value + correction factor - 2.15.

Mode							
LTE Band 5, CB:3MHz, 1RB, Offset 7, Channel:20415							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1651.00	H	-49.44	-13.00	-36.44	-52.51	-52.10	4.81
2476.50	H	-50.96	-13.00	-37.96	-59.10	-54.87	6.06
3302.00	H	-48.52	-13.00	-35.52	-58.44	-52.82	6.45
1651.00	V	-47.56	-13.00	-34.56	-50.46	-50.22	4.81
2476.50	V	-51.52	-13.00	-38.52	-59.68	-55.43	6.06
3302.00	V	-50.77	-13.00	-37.77	-60.75	-55.07	6.45

Mode							
LTE Band 5, CB:3MHz, 1RB, Offset 7, Channel:20525							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1673.00	H	-44.88	-13.00	-31.88	-48.10	-47.29	4.56
2509.50	H	-51.01	-13.00	-38.01	-59.16	-54.93	6.07
3346.00	H	-51.51	-13.00	-38.51	-61.27	-55.88	6.52
1673.00	V	-46.96	-13.00	-33.96	-49.99	-49.37	4.56
2509.50	V	-43.42	-13.00	-30.42	-51.54	-47.34	6.07
3346.00	V	-48.66	-13.00	-35.66	-58.52	-53.03	6.52

Mode							
LTE Band 5, CB:3MHz, 1RB, Offset 7, Channel:20635							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1695.00	H	-48.19	-13.00	-35.19	-51.54	-50.96	4.92
2542.50	H	-46.42	-13.00	-33.42	-54.57	-50.35	6.08
3390.00	H	-51.00	-13.00	-38.00	-60.61	-55.45	6.60
1695.00	V	-50.98	-13.00	-37.98	-48.83	-53.75	4.92
2542.50	V	-44.66	-13.00	-31.66	-42.51	-48.59	6.08
3390.00	V	-48.52	-13.00	-35.52	-46.37	-52.97	6.60

NOTE: ERP = S.G power value + correction factor - 2.15.

Mode							
LTE Band 5, CB:5MHz, 1RB, Offset 12, Channel:20425							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1653.00	H	-50.58	-13.00	-37.58	-53.66	-53.24	4.81
2479.50	H	-46.22	-13.00	-33.22	-54.36	-50.13	6.06
3306.00	H	-48.46	-13.00	-35.46	-58.36	-52.77	6.46
1653.00	V	-52.18	-13.00	-39.18	-50.03	-54.84	4.81
2479.50	V	-50.97	-13.00	-37.97	-48.82	-54.88	6.06
3306.00	V	-49.66	-13.00	-36.66	-47.51	-53.97	6.46

Mode							
LTE Band 5, CB:5MHz, 1RB, Offset 12, Channel:20525							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1673.80	H	-43.98	-13.00	-30.98	-47.20	-46.39	4.56
2509.50	H	-43.64	-13.00	-30.64	-51.79	-47.56	6.07
3346.00	H	-50.41	-13.00	-37.41	-60.17	-54.78	6.52
1673.80	V	-46.42	-13.00	-33.42	-49.45	-48.83	4.56
2509.50	V	-45.76	-13.00	-32.76	-53.88	-49.68	6.07
3346.00	V	-48.68	-13.00	-35.68	-58.54	-53.05	6.52

Mode							
LTE Band 5, CB:5MHz, 1RB, Offset 12, Channel:20625							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1693.00	H	-50.66	-13.00	-37.66	-54.00	-53.43	4.92
2539.50	H	-48.48	-13.00	-35.48	-56.63	-52.41	6.08
3386.00	H	-50.26	-13.00	-37.26	-59.89	-54.71	6.60
1693.00	V	-48.46	-13.00	-35.46	-51.61	-51.23	4.92
2539.50	V	-44.62	-13.00	-31.62	-52.69	-48.55	6.08
3386.00	V	-47.97	-13.00	-34.97	-57.73	-52.42	6.60

NOTE: ERP = S.G power value + correction factor - 2.15.

Mode							
LTE Band 5, CB:10MHz, 1RB, Offset 24, Channel:20450							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1658.00	H	-57.08	-13.00	-44.08	-60.20	-59.75	4.82
2487.00	H	-51.74	-13.00	-38.74	-59.88	-55.65	6.06
4145.00	H	-52.99	-13.00	-39.99	-65.06	-57.39	6.55
1658.00	V	-50.33	-13.00	-37.33	-53.27	-53.00	4.82
2487.00	V	-51.54	-13.00	-38.54	-59.69	-55.45	6.06
4145.00	V	-51.15	-13.00	-38.15	-63.60	-55.55	6.55

Mode							
LTE Band 5, CB:10MHz, 1RB, Offset 24, Channel:20525							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1673.00	H	-57.85	-13.00	-44.85	-61.07	-60.26	4.56
2509.50	H	-51.74	-13.00	-38.74	-59.89	-55.66	6.07
4182.50	H	-52.20	-13.00	-39.20	-64.20	-56.57	6.52
1673.00	V	-51.91	-13.00	-38.91	-54.94	-54.32	4.56
2509.50	V	-50.53	-13.00	-37.53	-58.65	-54.45	6.07
4182.50	V	-51.66	-13.00	-38.66	-64.10	-56.03	6.52

Mode							
LTE Band 5, CB:10MHz, 1RB, Offset 24, Channel:20600							
Frequency (MHz)	Antenna Polarity	E.R.P (dBm)	Limit (dBm)	Margin (dB)	S.A Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)
1688.00	H	-55.48	-13.00	-42.48	-58.78	-58.23	4.90
2532.00	H	-49.10	-13.00	-36.10	-57.25	-53.03	6.08
4220.00	H	-51.92	-13.00	-38.92	-63.99	-56.27	6.50
1688.00	V	-44.91	-13.00	-31.91	-48.03	-47.66	4.90
2532.00	V	-45.99	-13.00	-32.99	-54.08	-49.92	6.08
4220.00	V	-51.21	-13.00	-38.21	-63.73	-55.56	6.50

NOTE: ERP = S.G power value + correction factor - 2.15.

3.3 Conducted Emissions


3.3.1 Limit of Conducted Emissions

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.




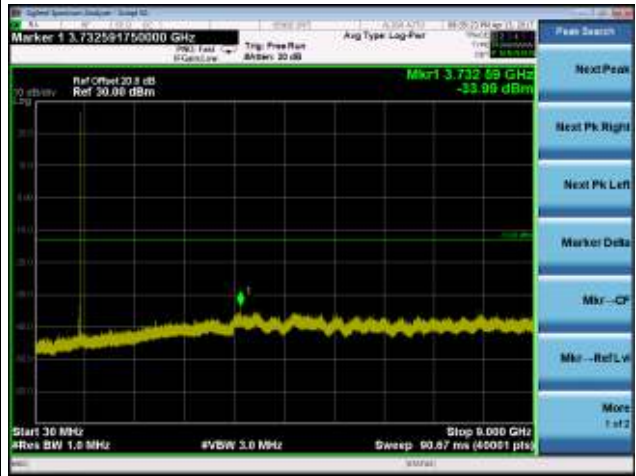
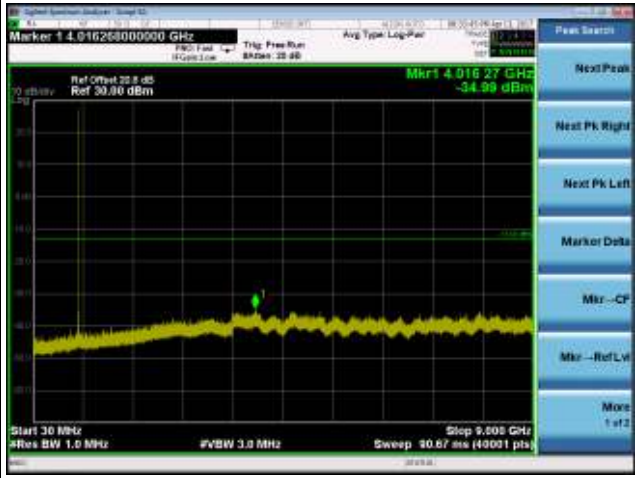
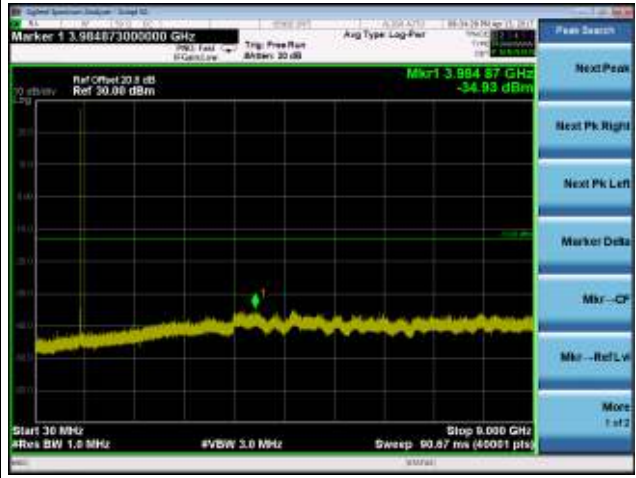
3.3.2 Test Procedures






1. Lowest, middle and highest operating channels are tested for this item.
2. Scan frequency range is from 30 MHz ~ 9 GHz.
3. Set RBW = 1MHz, VBW = 3MHz, detector = RMS, sweep time = auto.
4. Record the max trace value and capture the test plot of each sub frequency band.




3.3.3 Test Setup


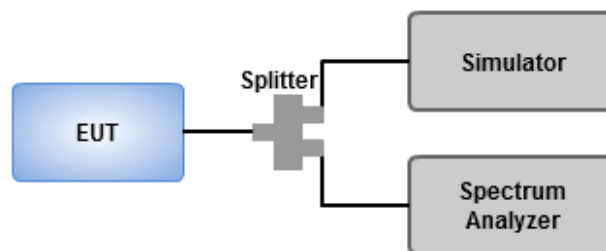

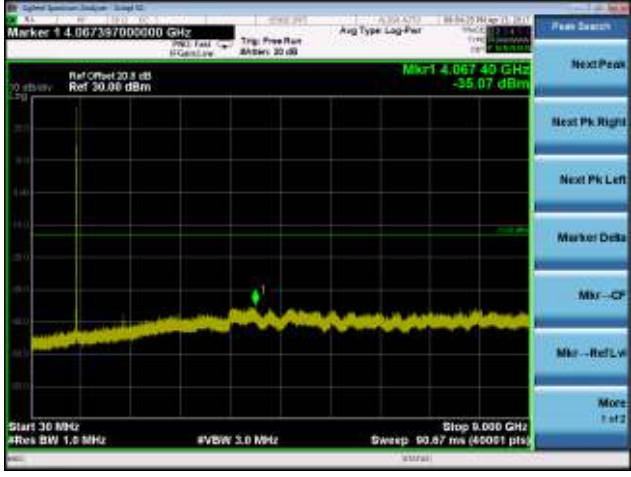
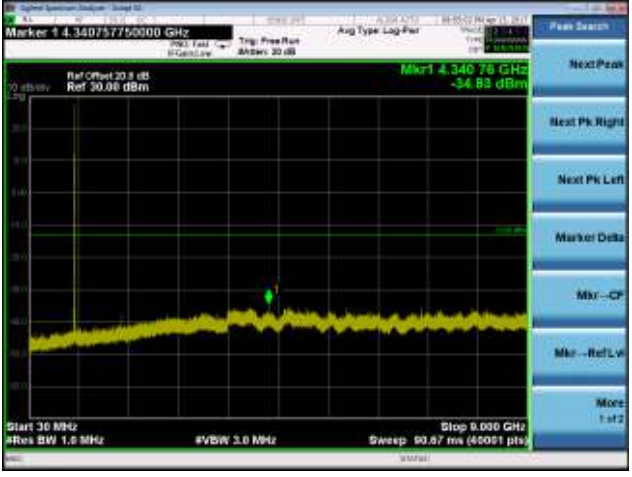


3.3.4 Test Result of Conducted Emissions

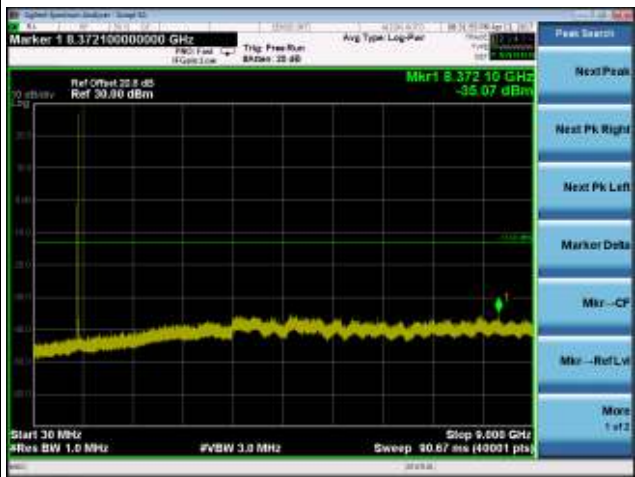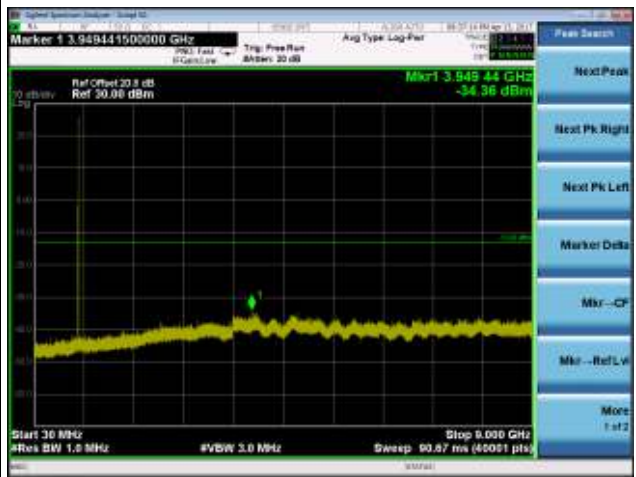Mode	LTE Band 5, CB: 1.4MHz, QPSK	Mode	LTE Band 5, CB: 1.4MHz, 16QAM
Channel	20407	Channel	20407
			
Channel	20525	Channel	20525
			
Channel	20643	Channel	20643
			

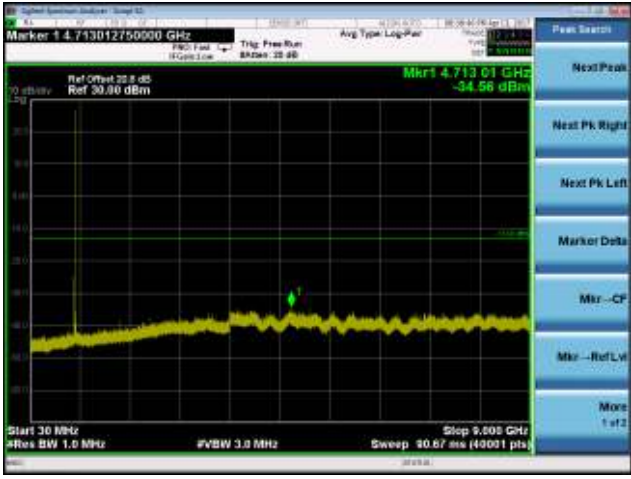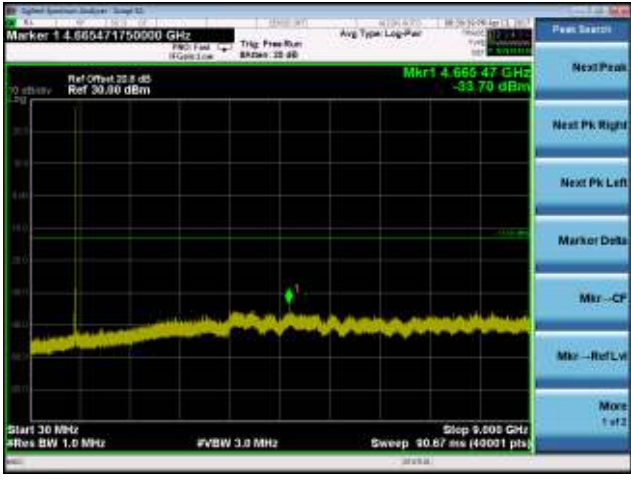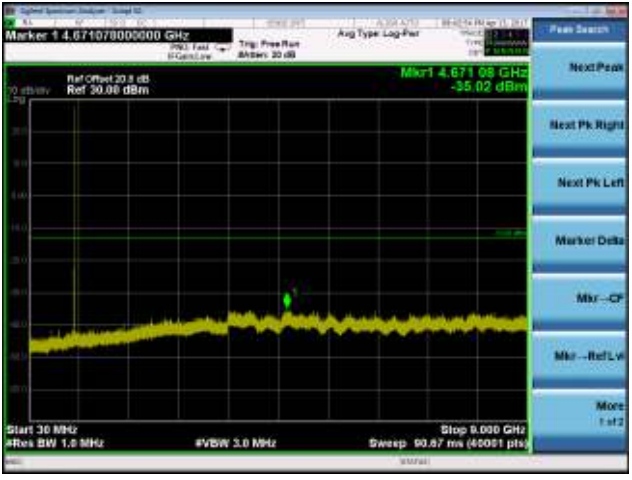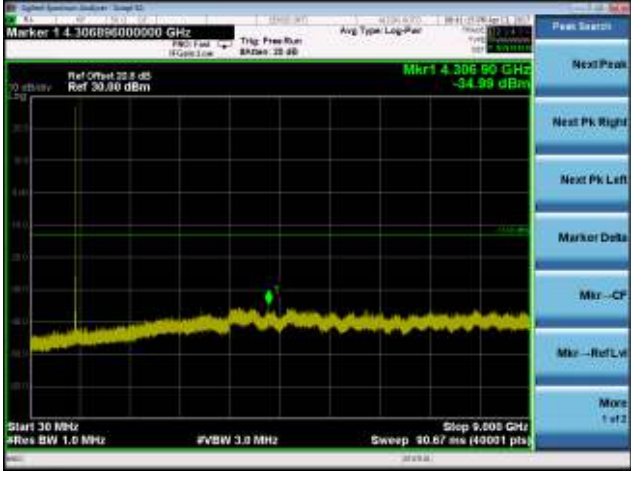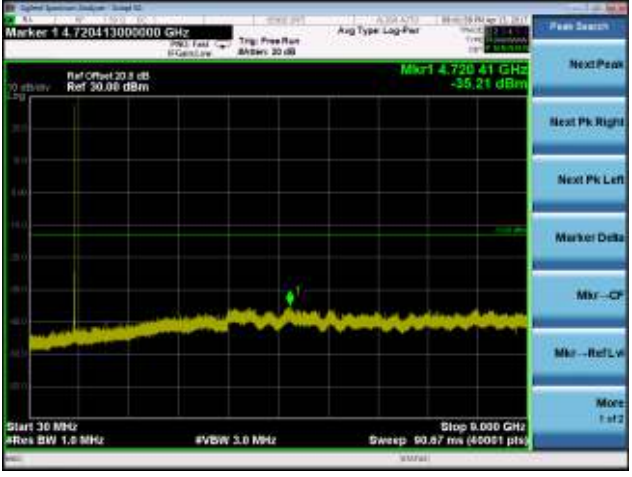Mode	LTE Band 5, CB: 3MHz, QPSK	Mode	LTE Band 5, CB: 3MHz, 16QAM
Channel	20415	Channel	20415
			
Channel	20525	Channel	20525
			
Channel	20635	Channel	20635
			

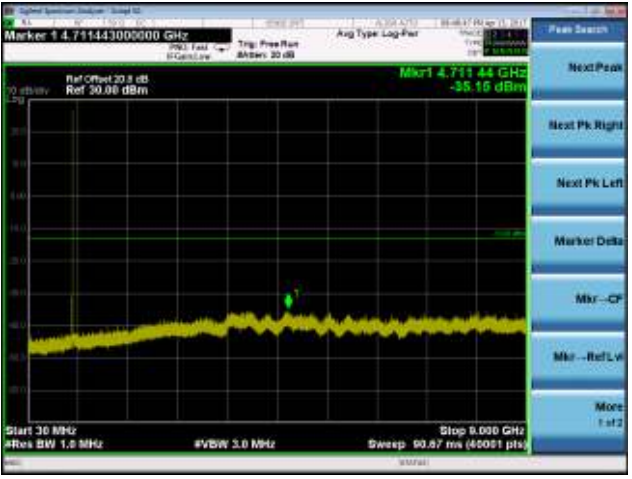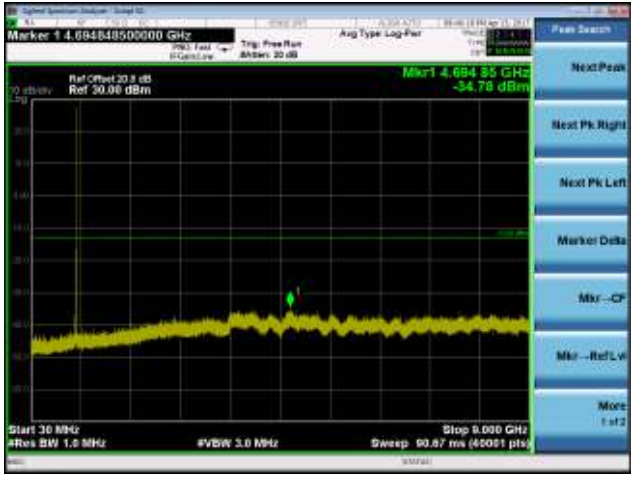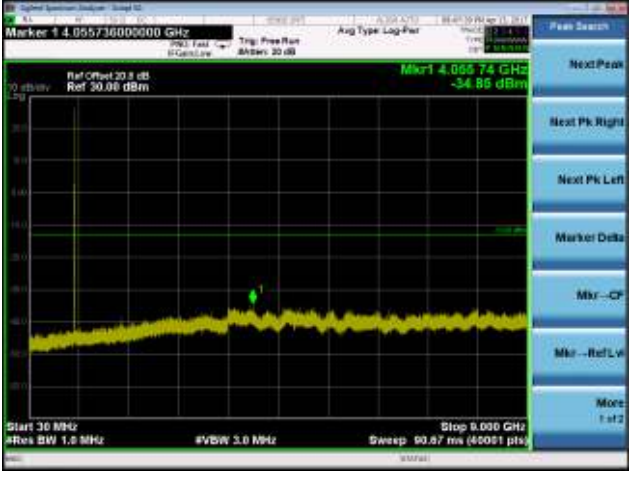Mode	LTE Band 5, CB: 5MHz, QPSK	Mode	LTE Band 5, CB: 5MHz, 16QAM
Channel	20425	Channel	20425
			
Channel	20525	Channel	20525
			
Channel	20625	Channel	20625
			

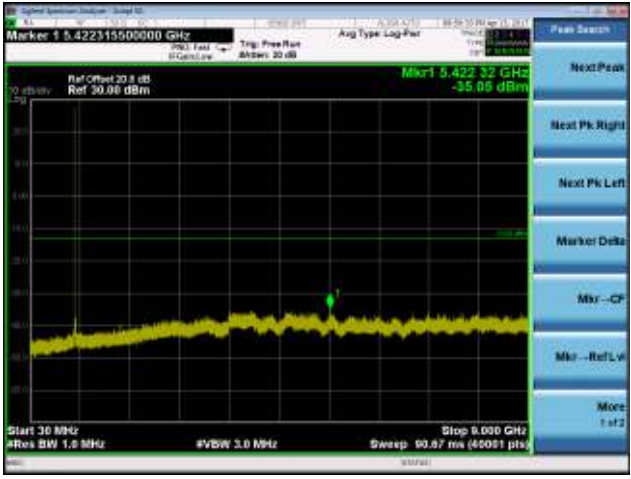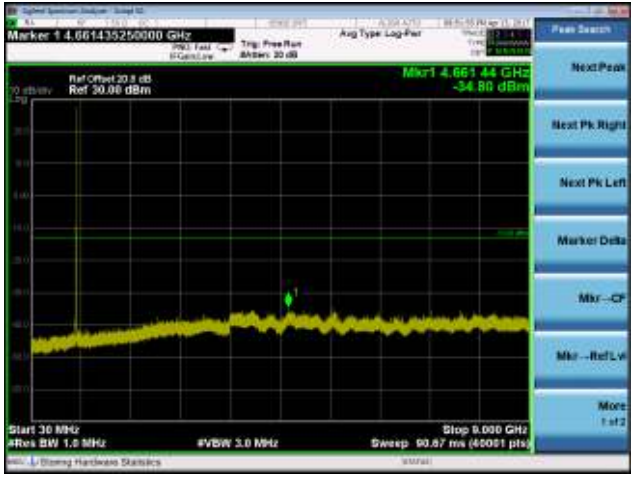Mode	LTE Band 5, CB: 10MHz, QPSK	Mode	LTE Band 5, CB: 10MHz, 16QAM
Channel	20450	Channel	20450
			
Channel	20525	Channel	20525
			
Channel	20600	Channel	20600
			

3.4 Band Edge


3.4.1 Limit of Band Edge

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB equal to -13dBm.


3.4.2 Test Procedures


- 1 Lowest and highest operating channels are tested for this item.
- 2 Set RBW = 15 / 30 / 51 / 100 kHz, VBW = 51 / 100 / 160 / 300 kHz for LTE channel bandwidth 1.4 / 3 / 5 / 10 MHz, detector = RMS, sweep time = auto to measure trace.
- 3 Set RBW = 15 / 30 / 51 / 100 kHz, VBW = 51 / 100 / 160 / 300 kHz for LTE channel bandwidth 1.4 / 3 / 5 / 10 MHz, detector = RMS and use channel power measurement function of spectrum analyzer to integrate power over 1MHz.


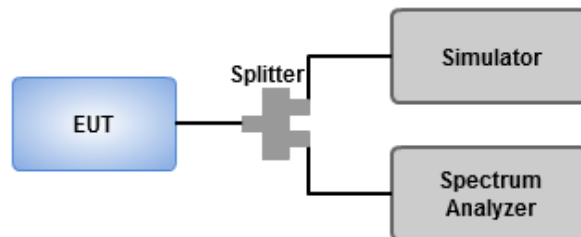


3.4.3 Test Setup




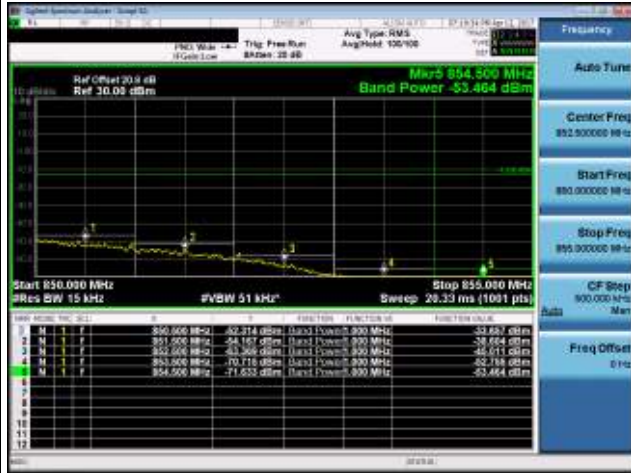


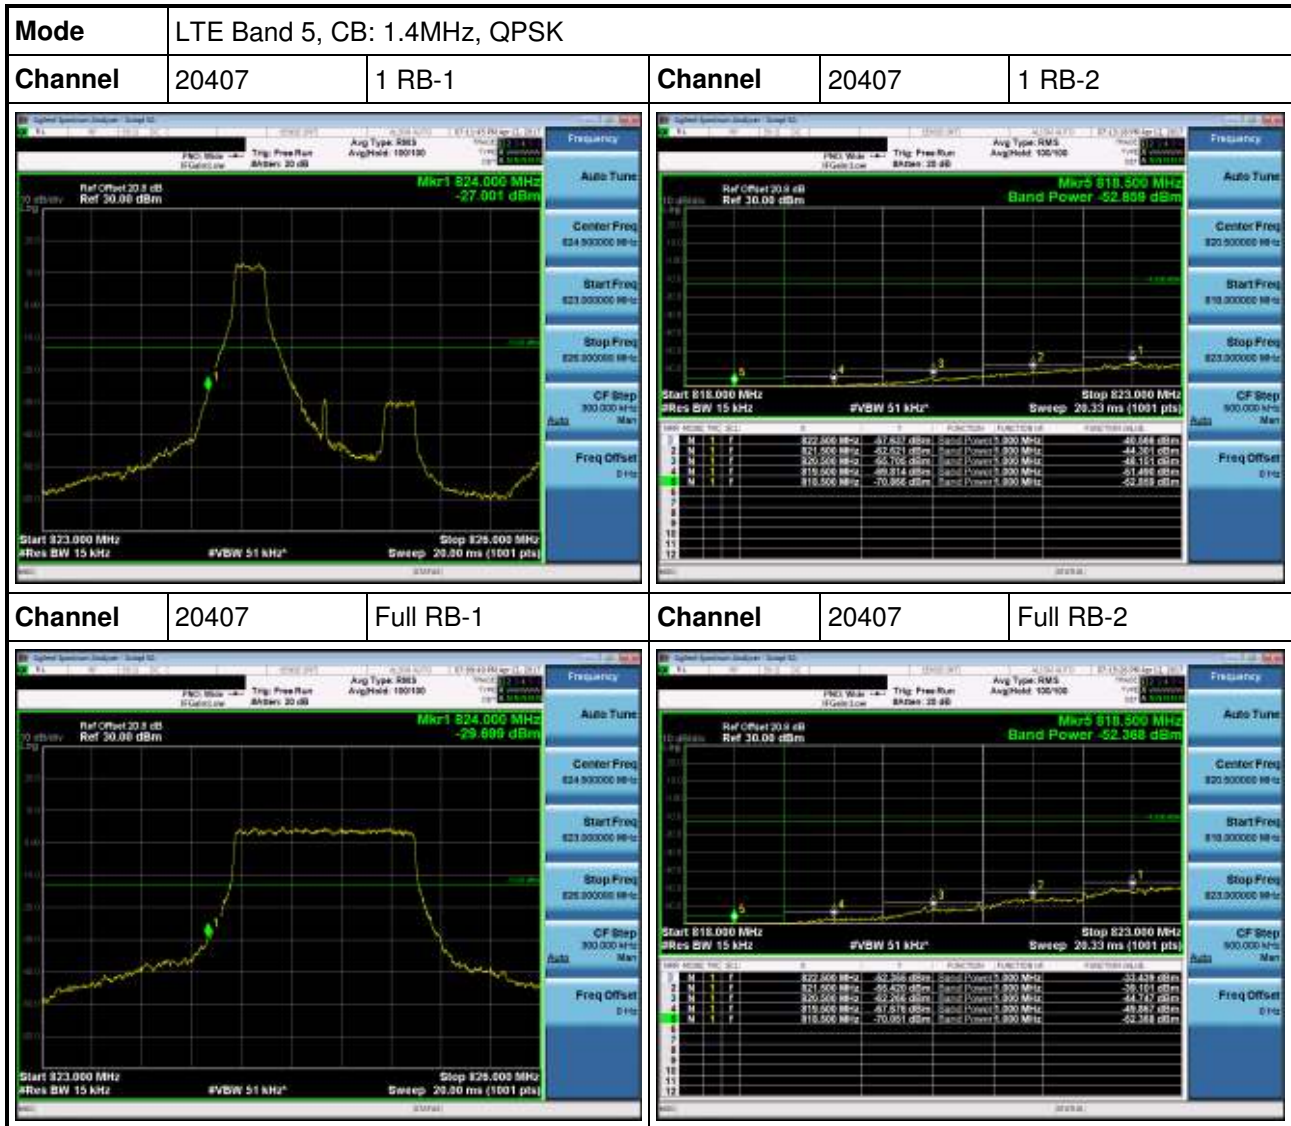
3.4.4 Test Result of Band Edge

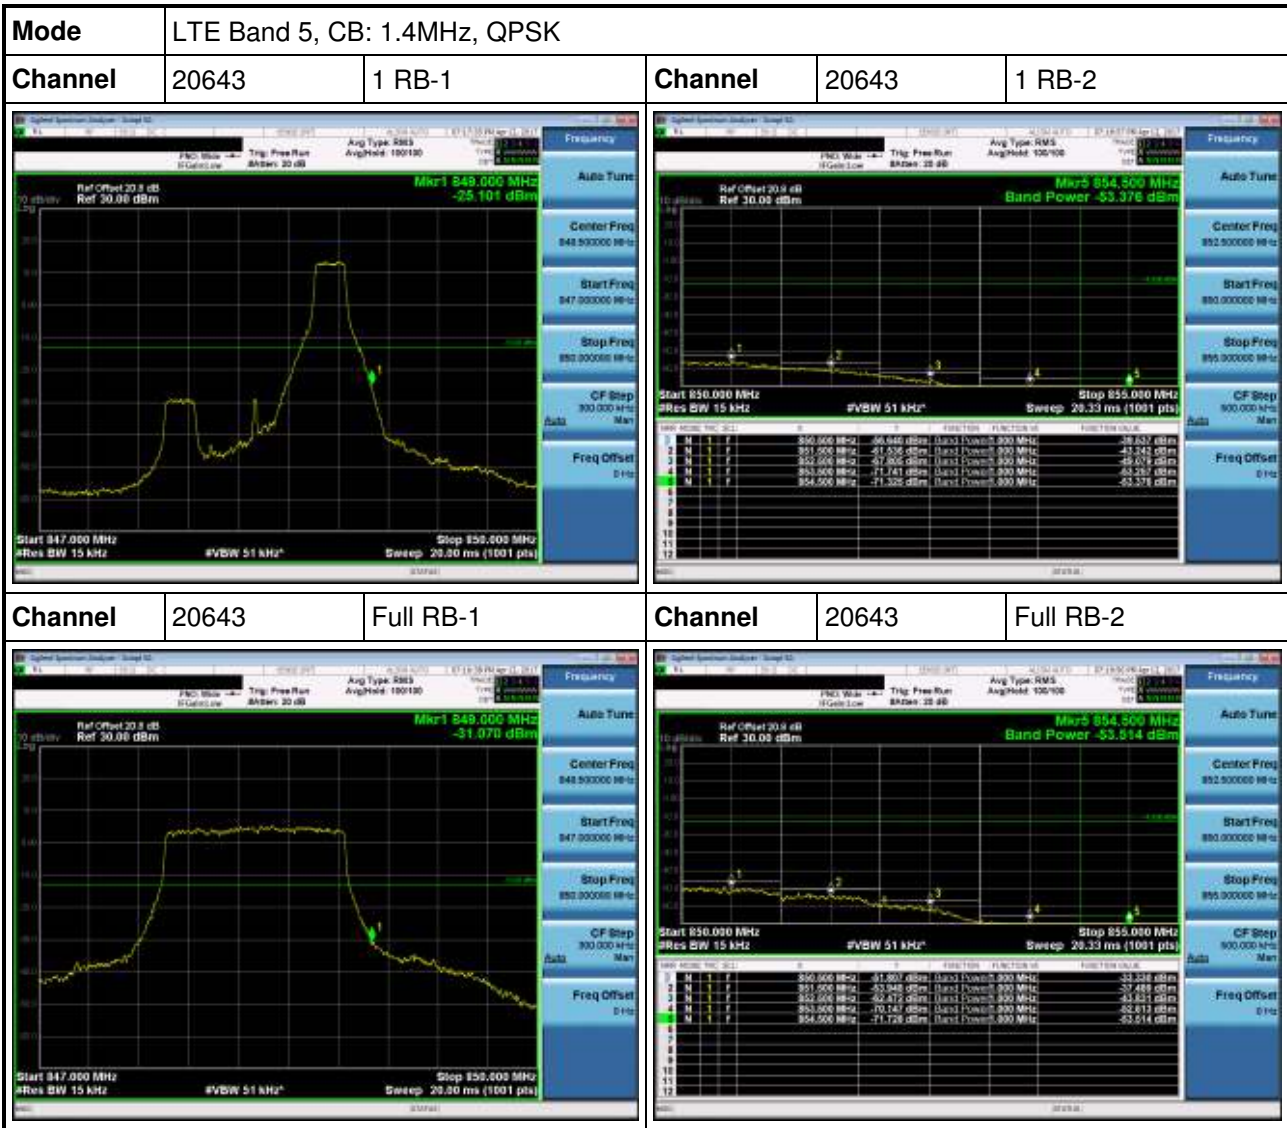


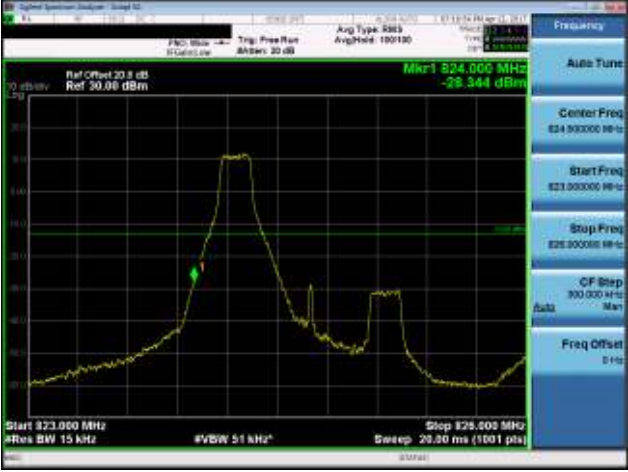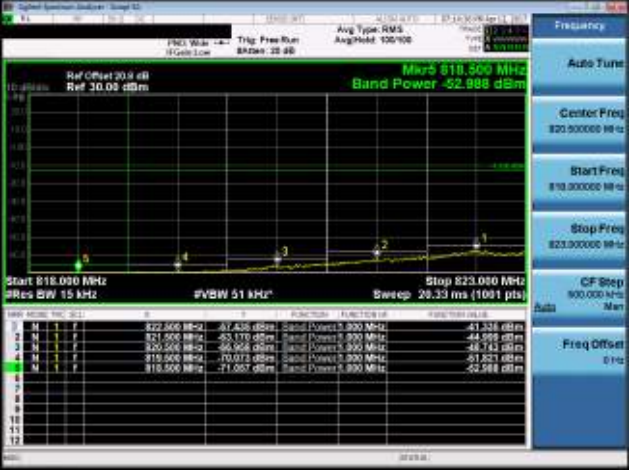



Mode	LTE Band 5, CB: 1.4MHz, 16QAM				
Channel	20407	1 RB-1	Channel	20407	1 RB-2
					
Channel	20407	Full RB-1	Channel	20407	Full RB-2
					

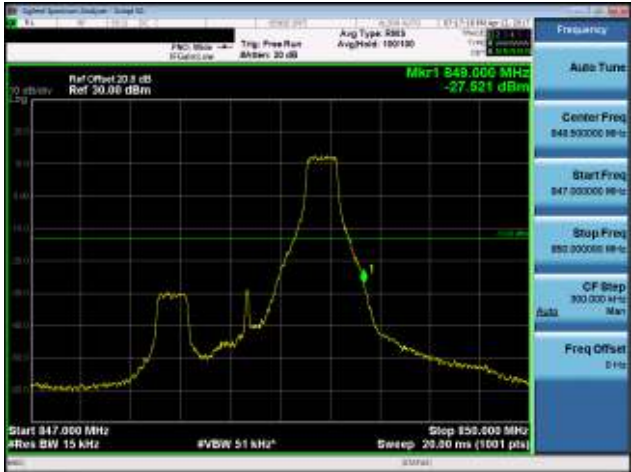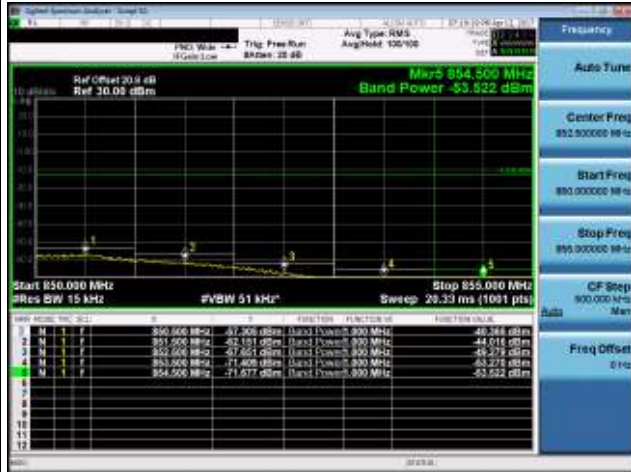
Mode		LTE Band 5, CB: 1.4MHz, 16QAM																																					
Channel		20643	1 RB-1	Channel	20643	1 RB-2																																	
 <p>Ref Offset 20.0 dB Ref 30.00 dBm Mkr1 849.000 MHz -27.921 dBm</p> <p>Center Freq: 848.500000 MHz Start Freq: 847.000000 MHz Stop Freq: 850.000000 MHz CF Step: 300.000 MHz #Res BW: 15 kHz #VBW: 51 kHz Sweep: 20.00 ms (1001 pts)</p>		 <p>Ref Offset 20.0 dB Ref 30.00 dBm Mkr5 854.500 MHz Band Power -53.522 dBm</p> <p>Center Freq: 852.500000 MHz Start Freq: 850.000000 MHz Stop Freq: 855.000000 MHz CF Step: 300.000 MHz #Res BW: 15 kHz #VBW: 51 kHz Sweep: 20.00 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>Chan</th> <th>Mode</th> <th>Freq (MHz)</th> <th>Power (dBm)</th> <th>Band Power (MHz)</th> <th>Band Power (dBm)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>850.000</td> <td>-67.308</td> <td>850.000</td> <td>-40.848</td> </tr> <tr> <td>2</td> <td>N</td> <td>851.500</td> <td>-62.191</td> <td>851.500</td> <td>-44.016</td> </tr> <tr> <td>3</td> <td>N</td> <td>852.500</td> <td>-67.651</td> <td>852.500</td> <td>-48.279</td> </tr> <tr> <td>4</td> <td>N</td> <td>853.500</td> <td>-71.408</td> <td>853.500</td> <td>-52.278</td> </tr> <tr> <td>5</td> <td>N</td> <td>854.500</td> <td>-71.677</td> <td>854.500</td> <td>-53.522</td> </tr> </tbody> </table>		Chan	Mode	Freq (MHz)	Power (dBm)	Band Power (MHz)	Band Power (dBm)	1	N	850.000	-67.308	850.000	-40.848	2	N	851.500	-62.191	851.500	-44.016	3	N	852.500	-67.651	852.500	-48.279	4	N	853.500	-71.408	853.500	-52.278	5	N	854.500	-71.677	854.500	-53.522
Chan	Mode	Freq (MHz)	Power (dBm)	Band Power (MHz)	Band Power (dBm)																																		
1	N	850.000	-67.308	850.000	-40.848																																		
2	N	851.500	-62.191	851.500	-44.016																																		
3	N	852.500	-67.651	852.500	-48.279																																		
4	N	853.500	-71.408	853.500	-52.278																																		
5	N	854.500	-71.677	854.500	-53.522																																		
Channel		20643	Full RB-1	Channel	20643	Full RB-2																																	
 <p>Ref Offset 20.0 dB Ref 30.00 dBm Mkr1 849.000 MHz -31.347 dBm</p> <p>Center Freq: 848.500000 MHz Start Freq: 847.000000 MHz Stop Freq: 850.000000 MHz CF Step: 300.000 MHz #Res BW: 15 kHz #VBW: 51 kHz Sweep: 20.00 ms (1001 pts)</p>		 <p>Ref Offset 20.0 dB Ref 30.00 dBm Mkr5 854.500 MHz Band Power -53.464 dBm</p> <p>Center Freq: 852.500000 MHz Start Freq: 850.000000 MHz Stop Freq: 855.000000 MHz CF Step: 300.000 MHz #Res BW: 15 kHz #VBW: 51 kHz Sweep: 20.00 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>Chan</th> <th>Mode</th> <th>Freq (MHz)</th> <th>Power (dBm)</th> <th>Band Power (MHz)</th> <th>Band Power (dBm)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>850.000</td> <td>-62.314</td> <td>850.000</td> <td>-33.867</td> </tr> <tr> <td>2</td> <td>N</td> <td>851.500</td> <td>-64.167</td> <td>851.500</td> <td>-38.604</td> </tr> <tr> <td>3</td> <td>N</td> <td>852.500</td> <td>-63.368</td> <td>852.500</td> <td>-45.011</td> </tr> <tr> <td>4</td> <td>N</td> <td>853.500</td> <td>-70.718</td> <td>853.500</td> <td>-42.788</td> </tr> <tr> <td>5</td> <td>N</td> <td>854.500</td> <td>-71.632</td> <td>854.500</td> <td>-53.464</td> </tr> </tbody> </table>		Chan	Mode	Freq (MHz)	Power (dBm)	Band Power (MHz)	Band Power (dBm)	1	N	850.000	-62.314	850.000	-33.867	2	N	851.500	-64.167	851.500	-38.604	3	N	852.500	-63.368	852.500	-45.011	4	N	853.500	-70.718	853.500	-42.788	5	N	854.500	-71.632	854.500	-53.464
Chan	Mode	Freq (MHz)	Power (dBm)	Band Power (MHz)	Band Power (dBm)																																		
1	N	850.000	-62.314	850.000	-33.867																																		
2	N	851.500	-64.167	851.500	-38.604																																		
3	N	852.500	-63.368	852.500	-45.011																																		
4	N	853.500	-70.718	853.500	-42.788																																		
5	N	854.500	-71.632	854.500	-53.464																																		

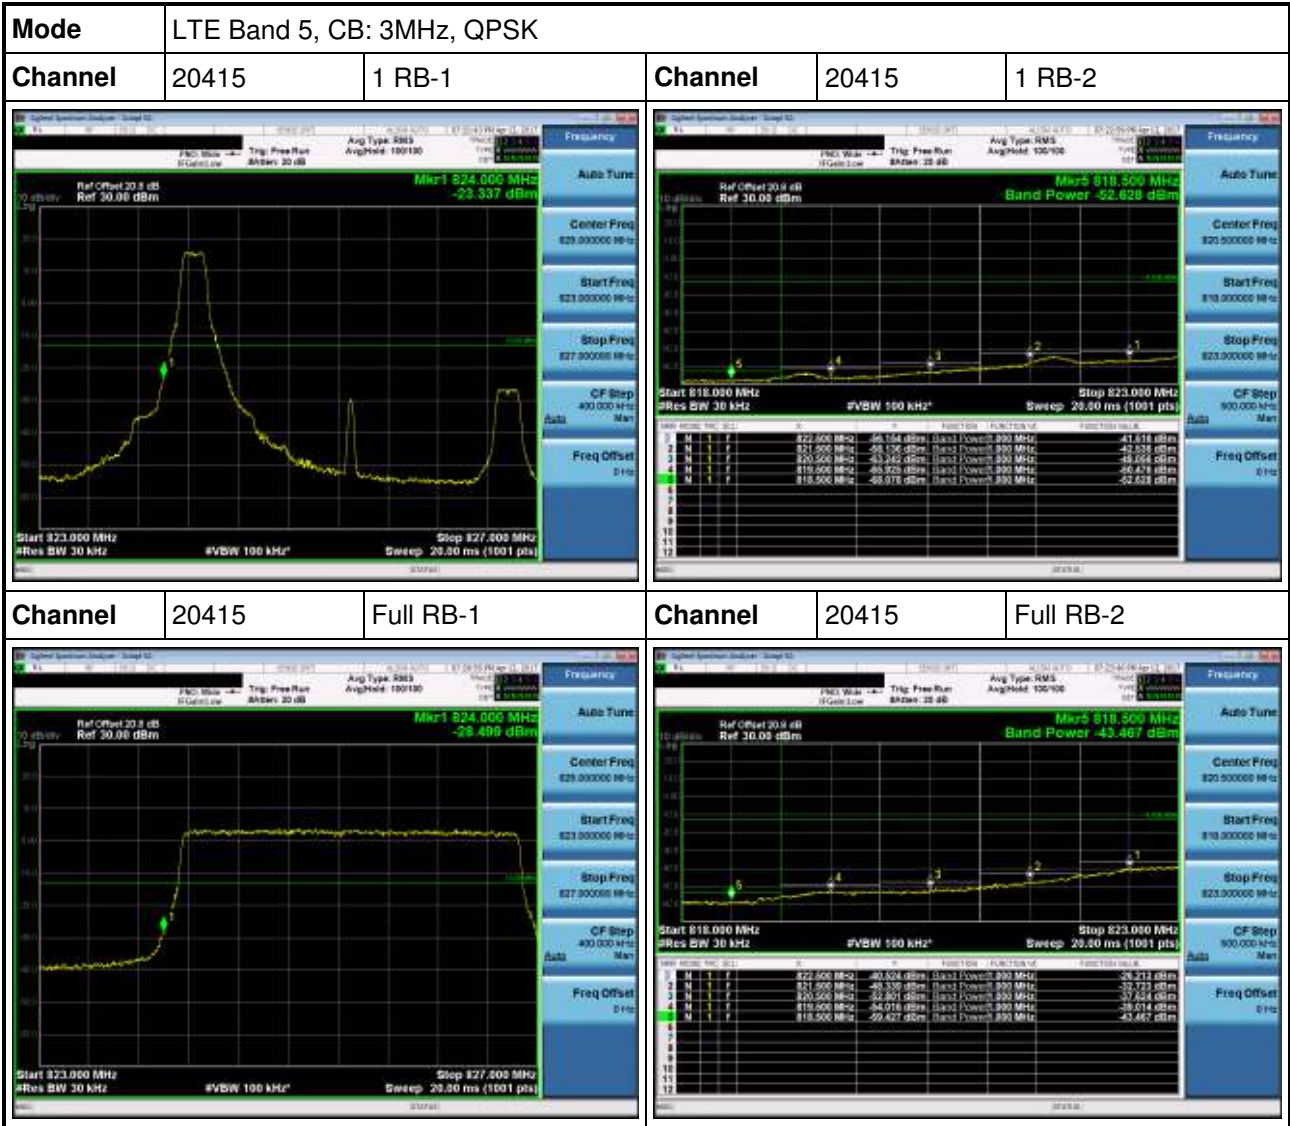


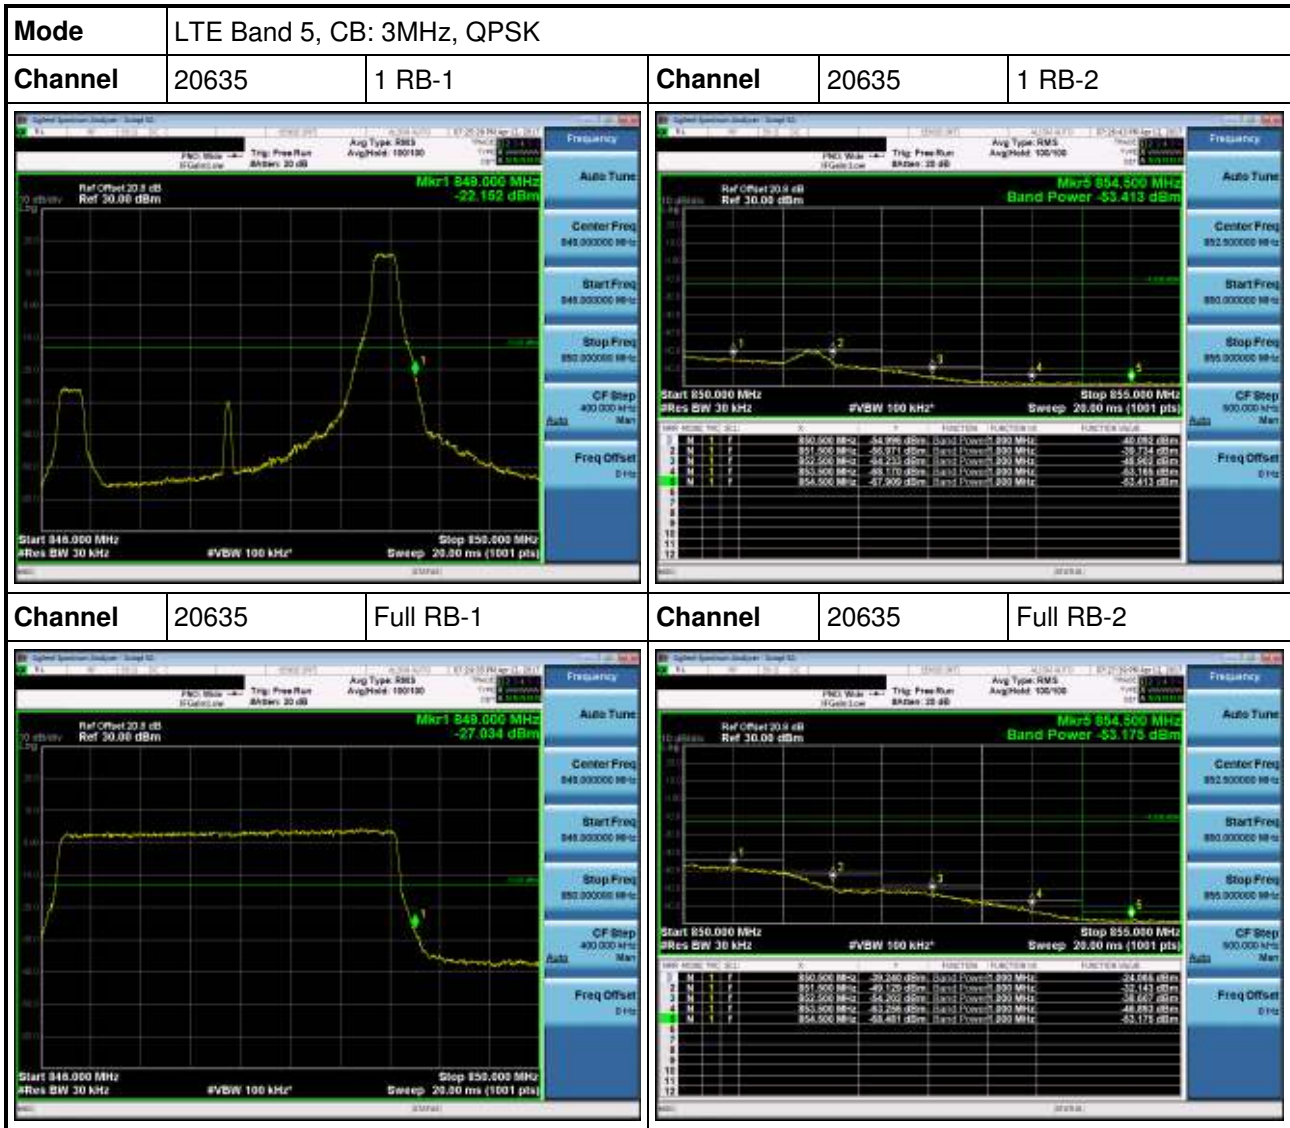




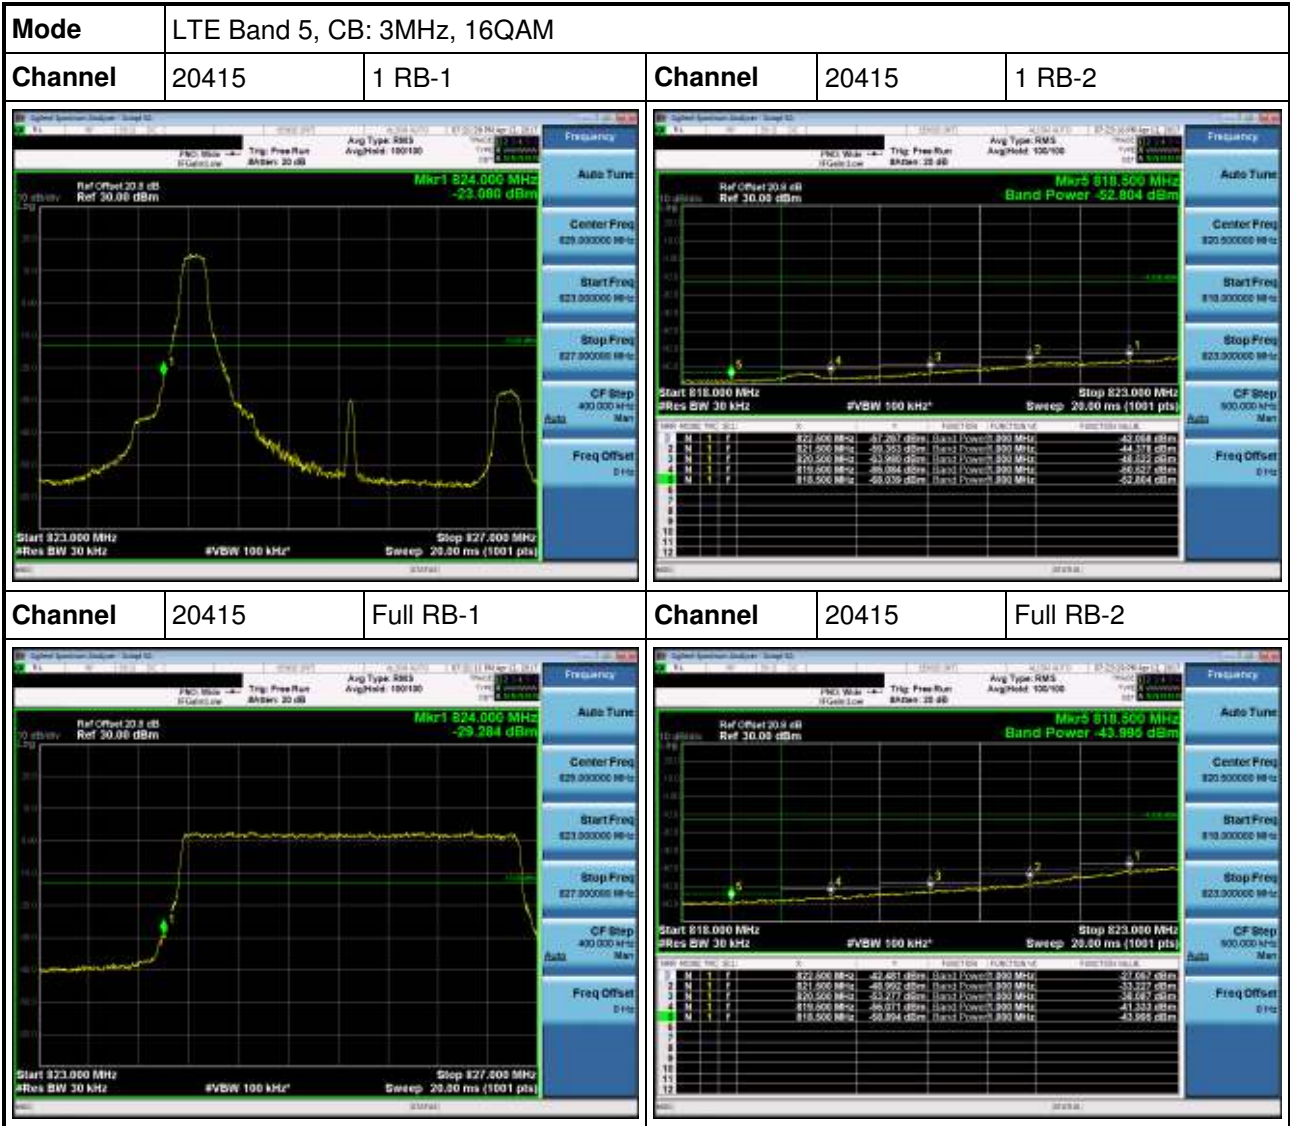


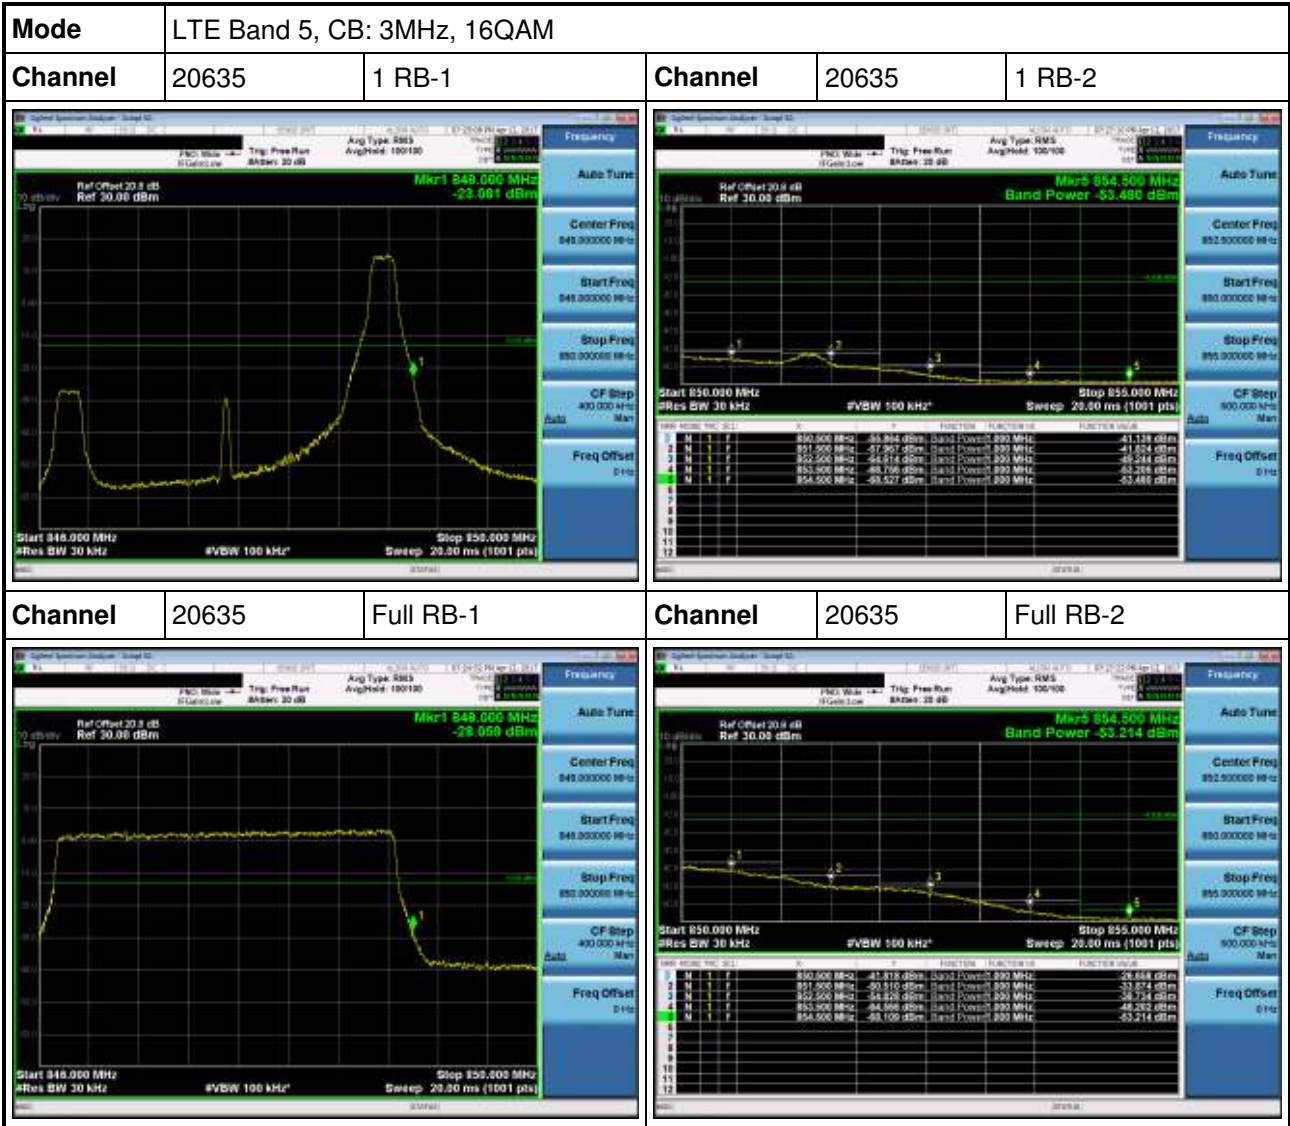


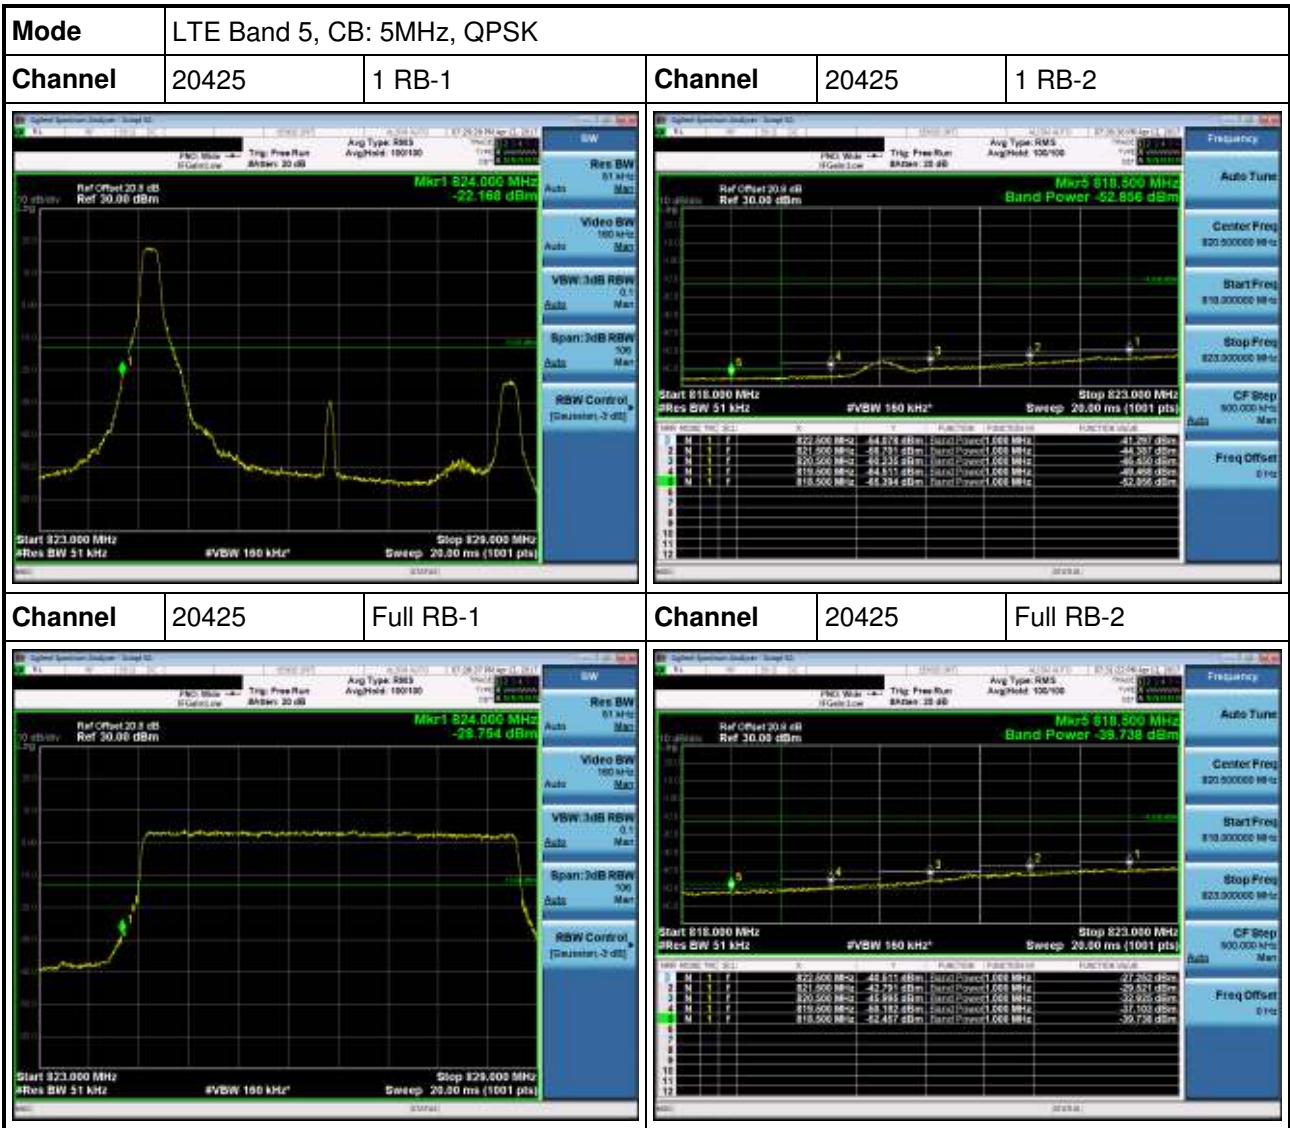


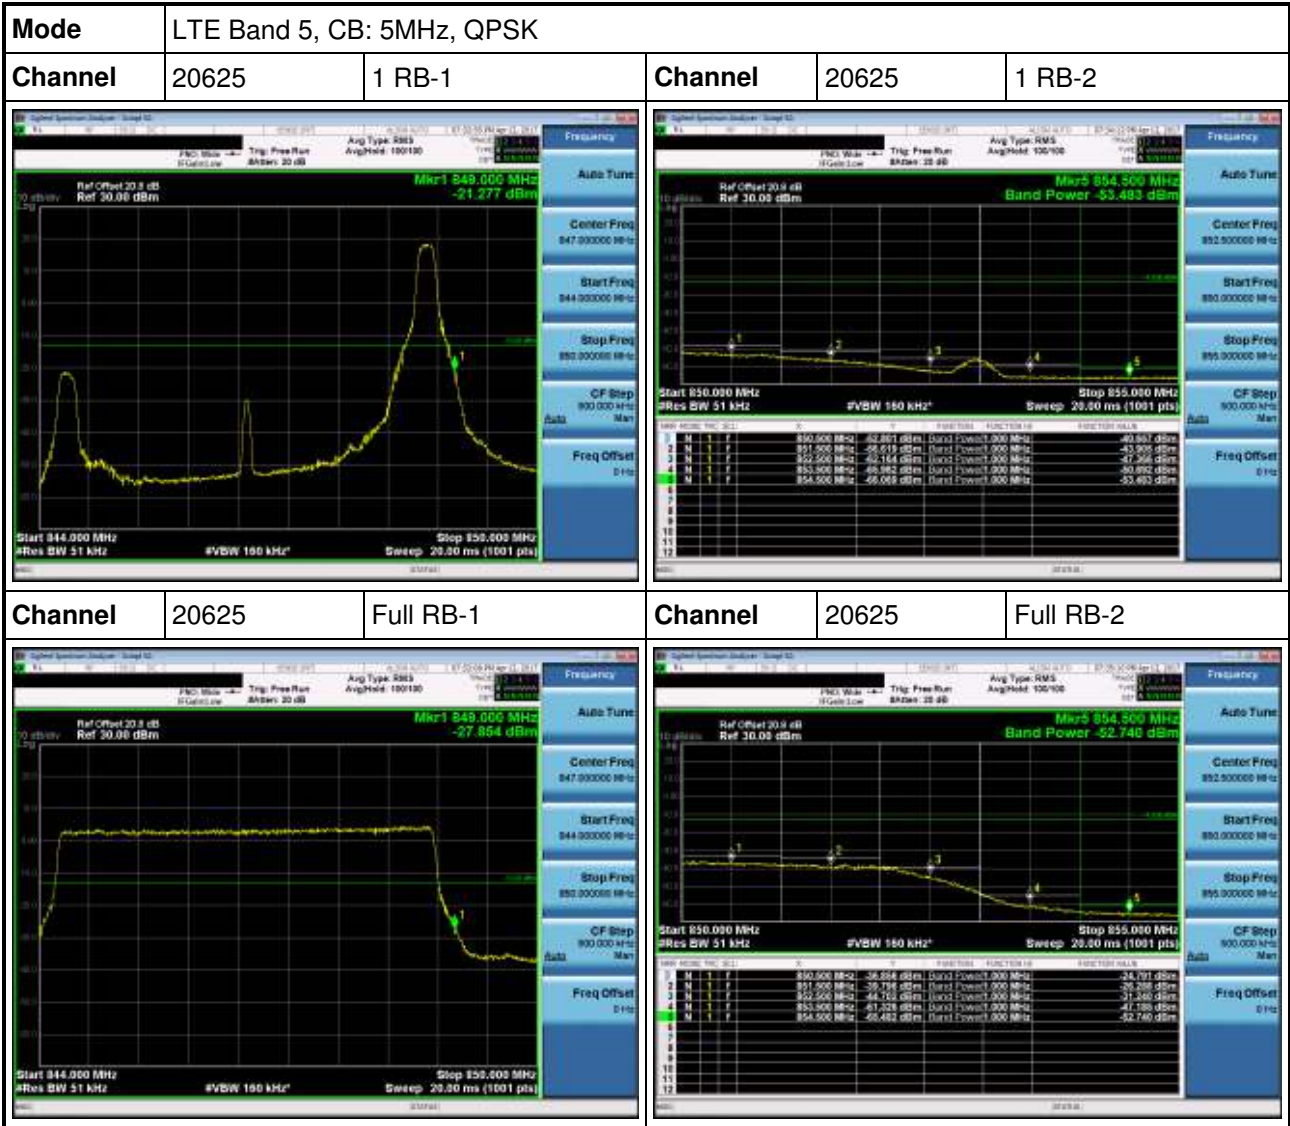


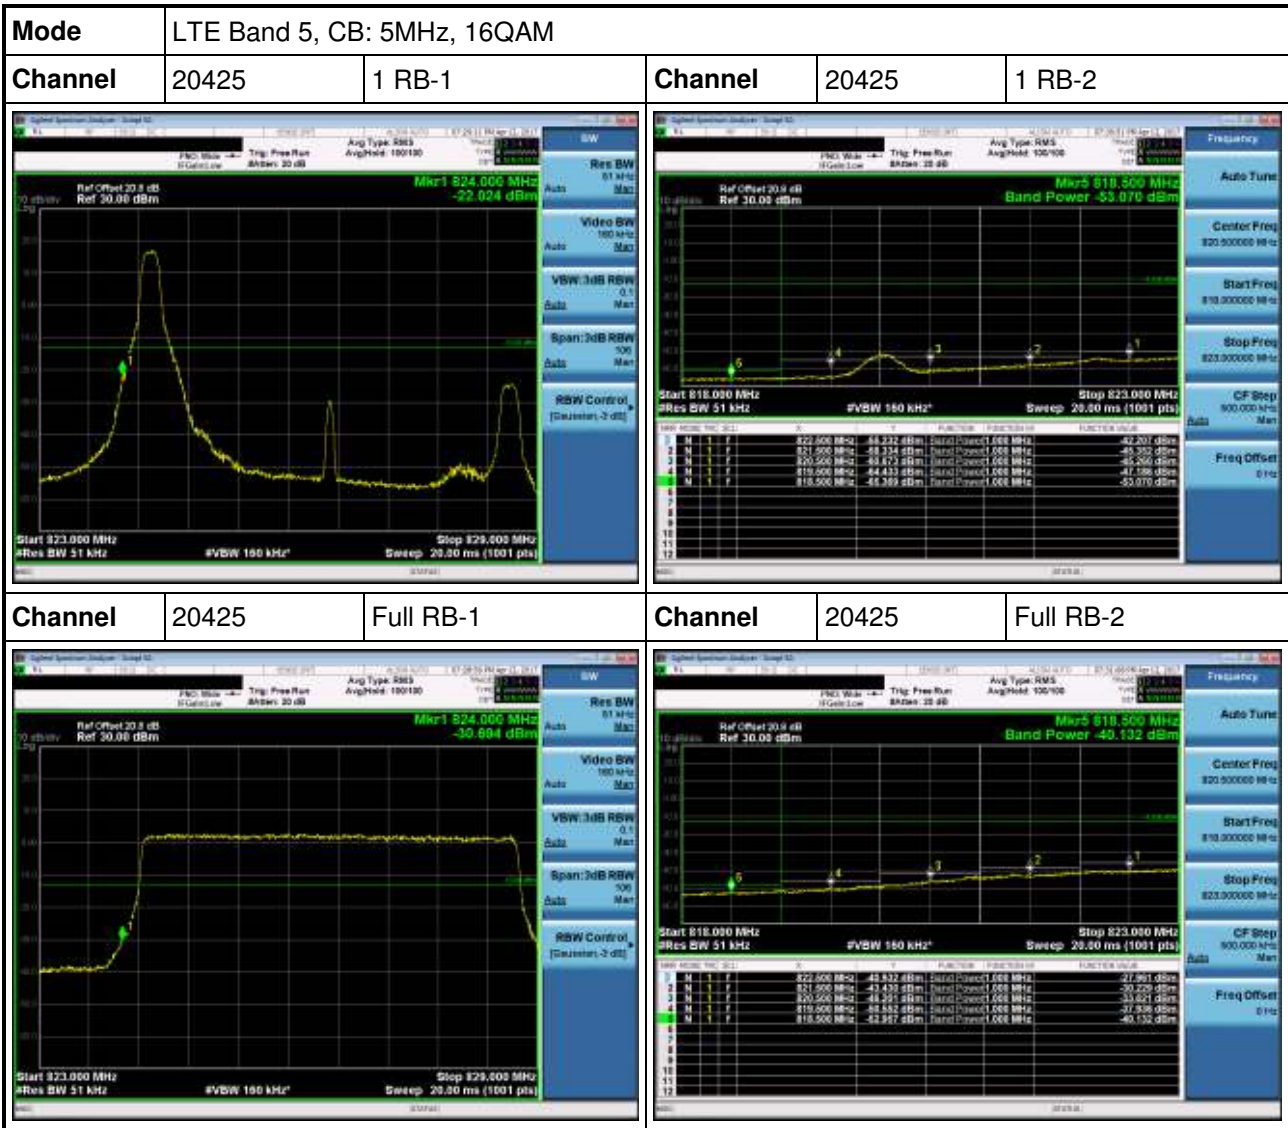


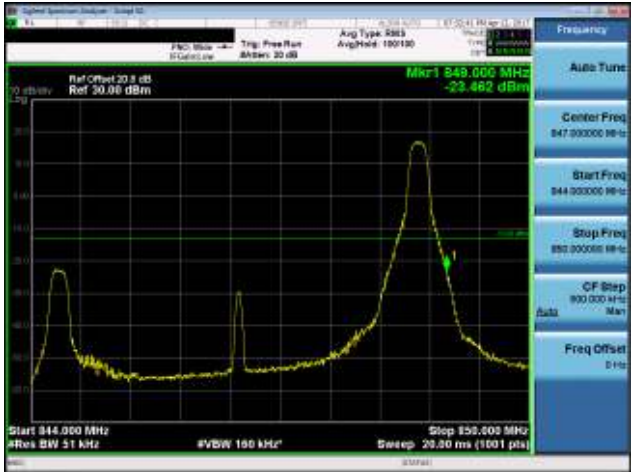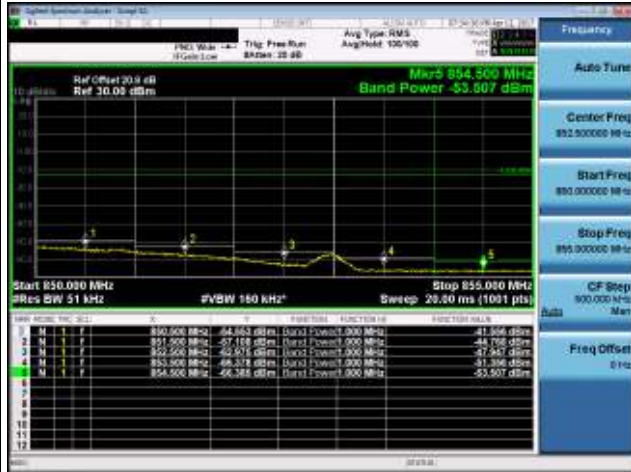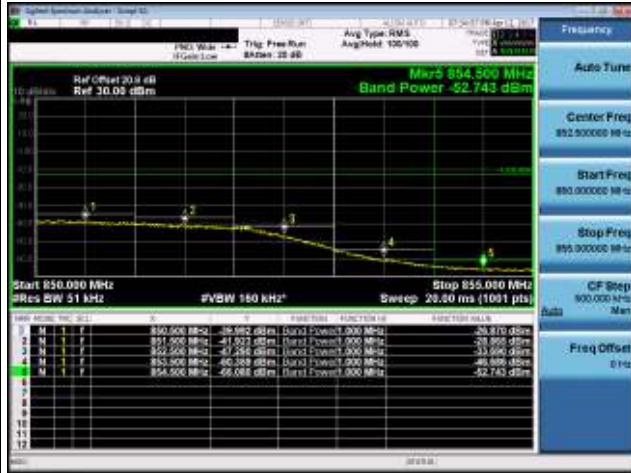Mode	LTE Band 5, CB: 5MHz, 16QAM				
Channel	20625	1 RB-1	Channel	20625	1 RB-2
					
Channel	20625	Full RB-1	Channel	20625	Full RB-2
					

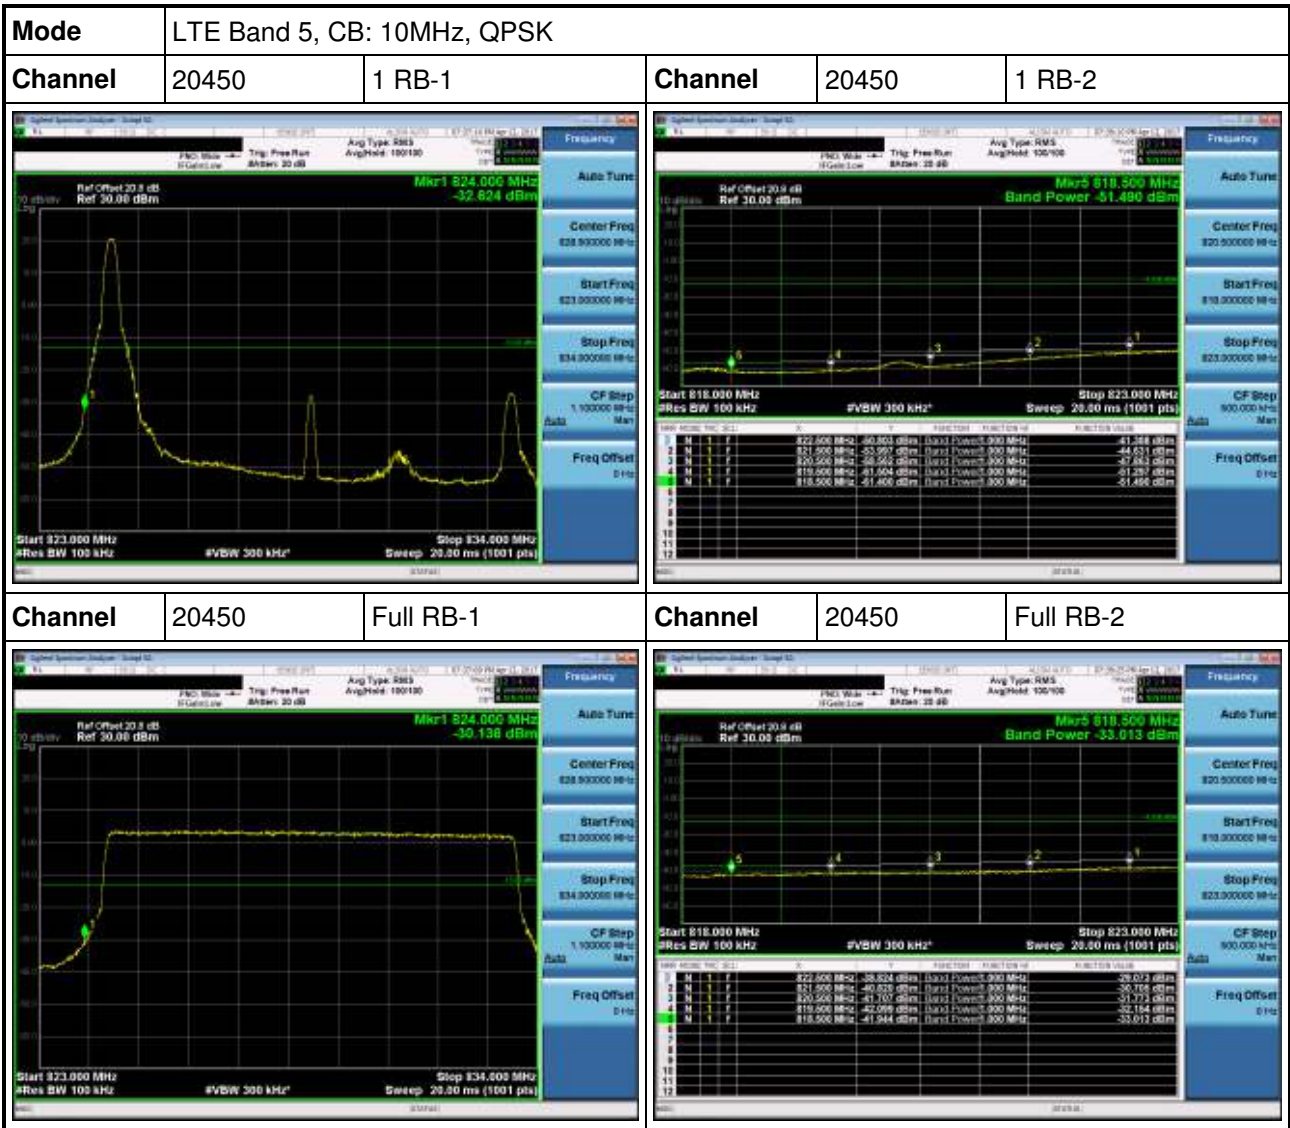

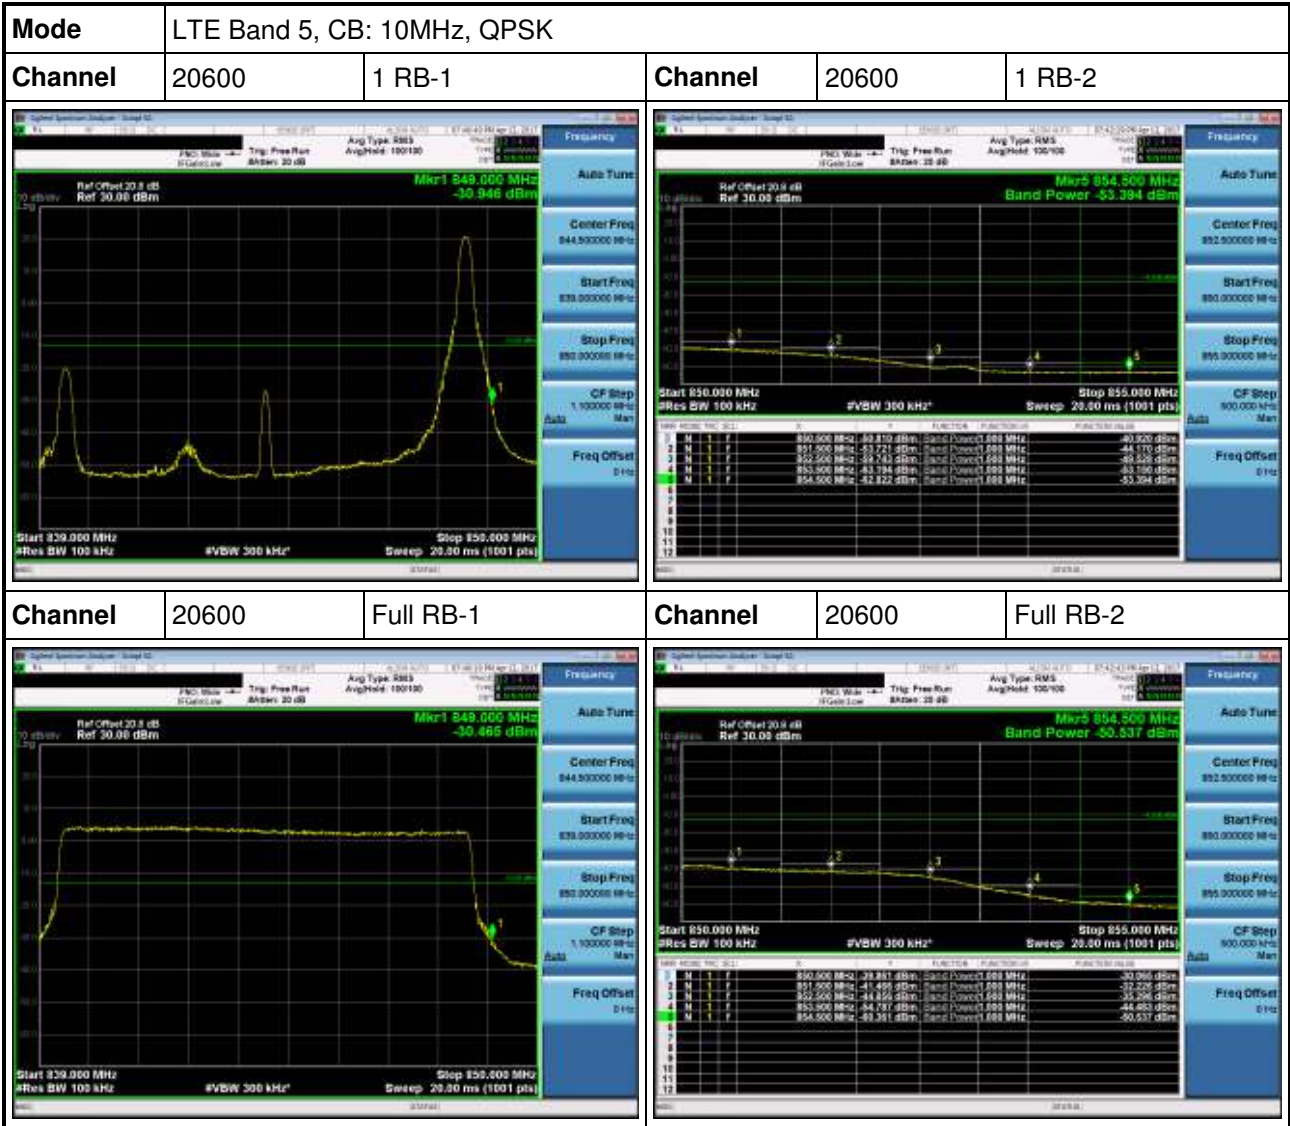

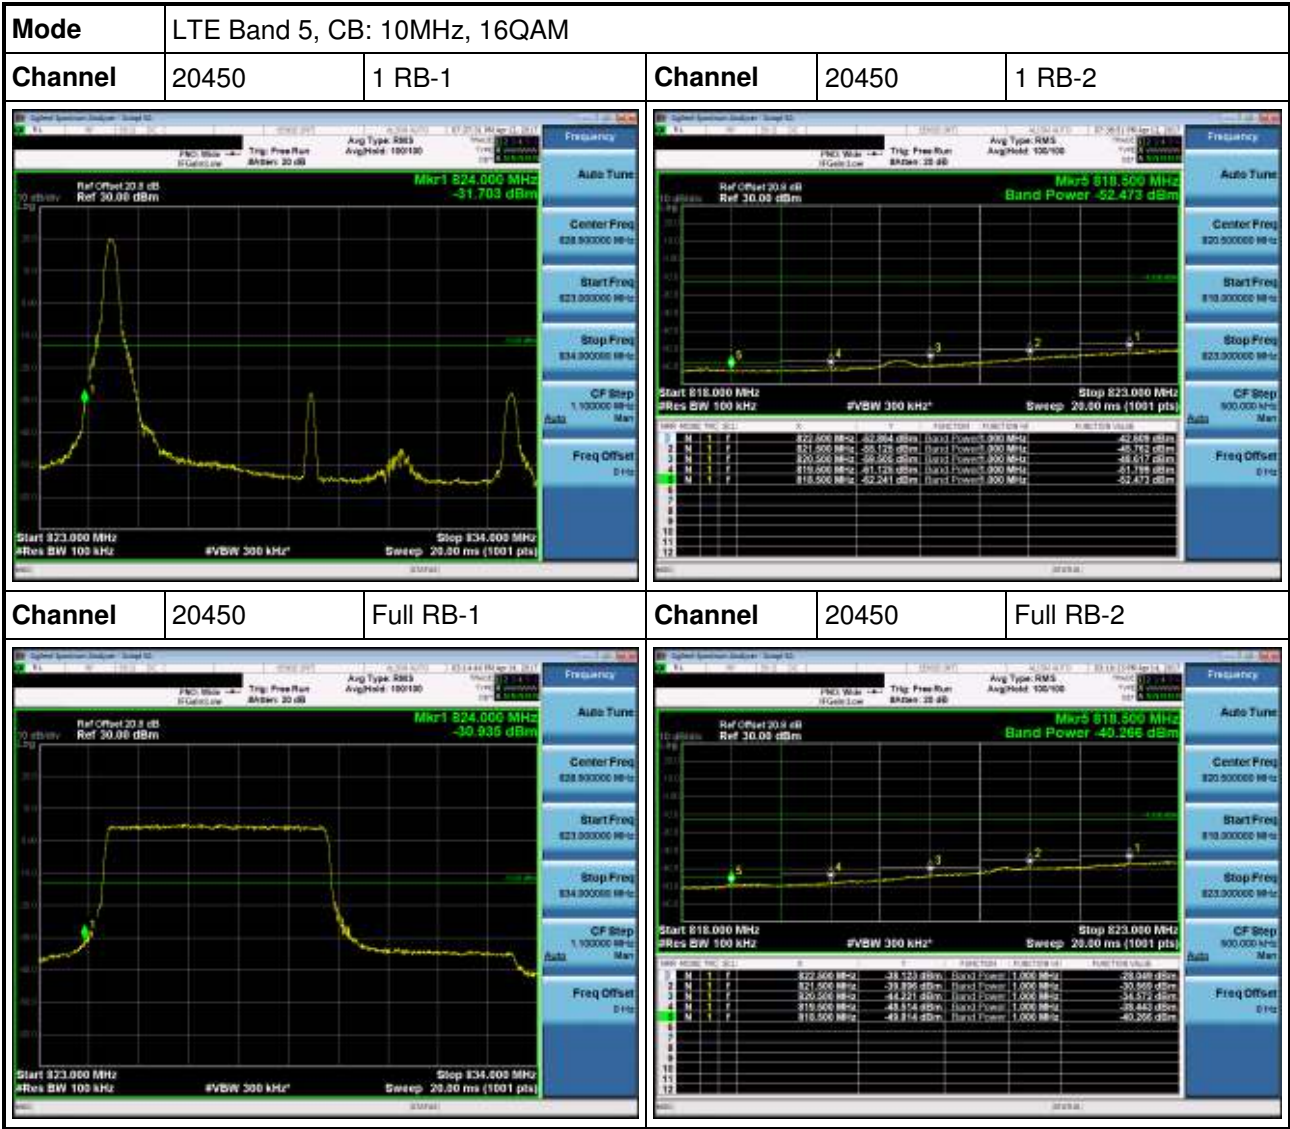

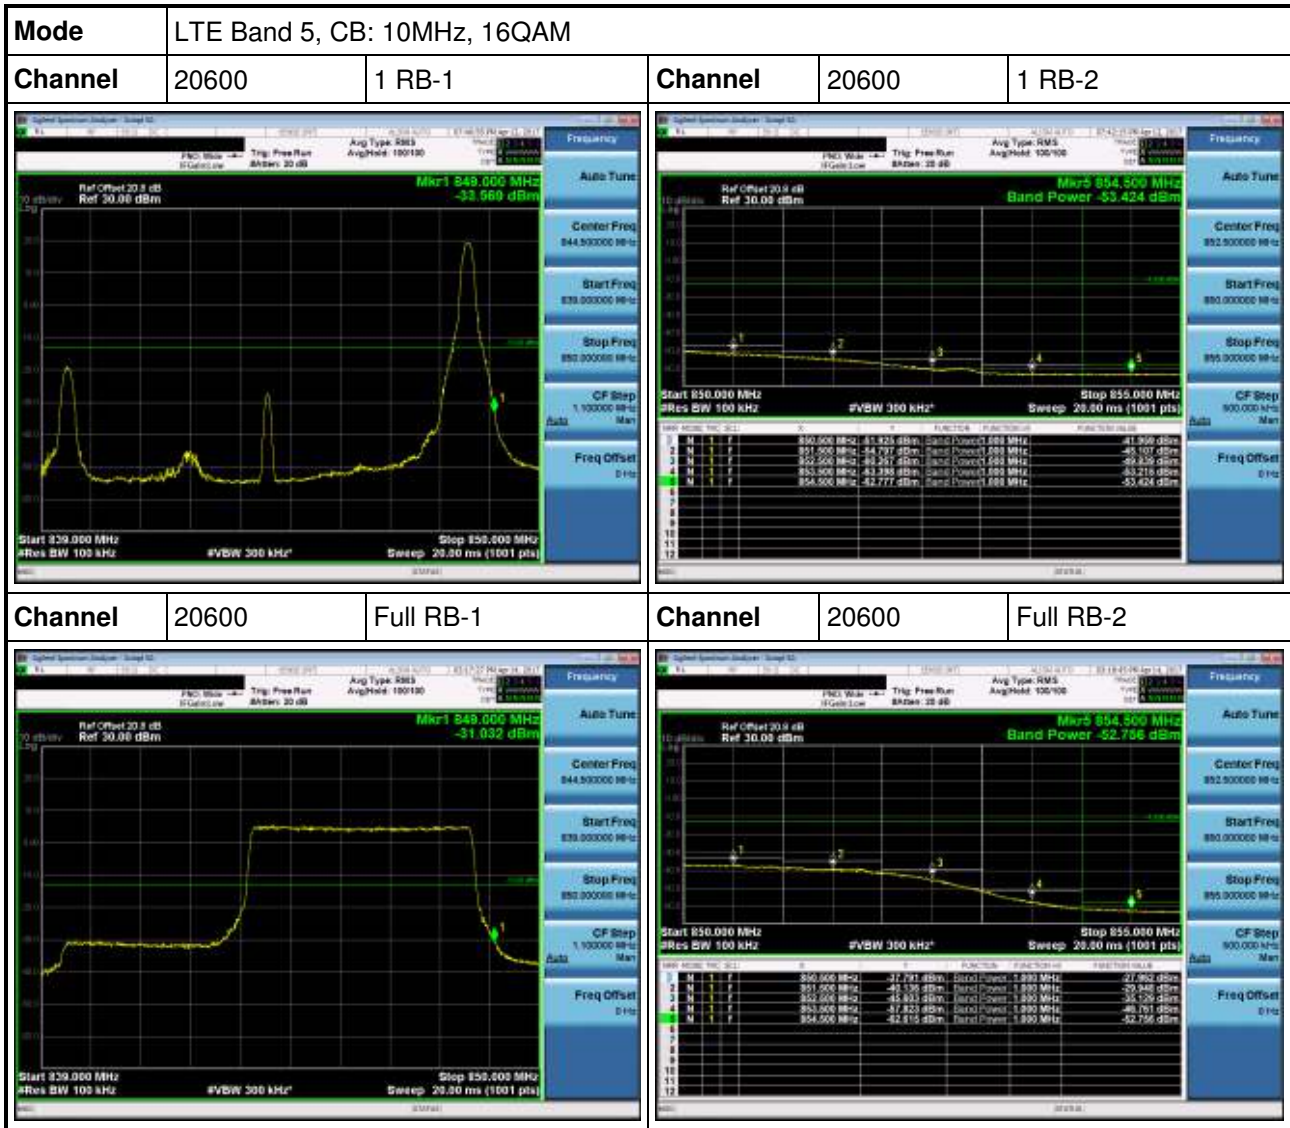


3.5 Occupied and 26 dB Bandwidth

3.5.1 Test Procedures

1. Set RBW = 15 / 30 / 51 / 100 kHz, VBW = 51 / 1000 / 160 / 300 kHz for LTE channel bandwidth 1.4 / 3 / 5 / 10 MHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Using occupied bandwidth measurement function of spectrum analyzer to measure occupied bandwidth
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 26dB relative to the maximum level measured in the fundamental emission.

3.5.2 Test Setup

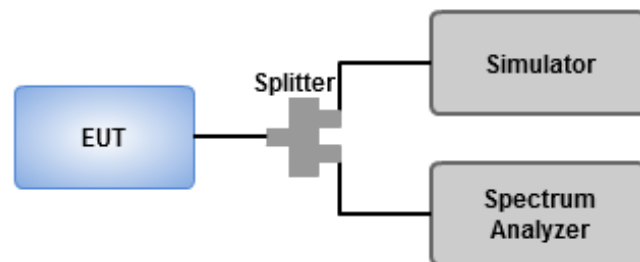

3.5.3 Test Result of Occupied Bandwidth

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 5	1.4	QPSK	20407	824.7	1.2530	1.0798
LTE Band 5	1.4	QPSK	20525	836.5	1.2460	1.0804
LTE Band 5	1.4	QPSK	20643	848.3	1.2530	1.0753
LTE Band 5	1.4	16QAM	20407	824.7	1.2540	1.0836
LTE Band 5	1.4	16QAM	20525	836.5	1.2590	1.0787
LTE Band 5	1.4	16QAM	20643	848.3	1.2520	1.0783



Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 5	3	QPSK	20415	825.5	2.9330	2.6886
LTE Band 5	3	QPSK	20525	836.5	2.9340	2.6824
LTE Band 5	3	QPSK	20635	847.5	2.9440	2.6870
LTE Band 5	3	16QAM	20415	825.5	2.9450	2.6860
LTE Band 5	3	16QAM	20525	836.5	2.9460	2.6841
LTE Band 5	3	16QAM	20635	847.5	2.9530	2.6863



Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 5	5	QPSK	20425	826.5	4.9100	4.4767
LTE Band 5	5	QPSK	20525	836.5	4.9150	4.4794
LTE Band 5	5	QPSK	20625	846.5	4.9250	4.4875
LTE Band 5	5	16QAM	20425	826.5	4.9070	4.4810
LTE Band 5	5	16QAM	20525	836.5	4.9180	4.4808
LTE Band 5	5	16QAM	20625	846.5	4.9630	4.4901



Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 5	10	QPSK	20450	829.0	9.8680	8.9334
LTE Band 5	10	QPSK	20525	836.5	9.7210	8.9273
LTE Band 5	10	QPSK	20600	844.0	9.7410	8.9430
LTE Band 5	10	16QAM	20450	829.0	5.9780	4.9111
LTE Band 5	10	16QAM	20525	836.5	6.0210	4.9290
LTE Band 5	10	16QAM	20600	844.0	5.8670	4.9066



3.6 Peak to Average Ratio


3.6.1 Limit of Peak to Average Ratio

Peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.6.2 Test Procedures


1. Enable CCDF function of spectrum analyzer and set RBW = 10 MHz.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.6.3 Test Setup

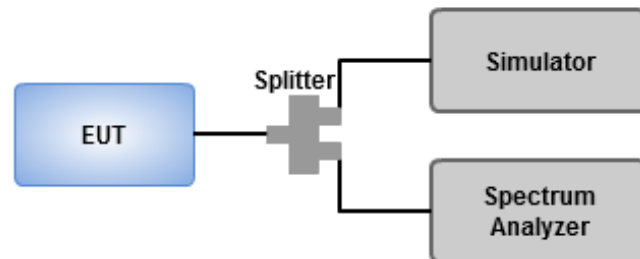


3.6.4 Test Result of Peak to Average Ratio


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 5	1.4	QPSK	20407	824.7	4.99
LTE Band 5	1.4	QPSK	20525	836.5	4.99
LTE Band 5	1.4	QPSK	20643	848.3	4.75
LTE Band 5	1.4	16QAM	20407	824.7	5.80
LTE Band 5	1.4	16QAM	20525	836.5	5.91
LTE Band 5	1.4	16QAM	20643	848.3	5.80

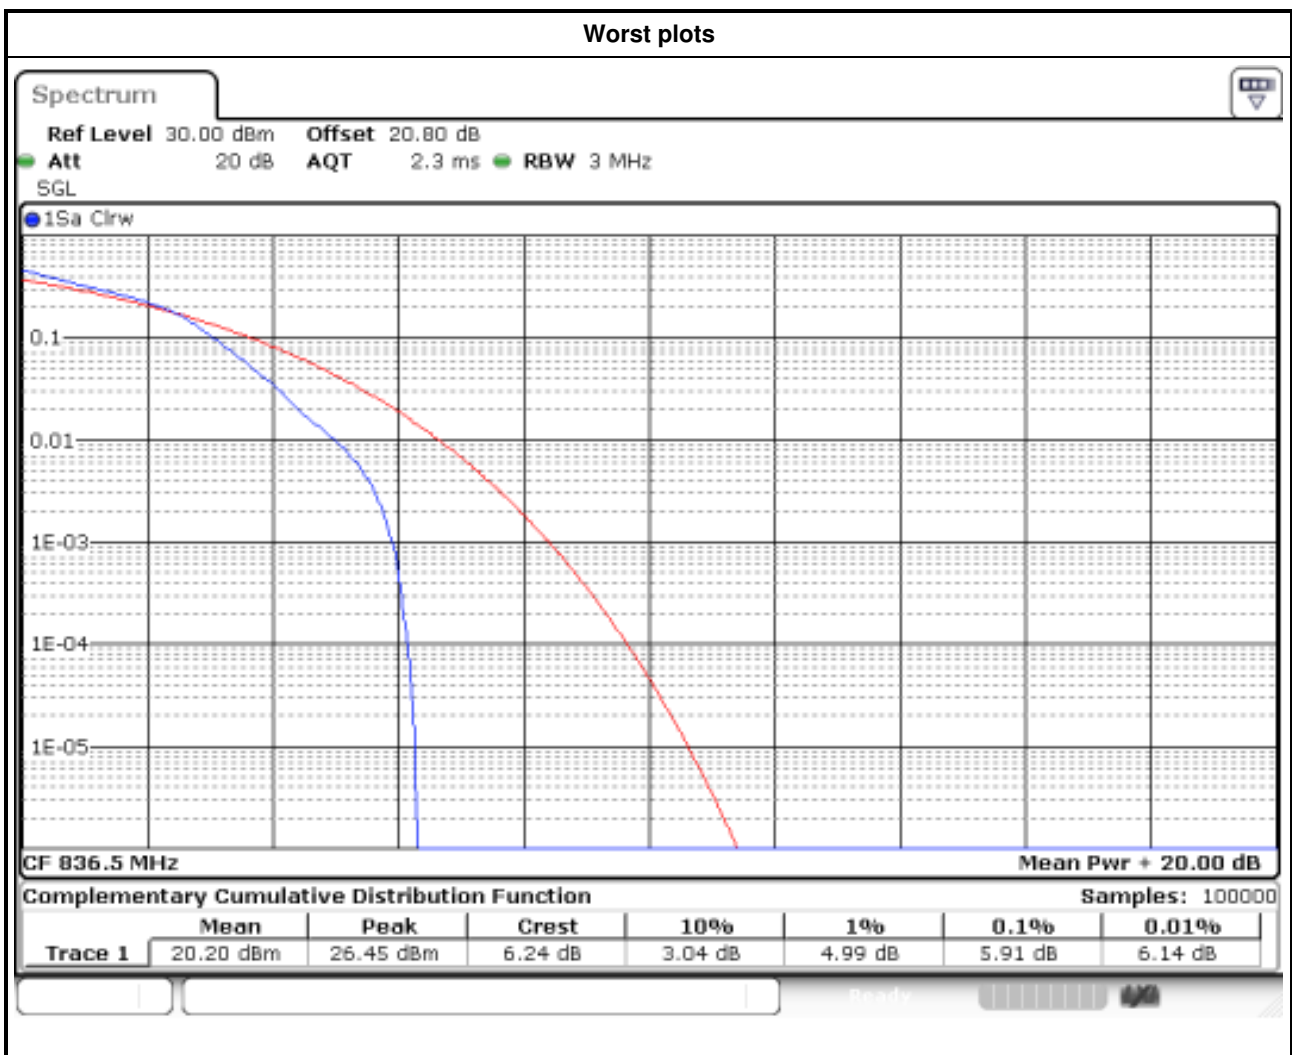


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 5	3	QPSK	20415	825.5	4.87
LTE Band 5	3	QPSK	20525	836.5	4.78
LTE Band 5	3	QPSK	20635	847.5	4.70
LTE Band 5	3	16QAM	20415	825.5	5.83
LTE Band 5	3	16QAM	20525	836.5	5.77
LTE Band 5	3	16QAM	20635	847.5	5.74

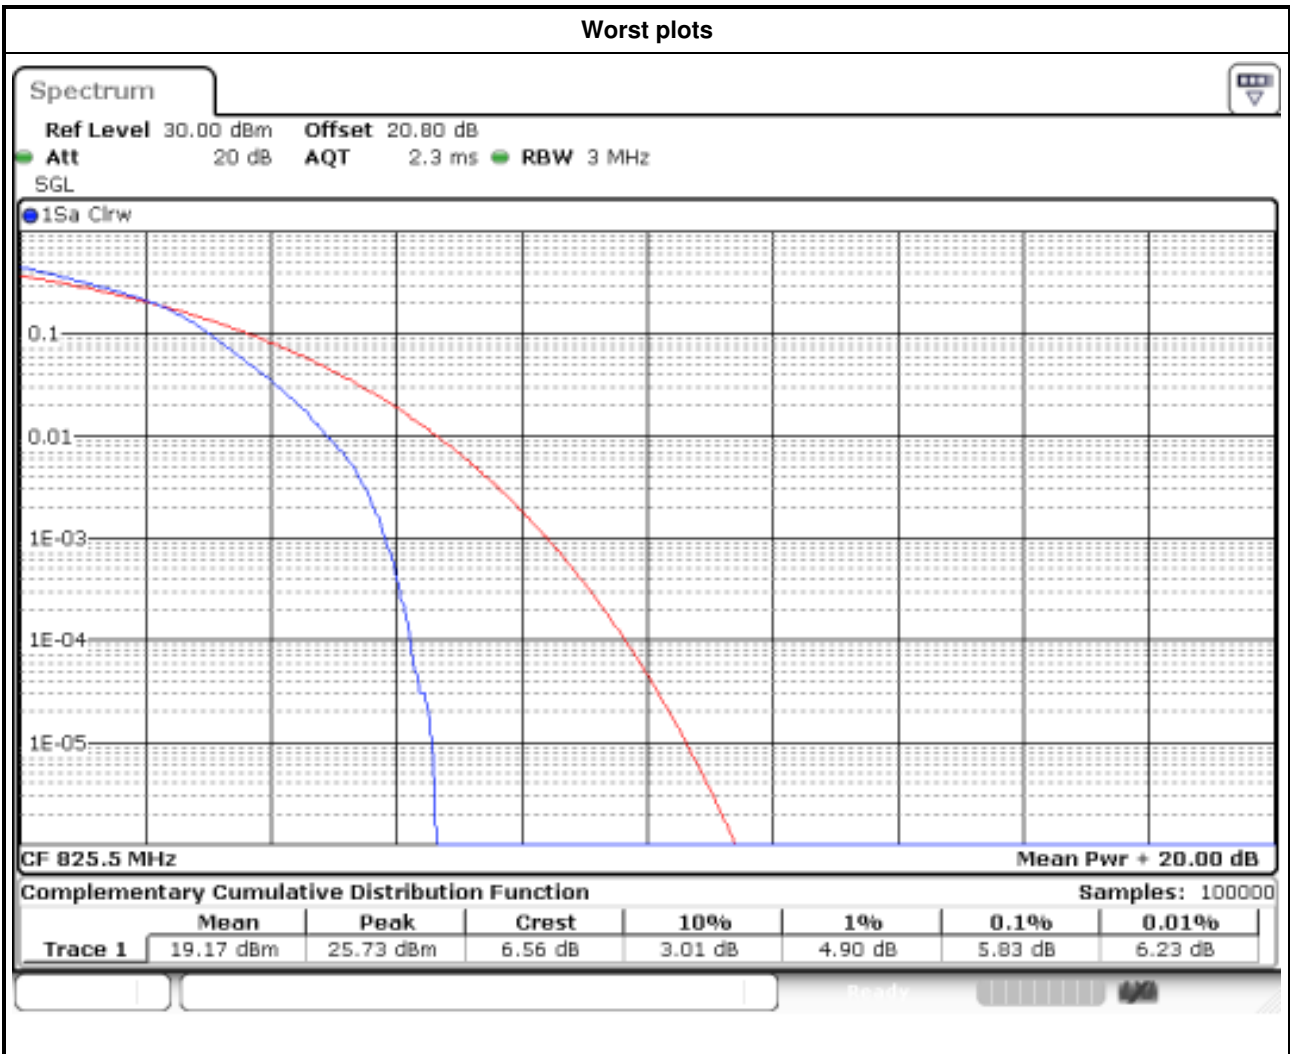

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 5	5	QPSK	20425	826.5	4.72
LTE Band 5	5	QPSK	20525	836.5	4.70
LTE Band 5	5	QPSK	20625	846.5	4.90
LTE Band 5	5	16QAM	20425	826.5	5.71
LTE Band 5	5	16QAM	20525	836.5	5.68
LTE Band 5	5	16QAM	20625	846.5	5.83

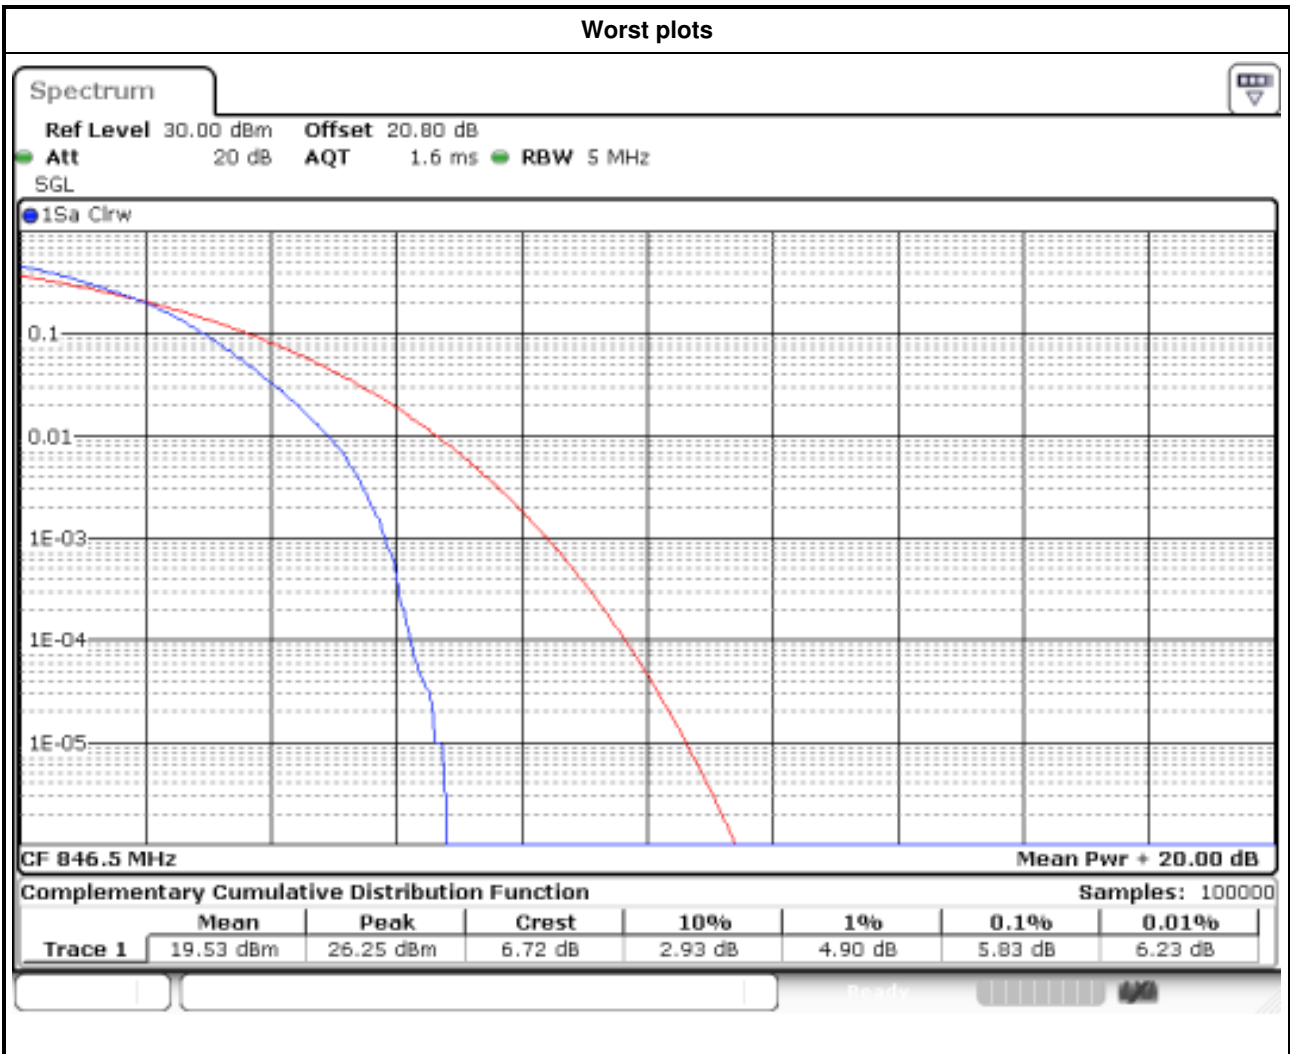

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 5	10	QPSK	20450	829.0	4.81
LTE Band 5	10	QPSK	20525	836.5	4.70
LTE Band 5	10	QPSK	20600	844.0	4.87
LTE Band 5	10	16QAM	20450	829.0	5.74
LTE Band 5	10	16QAM	20525	836.5	5.74
LTE Band 5	10	16QAM	20600	844.0	5.57

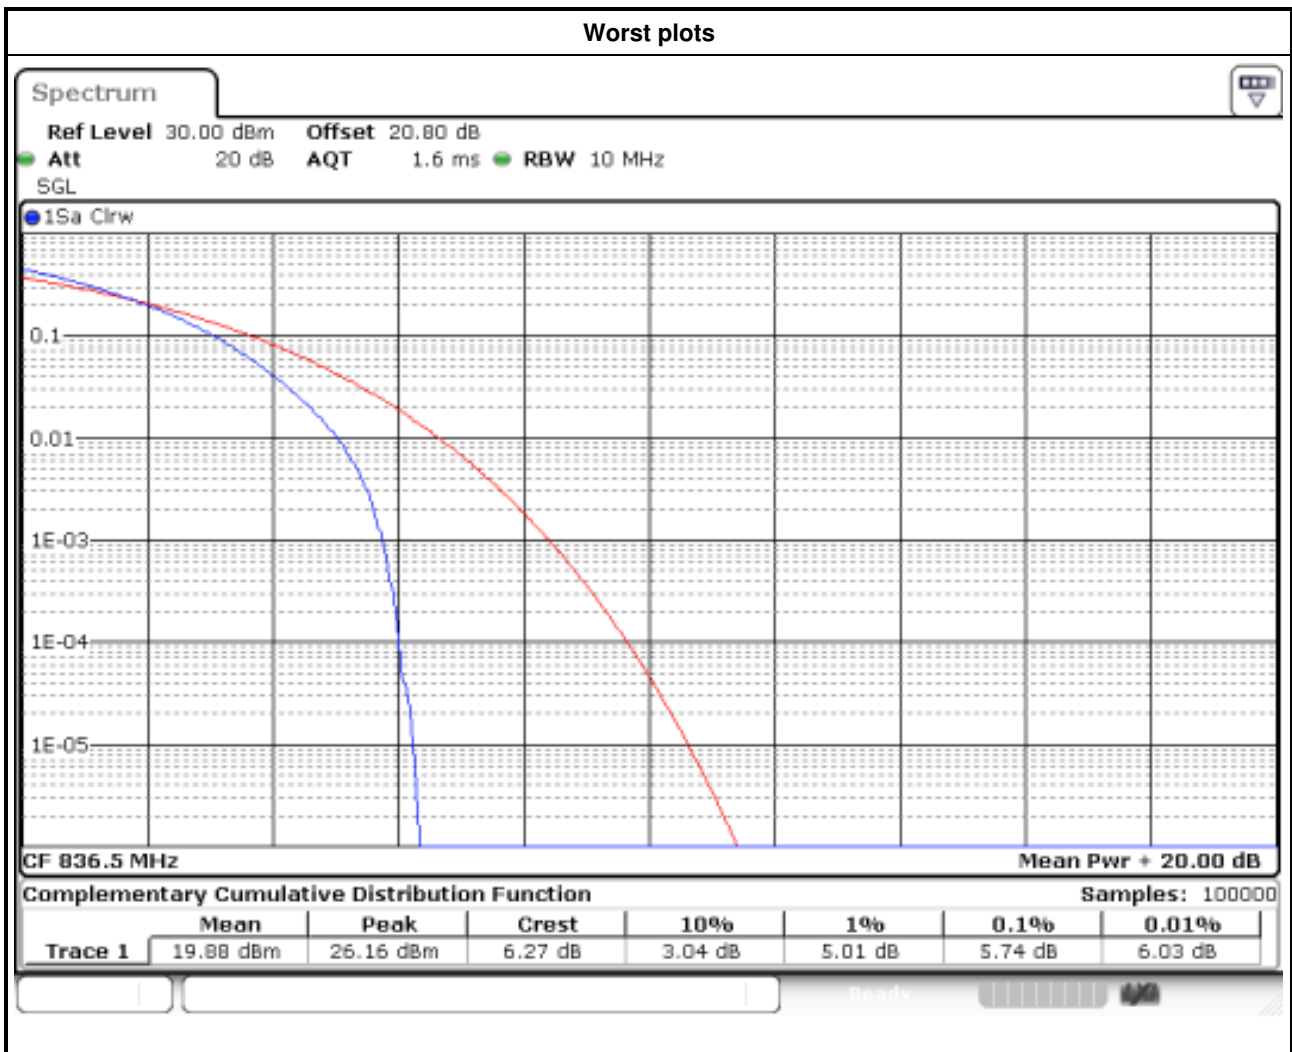

3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

The frequency stability shall be less +/- 2.5ppm.

3.7.2 Test Procedures

1. EUT was placed at temperature chamber and connected to an external power supply.
2. Temperature and voltage condition shall be tested to confirm frequency stability.
3. Temperature range is from -40~85°C and voltage range is from lowest to highest working voltage.
4. Link up EUT and simulator. Confirm frequency drift value of simulator and record it.

3.7.3 Test Setup

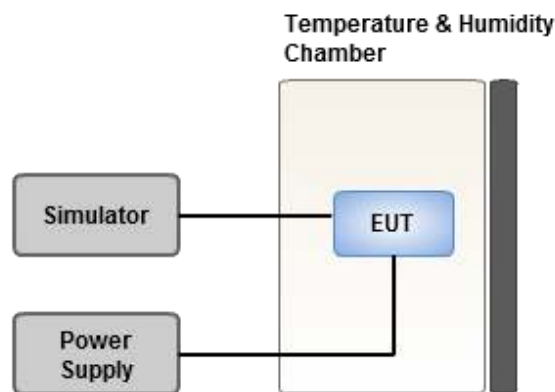

3.7.4 Test Result of Frequency Stability

Channel Bandwidth: 1.4MHz

Frequency: 836.5MHz	Frequency Drift (ppm)	
Temperature (°C)	Frequency Error (ppm)	Limit (ppm)
T20°CVmax	-0.008	2.5
T20°CVmin	0.005	2.5
T85°CVnom	0.012	2.5
T80°CVnom	0.011	2.5
T70°CVnom	0.009	2.5
T60°CVnom	-0.005	2.5
T50°CVnom	-0.008	2.5
T40°CVnom	0.009	2.5
T30°CVnom	-0.008	2.5
T20°CVnom	-0.009	2.5
T10°CVnom	-0.014	2.5
T0°CVnom	0.005	2.5
T-10°CVnom	-0.011	2.5
T-20°CVnom	-0.004	2.5
T-30°CVnom	-0.007	2.5
T-40°CVnom	-0.005	2.5
Vnom [Vdc]: 3.8	Vmax [Vdc]: 4.2	Vmin [Vdc]: 3.4
Tnom [°C]: 20	Tmax [°C]: 85	Tmin [°C]: -40

Channel Bandwidth: 3MHz

Frequency: 836.5MHz	Frequency Drift (ppm)	
Temperature (°C)	Frequency Error (ppm)	Limit (ppm)
T20°CVmax	-0.011	2.5
T20°CVmin	-0.013	2.5
T85°CVnom	0.009	2.5
T80°CVnom	0.008	2.5
T70°CVnom	0.008	2.5
T60°CVnom	-0.005	2.5
T50°CVnom	-0.005	2.5
T40°CVnom	0.007	2.5
T30°CVnom	-0.006	2.5
T20°CVnom	-0.009	2.5
T10°CVnom	0.005	2.5
T0°CVnom	-0.005	2.5
T-10°CVnom	0.007	2.5
T-20°CVnom	0.006	2.5
T-30°CVnom	0.011	2.5
T-40°CVnom	-0.012	2.5
Vnom [Vdc]: 3.8	Vmax [Vdc]: 4.2	Vmin [Vdc]: 3.4
Tnom [°C]: 20	Tmax [°C]: 85	Tmin [°C]: -40

Channel Bandwidth: 5MHz

Frequency: 836.5MHz	Frequency Drift (ppm)	
Temperature (°C)	Frequency Error (ppm)	Limit (ppm)
T20°CVmax	0.008	2.5
T20°CVmin	0.009	2.5
T85°CVnom	-0.011	2.5
T80°CVnom	-0.008	2.5
T70°CVnom	0.007	2.5
T60°CVnom	-0.006	2.5
T50°CVnom	-0.006	2.5
T40°CVnom	-0.008	2.5
T30°CVnom	0.009	2.5
T20°CVnom	-0.011	2.5
T10°CVnom	-0.003	2.5
T0°CVnom	0.009	2.5
T-10°CVnom	-0.008	2.5
T-20°CVnom	-0.007	2.5
T-30°CVnom	-0.007	2.5
T-40°CVnom	-0.007	2.5
Vnom [Vdc]: 3.8	Vmax [Vdc]: 4.2	Vmin [Vdc]: 3.4
Tnom [°C]: 20	Tmax [°C]: 85	Tmin [°C]: -40

Channel Bandwidth: 10MHz

Frequency: 836.5MHz	Frequency Drift (ppm)	
Temperature (°C)	Frequency Error (ppm)	Limit (ppm)
T20°CVmax	-0.004	2.5
T20°CVmin	-0.005	2.5
T85°CVnom	0.01	2.5
T80°CVnom	0.009	2.5
T70°CVnom	-0.008	2.5
T60°CVnom	-0.007	2.5
T50°CVnom	-0.006	2.5
T40°CVnom	0.005	2.5
T30°CVnom	-0.005	2.5
T20°CVnom	-0.011	2.5
T10°CVnom	0.012	2.5
T0°CVnom	-0.007	2.5
T-10°CVnom	0.006	2.5
T-20°CVnom	0.008	2.5
T-30°CVnom	-0.007	2.5
T-40°CVnom	-0.007	2.5
Vnom [Vdc]: 3.8	Vmax [Vdc]: 4.2	Vmin [Vdc]: 3.4
Tnom [°C]: 20	Tmax [°C]: 85	Tmin [°C]: -40

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==