


6. Conducted Band Edge

6.1. Test Setup

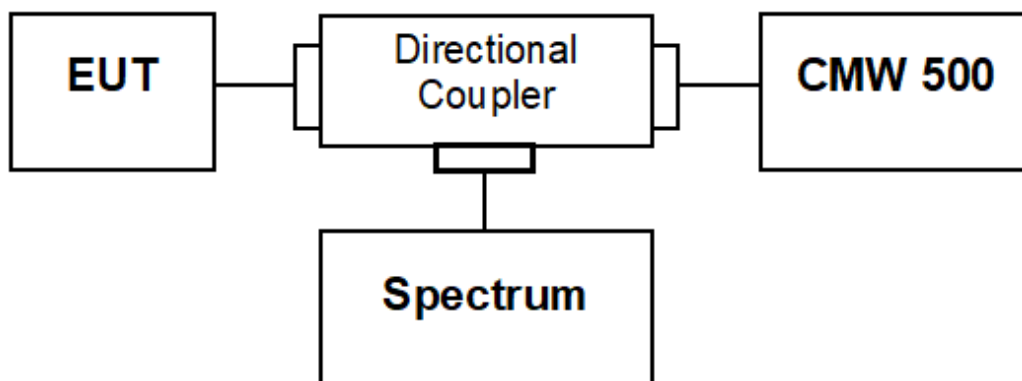

6.2. Test Procedure

1. The EUT was connected to spectrum analyzer and System Simulator via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The conducted spurious emission for the whole frequency range was taken.
4. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

6.3. Test Method

Conducted Spurious Measurement:

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause6.1

ANSI C63.26: 2015 Sub-clause 5.7

Radiated Spurious Measurement:


KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause5.8

ANSI C63.26: 2015 Sub-clause 5.5.3.2

6.4. Test Result


Product	Module		
Test Item	Conducted Band Edge		
Test Mode	Mode 1: WCDMA_Band 2		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 2_RMC_1852.4MHz

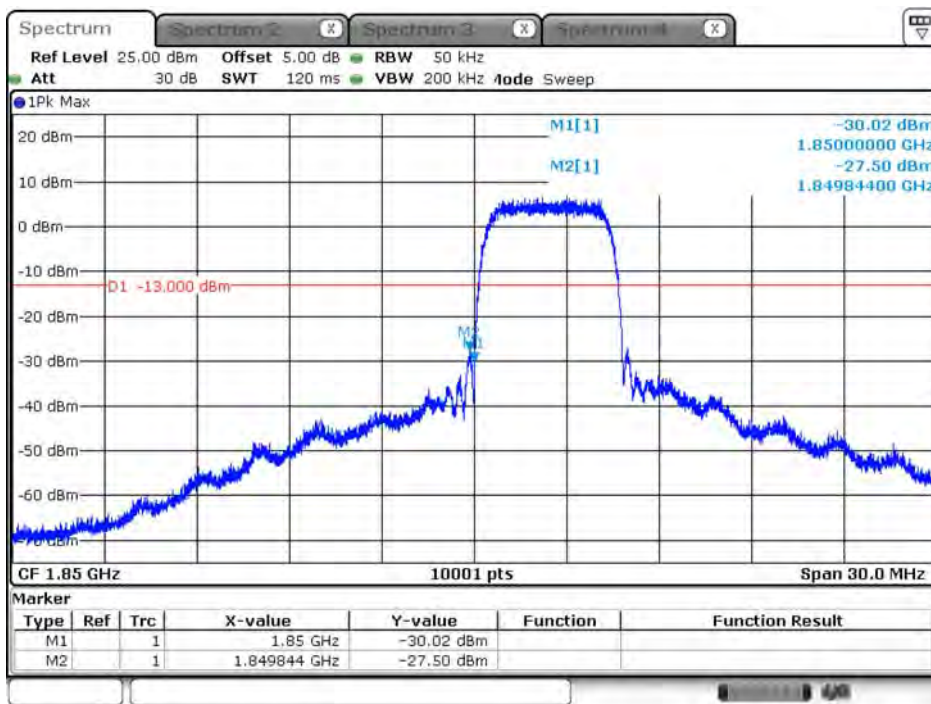


Date: 2.APR.2019 16:42:54

WCDMA_Band 2_RMC_1907.6MHz

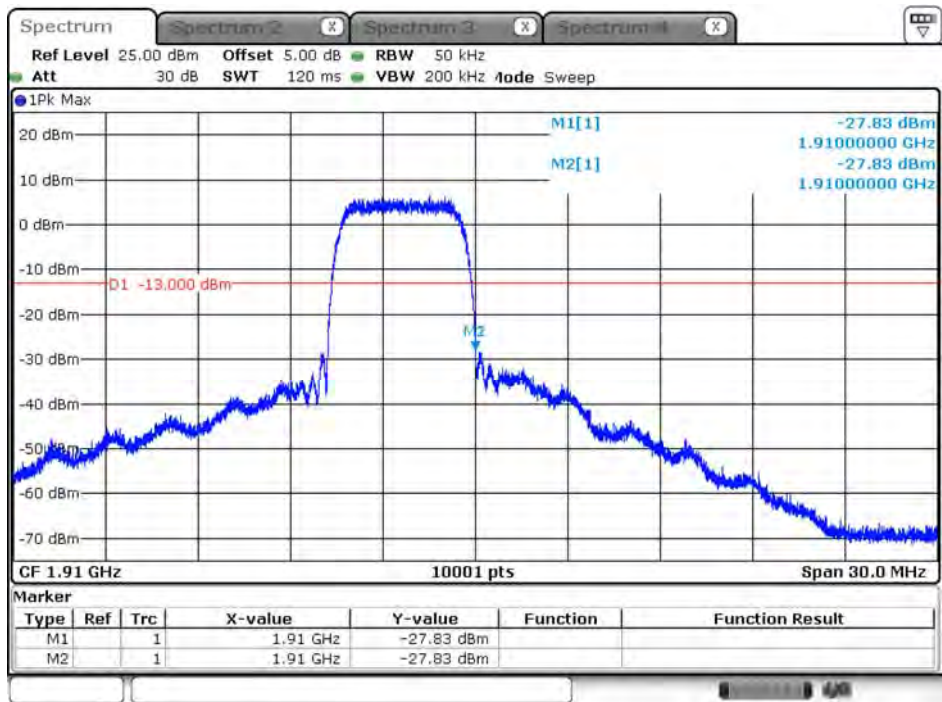


Date: 2.APR.2019 16:46:25

WCDMA_Band 2_HSDPA_1852.4MHz

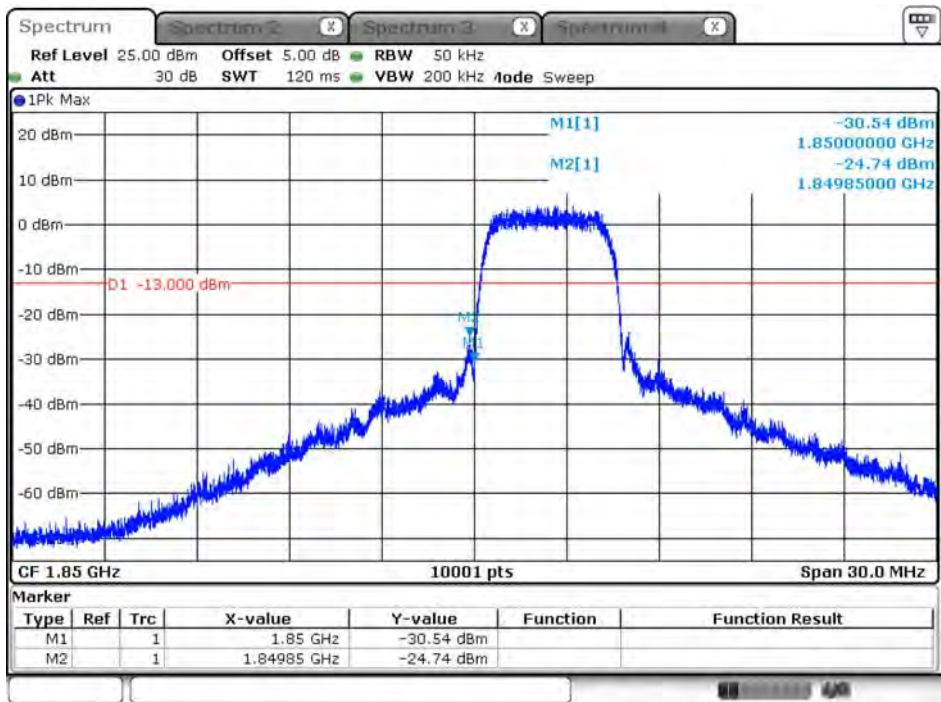


Date: 2.APR.2019 17:07:06

WCDMA_Band 2_HSDPA_1907.6MHz

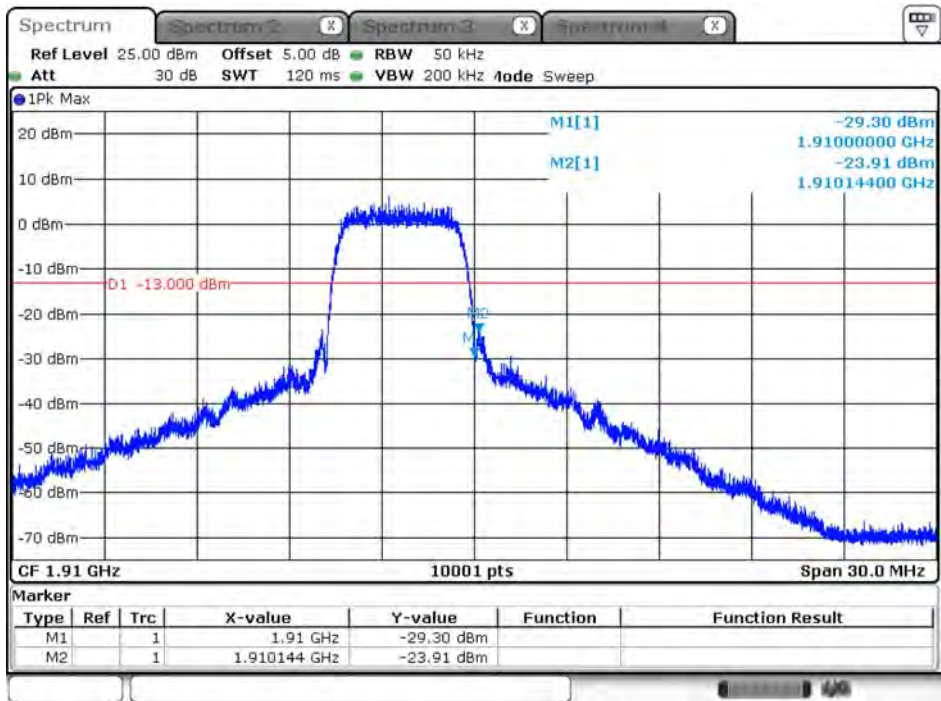


Date: 2.APR.2019 17:06:00

WCDMA_Band 2_HSUPA_1852.4MHz

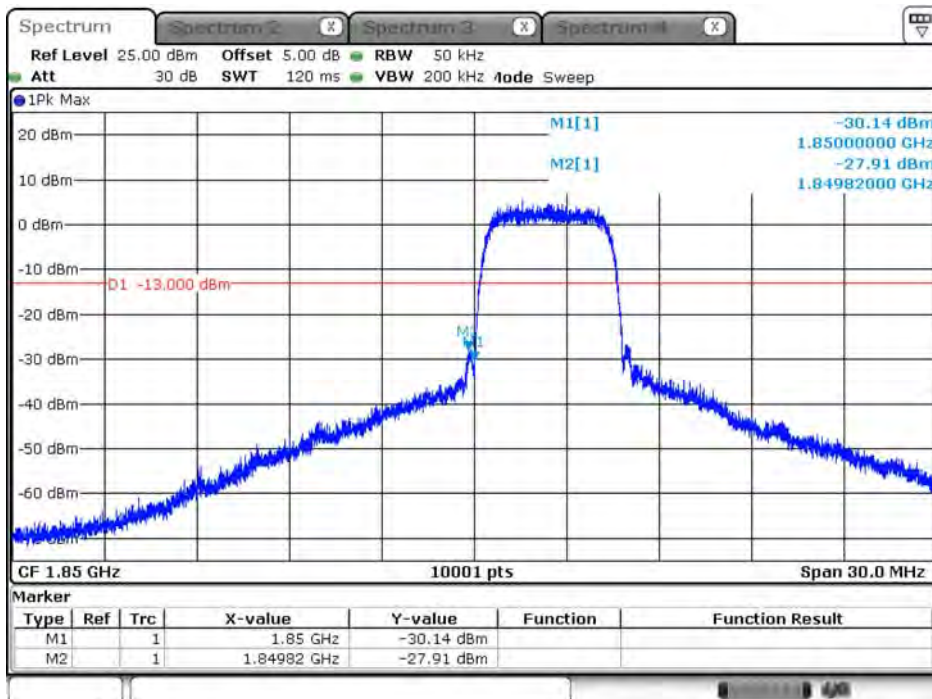

Date: 2.APR.2019 17:14:00


WCDMA_Band 2_HSUPA_1907.6MHz

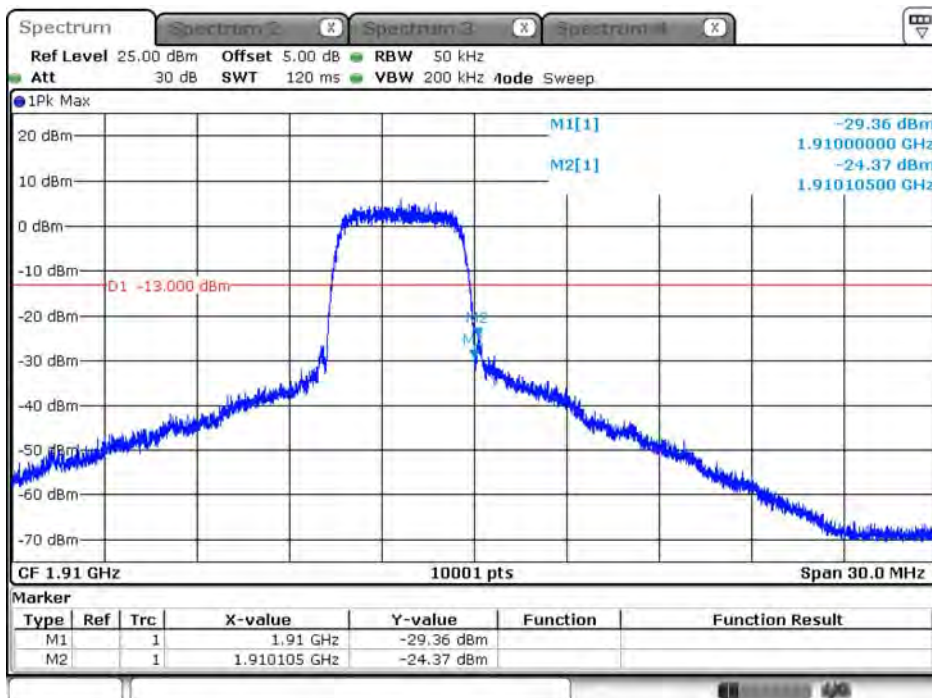

Date: 2.APR.2019 17:17:06


Product	Module		
Test Item	Conducted Band Edge		
Test Mode	Mode 2: WCDMA_Band 4		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 4_RMC_1712.4MHz

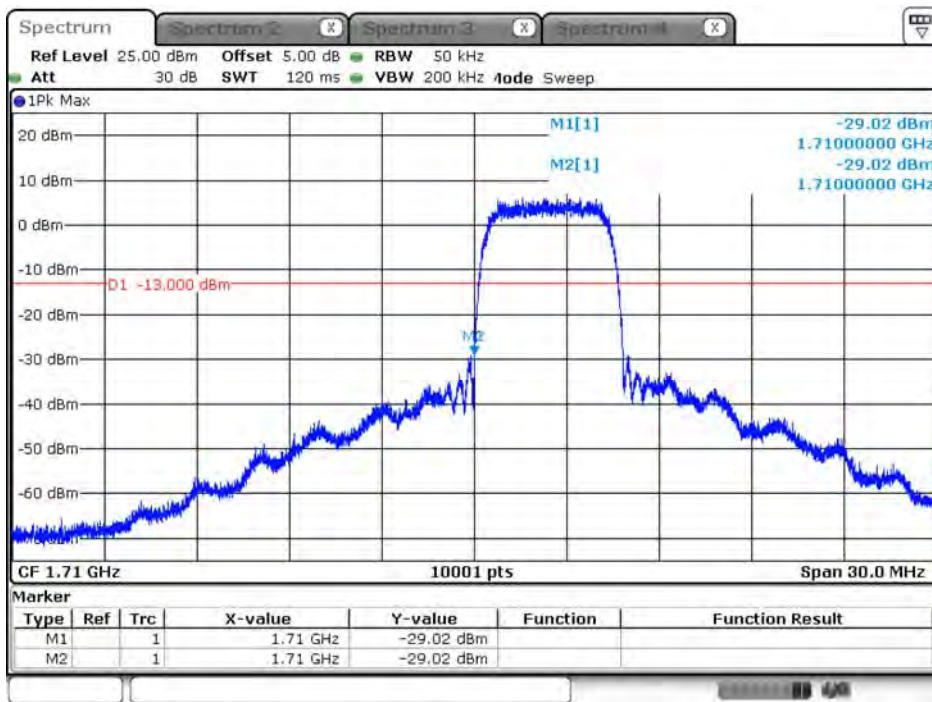


Date: 2.APR.2019 16:47:56

WCDMA_Band 4_RMC_1752.6MHz

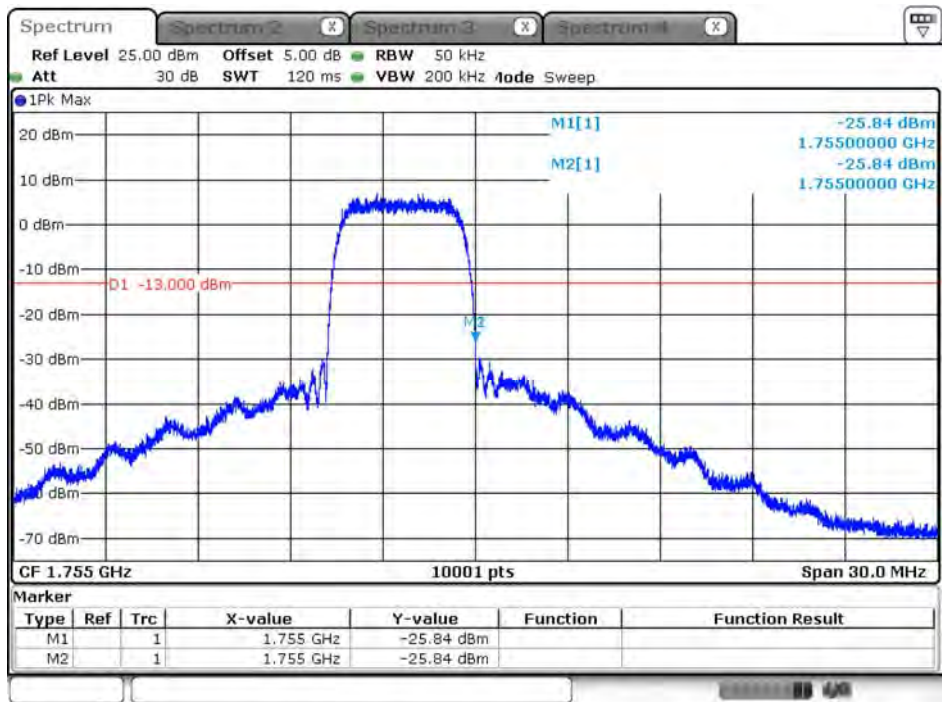


Date: 2.APR.2019 16:50:04

WCDMA_Band 4_HSDPA_1712.4MHz

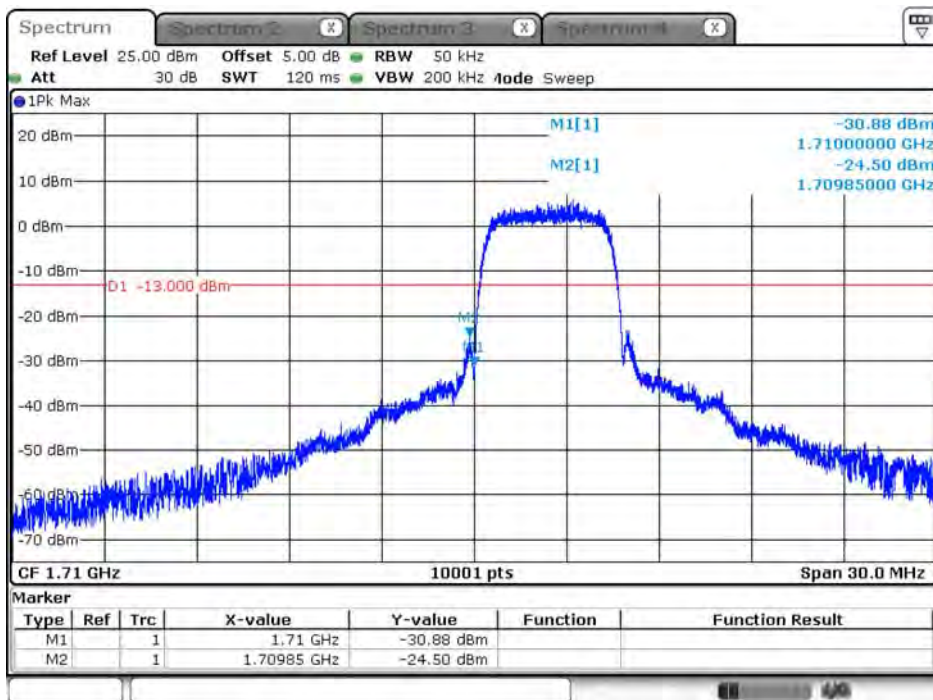


Date: 2.APR.2019 17:04:42

WCDMA_Band 4_HSDPA_1752.6MHz

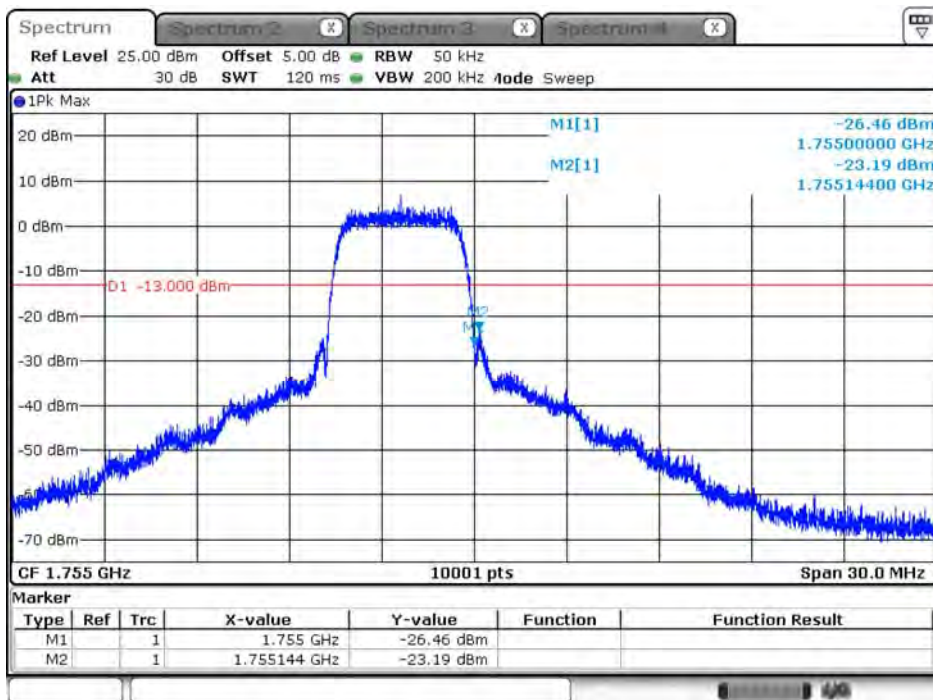


Date: 2.APR.2019 17:02:14

WCDMA_Band 4_HSUPA_1712.4MHz

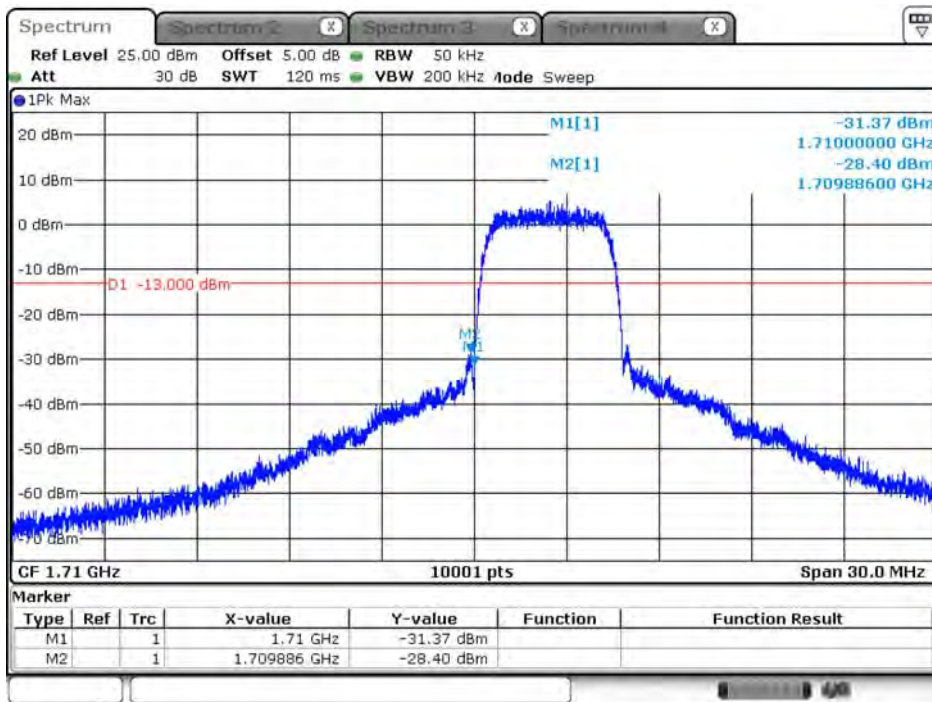

Date: 2.APR.2019 17:18:00


WCDMA_Band 4_HSUPA_1752.6MHz

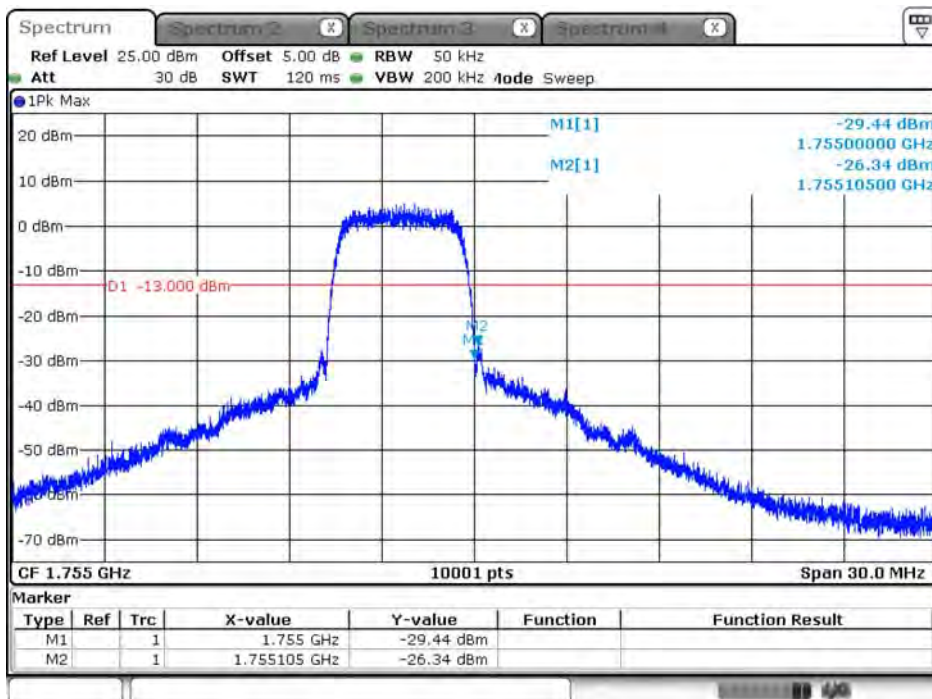

Date: 2.APR.2019 17:19:10


Product	Module		
Test Item	Conducted Band Edge		
Test Mode	Mode 3: WCDMA_Band 5		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 5_RMC_826.4MHz

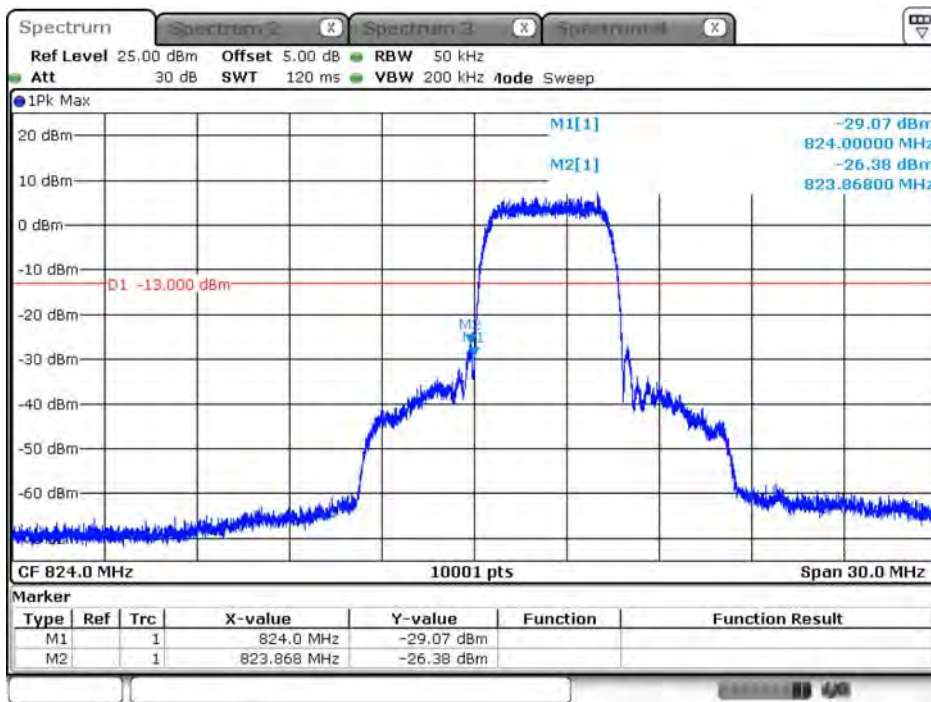


Date: 2.APR 2019 16:51:00

WCDMA_Band 5_RMC_846.6MHz

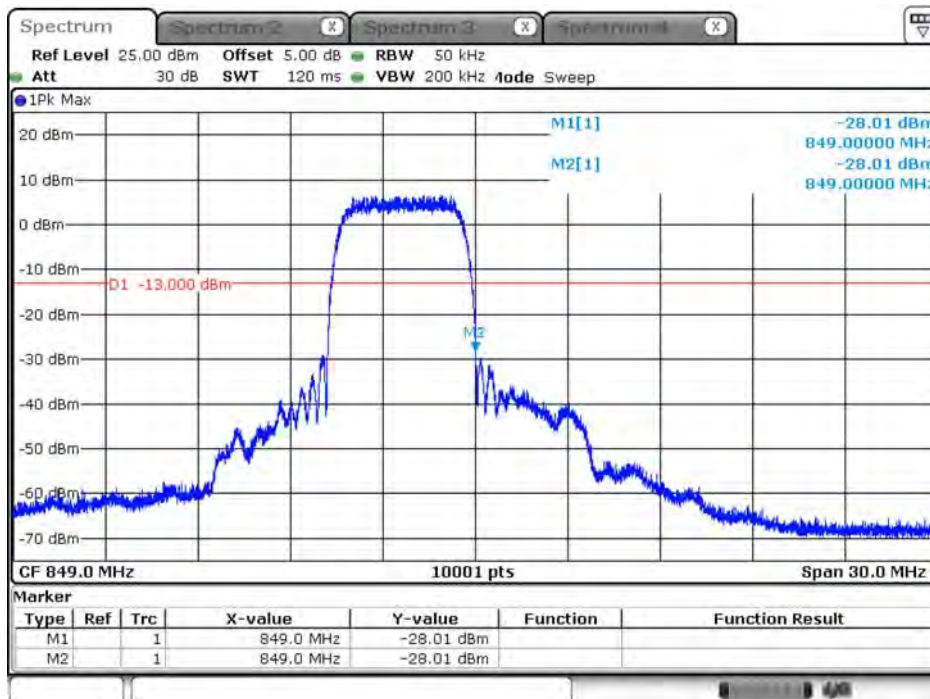


Date: 2.APR.2019 16:53:07

WCDMA_Band 5_HSDPA_826.4MHz

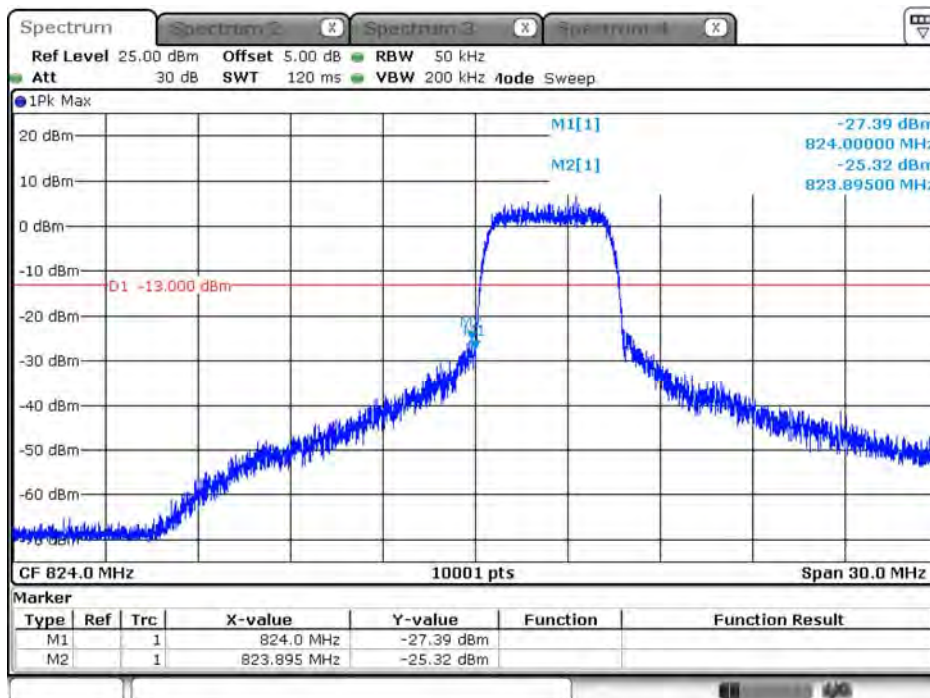


Date: 2.APR.2019 17:01:02

WCDMA_Band 5_HSDPA_846.6MHz

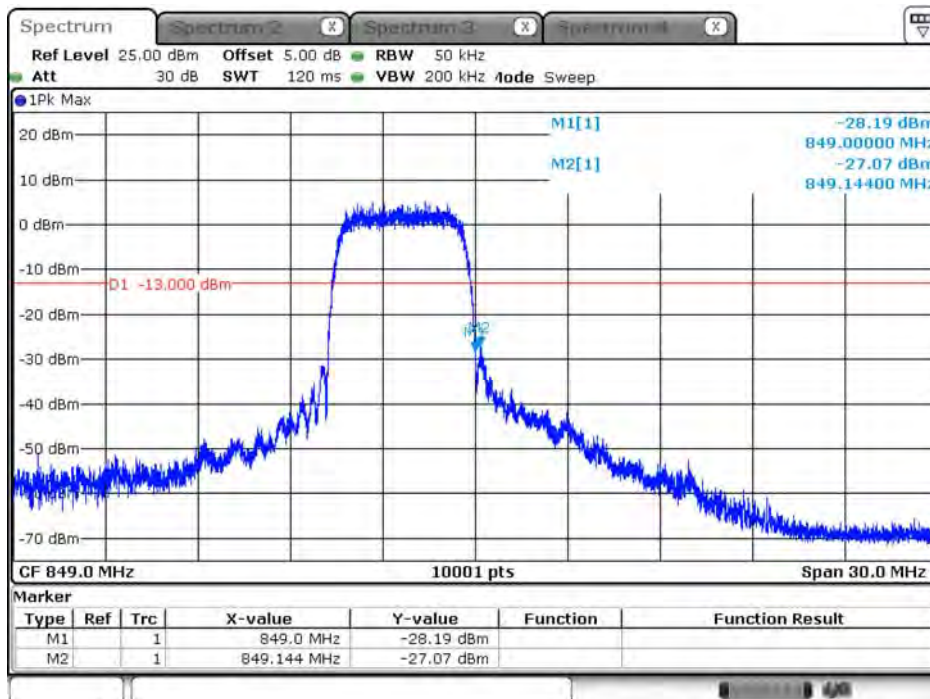


Date: 2.APR.2019 16:59:22

WCDMA_Band 5_HSUPA_826.4MHz

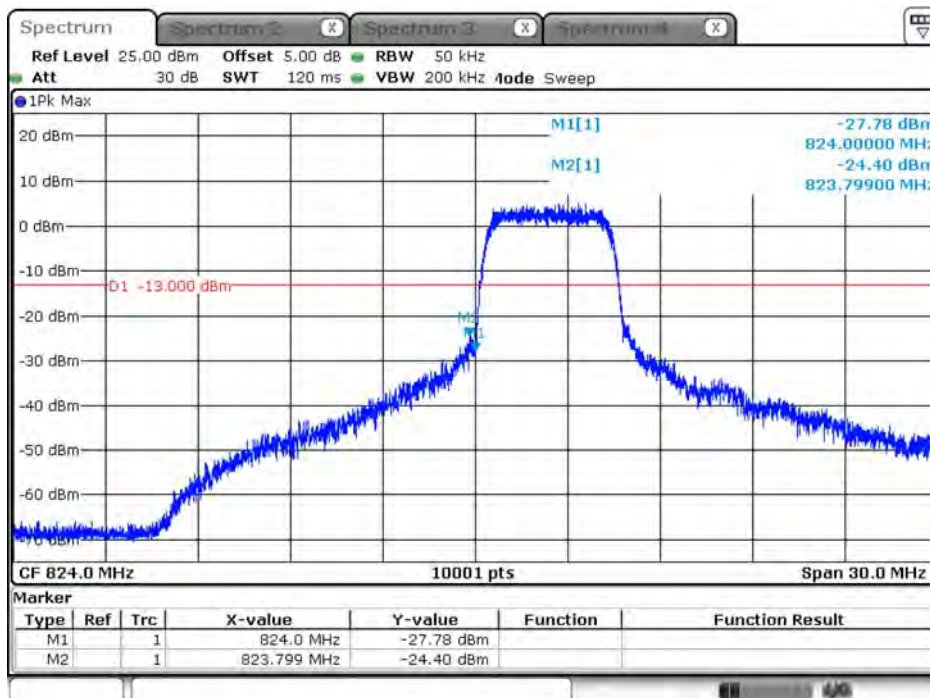

Date: 2.APR.2019 17:20:53

WCDMA_Band 5_HSUPA_846.6MHz

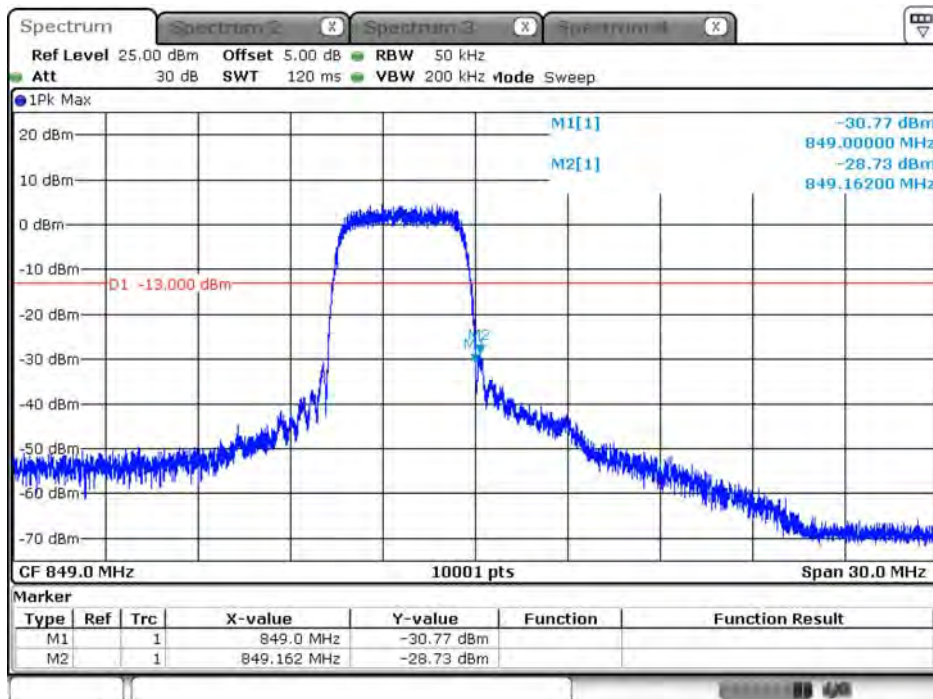


Date: 2.APR.2019 17:21:45


7. Spurious Emission

7.1. Test Setup


Conducted Spurious Measurement (below 1GHz)

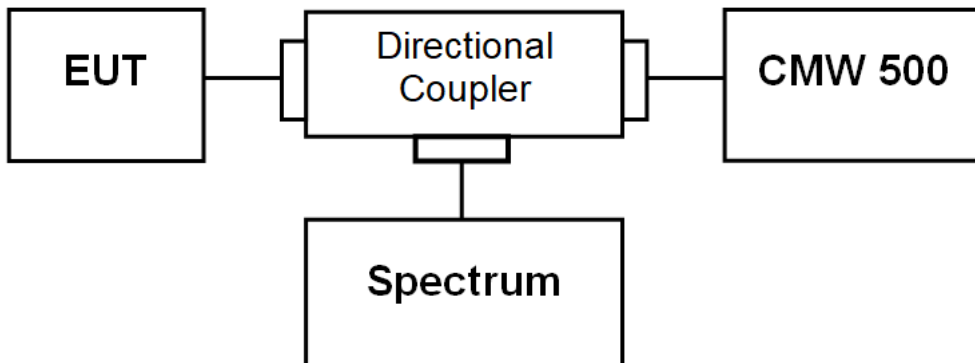

Radiated Spurious Measurement (below 1GHz)

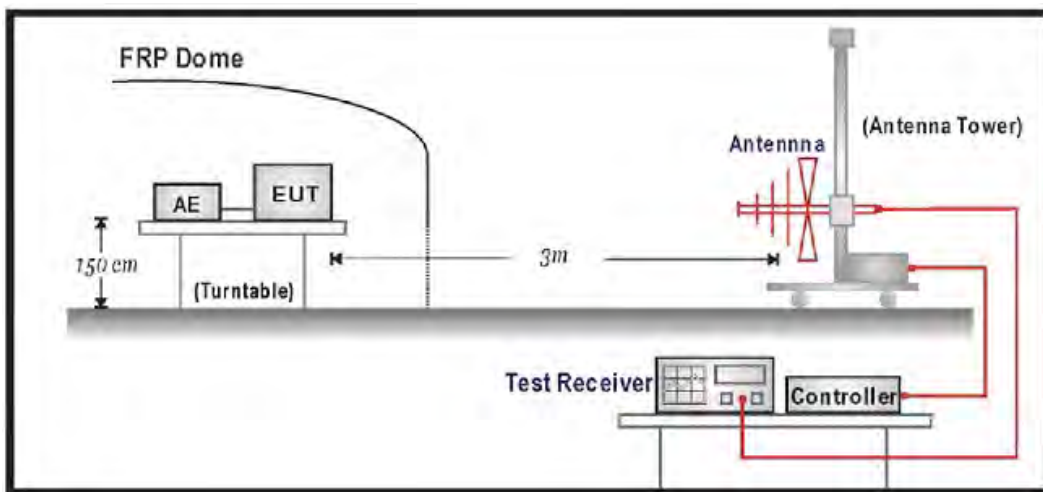

Radiated Spurious Measurement (above 1GHz)

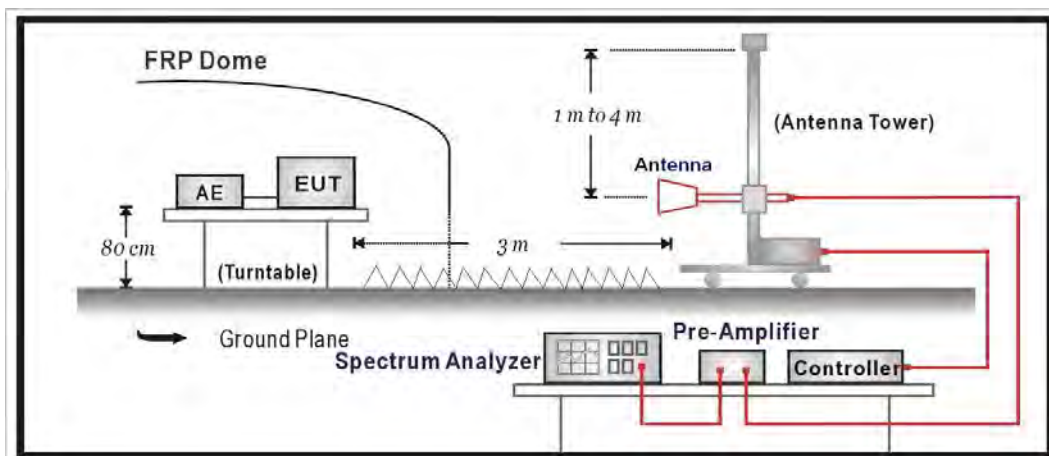

7.2. Test Procedure

Conducted Spurious Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- c) EUT Communicate with CMU200, then select a channel for testing.
- d) Add a correction factor to the display of spectrum, and then test.
- e) The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- a) The EUT was placed on a rotatable wooden table with 1.5 meter above ground.
- b) The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- c) The table was rotated 360 degrees to determine the position of the highest spurious emission.
- d) The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- e) Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 1MHz, Sweep 500ms, Taking the record of maximum spurious emission.
- f) A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- g) Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- h) Taking the record of output power at antenna port
- i) Repeat step 7 to step 8 for another polarization.
- j) $EIRP = SG - \text{Cable loss} + \text{Antenna Gain}$

7.3. Test Method

Conducted Spurious Measurement:





KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause6.1
ANSI C63.26-2015 Sub-clause 5.7

Radiated Spurious Measurement:


KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause5.8
ANSI C63.26-2015 Sub-clause 5.5.3.2

7.4. Test Result


Product	Module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 1: WCDMA_Band 2		
Date of Test	2019/04/08	Test Site	SR10-H

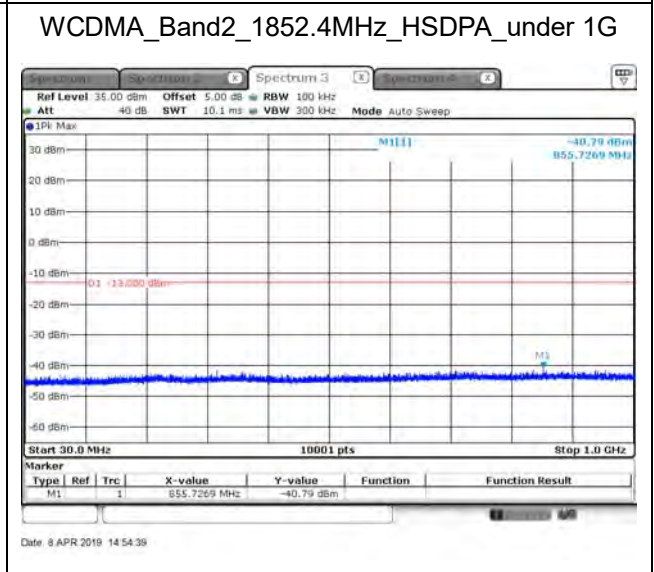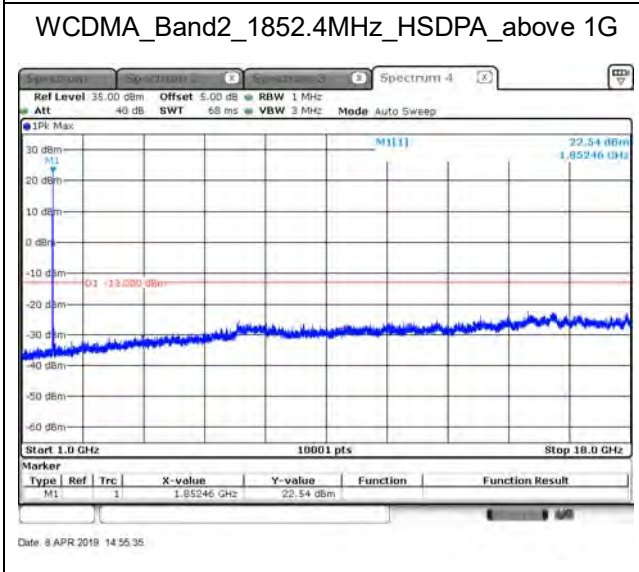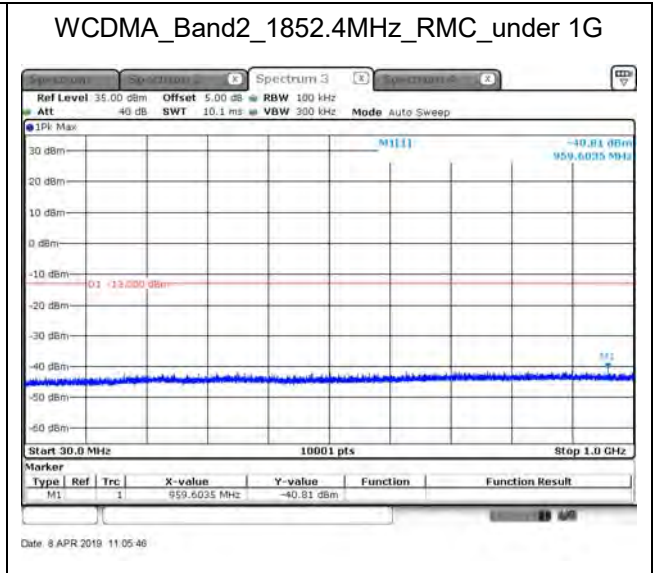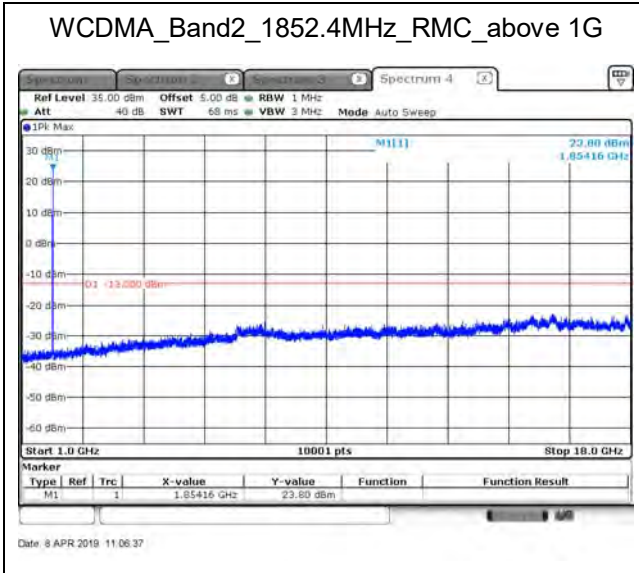


WCDMA_Band2_1852.4MHz_HSUPA_above 1G

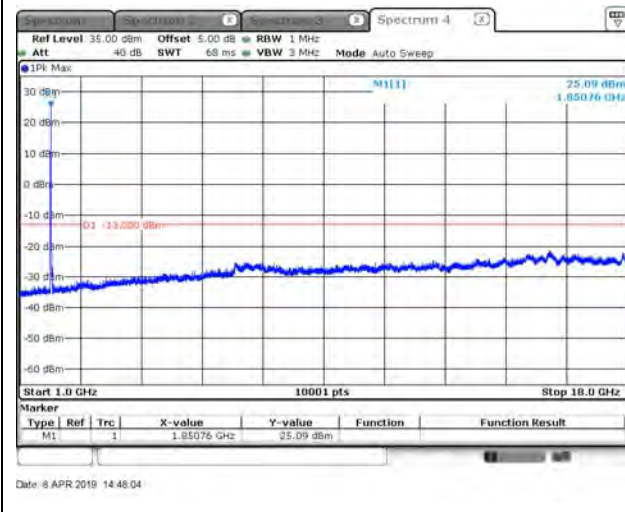

WCDMA_Band2_1852.4MHz_HSUPA_under 1G

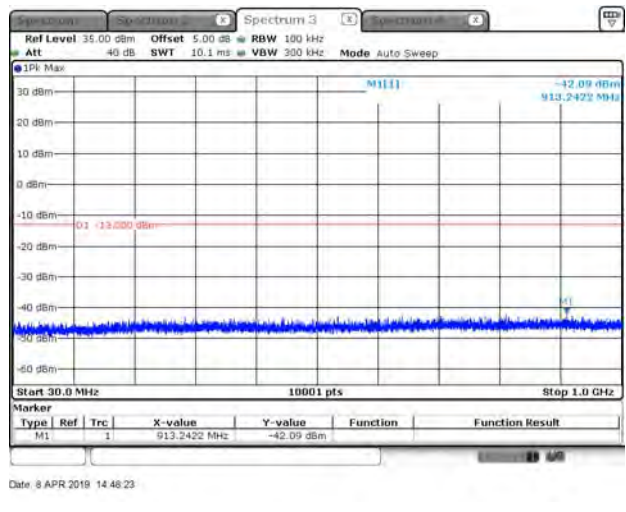


WCDMA_Band2_1880MHz_RMC_above 1G

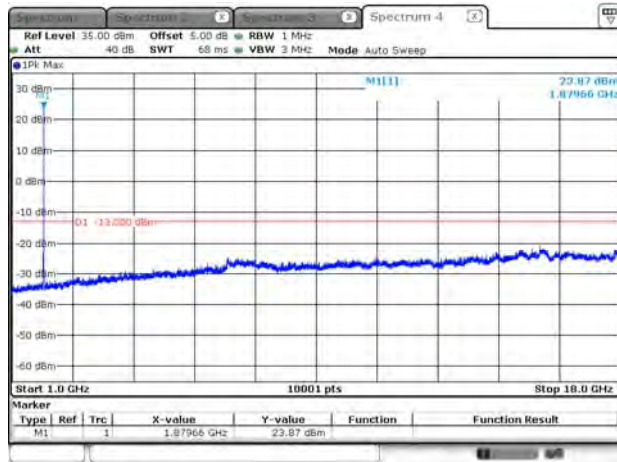


Date: 8 APR 2019 11:40:28

WCDMA_Band2_1880MHz_RMC_under 1G

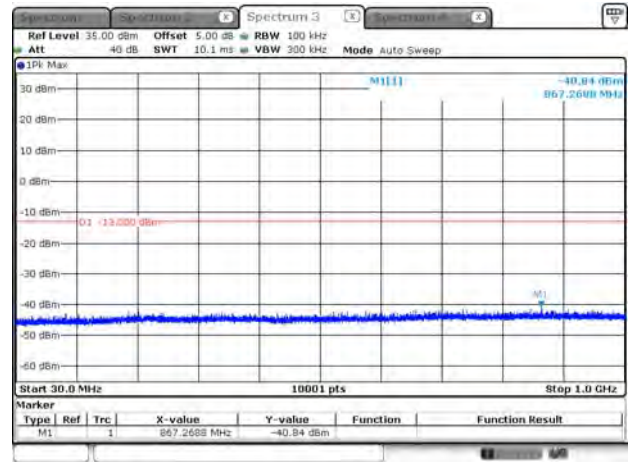


Date: 8 APR 2019 11:43:38

WCDMA_Band2_1880MHz_HSDPA_above 1G

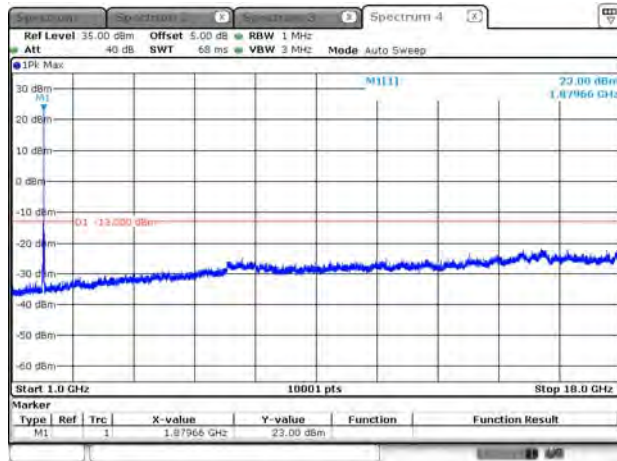


Date: 8 APR 2019 14:57:56

WCDMA_Band2_1880MHz_HSDPA_under 1G

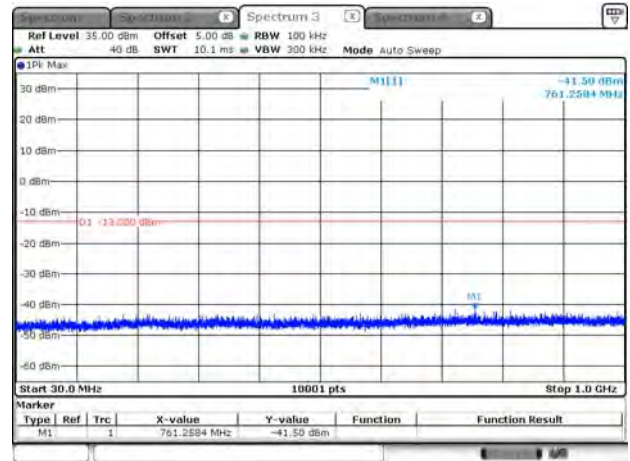


Date: 8 APR 2019 14:58:25

WCDMA_Band2_1880MHz_HSUPA_above 1G






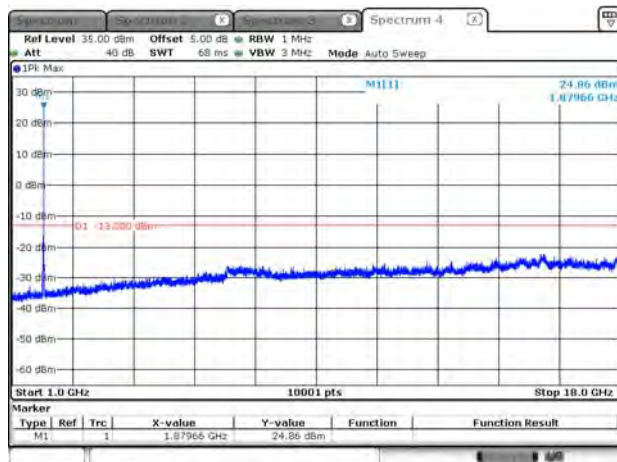


Date: 8 APR 2019 14:42:06

WCDMA_Band2_1880MHz_HSUPA_under 1G

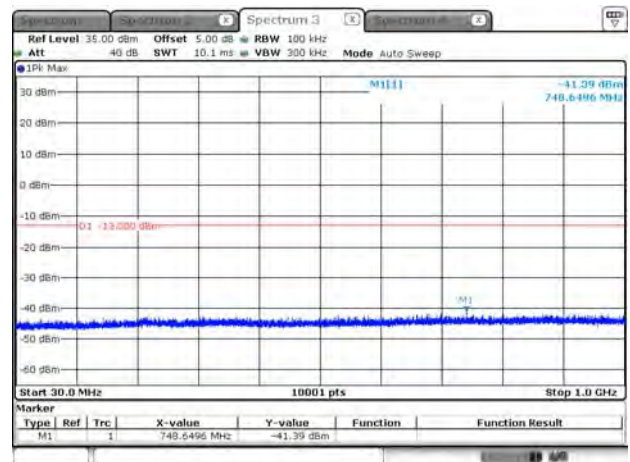


Date: 8 APR 2019 14:41:19

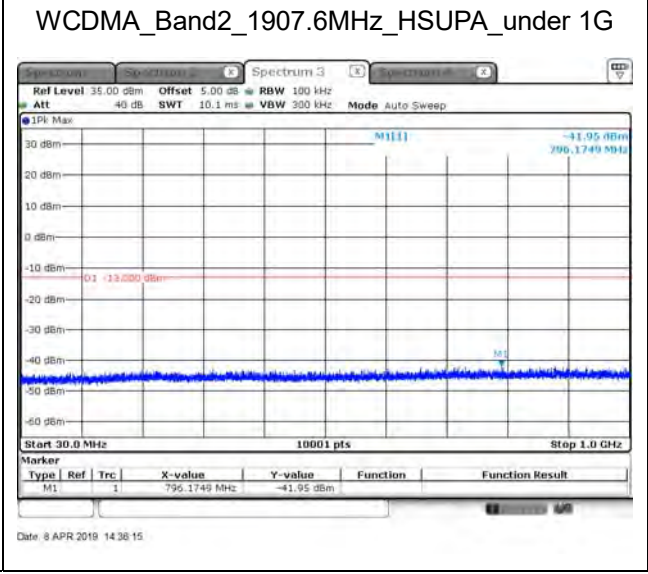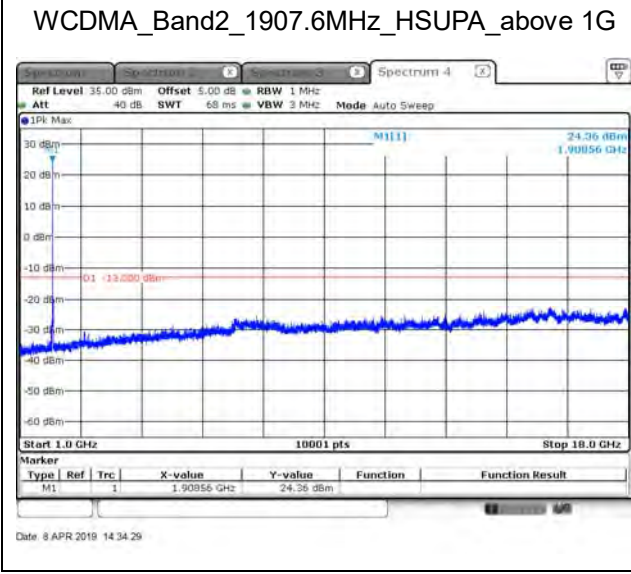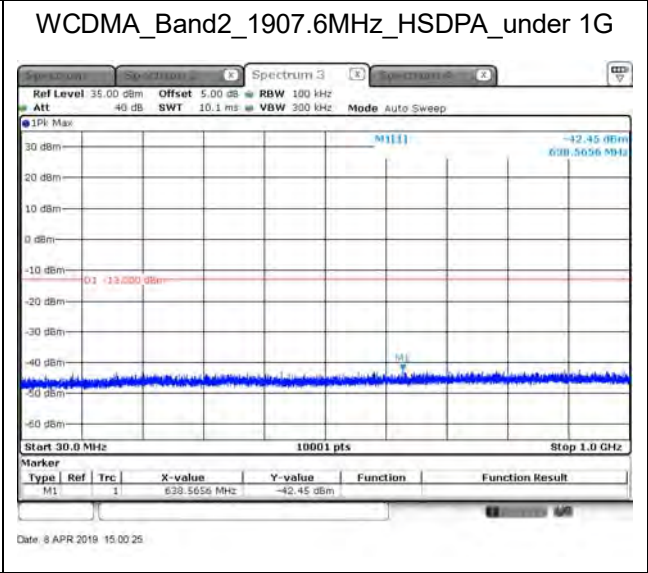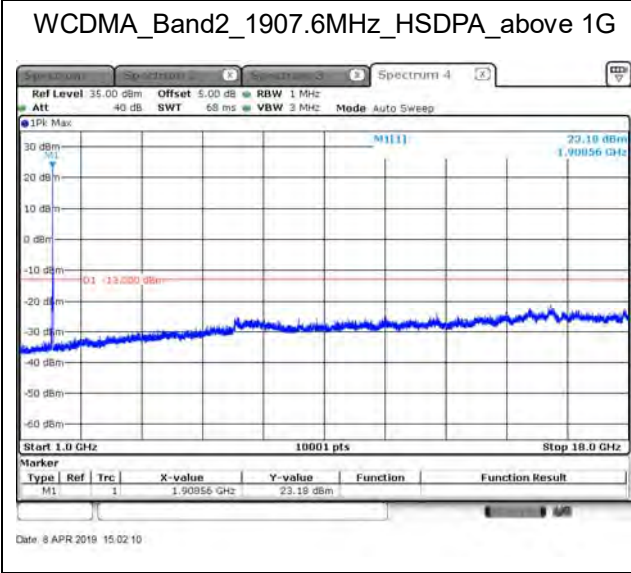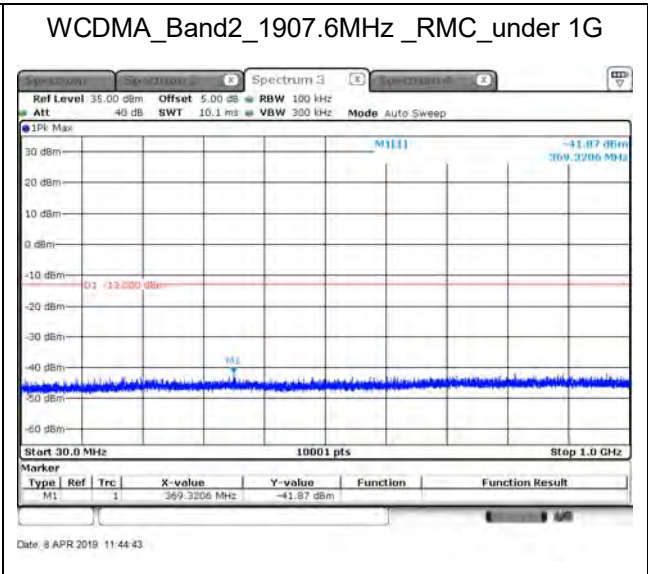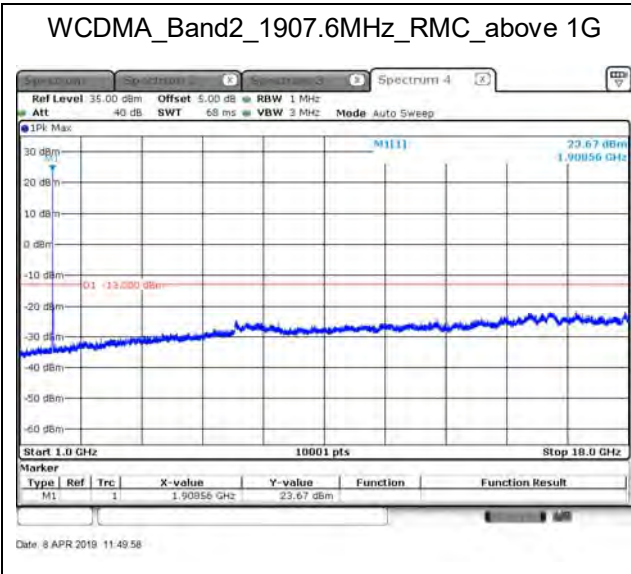


Product	Module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 2: WCDMA_Band 4		
Date of Test	2019/04/08	Test Site	SR10-H


WCDMA_Band4_1712.4MHz_RMC_above 1G

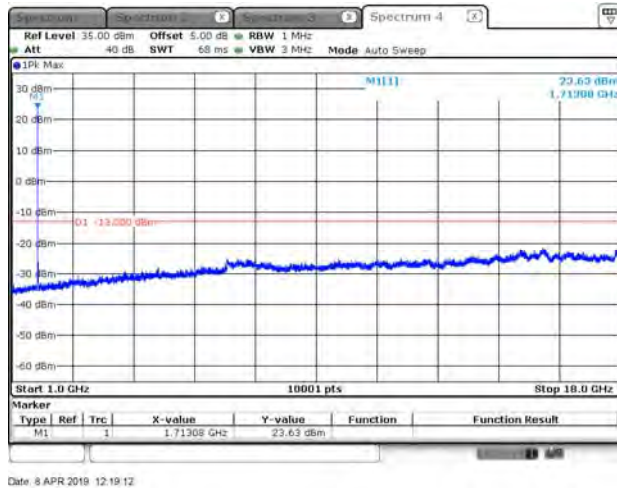


WCDMA_Band4_1712.4MHz_RMC_under 1G

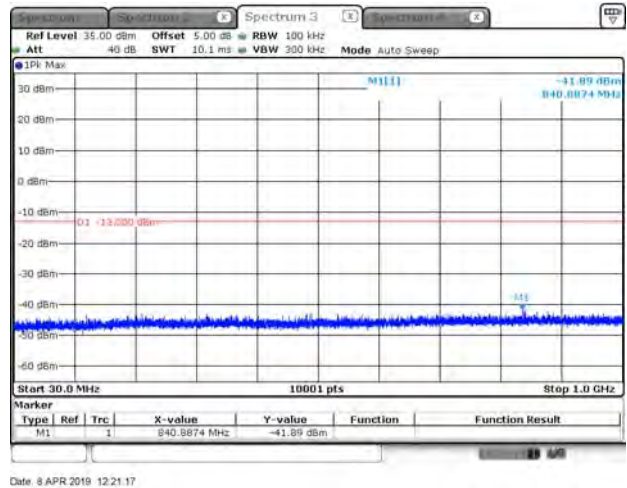


WCDMA_Band4_1712.4MHz_HSDPA_above 1G

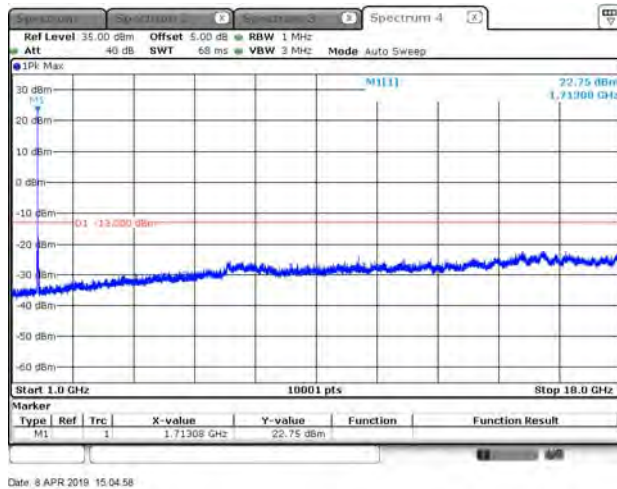


WCDMA_Band4_1712.4MHz_HSDPA_under 1G

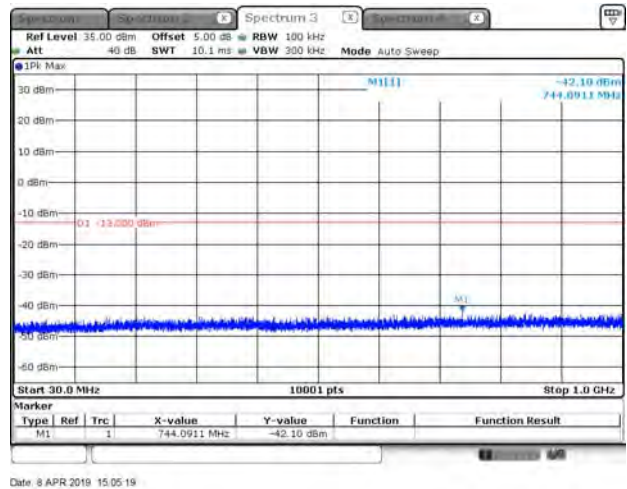

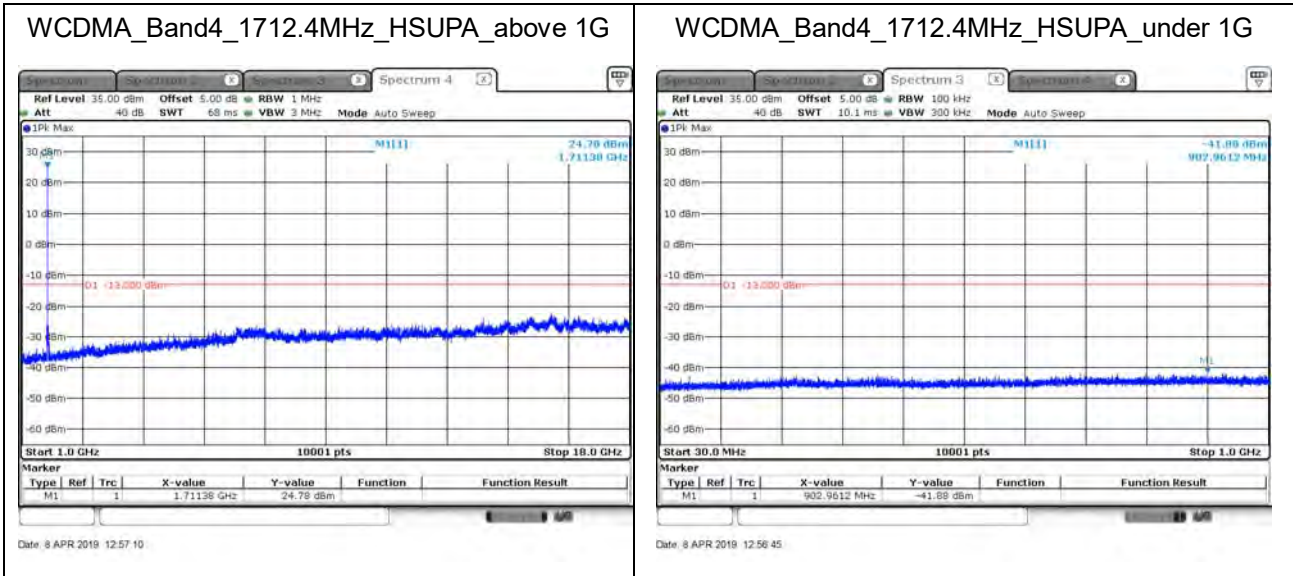


WCDMA_Band4_1732.6MHz_RMC_above 1G

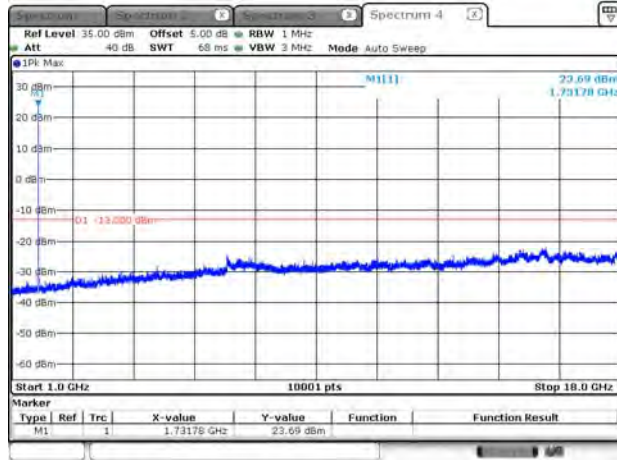


Date: 8 APR 2019 12:13:53

WCDMA_Band4_1732.6MHz_RMC_under 1G

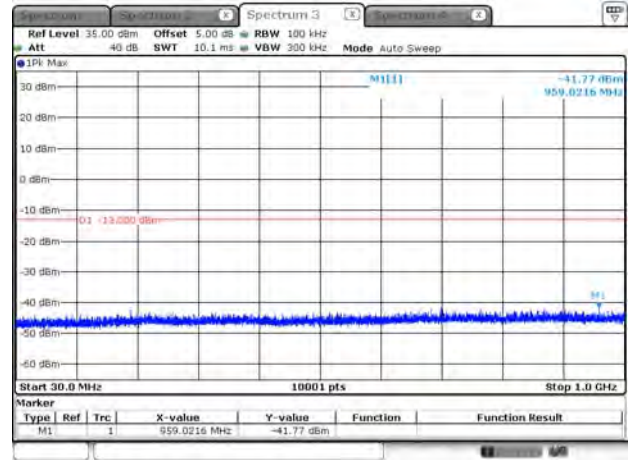


Date: 8 APR 2019 12:12:02

WCDMA_Band4_1732.6MHz_HSDPA_above 1G

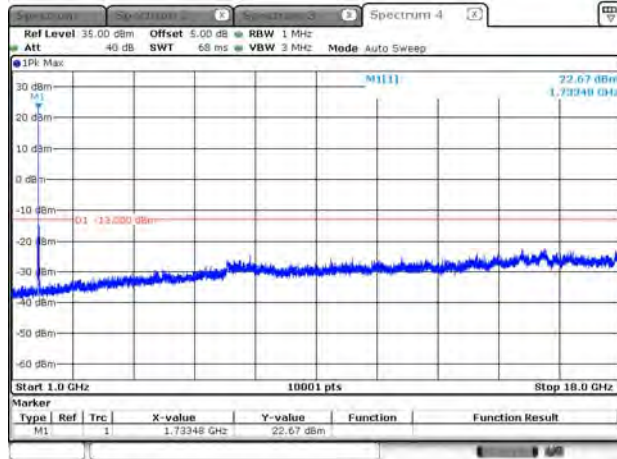


Date: 8 APR 2019 15:06:41

WCDMA_Band4_1732.6MHz_HSDPA_under 1G

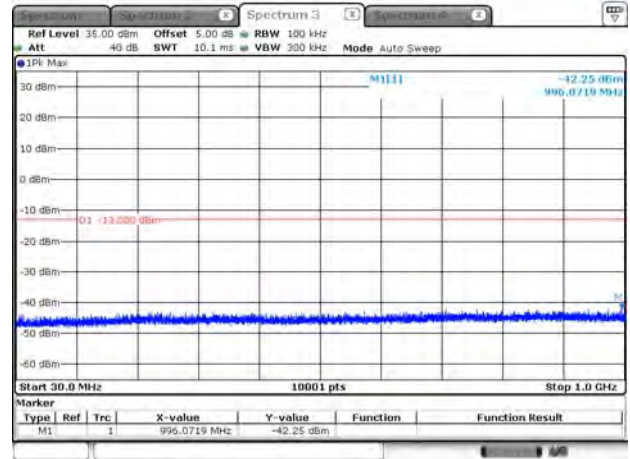


Date: 8 APR 2019 15:06:15

WCDMA_Band4_1732.6MHz_HSUPA_above 1G






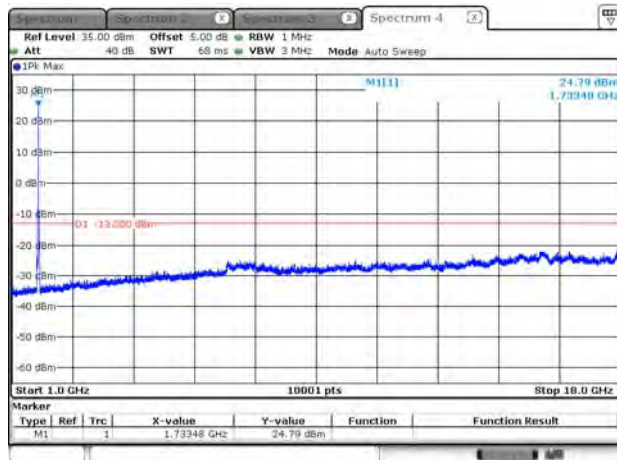


Date: 8 APR 2019 14:28:46





WCDMA_Band4_1732.6MHz_HSUPA_under 1G

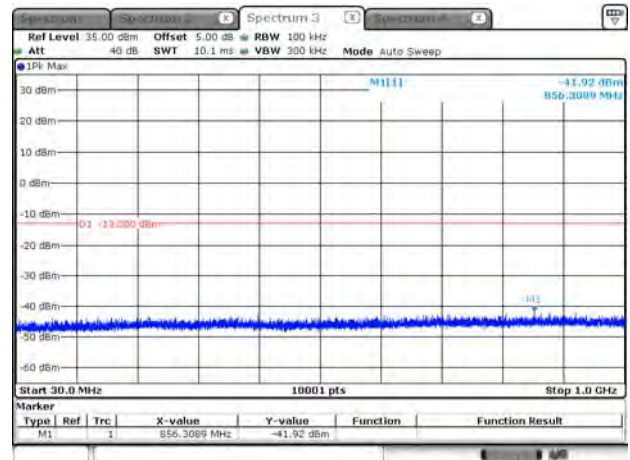


Date: 8 APR 2019 14:27:27

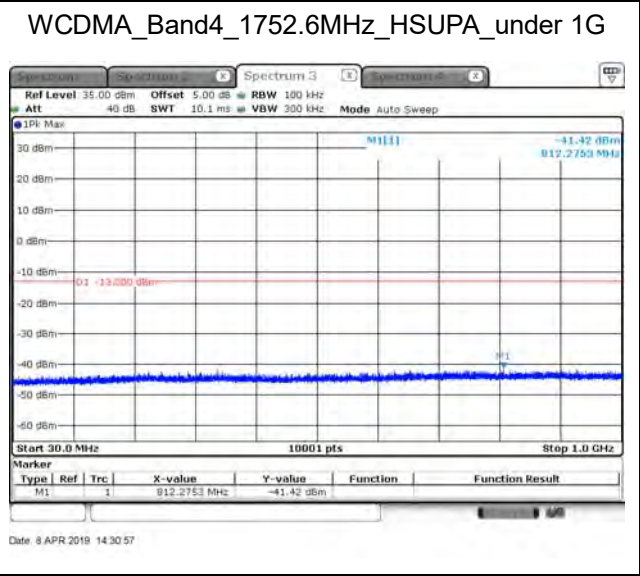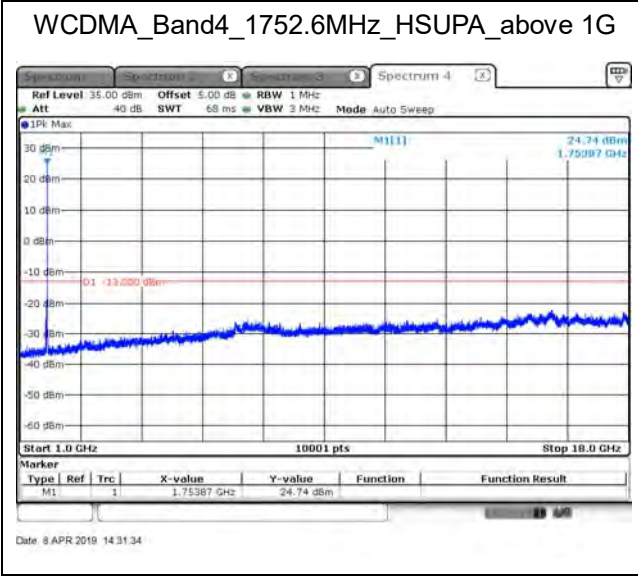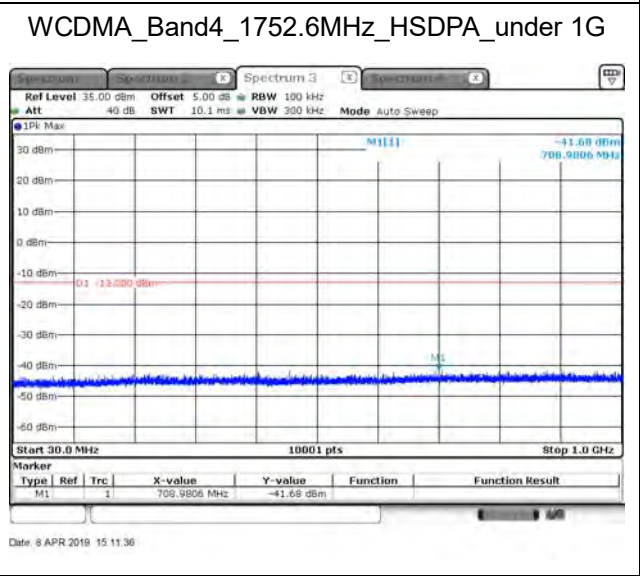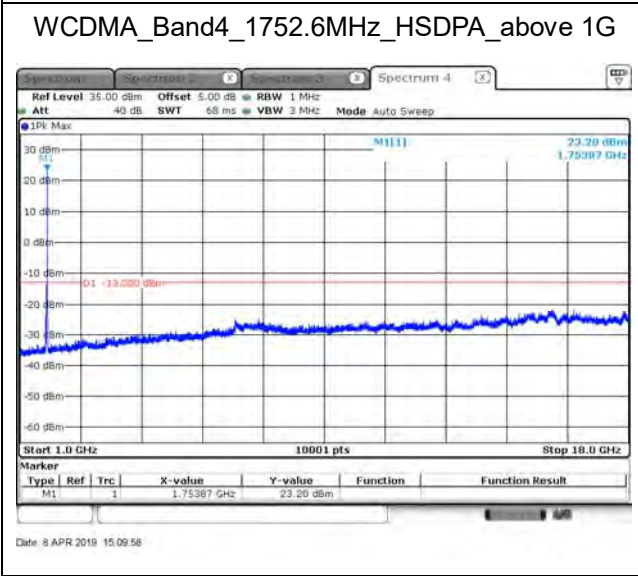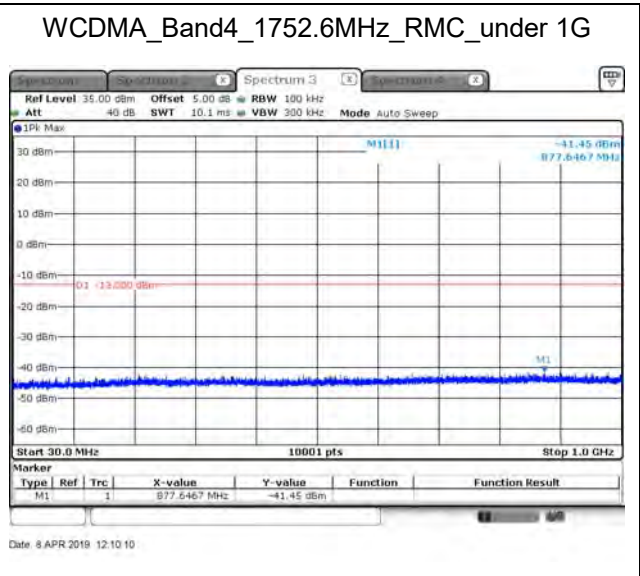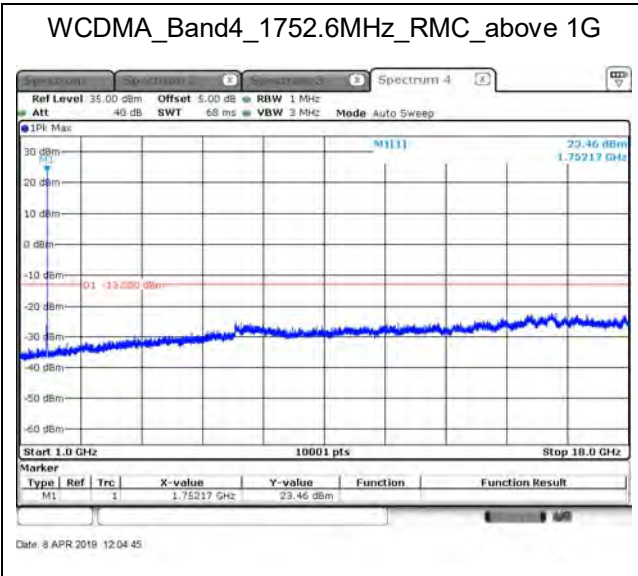


Product	Module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 3: WCDMA_Band 5		
Date of Test	2019/04/08	Test Site	SR10-H

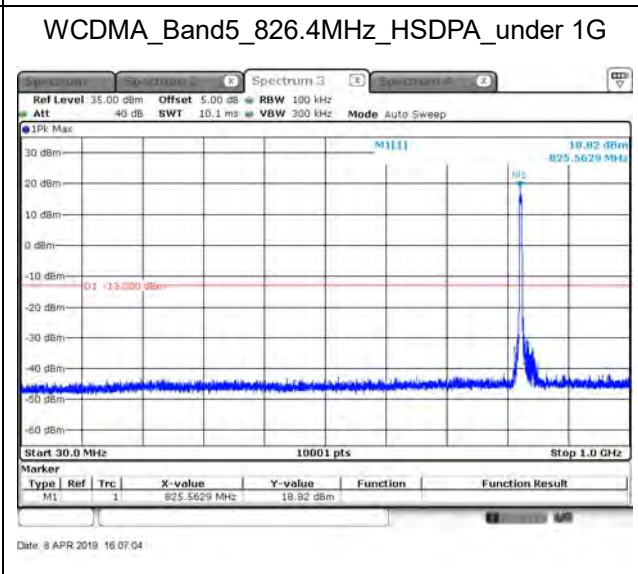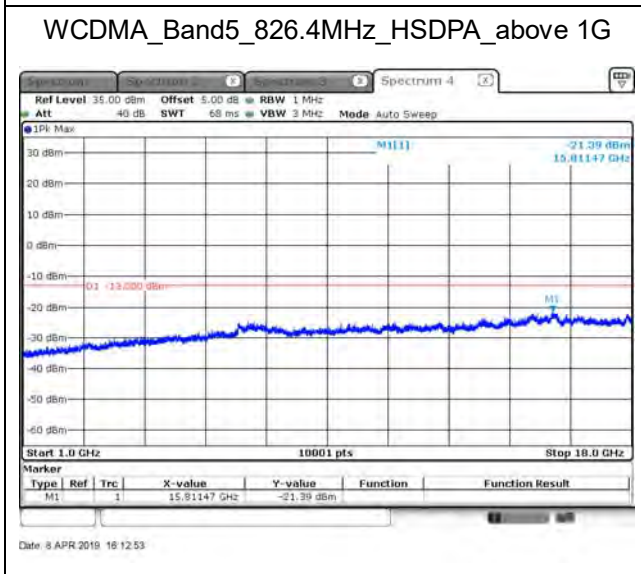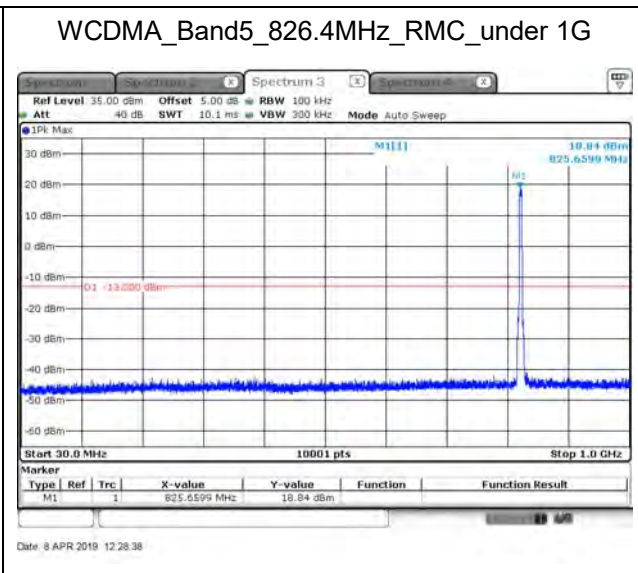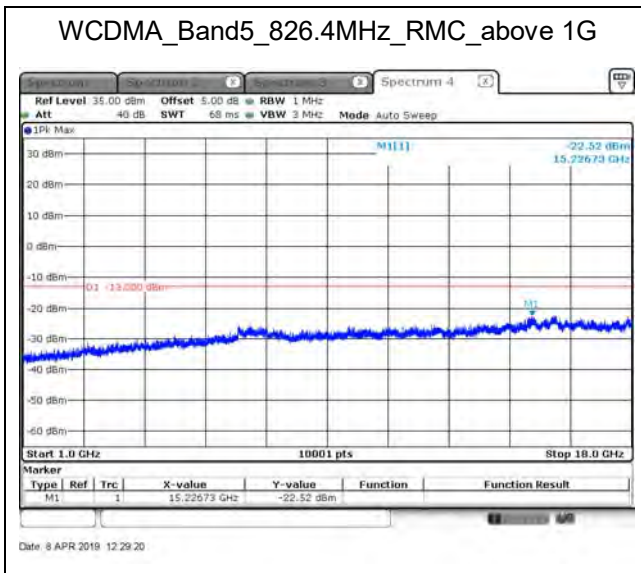

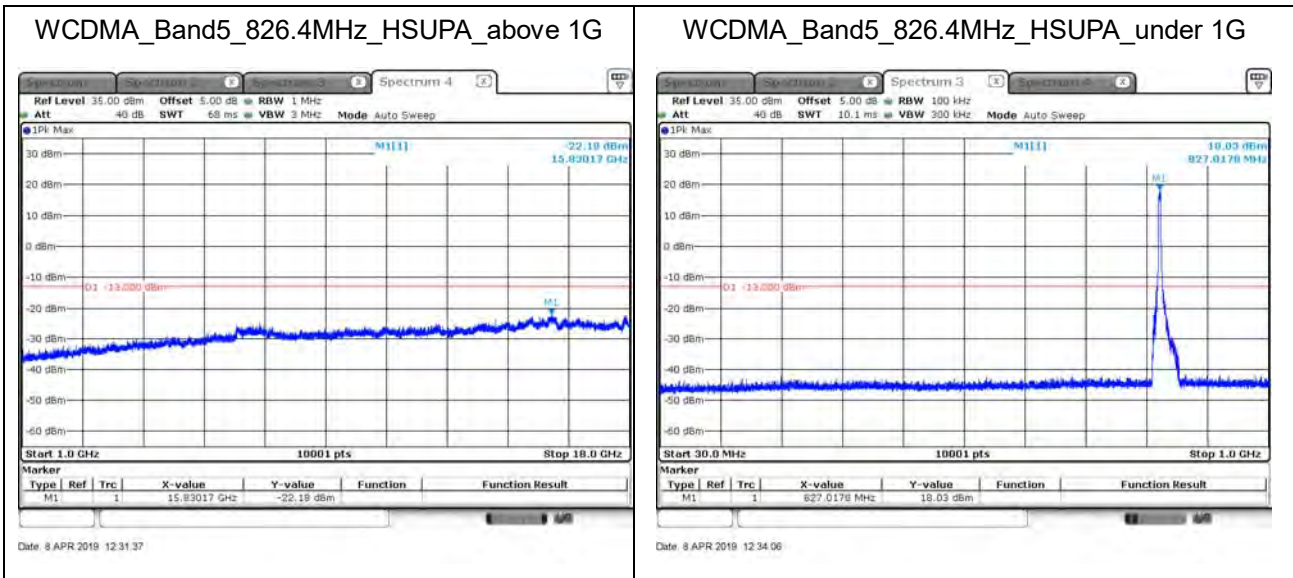


WCDMA_Band5_836.6MHz_RMC_above 1G

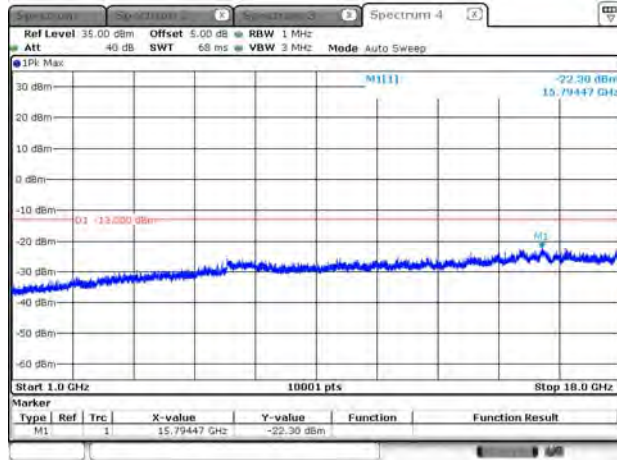


Date: 8 APR 2019 12:24:16

WCDMA_Band5_836.6MHz_RMC_under 1G

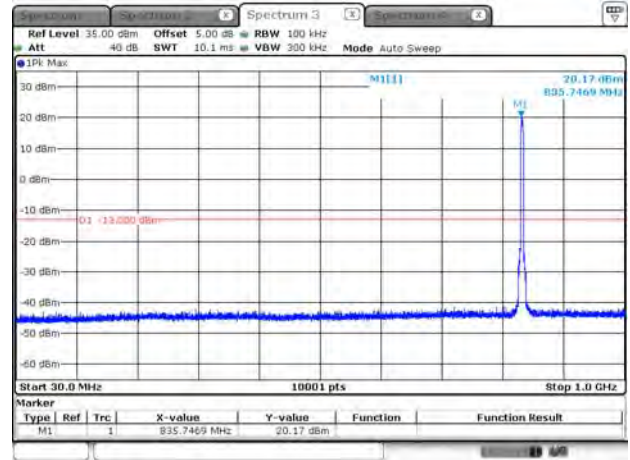


Date: 8 APR 2019 12:27:58

WCDMA_Band5_836.6MHz_HSDPA_above 1G

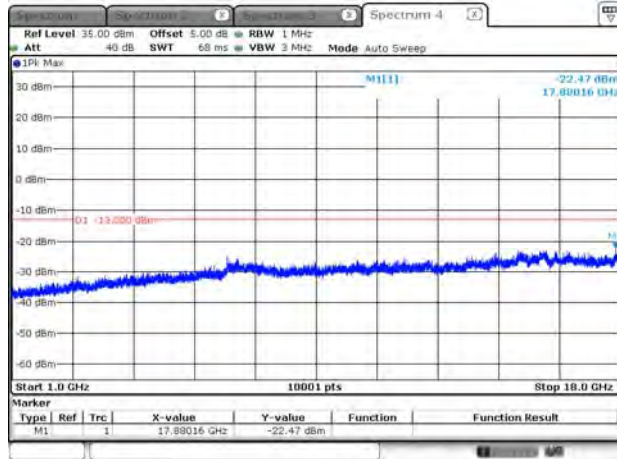


Date: 8 APR 2019 16:38:42

WCDMA_Band5_836.6MHz_HSDPA_under 1G

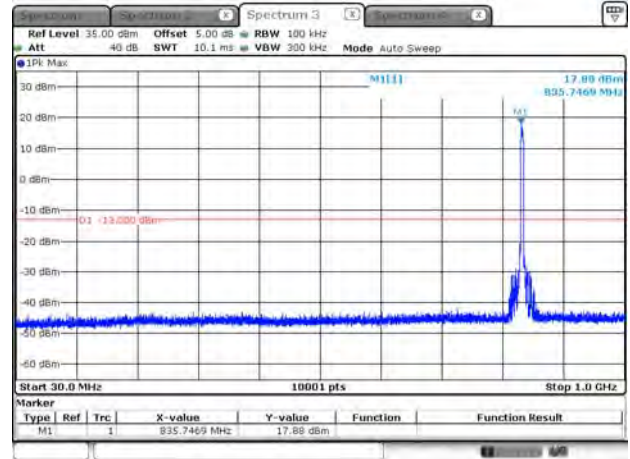


Date: 8 APR 2019 16:37:12

WCDMA_Band5_836.6MHz_HSUPA_above 1G

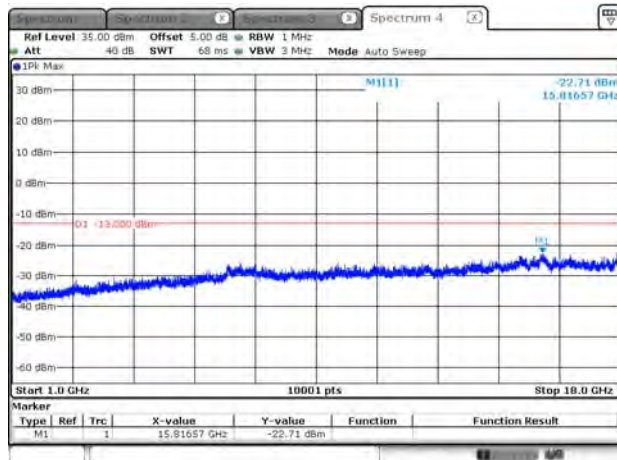


Date: 8 APR 2019 12:40:29

WCDMA_Band5_836.6MHz_HSUPA_under 1G

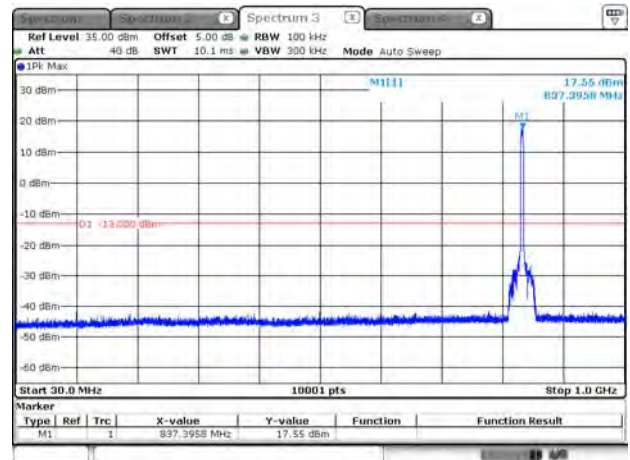


Date: 8 APR 2019 12:38:35

WCDMA_Band5_846.6MHz_RMC_above 1G

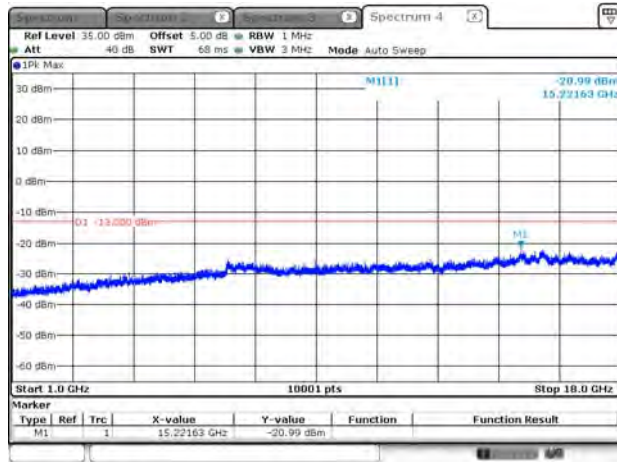


Date: 8 APR 2019 12:23:05

WCDMA_Band5_846.6MHz_RMC_under 1G

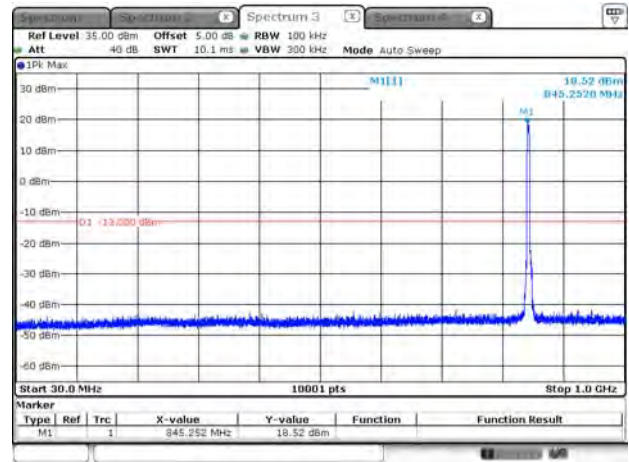


Date: 8 APR 2019 12:22:21

WCDMA_Band5_846.6MHz_HSDPA_above 1G

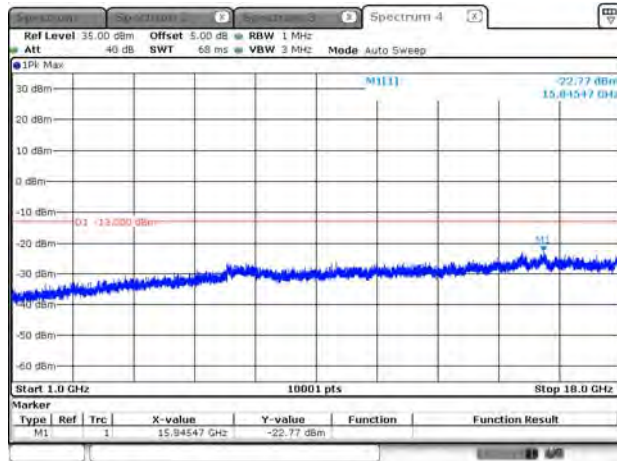


Date: 8 APR 2019 16:38:24

WCDMA_Band5_846.6MHz_HSDPA_under 1G

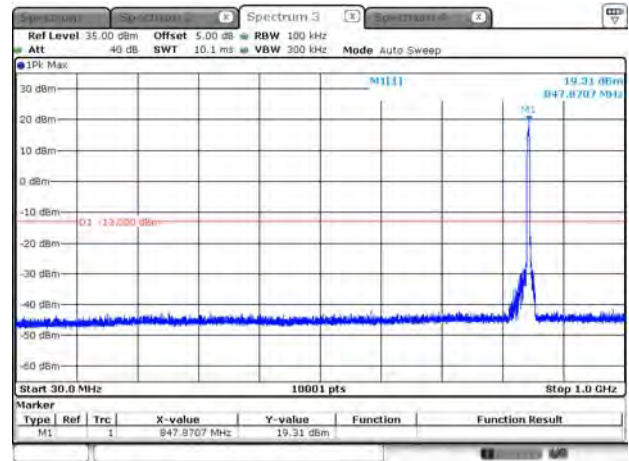


Date: 8 APR 2019 16:38:09

WCDMA_Band5_846.6MHz_HSUPA_above 1G

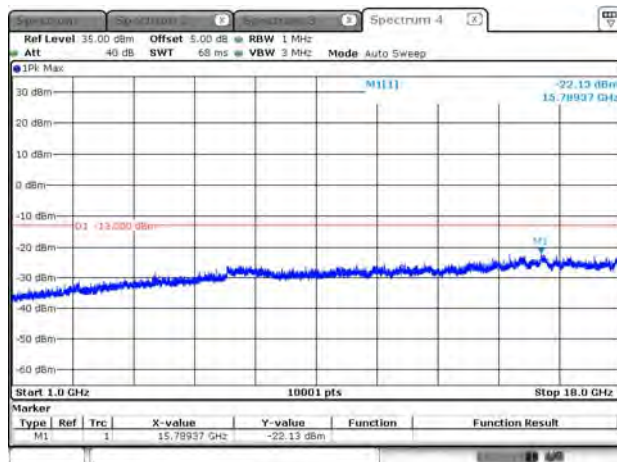

Date: 8 APR 2019 12:43:57

WCDMA_Band5_846.6MHz_HSUPA_under 1G

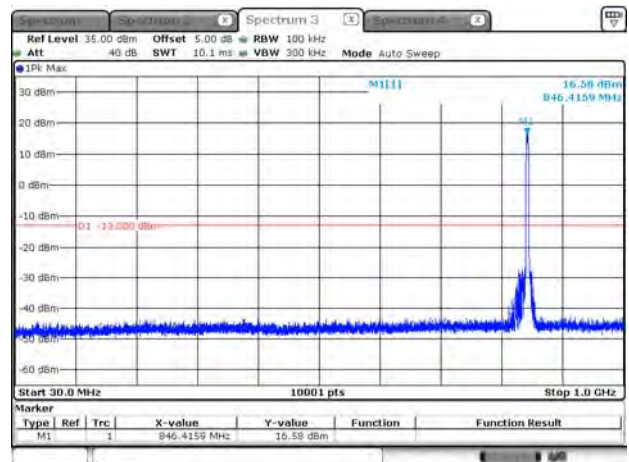

Date: 8 APR 2019 12:46:14

Product	Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 1: WCDMA_Band 2		
Date of Test	2019/04/16	Test Site	CB4-H

WCDMA_Band 2_RMC_Link

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.4MHz)								
3704.80	-63.270	H	-64.684	4.287	11.931	-57.040	-13	-44.040
5557.20	-61.250	H	-55.867	5.203	12.900	-48.170	-13	-35.170
3704.80	-67.030	V	-66.494	4.287	11.931	-58.850	-13	-45.850
5557.20	-53.500	V	-48.217	5.203	12.900	-40.520	-13	-27.520
Middle Channel 9400 (1880MHz)								
3760.00	-65.100	H	-66.577	4.335	11.832	-59.080	-13	-46.080
5640.00	-59.900	H	-54.755	5.235	12.900	-47.090	-13	-34.090
3760.00	-62.410	V	-61.777	4.335	11.832	-54.280	-13	-41.280
5640.00	-52.740	V	-47.865	5.235	12.900	-40.200	-13	-27.200
High Channel 9538 (1907.6MHz)								
3815.20	-65.670	H	-67.231	4.382	11.733	-59.880	-13	-46.880
5722.80	-58.350	H	-53.443	5.267	12.900	-45.810	-13	-32.810
3815.20	-67.240	V	-66.531	4.382	11.733	-59.180	-13	-46.180
5722.80	-48.980	V	-44.503	5.267	12.900	-36.870	-13	-23.870

Test Result (EIRP) = SG Level - Cable Loss + Antenna Gain

Product	Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 1: WCDMA_Band 2		
Date of Test	2019/04/16	Test Site	CB4-H

WCDMA_Band 2_HSDPA_Link

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.4MHz)								
3704.80	-65.630	H	-67.044	4.287	11.931	-59.400	-13	-46.400
5557.20	-61.590	H	-56.207	5.203	12.900	-48.510	-13	-35.510
3704.80	-65.690	V	-65.154	4.287	11.931	-57.510	-13	-44.510
5557.20	-53.760	V	-48.477	5.203	12.900	-40.780	-13	-27.780
Middle Channel 9400 (1880MHz)								
3760.00	-63.440	H	-64.917	4.335	11.832	-57.420	-13	-44.420
5640.00	-60.900	H	-55.755	5.235	12.900	-48.090	-13	-35.090
3760.00	-62.790	V	-62.157	4.335	11.832	-54.660	-13	-41.660
5640.00	-53.500	V	-48.625	5.235	12.900	-40.960	-13	-27.960
High Channel 9538 (1907.6MHz)								
3815.20	-66.290	H	-67.851	4.382	11.733	-60.500	-13	-47.500
5722.80	-58.470	H	-53.563	5.267	12.900	-45.930	-13	-32.930
3815.20	-67.350	V	-66.641	4.382	11.733	-59.290	-13	-46.290
5722.80	-48.940	V	-44.463	5.267	12.900	-36.830	-13	-23.830

Test Result (EIRP) = SG Level - Cable Loss + Antenna Gain

Product	Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 1: WCDMA_Band 2		
Date of Test	2019/04/16	Test Site	CB4-H

WCDMA_Band 2_HSUPA_Link

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.4MHz)								
3704.80	-65.210	H	-66.624	4.287	11.931	-58.980	-13	-45.980
5557.20	-61.060	H	-55.677	5.203	12.900	-47.980	-13	-34.980
3704.80	-66.020	V	-65.484	4.287	11.931	-57.840	-13	-44.840
5557.20	-54.810	V	-49.527	5.203	12.900	-41.830	-13	-28.830
Middle Channel 9400 (1880MHz)								
3760.00	-64.960	H	-66.437	4.335	11.832	-58.940	-13	-45.940
5640.00	-58.020	H	-52.875	5.235	12.900	-45.210	-13	-32.210
3760.00	-61.820	V	-61.187	4.335	11.832	-53.690	-13	-40.690
5640.00	-51.080	V	-46.205	5.235	12.900	-38.540	-13	-25.540
High Channel 9538 (1907.6MHz)								
3815.20	-65.160	H	-66.721	4.382	11.733	-59.370	-13	-46.370
5722.80	-58.190	H	-53.283	5.267	12.900	-45.650	-13	-32.650
3815.20	-67.520	V	-66.811	4.382	11.733	-59.460	-13	-46.460
5722.80	-49.390	V	-44.913	5.267	12.900	-37.280	-13	-24.280

Test Result (EIRP) = SG Level - Cable Loss + Antenna Gain

Product	Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 2: WCDMA_Band 4		
Date of Test	2019/04/16	Test Site	CB4-H

WCDMA_Band 4_RMC_Link

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1312 (1712.4MHz)								
3424.80	-63.510	H	-64.718	4.066	12.104	-56.680	-13	-43.680
5137.20	-58.410	H	-55.880	5.077	12.247	-48.710	-13	-35.710
3424.80	-60.080	V	-60.008	4.066	12.104	-51.970	-13	-38.970
5137.20	-56.810	V	-53.740	5.077	12.247	-46.570	-13	-33.570
Middle Channel 1413 (1732.6MHz)								
3465.20	-65.620	H	-66.539	4.090	12.210	-58.420	-13	-45.420
5197.80	-60.550	H	-57.522	5.094	12.356	-50.260	-13	-37.260
3465.20	-64.180	V	-63.829	4.090	12.210	-55.710	-13	-42.710
5197.80	-56.610	V	-53.142	5.094	12.356	-45.880	-13	-32.880
High Channel 1513 (1752.6MHz)								
3505.20	-62.960	H	-64.115	4.115	12.291	-55.940	-13	-42.940
5257.80	-57.050	H	-53.533	5.111	12.464	-46.180	-13	-33.180
3505.20	-62.740	V	-62.515	4.115	12.291	-54.340	-13	-41.340
5257.80	-51.260	V	-47.393	5.111	12.464	-40.040	-13	-27.040

Test Result (EIRP) = SG Level - Cable Loss + Antenna Gain

Product	Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 2: WCDMA_Band 4		
Date of Test	2019/04/16	Test Site	CB4-H

WCDMA_Band 4_HSDPA_Link

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1312 (1712.4MHz)								
3424.80	-63.950	H	-65.158	4.066	12.104	-57.120	-13	-44.120
5137.20	-58.440	H	-55.910	5.077	12.247	-48.740	-13	-35.740
3424.80	-60.150	V	-60.078	4.066	12.104	-52.040	-13	-39.040
5137.20	-57.420	V	-54.350	5.077	12.247	-47.180	-13	-34.180
Middle Channel 1413 (1732.6MHz)								
3465.20	-65.570	H	-66.489	4.090	12.210	-58.370	-13	-45.370
5197.80	-61.680	H	-58.652	5.094	12.356	-51.390	-13	-38.390
3465.20	-64.290	V	-63.939	4.090	12.210	-55.820	-13	-42.820
5197.80	-55.490	V	-52.022	5.094	12.356	-44.760	-13	-31.760
High Channel 1513 (1752.6MHz)								
3505.20	-63.070	H	-64.225	4.115	12.291	-56.050	-13	-43.050
5257.80	-57.140	H	-53.623	5.111	12.464	-46.270	-13	-33.270
3505.20	-62.790	V	-62.565	4.115	12.291	-54.390	-13	-41.390
5257.80	-53.370	V	-49.503	5.111	12.464	-42.150	-13	-29.150

Test Result (EIRP) = SG Level - Cable Loss + Antenna Gain

Product	Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 2: WCDMA_Band 4		
Date of Test	2019/04/16	Test Site	CB4-H

WCDMA_Band 4_HSUPA_Link

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 1312 (1712.4MHz)								
3424.80	-63.570	H	-64.778	4.066	12.104	-56.740	-13	-43.740
5137.20	-58.460	H	-55.930	5.077	12.247	-48.760	-13	-35.760
3424.80	-59.980	V	-59.908	4.066	12.104	-51.870	-13	-38.870
5137.20	-56.410	V	-53.340	5.077	12.247	-46.170	-13	-33.170
Middle Channel 1413 (1732.6MHz)								
3465.20	-66.250	H	-67.169	4.090	12.210	-59.050	-13	-46.050
5197.80	-60.770	H	-57.742	5.094	12.356	-50.480	-13	-37.480
3465.20	-64.350	V	-63.999	4.090	12.210	-55.880	-13	-42.880
5197.80	-56.690	V	-53.222	5.094	12.356	-45.960	-13	-32.960
High Channel 1513 (1752.6MHz)								
3505.20	-63.120	H	-64.275	4.115	12.291	-56.100	-13	-43.100
5257.80	-58.580	H	-55.063	5.111	12.464	-47.710	-13	-34.710
3505.20	-60.460	V	-60.235	4.115	12.291	-52.060	-13	-39.060
5257.80	-51.570	V	-47.703	5.111	12.464	-40.350	-13	-27.350

Test Result (EIRP) = SG Level - Cable Loss + Antenna Gain

Product	Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 3: WCDMA_Band 5		
Date of Test	2019/04/16	Test Site	CB4-H

WCDMA_Band 5_RMC_Link

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.4MHz)								
1652.80	-46.730	H	-60.314	2.794	8.758	-54.350	-13	-41.350
2479.20	-65.320	H	-76.705	3.442	10.567	-69.580	-13	-56.580
1652.80	-50.470	V	-63.494	2.794	8.758	-57.530	-13	-44.530
2479.20	-67.650	V	-77.025	3.442	10.567	-69.900	-13	-56.900
Middle Channel 4183 (836.6MHz)								
1673.20	-50.500	H	-64.127	2.813	8.820	-58.120	-13	-45.120
2509.80	-65.290	H	-76.475	3.463	10.608	-69.330	-13	-56.330
1673.20	-53.950	V	-67.057	2.813	8.820	-61.050	-13	-48.050
2509.80	-67.580	V	-76.595	3.463	10.608	-69.450	-13	-56.450
High Channel 4233 (846.6MHz)								
1693.20	-49.110	H	-62.789	2.831	8.880	-56.740	-13	-43.740
2539.80	-65.060	H	-75.947	3.484	10.632	-68.800	-13	-55.800
1693.20	-53.010	V	-66.219	2.831	8.880	-60.170	-13	-47.170
2539.80	-66.960	V	-75.587	3.484	10.632	-68.440	-13	-55.440

Test Result (EIRP) = SG Level - Cable Loss + Antenna Gain

Product	Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 3: WCDMA_Band 5		
Date of Test	2019/04/16	Test Site	CB4-H

WCDMA_Band 5_HSDPA_Link

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.4MHz)								
1652.80	-46.840	H	-60.424	2.794	8.758	-54.460	-13	-41.460
2479.20	-65.290	H	-76.675	3.442	10.567	-69.550	-13	-56.550
1652.80	-50.580	V	-63.604	2.794	8.758	-57.640	-13	-44.640
2479.20	-67.570	V	-76.945	3.442	10.567	-69.820	-13	-56.820
Middle Channel 4183 (836.6MHz)								
1673.20	-50.570	H	-64.197	2.813	8.820	-58.190	-13	-45.190
2509.80	-65.260	H	-76.445	3.463	10.608	-69.300	-13	-56.300
1673.20	-53.640	V	-66.747	2.813	8.820	-60.740	-13	-47.740
2509.80	-66.820	V	-75.835	3.463	10.608	-68.690	-13	-55.690
High Channel 4233 (846.6MHz)								
1693.20	-49.200	H	-62.879	2.831	8.880	-56.830	-13	-43.830
2539.80	-65.050	H	-75.937	3.484	10.632	-68.790	-13	-55.790
1693.20	-53.230	V	-66.439	2.831	8.880	-60.390	-13	-47.390
2539.80	-66.370	V	-74.997	3.484	10.632	-67.850	-13	-54.850

Test Result (EIRP) = SG Level - Cable Loss + Antenna Gain

Product	Module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 3: WCDMA_Band 5		
Date of Test	2019/04/16	Test Site	CB4-H


WCDMA_Band 5_HSUPA_Link

Frequency (MHz)	SA Reading (dBm)	Ant.Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.4MHz)								
1652.80	-47.190	H	-60.774	2.794	8.758	-54.810	-13	-41.810
2479.20	-65.130	H	-76.515	3.442	10.567	-69.390	-13	-56.390
1652.80	-49.810	V	-62.834	2.794	8.758	-56.870	-13	-43.870
2479.20	-66.170	V	-75.545	3.442	10.567	-68.420	-13	-55.420
Middle Channel 4183 (836.6MHz)								
1673.20	-50.720	H	-64.347	2.813	8.820	-58.340	-13	-45.340
2509.80	-64.410	H	-75.595	3.463	10.608	-68.450	-13	-55.450
1673.20	-53.630	V	-66.737	2.813	8.820	-60.730	-13	-47.730
2509.80	-68.560	V	-77.575	3.463	10.608	-70.430	-13	-57.430
High Channel 4233 (846.6MHz)								
1693.20	-49.230	H	-62.909	2.831	8.880	-56.860	-13	-43.860
2539.80	-64.530	H	-75.417	3.484	10.632	-68.270	-13	-55.270
1693.20	-53.230	V	-66.439	2.831	8.880	-60.390	-13	-47.390
2539.80	-66.670	V	-75.297	3.484	10.632	-68.150	-13	-55.150

Test Result (EIRP) = SG Level - Cable Loss + Antenna Gain

8. Frequency Stability

8.1. Test Setup

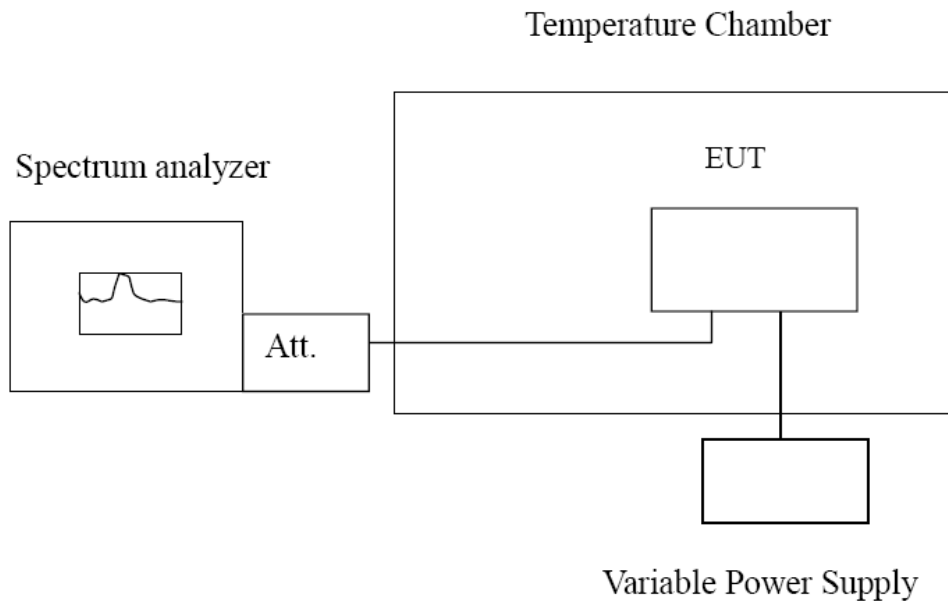

8.2. Test Procedure

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

8.3. Test Method

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 9

ANSI C63.26-2015 Sub-clause 5.6

8.4. Test Result

Product	Module		
Test Item	Frequency Stability		
Test Mode	Mode 1: WCDMA_Band 2		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 2_1852.4MHz

Voltage

DC Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
4.2	14	-0.0208
3.8	24	-0.0357
3.4	14	-0.0208

Temperature

Temperature	Frequency Error (Hz)	Frequency Error (ppm)
-30	16	-0.0238
-20	11	-0.0163
-10	7	-0.0104
0	-10	0.0149
10	4	-0.0059
20	-1	0.0015
30	8	-0.0119
40	8	-0.0119
50	7	-0.0104

Product	Module		
Test Item	Frequency Stability		
Test Mode	Mode 1: WCDMA_Band 2		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 2_1880MHz

Voltage

DC Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
4.2	-7	0.0103
3.8	-42	0.0617
3.4	-26	0.0382

Temperature

Temperature	Frequency Error (Hz)	Frequency Error (ppm)
-30	-1	0.0015
-20	1	-0.0015
-10	-36	0.0529
0	21	-0.0309
10	20	-0.0294
20	-22	0.0323
30	4	-0.0059
40	-26	0.0382
50	-35	0.0514

Product	Module		
Test Item	Frequency Stability		
Test Mode	Mode 1: WCDMA_Band 2		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 2_1907.6MHz

Voltage

DC Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
4.2	-23	0.0331
3.8	20	-0.0288
3.4	22	-0.0316

Temperature

Temperature	Frequency Error (Hz)	Frequency Error (ppm)
-30	-3	0.0043
-20	-5	0.0072
-10	-21	0.0302
0	-23	0.0331
10	-4	0.0058
20	-15	0.0216
30	-20	0.0288
40	9	-0.0129
50	22	-0.0316

Product	Module		
Test Item	Frequency Stability		
Test Mode	Mode 2: WCDMA_Band 4		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 4_1712.4MHz

Voltage

DC Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
4.2	1	-0.0015
3.8	18	-0.0267
3.4	-4	0.0059

Temperature

Temperature	Frequency Error (Hz)	Frequency Error (ppm)
-30	24	-0.0357
-20	-24	0.0357
-10	3	-0.0045
0	-36	0.0535
10	-4	0.0059
20	4	-0.0059
30	-29	0.0431
40	-35	0.0520
50	-35	0.0520

Product	Module		
Test Item	Frequency Stability		
Test Mode	Mode 2: WCDMA_Band 4		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 4_1732.6MHz

Voltage

DC Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
4.2	-22	0.0323
3.8	-37	0.0544
3.4	-28	0.0411

Temperature

Temperature	Frequency Error (Hz)	Frequency Error (ppm)
-30	-13	0.0191
-20	-28	0.0411
-10	25	-0.0367
0	-32	0.0470
10	16	-0.0235
20	-34	0.0500
30	-28	0.0411
40	-29	0.0426
50	-30	0.0441

Product	Module		
Test Item	Frequency Stability		
Test Mode	Mode 2: WCDMA_Band 4		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 4_1752.6MHz

Voltage

DC Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
4.2	5	-0.0072
3.8	-34	0.0489
3.4	-10	0.0144

Temperature

Temperature	Frequency Error (Hz)	Frequency Error (ppm)
-30	-27	0.0388
-20	24	-0.0345
-10	-29	0.0417
0	-27	0.0388
10	-36	0.0518
20	8	-0.0115
30	1	-0.0014
40	-34	0.0489
50	14	-0.0201

Product	Module		
Test Item	Frequency Stability		
Test Mode	Mode 3: WCDMA_Band 5		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 5_826.4MHz

Voltage

DC Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
4.2	5	-0.0072
3.8	5	-0.0072
3.4	2	-0.0029

Temperature

Temperature	Frequency Error (Hz)	Frequency Error (ppm)
-30	3	-0.0043
-20	-5	0.0072
-10	-24	0.0345
0	-42	0.0604
10	-31	0.0446
20	8	-0.0115
30	-21	0.0302
40	5	-0.0072
50	-36	0.0518

Product	Module		
Test Item	Frequency Stability		
Test Mode	Mode 3: WCDMA_Band 5		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 5_836.6MHz

Voltage

DC Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
4.2	-13	0.0193
3.8	-31	0.0461
3.4	-7	0.0104

Temperature

Temperature	Frequency Error (Hz)	Frequency Error (ppm)
-30	-11	0.0163
-20	-15	0.0223
-10	-31	0.0461
0	-34	0.0505
10	-15	0.0223
20	1	-0.0015
30	7	-0.0104
40	-36	0.0535
50	-20	0.0297

Product	Module		
Test Item	Frequency Stability		
Test Mode	Mode 3: WCDMA_Band 5		
Date of Test	2019/04/02	Test Site	SR10-H

WCDMA_Band 5_846.6MHz

Voltage

DC Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
4.2	6	-0.0089
3.8	-13	0.0193
3.4	-35	0.0520


Temperature

Temperature	Frequency Error (Hz)	Frequency Error (ppm)
-30	-5	0.0074
-20	-40	0.0594
-10	2	-0.0030
0	12	-0.0178
10	18	-0.0267
20	-42	0.0624
30	-39	0.0579
40	-4	0.0059
50	24	-0.0357

Attachment 1

➤ Test Setup Photograph <Conducted Measurement>

Description : Conducted Measurement Test Setup

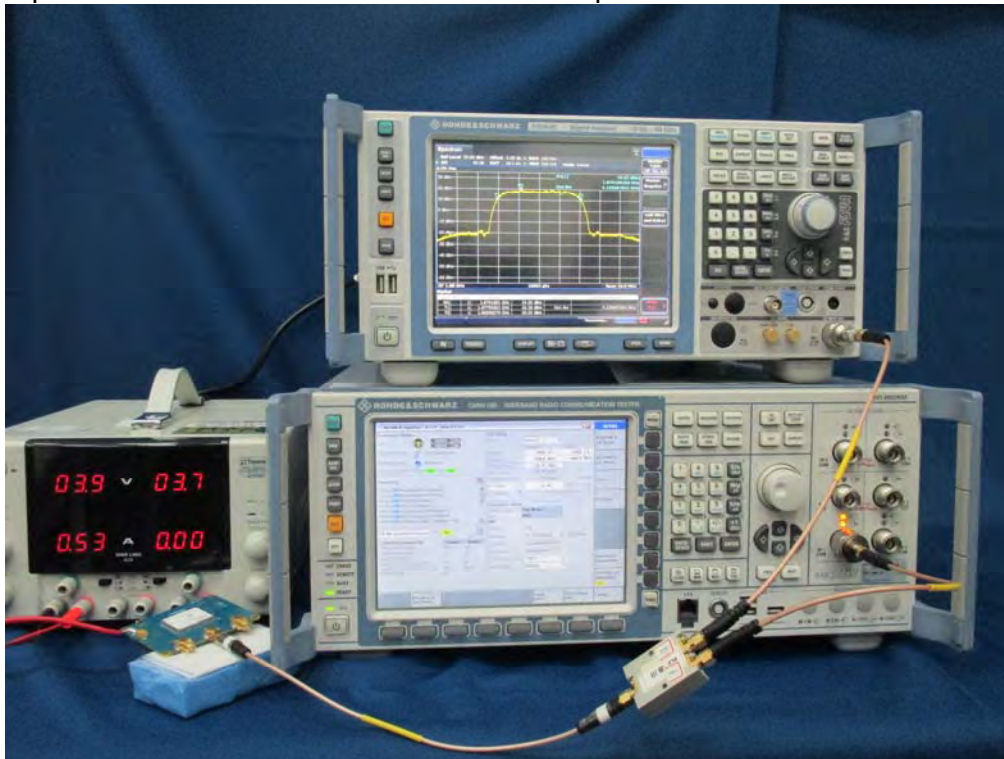


<Radiated Emission>


Description: Front View of Radiated Spurious Emission Test Setup



Description: Back View of Radiated Spurious Emission Test Setup

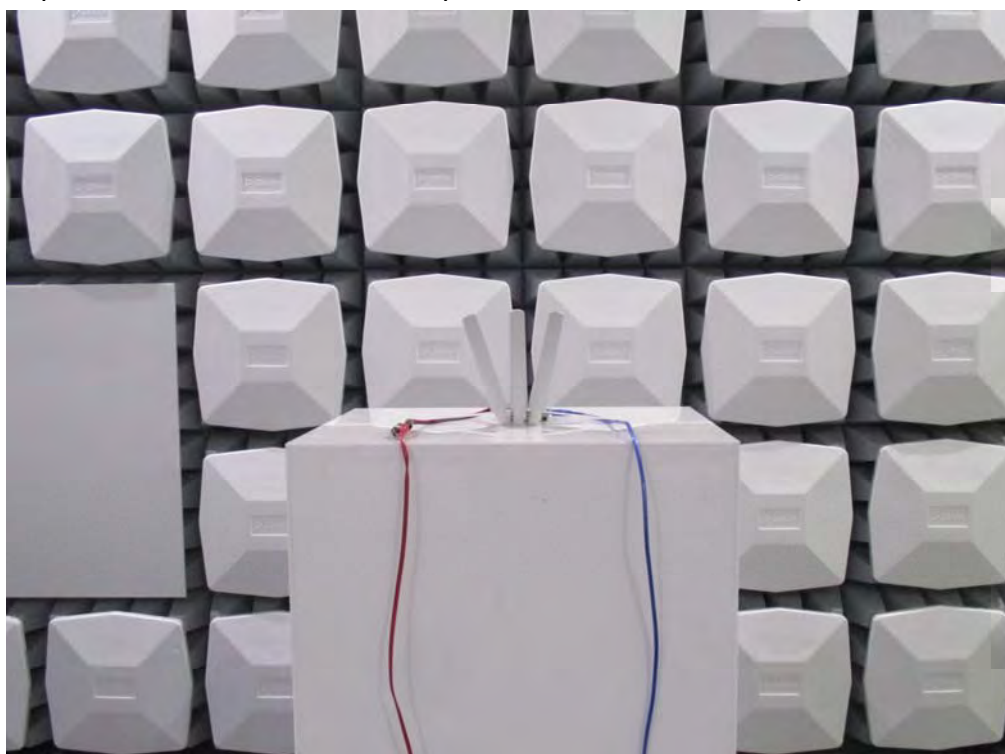

Description: Front View of Radiated Spurious Emission Test Setup (Horn)

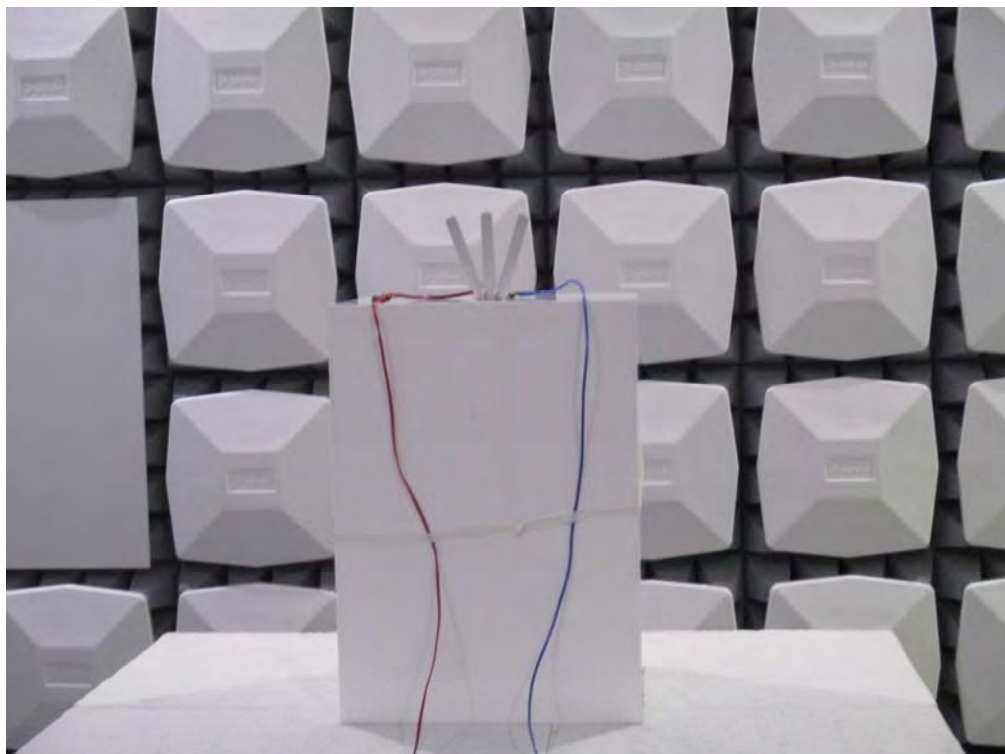


Description: Back View of Radiated Spurious Emission Test Setup (Horn)




Attachment 2

➤ EUT External Photograph


(1) EUT Photo (LE910C1-LA)

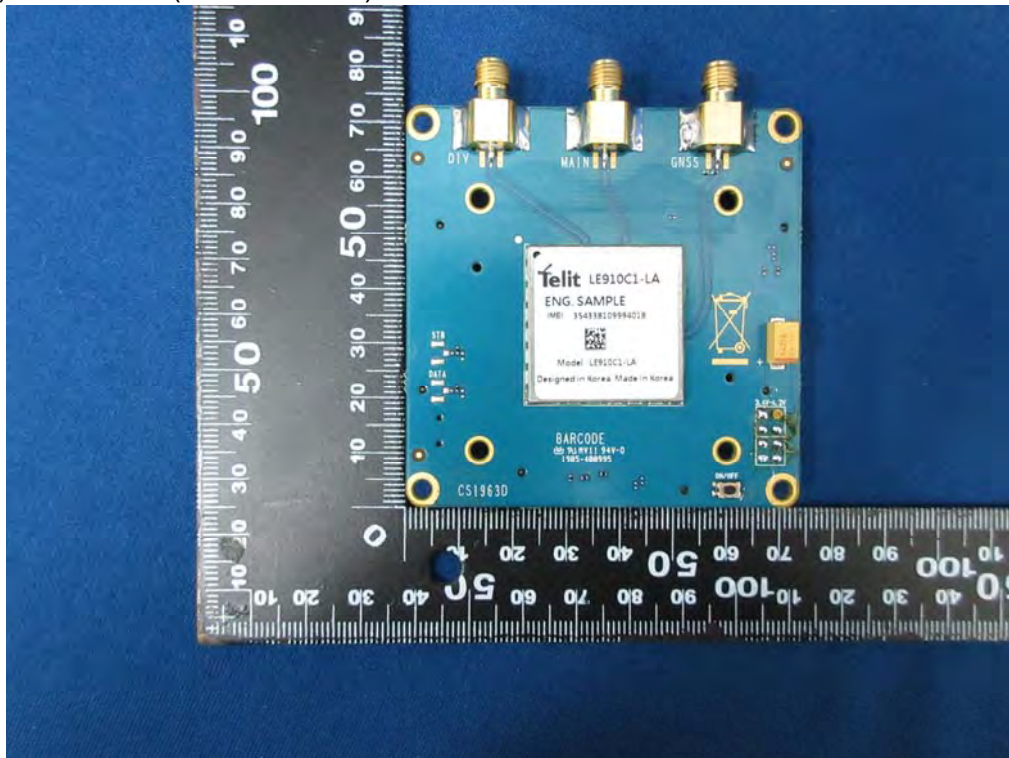


(2) EUT Photo

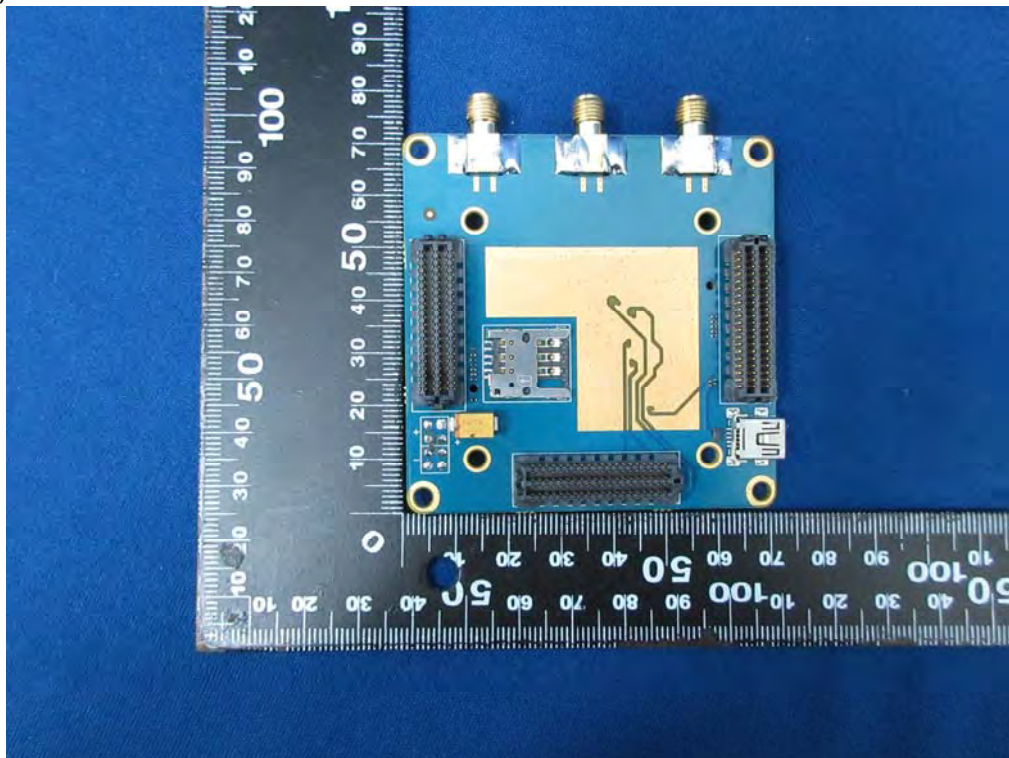


(3) EUT Photo

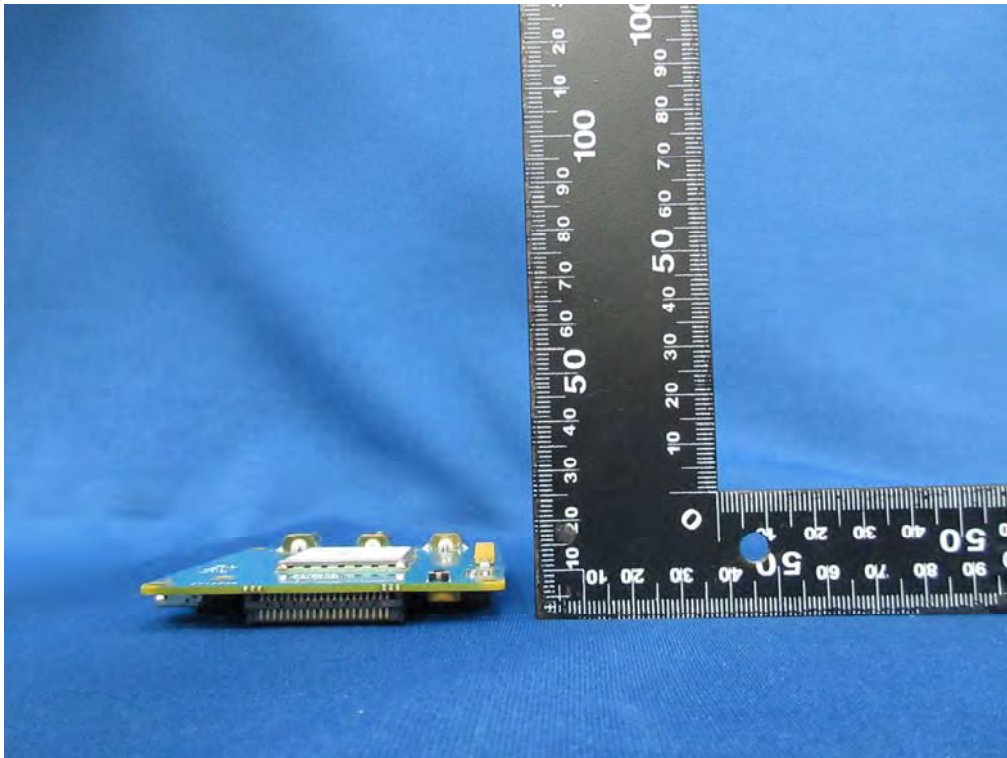


(4) EUT Photo

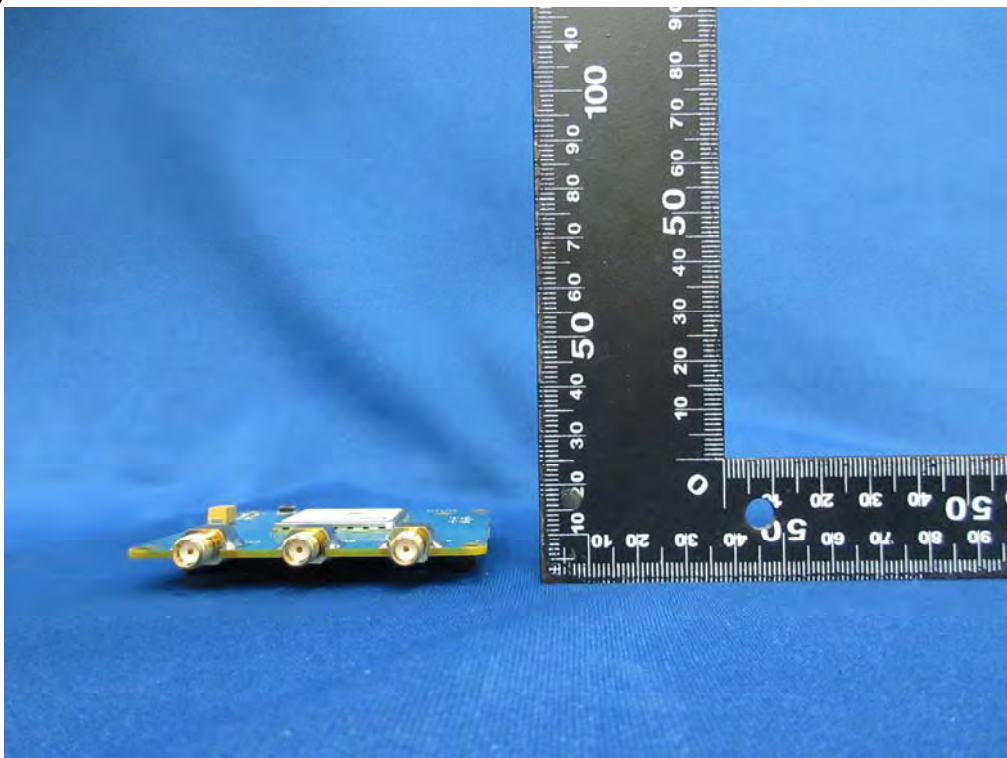


(5) EUT Photo

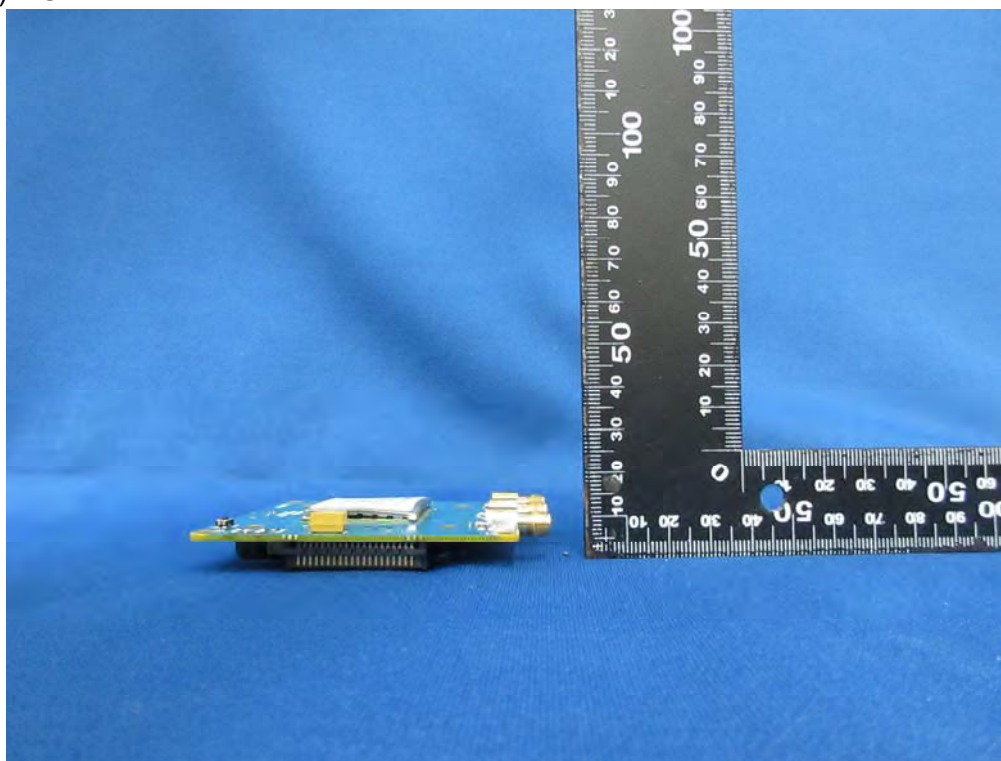


(6) EUT Photo

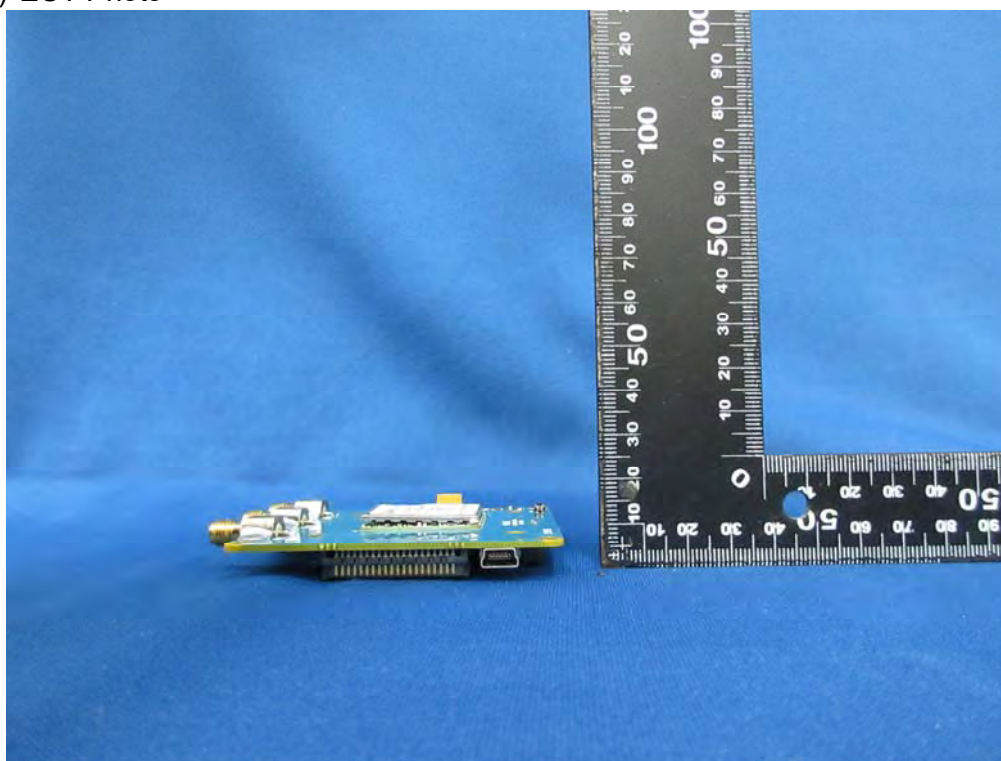


(7) EUT Photo (LE910C4-LA)

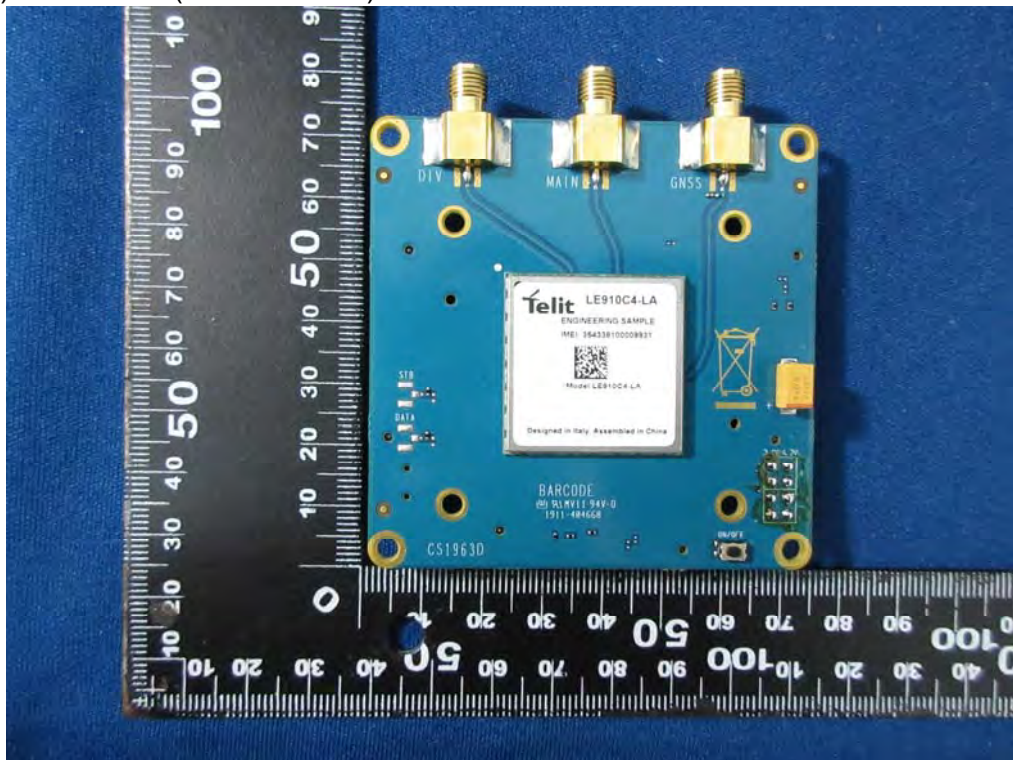


(8) EUT Photo

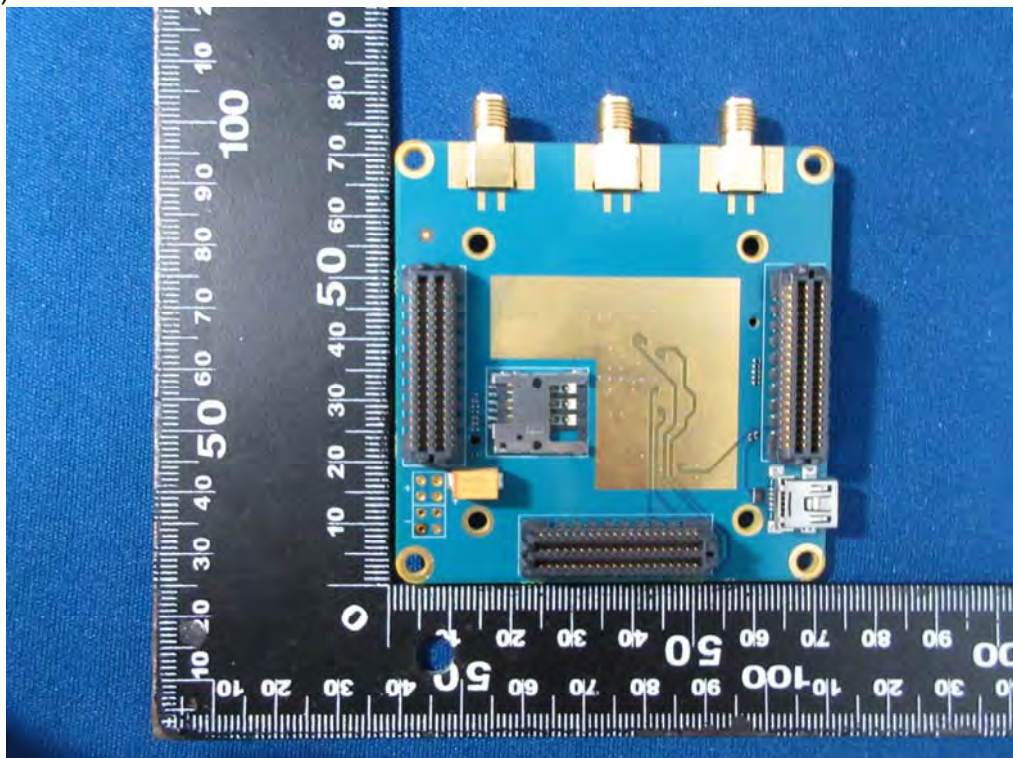


(9) EUT Photo

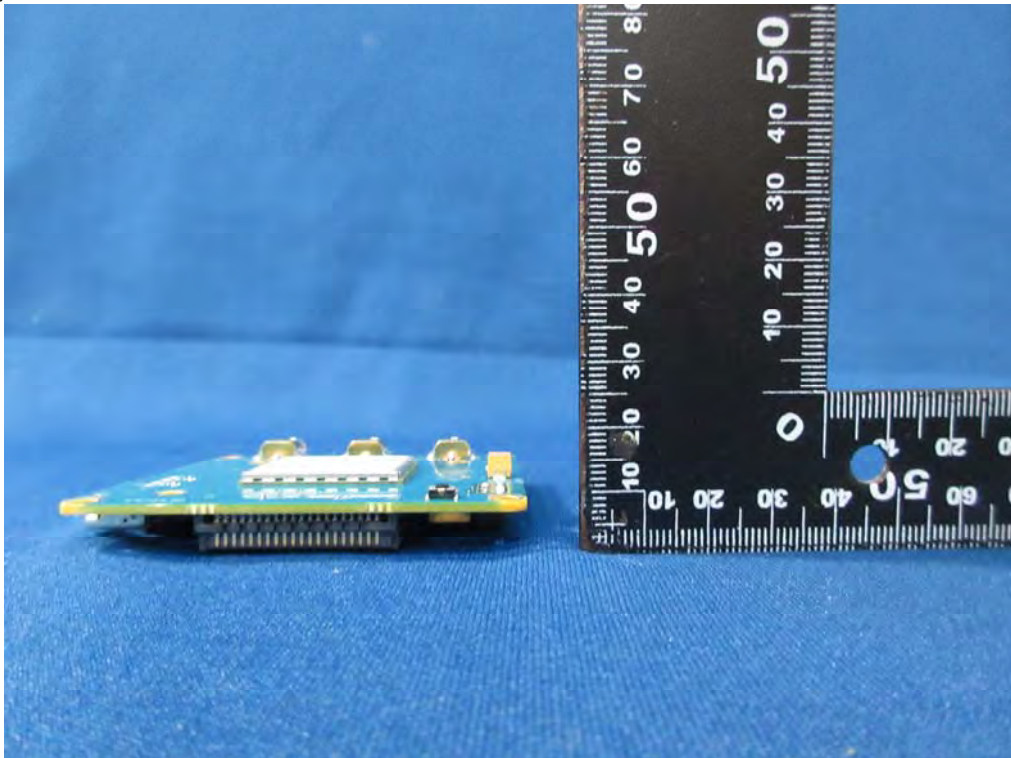


(10) EUT Photo

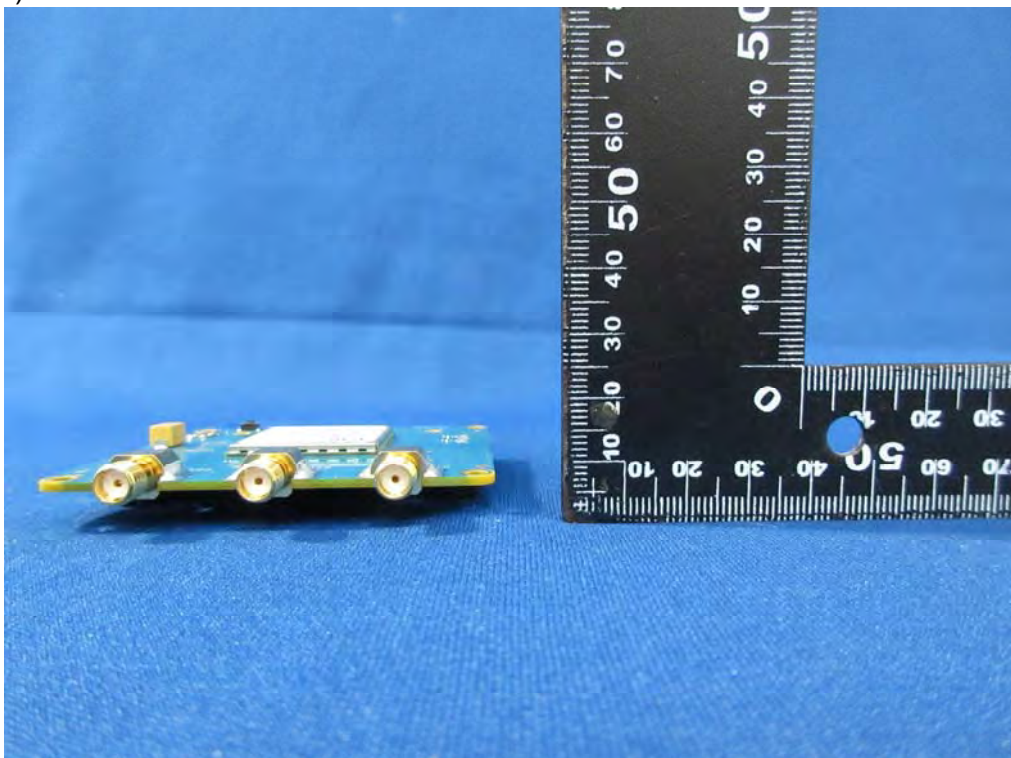

(11) EUT Photo

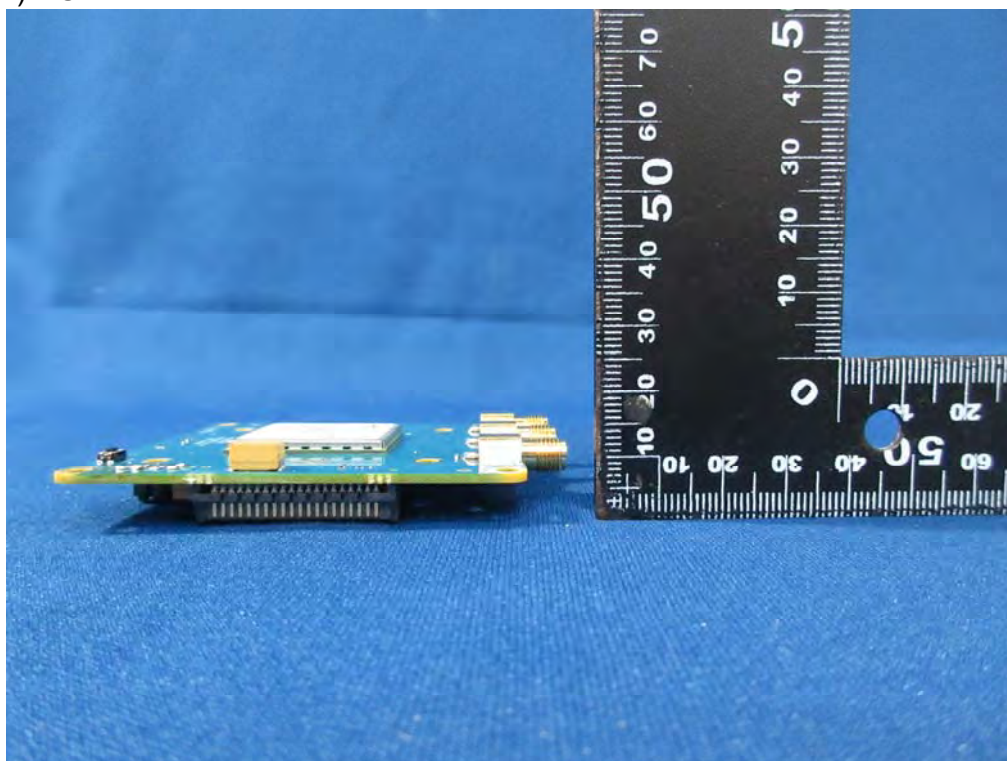

(12) EUT Photo

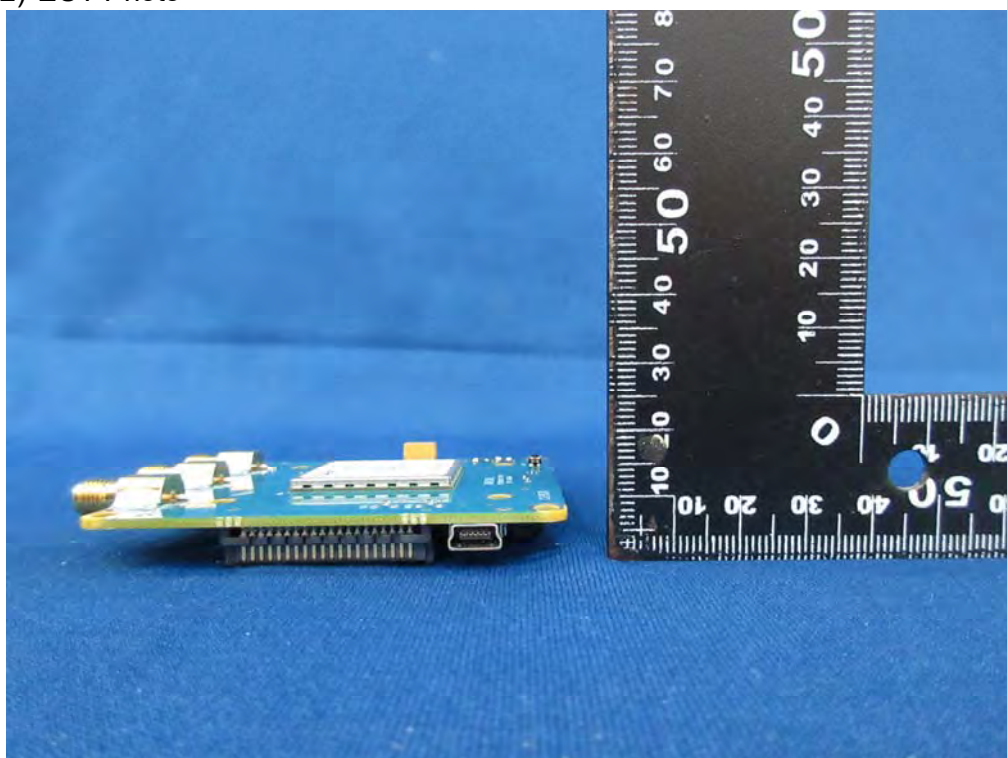


(13) EUT Photo




Attachment 3

➤ **EUT Internal Photograph**


(1) EUT Photo (LE910C1-LA)

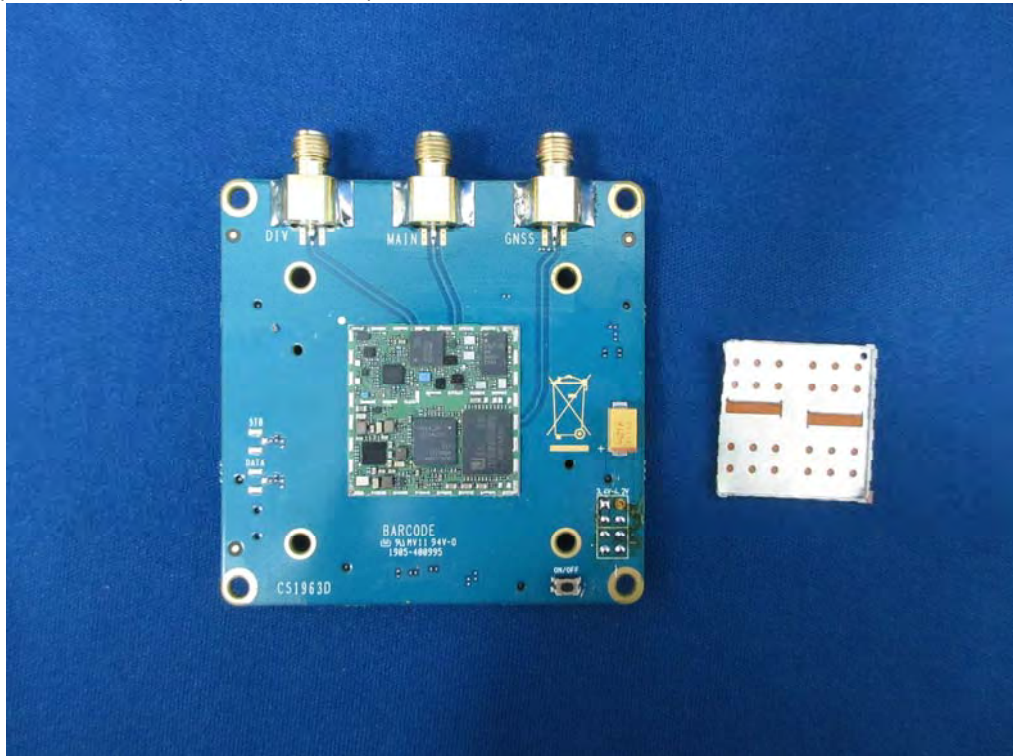

(2) EUT Photo

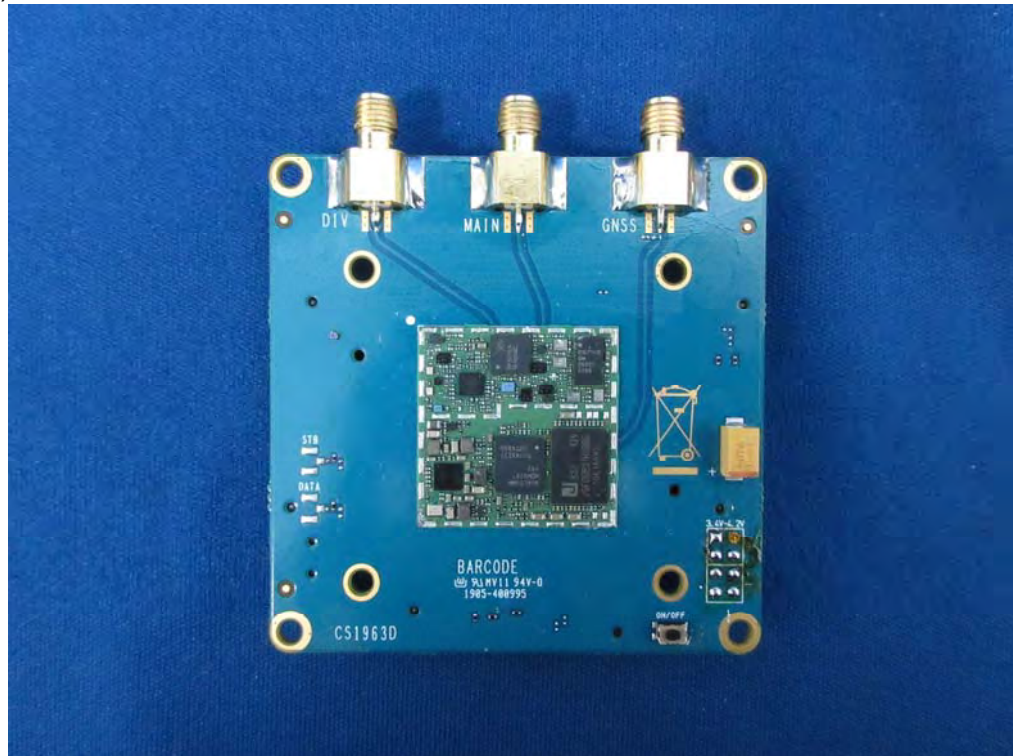


(3) EUT Photo

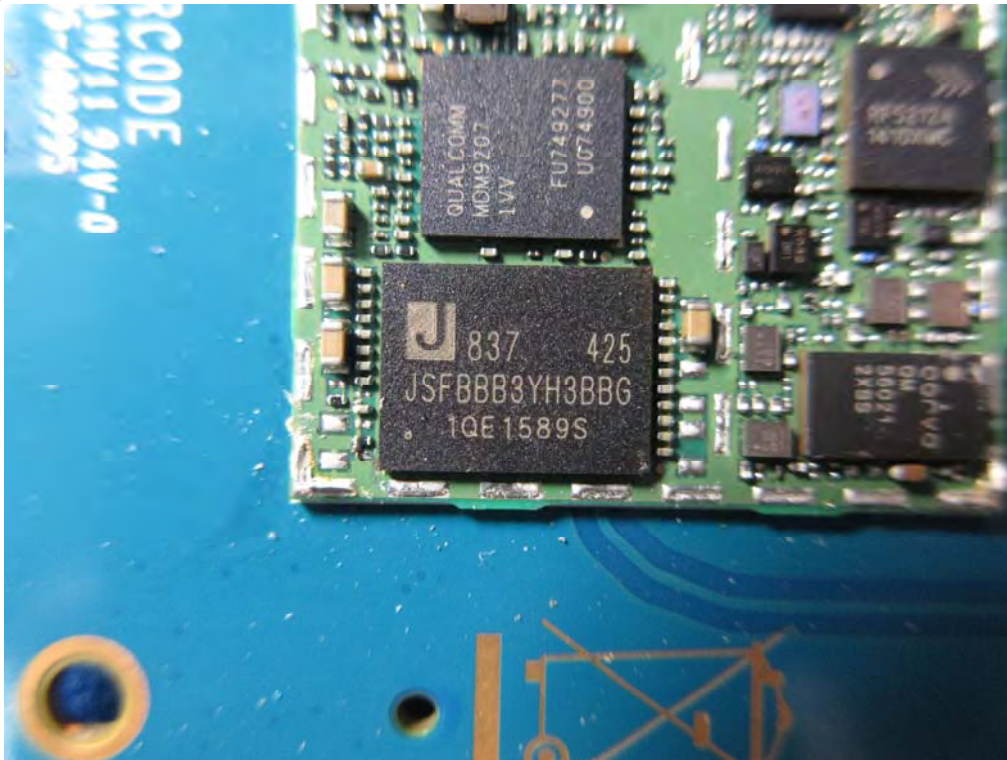


(4) EUT Photo




(5) EUT Photo

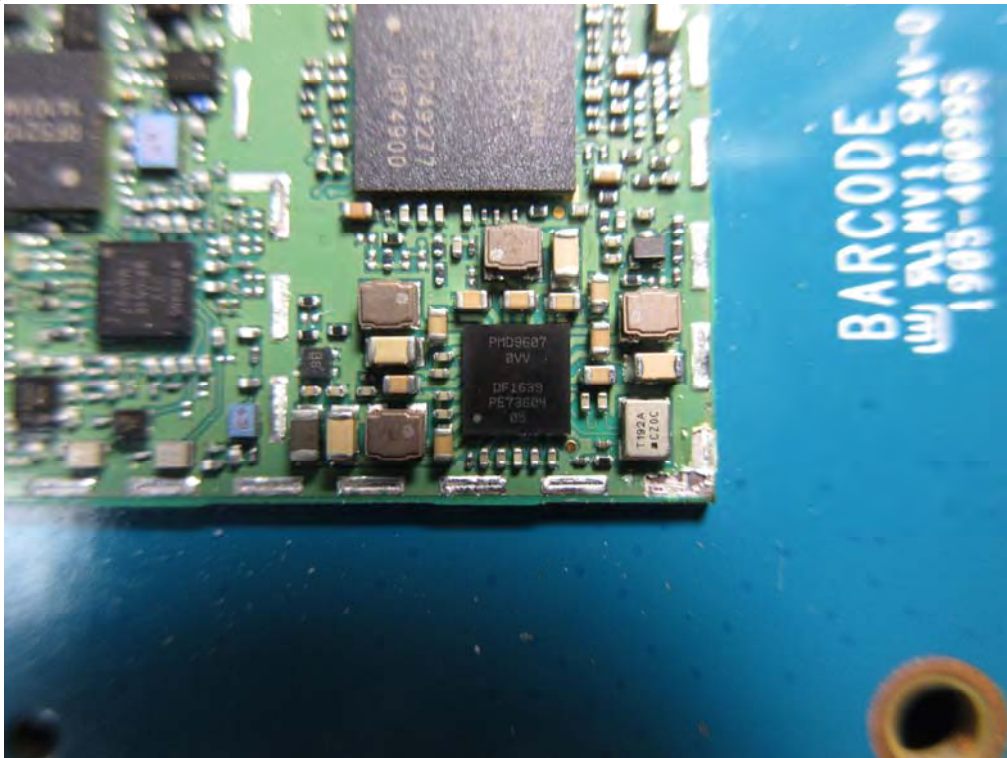


(6) EUT Photo

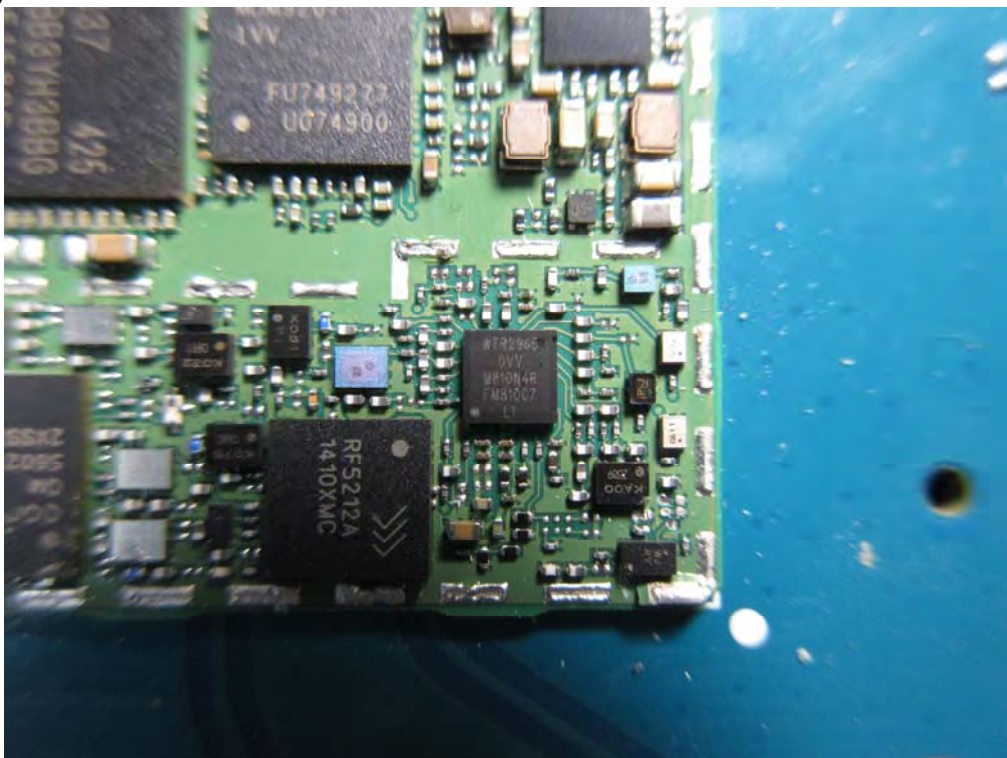


(7) EUT Photo

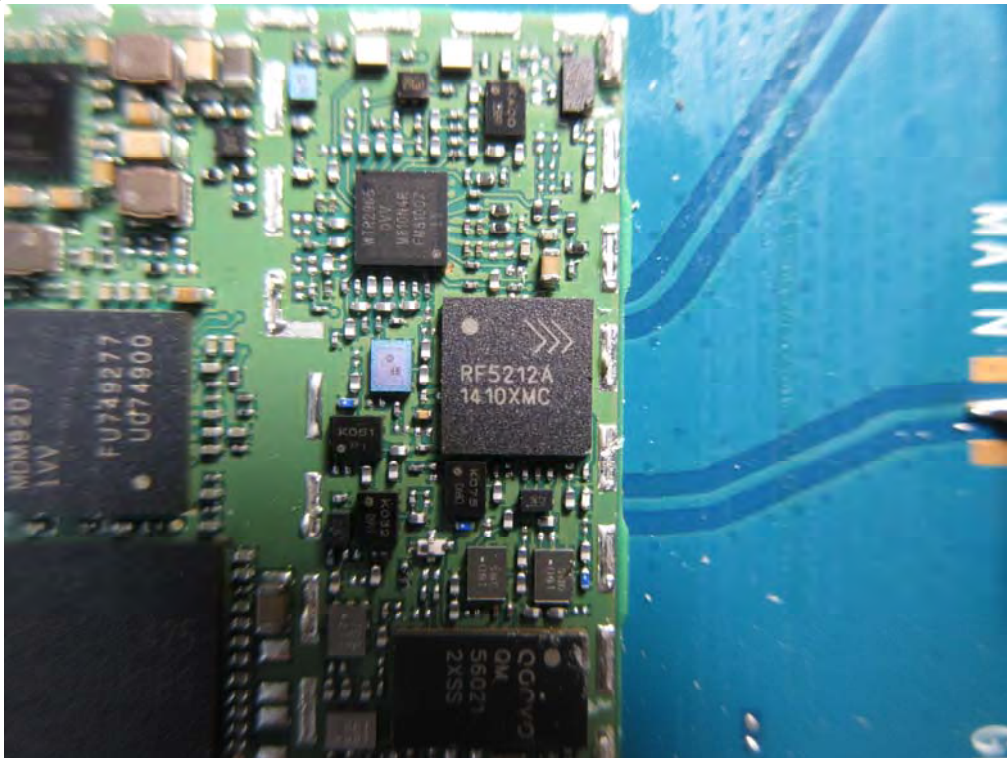


(8) EUT Photo

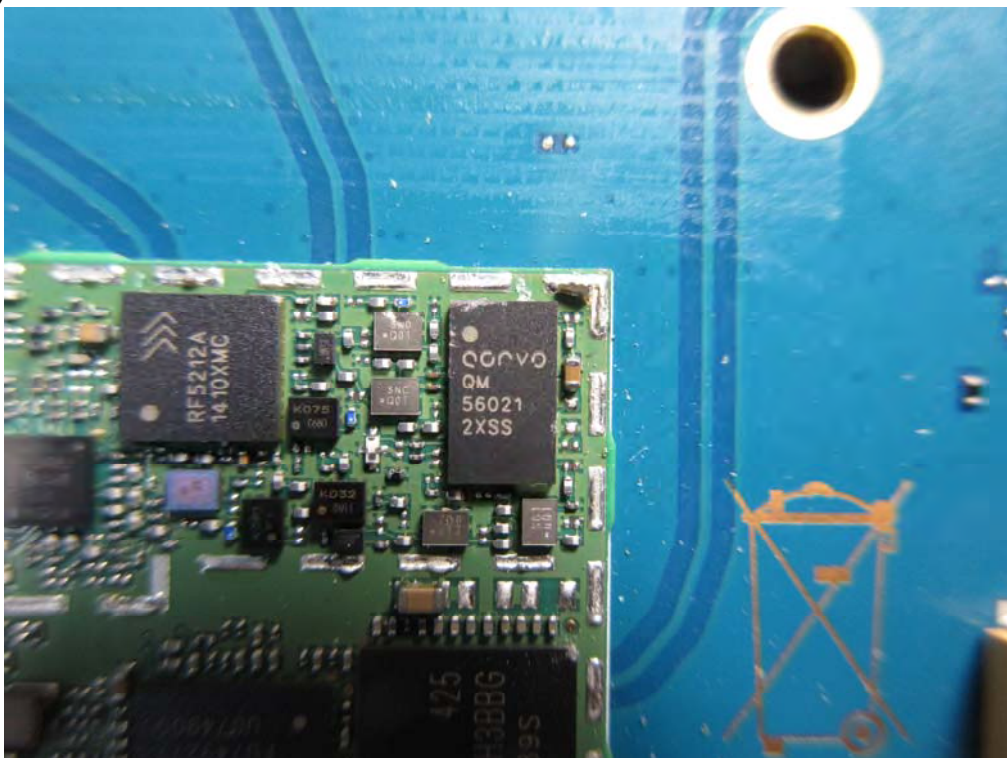


(9) EUT Photo

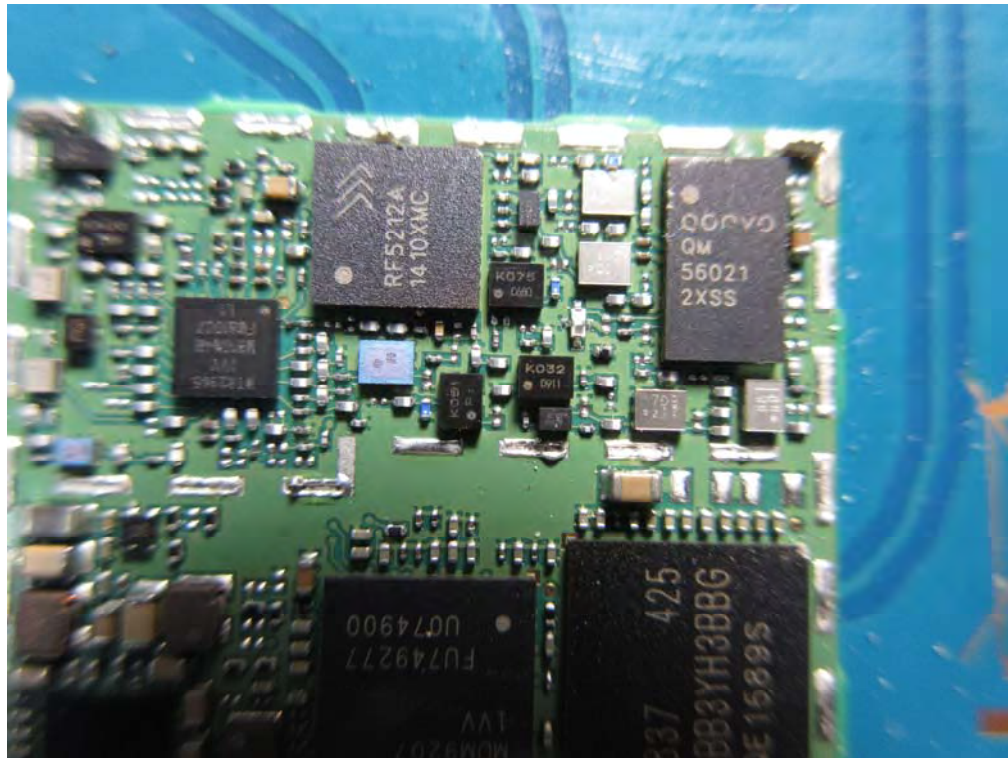

(10) EUT Photo (LE910C4-LA)

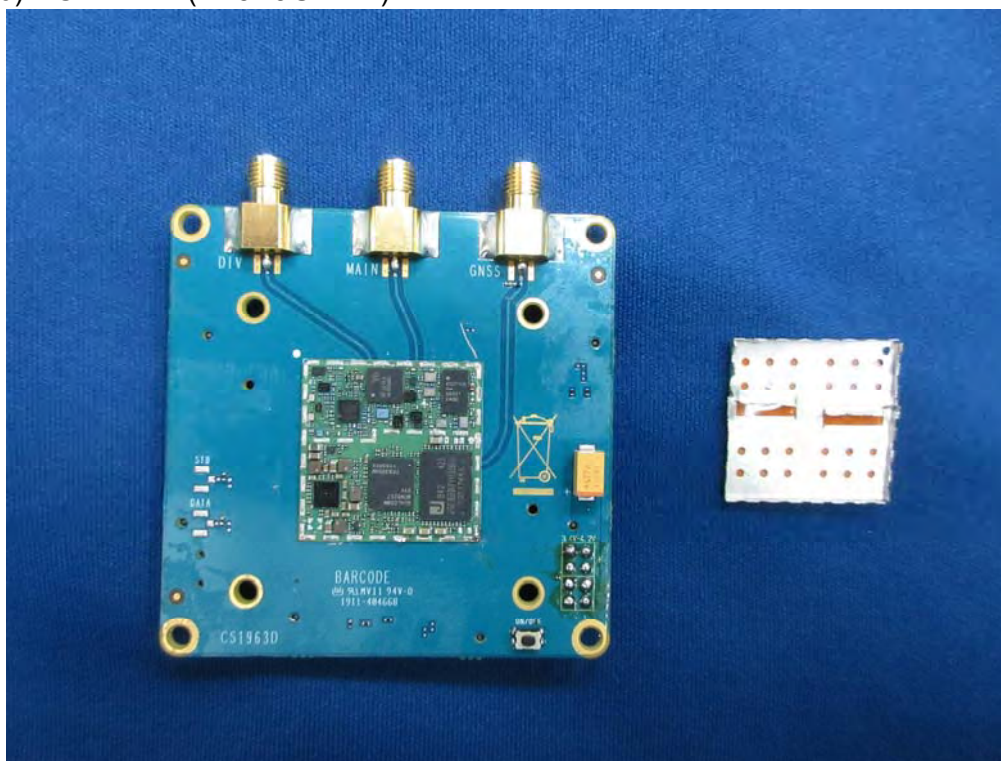


(11) EUT Photo

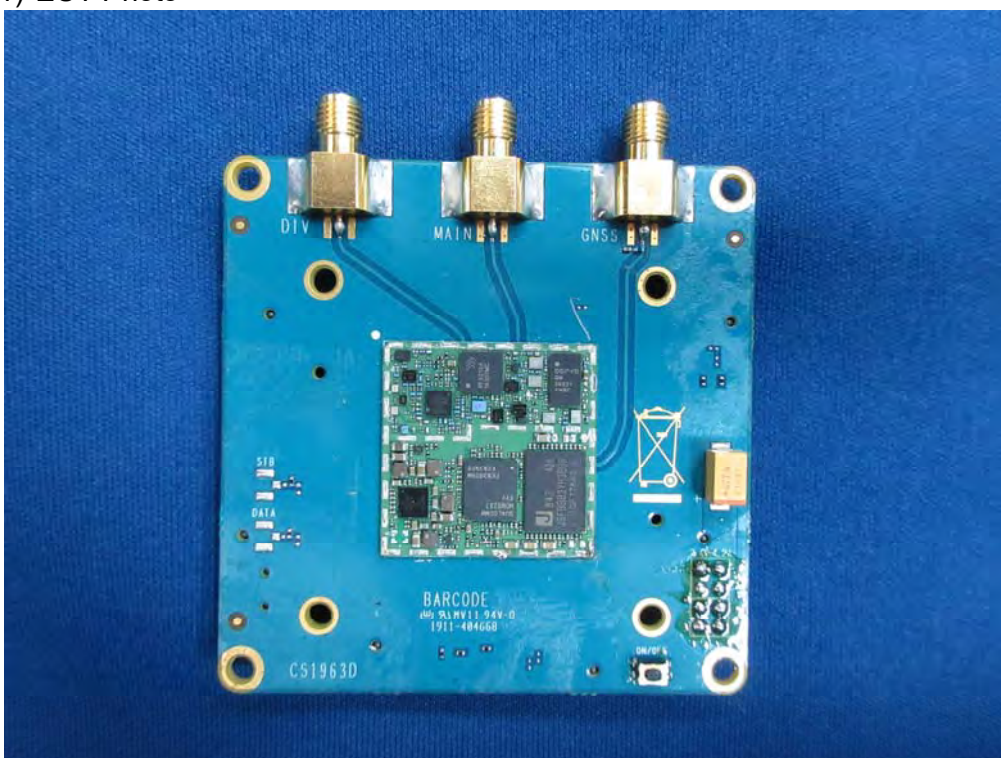


(12) EUT Photo




(13) EUT Photo

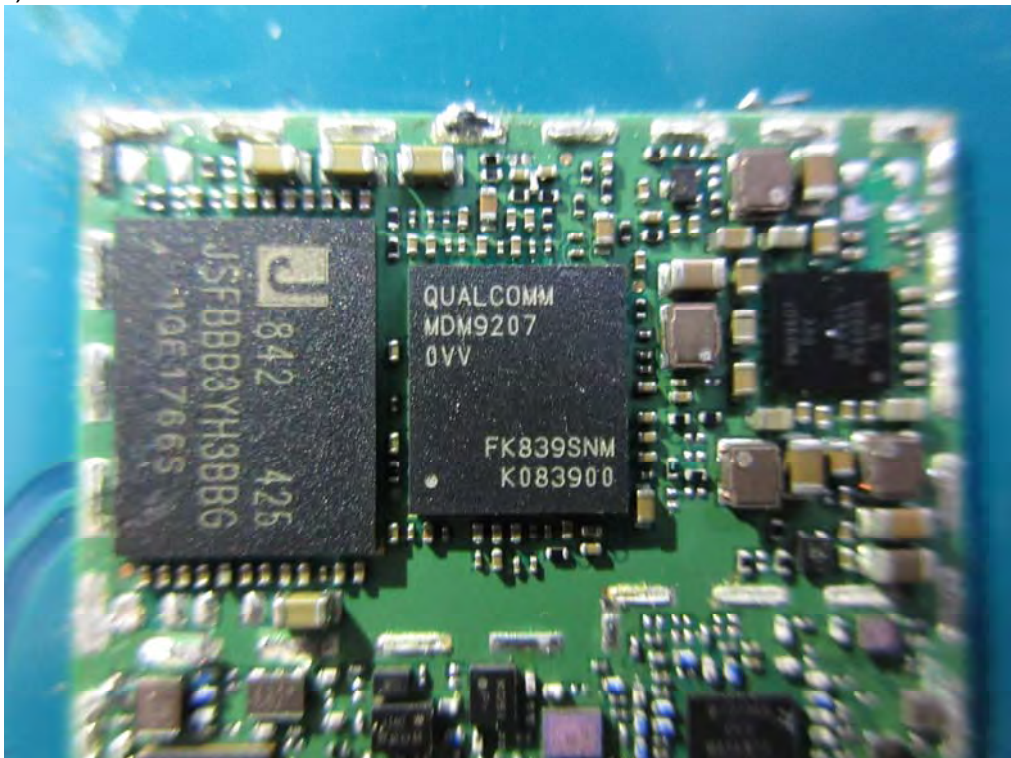


(14) EUT Photo

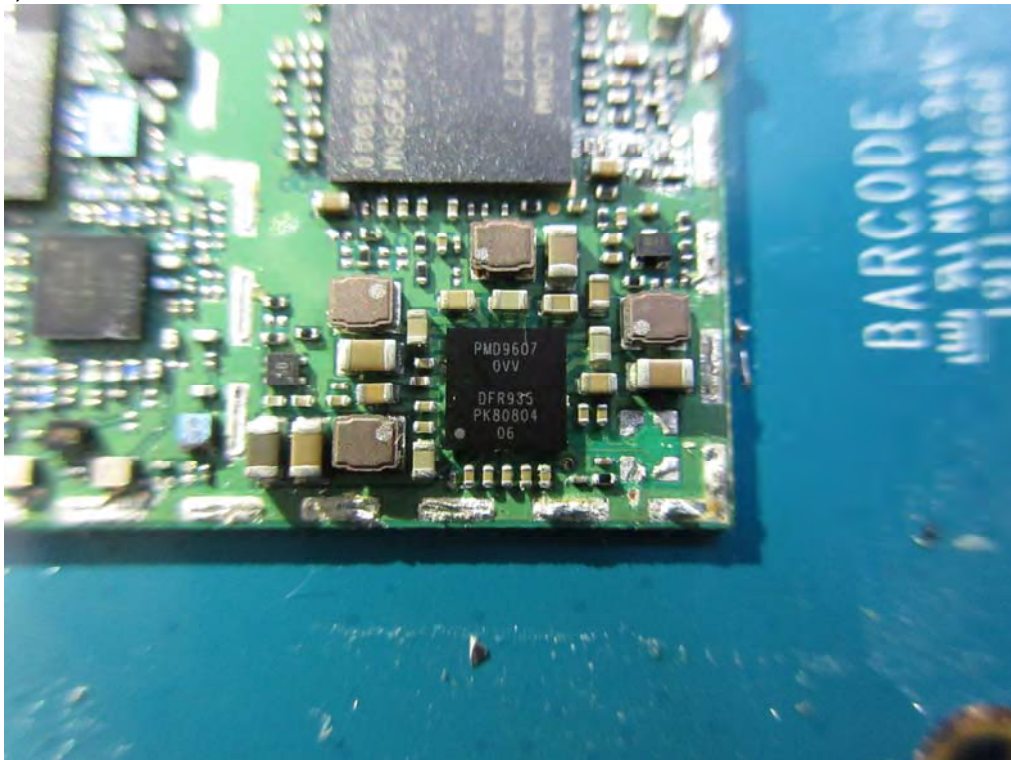


(15) EUT Photo

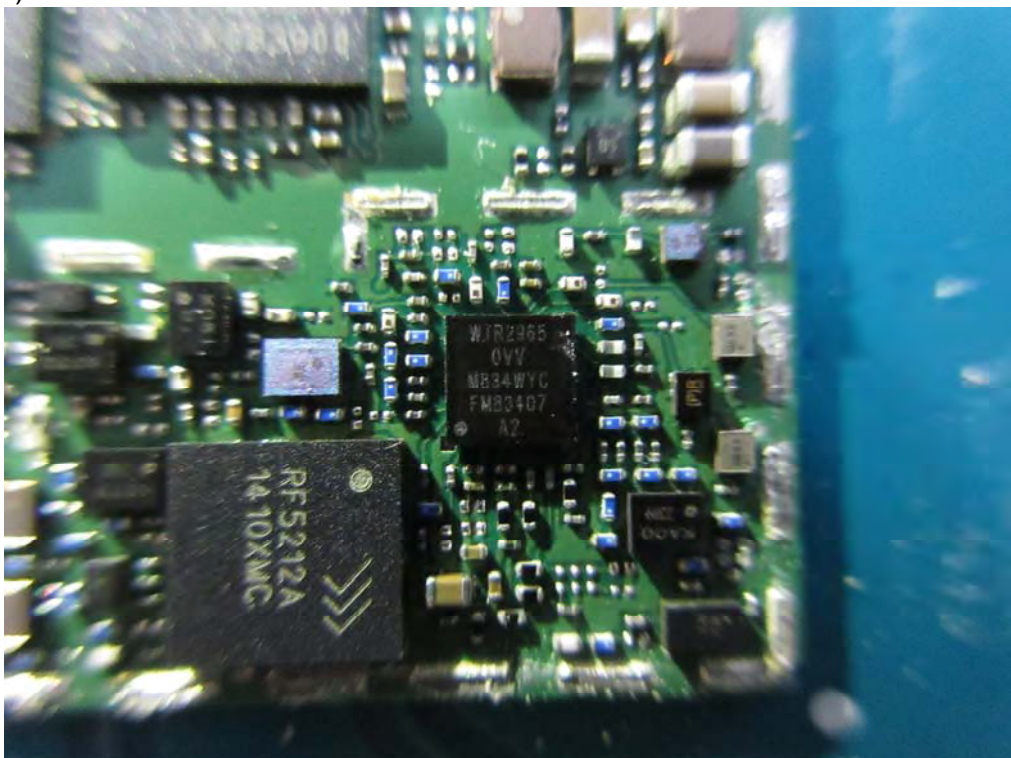


(16) EUT Photo

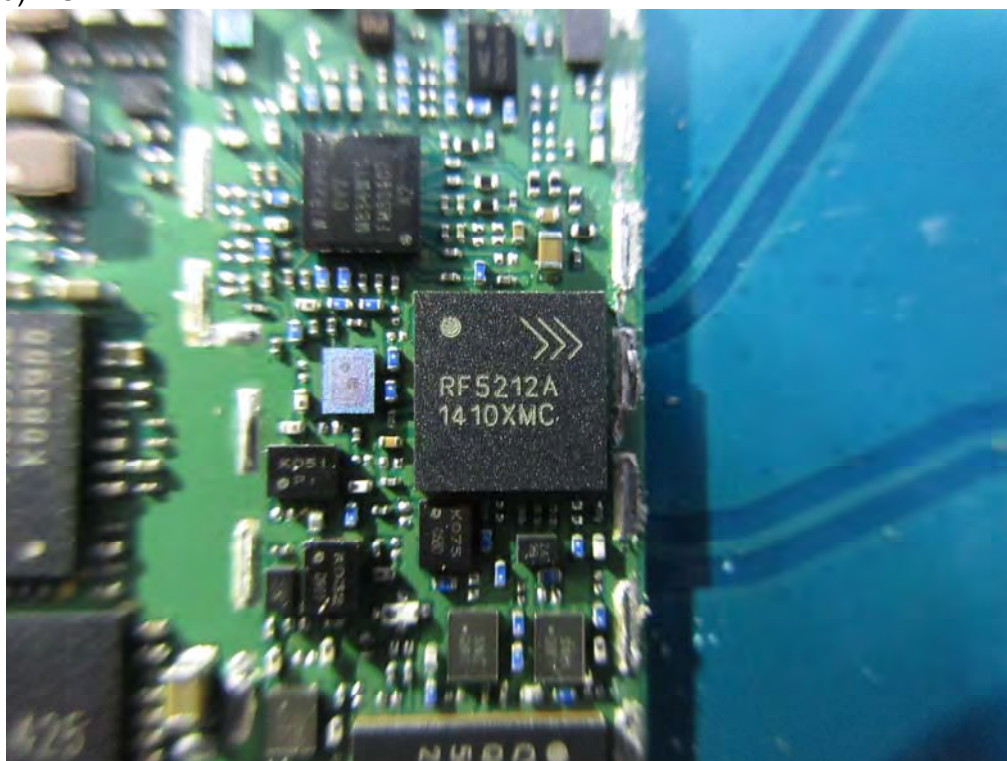

(17) EUT Photo

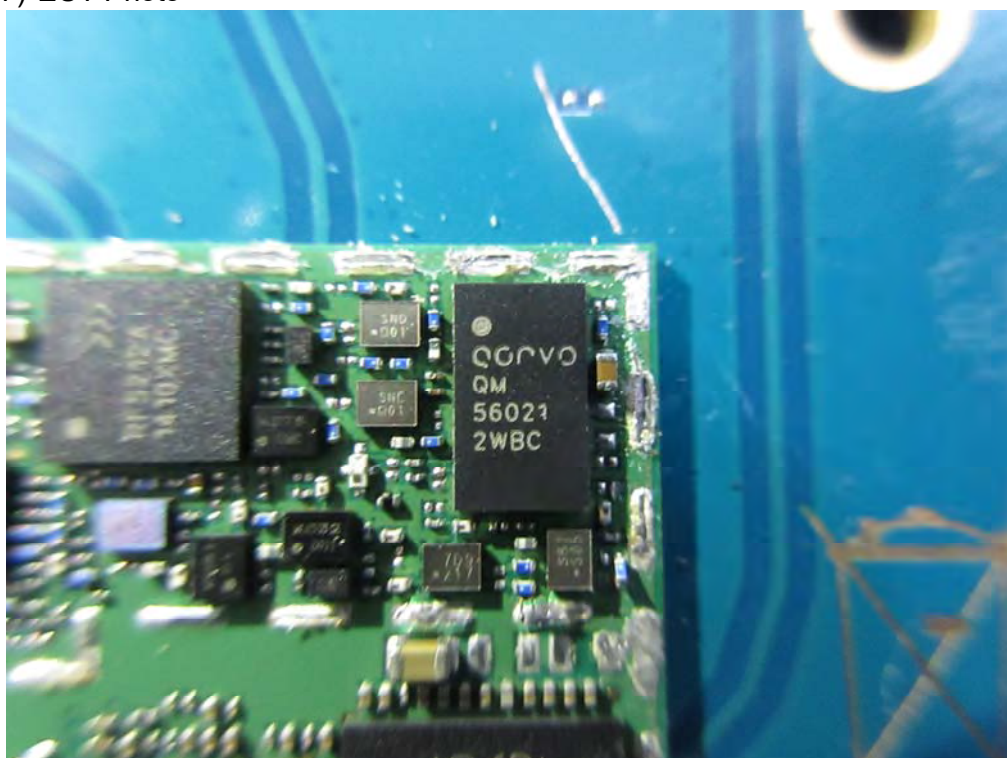

(18) EUT Photo

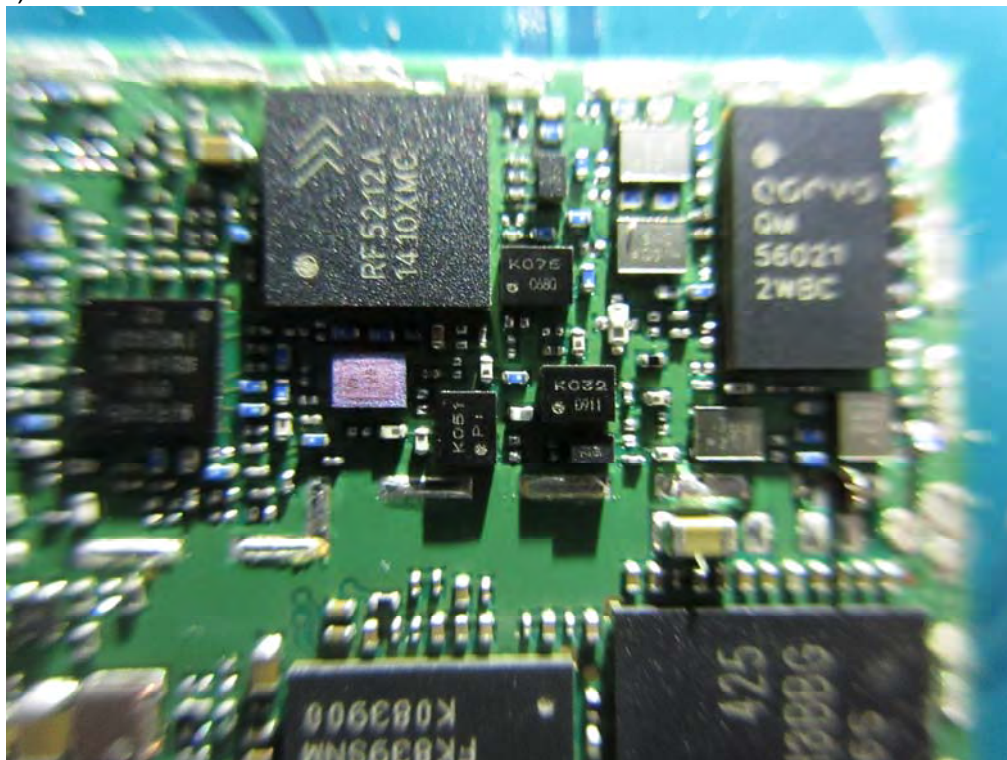

Attachment 4

➤ **Declaration**