FCC RF Test Report

APPLICANT : Telit Wireless Solutions Co., Ltd.

EQUIPMENT : LM940
BRAND NAME : Telit
MODEL NAME : LM940
FCC ID : RI7LM940

STANDARD : FCC 47 CFR Part 2, and 90(S)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on May. 02, 2017 and testing was completed on Jul. 04, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-D-2010 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 1 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Testing Laboratory 1190

Report No.: FW750208

Report Template No.: BU5-FWLTE Version 1.0

TABLE OF CONTENTS

RE	VISIC	ON HISTORY	3
SL	ММА	RY OF TEST RESULT	4
1	GEN	IERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	5
	1.3	Feature of Equipment Under Test	5
	1.4	Modification of EUT	5
	1.5	Testing Site	
	1.6	Applied Standards	6
2	TES	T CONFIGURATION OF EQUIPMENT UNDER TEST	7
	2.1	Test Mode	7
	2.2	Connection Diagram of Test System	8
	2.3	Support Unit used in test configuration and system	8
	2.4	Measurement Results Explanation Example	9
	2.5	Frequency List of Low/Middle/High Channels	9
3	TES	T RESULT	10
	3.1	Conducted Output Power Measurement	10
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.3	Emissions Mask Measurement	
	3.4	Emissions Mask – Out Of Band Emissions Measurement	
	3.5	Field Strength of Spurious Radiation Measurement	
	3.6	Frequency Stability Measurement	17
4	LIST	OF MEASURING EQUIPMENT	19
5	UNC	ERTAINTY OF EVALUATION	20
AF	PEND	DIX A. TEST RESULTS OF CONDUCTED TEST	
ΑF	PEND	DIX B. TEST RESULTS OF RADIATED TEST	
			
AF	PEND	DIX C. TEST SETUP PHOTOGRAPHS	

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 2 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW750208	Rev. 01	Initial issue of report	Jul. 14, 2017

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 3 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 45.39 dB at 3273.000 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 4 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

1 General Description

1.1 Applicant

Telit Wireless Solutions Co., Ltd.

13th Fl. Shinyoung Securities Bldg., 6, Gukjegeumyung-ro 8-gil, Seoul, 07330, South Korea

1.2 Manufacturer

Telit Wireless Solutions Co., Ltd.

13th Fl. Shinyoung Securities Bldg., 6, Gukjegeumyung-ro 8-gil, Seoul, 07330, South Korea

1.3 Feature of Equipment Under Test

WCDMA/LTE and GPS.

Product Specification subjective to this standard					
Antonno Typo	WWAN: Fixed External Antenna				
Antenna Type	GPS / Glonass : Passive or Active patch				

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

SPORTON INTERNATIOINAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 5 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

1.5 Testing Site

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.				
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,				
Took Cita Lagation	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.				
Test Site Location	TEL: +886-3-327-3456				
	FAX: +886-3-328-4978				
Took Site No	Sporton Site No.				
Test Site No.	TH05-HY				

Test Site	SPORTON INTERNATIONAL INC.				
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855				
Test Site No.	Sporton Site No. 03CH13-HY				

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 90
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIOINAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 6 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.


Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

			Bandwidth (MHz)			Modulation		RB#		Test Channel						
Test Items	Band	1.4	3	5	10	15	20	QP SK	16Q AM	64Q AM	1	Half	Full	L	М	Н
Max. Output Power	26	٧	v	v	v	v	•	v	v	v	v	٧	v	٧	v	v
26dB and 99% Bandwidth	26	v	v	v	v	٧	•	v	v	v			٧	٧	v	v
Emission masks In-band emissions	26	v	v	v	v	>	•	>	v	v	v		>	٧		v
Emission masks – Out of band emissions	26	v	v	v	v	v		v	v	v	v			v	v	v
Frequency Stability	26				v	v		v					v		v	
E.R.P.	26					٧	-	٧	٧	٧	v			٧		
Radiated Spurious Emission	26	v	v	v	v	٧	•	٧			v			٧	v	v
Note	The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "v" means that this configuration is chosen for testing The mark "v" means that this configuration is chosen for testing The mark "v" means that this configuration is chosen for testing The mark "v" means that this configuration is chosen for testing The mark "v" means that this configuration is chosen for testing The mark "-" means that this configuration is chosen for testing The mark "v" means that this configuration is chosen for testing The mark "v" means that this configuration is chosen for testing The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this configuration is chosen for testing The mark "-" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwidth is not supported. The mark "-" means that this bandwid															

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 7 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

2.2 Connection Diagram of Test System

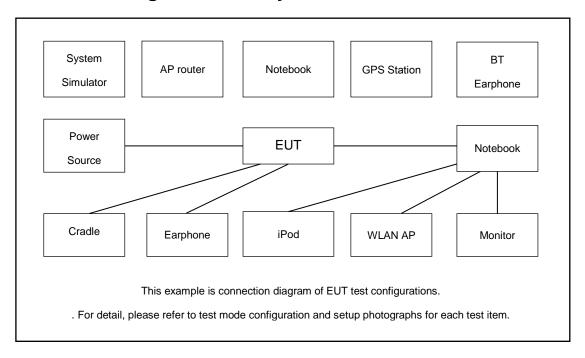

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WWAN Antenna	N/A	WE14-LF-07	N/A	N/A	N/A
	Programmable	TOPWARD	3303D	N/A	N/A	N/A
3.	Power Supply	TOPWARD	3303D	IN/A	IN/A	IN/A
4.	Fixture	N/A	N/A	N/A	N/A	N/A

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 8 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

Offset(dB) = RF cable loss(dB) + attenuator factor(dB). = 4.2 + 10 = 14.2 (dB)

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List								
BW [MHz]	Channel/Frequency(MHz)	Channel/Frequency(MHz) Lowest Middle						
15	Channel	26765	-	-				
15	Frequency	821.5	-	-				
10	Channel	-	26740	-				
10	Frequency	-	819	-				
5	Channel	26715	26740	26765				
5	Frequency	816.5	819	821.5				
3	Channel	26705	26740	26775				
3	Frequency	815.5	819	822.5				
1.4	Channel	26697	26740	26783				
1.4	Frequency	814.7	819	823.3				

SPORTON INTERNATIOINAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 9 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report No.: FW750208

Report Template No.: BU5-FWLTE Version 1.0

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 10 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

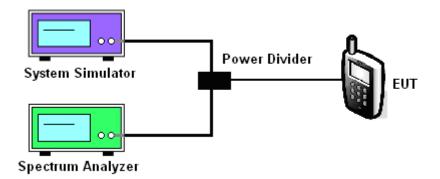

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 11 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report No.: FW750208

Report Template No.: BU5-FWLTE Version 1.0

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 $\log_{10}(f/6.1)$ decibels or 50 + 10 $\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 12 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report No. : FW750208

Report Template No.: BU5-FWLTE Version 1.0

3.3.4 Test Setup

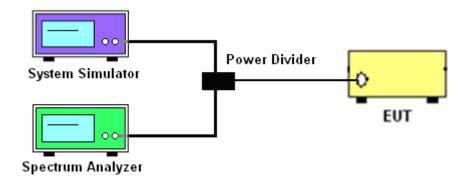

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 13 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

3.4 Emissions Mask - Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

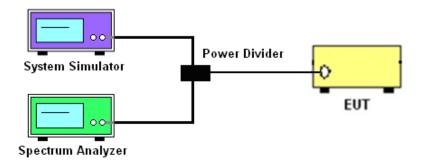

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 14 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43+10log₁₀(P[Watts]) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

3.5.4 Test Setup

For radiated test from 30MHz to 1GHz

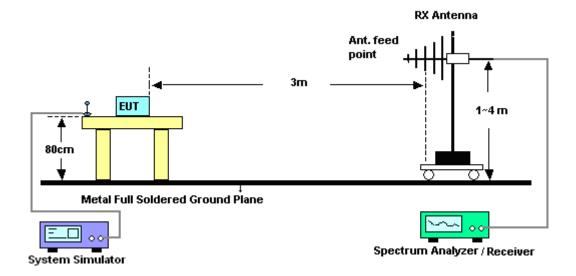

For radiated test above 1GHz

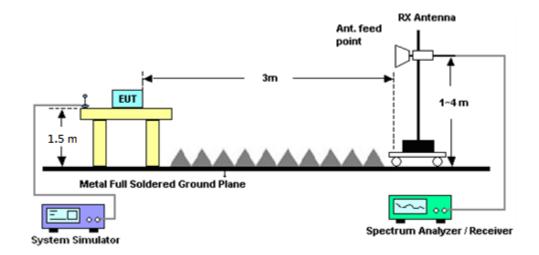

3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 16 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report No. : FW750208

Report Template No.: BU5-FWLTE Version 1.0

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.


3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the base station.
- 2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 17 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

3.6.5 Test Setup

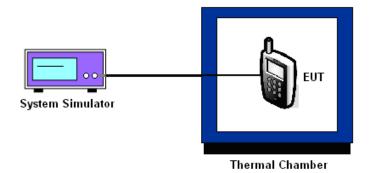

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 18 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS /WCDMA/LTE	Oct. 11, 2016	May 02, 2017~ Jul. 02, 2017	Oct. 10, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 04, 2016	May 02, 2017~ Jul. 02, 2017	Nov. 03, 2017	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-30°C~70°C	Sep. 01, 2016	May 02, 2017~ Jul. 02, 2017	Aug. 31, 2017	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~5A	Oct. 03, 2016	May 02, 2017~ Jul. 02, 2017	Oct. 02, 2017	Conducted (TH05-HY)
Coupler	Warison	1-18GHz 20d B 25WSMA	#B	1G~18GHz	Feb. 20, 2017	May 02, 2017~ Jul. 02, 2017	Feb. 19, 2018	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800	40103&04	30MHz to 1GHz	Jan. 07, 2017	Jun. 23, 2017 ~ Jul. 04, 2017	Jan. 06, 2018	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 17, 2017	Jun. 23, 2017 ~ Jul. 04, 2017	Mar. 16, 2018	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1620	1G~18GHz	Sep. 30, 2016	Jun. 23, 2017 ~ Jul. 04, 2017	Sep. 29, 2017	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 08, 2016	Jun. 23, 2017 ~ Jul. 04, 2017	Nov. 07, 2017	Radiation (03CH13-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 04, 2017	Jun. 23, 2017 ~ Jul. 04, 2017	Jan. 03, 2018	Radiation (03CH13-HY)
Amplifier	Sonoma-Instrum ent	310 N	187282	9KHz~1GHz	Dec. 21, 2016	Jun. 23, 2017 ~ Jul. 04, 2017	Dec. 20, 2017	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 22, 2017	Jun. 23, 2017~ Jul. 04, 2017	May 21, 2018	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Jan. 09, 2017	Jun. 23, 2017 ~ Jul. 04, 2017	Jan. 08, 2018	Radiation (03CH13-HY)
Preamplifier	MITEQ	TTA 1840-35-HG	1887435	18GHz ~ 40GHz	Oct. 13, 2016	Jun. 23, 2017 ~ Jul. 04, 2017	Oct. 12, 2017	Radiation (03CH13-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	N/A	Mar. 03, 2017	Jun. 23, 2017 ~ Jul. 04, 2017	Mar. 02, 2018	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	N/A	Mar. 15, 2017	Jun. 23, 2017 ~ Jul. 04, 2017	Mar. 14, 2018	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Jun. 23, 2017 ~ Jul. 04, 2017	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jun. 23, 2017 ~ Jul. 04, 2017	N/A	Radiation (03CH13-HY)

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 19 of 20
Report Issued Date : Jul. 14, 2017
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.07
Confidence of 95% (U = 2Uc(y))	5.5.

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	3.48
Confidence of 95% (U = 2Uc(y))	3.46

<u>Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)</u>

Measuring Uncertainty for a Level of	2.02
Confidence of 95% (U = 2Uc(y))	3.92

SPORTON INTERNATIOINAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: RI7LM940 Page Number : 20 of 20 Report Issued Date : Jul. 14, 2017 Report Version : Rev. 01


Report Template No.: BU5-FWLTE Version 1.0



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest			
15	1	0		22.42	-	-			
15	1	37		22.52	ı	-			
15	1	74		22.26	-	-			
15	36	0	QPSK	21.60	ı	-			
15	36	20		21.65	ı	-			
15	36	39		21.51	-	-			
15	75	0		21.63	-	-			
15	1	0		21.71	•	-			
15	1	37		21.70	-	-			
15	1	74		21.60	•	-			
15	36	0	16-QAM	20.53	-	-			
15	36	20		20.62	•	-			
15	36	39		20.52	-	-			
15	75	0		20.59	-	-			
15	1	0		20.30	-	-			
15	1	37		20.44	-	-			
15	1	74		20.20	-	-			
15	36	0	64-QAM	19.33	-	-			
15	36	20		19.39	-	-			
15	36	39		19.24	-	-			
15	75	0		19.28	-	-			
10	1	0		-	22.33	-			
10	1	25		-	22.27	-			
10	1	49		-	22.43	-			
10	25	0	QPSK	-	21.46	-			
10	25	12		-	21.44	-			
10	25	25		-	21.47	-			
10	50	0		-	21.49	-			
10	1	0		-	21.68	-			
10	1	25		-	21.59	-			
10	1	49		-	21.80	-			
10	25	0	16-QAM	-	20.45	-			
10	25	12		-	20.45	-			
10	25	25		-	20.51	-			
10	50	0		-	20.42	-			
10	1	0		-	20.37	-			
10	1	25		-	20.30	-			
10	1	49		-	20.32	-			
10	25	0	64-QAM	-	19.29	-			
10	25	12		-	19.31	-			
10	25	25		-	19.29	-			
10	50	0		-	19.25	-			



LTE Band 26 Maximum Average Power [dBm]								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
5	1	0		22.41	22.35	22.35		
5	1	12		22.31	22.23	22.29		
5	1	24		22.41	22.35	22.18		
5	12	0	QPSK	21.53	21.46	21.45		
5	12	7		21.55	21.40	21.48		
5	12	13		21.44	21.40	21.42		
5	25	0		21.52	21.36	21.45		
5	1	0		21.84	21.63	21.63		
5	1	12		21.67	21.56	21.64		
5	1	24		21.70	21.64	21.60		
5	12	0	16-QAM	20.50	20.44	20.44		
5	12	7		20.50	20.36	20.41		
5	12	13		20.48	20.37	20.37		
5	25	0		20.52	20.38	20.55		
5	1	0		20.51	20.39	20.41		
5	1	12		20.40	20.18	20.30		
5	1	24		20.35	20.38	20.47		
5	12	0	64-QAM	19.52	19.37	19.35		
5	12	7		19.43	19.31	19.38		
5	12	13		19.38	19.30	19.34		
5	25	0		19.32	19.23	19.32		
3	1	0		22.39	22.36	22.34		
3	1	8		22.37	22.27	22.30		
3	1	14		22.39	22.28	22.19		
3	8	0	QPSK	21.48	21.41	21.41		
3	8	4		21.54	21.37	21.44		
3	8	7		21.52	21.32	21.44		
3	15	0		21.52	21.34	21.40		
3	1	0		21.66	21.61	21.63		
3	1	8		21.65	21.58	21.59		
3	1	14		21.80	21.60	21.52		
3	8	0	16-QAM	20.57	20.49	20.50		
3	8	4		20.63	20.48	20.55		
3	8	7		20.62	20.53	20.54		
3	15	0		20.58	20.39	20.48		
3	1	0		20.49	20.37	20.38		
3	1	8		20.43	20.26	20.34		
3	1	14		20.40	20.28	20.36		
3	8	0	64-QAM	19.37	19.30	19.32		
3	8	4		19.39	19.29	19.36		
3	8	7		19.36	19.29	19.32		
3	15	0		19.35	19.23	19.32		

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
1.4	1	0		22.41	22.31	22.18				
1.4	1	3		22.43	22.25	22.27				
1.4	1	5		22.28	22.22	22.33				
1.4	3	0	QPSK	22.46	22.38	22.33				
1.4	3	1		22.52	22.30	22.37				
1.4	3	3		22.43	22.34	22.39				
1.4	6	0		21.49	21.30	21.36				
1.4	1	0		21.73	21.59	21.53				
1.4	1	3		21.78	21.62	21.60				
1.4	1	5		21.57	21.46	21.59				
1.4	3	0	16-QAM	21.57	21.39	21.34				
1.4	3	1		21.58	21.35	21.38				
1.4	3	3		21.52	21.41	21.40				
1.4	6	0		20.53	20.33	20.38				
1.4	1	0		20.38	20.27	20.28				
1.4	1	3		20.41	20.25	20.29				
1.4	1	5		20.35	20.20	20.24				
1.4	3	0	64-QAM	20.44	20.32	20.37				
1.4	3	1		20.48	20.26	20.43				
1.4	3	3		20.45	20.25	20.32				
1.4	6	0		19.23	19.10	19.21				



	α .	4.
/H^*	Sprin	+∕
	20171111	

LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest			
15	1	0		22.35	-	-			
15	1	37		22.25	-	-			
15	1	74		22.08	-	-			
15	36	0	QPSK	21.79	-	-			
15	36	20		21.54	-	-			
15	36	39		21.36	-	-			
15	75	0		21.53	-	-			
15	1	0		21.31	-	-			
15	1	37		21.19	-	-			
15	1	74		21.15	-	-			
15	36	0	16-QAM	20.07	-	-			
15	36	20		20.40	-	-			
15	36	39		20.30	-	-			
15	75	0		20.59	-	-			
15	1	0		21.64	-	-			
15	1	37		21.33	-	-			
15	1	74		21.57	-	-			
15	36	0	64-QAM	20.84	-	-			
15	36	20		20.50	-	-			
15	36	39		20.38	-	-			
15	75	0		20.39	-	-			
10	1	0		-	22.37	-			
10	1	25		-	22.22	-			
10	1	49		-	22.29	-			
10	25	0	QPSK	-	21.38	-			
10	25	12		-	21.38	-			
10	25	25		-	21.35	-			
10	50	0		-	21.32	-			
10	1	0		-	21.93	-			
10	1	25	_	-	21.74	-			
10	1	49	_	-	21.75	-			
10	25	0	16-QAM	-	20.36	-			
10	25	12	_	-	20.49	-			
10	25	25		-	20.36	-			
10	50	0		-	20.43	-			
10	1	0		-	21.84	-			
10	1	25		-	21.73	-			
10	<u>·</u> 1	49		-	21.73	-			
10	25	0	64-QAM	-	20.39	_			
10	25	12		-	20.36				
10	25	25		-	20.34	_			
10	50	0		-	20.37	-			

LTE Band 26 Maximum Average Power [dBm]								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
5	1	0		22.94	22.44	22.35		
5	1	12		22.65	22.25	22.20		
5	1	24		22.40	22.26	21.95		
5	12	0	QPSK	21.40	21.25	21.35		
5	12	7		21.76	21.36	21.59		
5	12	13		21.49	21.29	21.36		
5	25	0		21.49	21.30	21.39		
5	1	0		22.23	21.66	21.71		
5	1	12		21.44	21.59	22.02		
5	1	24		21.75	21.63	22.14		
5	12	0	16-QAM	20.44	20.39	20.07		
5	12	7		20.12	20.36	20.11		
5	12	13		20.34	20.22	20.36		
5	25	0		20.45	20.24	20.44		
5	1	0		22.04	21.45	21.70		
5	1	12		21.95	21.37	21.48		
5	1	24		21.59	21.54	21.32		
5	12	0	64-QAM	20.41	20.35	20.62		
5	12	7		20.76	20.27	20.52		
5	12	13		20.41	20.28	20.37		
5	25	0		20.38	20.29	20.43		
3	1	0		22.19	22.36	22.29		
3	1	8		22.67	22.22	22.25		
3	1	14		22.31	22.20	21.92		
3	8	0	QPSK	21.46	21.35	21.37		
3	8	4		21.18	21.30	21.29		
3	8	7		21.69	21.33	21.12		
3	15	0		21.39	21.22	21.36		
3	1	0		21.87	21.38	21.31		
3	1	8		21.81	21.26	21.34		
3	1	14		21.42	21.29	21.81		
3	8	0	16-QAM	20.52	20.32	20.41		
3	8	4		20.84	20.28	20.50		
3	8	7		20.76	20.39	20.75		
3	15	0		20.41	20.17	20.44		
3	1	0		20.27	20.23	20.45		
3	1	8		20.29	20.23	20.38		
3	1	14		20.45	20.25	20.24		
3	8	0	64-QAM	19.49	19.41	19.58		
3	8	4		19.59	19.38	19.49		
3	8	7		19.83	19.42	19.74		
3	15	0		19.57	19.38	19.47		



	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
1.4	1	0		22.34	22.24	22.32				
1.4	1	3		22.27	22.06	22.15				
1.4	1	5	-	22.61	22.48	22.10				
1.4	3	0	QPSK	22.33	22.30	21.94				
1.4	3	1		22.31	22.06	22.22				
1.4	3	3		22.77	22.13	22.32				
1.4	6	0		21.35	21.22	21.20				
1.4	1	0		21.47	21.78	21.64				
1.4	1	3	16-QAM	21.60	21.28	21.29				
1.4	1	5		21.22	21.20	21.22				
1.4	3	0		21.45	21.41	21.06				
1.4	3	1		21.58	21.39	21.42				
1.4	3	3		21.90	21.24	21.20				
1.4	6	0		20.36	20.21	20.29				
1.4	1	0		20.54	20.42	20.78				
1.4	1	3		20.53	20.49	20.51				
1.4	1	5		20.48	20.26	20.37				
1.4	3	0	64-QAM	20.58	20.51	20.80				
1.4	3	1		20.57	20.37	20.62				
1.4	3	3		20.44	20.25	20.30				
1.4	6	0		19.26	19.28	19.06				


LTE Band 26_Part 90S

Peak-to-Average Ratio


Mode						
Mod.	QP	SK	160	16QAM		
RB Size	1RB	Full RB	1RB	Full RB	Result	
Lowest CH	-	-	-	-		
Middle CH	4.14	4.64	4.55	5.54	PASS	
Highest CH	-	-	-	-		
Mode		LTE Band	26 / 10MHz			
Mod.	64C	AM			Limit: 13dB	
RB Size	1RB	Full RB			Result	
Lowest CH	-	-	-	-		
Middle CH	5.42	5.88	-	-	PASS	
Highest CH	-	-	-	-		

Report No. :FW750208

TEL: 886-3-327-3456 FAX: 886-3-328-4978

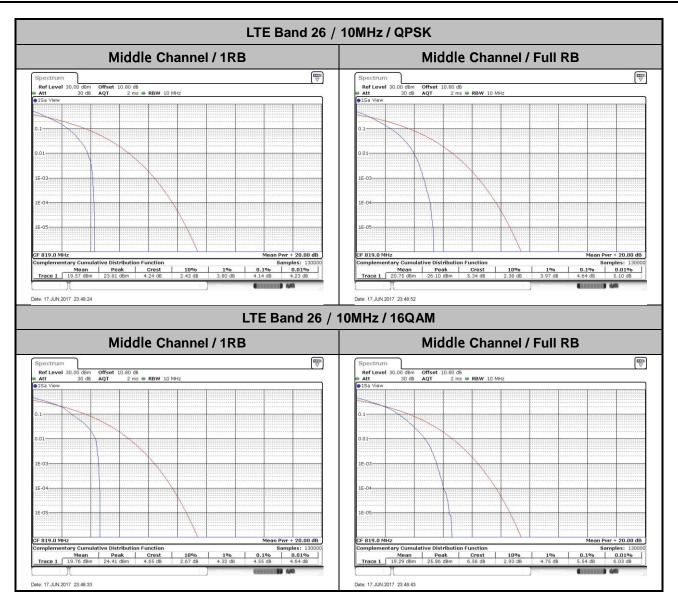

: A26S-2 of 48

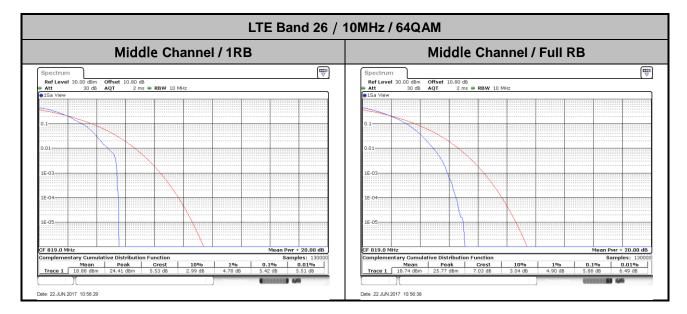



26dB Bandwidth

Mode		LTE Band 26 : 26dB BW(MHz)										
BW	1.4	ИНz	3M	Hz	5M	lHz	10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.24	1.24	3.04	3.06	4.99	4.87	-	-	14.39	14.24	-	-
Middle CH	1.25	1.23	3.02	3.00	4.89	4.96	9.79	9.89	-	-	-	-
Highest CH	1.23	1.23	3.00	3.02	4.96	4.96	-	-	-	-	-	-
Mode					LTE Ba	and 26 :	26dB BV	V(MHz)				
BW	1.4	ИHz	3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.23	-	2.98	-	4.93	-	-	-	14.33	-	-	-
Middle CH	1.23	-	3.02	-	4.87	-	9.77	-	-	-	-	-
Highest CH	1.22	-	3.01	ı	4.91	-	1	-	ı	-	-	-


Report No. :FW750208

TEL: 886-3-327-3456 FAX: 886-3-328-4978



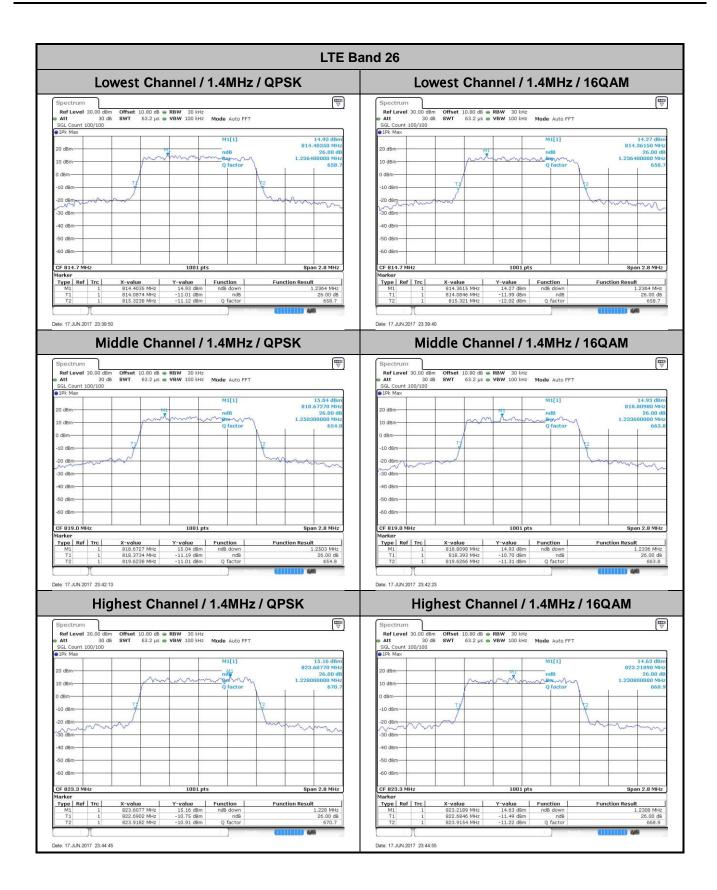


: A26S-5 of 48

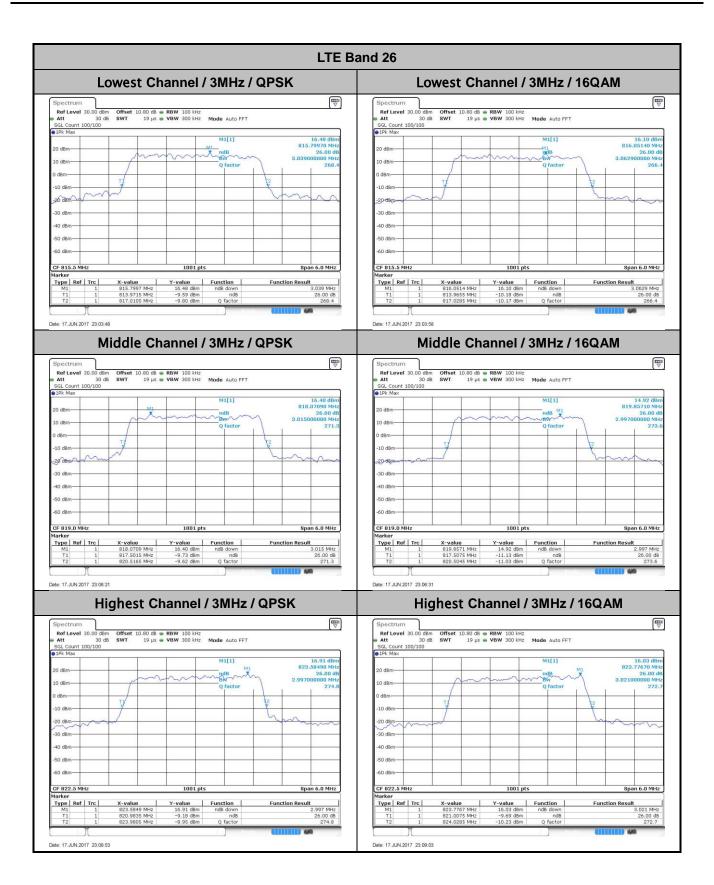



: A26S-6 of 48



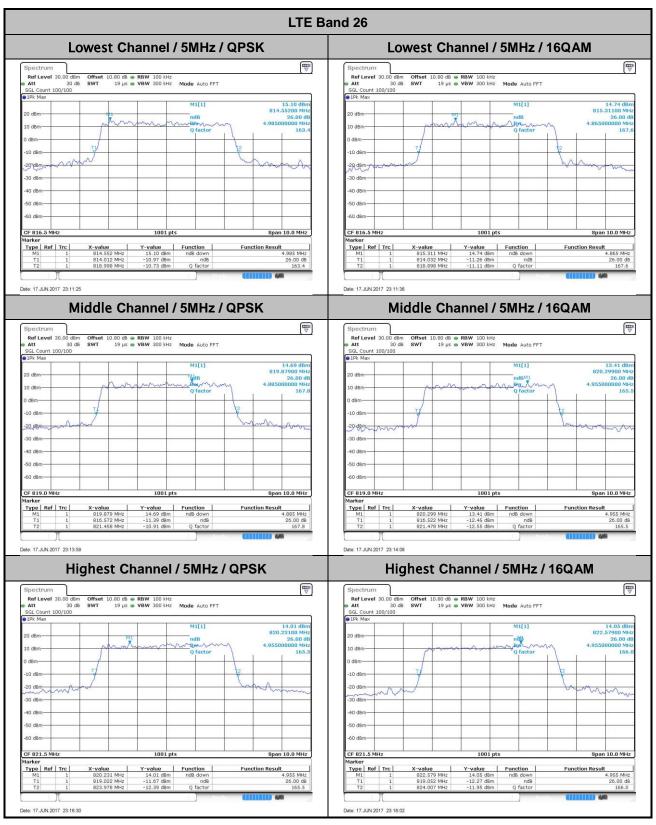


: A26S-7 of 48



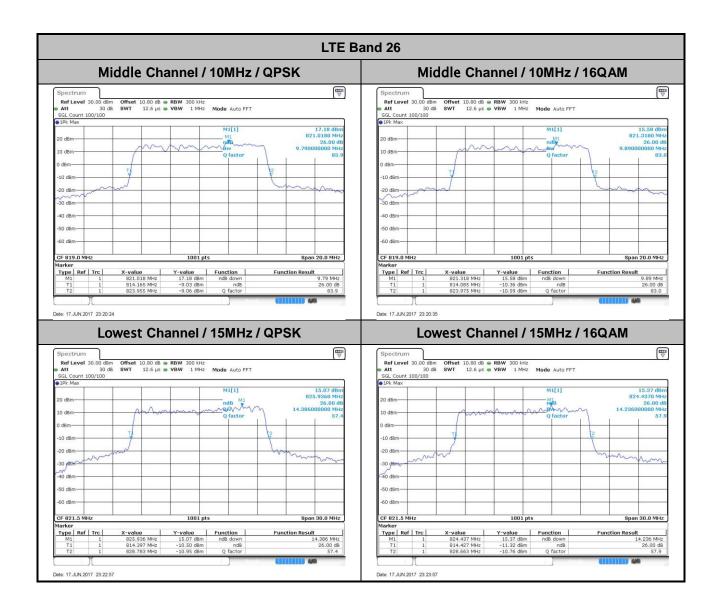


: A26S-8 of 48


C RF Test Report No. :FW750208

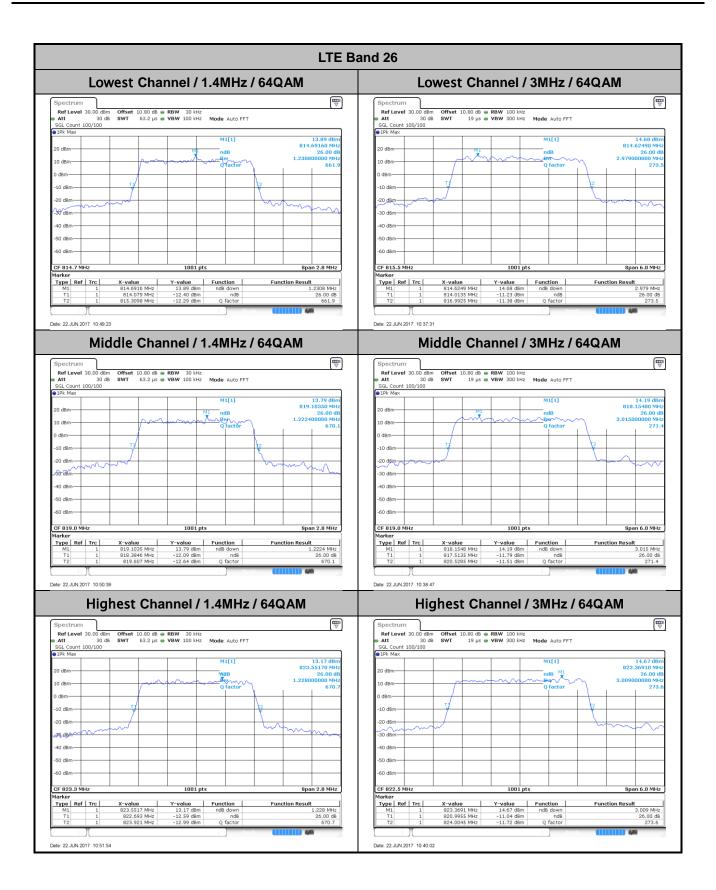

TEL: 886-3-327-3456 FAX: 886-3-328-4978

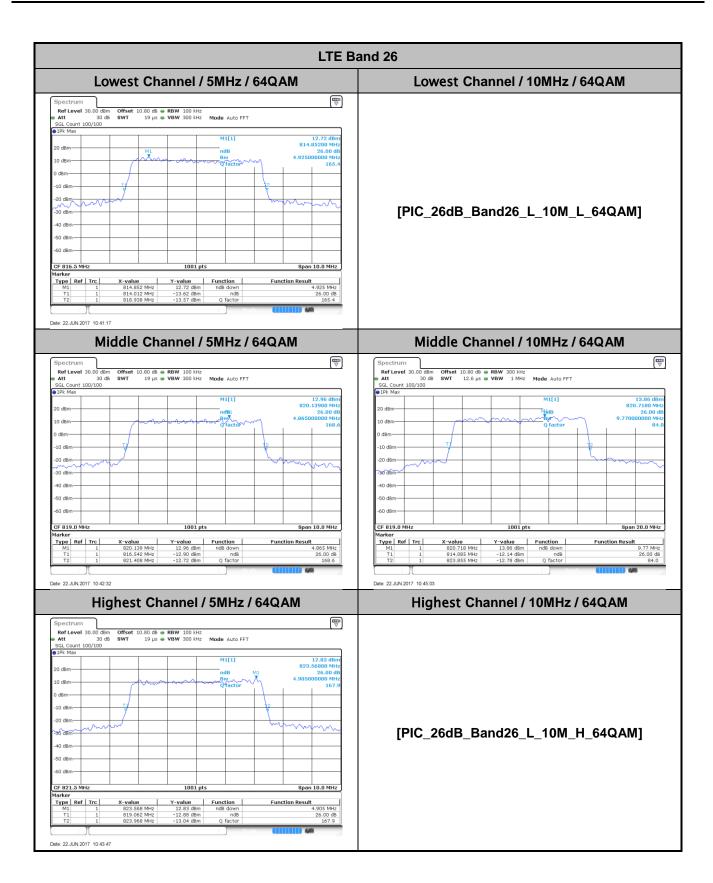




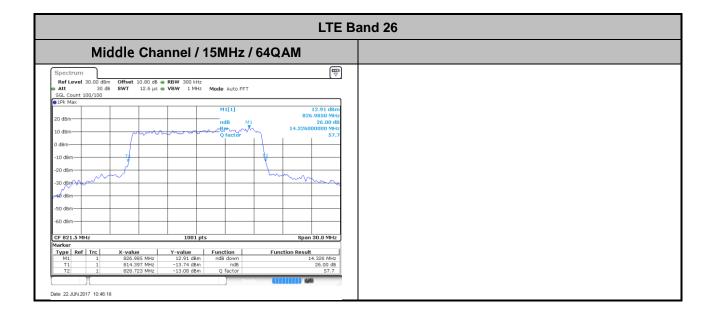

Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.72	2.73	4.49	4.49	-	-	13.43	13.43	-	-
Middle CH	1.09	1.08	2.72	2.73	4.5	4.5	9.09	9.05	-	-	-	-
Highest CH	1.09	1.09	2.73	2.73	4.49	4.49	-	-	-	-	-	-
Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.09	-	2.73	-	4.49	-	-	-	13.46	-	-	-
Middle CH	1.09	-	2.7	-	4.49	-	9.07	-	-	-	-	-
Highest CH	1.09	-	2.72	-	4.51	-	-	-	-	-	-	-

Report No. :FW750208

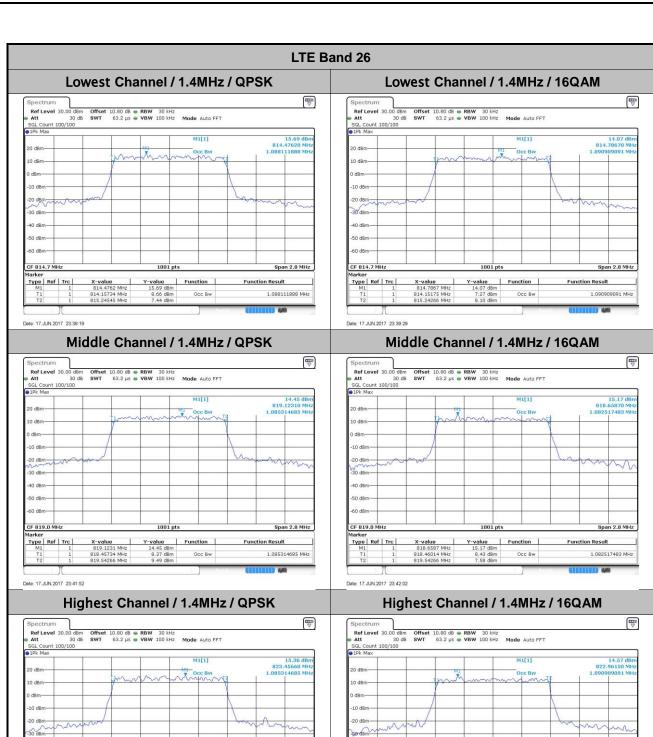

-60 dBm-

1.085314685 MHz

Type | Ref | Trc |



Occ Bw

TEL: 886-3-327-3456 FAX: 886-3-328-4978


-60 dBm-


Marker Type | Ref | Trc |

Occ Bw


1.090909091 MHz


Report No.: FW750208

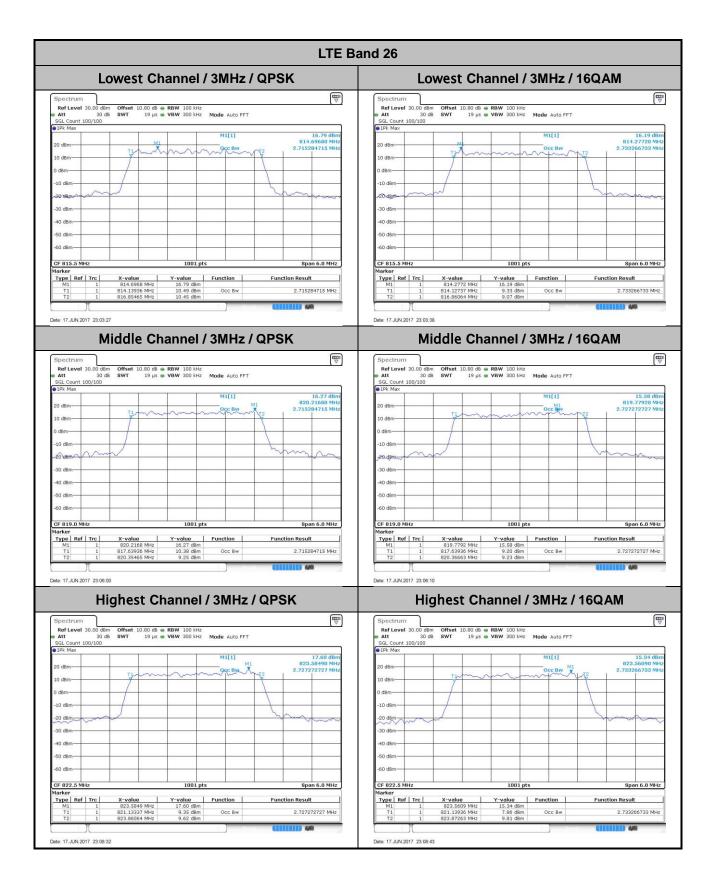


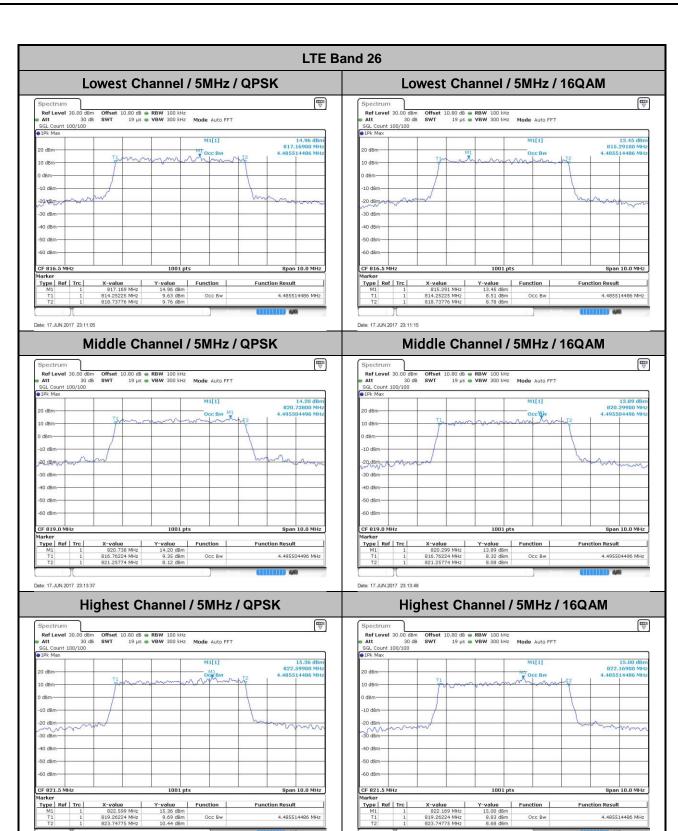


: A26S-15 of 48

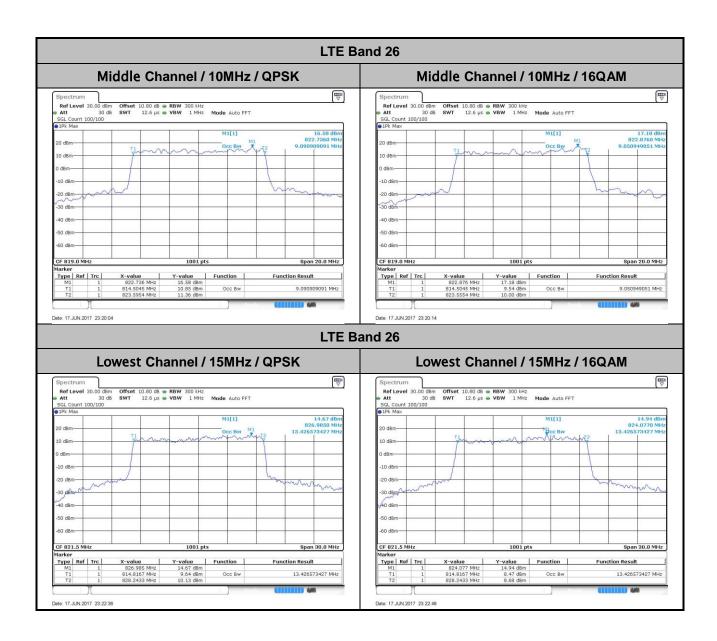


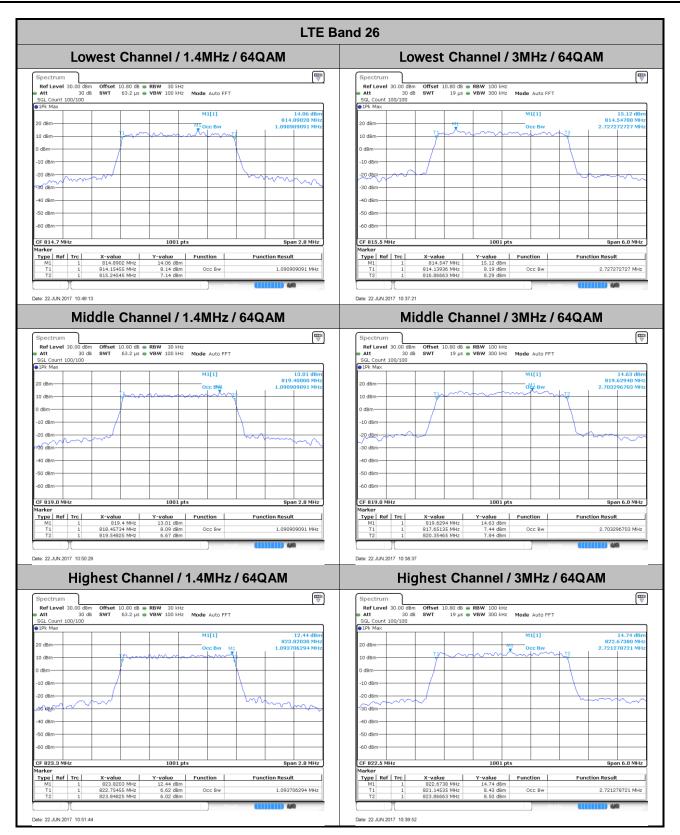



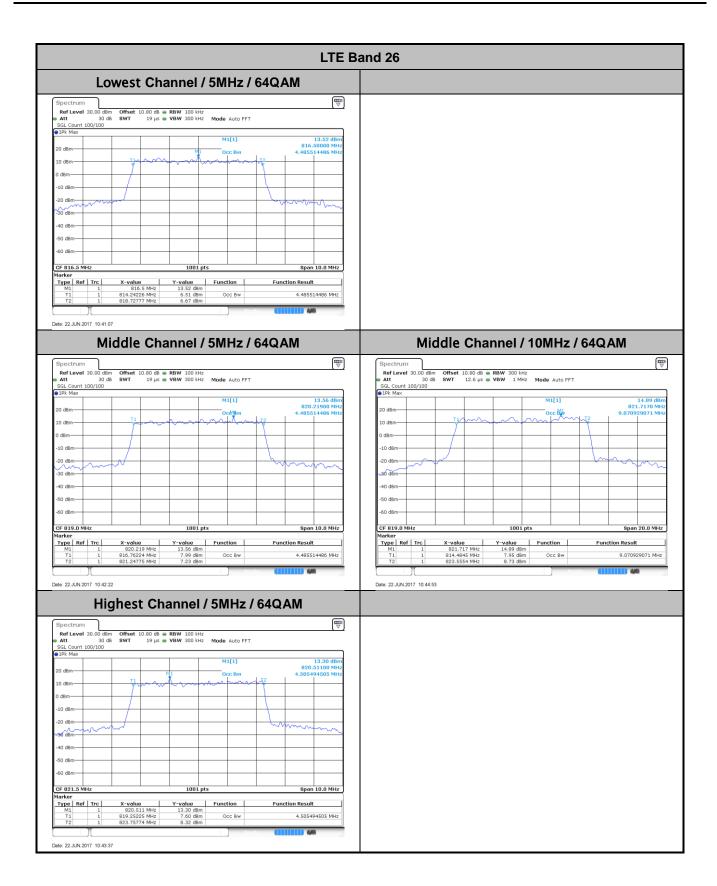



: A26S-18 of 48

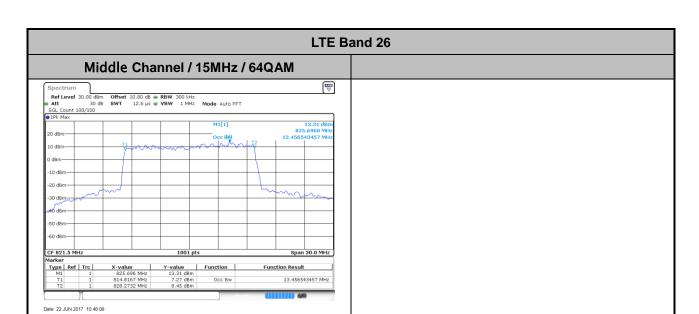

Conducted Band Edge


TEL: 886-3-327-3456 FAX: 886-3-328-4978 Page Number : A26S-20 of 48

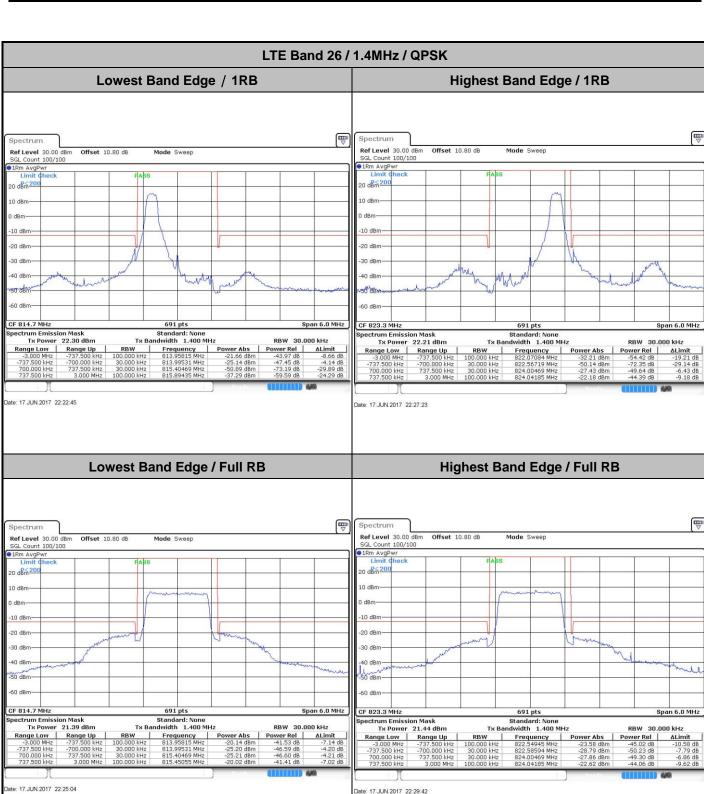


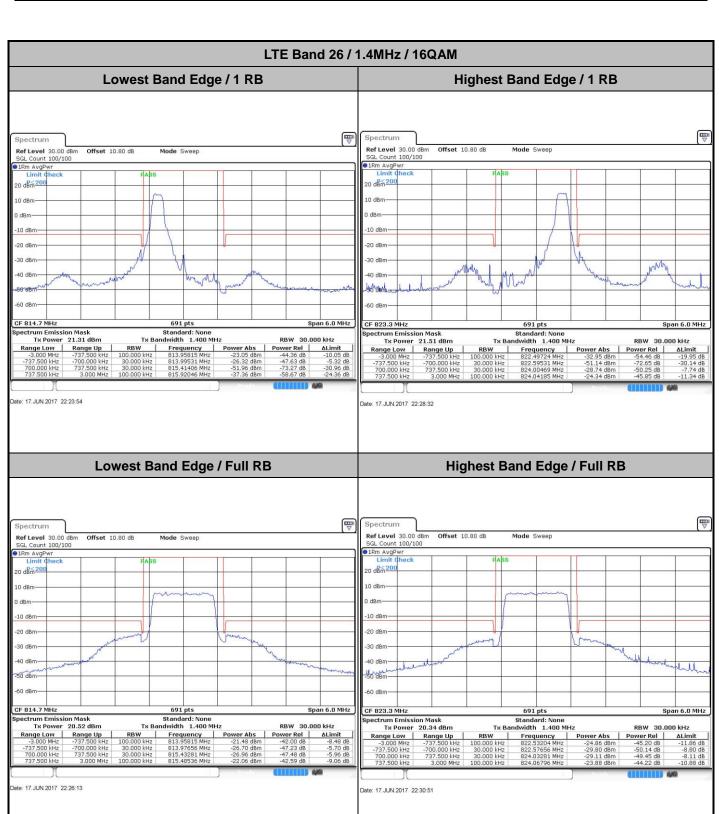

LTE Band 26 / 1.4MHz / 64QAM Lowest Band Edge / 1 RB Highest Band Edge / 1 RB Spectrum Ref Level 30.00 dBm Offset 10.80 dB Mode Sweep Ref Level 30.00 Offset 10.80 dB Mode Sweep Count 100/100 AvgPwr GL Count 100/100 ●1Rm AvgPw 20 dBm 200 20 dBm²¹ dBm -10 dBr -10 dBm -20 dBr 30 dBm 40 dBm hom -60 dBm CF 814.7 MHz
Spectrum Emission Mask
Tx Power 20.64 dBm
Range Low Range Up 691 pts Standard: None Tx Bandwidth 1.400 MHz CF 823.3 MHz | Spectrum Emission Mask | Tx Power | 20.73 dBm | Range Low | Range Up | -3.000 MHz | -737.500 kHz Standard: None width 1.400 MHz RBW 30.000 kHz Frequency 822.13175 MHz Frequency 813.95815 MHz ΔLimit Date: 22.JUN.2017 10:17:37 Lowest Band Edge / Full RB **Highest Band Edge / Full RB** Spectrum Ref Level 30.00 dBm Offset 10.80 dB Mode Sweep Offset 10.80 dB Mode Sweep SGL Count 100/100 ●1Rm AvgPwr 20 dR≤20 my

Report No.: FW750208

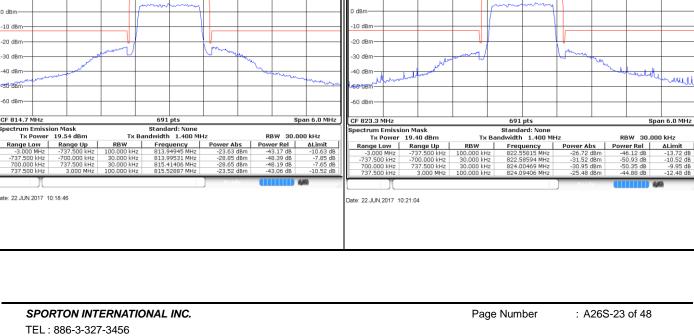

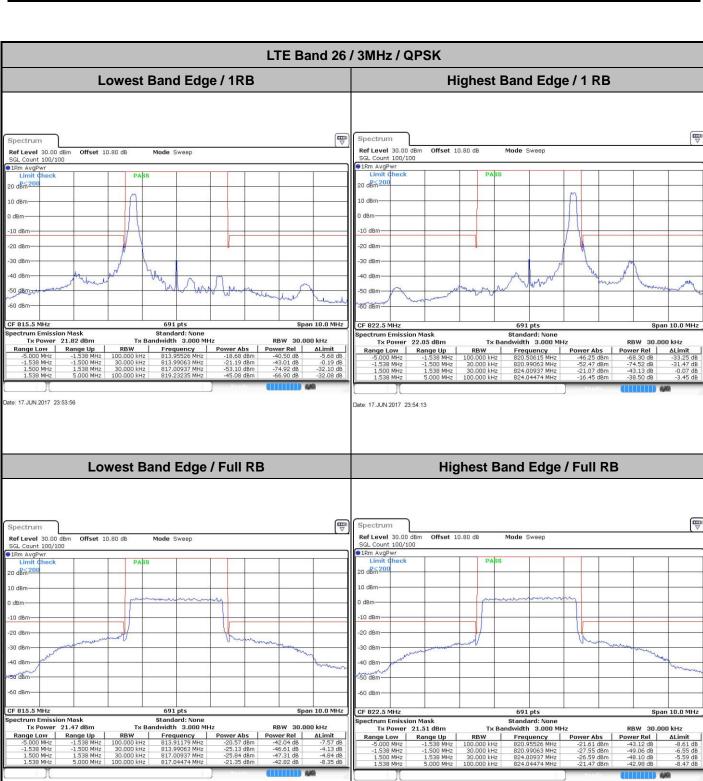

Date: 17.JUN.2017 22:38:59

TEL: 886-3-327-3456 FAX: 886-3-328-4978

ate: 17.JUN.2017 22:34:20