

MEASUREMENT REPORT

LTE Band 8 (CAT-M1)

Applicant Name:

Telit Communications S.p.A
Viale Stazione di Prosecco 5/b
34010, Trieste, Italy

Date of Testing:

03/11 - 04/01/2021

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2104010024-02-R1.R17

FCC ID:

RI7ME910G1WW

Applicant:

Telit Communications S.p.A

Application Type:

Class II Permissive Change

Model:

ME910G1-WW

EUT Type:

Data Terminal Module

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part(s):

Part 27 Subpart P

Test Procedure(s):

ANSI C63.26-2015, KDB 971168 D01 v03r01

Class II Permissive Change:

Adding LTE Band 8 Frequencies


Original Grant Date:

03/24/2020

Note: This revised Test Report (S/N: 1M2104010024-02-R1.R17) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President







| | | | | |
|--|--|-----------------------------------|--|-----------------------------------|
| FCC ID: RI7ME910G1WW |  <p>PCTEST Proud to be part of element</p> | MEASUREMENT REPORT |  <p>Telit wireless solutions</p> | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.R17 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 1 of 41 | |

TABLE OF CONTENTS

| | | |
|-----|--|----|
| 1.0 | INTRODUCTION | 3 |
| 1.1 | Scope | 3 |
| 1.2 | PCTEST Test Location..... | 3 |
| 1.3 | Test Facility / Accreditations..... | 3 |
| 2.0 | PRODUCT INFORMATION..... | 4 |
| 2.1 | Equipment Description | 4 |
| 2.2 | Device Capabilities..... | 4 |
| 2.3 | Test Configuration | 4 |
| 2.4 | EMI Suppression Device(s)/Modifications | 4 |
| 2.5 | Software and Firmware | 4 |
| 3.0 | DESCRIPTION OF TESTS | 5 |
| 3.1 | Evaluation Procedure | 5 |
| 3.2 | Broadband Frequency Assignment | 5 |
| 3.3 | Radiated Power and Radiated Spurious Emissions | 5 |
| 4.0 | MEASUREMENT UNCERTAINTY | 7 |
| 5.0 | TEST EQUIPMENT CALIBRATION DATA | 8 |
| 6.0 | SAMPLE CALCULATIONS | 9 |
| 7.0 | TEST RESULTS..... | 10 |
| 7.1 | Summary..... | 10 |
| 7.2 | Transmitter Conducted Output Power/ Effective Radiated Power | 11 |
| 7.3 | Occupied Bandwidth | 13 |
| 7.4 | Band Edge Emissions at Antenna Terminal | 19 |
| 7.5 | Spurious and Harmonic Emissions at Antenna Terminal | 23 |
| 7.6 | Peak-Average Ratio | 29 |
| 7.7 | Radiated Spurious Emissions Measurements..... | 35 |
| 7.8 | Frequency Stability / Temperature Variation | 38 |
| 8.0 | CONCLUSION..... | 41 |

| | | | | |
|---|--|--|---|--|
| FCC ID: RI7ME910G1WW |  Proud to be part of element | MEASUREMENT REPORT |  wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 2 of 41 | |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.



1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 3 of 41 |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Telit Data Terminal Module FCC ID: RI7ME910G1WW**. This device operates using NB-IoT & CAT-M1 LTE.

The test data contained in this report pertains only to the emissions due to the EUT's CAT-M1 LTE licensed transmitter.

Test Device Serial No.: 79260

2.2 Device Capabilities

This device contains the following capabilities:

Band 2, 4, 5, 8 (NB-IoT & CAT-M1), 12, 13, 25, 26, 66, 71 and 85
GPRS/EDGE GSM850 and PCS 1900 Bands

2.3 Test Configuration



The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 3.2 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Software and Firmware

The test was conducted with firmware version M0C.400002 and AT#BNDOPTIONS includes B8_39d installed on the EUT.

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  Proud to be part of element | MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 4 of 41 |

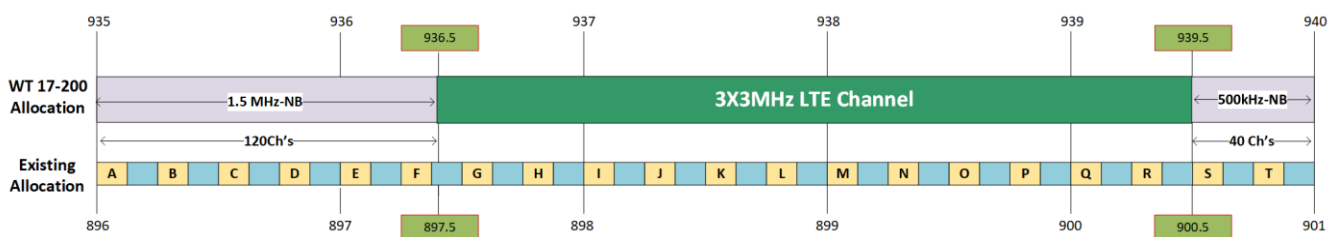
3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Broadband Frequency Assignment

The spectrum for this band is allocated as shown below.





Note:

Device can operate in the following range: 897.5MHz- 900.5MHz (Uplink) and this range 936.5- 939.5MHz (Downlink).

3.3 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 5 of 41 |

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A halfwave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.




Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

| | | | | |
|--|---|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  | MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 6 of 41 | |

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13 |
| Radiated Disturbance (<1GHz) | 4.98 |
| Radiated Disturbance (>1GHz) | 5.07 |
| Radiated Disturbance (>18GHz) | 5.09 |

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST Proud to be part of  element | MEASUREMENT REPORT |  Telit ® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 7 of 41 |

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------------|---------|--------------------------------|-----------|--------------|-----------|---------------|
| - | LTX2 | Licensed Transmitter Cable Set | 9/16/2020 | Annual | 9/16/2021 | LTX2 |
| Emco | 3115 | Horn Antenna (1-18GHz) | 6/18/2020 | Biennial | 6/18/2022 | 9704-5182 |
| Keysight Technologies | N9030A | PXA Signal Analyzer | 9/2/2020 | Annual | 9/2/2021 | MY55410501 |
| Rohde & Schwarz | ESU 40 | EMI Test Receiver (40GHz) | 9/9/2020 | Annual | 9/9/2021 | 100384 |
| Rohde & Schwarz | AP1 | EMC Cable and Switch System | 9/10/2020 | Annual | 9/10/2021 | AP1 |
| Rohde & Schwarz | AP1-002 | EMC Cable and Switch System | 3/9/2021 | Annual | 3/9/2022 | AP1-002 |
| Rohde & Schwarz | CMW500 | Radio Communication Tester | 11/5/2020 | Annual | 11/5/2021 | 112347 |

Table 5-1. Summary of Test Results

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 8 of 41 | |

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated



7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $- (-24.80)$.

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 9 of 41 |

7.0 TEST RESULTS

7.1 Summary



Company Name: Telit Communications S.p.A
 Model: ME910G1-WW
 Mode(s): LTE Band 8 NB-IoT & CAT-M1

| Test Condition | Test Description | FCC Part Section(s) | Test Limit | Test Result | Report Reference |
|----------------|---|--------------------------|--|-------------|------------------|
| CONDUCTED | Transmitter Conducted Output Power/ Effective Radiated Power | 2.1046, 27.1507(a)(3) | 10W ERP | PASS | Section 7.2 |
| | Occupied Bandwidth | 2.1049, 27.1506 | N/A | PASS | Section 7.3 |
| | Conducted Band Edge / Spurious Emissions | 2.1051, 27.1509(a) | Attenuation > 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions | PASS | Section 7.4, 7.5 |
| | Peak-Average Ratio | 2.1051, 27.1507(d) | < 13dB | PASS | Section 7.6 |
| | Frequency Stability | 2.1055 | Fundamental emissions stay within authorized frequency block | PASS | Section 7.8 |
| RADIATED | Radiated Spurious Emissions | 2.1051, 27.1509(a) | Attenuation > 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions | PASS | Section 7.7 |

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is LTE Automation Version 5.3

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 10 of 41 | |

7.2 Transmitter Conducted Output Power/ Effective Radiated Power

Test Overview

The transmitter conducted output power is a measure of the total average power contained within a 3MHz channel as defined in §27.1506. All modes of operation were investigated and the worst case configuration results are reported in this section.

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2.4.2

Test Settings

All conducted powers were measured using the R&S CMW500's Channel Measurement function.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None

| | | | | |
|--|--|-----------------------------------|-----------------------------------|-----------------------------------|
| FCC ID: RI7ME910G1WW | PCTEST Proud to be part of element | MEASUREMENT REPORT | Telit ® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 11 of 41 |

| LTE Band 8 3MHz Bandwidth | | | |
|------------------------------|--------------|-----------|-----------------------|
| Modulation | Number of RB | RB Offset | Mid Channel |
| | | | 21640 (899.0 MHz) |
| | | | Conducted Power [dBm] |
| QPSK | 1 | 0 | 24.20 |
| | 1 | 3 | 24.10 |
| | 1 | 5 | 24.00 |
| | 6 | 0 | 22.09 |
| 16-QAM | 1 | 0 | 23.47 |
| | 1 | 3 | 23.46 |
| | 1 | 5 | 23.32 |
| | 5 | 0 | 22.31 |
| | 5 | 1 | 22.24 |

Table 7-2. Transmitter Conducted Output Power Measurements (3 MHz)



| LTE Band 8 1.4MHz Bandwidth | | | | | |
|--------------------------------|--------------|-----------|-----------------------|-----------------------|-----------------------|
| Modulation | Number of RB | RB Offset | Low Channel | Mid Channel | High Channel |
| | | | 21632 (898.2MHz) | 21640 (899.0 MHz) | 21648 (899.8MHz) |
| | | | Conducted Power [dBm] | Conducted Power [dBm] | Conducted Power [dBm] |
| QPSK | 1 | 0 | 24.25 | 24.24 | 24.20 |
| | 1 | 3 | 24.13 | 24.12 | 24.08 |
| | 1 | 5 | 24.08 | 24.00 | 23.97 |
| | 6 | 0 | 22.27 | 22.11 | 22.07 |
| 16-QAM | 1 | 0 | 23.40 | 23.53 | 23.46 |
| | 1 | 3 | 23.50 | 23.47 | 23.47 |
| | 1 | 5 | 23.44 | 23.41 | 23.32 |
| | 5 | 0 | 22.21 | 22.22 | 22.20 |
| | 5 | 1 | 22.15 | 22.13 | 22.10 |

Table 7-3. Transmitter Conducted Output Power Measurements (1.4MHz)

| Frequency Band [MHz] | Maximum Conducted Power [dBm] | Maximum ERP [dBm] | Maximum Antenna Gain [dBi] |
|----------------------|-------------------------------|-------------------|----------------------------|
| 899 | 25 | 40 | 17.15 |

Table 7-4. ERP Data (LTE Band 8)

Note: The 17.15dBi antenna gain shown in the table above is the maximum theoretical antenna gain that can be used by this device in order to reach the 10W ERP limit (42.15dBm EIRP) for operation in this band. An actual antenna was not used for testing to determine ERP compliance.

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.R17 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 12 of 41 |

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

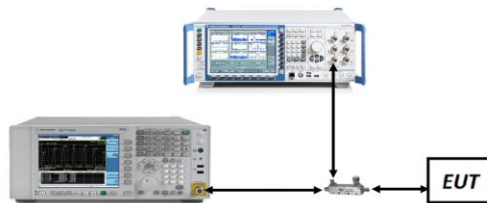




Figure 7-2. Test Instrument & Measurement Setup

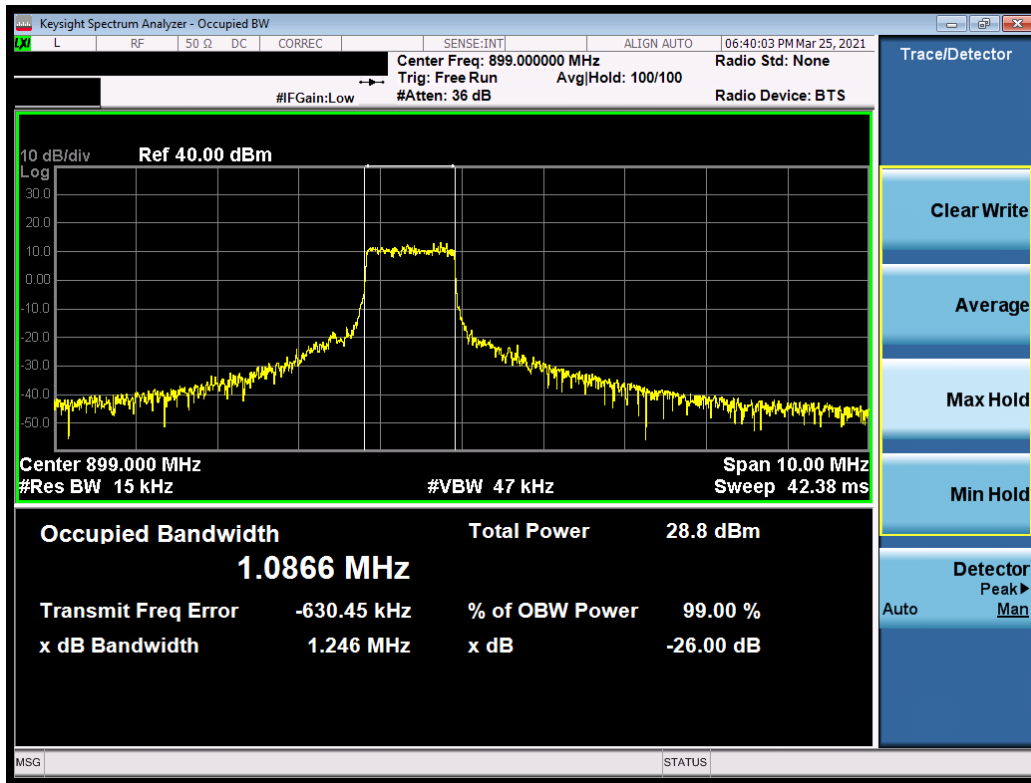
Test Notes

None



| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 13 of 41 |

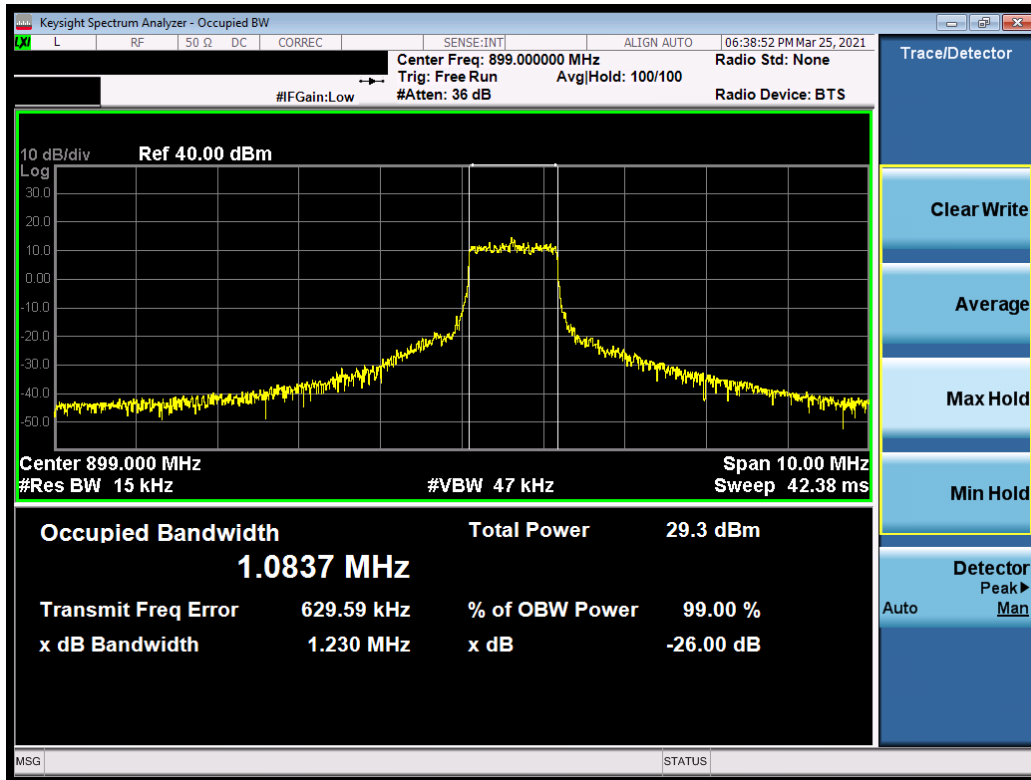
| Mode | Channel Bandwidth (MHz) | Channel/ Frequency | Modulation | NB Value | Number of RB | RB Offset | Occupied BW (MHz) |
|-------------------|-------------------------|--------------------|------------|----------|--------------|-----------|-------------------|
| LTE Band 8 (eMTC) | 3 | CH21640 - 899.0MHz | QPSK | 0 | 6 | 0 | 1.087 |
| LTE Band 8 (eMTC) | 3 | CH21640 - 899.0MHz | QPSK | 1 | 6 | 0 | 1.084 |
| LTE Band 8 (eMTC) | 3 | CH21640 - 899.0MHz | 16 QAM | 0 | 5 | 0 | 0.912 |
| LTE Band 8 (eMTC) | 3 | CH21640 - 899.0MHz | 16 QAM | 1 | 5 | 0 | 0.911 |
| LTE Band 8 (eMTC) | 3 | CH21640 - 899.0MHz | 16 QAM | 0 | 5 | 1 | 0.905 |
| LTE Band 8 (eMTC) | 3 | CH21640 - 899.0MHz | 16 QAM | 1 | 5 | 1 | 0.904 |
| LTE Band 8 (eMTC) | 1.4 | CH21640 - 899.0MHz | QPSK | 0 | 6 | 0 | 1.101 |
| LTE Band 8 (eMTC) | 1.4 | CH21640 - 899.0MHz | 16 QAM | 0 | 5 | 0 | 0.904 |
| LTE Band 8 (eMTC) | 1.4 | CH21640 - 899.0MHz | 16 QAM | 0 | 5 | 1 | 0.902 |

Table 7-5. Occupied Bandwidth Measurements

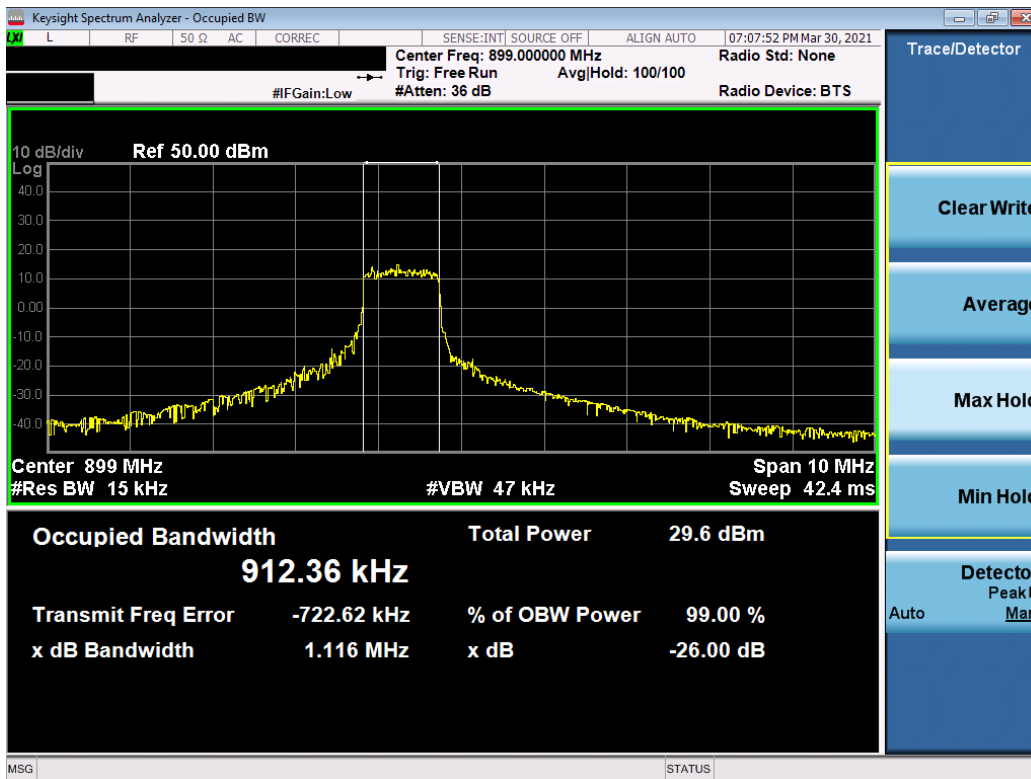


Plot 7-1. Occupied Bandwidth Plot (3MHz, QPSK, RB 6, RB Offset 0, NB=0)



| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 14 of 41 |

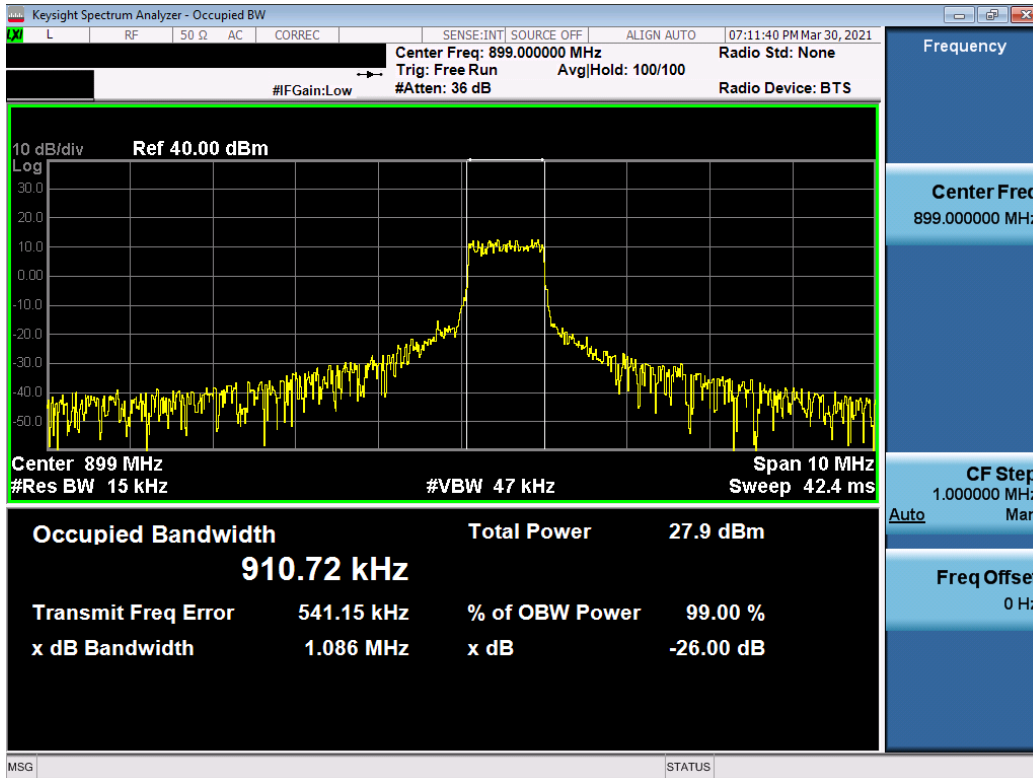


Plot 7-2. Occupied Bandwidth Plot (3MHz, QPSK, RB 6, RB Offset 0, NB=1)

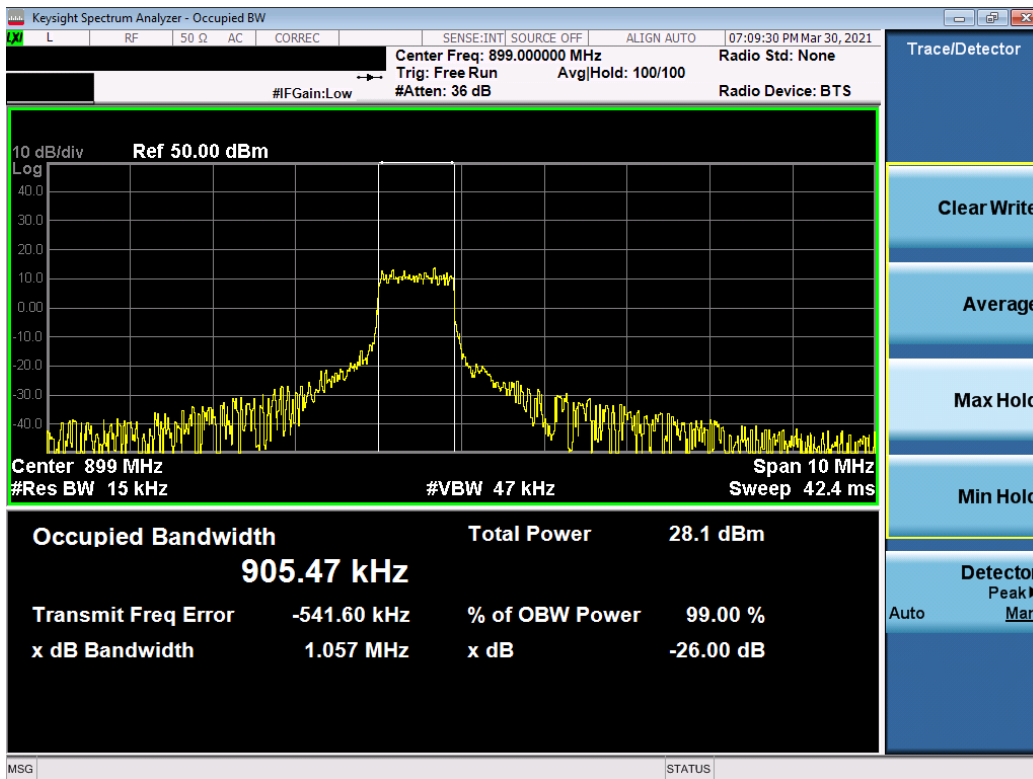


Plot 7-3. Occupied Bandwidth Plot (3MHz, 16-QAM, RB 5, RB Offset 0, NB=0)



| | | | |
|--|--|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 15 of 41 |

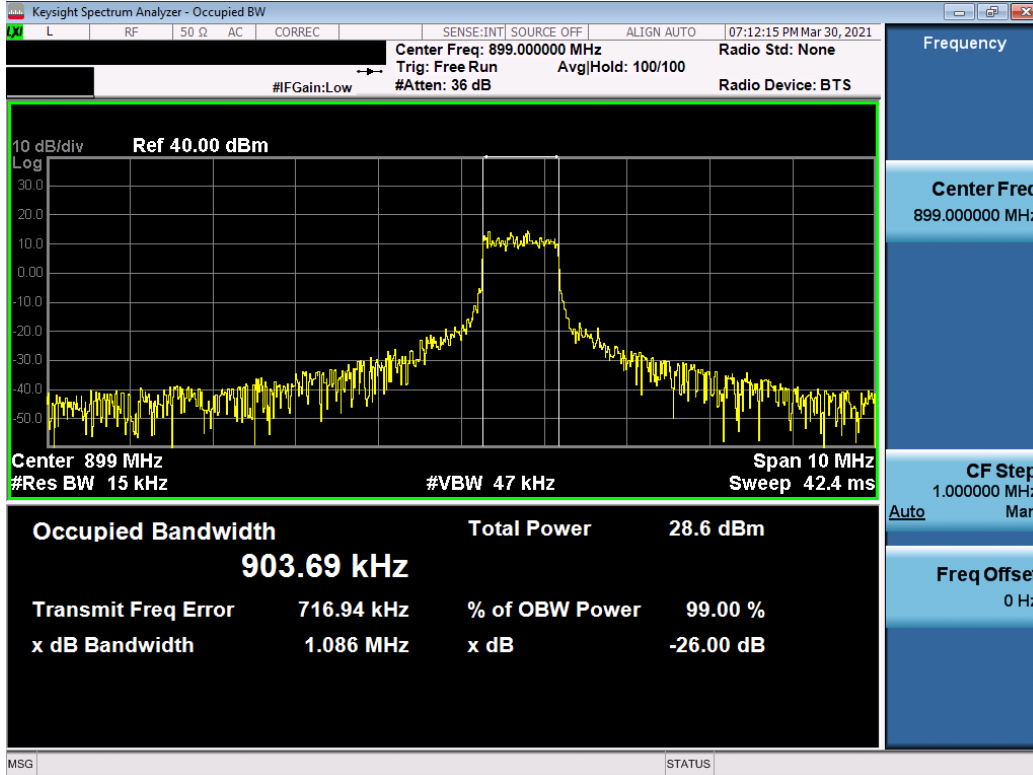


Plot 7-4. Occupied Bandwidth Plot (3MHz, 16-QAM, RB 5, RB Offset 0, NB=1)

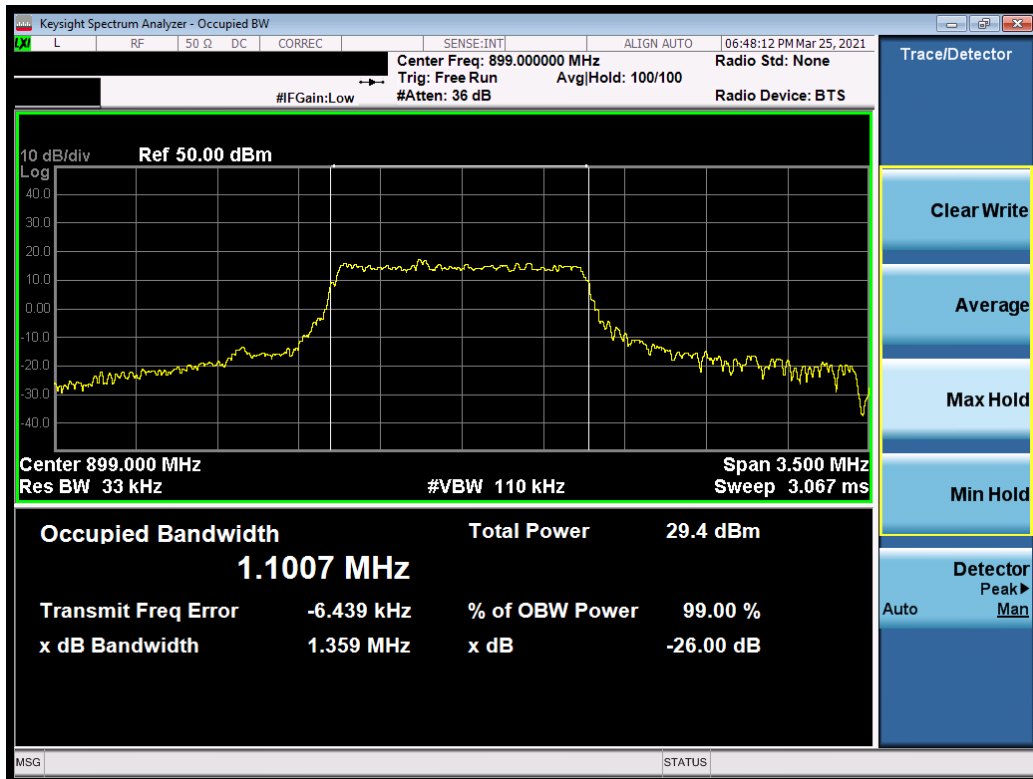


Plot 7-5. Occupied Bandwidth Plot (3MHz, 16-QAM, RB 5, RB Offset 1, NB=0)



| | | | |
|--|--|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 16 of 41 |



Plot 7-6. Occupied Bandwidth Plot (3MHz, 16-QAM, RB 5, RB Offset 1, NB=1)

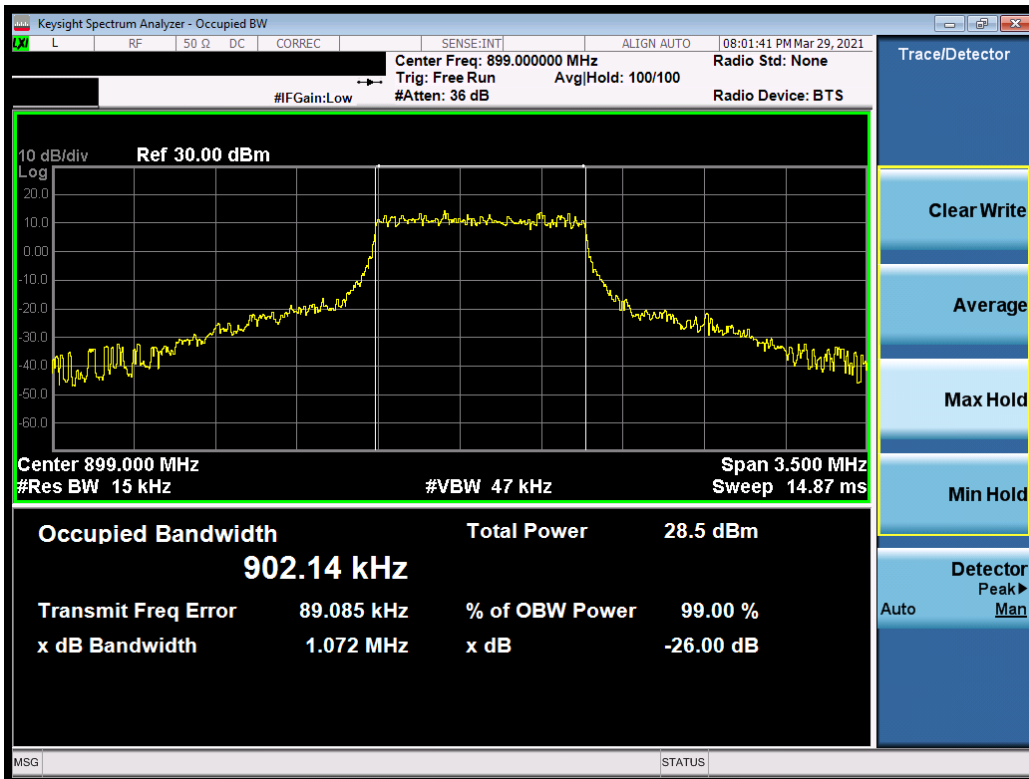


Plot 7-7. Occupied Bandwidth Plot (1.4MHz, QPSK, RB 6, RB Offset 0, NB=0)



| | | | | |
|--|---|-----------------------------------|--|-----------------------------------|
| FCC ID: RI7ME910G1WW |  Proud to be part of element | MEASUREMENT REPORT |  wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 17 of 41 |



Plot 7-8. Occupied Bandwidth Plot (1.4MHz, 16-QAM, RB 5, RB Offset 0, NB=0)



Plot 7-9. Occupied Bandwidth Plot (1.4MHz, 16-QAM, RB 5, RB Offset 0, NB=1)

| | | | | |
|--|---|-----------------------------------|--|-----------------------------------|
| FCC ID: RI7ME910G1WW |  Proud to be part of element | MEASUREMENT REPORT |  wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 18 of 41 |

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. Several modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. $RBW \geq 1\%$ of the emission bandwidth
4. $VBW \geq 3 \times RBW$
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average for continuous emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

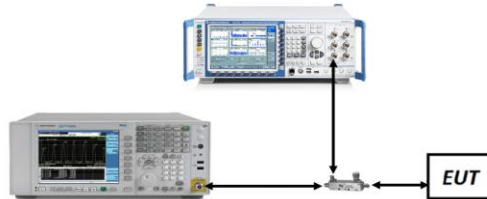




Figure 7-3. Test Instrument & Measurement Setup

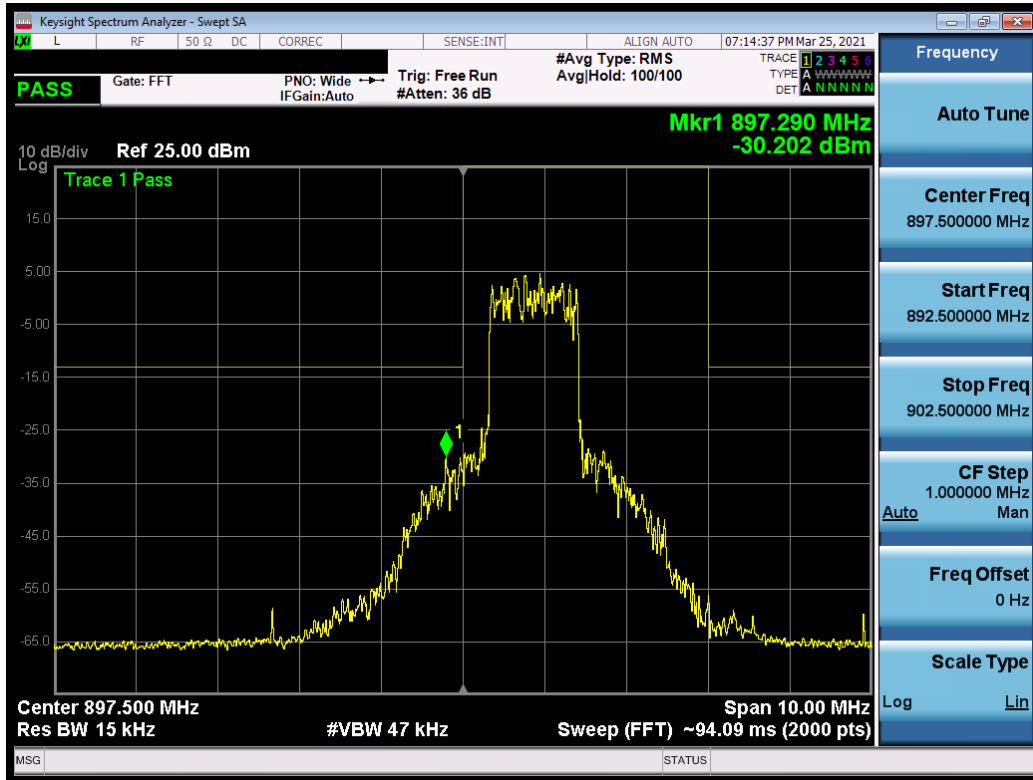
Test Notes

1. Per §27.1509(c), in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. This section shows non-compliant band edge emissions. The emissions were measured with the required 100kHz RBW and they were also investigated with a RBW greater than or equal to 1% of the channel emission bandwidth, as allowed by the rule



| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 19 of 41 |

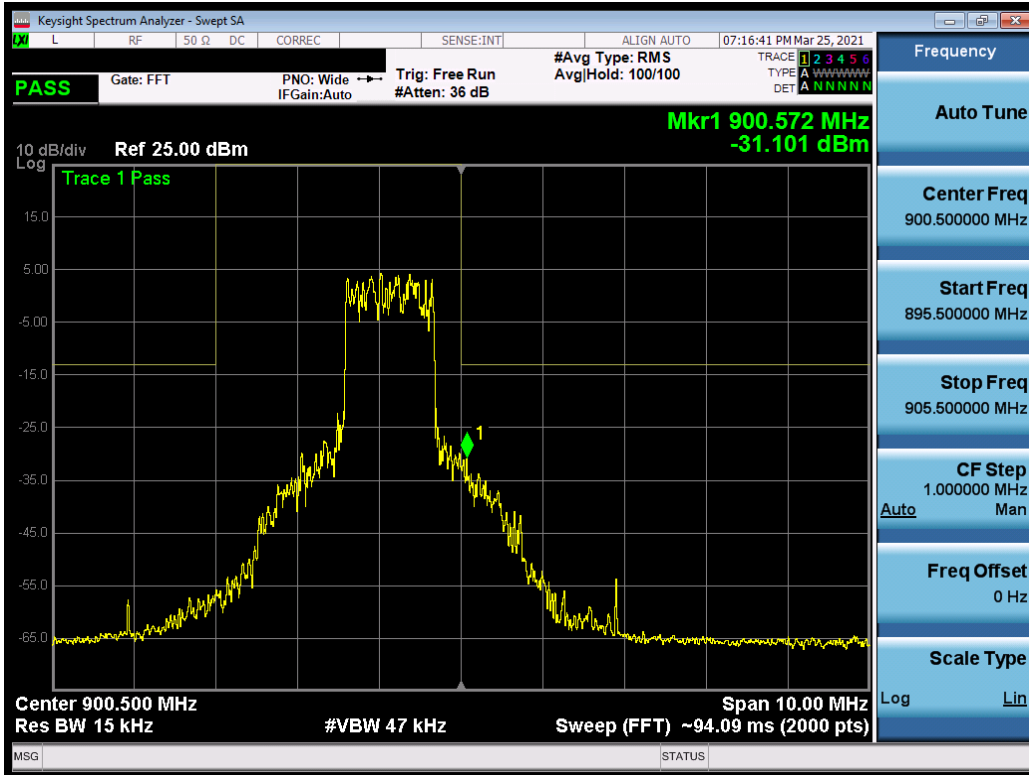
| Mode | Channel Bandwidth [MHz] | Channel/ Frequency | Modulation | NB Value | Number of RB | RB Offset | Band Edge Level [dBm] | Limit [dBm] | Margin [dB] |
|---------------------|-------------------------|--------------------|------------|----------|--------------|-----------|-----------------------|-------------|-------------|
| LTE Band 8 (CAT-M1) | 3 | CH21640 - 899.0MHz | QPSK | 0 | 6 | 0 | -30.202 | -13 | -17.20 |
| LTE Band 8 (CAT-M1) | 3 | CH21640 - 899.0MHz | QPSK | 1 | 6 | 0 | -31.101 | -13 | -18.10 |
| LTE Band 8 (CAT-M1) | 1.4 | CH21632 - 898.2MHz | QPSK | 0 | 6 | 0 | -25.802 | -13 | -12.80 |
| LTE Band 8 (CAT-M1) | 1.4 | CH21648 - 899.8MHz | QPSK | 0 | 6 | 0 | -29.49 | -13 | -16.49 |

Table 7-6. Band Edge Measurements

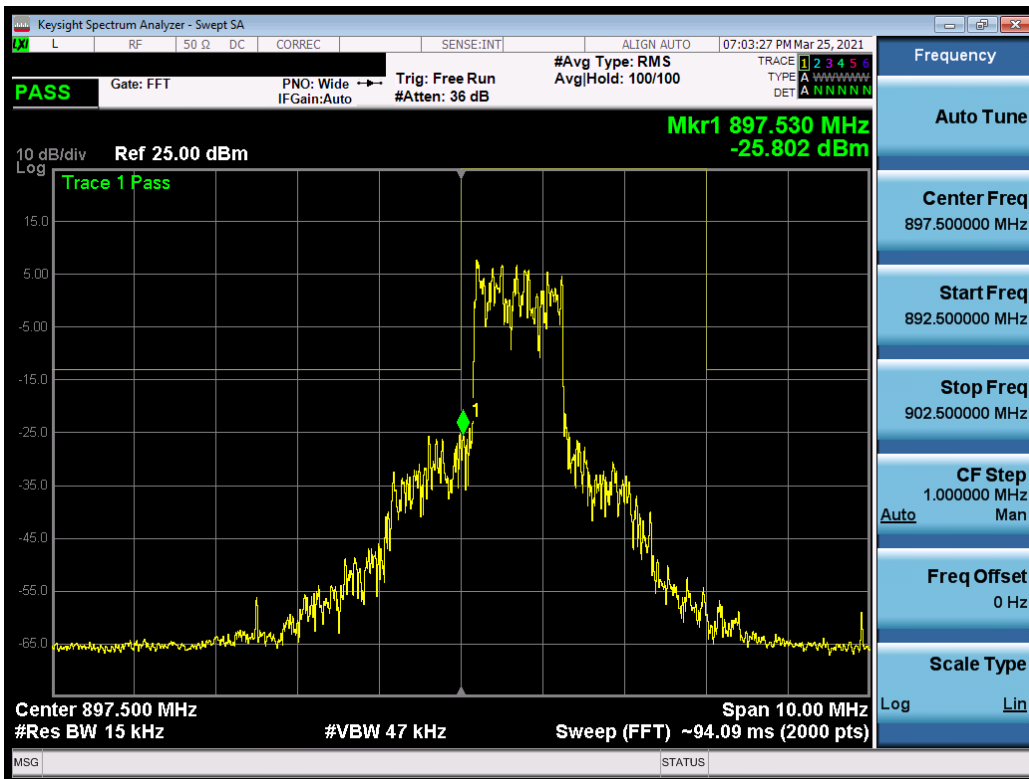


Plot 7-10. Lower Band Edge Plot (3MHz, QPSK, 6RB, RB Offset 0, NB=0)



| | | | | |
|--|---|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  | MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 20 of 41 |

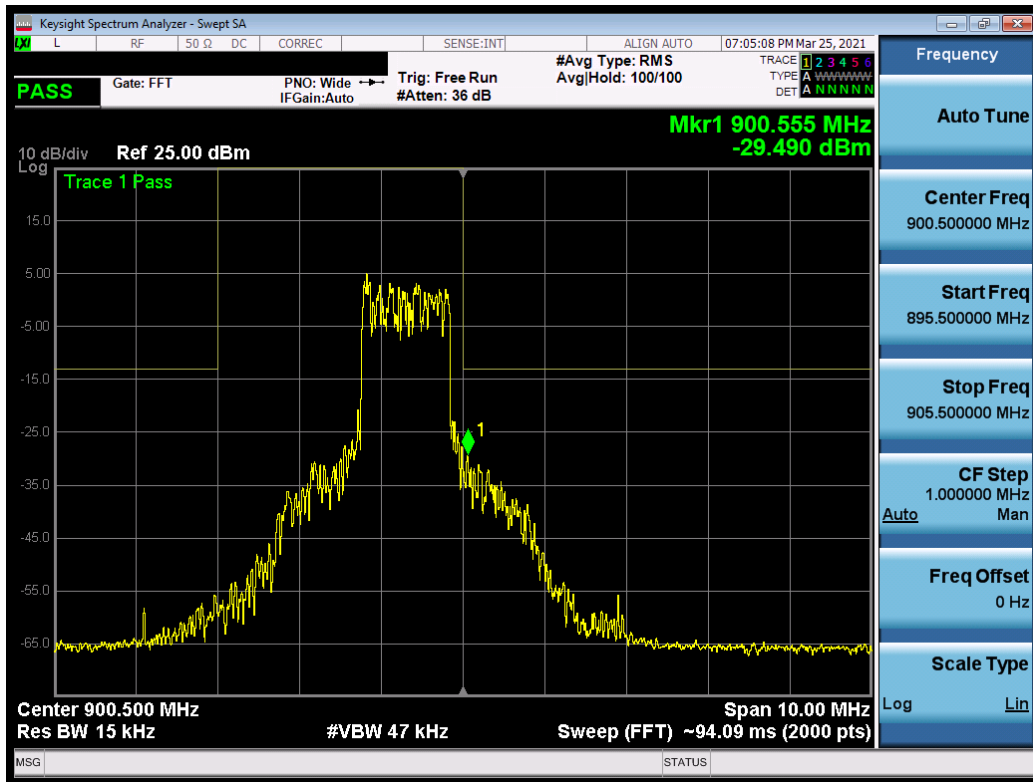


Plot 7-11. Upper Band Edge Plot (3MHz, QPSK, 6RB, RB Offset 0, NB=1)





Plot 7-12. Lower Band Edge Plot (1.4MHz, QPSK, 6RB, RB Offset 0, NB=0)

| | | | | |
|--|---|-----------------------------------|--|-----------------------------------|
| FCC ID: RI7ME910G1WW |  Proud to be part of element | MEASUREMENT REPORT |  wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 21 of 41 |



Plot 7-13. Upper Band Edge Plot (1.4MHz, QPSK, 6RB, RB Offset 0, NB=0)

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 22 of 41 |

7.5 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. Several modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

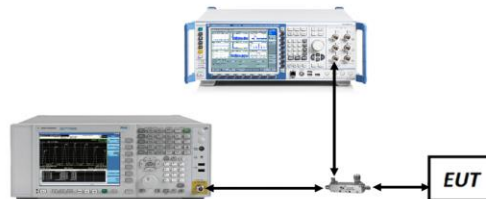




Figure 7-4. Test Instrument & Measurement Setup

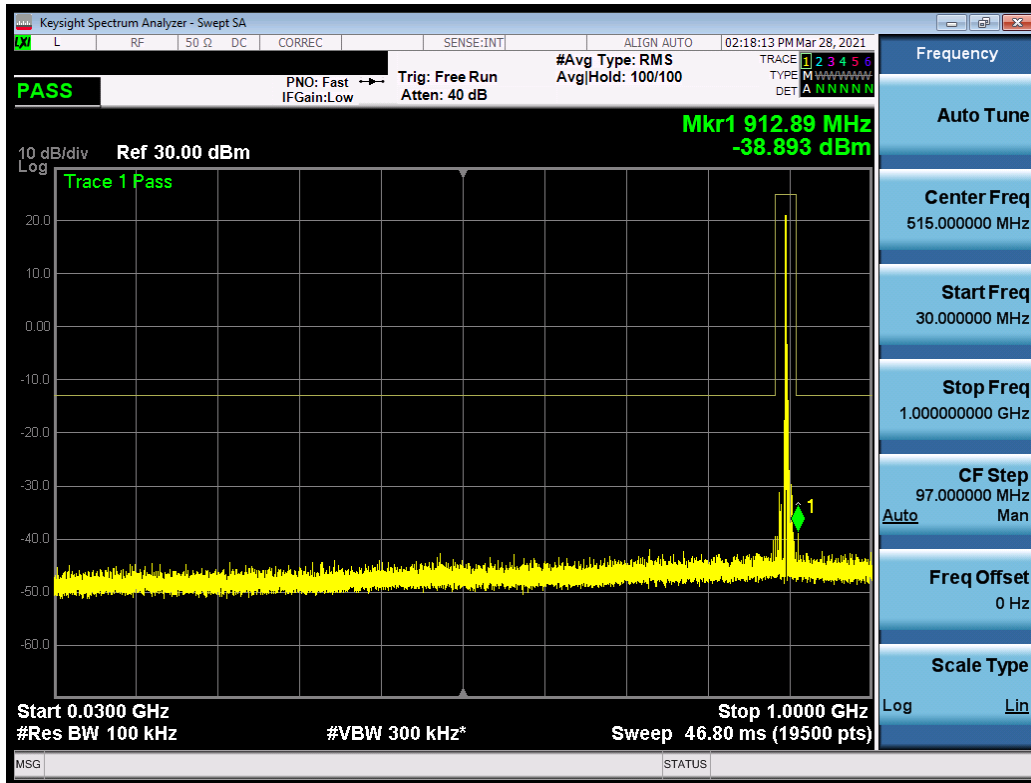
Test Notes

Per 27.1509(a), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.



| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  Proud to be part of element | MEASUREMENT REPORT |  wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 23 of 41 |

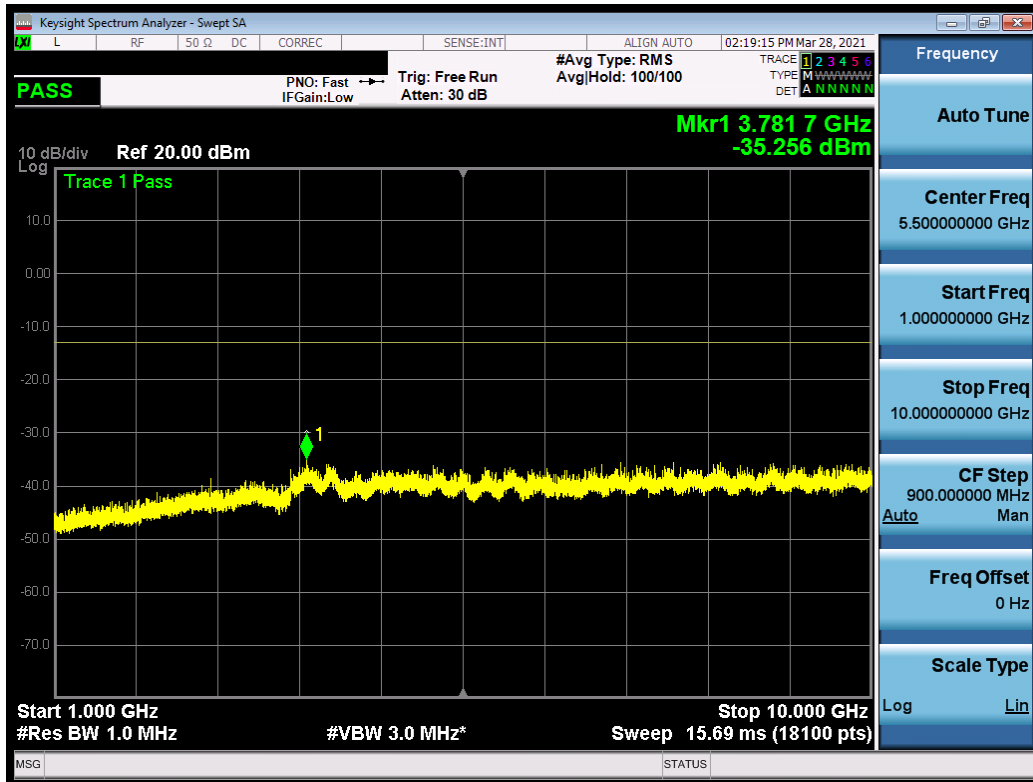
| Mode | Channel Bandwidth [MHz] | Channel/ Frequency | Modulation | Number of RB | RB Offset | Worst Case CSE [dBm] | Limit [dBm] | Margin [dB] |
|-------------------|-------------------------|--------------------|------------|--------------|-----------|----------------------|-------------|-------------|
| LTE Band 8 (eMTC) | 1.4 | CH21632 - 898.2MHz | QPSK | 1 | 0 | -35.256 | -13 | -22.26 |
| LTE Band 8 (eMTC) | 3 | CH21640 - 899.0MHz | QPSK | 1 | 0 | -34.735 | -13 | -21.74 |
| LTE Band 8 (eMTC) | 1.4 | CH21640 - 899.0MHz | QPSK | 1 | 0 | -34.793 | -13 | -21.79 |
| LTE Band 8 (eMTC) | 1.4 | CH21648 - 899.8MHz | QPSK | 1 | 0 | -35.532 | -13 | -22.53 |

Table 7-7. Spurious Emission Measurements

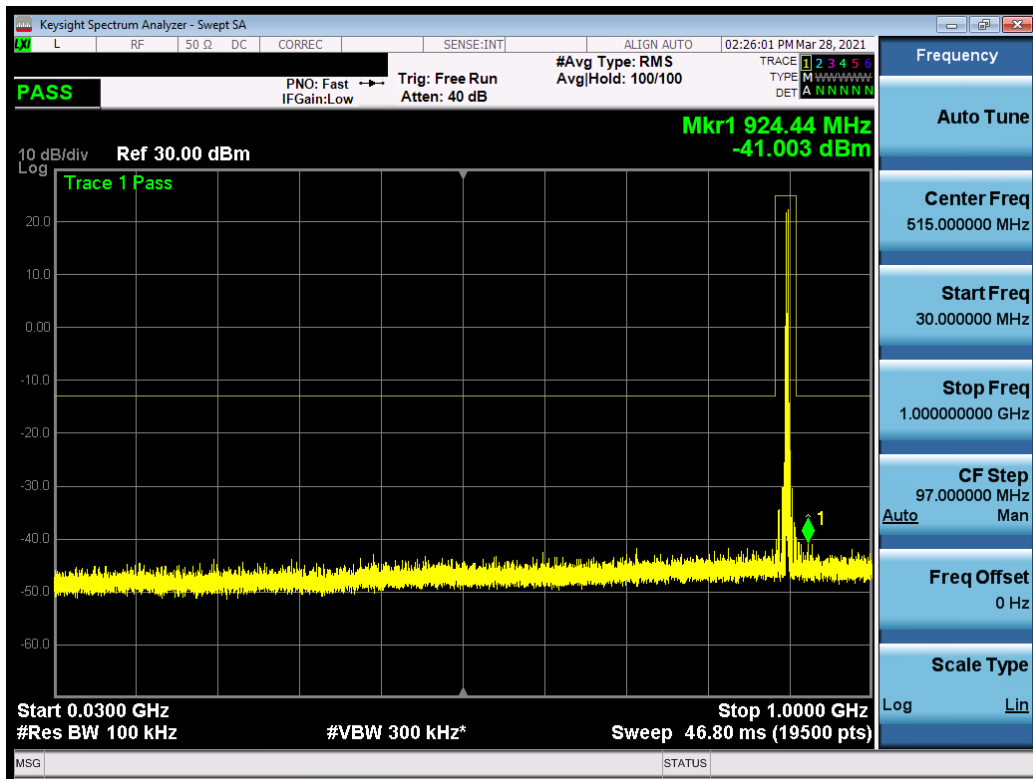


Plot 7-14. Conducted Spurious Plot – Low Channel (1.4MHz, QPSK, 1RB, RB Offset 0)



| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 24 of 41 |

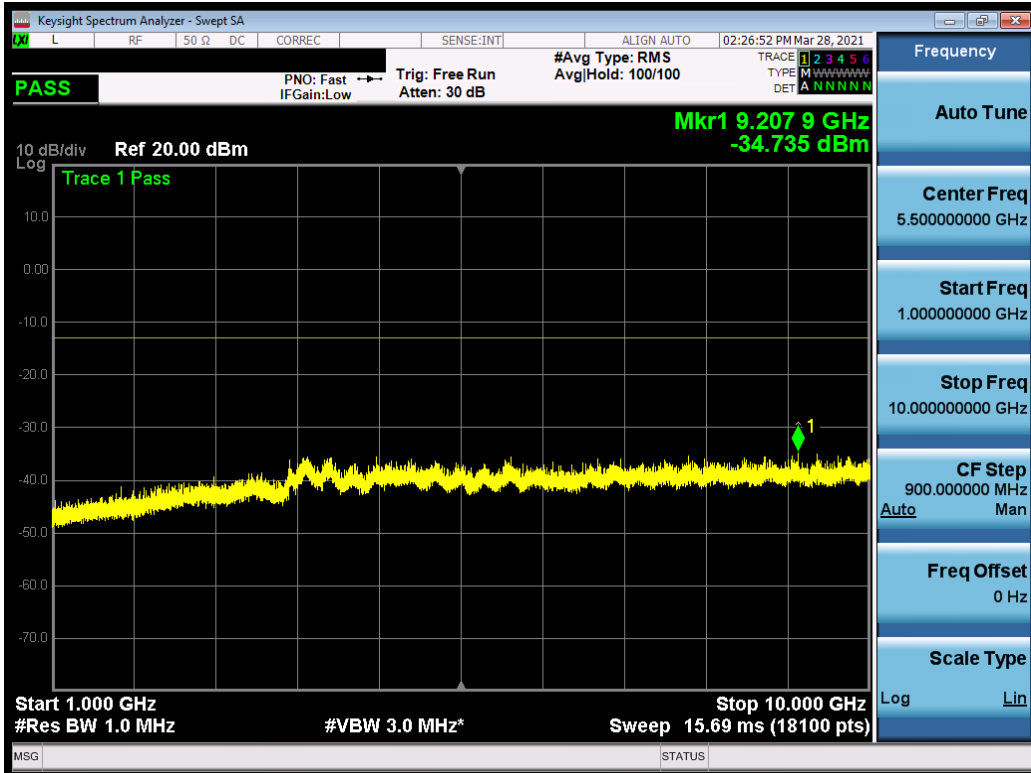


Plot 7-15. Conducted Spurious Plot – Low Channel (1.4MHz, QPSK, 1RB, RB Offset 0)

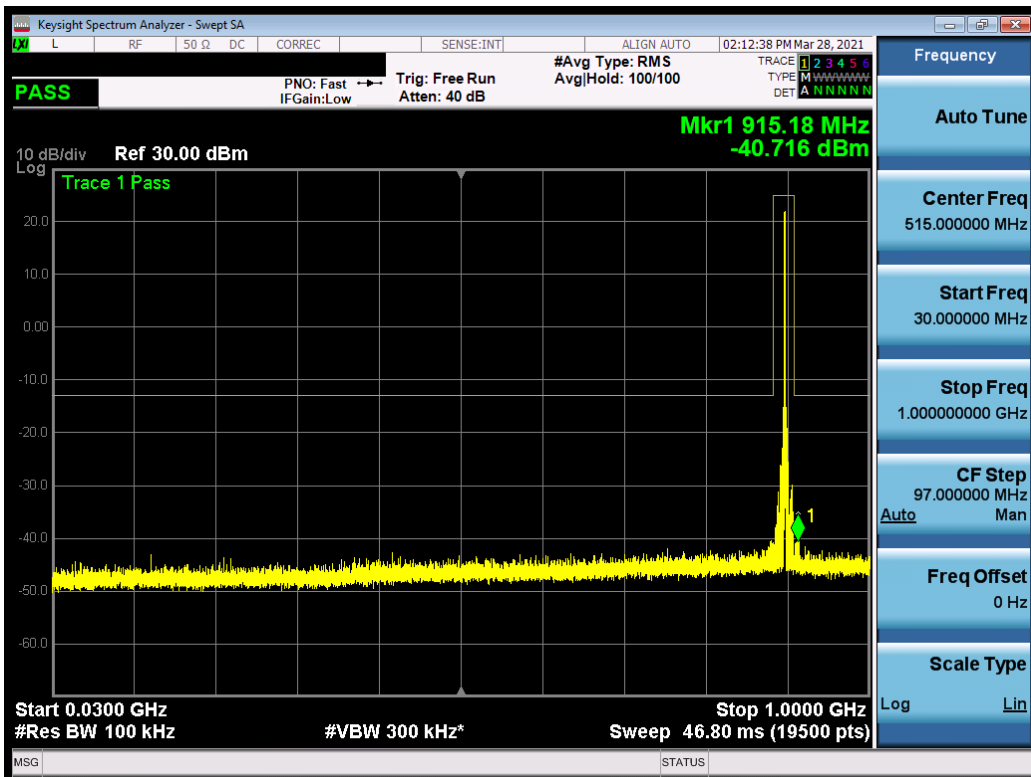


Plot 7-16. Conducted Spurious Plot – Mid Channel (3MHz, QPSK, 1RB, RB Offset 0)

| | | | | |
|--|---|-----------------------------------|--|-----------------------------------|
| FCC ID: RI7ME910G1WW |  Proud to be part of element | MEASUREMENT REPORT |  wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 25 of 41 |

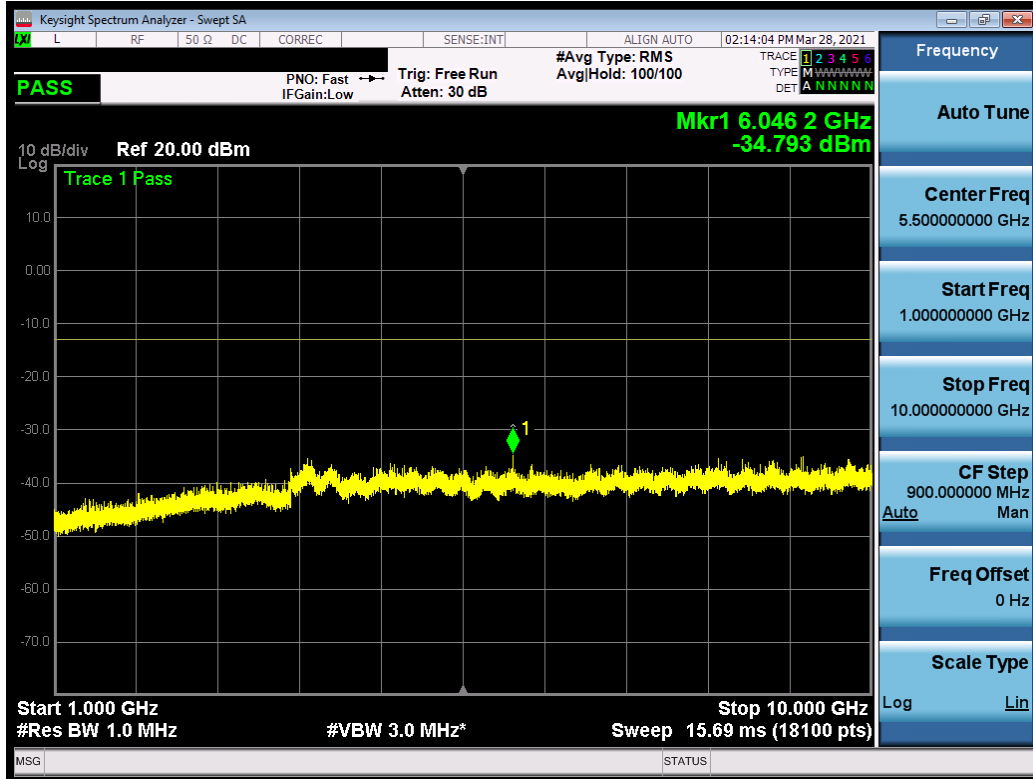


Plot 7-17. Conducted Spurious Plot – Mid Channel (3MHz, QPSK, 1RB, RB Offset 0)

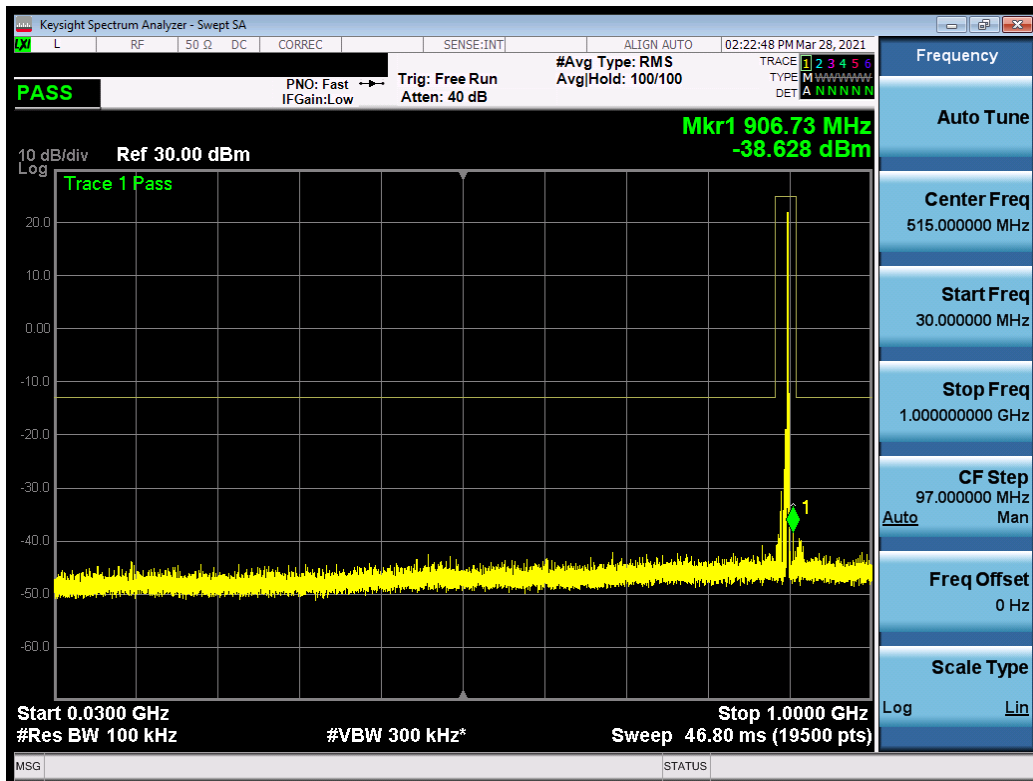


Plot 7-18. Conducted Spurious Plot – Mid Channel (1.4MHz, QPSK, 1RB, RB Offset 0)



| | | | | |
|--|--|-----------------------------------|---------------------------------|-----------------------------------|
| FCC ID: RI7ME910G1WW | PCTEST Proud to be part of element | MEASUREMENT REPORT | Telit wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 26 of 41 |

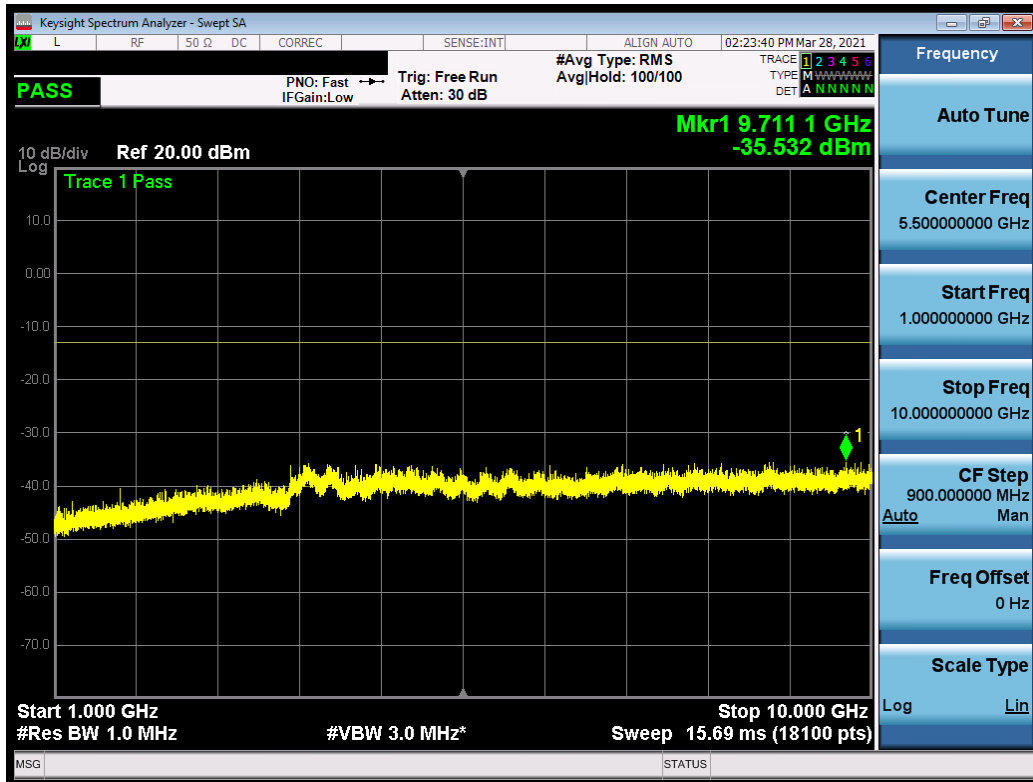


Plot 7-19. Conducted Spurious Plot – Mid Channel (1.4MHz, QPSK, 1RB, RB Offset 0)



Plot 7-20. Conducted Spurious Plot – High Channel (1.4MHz, QPSK, 1RB, RB Offset 0)

| | | | | |
|--|---|-----------------------------------|--|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST Proud to be part of element | MEASUREMENT REPORT |  Telit wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 27 of 41 |



Plot 7-21. Conducted Spurious Plot – High Channel (1.4MHz, QPSK, 1RB, RB Offset 0)

| | | | | |
|--|--|-----------------------------------|---------------------------------|-----------------------------------|
| FCC ID: RI7ME910G1WW | PCTEST Proud to be part of element | MEASUREMENT REPORT | Telit wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 28 of 41 |

7.6 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

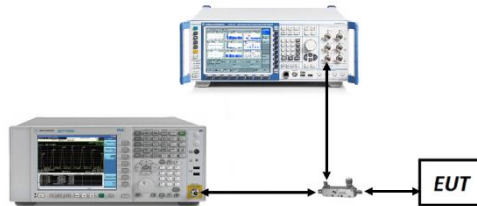


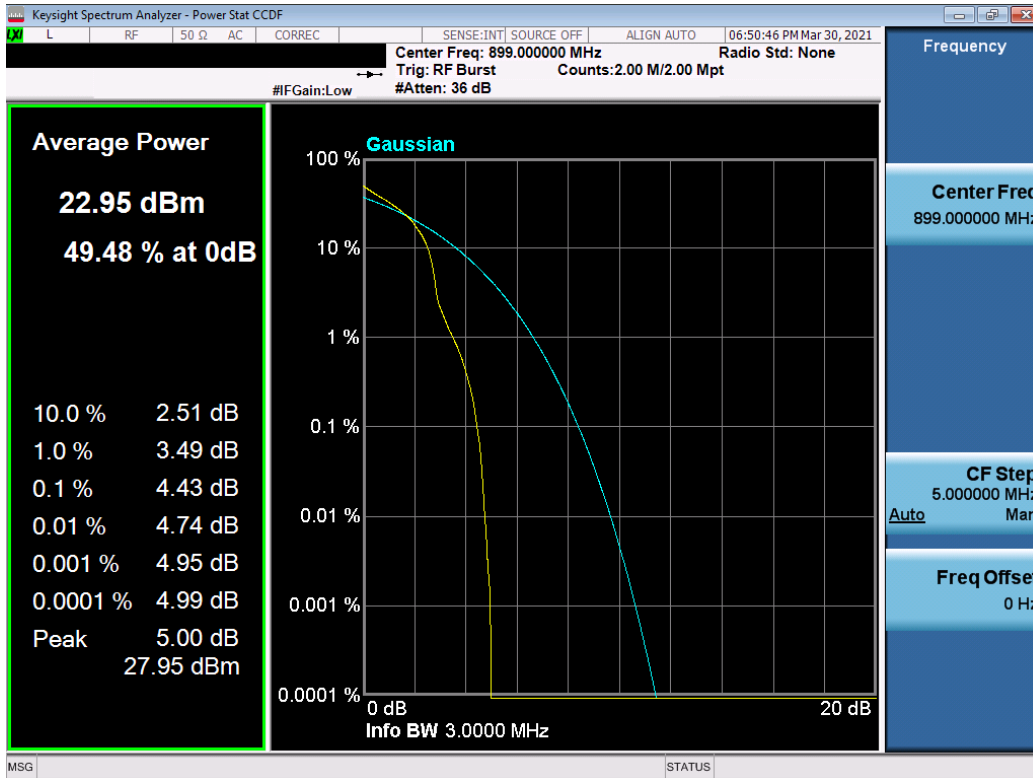


Figure 7-5. Test Instrument & Measurement Setup

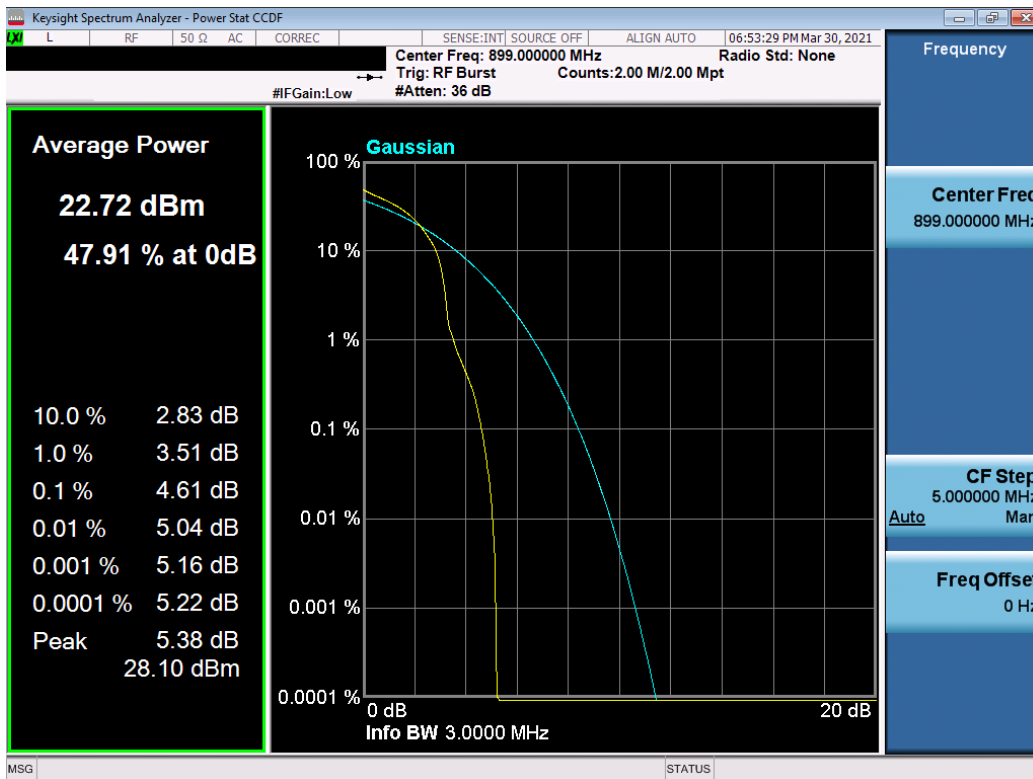
Test Notes

None.



| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.R17 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 29 of 41 |

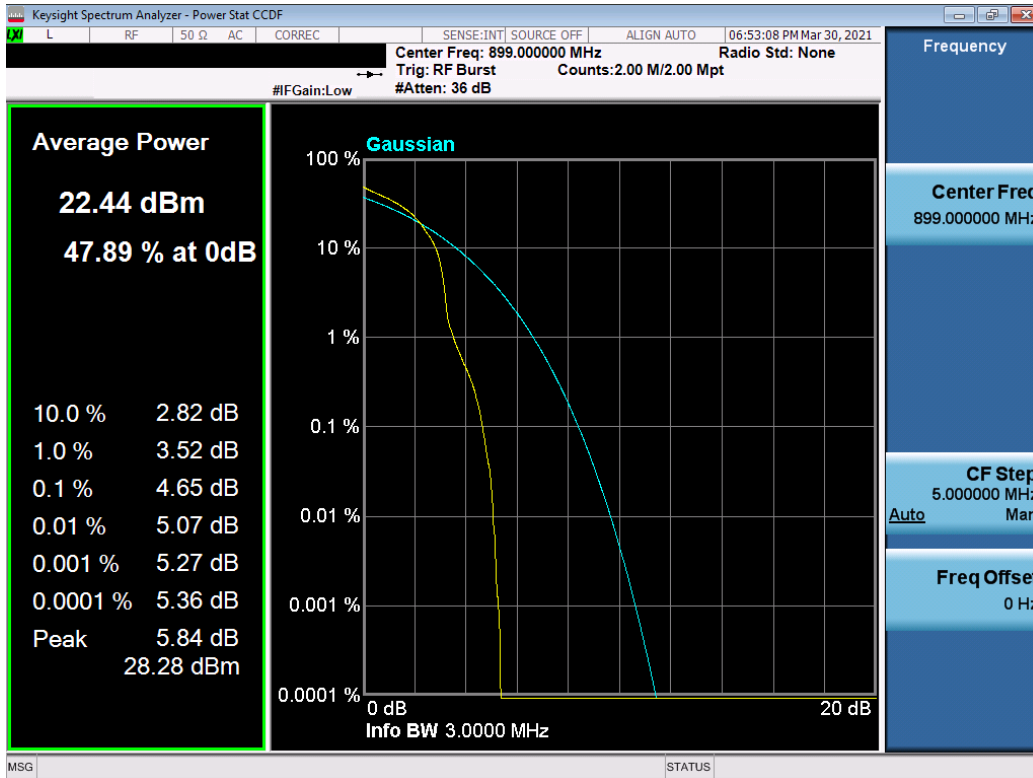


Plot 7-22. Peak to Average Ratio (3MHz, QPSK, RB 6, RB Offset 0, NB=0)

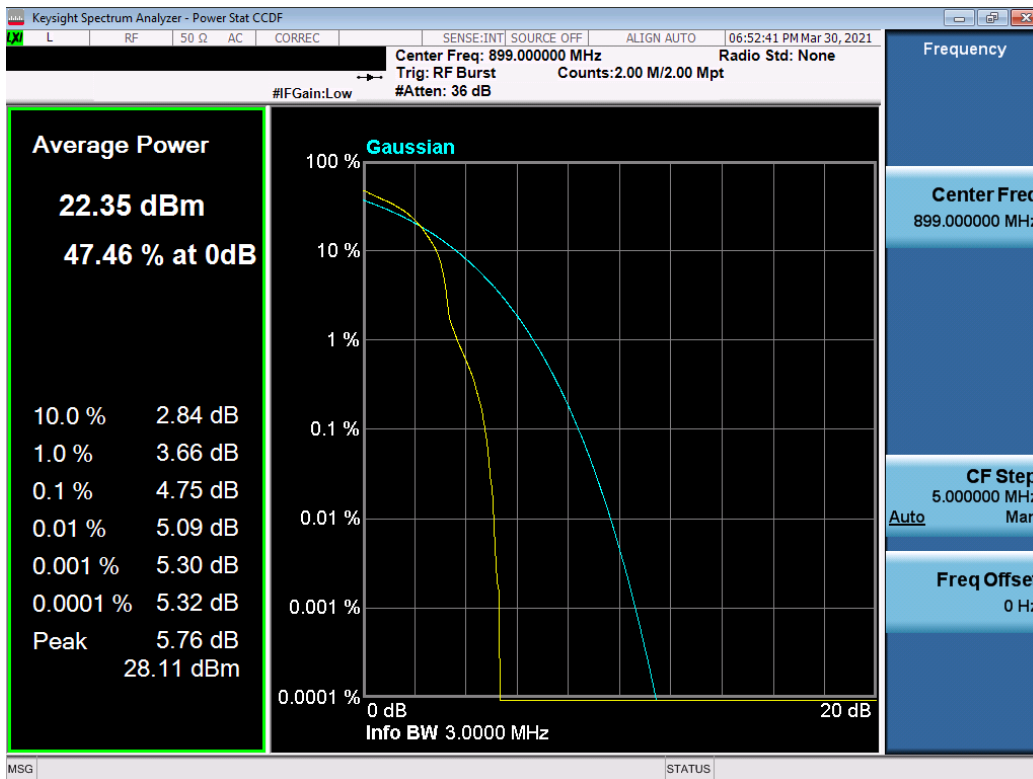


Plot 7-23. Peak to Average Ratio (3MHz, QPSK, RB 6, RB Offset 0, NB=1)



| | | | | |
|--|---|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  | MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 30 of 41 |

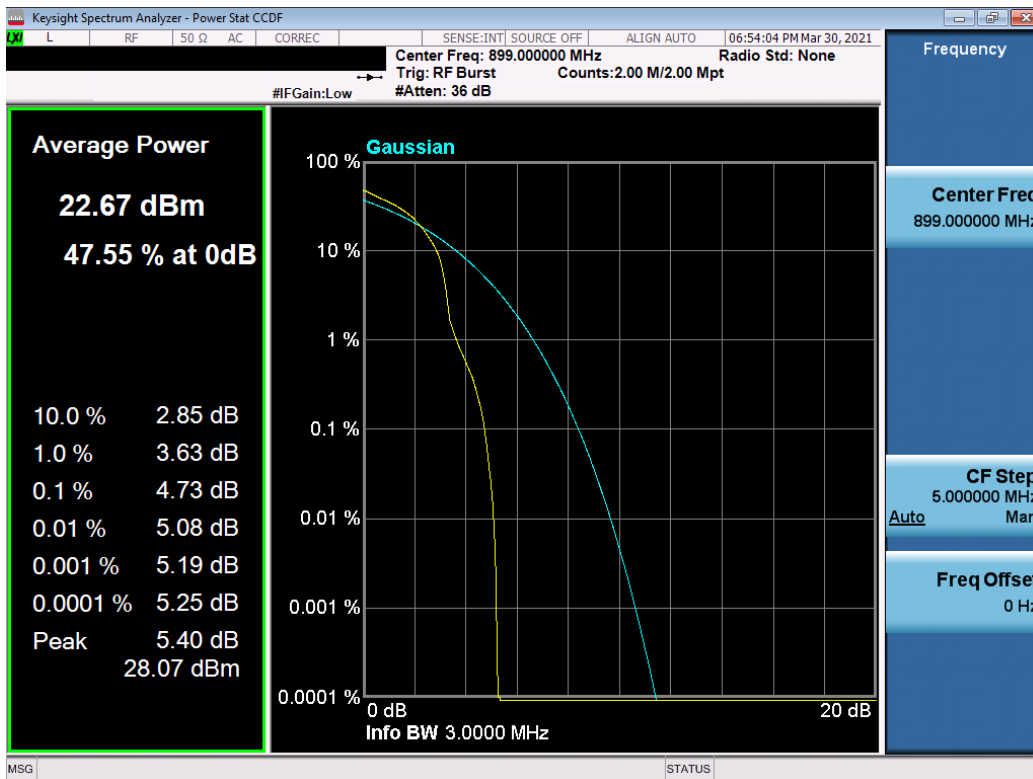
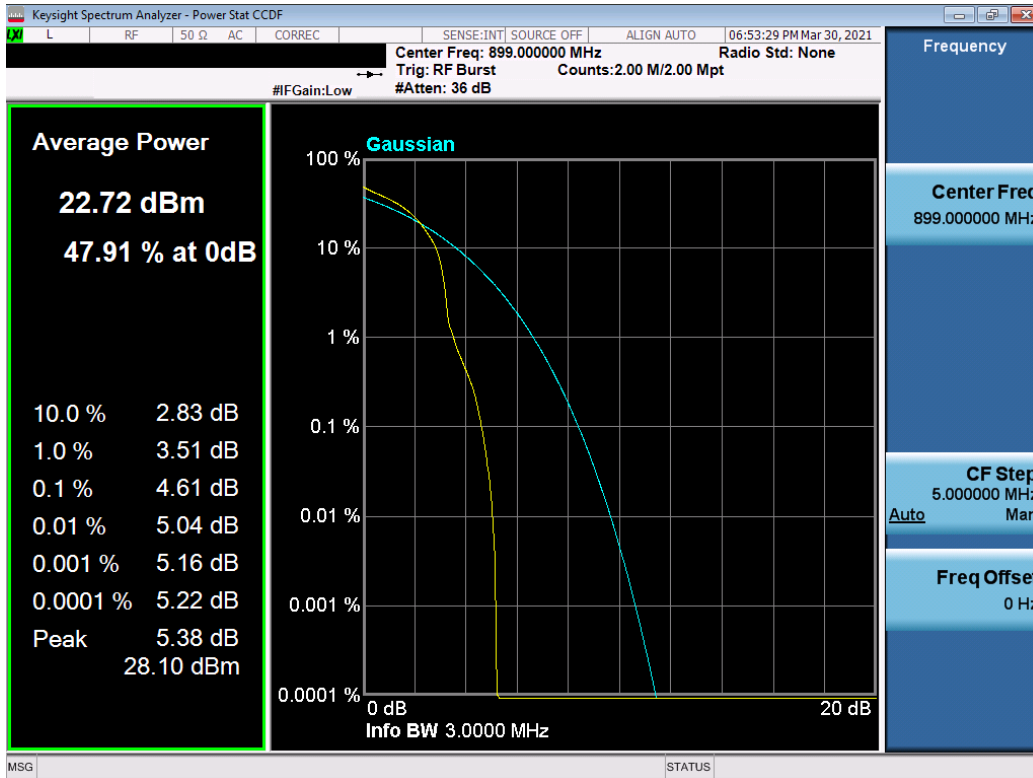




Plot 7-24. Peak to Average Ratio (3MHz, 16-QAM, RB 5, RB Offset 0, NB=0)

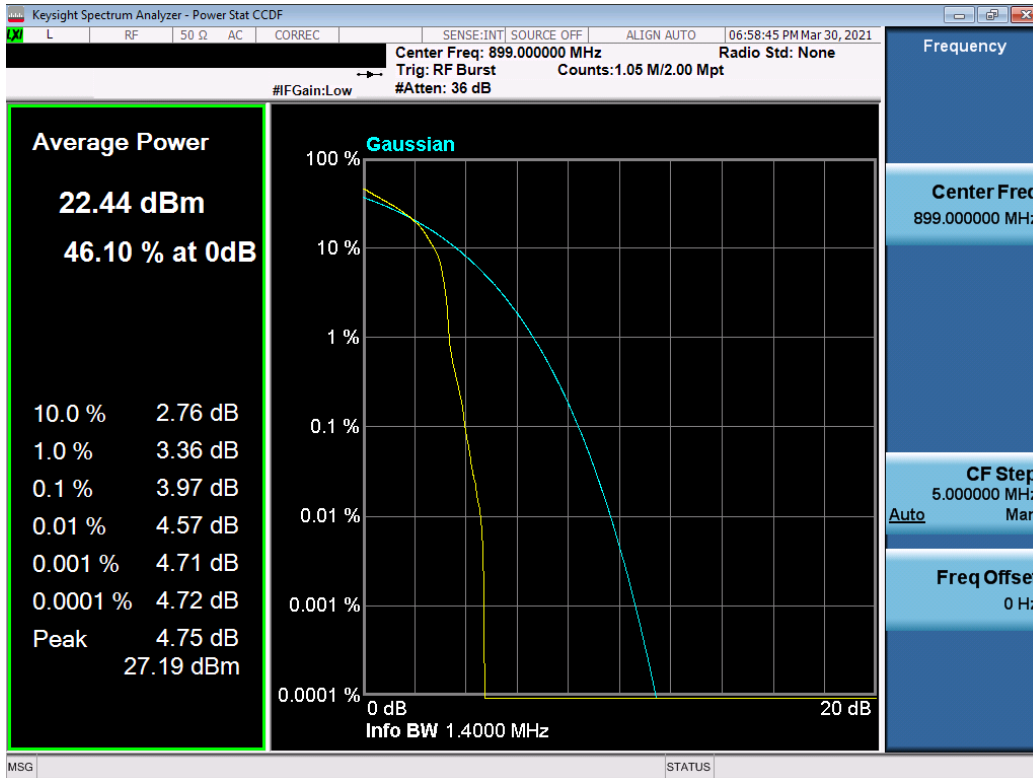


Plot 7-25. Peak to Average Ratio (3MHz, 16-QAM, RB 5, RB Offset 0, NB=1)

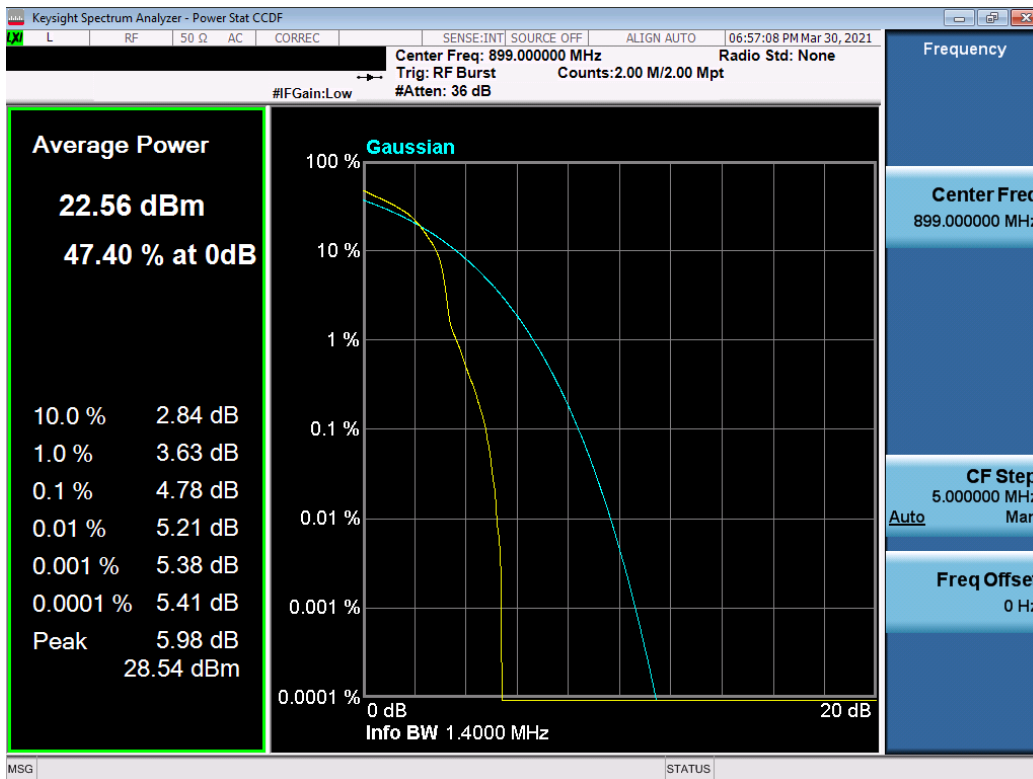
| | | | |
|--|--|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 31 of 41 |





| | | | |
|--|--|--|-----------------------------------|
| FCC ID: RI7ME910G1WW |  MEASUREMENT REPORT |  wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 32 of 41 |

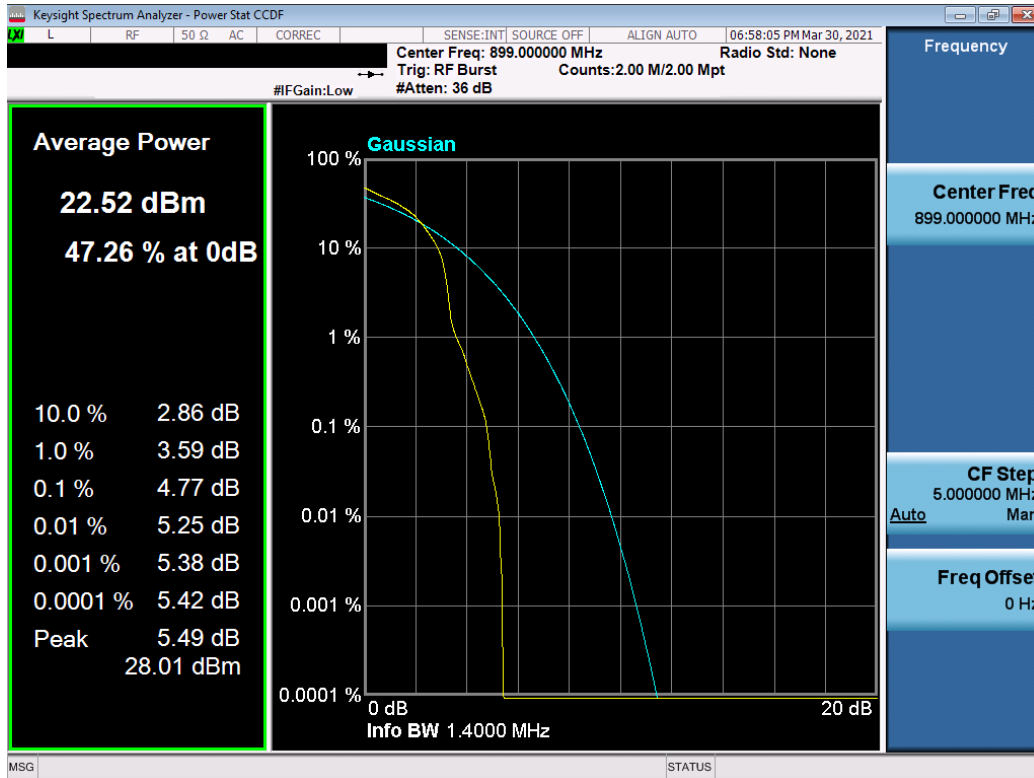


Plot 7-28. Peak to Average Ratio (1.4MHz, QPSK, RB 6, RB Offset 0, NB=0)



Plot 7-29. Peak to Average Ratio (1.4MHz, 16-QAM, RB 5, RB Offset 0, NB=0)

| | | | | |
|--|---|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  | MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 33 of 41 |



Plot 7-30. Peak to Average Ratio (1.4MHz, 16-QAM, RB 5, RB Offset 1, NB=0)

| | | | | |
|--|--|-----------------------------------|------------------------------------|-----------------------------------|
| FCC ID: RI7ME910G1WW | PCTEST Proud to be part of element | MEASUREMENT REPORT | Telit wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 34 of 41 |

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the direct field strength conversion method described in KDB 971168 with the EUT transmitting into a 50Ω termination. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW ≥ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points ≥ 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

| | | | | |
|--|---|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  | MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 35 of 41 | |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

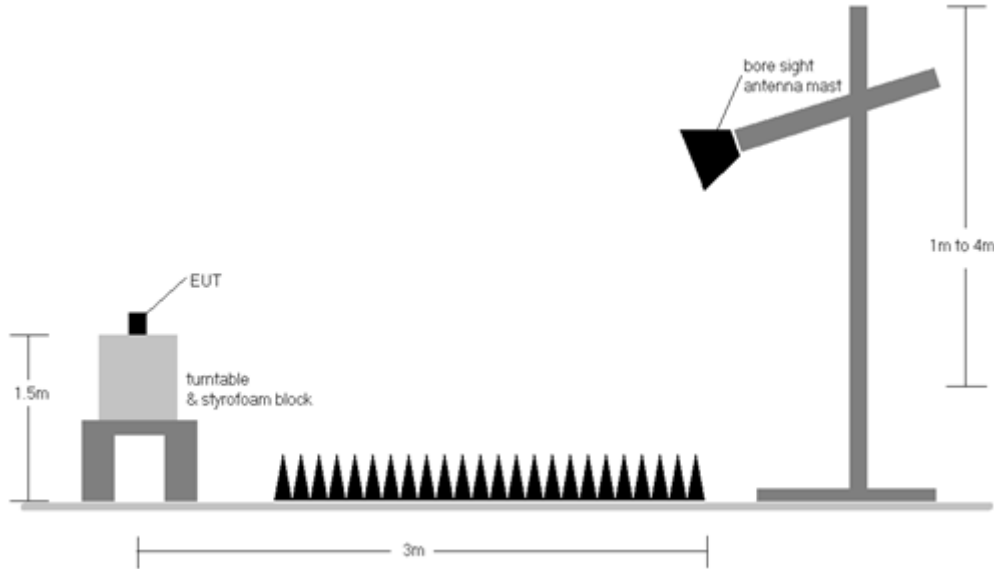
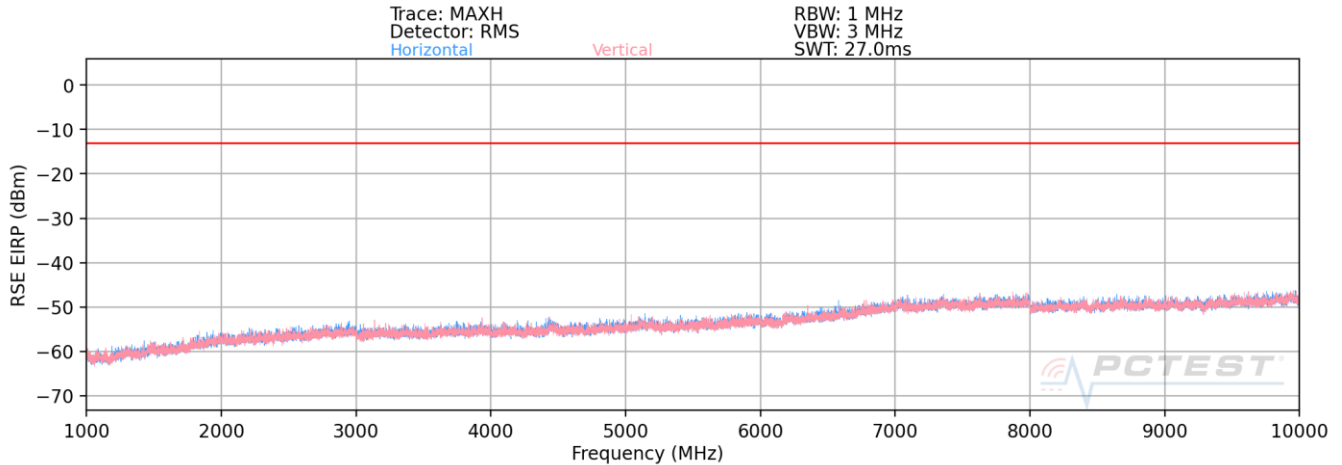


Figure 7-6. Test Instrument & Measurement Setup

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - b) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - d) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

| | | | | |
|--|--|-----------------------------------|---------------------------------|-----------------------------------|
| FCC ID: RI7ME910G1WW | PCTEST Proud to be part of element | MEASUREMENT REPORT | Telit wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 36 of 41 |





Plot 7-31. Radiated Spurious Plot (LTE Band 8- CAT-M1)

| | |
|------------------------|---------------|
| Bandwidth (MHz): | 3 |
| Frequency (MHz): | 899.0 |
| RB / Offset: | 1/3 |
| Detector / Trace Mode: | RMS / Maxhold |
| RBW / VBW: | 1MHz / 3MHz |

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | EIRP Spurious Emission Level [dBm] | Limit [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|------------------------------------|-------------|-------------|
| 1798.0 | V | 327 | 146 | -68.92 | 0.87 | 38.95 | -56.31 | -13.00 | -43.31 |
| 2697.0 | V | - | - | -69.79 | 3.77 | 40.98 | -54.28 | -13.00 | -41.28 |
| 3596.0 | V | - | - | -70.33 | 5.08 | 41.75 | -53.50 | -13.00 | -40.50 |
| 4495.0 | V | - | - | -70.68 | 6.36 | 42.68 | -52.58 | -13.00 | -39.58 |

Table 7-8. Radiated Spurious Data (LTE Band 8- CAT-M1)

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 37 of 41 |

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes



None

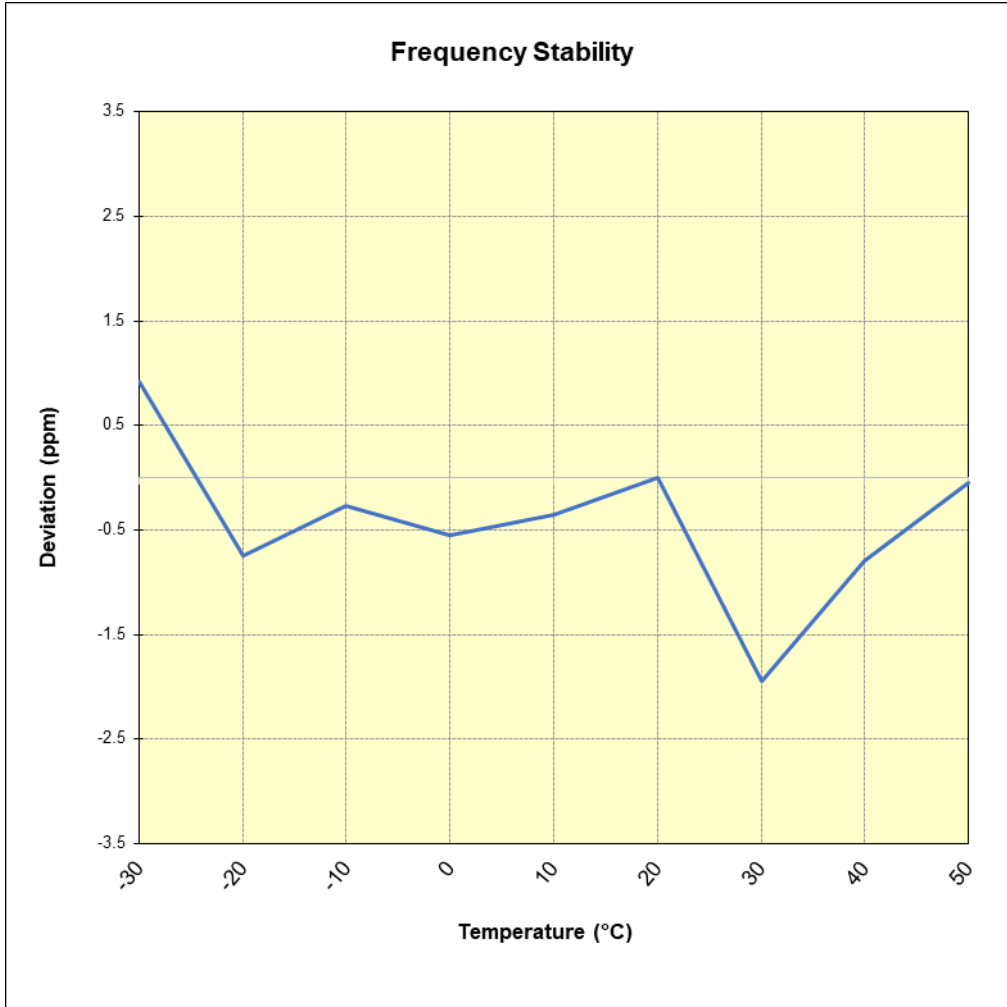
| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  Proud to be part of element | MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 38 of 41 | |

Frequency Stability / Temperature Variation


| Operating Frequency (Hz): | | 899,000,000 | | | |
|---------------------------|-------------|-------------|----------------|-----------------|---------------|
| Ref. Voltage (VDC): | | 3.80 | | | |
| Voltage (%) | Power (VDC) | Temp (°C) | Frequency (Hz) | Freq. Dev. (Hz) | Deviation (%) |
| 100 % | 3.80 | - 30 | 898,010,815 | 821 | 0.0000914 |
| | | - 20 | 898,009,322 | -672 | -0.0000748 |
| | | - 10 | 898,009,748 | -246 | -0.0000274 |
| | | 0 | 898,009,499 | -495 | -0.0000551 |
| | | + 10 | 898,009,680 | -314 | -0.0000350 |
| | | + 20 (Ref) | 898,009,994 | 0 | 0.0000000 |
| | | + 30 | 898,008,244 | -1,750 | -0.0001949 |
| | | + 40 | 898,009,277 | -717 | -0.0000798 |
| | | + 50 | 898,009,952 | -42 | -0.0000047 |
| 85 % | 3.20 | + 20 | 898,009,497 | -497 | -0.0000553 |
| 115 % | 4.30 | + 20 | 898,007,408 | -2,586 | -0.0002880 |

Table 7-9. LTE Band 8 CAT-M1 Frequency Stability Data

| | | | | |
|--|--|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  PCTEST® Proud to be part of element | MEASUREMENT REPORT |  Telit® wireless solutions | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | | Page 39 of 41 |





Plot 7-32. LTE Band 8 CAT-M1 Frequency Stability Chart

| | | | |
|---|---|--|--|
| FCC ID: RI7ME910G1WW |  | MEASUREMENT REPORT | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 40 of 41 |

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Telit Data Terminal Module FCC ID: RI7ME910G1WW** complies with all requirements specified in FCC Part 27 Subpart P of the FCC Rules for LTE CAT-M1 Operation.

| | | | | |
|--|---|-----------------------------------|---|-----------------------------------|
| FCC ID: RI7ME910G1WW |  | MEASUREMENT REPORT |  | Approved by: Technical Manager |
| Test Report S/N: 1M2104010024-02-R1.RI7 | Test Dates: 03/11 - 04/01/2021 | EUT Type: Data Terminal Module | Page 41 of 41 | |