

**FCC LISTED, REGISTRATION
 NUMBER: 720267**

Test report No:

**IC LISTED REGISTRATION
 NUMBER IC 4621A-1**

NIE: 42853RRF.001

**Test report
 REFERENCE STANDARD:
 USA FCC Part 22 & Part 24
 CANADA IC RSS-132, RSS-133**

Identificación del objeto ensayado.....: Identification of item tested	ATOP MODULE 3.5G
Marca Trade	TELIT
Modelo y/o referencia tipo Model and /or type reference	OM12030/100; OM12030/200; OM12030/210
Other identification of the product	/100: FCC ID: RI7OM12030-100; IC: 5131A-OM12030100 /200: FCC ID: RI7OM12030-200; IC: 5131A-OM12030200 /210: FCC ID: RI7OM12030-210; IC: 5131A-OM12030210
Final HW version	B2.6
Final SW version	4.6
Características Features	GSM and GPS functionalities combined with flexible application SW stack. Additional security features on models OM12030/100 and OM12030/200. Additional NFC feature on model OM12030/100
Peticionario Applicant	Telit Communications S.p.A. Via Stazione di Prosecco, 5/B 34010 Sgonico. Trieste. ITALY VAT: IT03711600266 Contact person: William Watté Telephone: +32 16390866 e-mail: William.watte@telit.com
Método de ensayo solicitado, norma.....: Test method requested, standard	USA FCC Part 22 10-01-13 Edition. USA FCC Part 24 10-01-13 Edition. CANADA IC RSS-132 Issue 3, Jan. 2013. CANADA IC RSS-133 Issue 6, Jan. 2013. Measurement Guidance 971168 D01 v02r01 for certification of Licensed Digital Transmitters
Resultado.....: Summary	IN COMPLIANCE
Aprobado por (nombre / cargo y firma) Approved by (name / position & signature)	A. Llamas RF Lab. Manager
Fecha de realización Date of issue	2015-02-18

Formato de informe No.: FDT08_15

Report template No

Index

Competences and guarantees.....	4
General conditions.....	4
Uncertainty	4
Usage of samples.....	4
Test sample description	5
Test samples supplier	5
Testing period.....	5
Environmental conditions.....	5
Remarks and comments.....	6
Testing verdicts	10
Appendix A – Test result for FCC Part 22 & 24/ IC RSS-132, RSS-133	11

Competences and guarantees

AT4 wireless is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 720267.

AT4 wireless is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621A-1.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance program for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the AT4 wireless internal document PODT000.

Usage of samples

Samples undergoing test have been selected by: **the client**.

Sample M/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
39838C/016	Module with external connectors	OM12030/100	---	2014-07-08
39838C/003	External GPS antenna	---	---	2014-03-07
39838C/004	External GPS antenna	---	---	2014-03-07
39838C/005	External NFC antenna board	PN532-C106	---	2014-03-07
39838C/006	External GSM/3G antenna	---	---	2014-03-07

1. Sample M/01 has undergone the test(s).

All tests indicated in appendix A for FCC part 22 and IC RSS-132 and test “RF Output Power (conducted and E.I.R.P.)” for FCC part 24 and IC RSS-133.

Sample M/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
39838C/002	Module with external connectors	OM12030/100	---	2014-03-04
39838C/003	External GPS antenna	---	---	2014-03-07
39838C/004	External GPS antenna	---	---	2014-03-07
39838C/005	External NFC antenna board	PN532-C106	---	2014-03-07
39838C/006	External GSM/3G antenna	---	---	2014-03-07

1. Sample M/01 has undergone the test(s).

All tests indicated in appendix A for FCC part 24 and IC RSS-133 except test “RF Output Power (conducted and E.I.R.P.)”.

Test sample description

The test sample consists of a 33 x 33 RF Module mounted on development board with GSM, 3G, 3.5 G, GPS receiver and NFC.

Test samples supplier

Telit Communications S.p.A.

Via Stazione di Prosecco, 5/B 34010 Sgonico. Trieste. ITALY

VAT: IT03711600266

Contact person: William Watté

Telephone: +32 16390866

e-mail: William.watte@telit.com

Testing period

The performed test started on 2014-03-24 and finished on 2014-08-01.

The tests have been performed at AT4 wireless.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 22.4 °C Max. = 23.5 °C
Relative humidity	Min. = 54.8 % Max. = 56.0 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

In the semianechoic chamber the following limits were not exceeded during the test.

Temperature	Min. = 21.4 °C Max. = 23.1 °C
Relative humidity	Min. = 47.1 % Max. = 48.3 %
Air pressure	Min. = 1019 mbar Max. = 1020 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements the following limits were not exceeded during the test:

Temperature	Min. = 23.7 °C Max. = 24.5 °C
Relative humidity	Min. = 47.9 % Max. = 48.1 %
Air pressure	Min. = 1020 mbar Max. = 1020 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 0,5 Ω

Remarks and comments

1: Testing has been carried out on model OM12030/100 which, according to manufacturer's declarations, presents no electrical behavior differences with respect to models OM12030/200 and OM12030/210. The scanned documents attached below presents the equivalence among models.



TELIT COMMUNICATIONS S.P.A.
VIA STAZIONE DI PROSECCO 5/B
34010, SGONICO, ITALY
Contact: Michel Eyckmans
Phone: +32 16 390 786
e-mail: Michel.Eyckmans@telit.com

Date: 17 February 2015

Declaration letter

We,

TELIT COMMUNICATIONS S.P.A.

hereby declare that the product

Brand name: TELIT
Model name: OM12030/100

Is comparable to the product

Brand name: TELIT
Model name: OM12030/200

We declare that the products indicated here are identical regarding electrical behavior.
The only difference is that on Model name OM12030/200
- the NFC IC has not been assembled
and all the rest of RF capabilities remain the same.

Sincerely,



By: Brian Tucker
Title: VP Quality Management, Auto
Company: Telit Communications Spa
Telephone: +1-919-415-1505
e-mail: Brian.Tucker@telit.com



TELIT COMMUNICATIONS S.P.A.
VIA STAZIONE DI PROSECCO 5/B
34010, SGONICO, ITALY
Contact: Michel Eyckmans
Phone: +32 16 390 786
e-mail: Michel.Eyckmans@telit.com

Date: 17 February 2015

Declaration letter

We,

TELIT COMMUNICATIONS S.P.A.

hereby declare that the product

Brand name: TELIT
Model name: OM12030/100

Is comparable to the product

Brand name: TELIT
Model name: OM12030/210

We declare that the products indicated here are identical regarding electrical behavior.
The only difference is that on Model name OM12030/210

- the NFC IC has not been assembled
- FDD VIII has been removed and FDD IV has been added, by soldering a filter for the alternative band in the same location on the PCB.

And therefore, RF behavior for the common bands (UMTS Band I, Band II and Band V) is absolutely comparable.

Sincerely,



By: Brian Tucker
Title: VP Quality Management, Auto
Company: Telit Communications Spa
Telephone: +1-919-415-1505
e-mail: Brian.Tucker@telit.com

2: Used instrumentation.

Conducted Measurements

		Last Cal. date	Cal. due date
1.	Spectrum analyser Agilent PSA E4440A	2014/05	2016/05
2.	Climatic chamber HERAEUS VM 07/100	2012/10	2015/10
3.	DC power supply R&S NGPE 40/40	2011/11	2014/11
4.	Signal Analyzer R&S FSQ8	2014/05	2016/05

Radiated Measurements

		Last Cal. date	Cal. due date
1.	Semianechoic Absorber Lined Chamber ETS FACT3 200STP	N.A.	N.A.
2.	BiconicalLog antenna ETS LINDGREN 3142E	2014/03	2017/03
3.	Multi Device Controller EMCO 2090	N.A.	N.A.
4.	Double-ridge Guide Horn antenna 1-18 GHz SCHWARZBECK BBHA 9120 D	2013/11	2016/11
5.	SHF-EHF Horn antenna 15-40 GHz Schwarbeck BBHA 9170	2014/03	2017/03
6.	EMI Test Receiver R&S ESU 26	2013/08	2015/08
7.	Spectrum analyser Rohde & Schwarz FSW50	2013/10	2015/10
8.	RF pre-amplifier 10 MHz-6 GHz SCHWARZBECK BBV9743	2014/02	2015/02
9.	RF pre-amplifier 1-18 GHz Schwarzbek BBV 9718	2014/02	2015/02
10.	RF pre-amplifier BONN BLMA 1840-1M 18-40 GHz.	2014/02	2016/02
11.	Universal Radio communication Tester R&S CMU200	2014-02	2016-02

3. GSM mode has not been tested to prove USA FCC Part 22 and Part 24 and Canada IC RSS-132 and RSS-133 compliance because the modulation scheme and the power maximum levels are the same as for GPRS mode.

Taking into account the above comments, testing in GSM mode is redundant for FCC Parts 22 and Part 24 and IC RSS-132 and RSS-133 as it is the same as GPRS mode. GPRS mode has been tested as indicated on the present test report.

4. HSDPA modulation mode has not been tested to prove USA FCC Part 22 and Part 24 and Canada IC RSS-132 and RSS-133 compliance because it is an improved mode of operation only for Downlink (UE reception), but using the normal WCDMA mode for UL (Up Link, UE transmission). Therefore HSDPA has no associated a Power class or modulation scheme different than WCDMA mode for the UL transmission.

Taking into account the above comments, testing in HSDPA modulation mode is redundant for FCC Parts 22 and Part 24 and IC RSS-132 and RSS-133 as it is the same as WCDMA mode as long as UE transmission is concerned. WCDMA modulation mode has been tested as indicated on the present test report.

Testing verdicts

Not applicable	N/A
Pass	P
Fail	F
Not measured	N/M

FCC PART 22/IC RSS-132 PARAGRAPH	VERDICT			
	NA	P	F	NM
Clause 22.913/RSS-132 Clause 4.4: RF output power		P		
Clause 2.1047/RSS-132 Clause 4.2: Modulation characteristics		P		
Clause 22.355/RSS-132 Clause 4.3: Frequency stability		P		
Clause 2.1049: Occupied Bandwidth		P		
Clause 22.917/RSS-132 Clause 4.5: Spurious emissions at antenna terminals		P		
Clause 22.917/RSS-132 Clause 4.5: Radiated emissions		P		

FCC PART 24/IC RSS-133 PARAGRAPH	VERDICT			
	NA	P	F	NM
Clause 24.232/RSS-133 Clause 6.4: RF output power		P		
Clause 2.1047/RSS-133 Clause 6.2: Modulation characteristics		P		
Clause 24.235/RSS-133 Clause 6.3: Frequency stability		P		
Clause 2.1049: Occupied Bandwidth		P		
Clause 24.238/RSS-133 Clause 6.5: Spurious emissions at antenna terminals		P		
Clause 24.238/RSS-133 Clause 6.5: Radiated emissions		P		

Appendix A – Test result for FCC Part 22 & 24/ IC RSS-132, RSS-133

INDEX

TEST RESULTS FOR FCC PART 22 AND IC RSS-132.....	13
TEST CONDITIONS	13
RF Output Power (conducted and E.R.P.).....	14
Modulation Characteristics.....	22
Frequency Stability.....	25
Occupied Bandwidth	28
Spurious emissions at antenna terminals	35
Spurious emissions at antenna terminals at Block Edges.....	43
Radiated emissions	48
TEST RESULTS FOR FCC PART 24 AND RSS-133.....	60
TEST CONDITIONS	60
RF Output Power (conducted and E.I.R.P.).....	61
Modulation Characteristics.....	75
Frequency Stability.....	78
Occupied Bandwidth	81
Spurious emissions at antenna terminals	88
Spurious emissions at antenna terminals at Block Edges.....	96
Radiated emissions	101

TEST RESULTS FOR FCC PART 22 AND IC RSS-132

TEST CONDITIONS

Power supply (V):

$$V_{\text{nom}} = 3.8 \text{ Vdc}$$

$$V_{\text{max}} = 4.4 \text{ Vdc}$$

$$V_{\text{min}} = 3.4 \text{ Vdc}$$

The subscripts nom, min and max indicate voltage test conditions (nominal, minimum and maximum respectively, as declared by the applicant).

Type of power supply = DC Voltage from external power supply

Type of antenna = external connectable antenna

TEST FREQUENCIES:

GPRS AND EDGE MODULATION

Lowest channel (128): 824.2 MHz

Middle channel (190): 836.6 MHz

Highest channel (251): 848.8 MHz

WCDMA AND HSUPA MODULATION

Lowest channel (4132): 826.4 MHz

Middle channel (4182): 836.4 MHz

Highest channel (4233): 846.6 MHz

RF Output Power (conducted and E.R.P.)

SPECIFICATION

§2.1046 and §22.913. RSS-132 Clause 4.4.

The Effective Radiated Power (E.R.P.) of mobile transmitter and auxiliary test transmitter must not exceed 7 Watts (38.45 dBm).

METHOD

The conducted RF output power measurements were made at the RF output terminals of the EUT using an attenuator, power splitter and spectrum analyser. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT and different modes of modulation.

The maximum conducted output power was measured using a spectrum analyzer according to point 5.2.1 of Guidance 971168 D01 Power Meas License Digital Systems v02r01.

The maximum effective radiated power e.r.p. is calculated by adding the declared maximum antenna gain (dBd).

RESULTS

Maximum declared antenna gain (dBi) = 2.14 (-0.01 dBd).

MAXIMUM OUTPUT POWER (CONDUCTED). See plots in next pages.

GPRS MODULATION

Channel	Lowest	Middle	Highest
Measured maximum average power (dBm) at antenna port	31.76	31.74	31.94
Maximum effective radiated power E.R.P. (dBm)	31.75	31.73	31.93
Measurement uncertainty (dB)	±0.5		

EDGE MODULATION

Channel	Lowest	Middle	Highest
Measured maximum average power (dBm) at antenna port	25.37	25.20	25.26
Maximum effective radiated power E.R.P. (dBm)	25.36	25.19	25.25
Measurement uncertainty (dB)	±0.5		

WCDMA MODULATION

Channel	Lowest	Middle	Highest
Measured maximum average power (dBm) at antenna port	23.01	22.99	22.62
Maximum effective radiated power E.R.P. (dBm)	23.00	22.98	22.61
Measurement uncertainty (dB)	±0.5		

HSUPA MODULATION


Channel	Lowest	Middle	Highest
Measured maximum average power (dBm) at antenna port	20.94	20.75	20.63
Maximum effective radiated power E.R.P. (dBm)	20.93	20.74	20.62
Measurement uncertainty (dB)	±0.5		

Verdict: PASS


AVERAGE OUTPUT POWER (CONDUCTED).

GPRS MODULATION


Lowest Channel

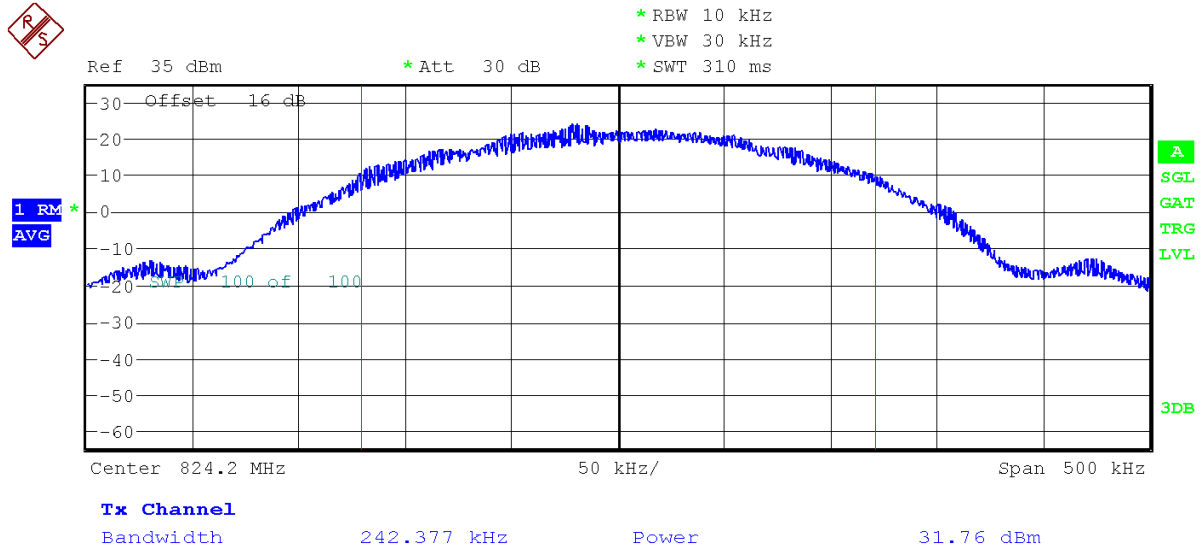

Middle Channel

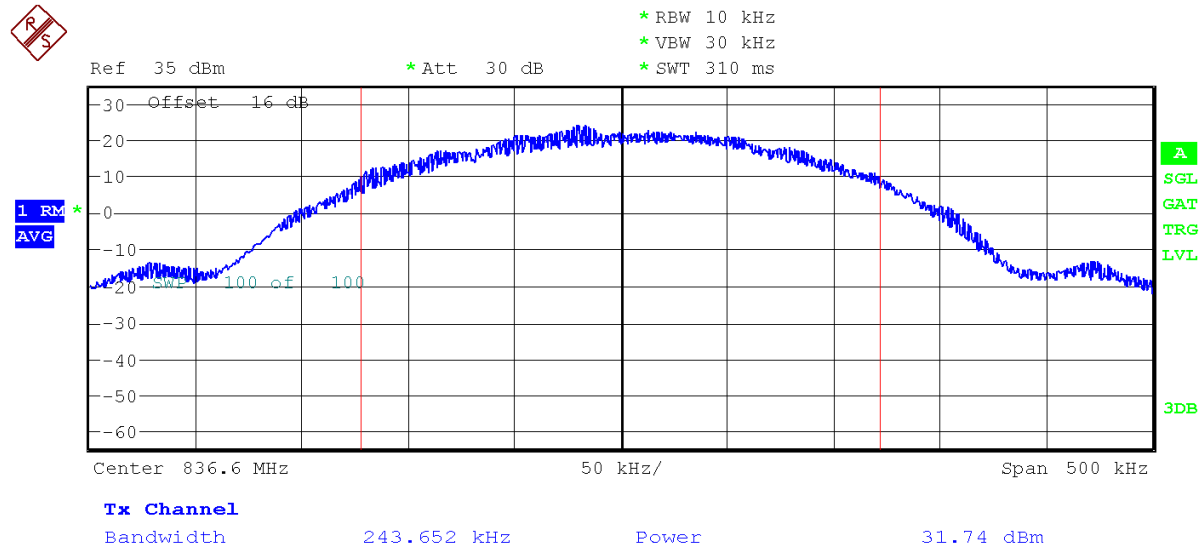


Highest Channel

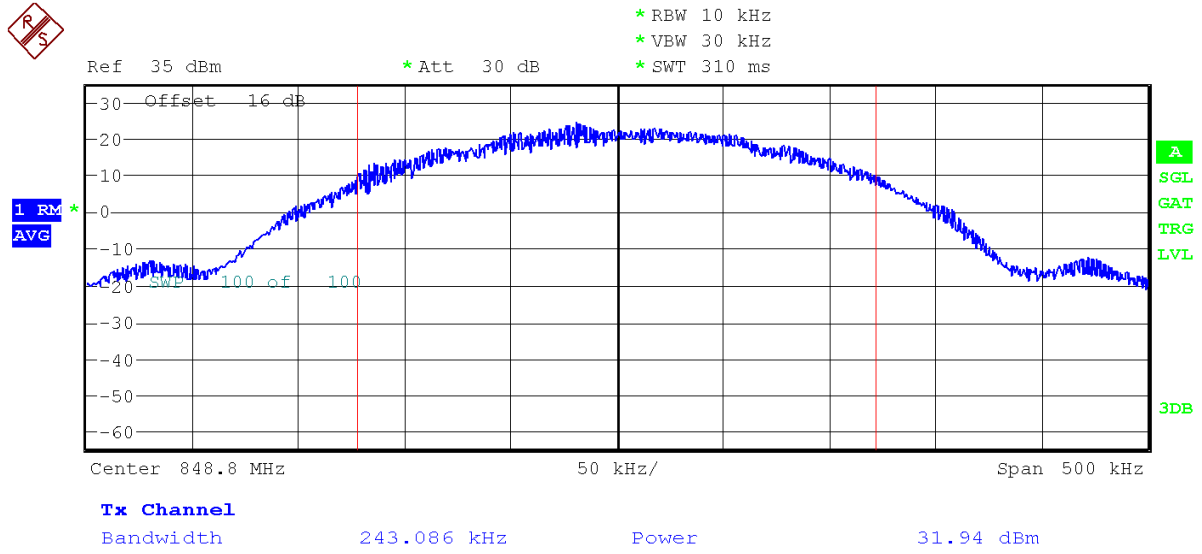


EDGE MODULATION


Lowest Channel

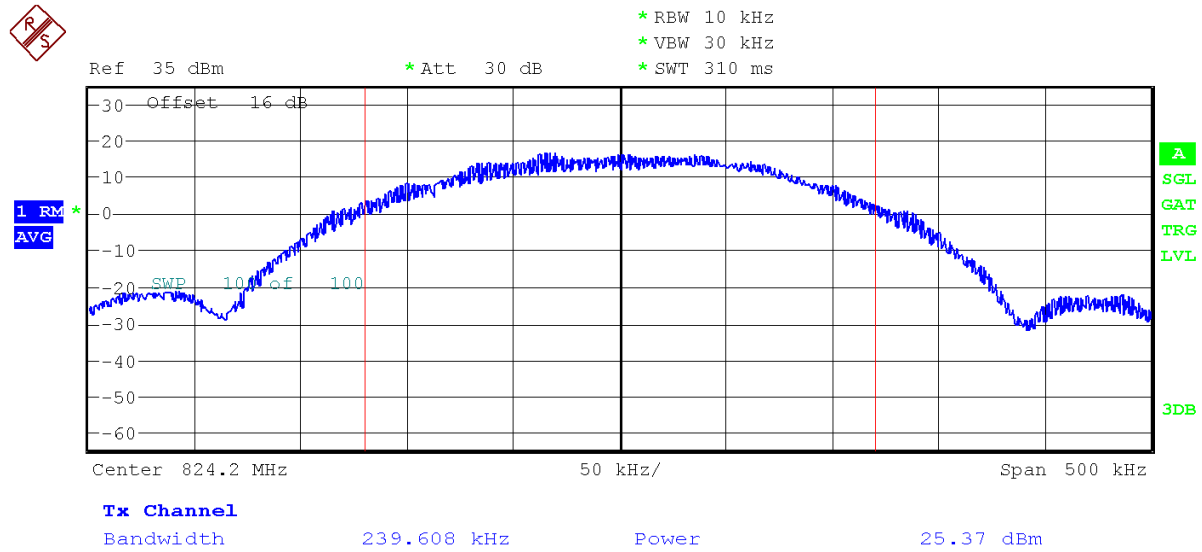

Middle Channel

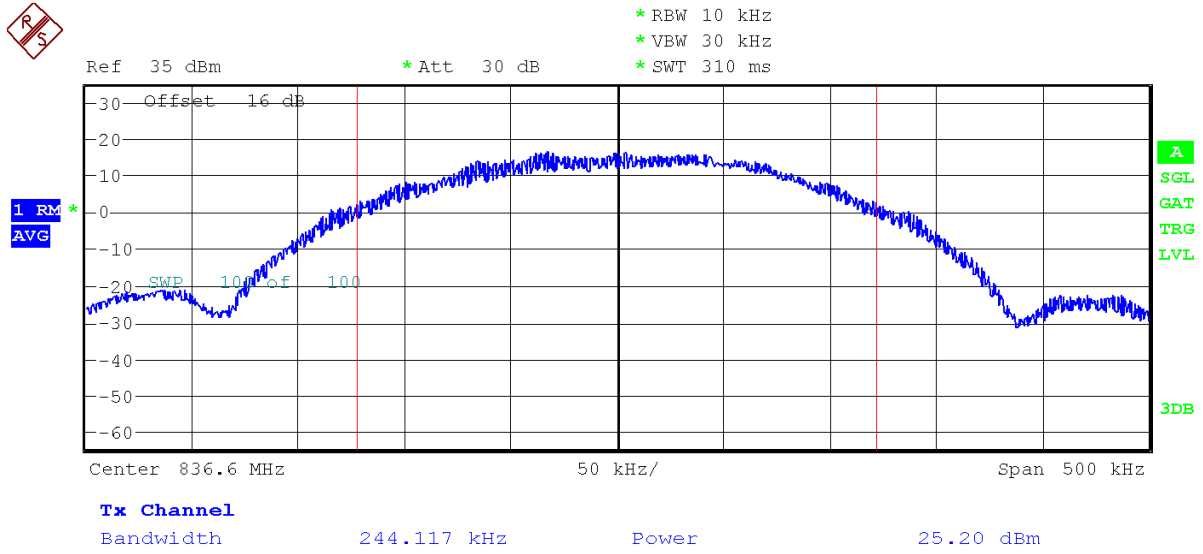


Highest Channel

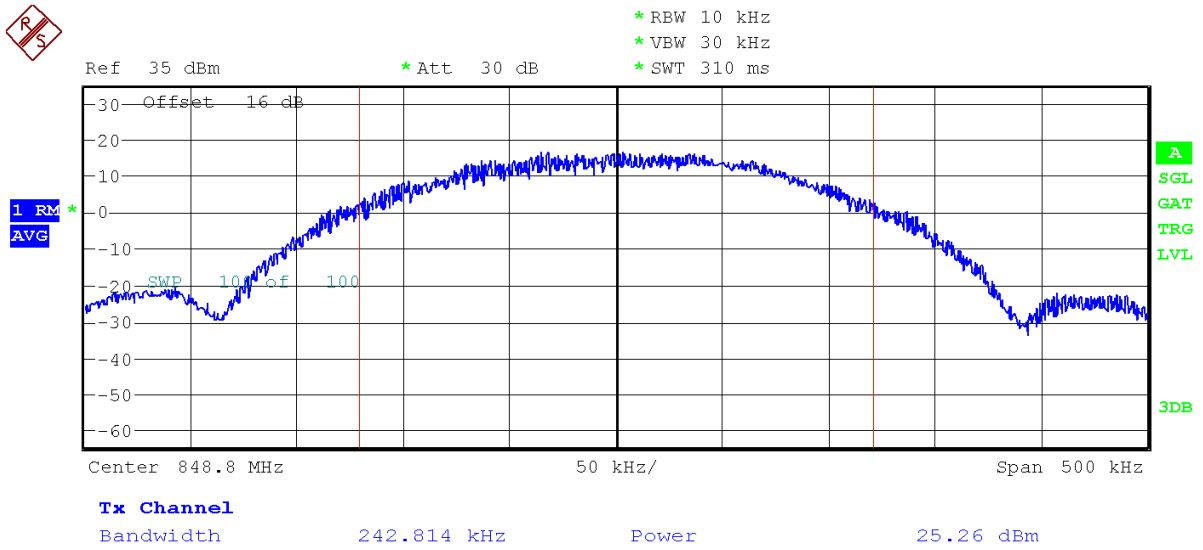


WCDMA MODULATION


Lowest Channel

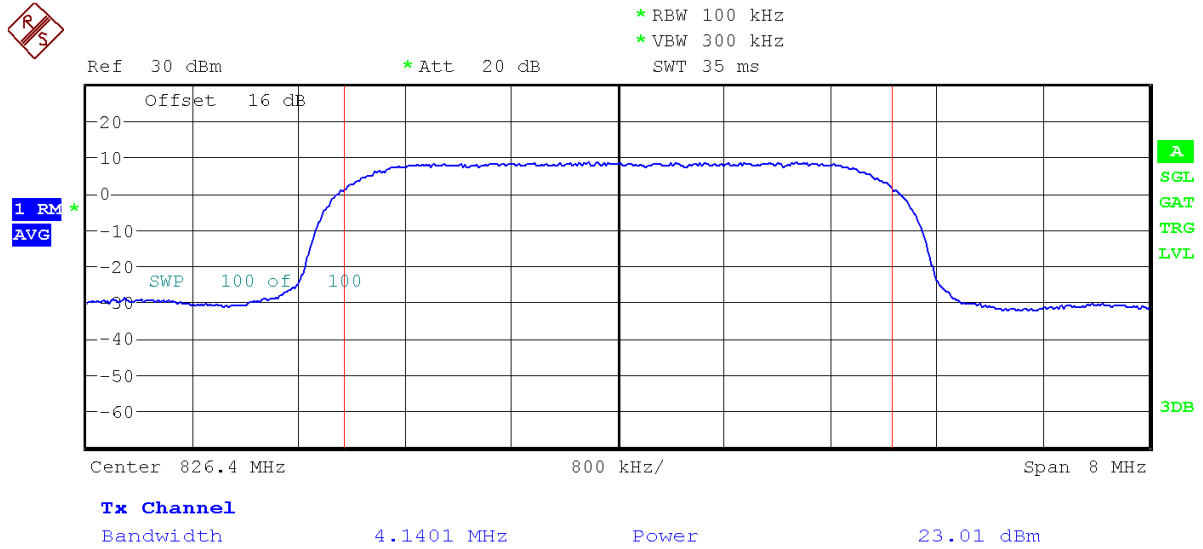

Middle Channel

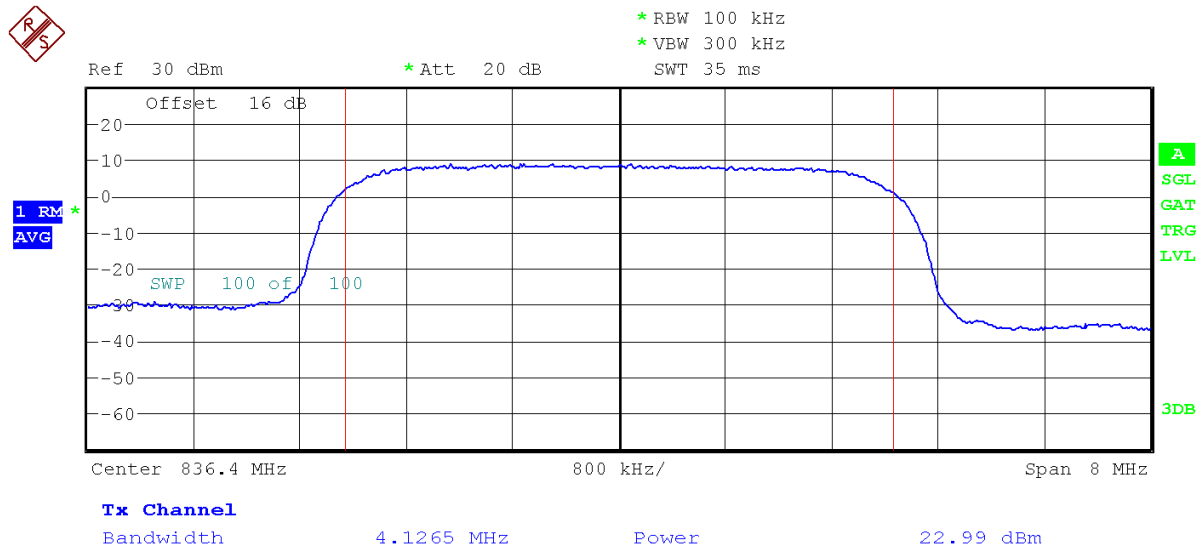


Highest Channel

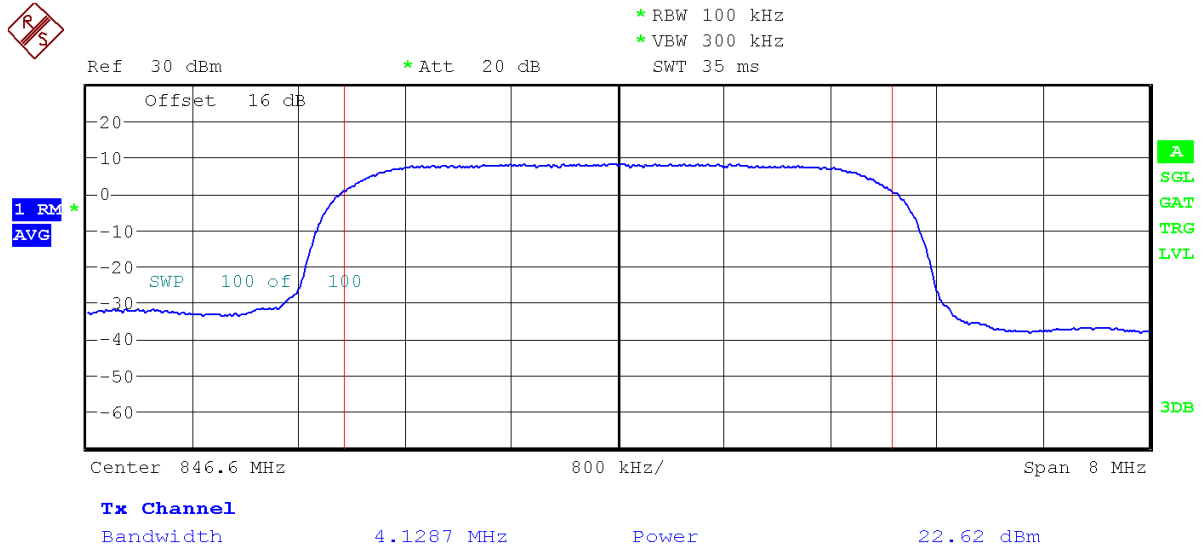


HSUPA MODULATION


Lowest Channel

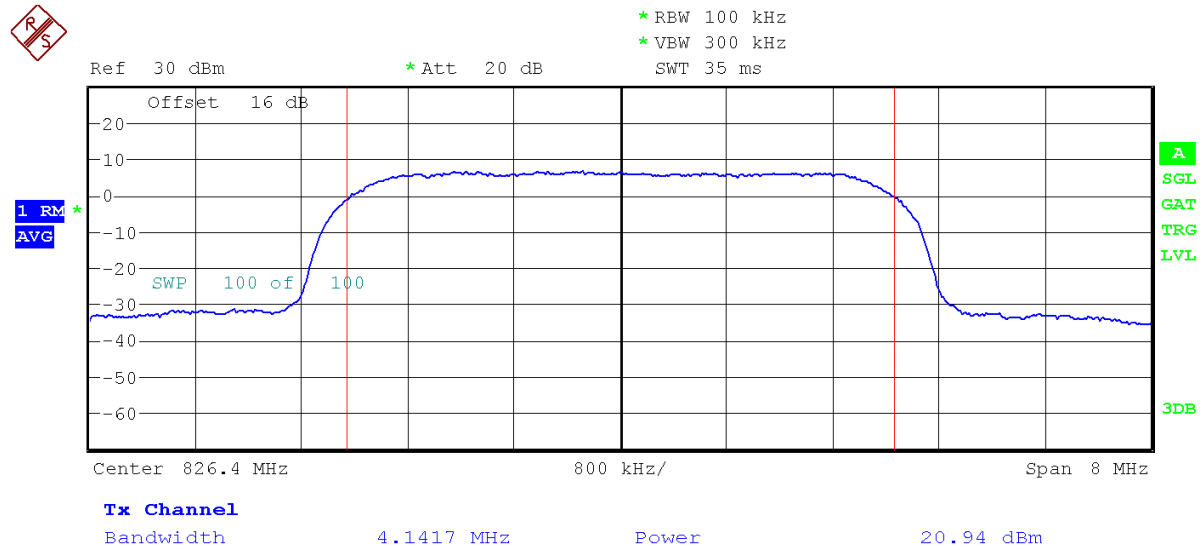

Middle Channel

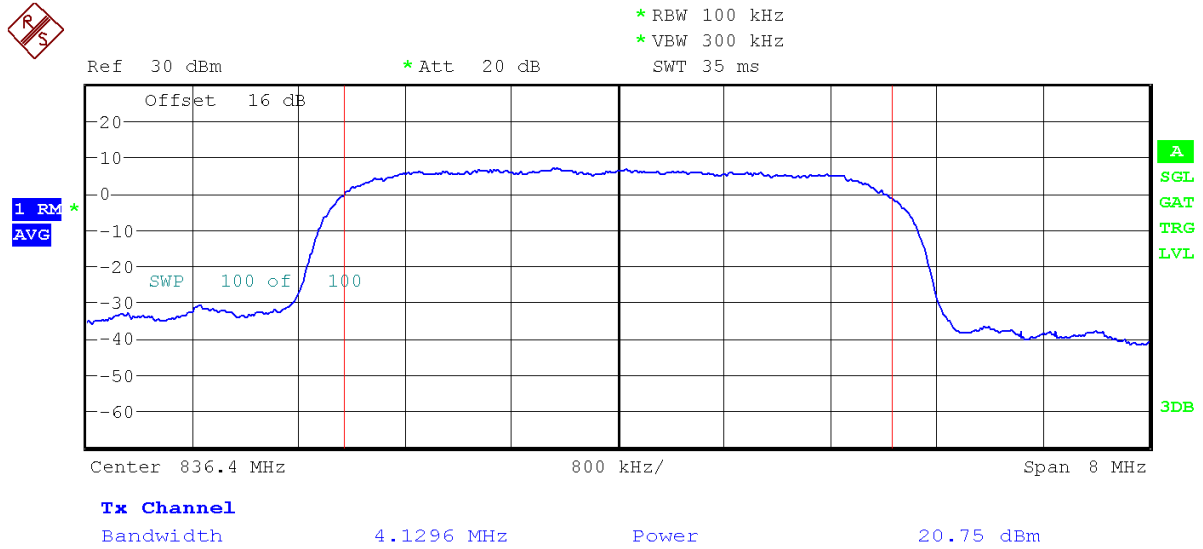

Highest Channel

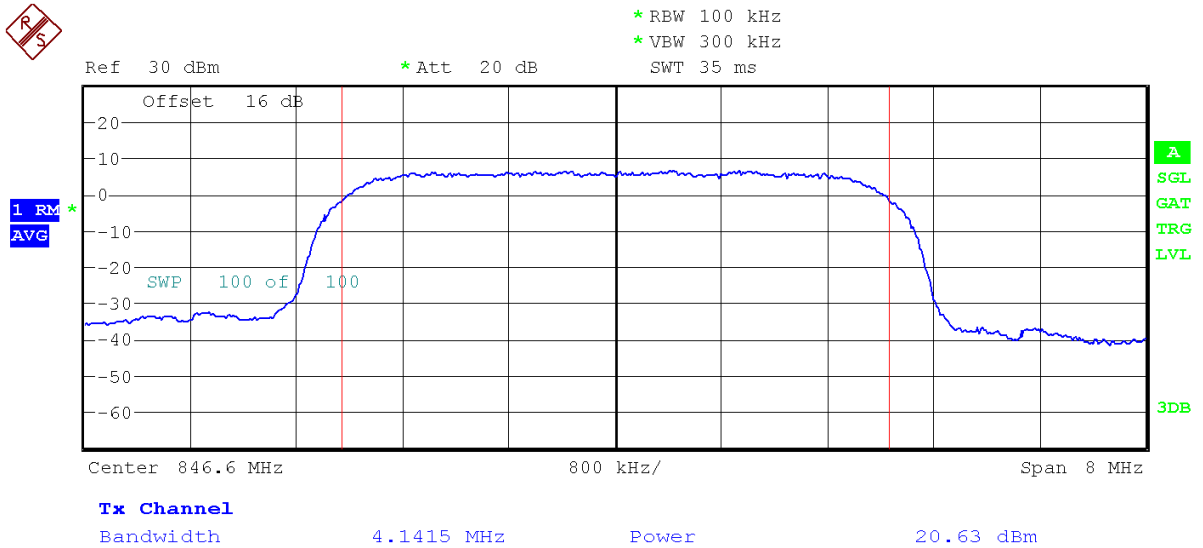

Modulation Characteristics

SPECIFICATION

§2.1047. RSS-132 Clause 4.2.


METHOD

The EUT operates with GPRS (GMSK), EDGE (8-PSK), WCDMA (QPSK) and HSUPA (QPSK) modes, in which the information is digitised and coded into a bit stream.


RESULTS

The following plot shows the modulation schemes in the EUT.


GPRS MODULATION

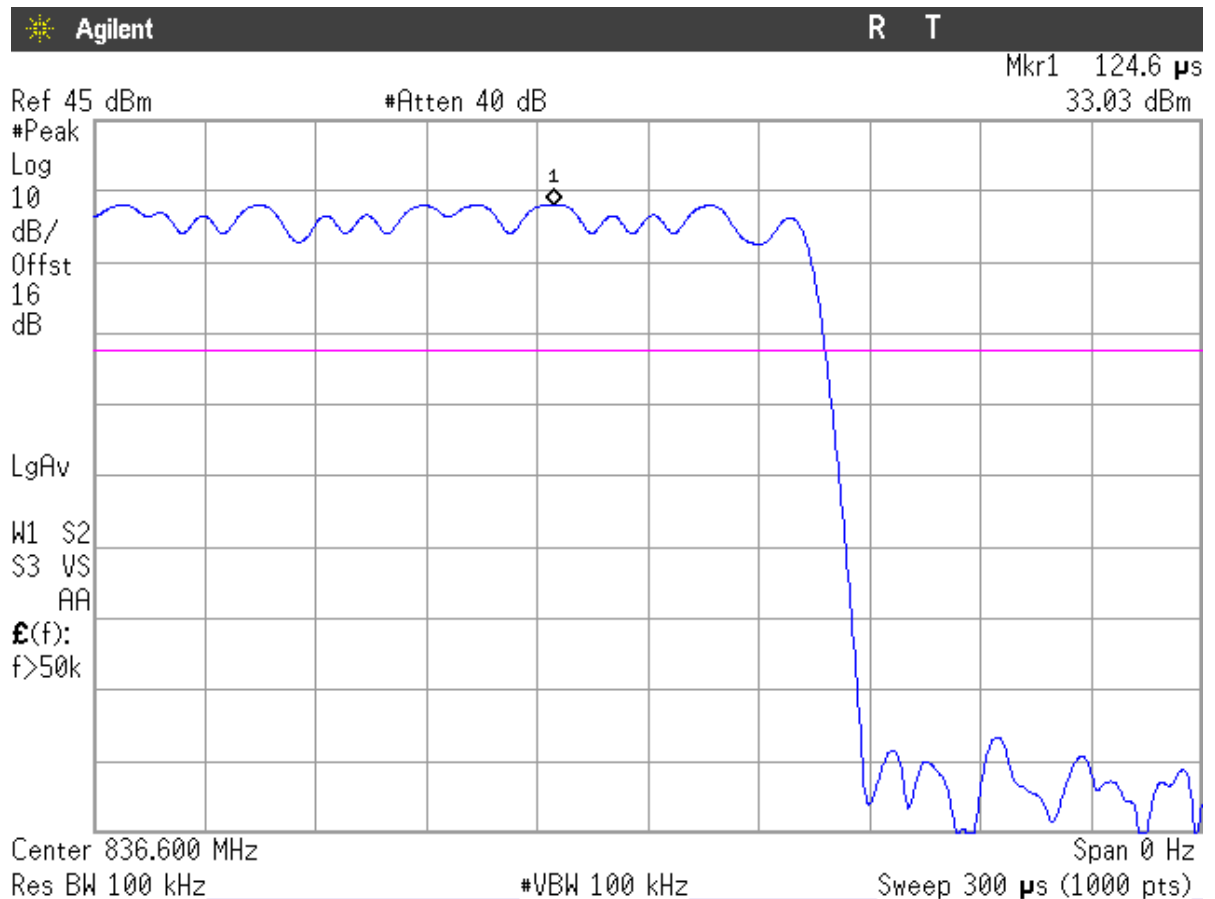


EDGE MODULATION

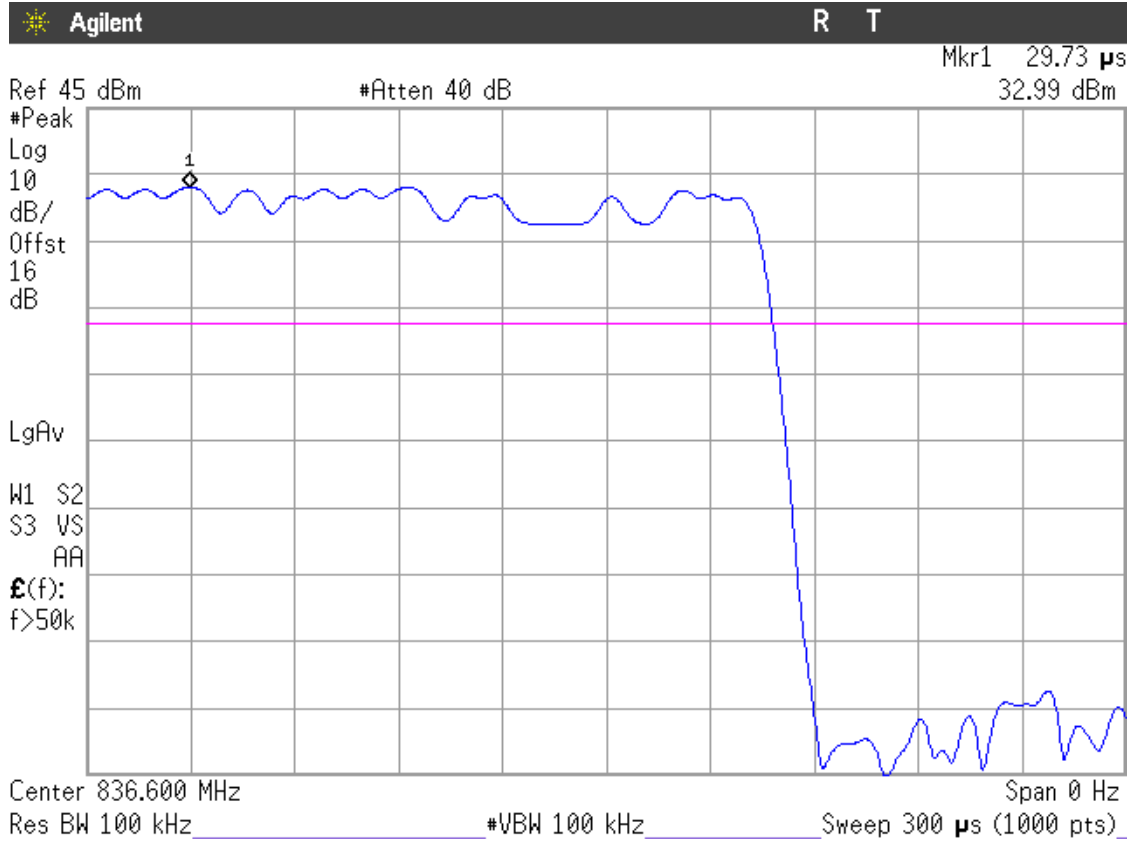

WCDMA MODULATION

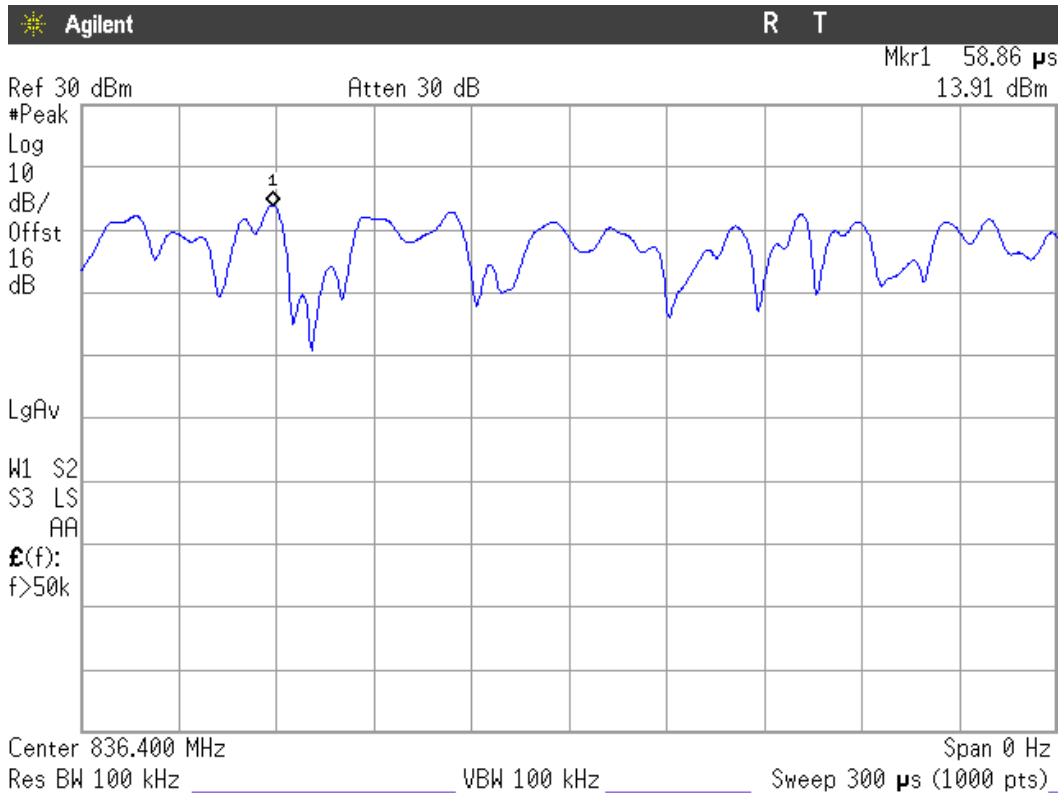

HSUPA MODULATION

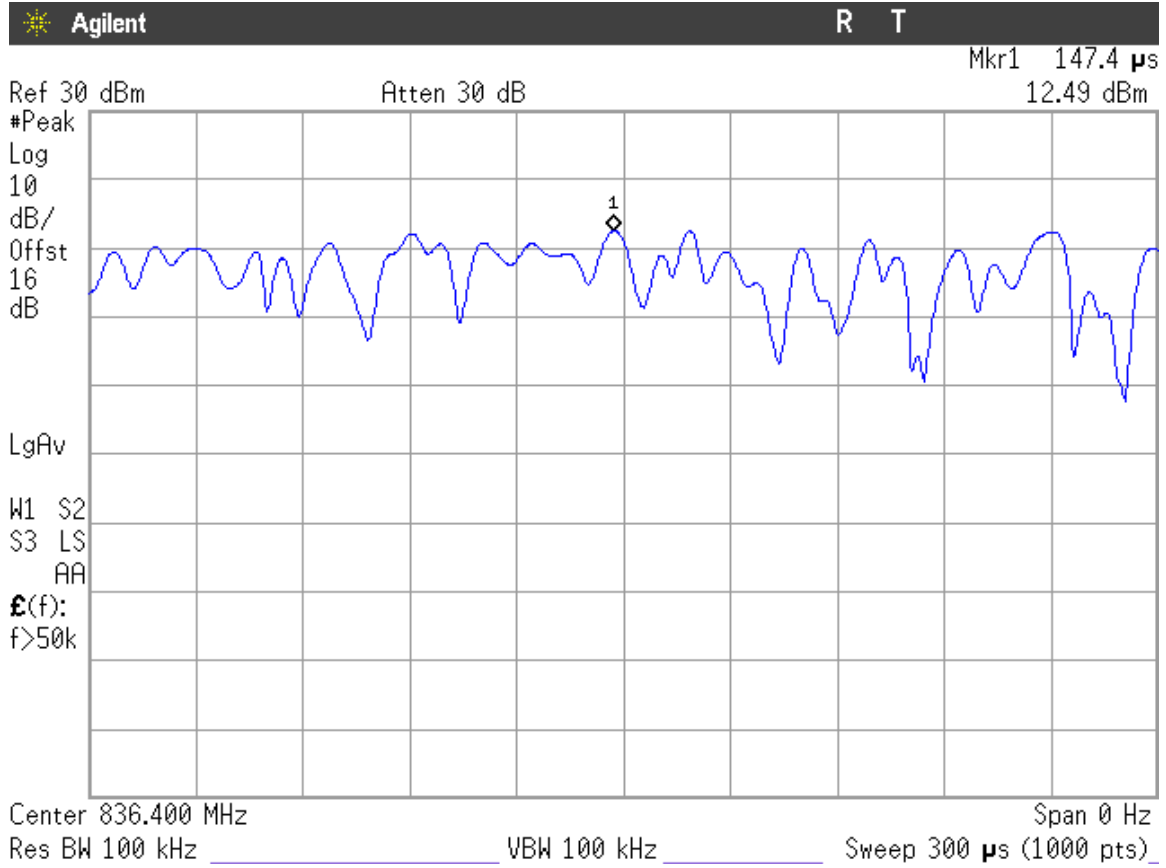

Frequency Stability

SPECIFICATION

§2.1055 and §22.355. RSS-132 Clause 4.3.

METHOD

The frequency tolerance measurements over temperature variations were made over the temperature range of –30°C to +50°C. The EUT was placed inside a climatic chamber and the temperature was raised hourly in 10°C steps from –30°C up to +50°C.

The EUT was set in “call mode” in the middle channel using the Universal Radio Communication tester R&S CMU200 and the maximum frequency error was measured using the built-in calibrated frequency meter of CMU200.

RESULTS

Frequency stability over temperature variations.

GPRS MODULATION

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
+50	-16	-0.0191	-0.00000191
+40	-10	-0.0120	-0.00000120
+30	-23	-0.0275	-0.00000275
+20	-2	-0.0024	-0.00000024
+10	5	0.0060	0.00000060
0	11	0.0131	0.00000131
-10	6	0.0072	0.00000072
-20	3	0.0036	0.00000036
-30	-26	-0.0311	-0.00000311

EDGE MODULATION

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
+50	-22	-0.0263	-0.00000263
+40	24	0.0287	0.00000287
+30	-22	-0.0263	-0.00000263
+20	5	0.0060	0.00000060
+10	17	0.0203	0.00000203
0	-18	-0.0215	-0.00000215
-10	35	0.0418	0.00000418
-20	-38	-0.0454	-0.00000454
-30	26	0.0311	0.00000311

WCDMA AND HSUPA MODULATION

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
+50	-22	-0.0263	-0.00000263
+40	-19	-0.0227	-0.00000227
+30	-21	-0.0251	-0.00000251
+20	-20	-0.0239	-0.00000239
+10	15	0.0179	0.00000179
0	-19	-0.0227	-0.00000227
-10	-16	-0.0191	-0.00000191
-20	-10	-0.0120	-0.00000120
-30	-11	-0.0132	-0.00000132

Frequency stability over voltage variations.

GPRS MODULATION

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	4.4	-27	-0.0322	-0.00000322
Vmin	3.4	3	0.0036	0.00000036

EDGE MODULATION

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	4.4	-45	-0.0538	-0.00000538
Vmin	3.4	27	0.0322	0.00000322

WCDMA AND HSUPA MODULATION

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	4.4	-18	-0.0215	-0.00000215
Vmin	3.4	-18	-0.0215	-0.00000215

Occupied Bandwidth

SPECIFICATION

§2.1049

METHOD

The EUT was configured to transmit a modulated carrier signal. An IF bandwidth of 3 kHz was used to determine the occupied bandwidth of the modulated emission for GPRS and EDGE modulation and 51 kHz for WCDMA and HSUPA modulation. The 99% occupied bandwidth and the -26 dBc bandwidth were measured directly using the built-in bandwidth measuring option of spectrum analyser E4440A.

The occupied Bandwidth was measured according to point 4.2 of Guidance 971168 D01 Power Meas License Digital Systems v02r01.

RESULTS

GPRS MODULATION

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	242.38	243.65	243.09
-26 dBc bandwidth (kHz)	314.89	308.88	312.80
Measurement uncertainty (kHz)	$<\pm 1.67$		

EDGE MODULATION

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	239.61	244.12	242.81
-26 dBc bandwidth (kHz)	312.94	314.11	314.13
Measurement uncertainty (kHz)	$<\pm 1.67$		

WCDMA MODULATION


Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	4140.1	4126.5	4128.7
-26 dBc bandwidth (kHz)	4616	4604	4614
Measurement uncertainty (kHz)	$<\pm 13.3$		

HSUPA MODULATION


Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	4141.7	4129.6	4141.5
-26 dBc bandwidth (kHz)	4618	4604	4558
Measurement uncertainty (kHz)	$<\pm 13.3$		

GPRS MODULATION


Lowest Channel

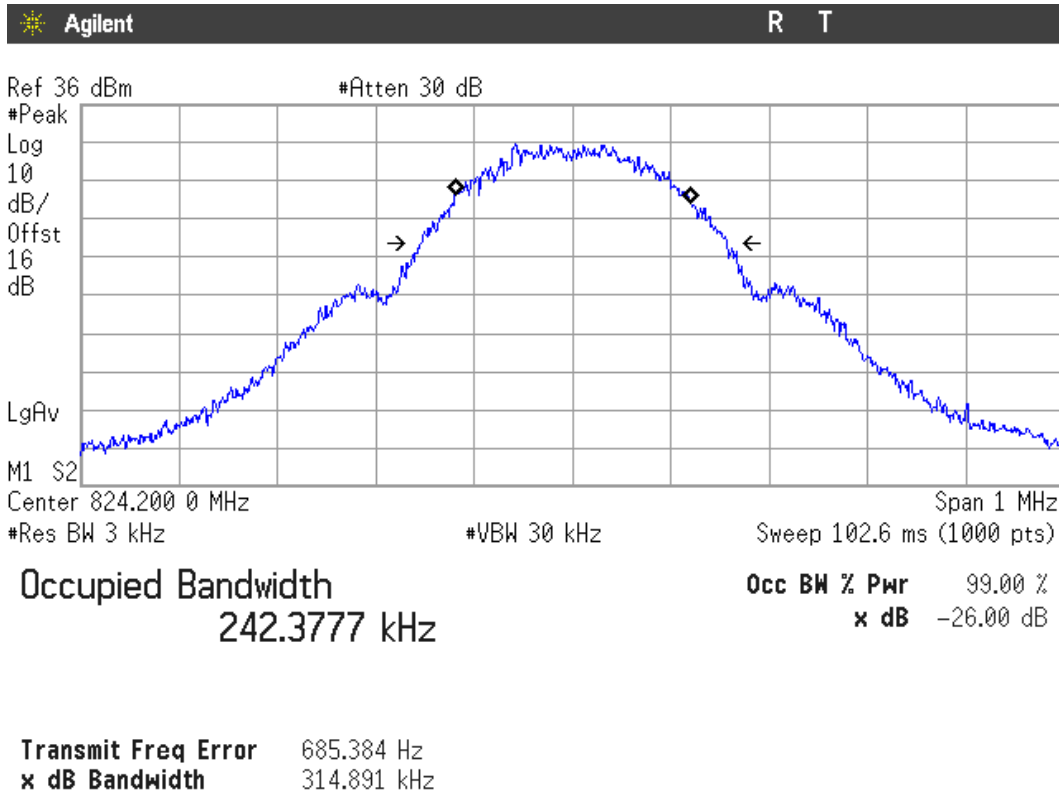

Middle Channel

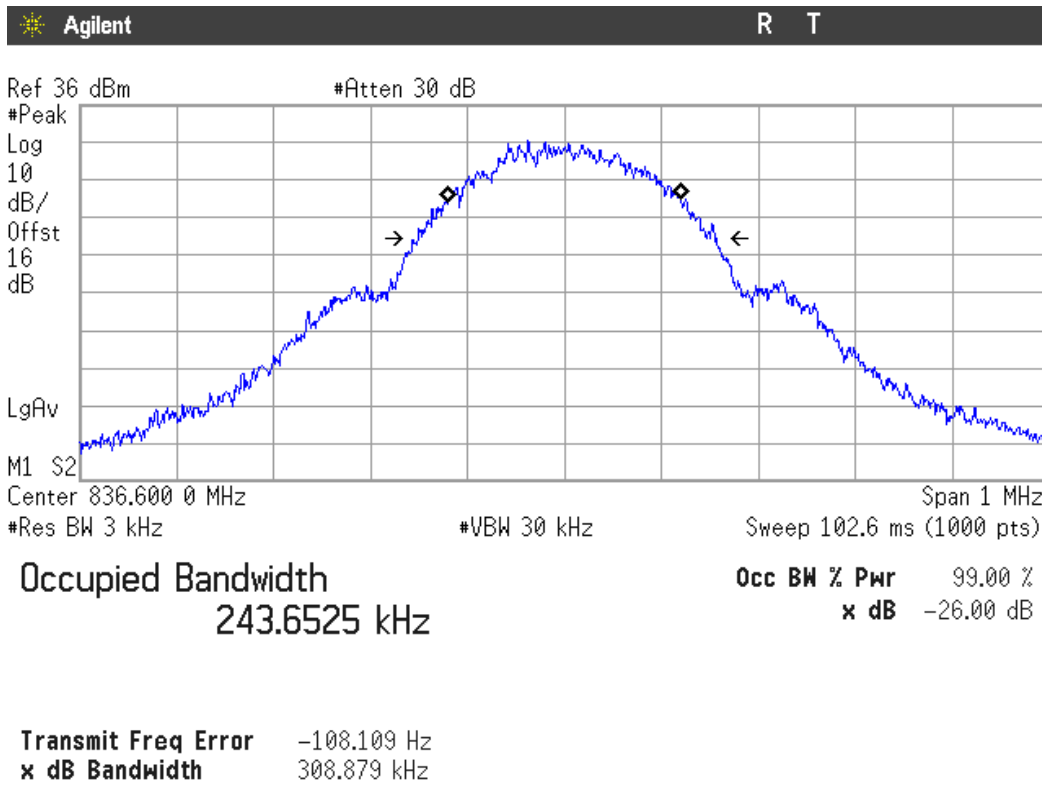


Highest Channel

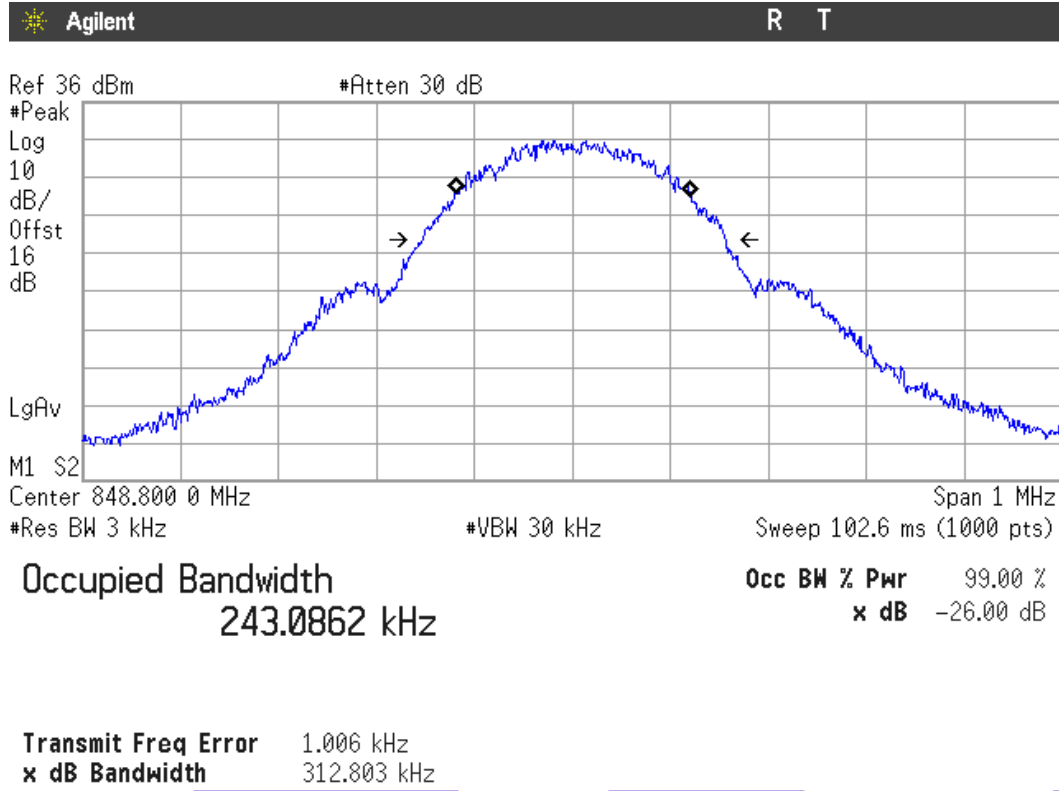


EDGE MODULATION


Lowest Channel

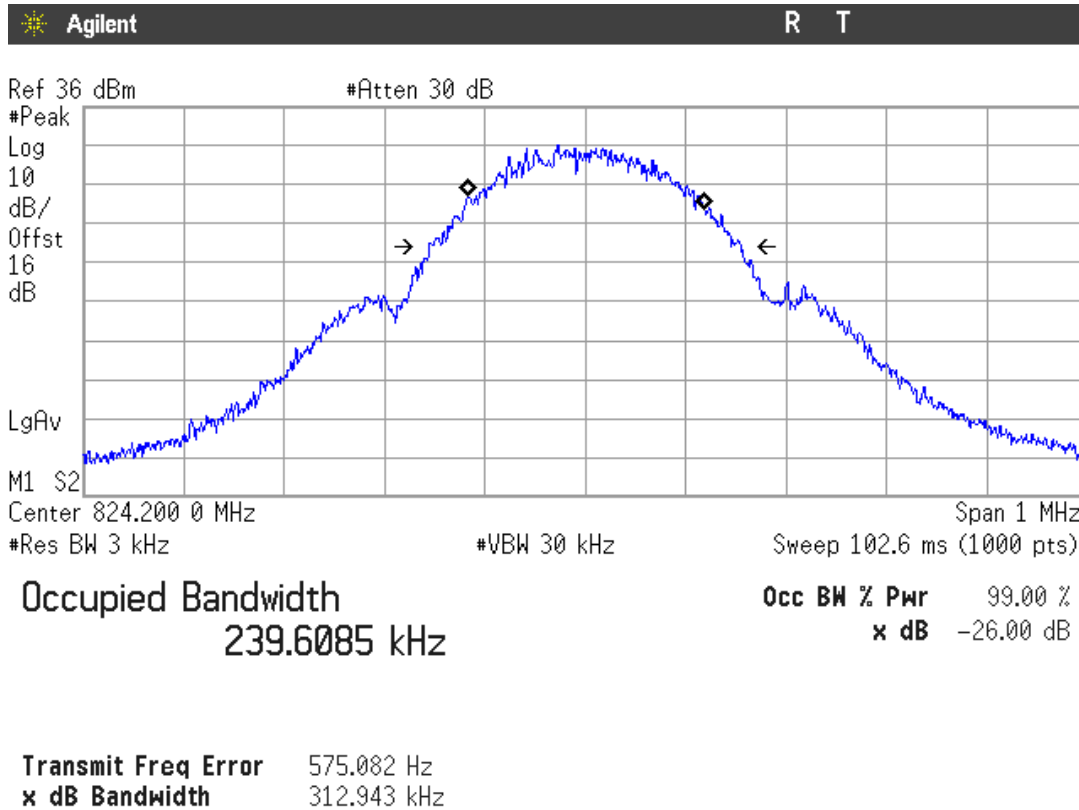

Middle Channel

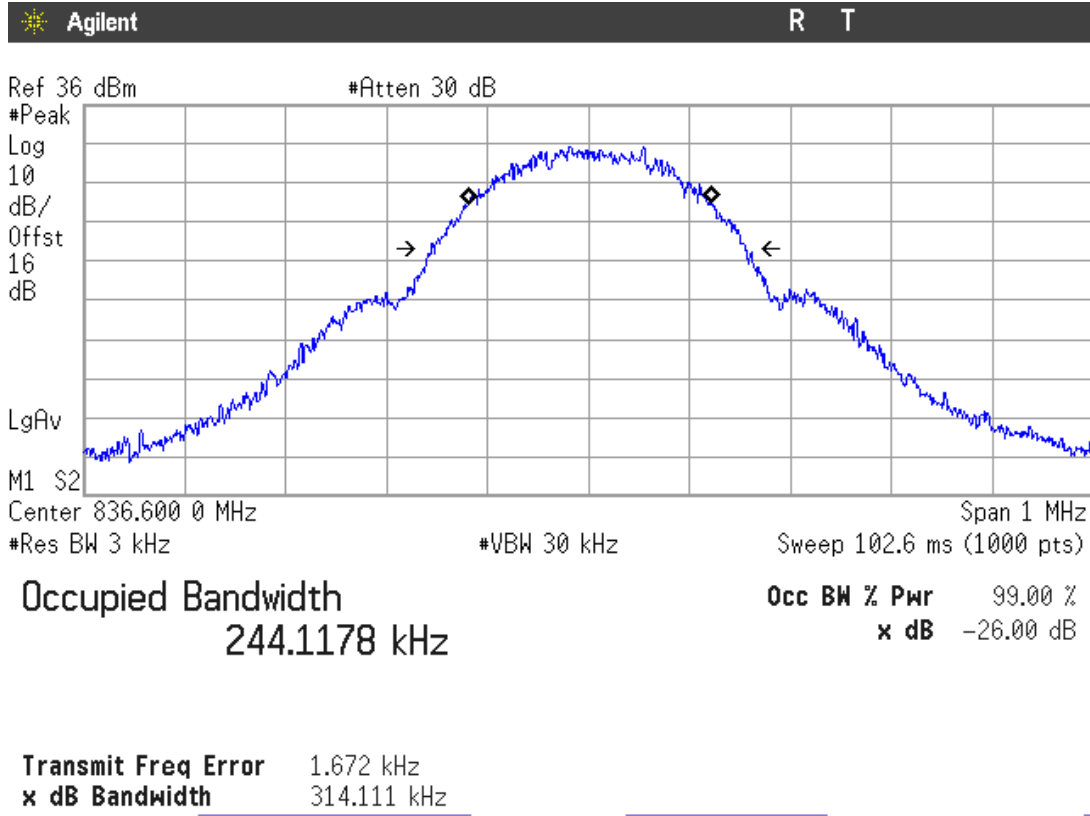


Highest Channel

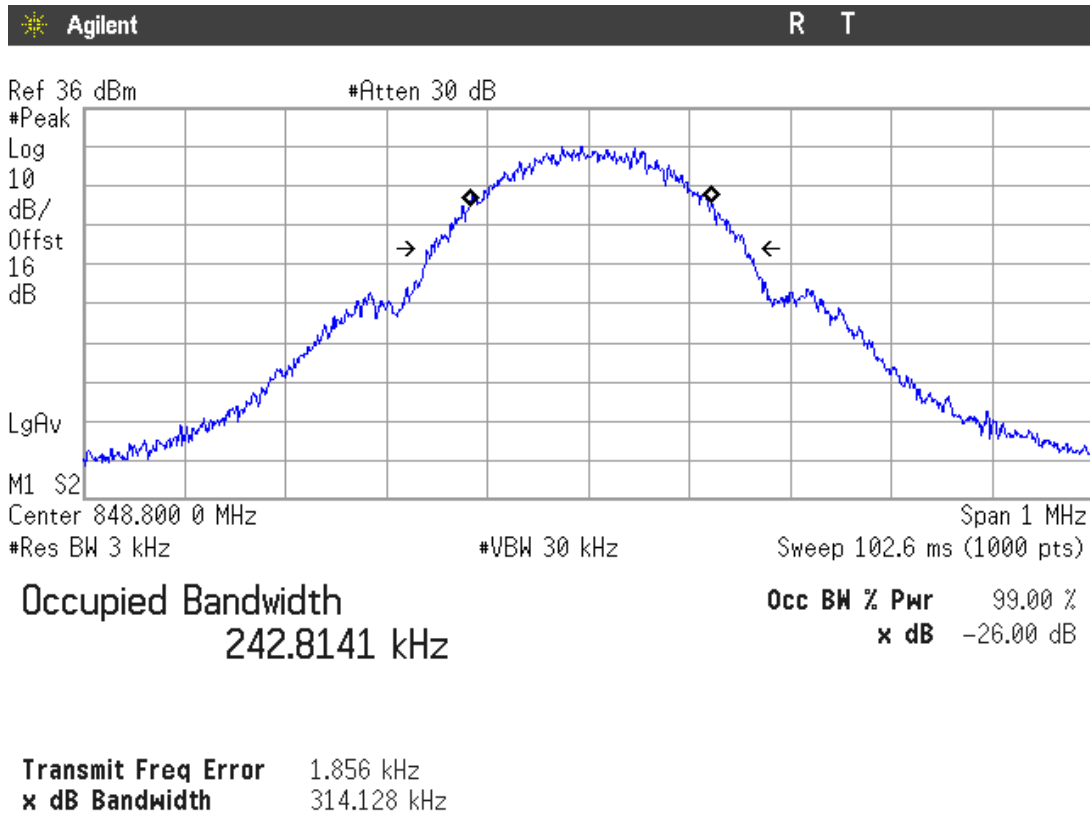


WCDMA MODULATION


Lowest Channel

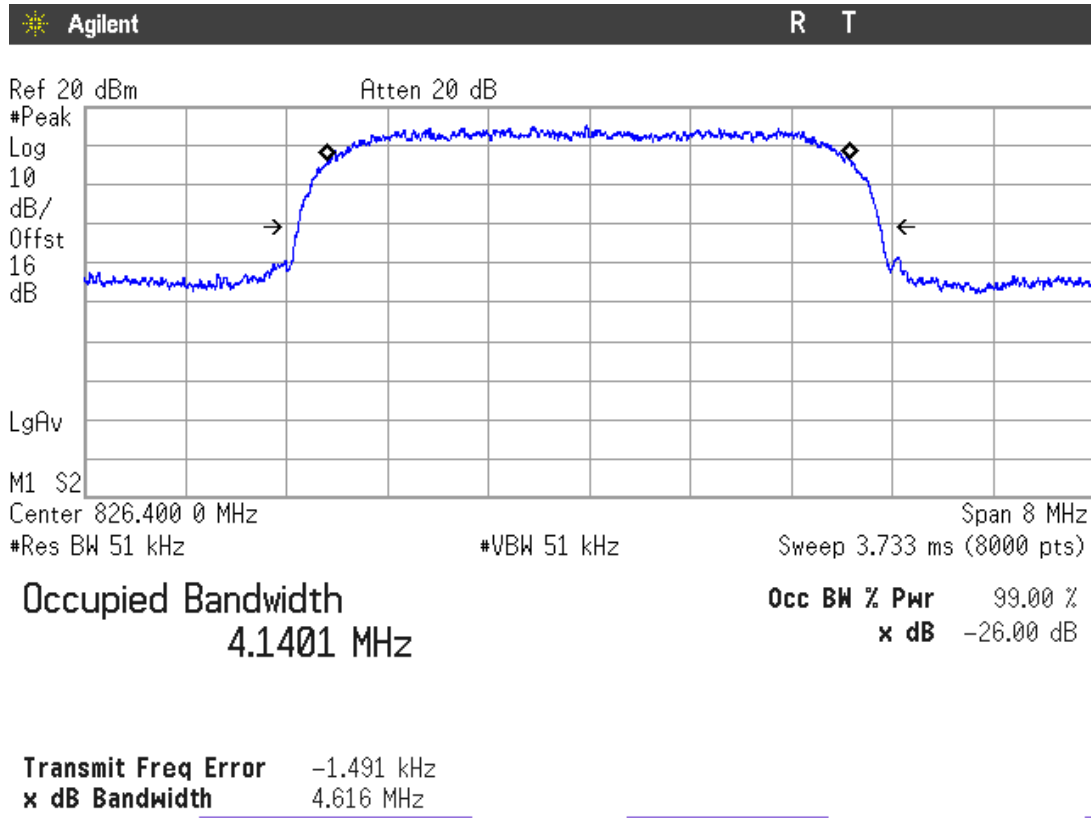

Middle Channel

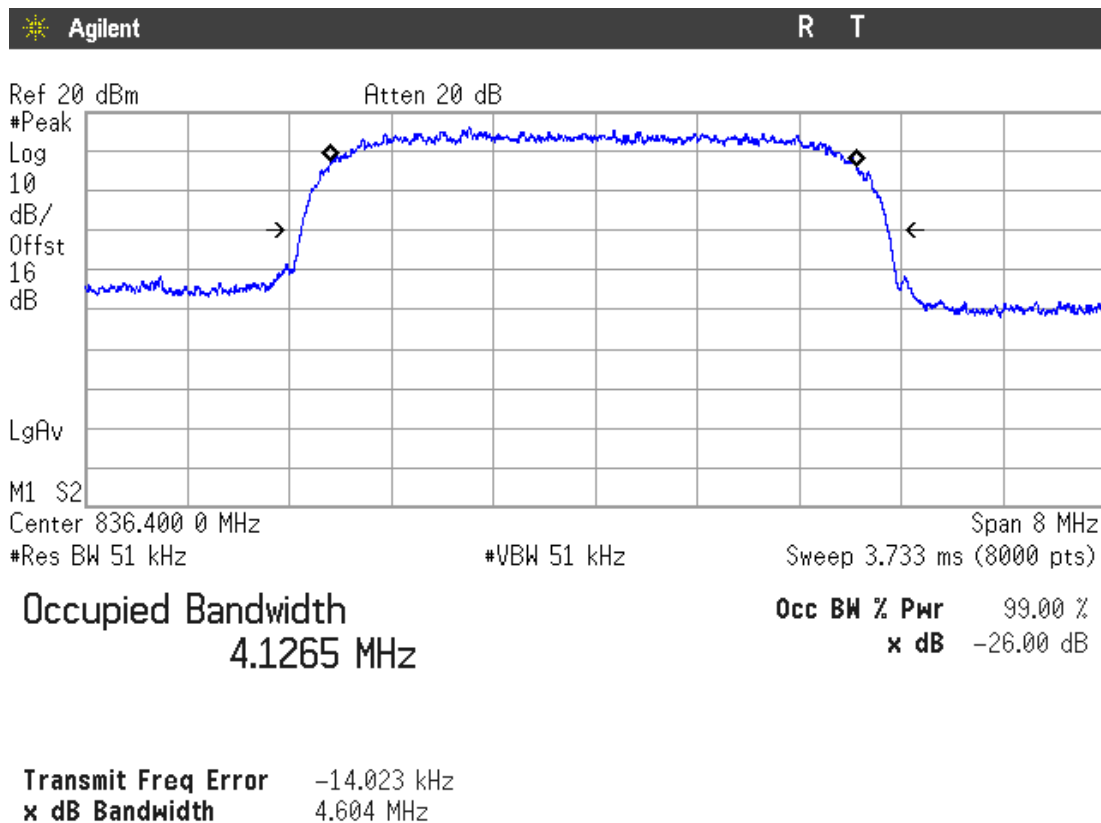


Highest Channel

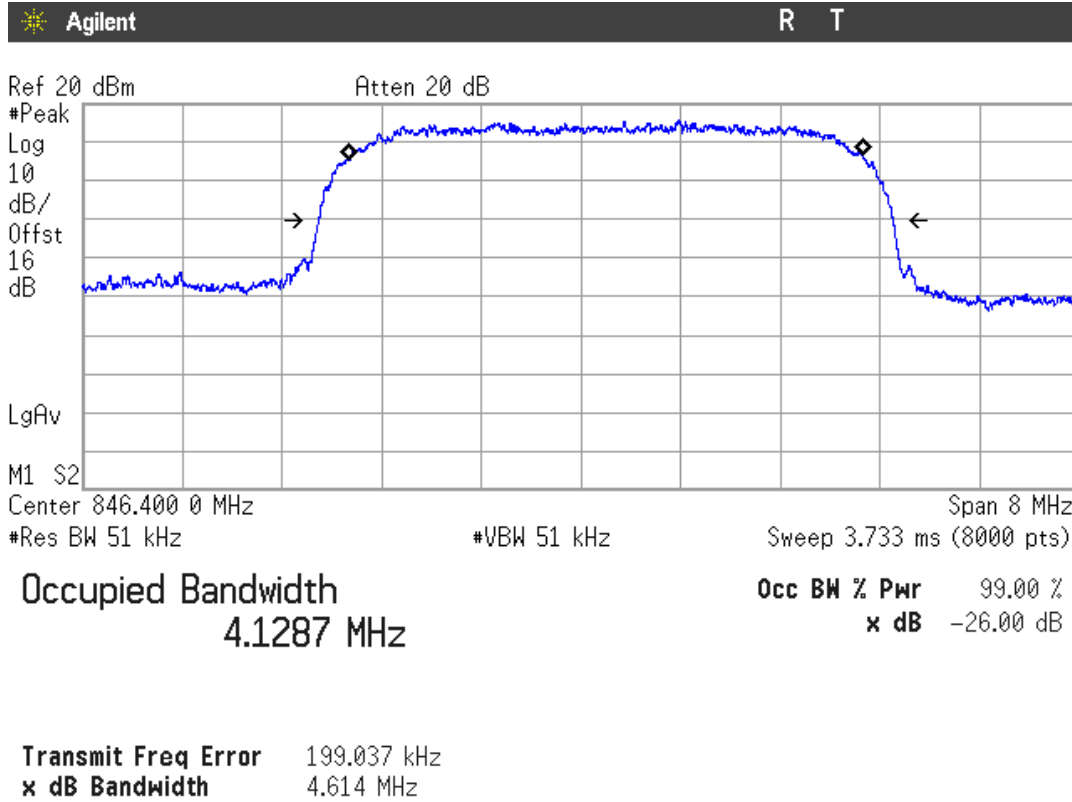


HSUPA MODULATION


Lowest Channel

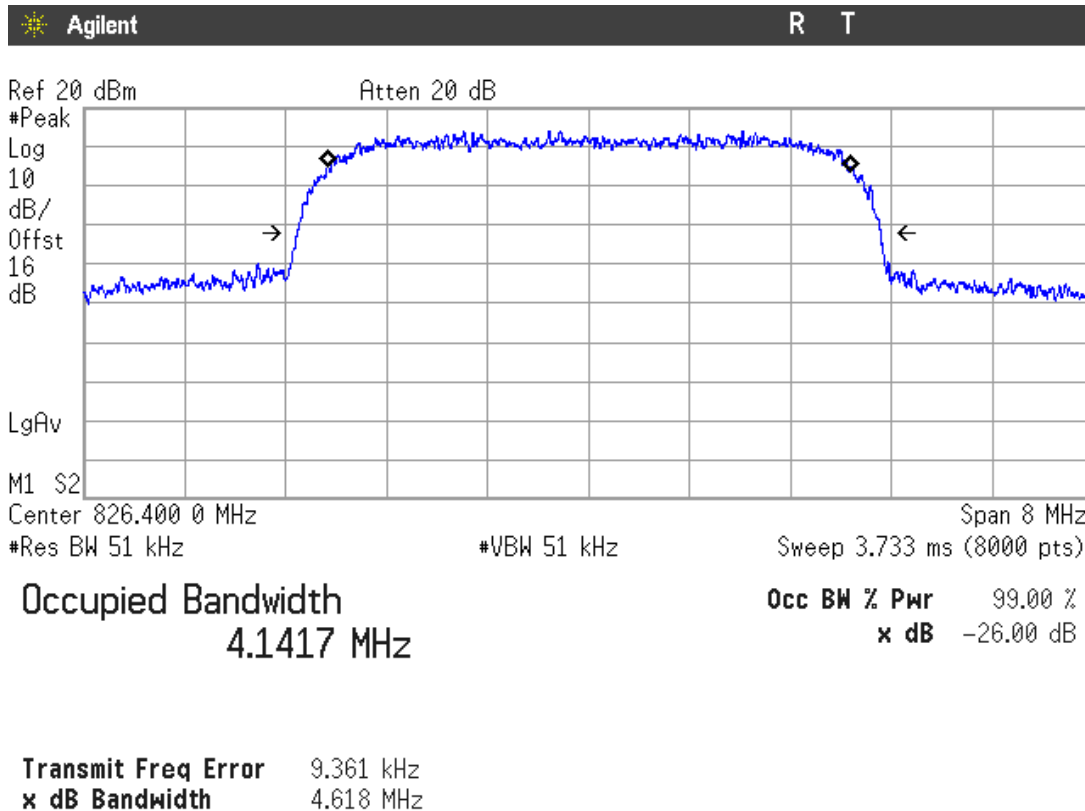

Middle Channel

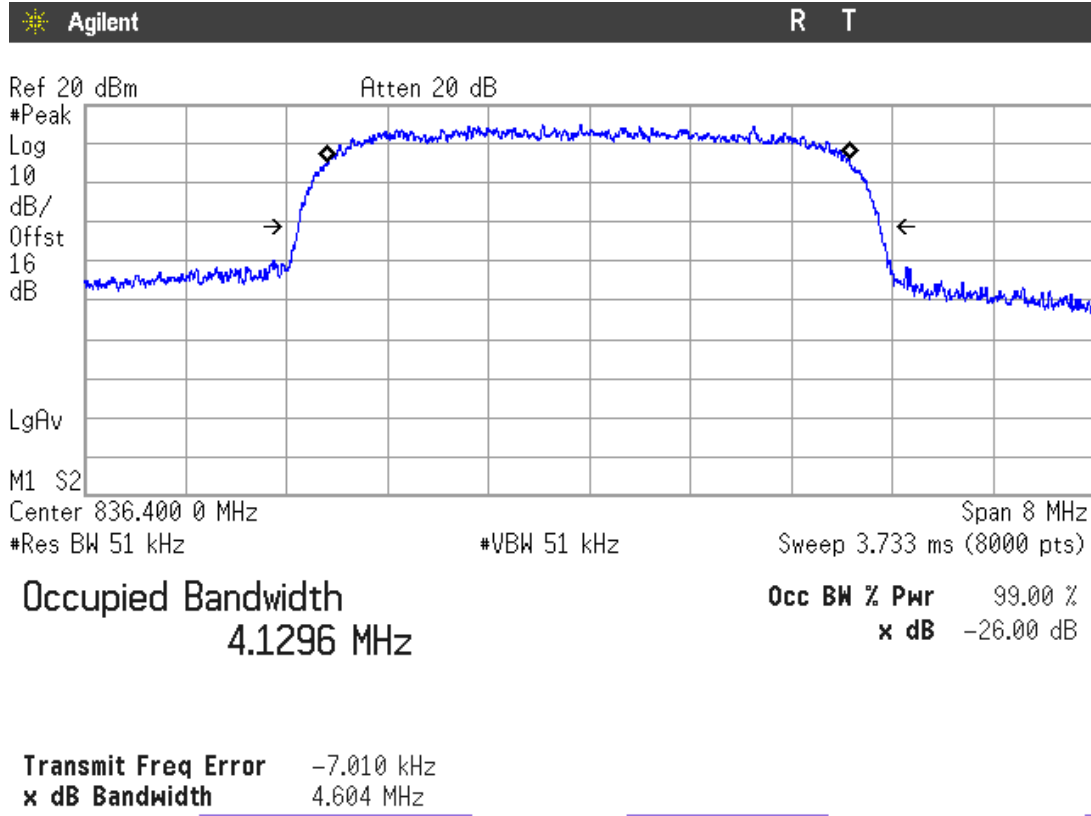

Highest Channel

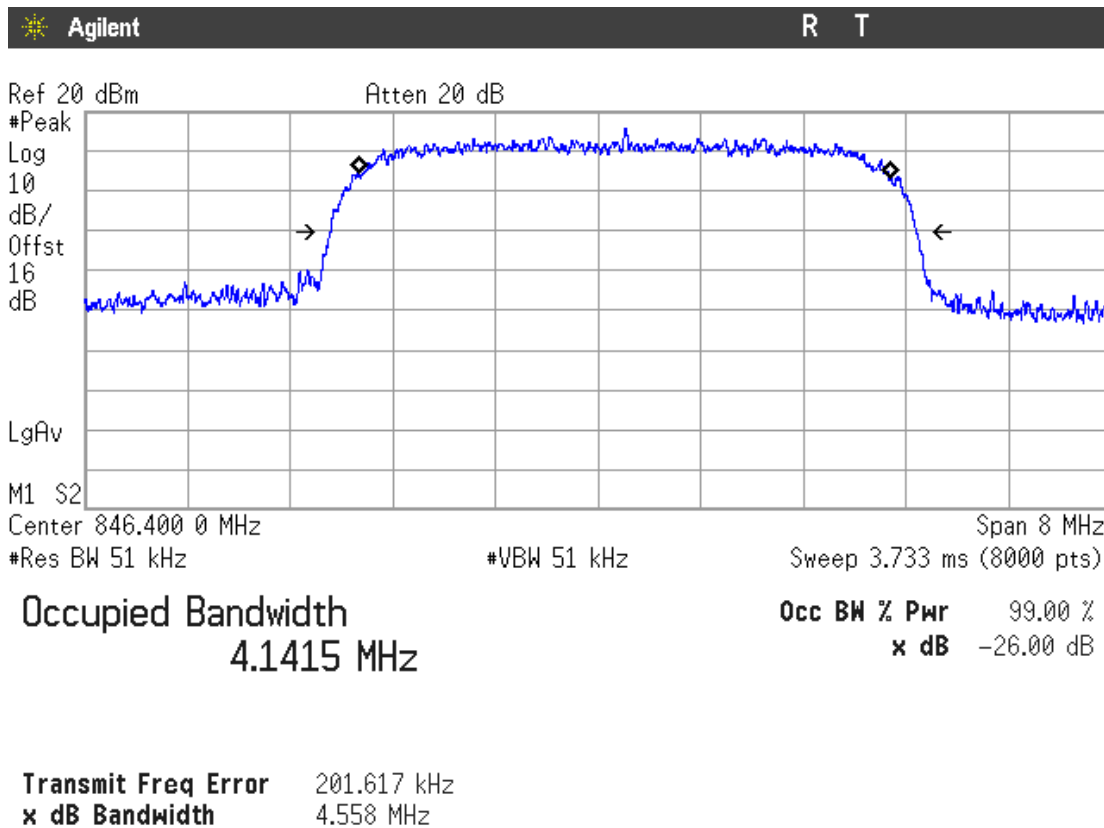

Spurious emissions at antenna terminals

SPECIFICATION

§2.1051 and §22.917. RSS-133 Clause 6.5.

METHOD

The EUT RF output connector was connected to an spectrum analyser using an 50 ohm attenuator and the resolution bandwidth of the spectrum analyser was set to at least 100 kHz. The spectrum was investigated from 30 MHz to 10 GHz.

The reading of the spectrum analyser is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyser.

Measurement Limit:

According to specification. the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power. the specified minimum attenuation becomes $43+10\log (P_o)$. and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

RESULTS (see plots in next pages)

GPRS MODULATION

1. CHANNEL: LOWEST

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE

No spurious signals were found in all the range.

3. CHANNEL: HIGHEST

No spurious signals were found in all the range.

EDGE MODULATION

1. CHANNEL: LOWEST

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE

No spurious signals were found in all the range.

3. CHANNEL: HIGHEST

No spurious signals were found in all the range.

WCDMA MODULATION

1. CHANNEL: LOWEST

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE

No spurious signals were found in all the range.

3. CHANNEL: HIGHEST

No spurious signals were found in all the range.

HSUPA MODULATION

1. CHANNEL: LOWEST

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE

No spurious signals were found in all the range.


3. CHANNEL: HIGHEST

No spurious signals were found in all the range.

Verdict: PASS


GPRS MODULATION

1. CHANNEL: LOWEST

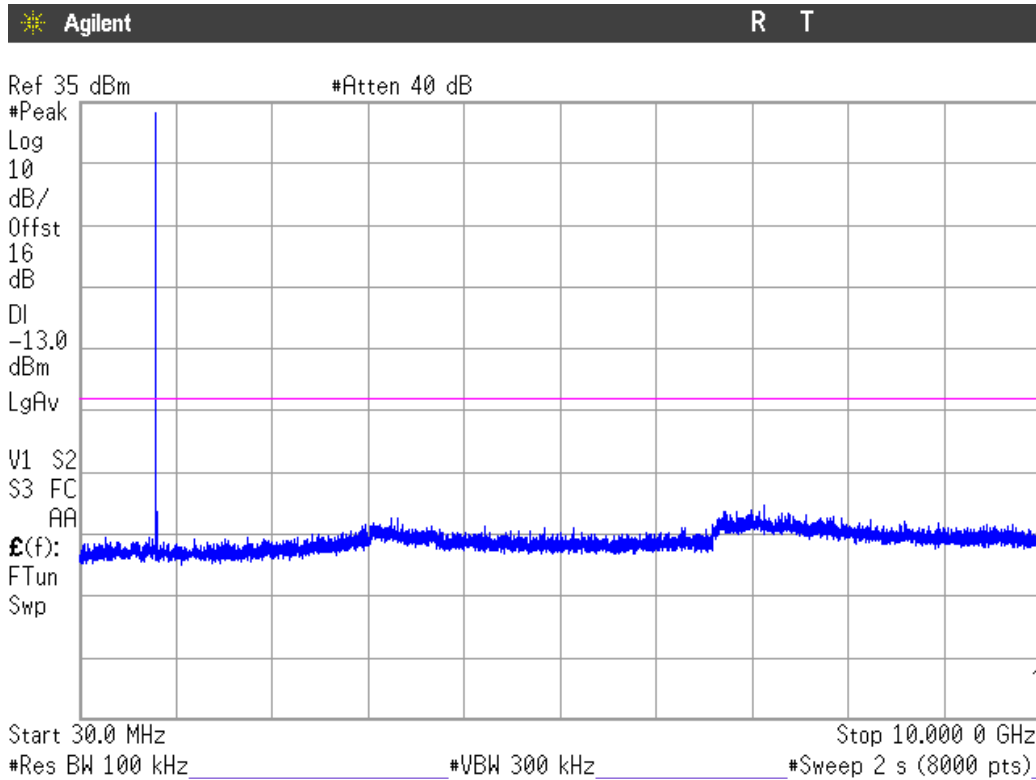


Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE

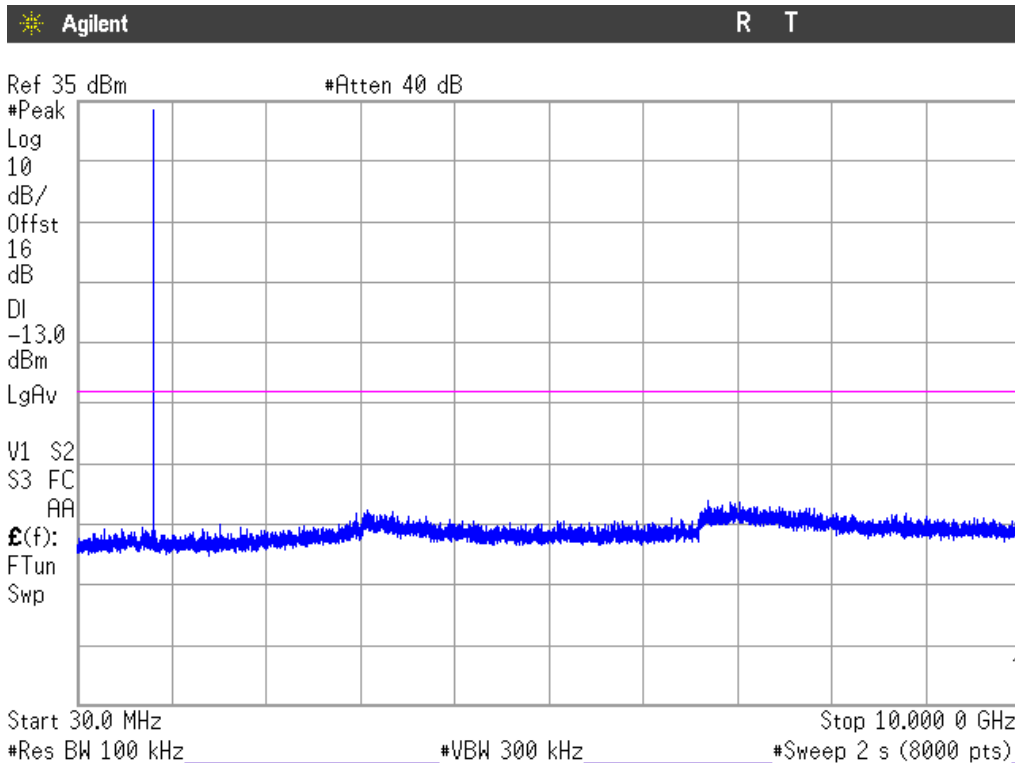

Note: The peak above the limit is the carrier frequency.


3. CHANNEL: HIGHEST

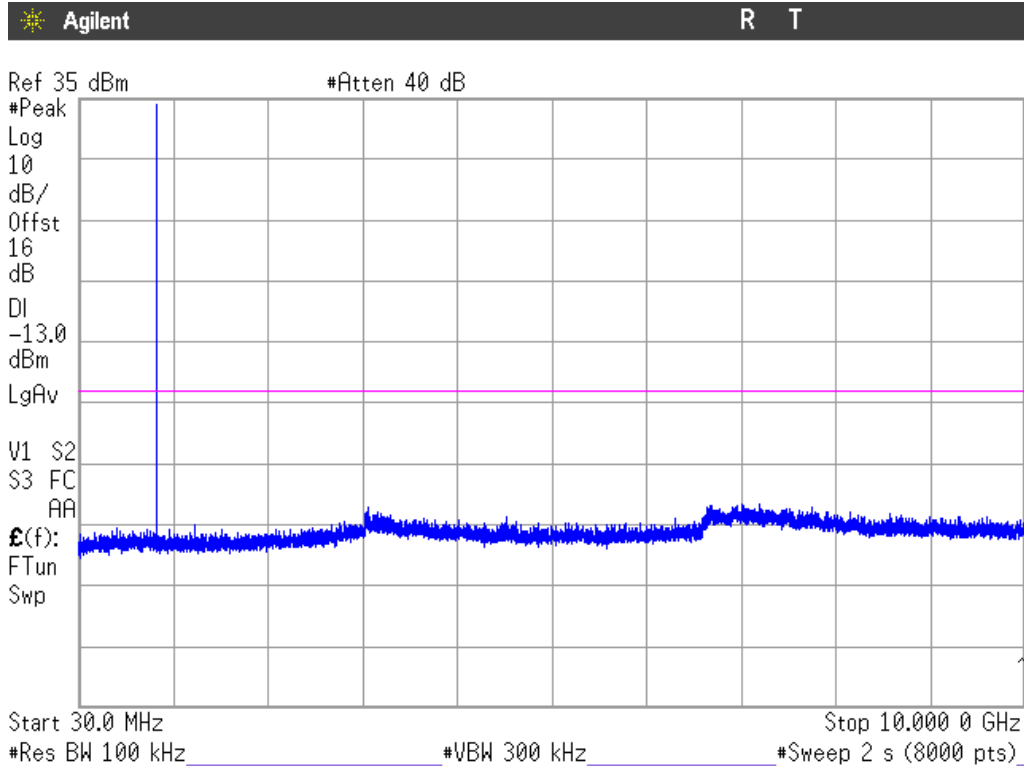

Note: The peak above the limit is the carrier frequency.


EDGE MODULATION

1. CHANNEL: LOWEST

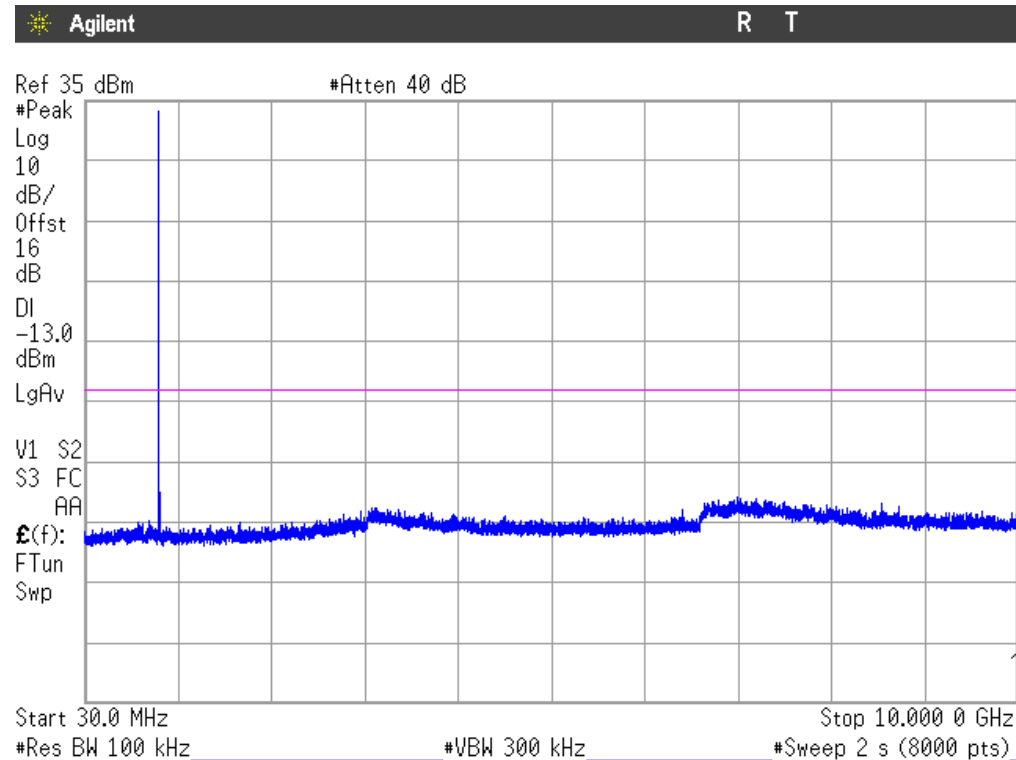


Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE

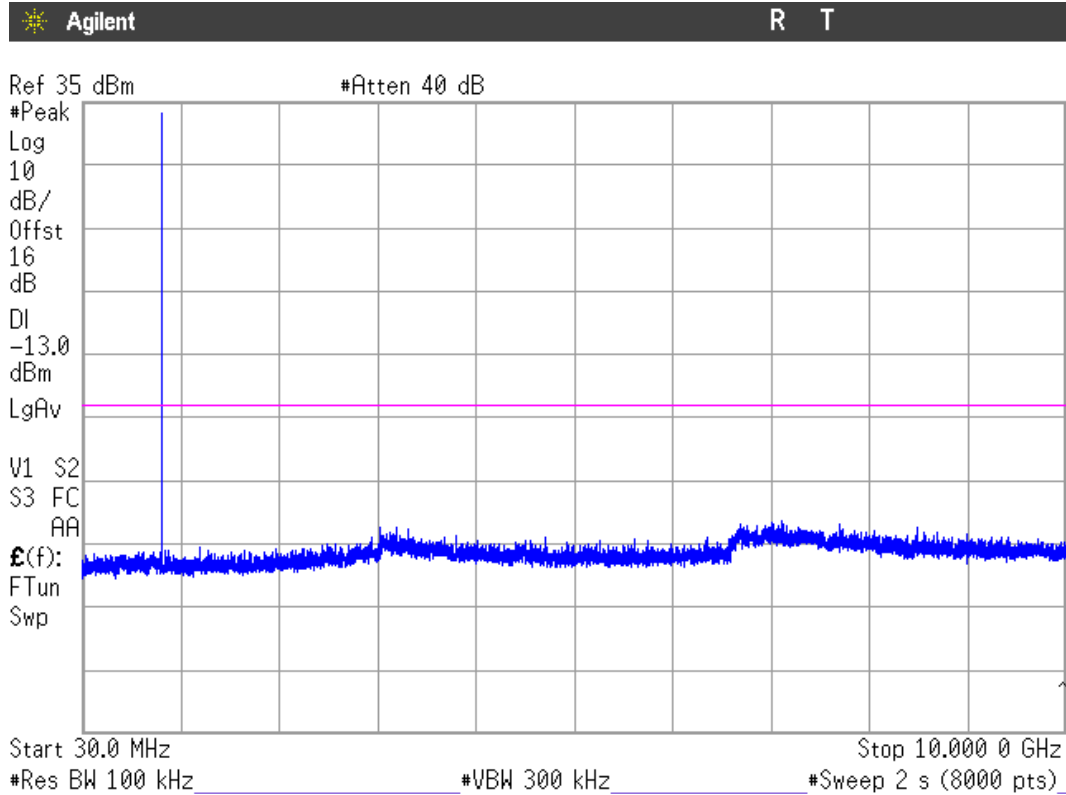

Note: The peak above the limit is the carrier frequency.


3. CHANNEL: HIGHEST

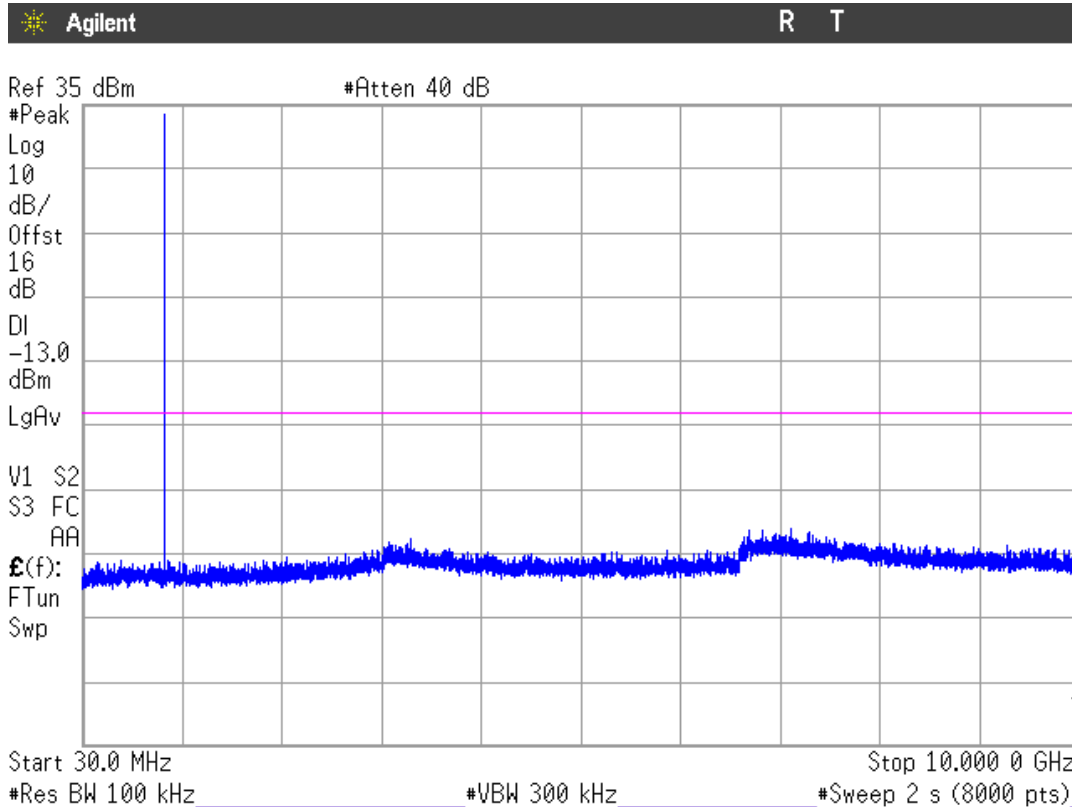

Note: The peak above the limit is the carrier frequency.


WCDMA MODULATION

1. CHANNEL: LOWEST

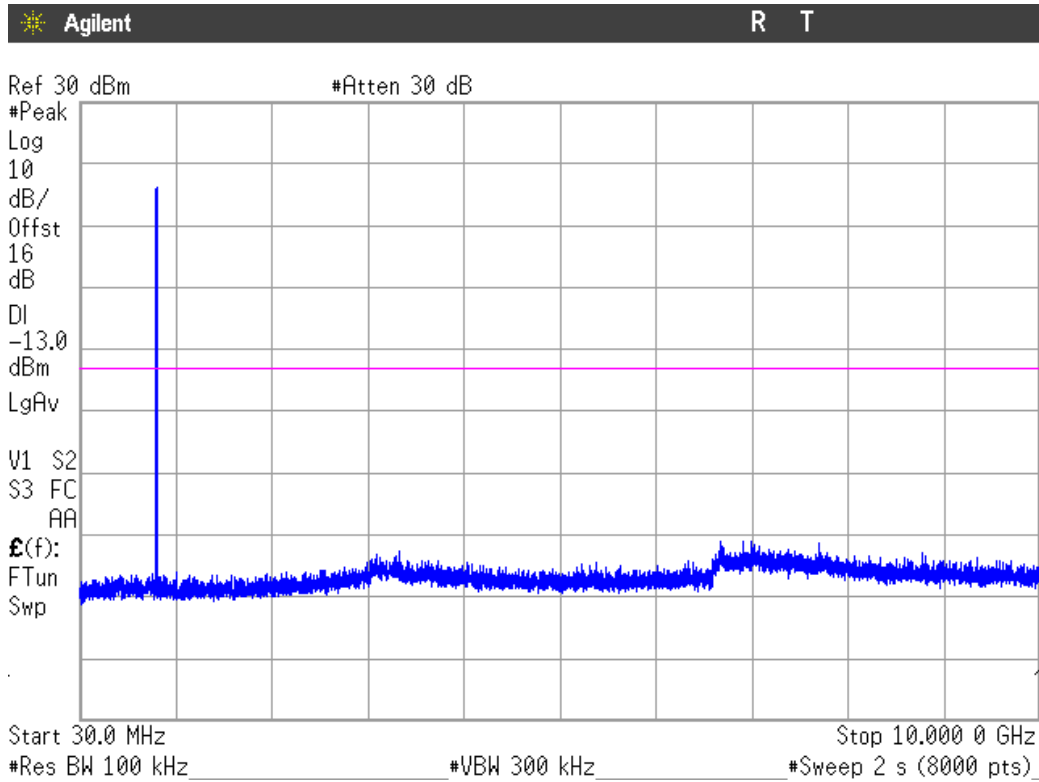


Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE

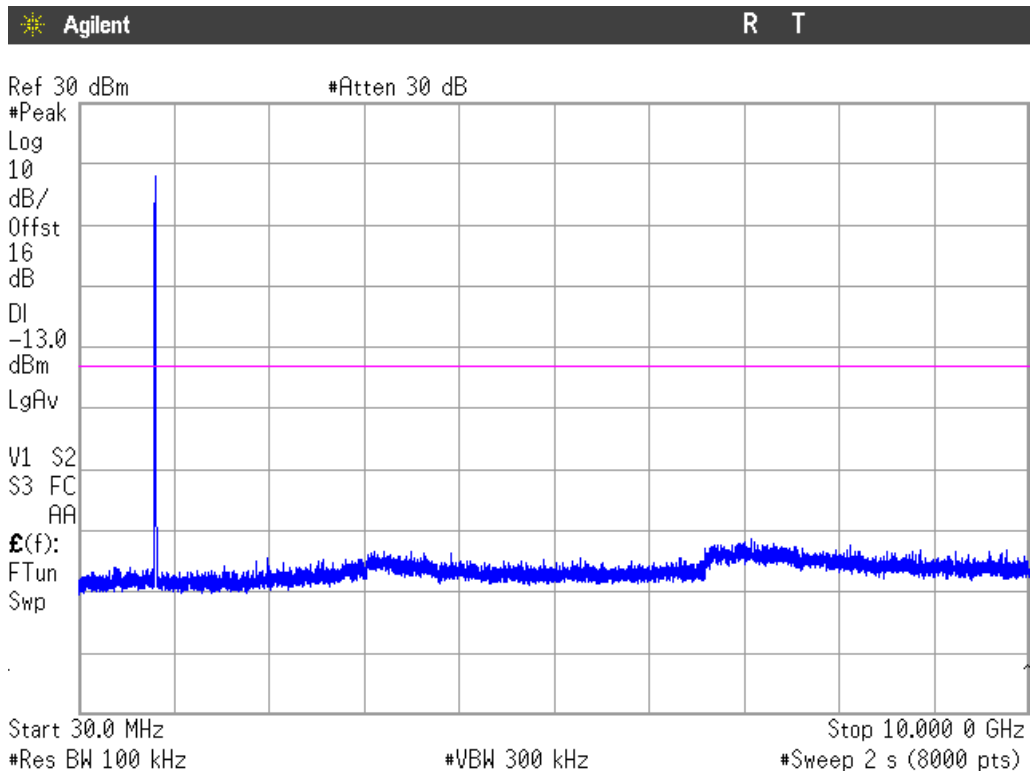

Note: The peak above the limit is the carrier frequency.


3. CHANNEL: HIGHEST

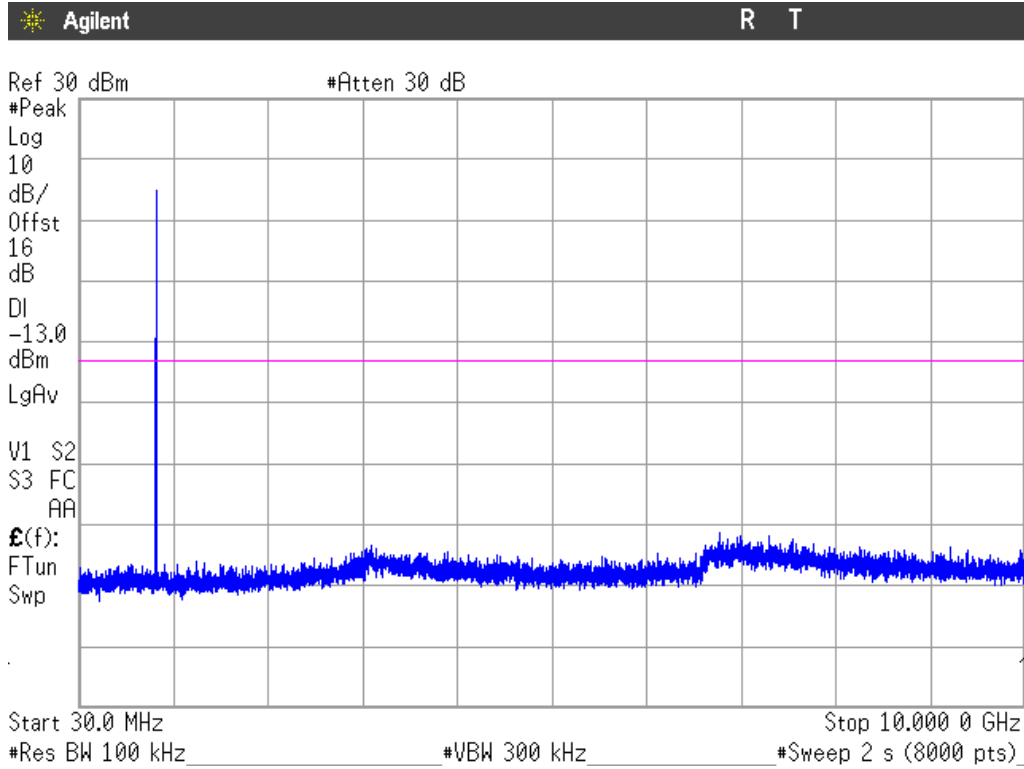

Note: The peak above the limit is the carrier frequency.


HSUPA MODULATION

1. CHANNEL: LOWEST

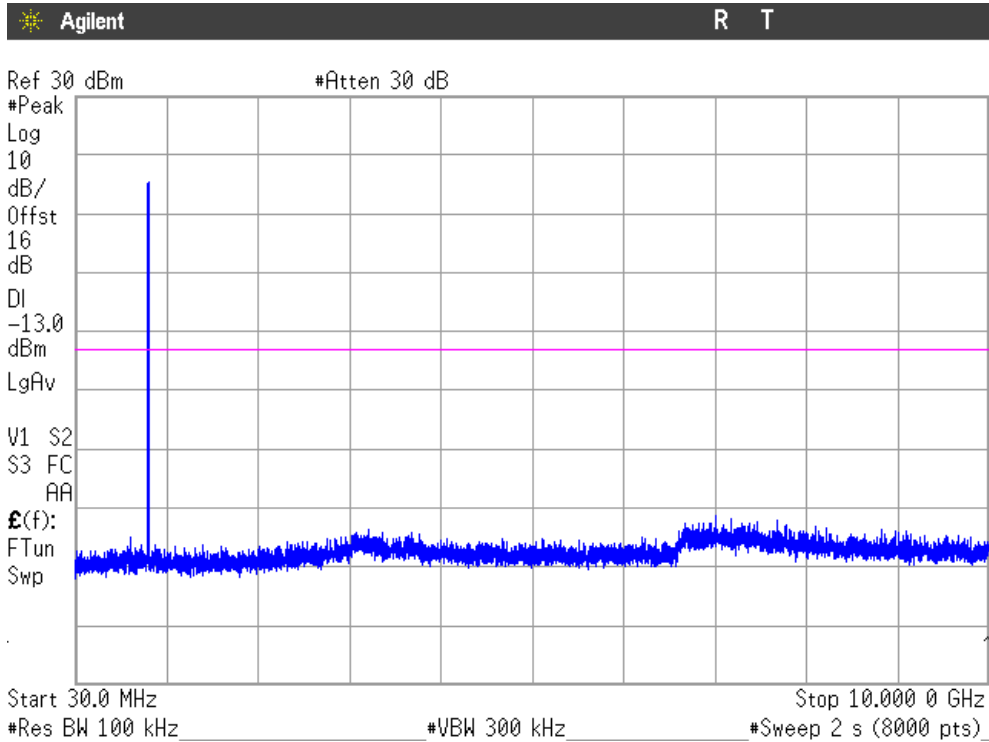


Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE

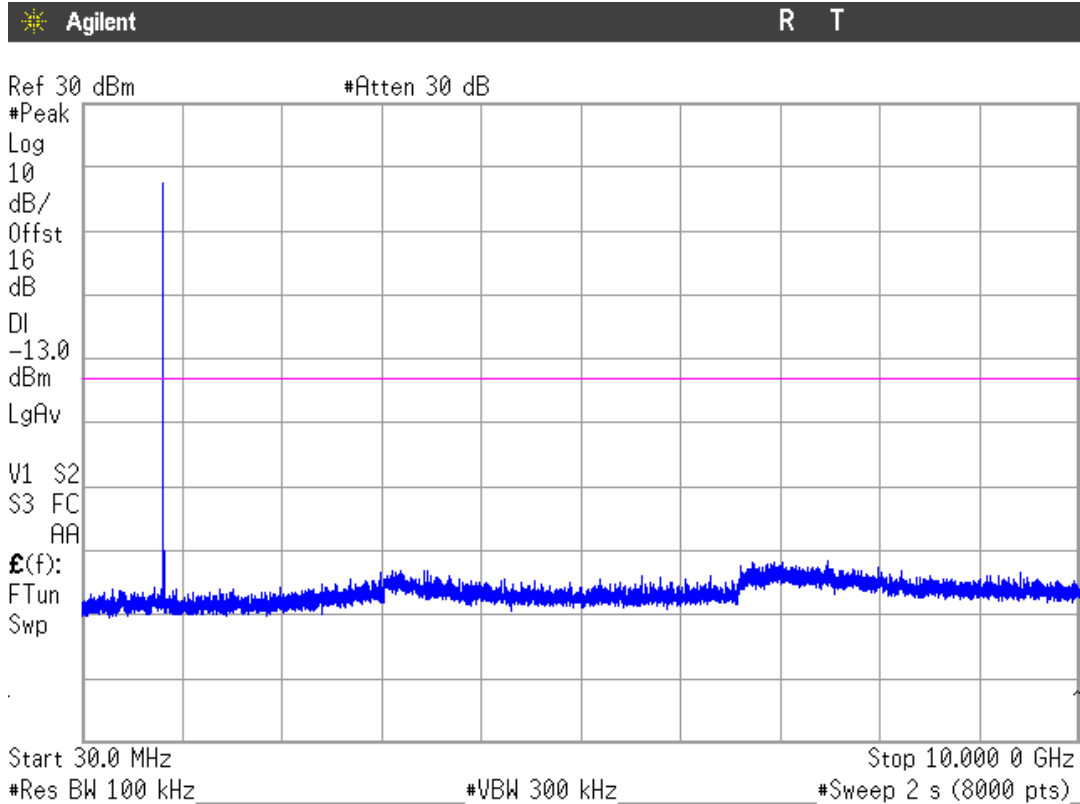

Note: The peak above the limit is the carrier frequency.

3. CHANNEL: HIGHEST

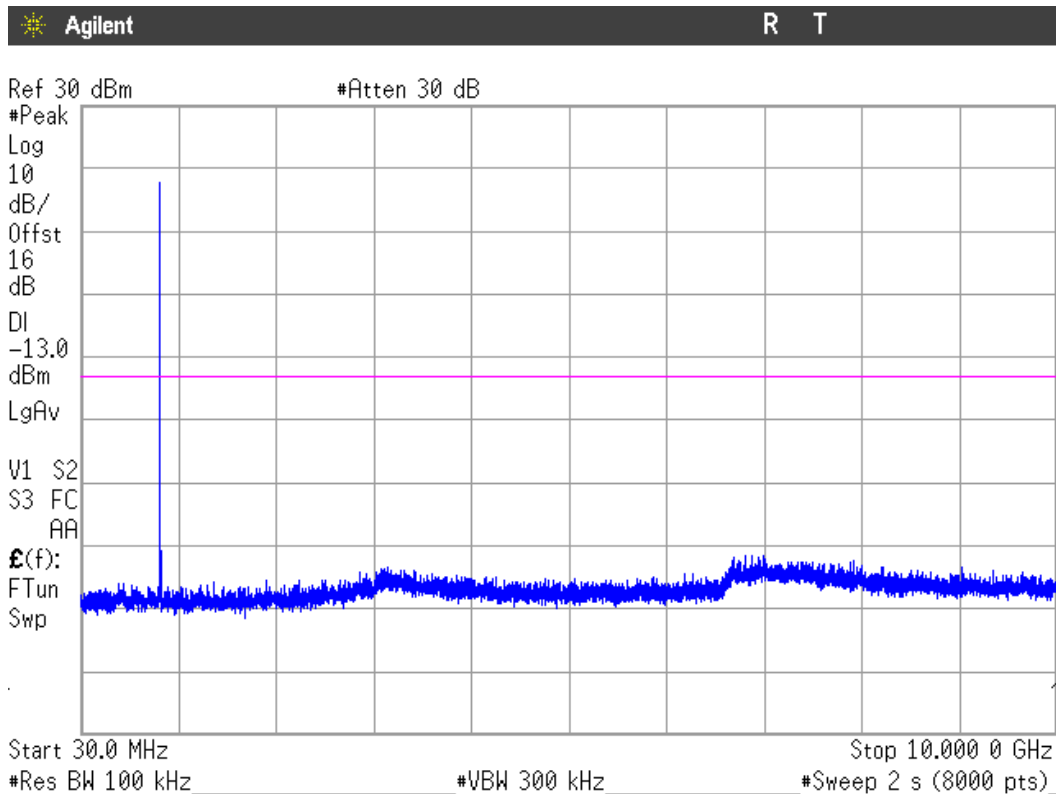

Note: The peak above the limit is the carrier frequency.

Spurious emissions at antenna terminals at Block Edges

SPECIFICATION

§2.1051 and §22.917

METHOD

As indicated in FCC part 22. in the 1 MHz bands immediately outside and adjacent to the frequency block or band a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A resolution bandwidth of 3.3 kHz was used for GPRS and EDGE modulations and 51 kHz for WCDMA and HSUPA modulations.

Measurement Limit:

According to specification. the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power. the specified minimum attenuation becomes $43+10\log (P_o)$. and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$


RESULTS (see plots in next pages)

MODULATION:	GPRS	EDGE	WCDMA	HSUPA
Maximum measured level at lowest Block Edge at antenna port (dBm)	-19.79	-19.78	-27.67	-28.05

MODULATION:	GPRS	EDGE	WCDMA	HSUPA
Maximum measured level at highest Block Edge at antenna port (dBm)	-19.98	-20.24	-31.75	-31.99


Measurement uncertainty = ± 1.57 dB.

GPRS MODULATION
 CHANNEL LOWEST

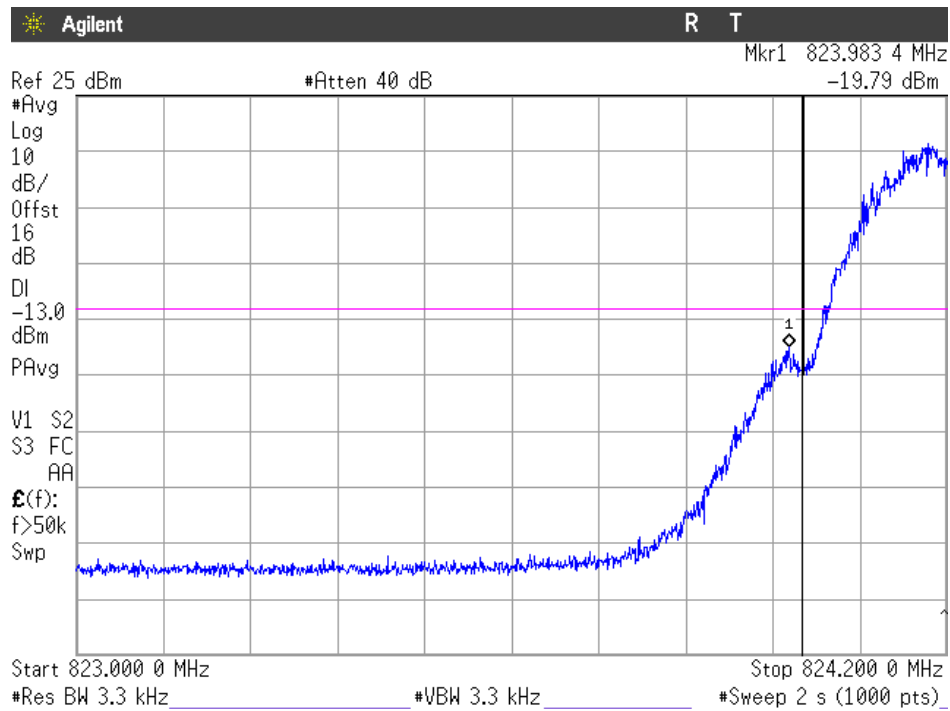

NOTE: The equipment transmits at the maximum output power


CHANNEL HIGHEST

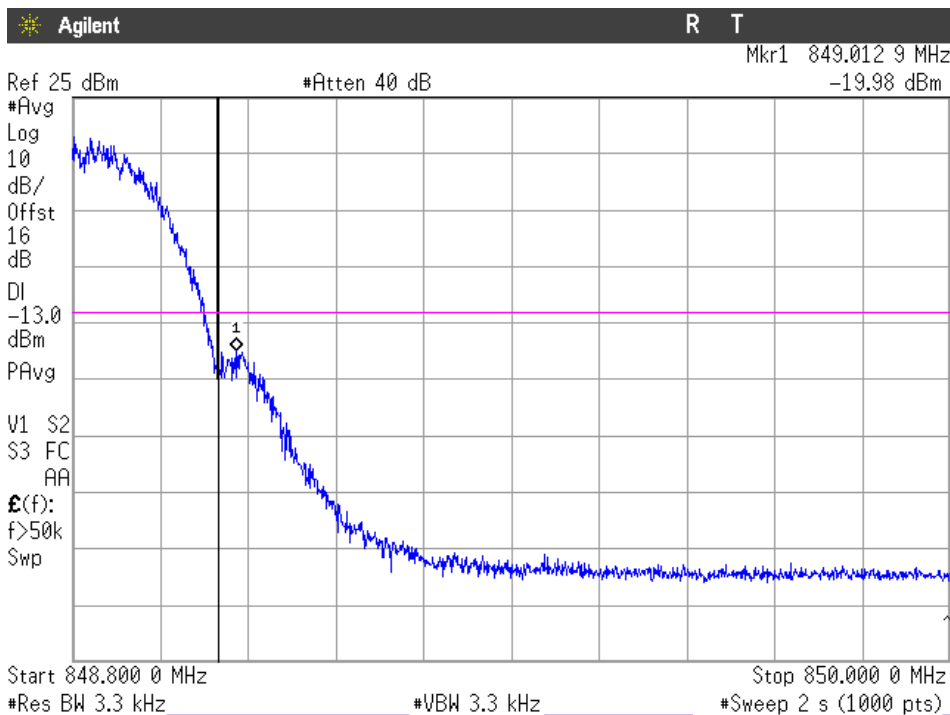

NOTE: The equipment transmits at the maximum output power


Verdict: PASS

EDGE MODULATION
 CHANNEL LOWEST

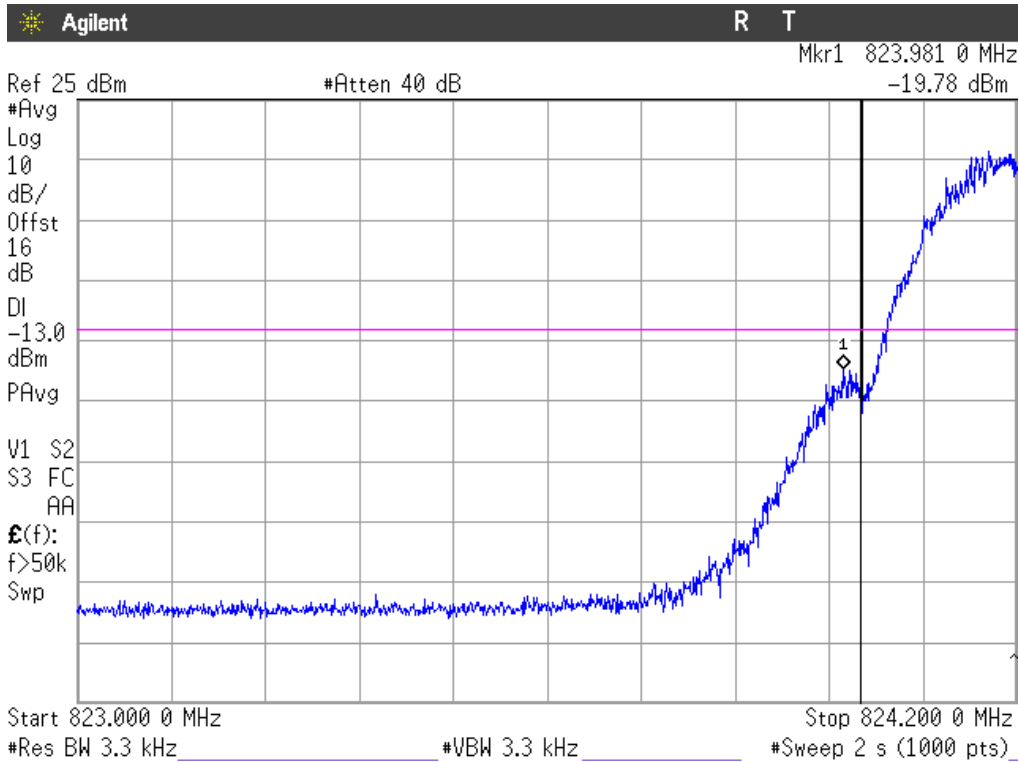

NOTE: The equipment transmits at the maximum output power


CHANNEL HIGHEST

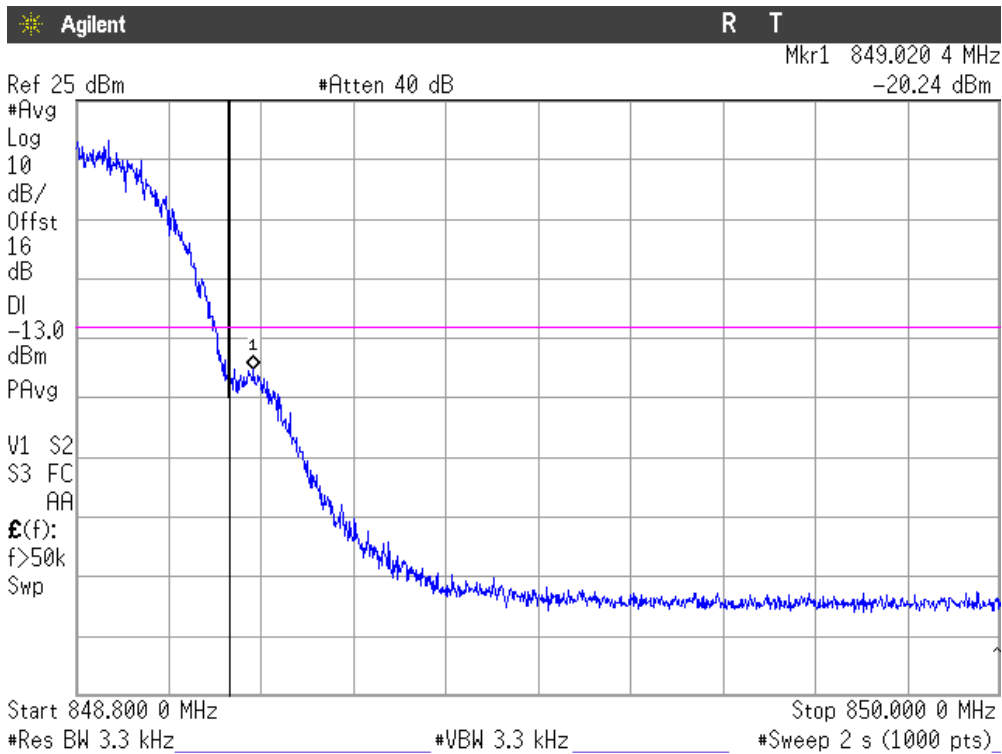

NOTE: The equipment transmits at the maximum output power


Verdict: PASS

WCDMA MODULATION
 CHANNEL LOWEST

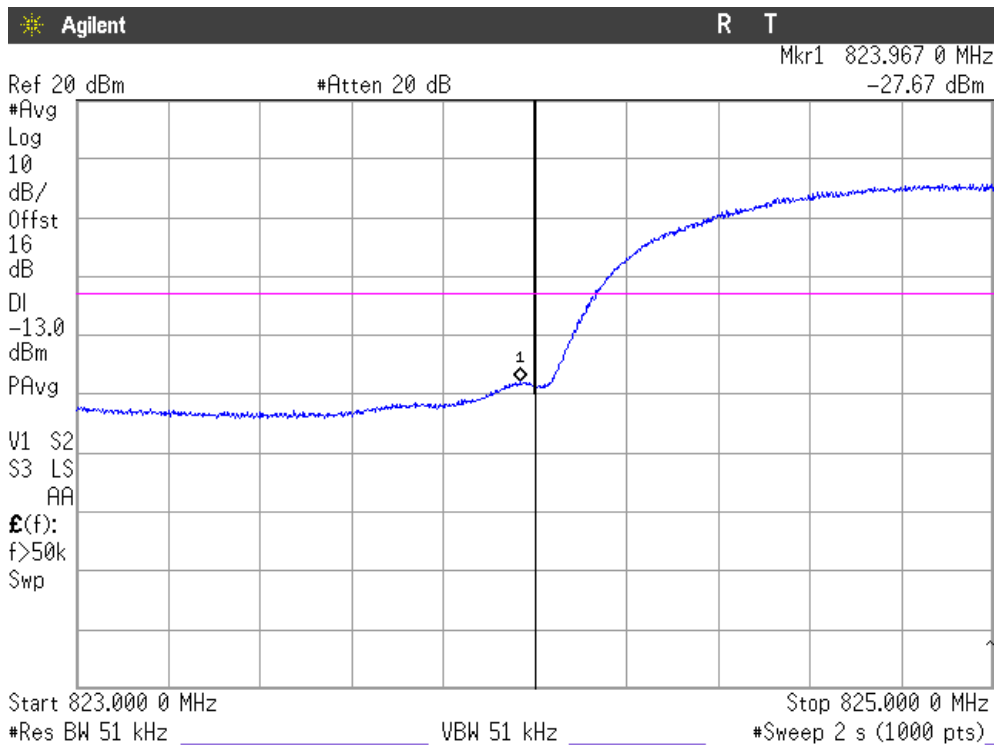

NOTE: The equipment transmits at the maximum output power


CHANNEL HIGHEST

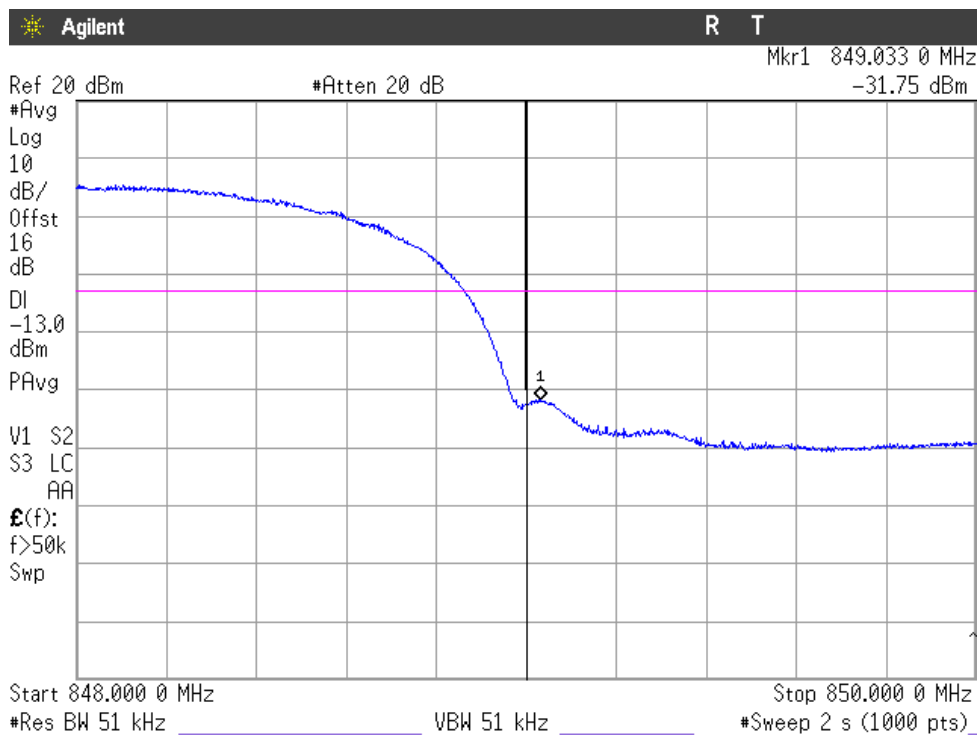

NOTE: The equipment transmits at the maximum output power


Verdict: PASS

HSUPA MODULATION
 CHANNEL LOWEST

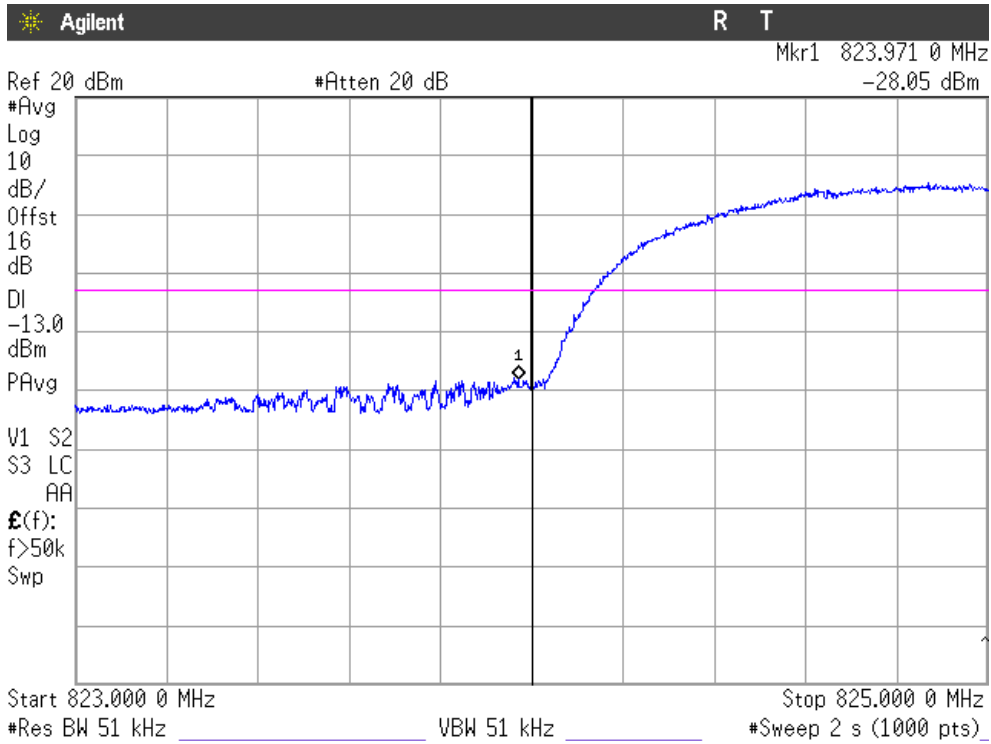

NOTE: The equipment transmits at the maximum output power

CHANNEL HIGHEST

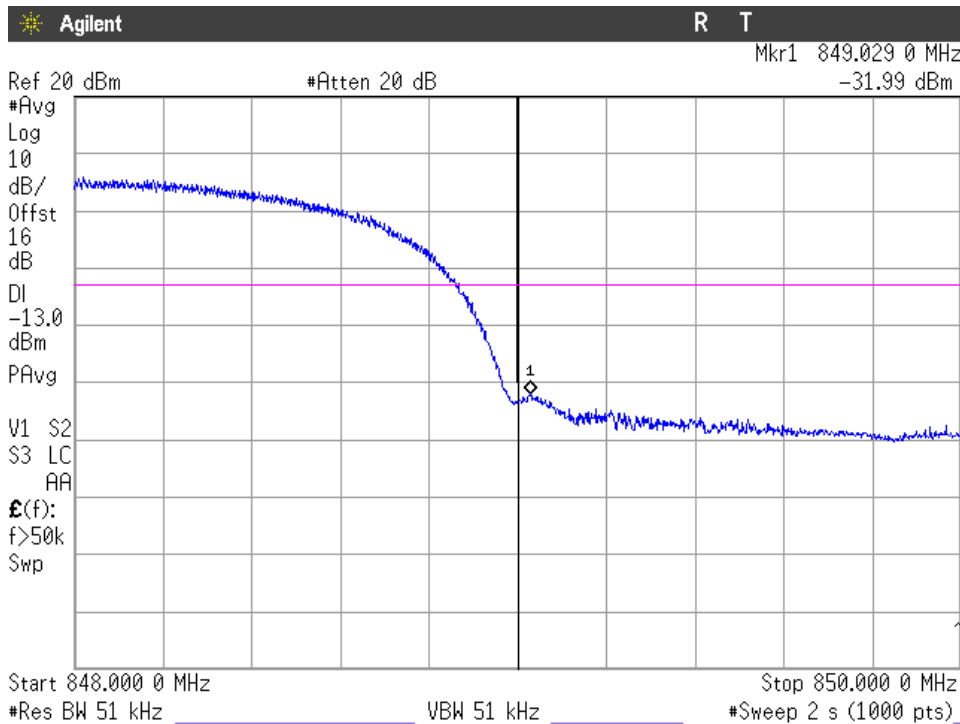

NOTE: The equipment transmits at the maximum output power

Verdict: PASS

Radiated emissions

SPECIFICATION

§ 22.917. RSS-133 Clause 6.5.

METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 1 GHz and at 1 m distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded. The radiated emissions were measured with peak detector and 1 MHz bandwidth.

Each detected emission is substituted by the Substitution method, in accordance with the ANSI/TIA/EIA-603-C: 2004.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43+10\log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

RESULTS

GPRS AND EDGE MODULATION

A preliminary scan determined the GPRS modulation as the worst case. The following tables and plots show the results for GPRS modulation.

1. CHANNEL: LOWEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

2. CHANNEL: MIDDLE

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

3. CHANNEL: HIGHEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

WCDMA AND HSUPA MODULATION

A preliminary scan determined the WCDMA modulation as the worst case. The following tables and plots show the results for WCDMA modulation.

1. CHANNEL: LOWEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

2. CHANNEL: MIDDLE

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

3. CHANNEL: HIGHEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-12.75 GHz.


No radiated spurious signals were detected at less than 20 dB respect to the limit.

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.


GPRS MODULATION

CHANNEL: LOWEST

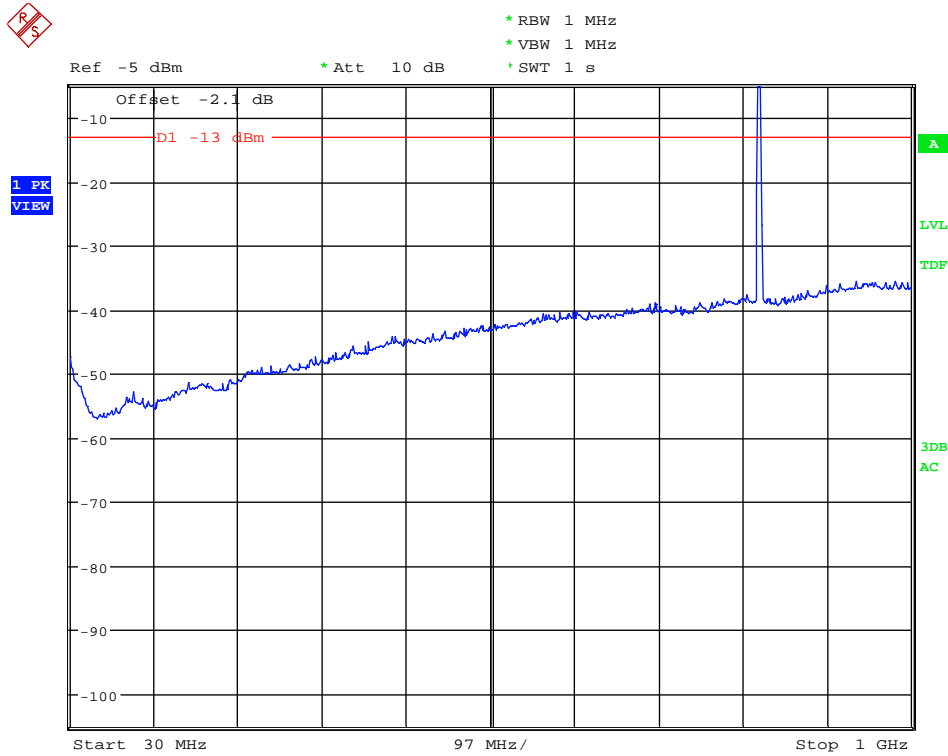


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

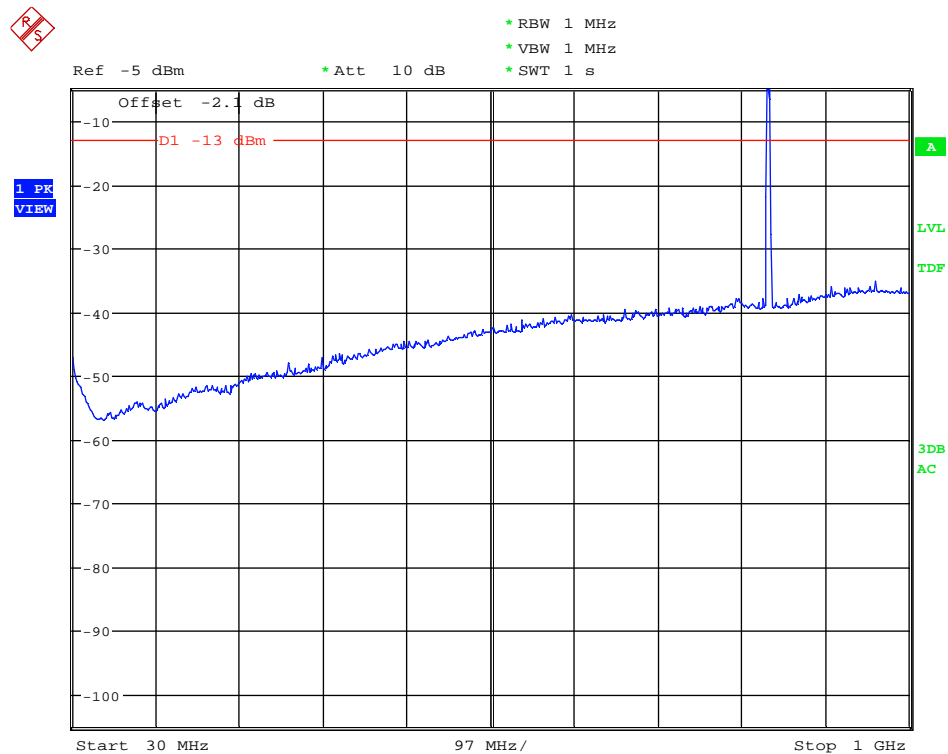

Note: The peak above the limit is the carrier frequency.


CHANNEL: HIGHEST

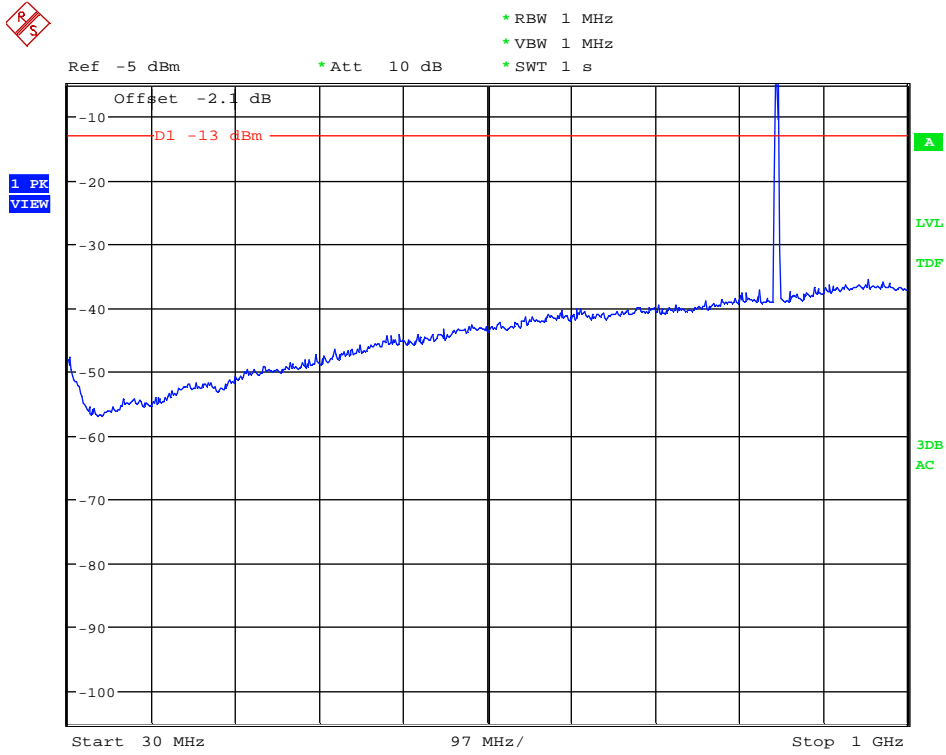

Note: The peak above the limit is the carrier frequency.


WCDMA MODULATION

CHANNEL: LOWEST

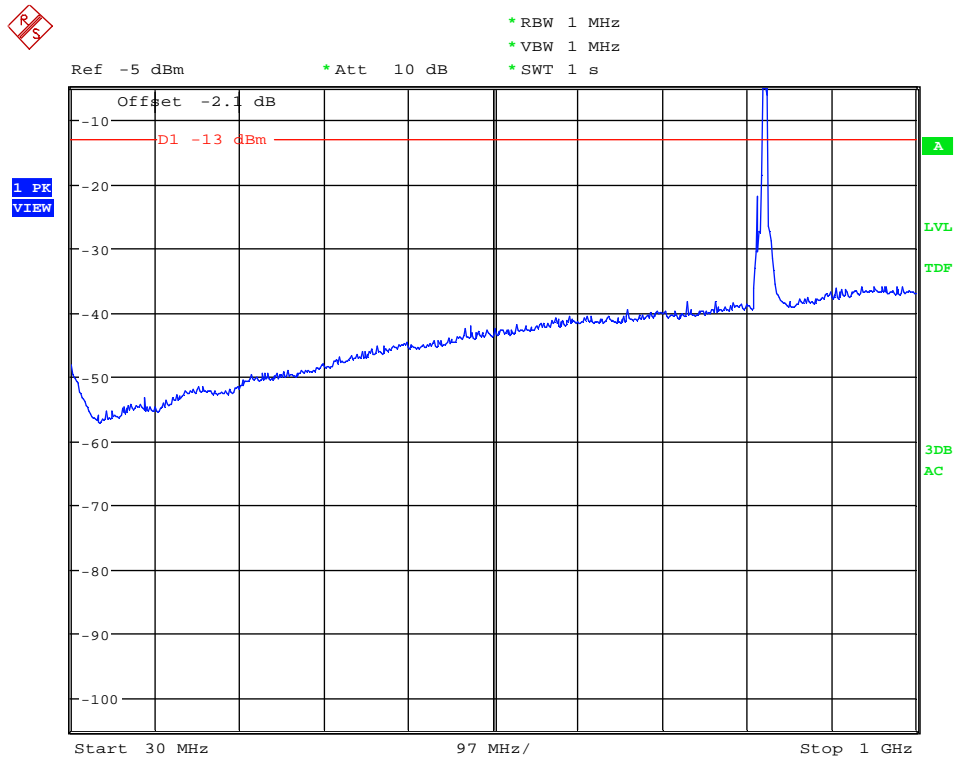


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

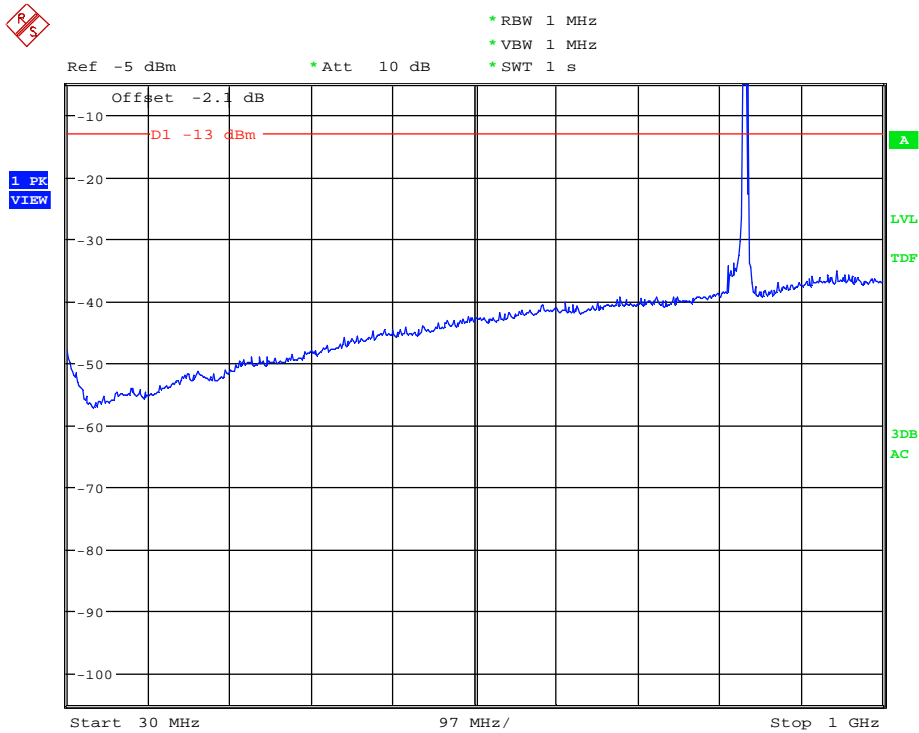

Note: The peak above the limit is the carrier frequency.

CHANNEL: HIGHEST

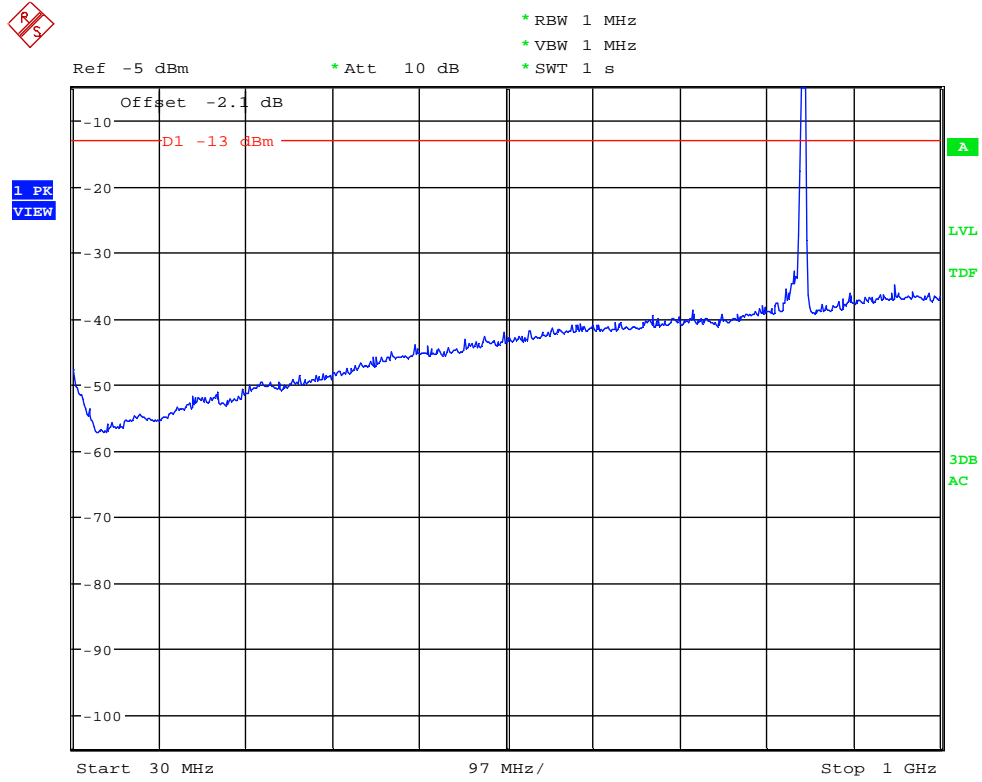


Note: The peak above the limit is the carrier frequency.


FREQUENCY RANGE 1 GHz to 3 GHz.

GPRS MODULATION


CHANNEL: LOWEST

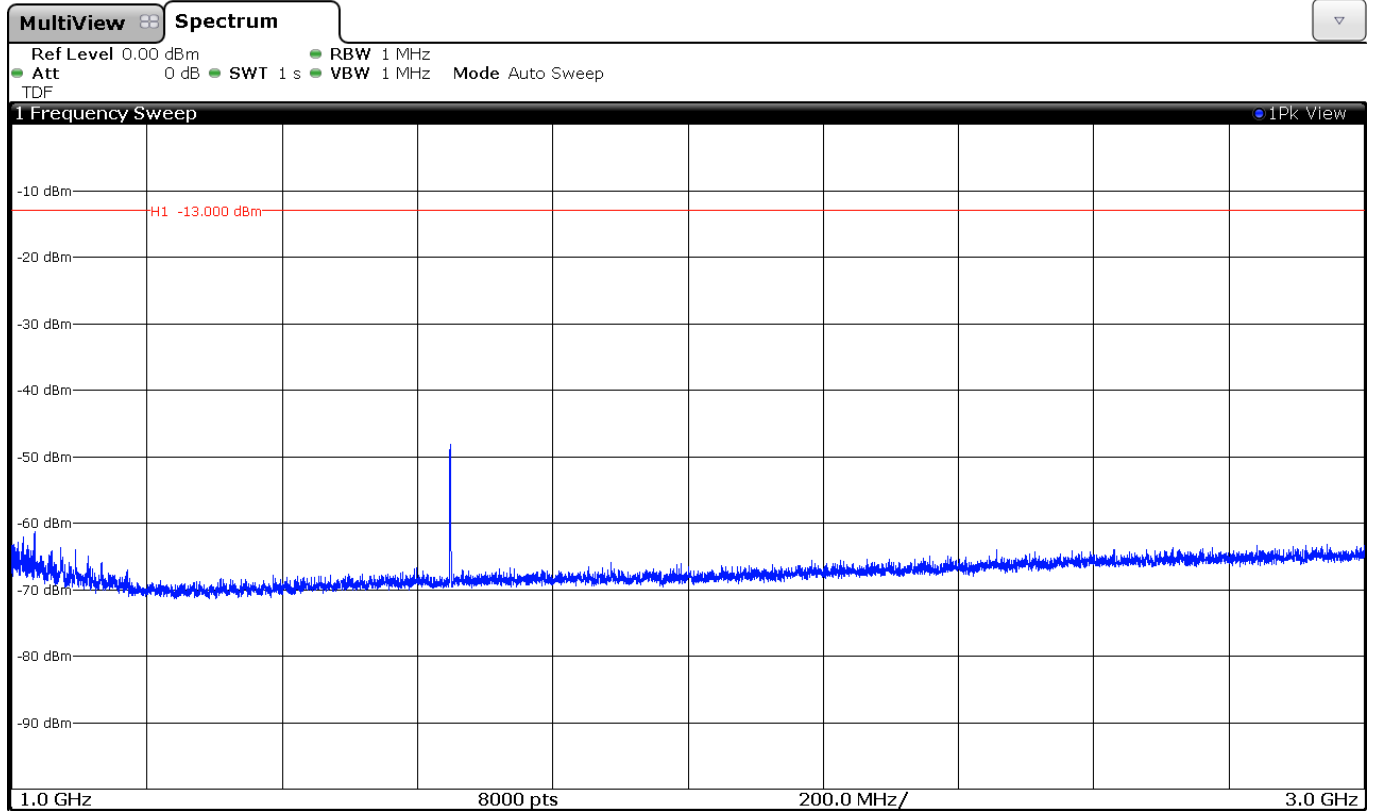

CHANNEL: MIDDLE

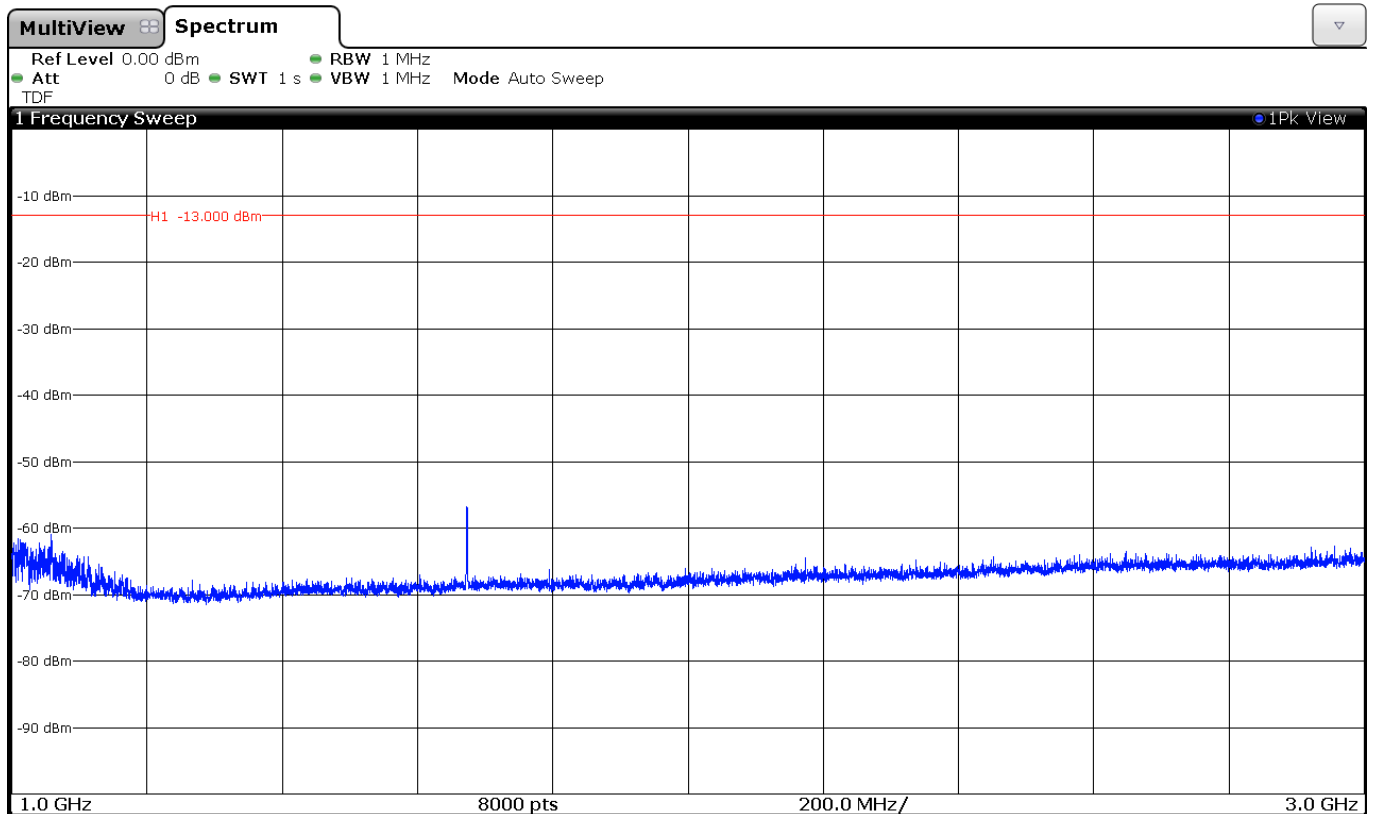


CHANNEL: HIGHEST

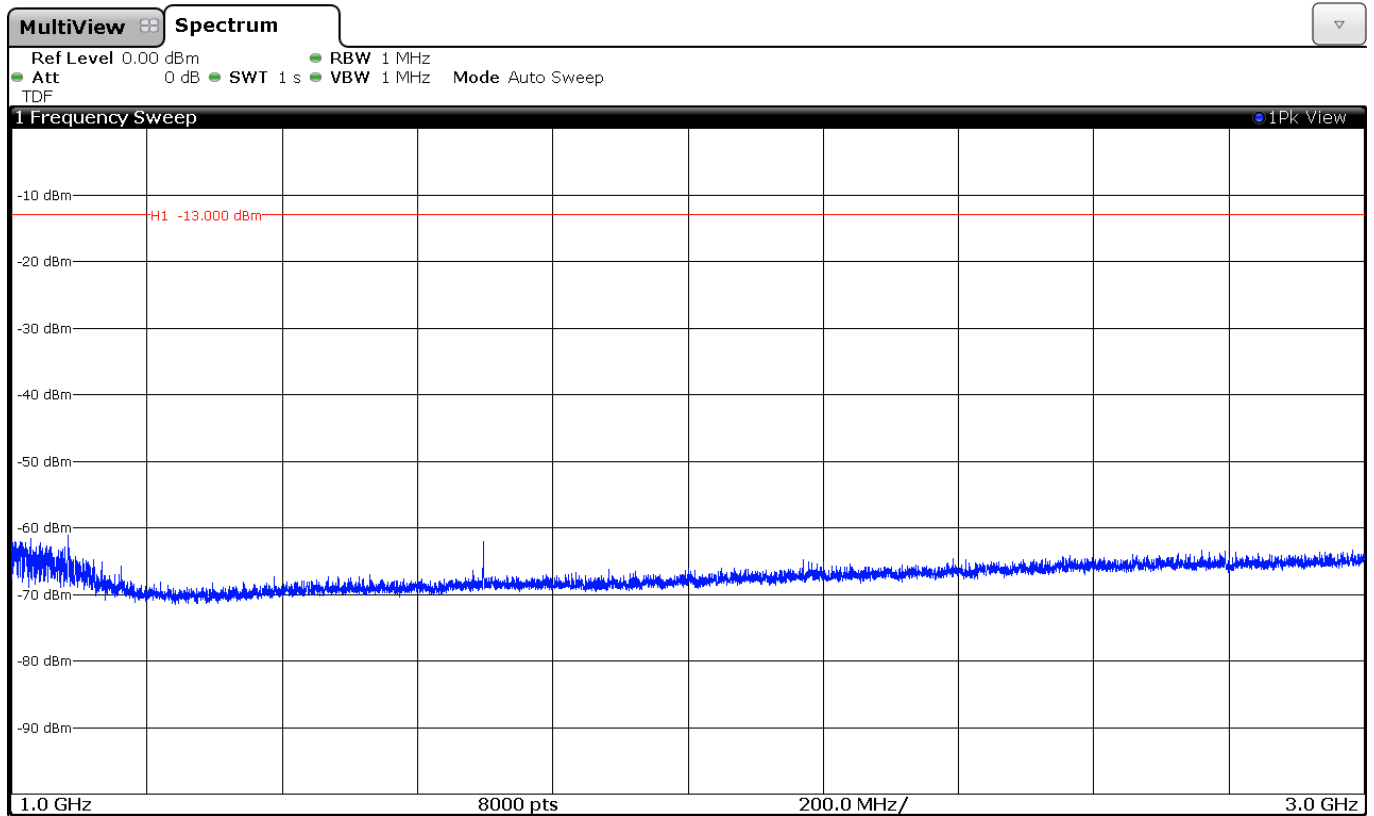


WCDMA MODULATION


CHANNEL: LOWEST

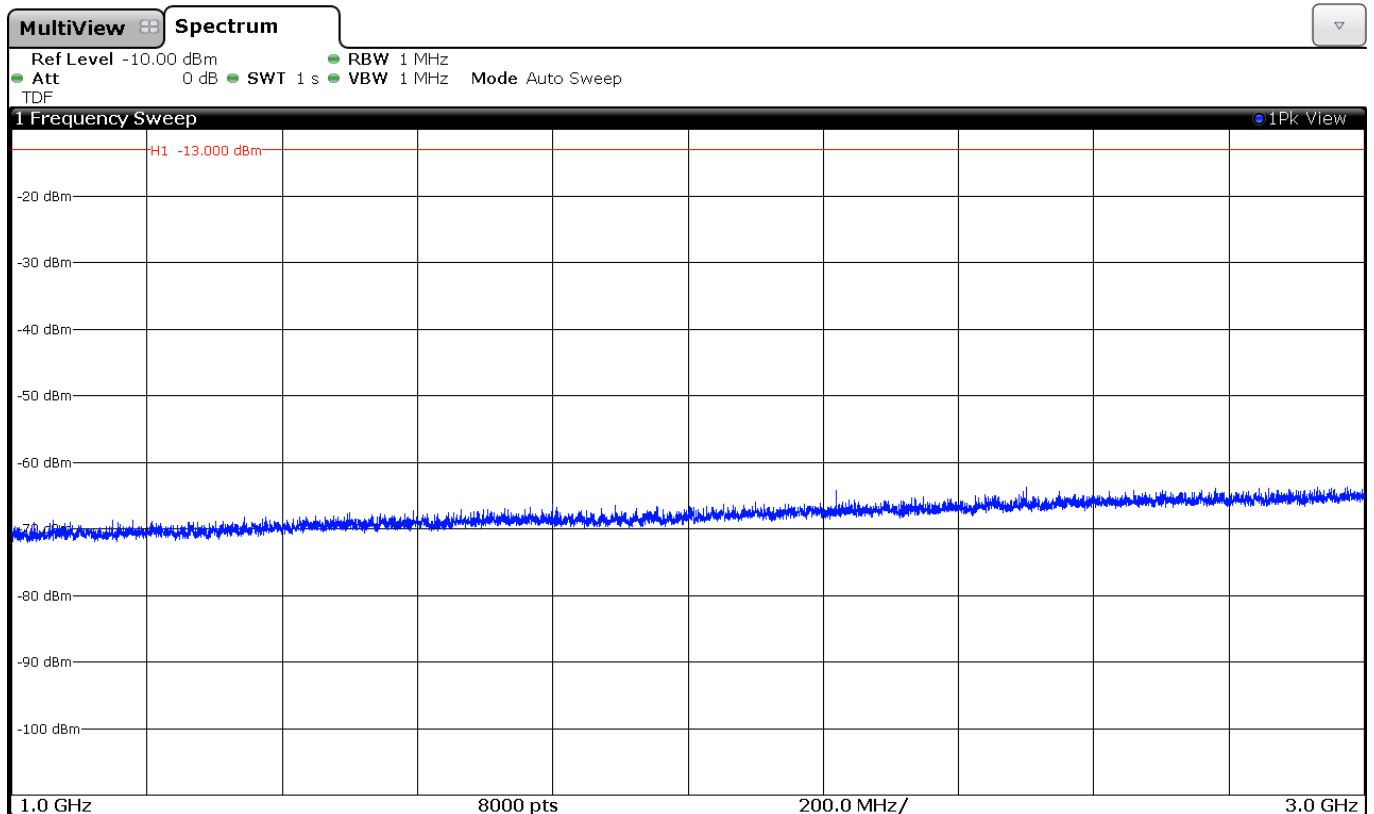

CHANNEL: MIDDLE

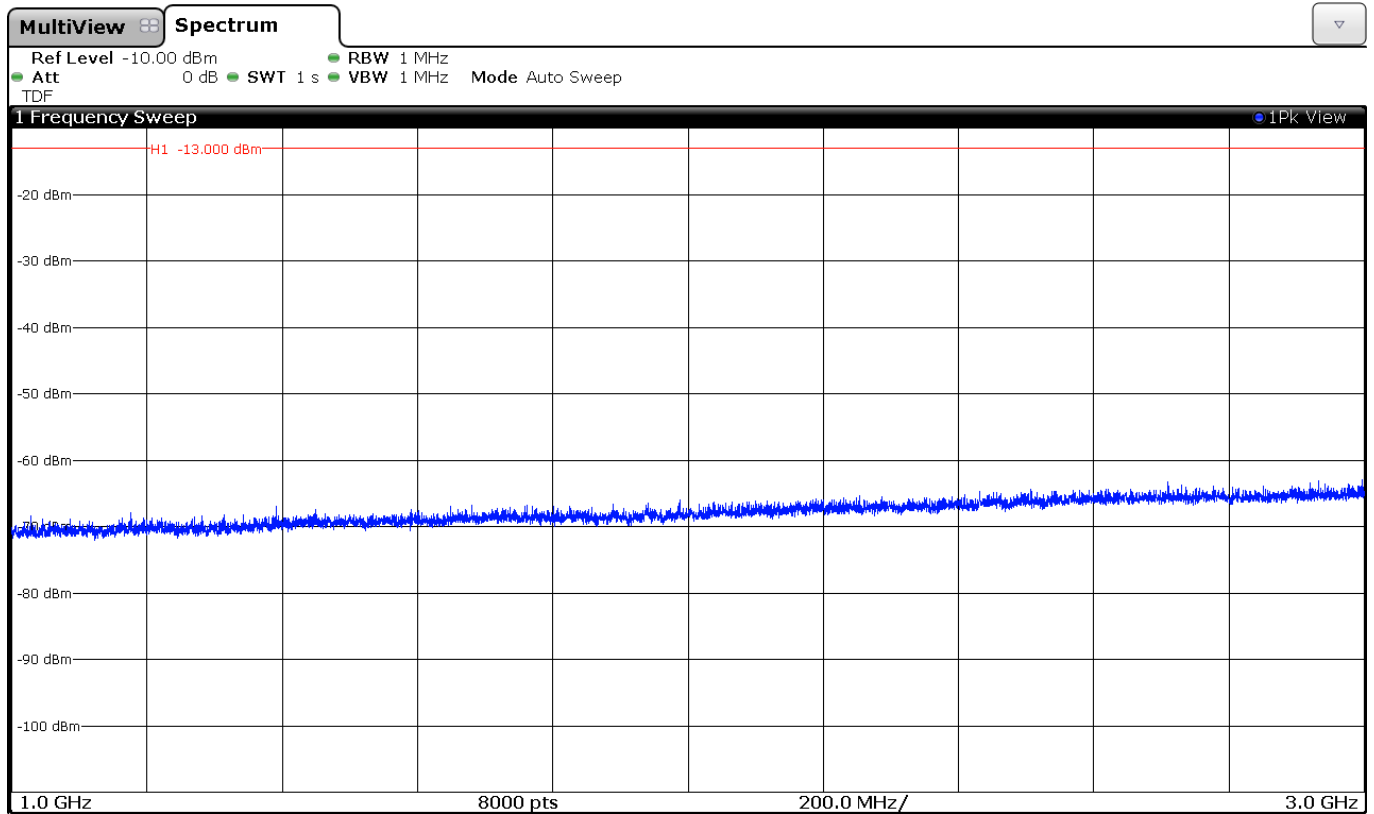


CHANNEL: HIGHEST

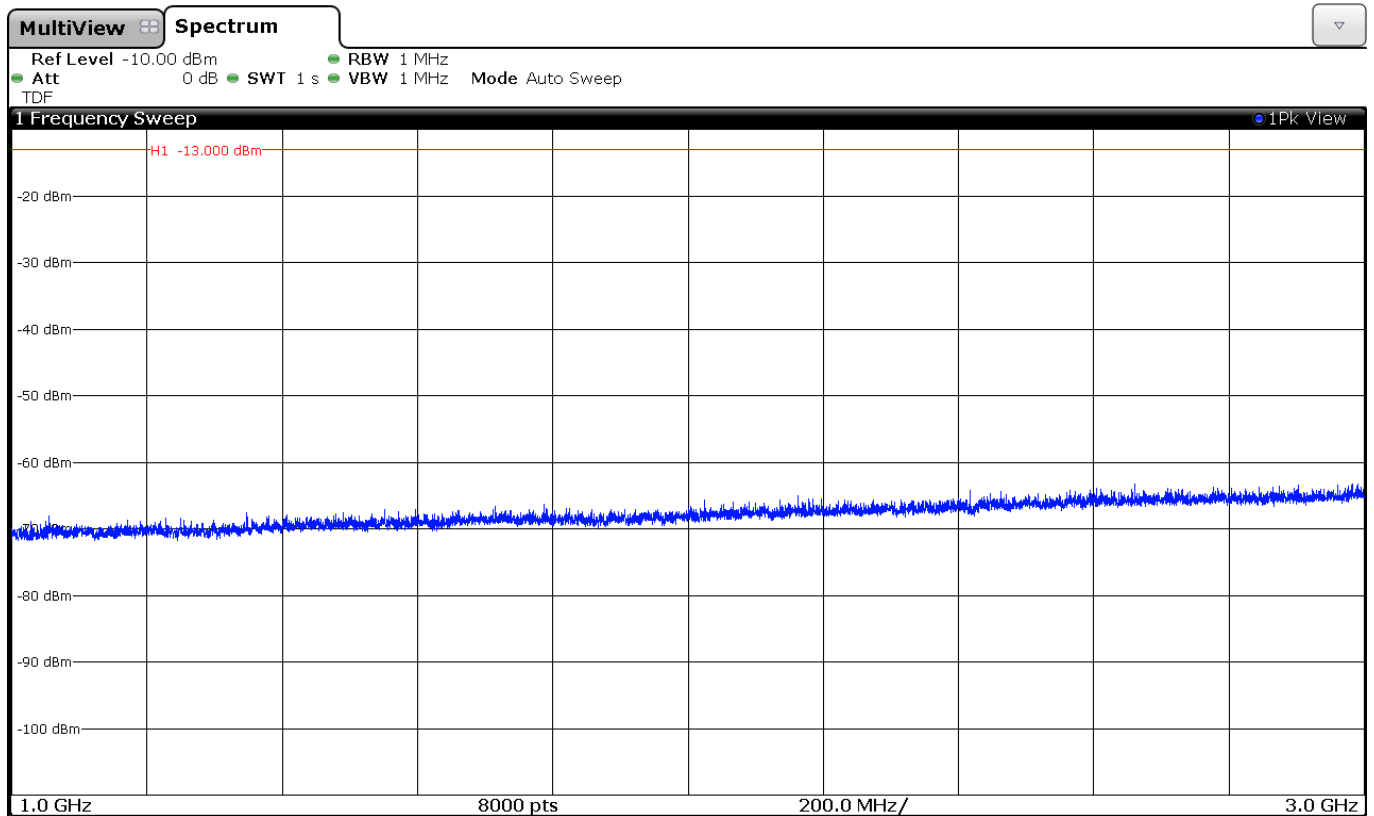


FREQUENCY RANGE 3 GHz to 12.75 GHz.

GPRS MODULATION


CHANNEL: LOWEST

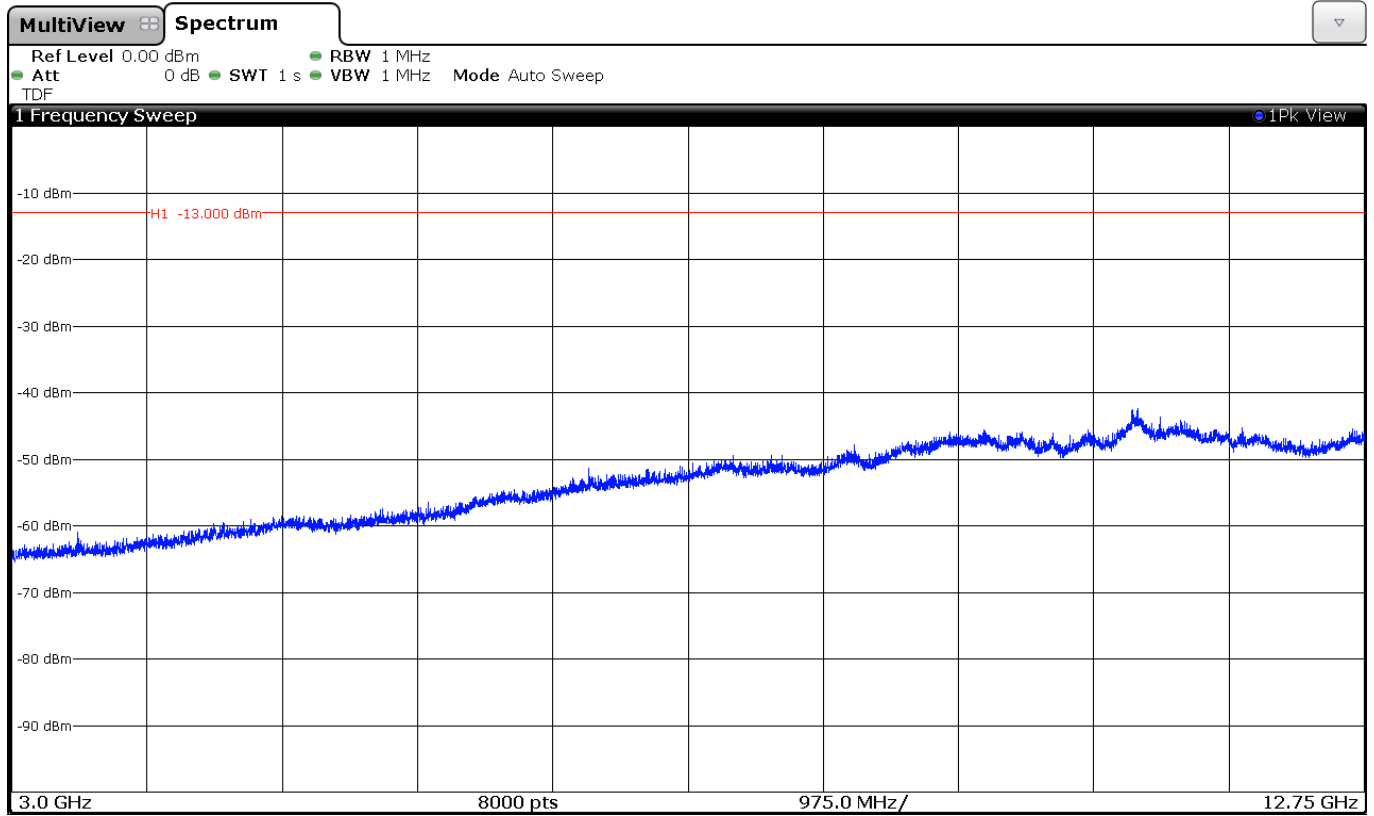

CHANNEL: MIDDLE

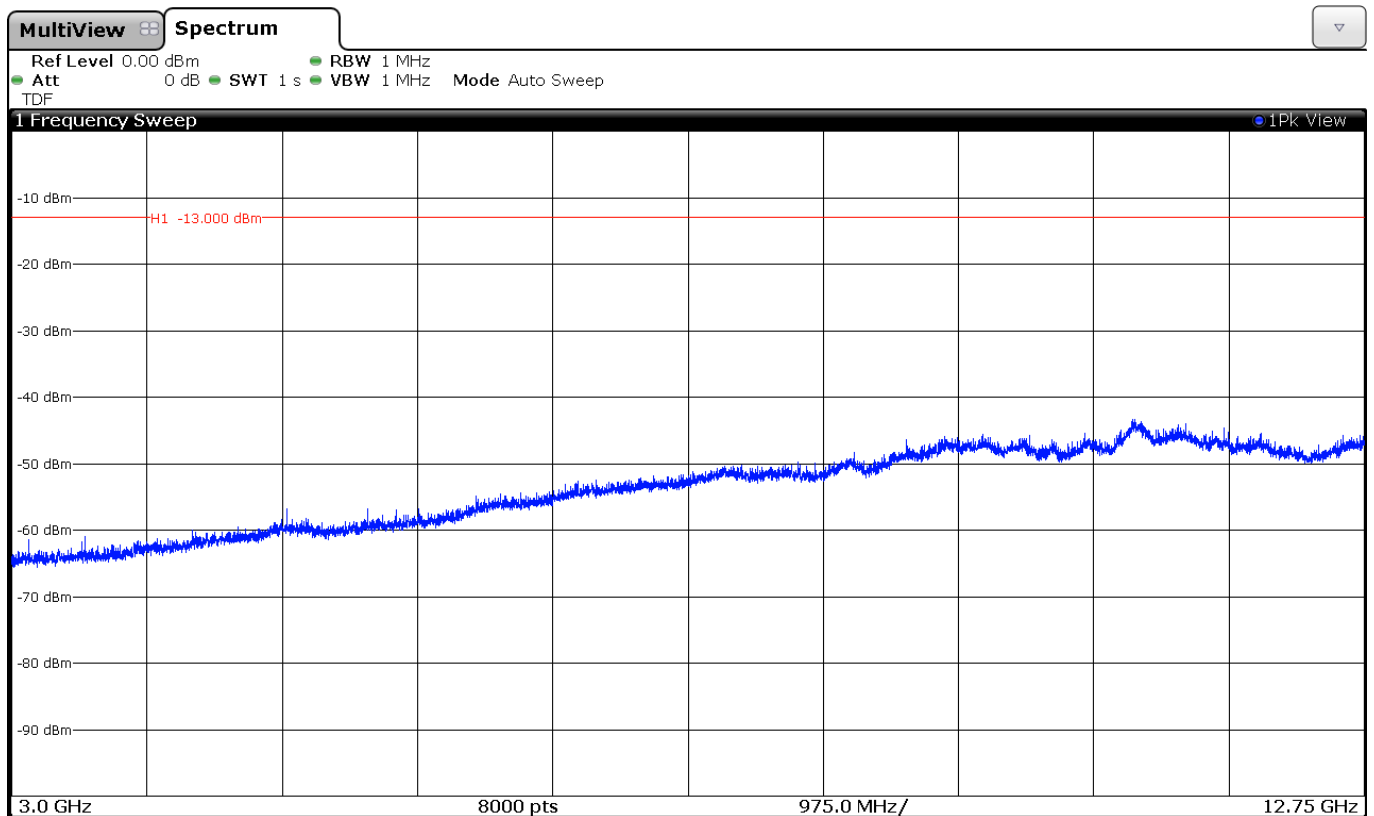


CHANNEL: HIGHEST

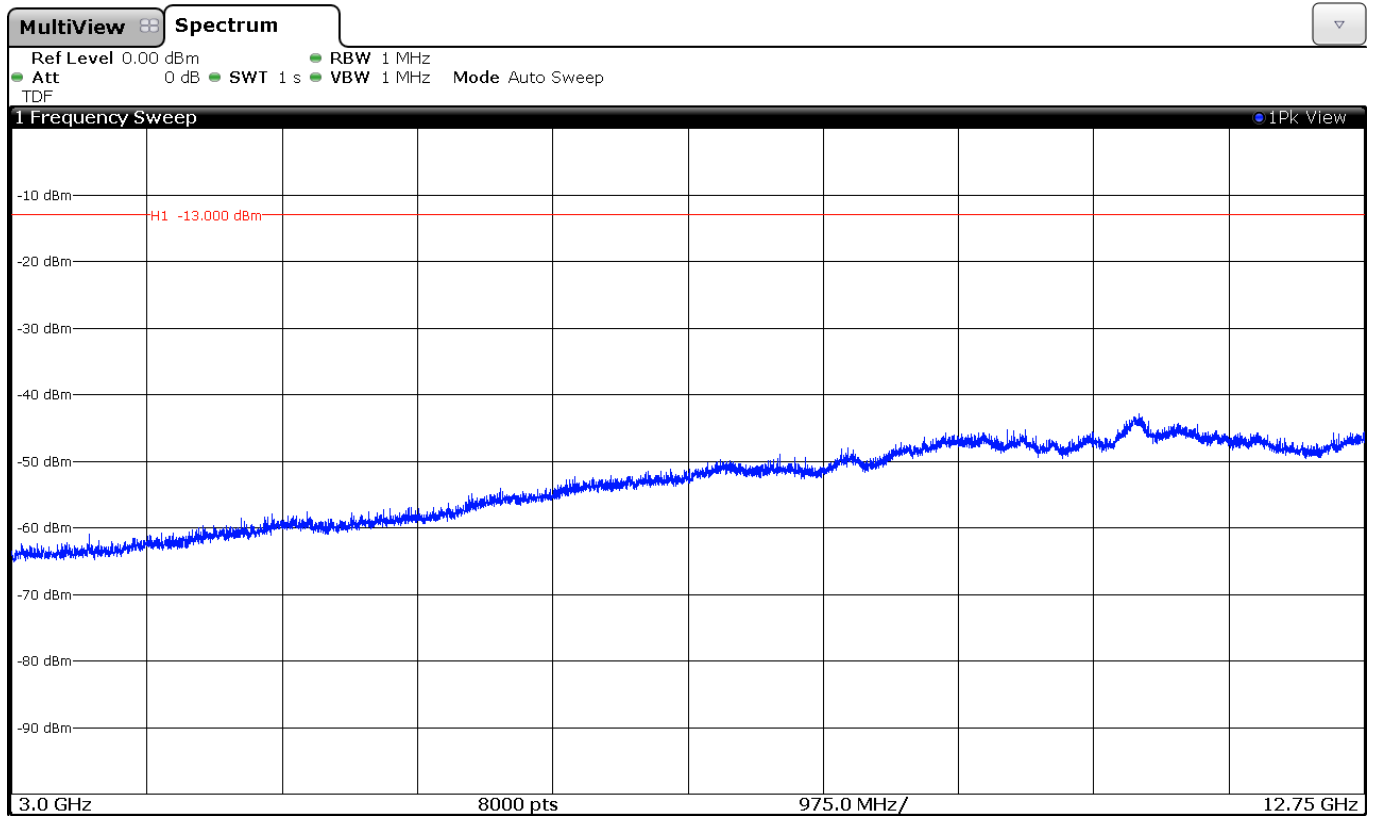


WCDMA MODULATION


CHANNEL: LOWEST

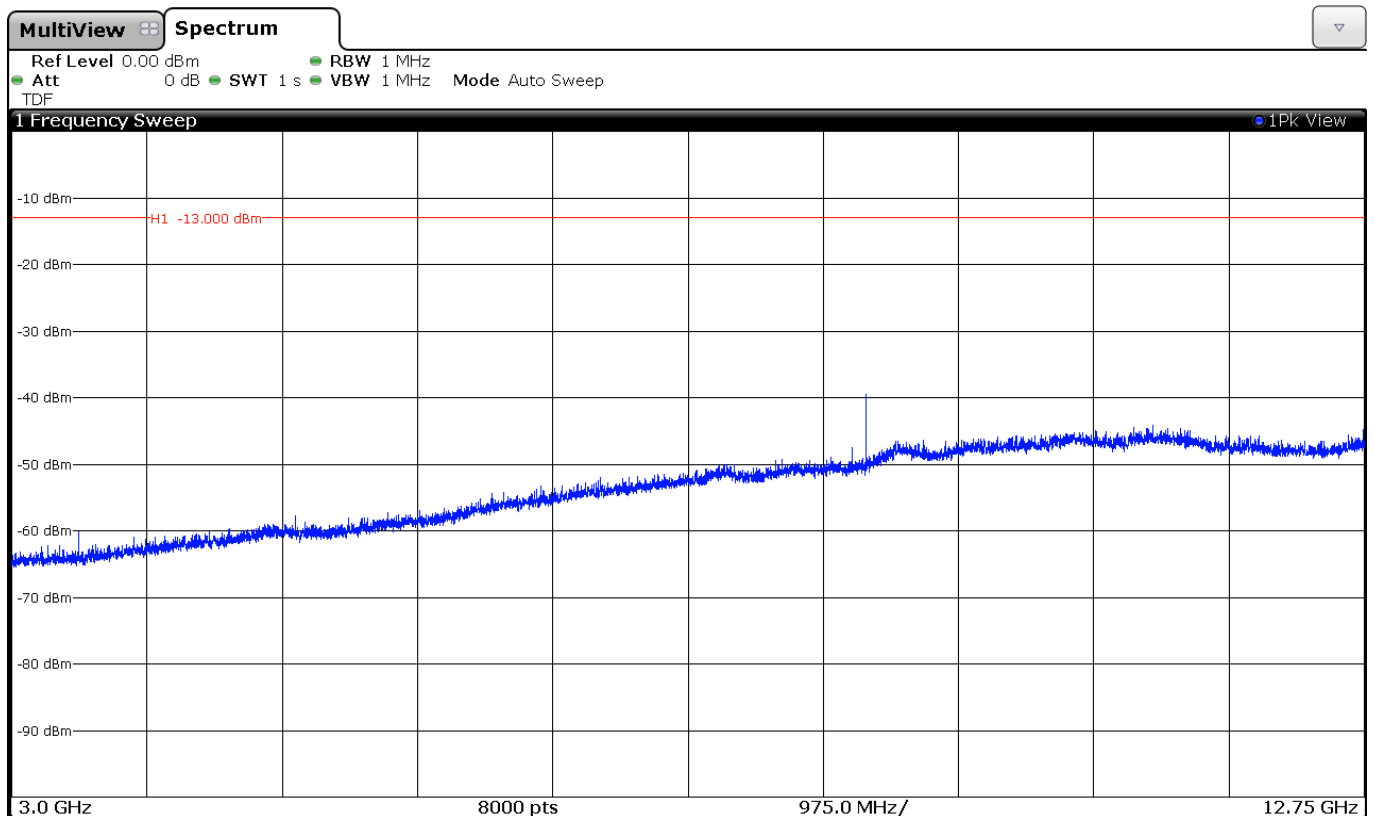

CHANNEL: MIDDLE

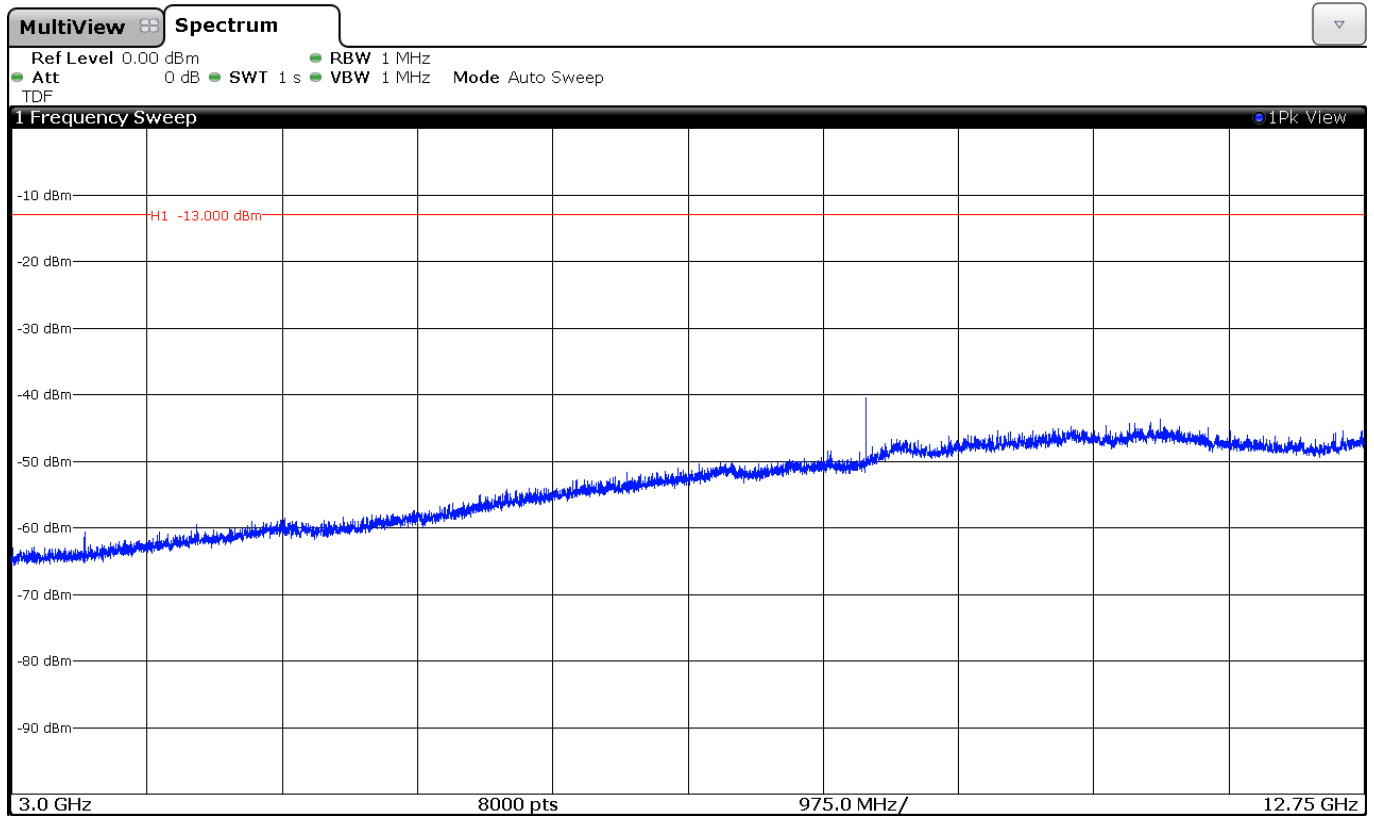

CHANNEL: HIGHEST

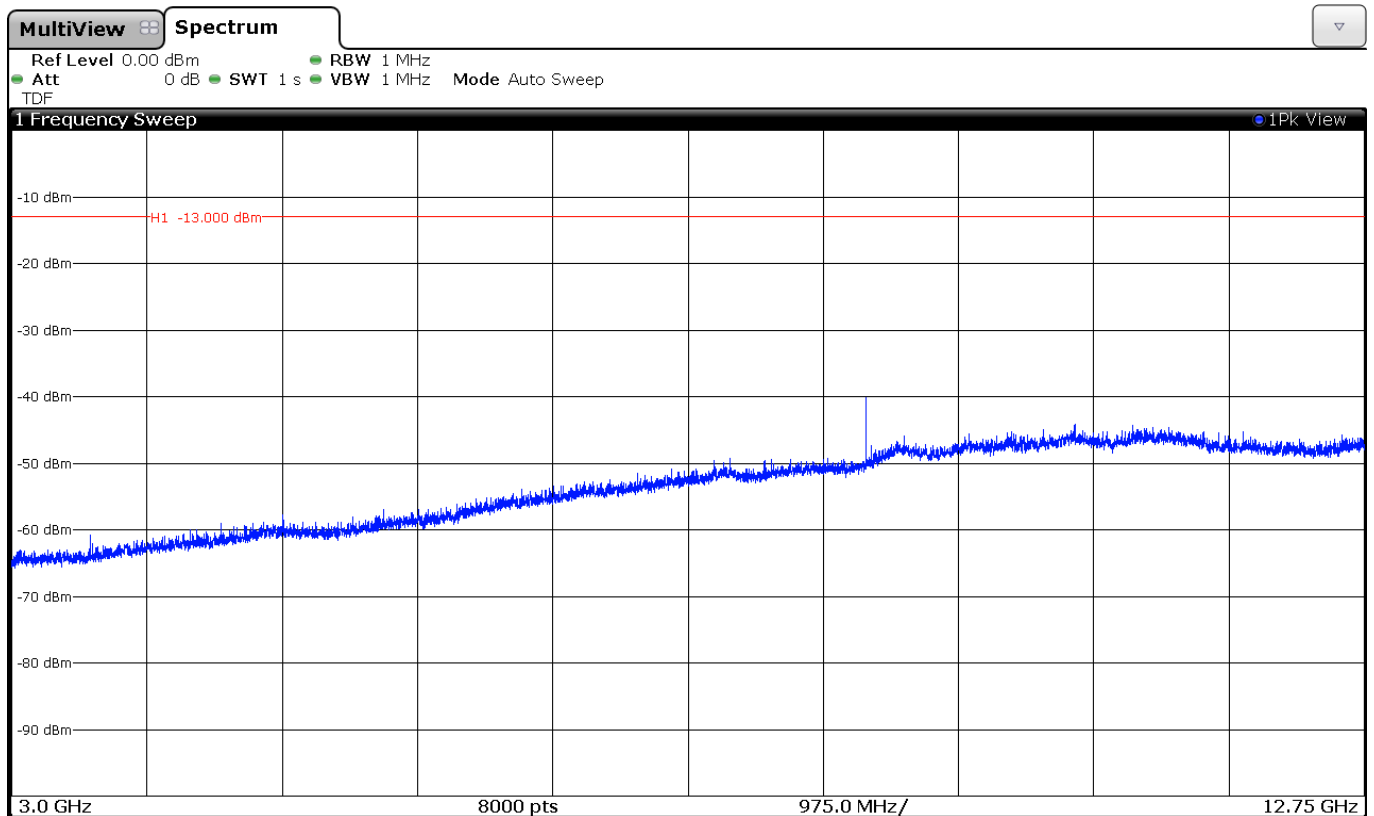

TEST RESULTS FOR FCC PART 24 AND RSS-133

TEST CONDITIONS

Power supply (V):

$$V_{\text{nom}} = 3.8 \text{ Vdc}$$

$$V_{\text{max}} = 4.4 \text{ Vdc}$$

$$V_{\text{min}} = 3.4 \text{ Vdc}$$

The subscripts nom. min and max indicate voltage test conditions (nominal, minimum and maximum respectively, as declared by the applicant).

Type of power supply = DC Voltage from external power supply

Type of antenna = external connectable antenna

TEST FREQUENCIES:

GPRS AND EDGE MODULATION

Lowest channel (512): 1850.2 MHz

Middle channel (662): 1880.2 MHz

Highest channel (810): 1909.8 MHz

WCDMA AND HSUPA MODULATION

Lowest channel (9262): 1852.4 MHz

Middle channel (9400): 1880.0 MHz

Highest channel (9538): 1907.6 MHz

RF Output Power (conducted and E.I.R.P.)

SPECIFICATION

§2.1046 and 24.232. RSS-133 Clause 6.4.

Mobile/portable stations are limited to 2 Watts (33 dBm) Effective Isotropic Radiated Power (E.I.R.P.) peak power.

METHOD

The conducted RF output power measurements were made at the RF output terminals of the EUT using an attenuator, power splitter and spectrum analyser. The EUT was controlled via the Universal Radio Communication tester R&S CMU200 selecting maximum transmission power of the EUT and different modes of modulation.

The maximum conducted output power was measured using a spectrum analyzer according to point 5.1.1. for peak power measurement and according to point 5.2.1. for average power measurement of Guidance 971168 D01.

The maximum equivalent isotropic radiated power e.i.r.p. is calculated by adding the declared maximum antenna gain (dBi).

RESULTS

Maximum declared antenna gain (dBi) = 2.14.

MAXIMUM OUTPUT POWER (CONDUCTED). See plots in next pages.

GPRS MODULATION

Channel	Lowest	Middle	Highest
Measured maximum peak power (dBm) at antenna port	29.10	29.23	28.89
Maximum equivalent isotropic radiated peak power E.I.R.P. (dBm)	31.24	31.37	30.43
Measured maximum average power (dBm) at antenna port	27.29	27.28	27.24
Maximum equivalent isotropic radiated average power E.I.R.P. (dBm)	29.43	29.42	29.38
Peak-to-average ratio (PAR) (dB)	1.81	1.95	1.65
Measurement uncertainty (dB)	±0.5		

EDGE MODULATION

Channel	Lowest	Middle	Highest
Measured maximum peak power (dBm) at antenna port	28.07	27.80	27.52
Maximum equivalent isotropic radiated peak power E.I.R.P. (dBm)	30.21	29.94	29.66
Measured maximum average power (dBm) at antenna port	23.22	22.85	22.88
Maximum equivalent isotropic radiated average power E.I.R.P. (dBm)	25.36	24.99	25.02
Peak-to-average ratio (PAR) (dB)	4.85	4.95	4.64
Measurement uncertainty (dB)	±0.5		

WCDMA MODULATION

Channel	Lowest	Middle	Highest
Measured maximum peak power (dBm) at antenna port	26.32	26.69	27.37
Maximum equivalent isotropic radiated peak power E.I.R.P. (dBm)	28.46	28.83	29.51
Measured maximum average power (dBm) at antenna port	22.64	22.31	22.67
Maximum equivalent isotropic radiated average power E.I.R.P. (dBm)	24.78	24.45	24.81
Peak-to-average ratio (PAR) (dB)	3.68	4.38	4.70
Measurement uncertainty (dB)	±0.5		

HSUPA MODULATION


Channel	Lowest	Middle	Highest
Measured maximum peak power (dBm) at antenna port	23.96	23.96	23.34
Maximum equivalent isotropic radiated peak power E.I.R.P. (dBm)	26.10	26.10	25.48
Measured maximum average power (dBm) at antenna port	20.60	20.19	20.43
Maximum equivalent isotropic radiated average power E.I.R.P. (dBm)	22.74	22.33	22.57
Peak-to-average ratio (PAR) (dB)	3.36	3.77	2.91
Measurement uncertainty (dB)	±0.5		

Verdict: PASS


PEAK OUTPUT POWER (CONDUCTED).

GPRS MODULATION


Lowest Channel.

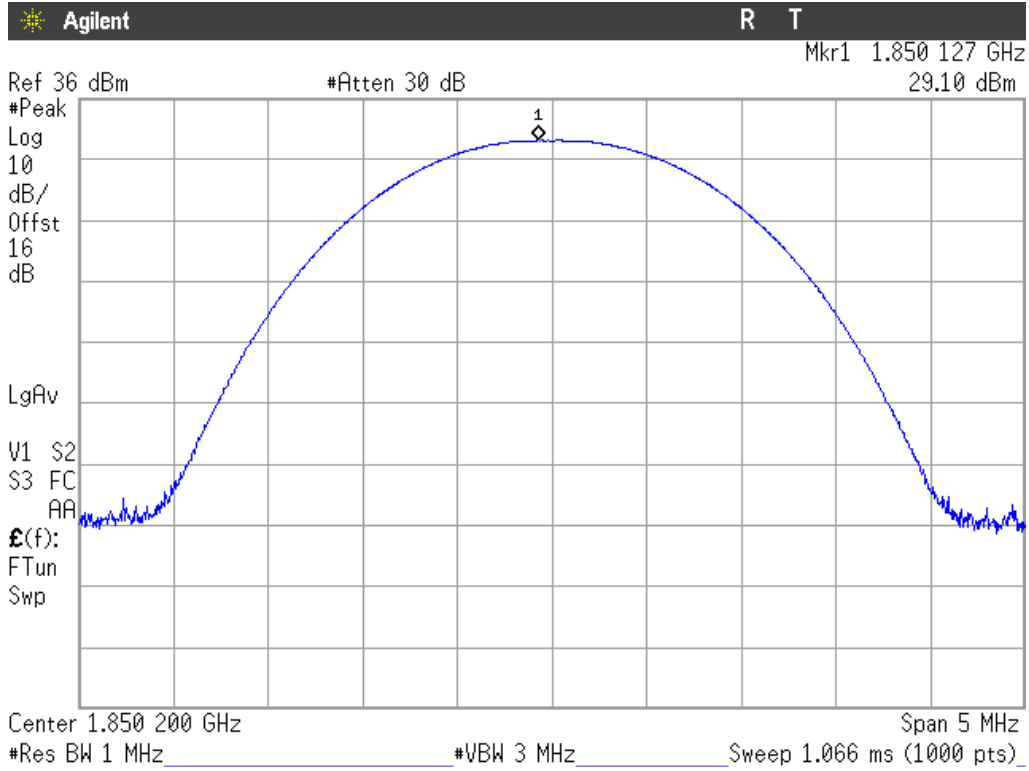

Middle Channel.

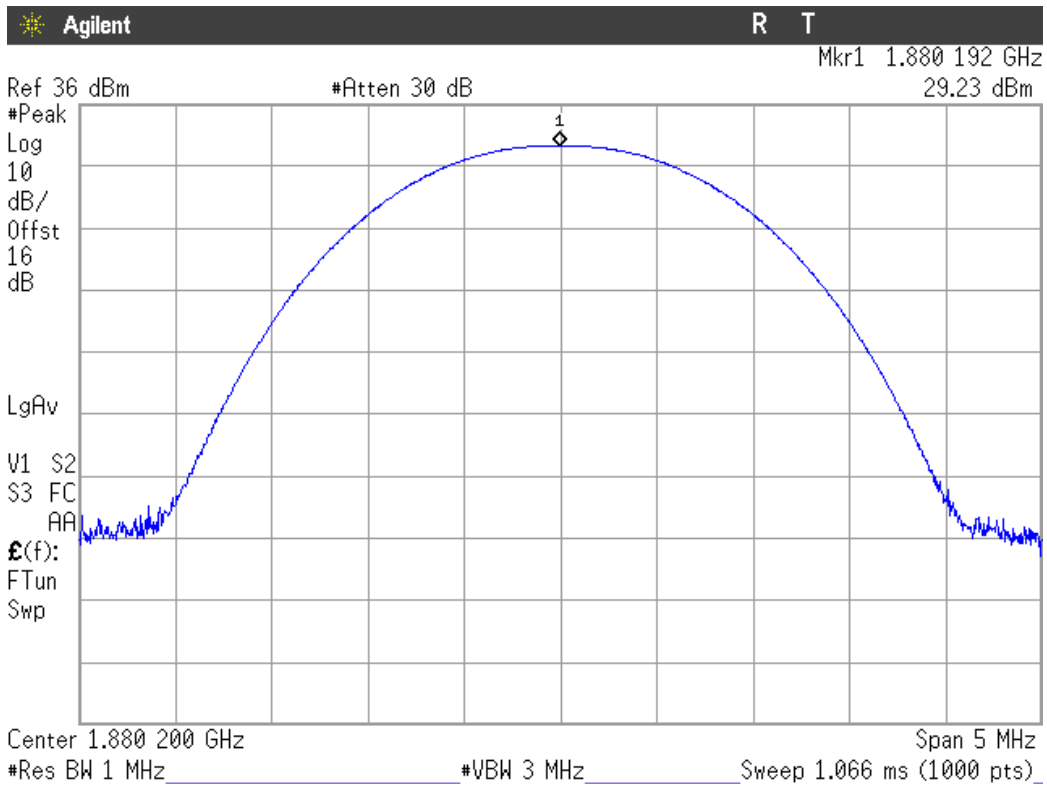


Highest Channel.

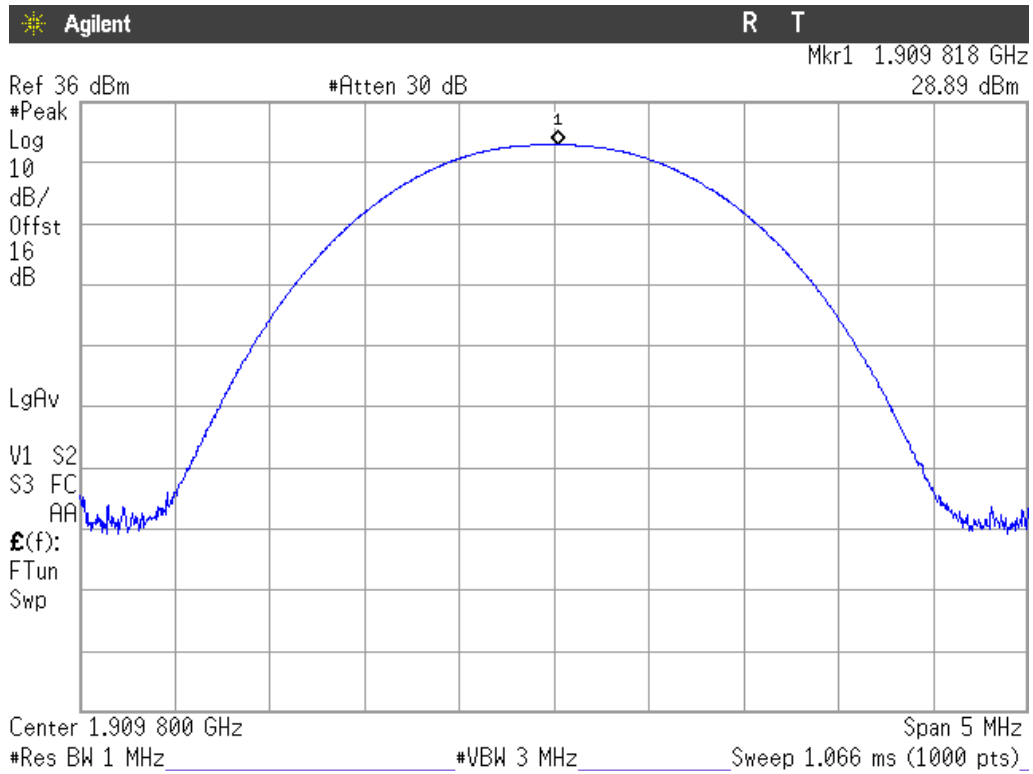


EDGE MODULATION


Lowest Channel.

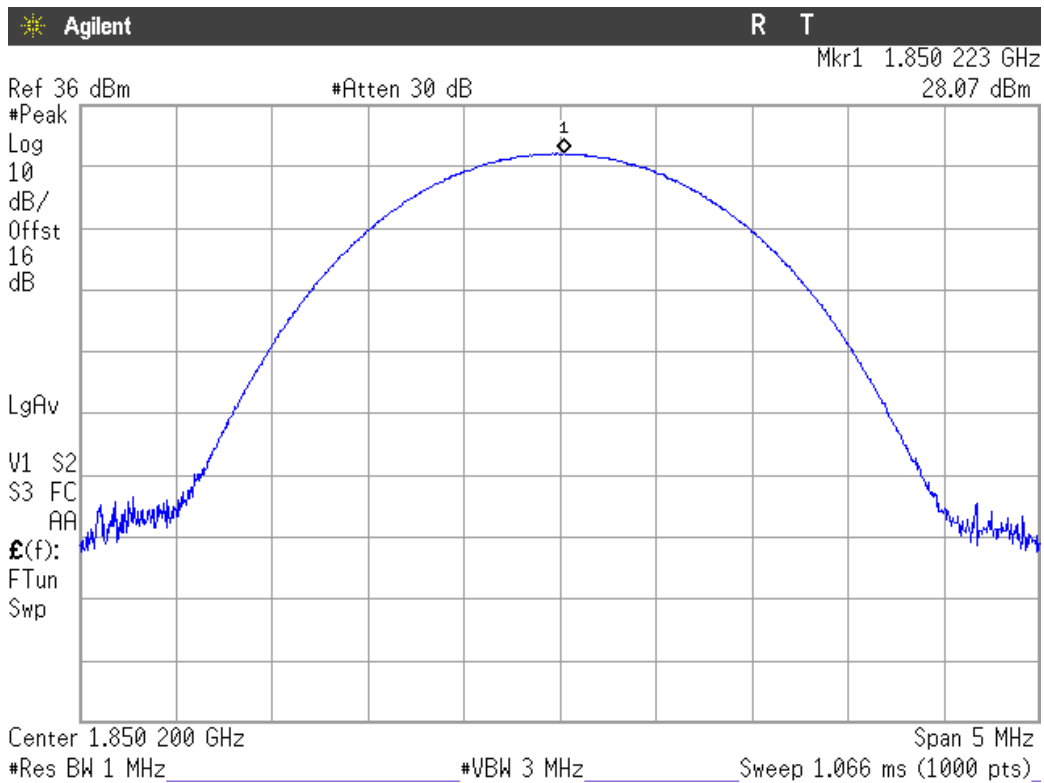

Middle Channel.

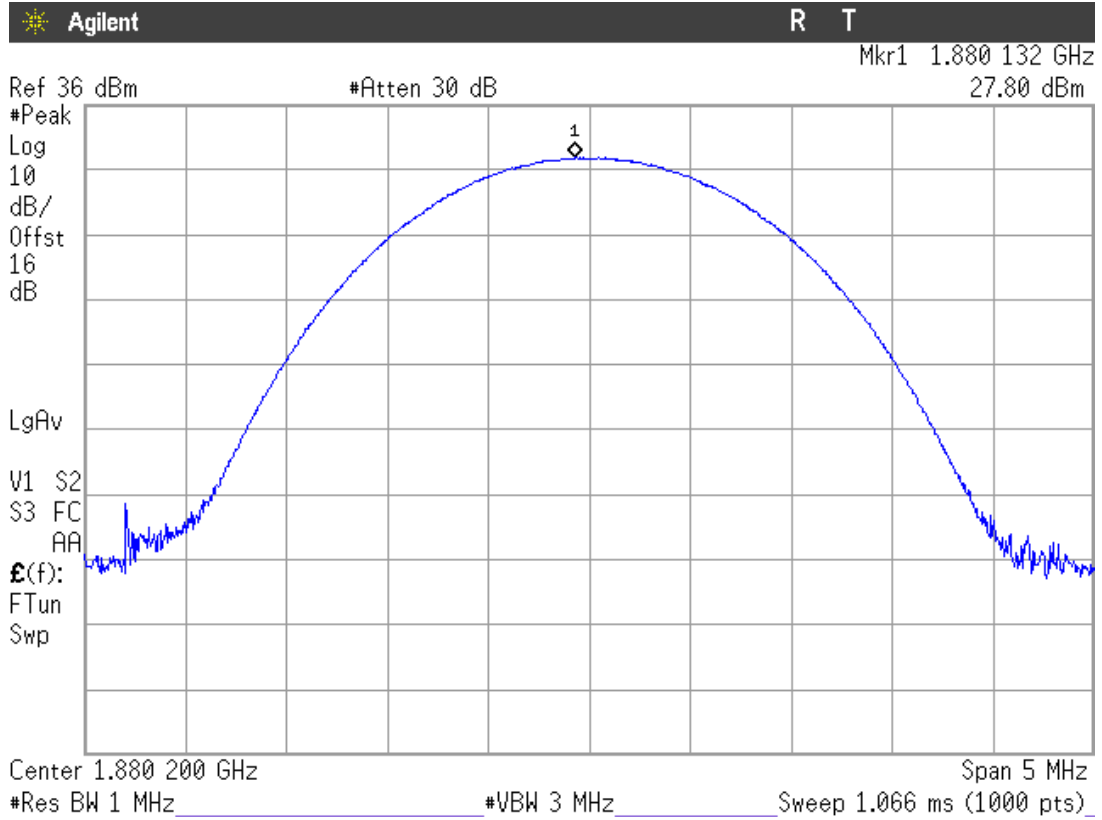


Highest Channel.

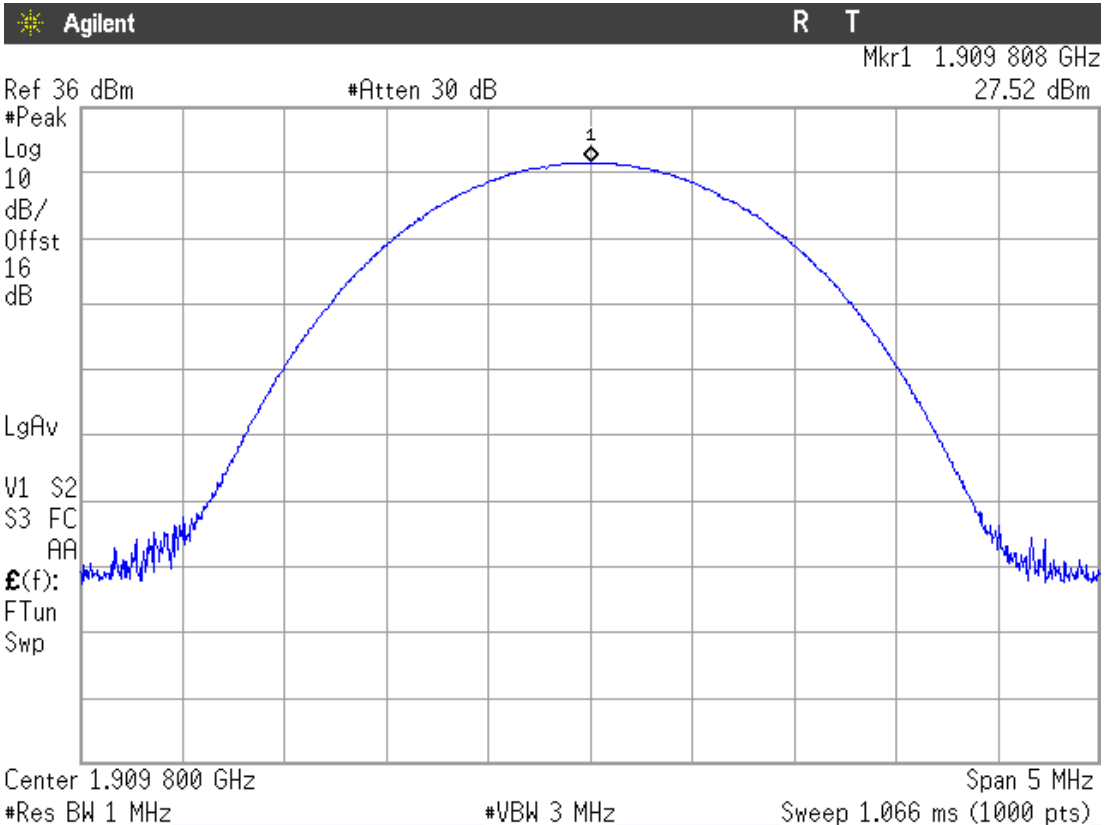


WCDMA MODULATION


Lowest Channel.

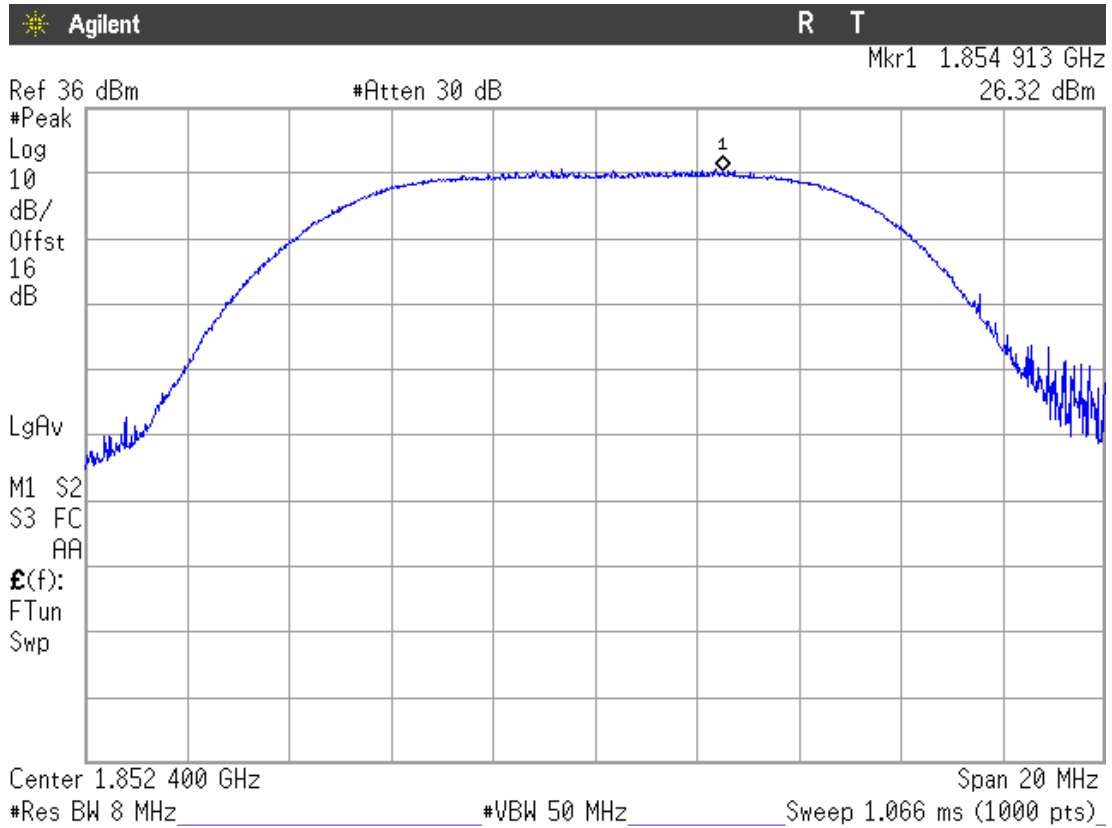

Middle Channel.

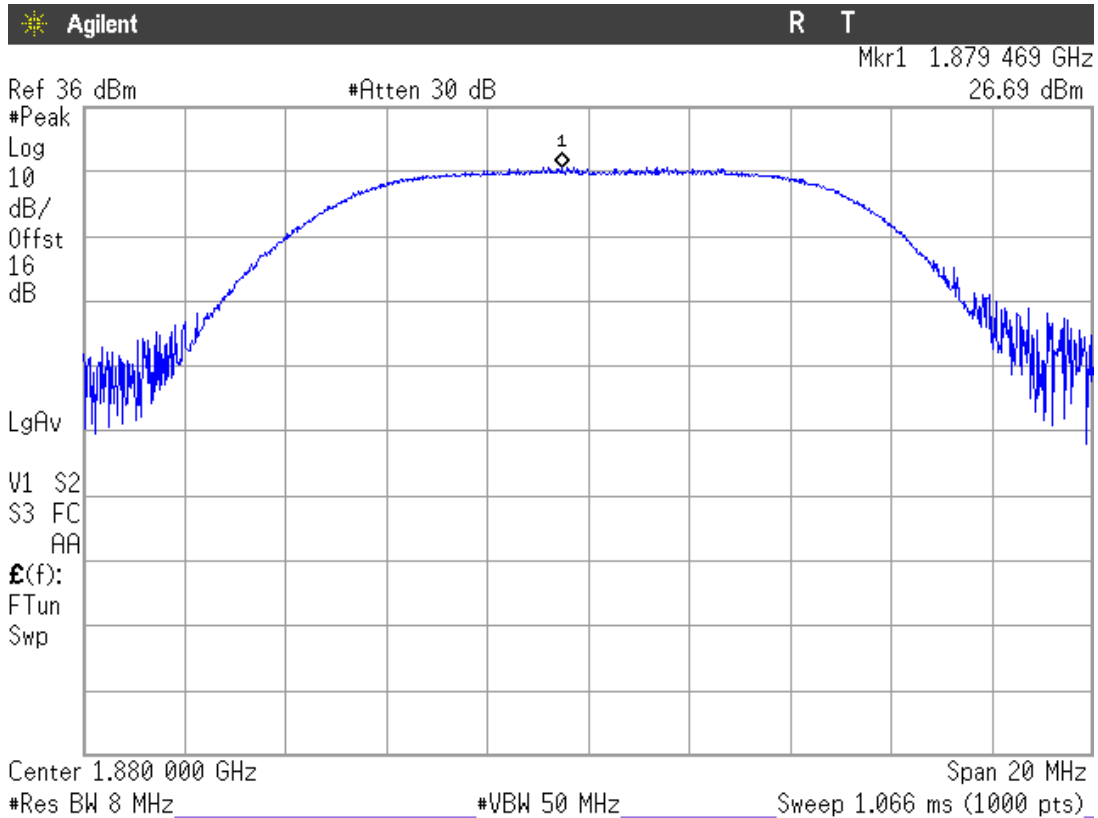


Highest Channel.

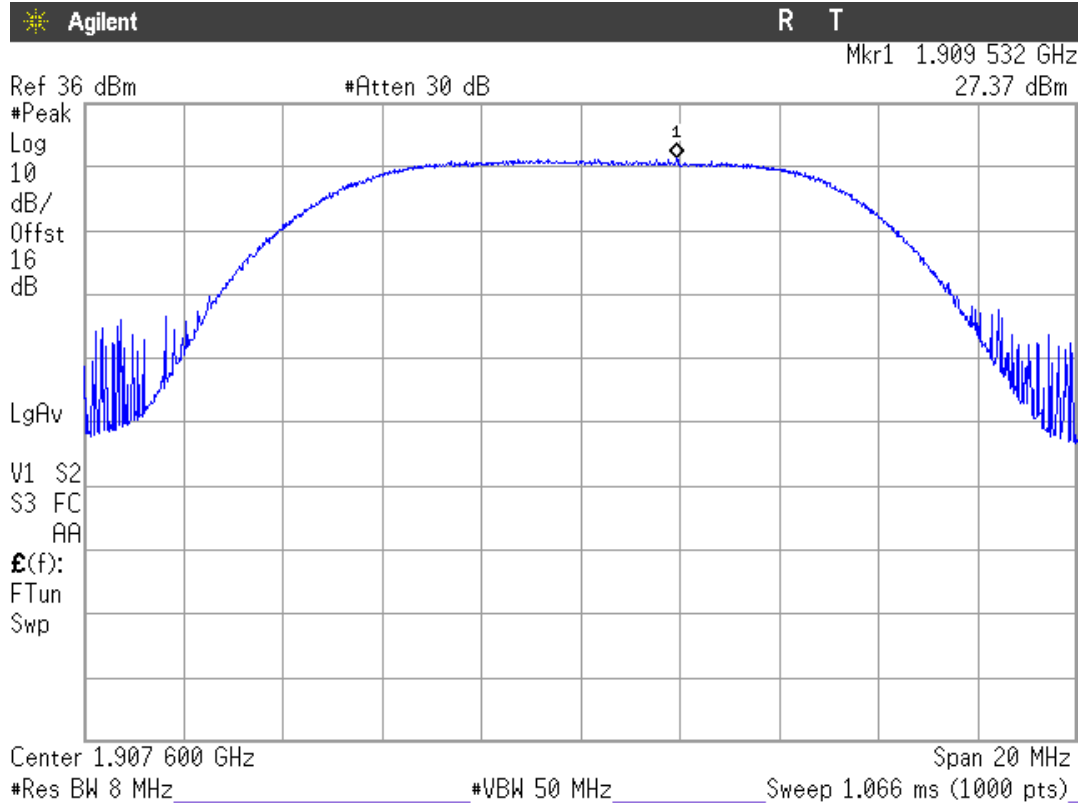


HSUPA MODULATION


Lowest Channel

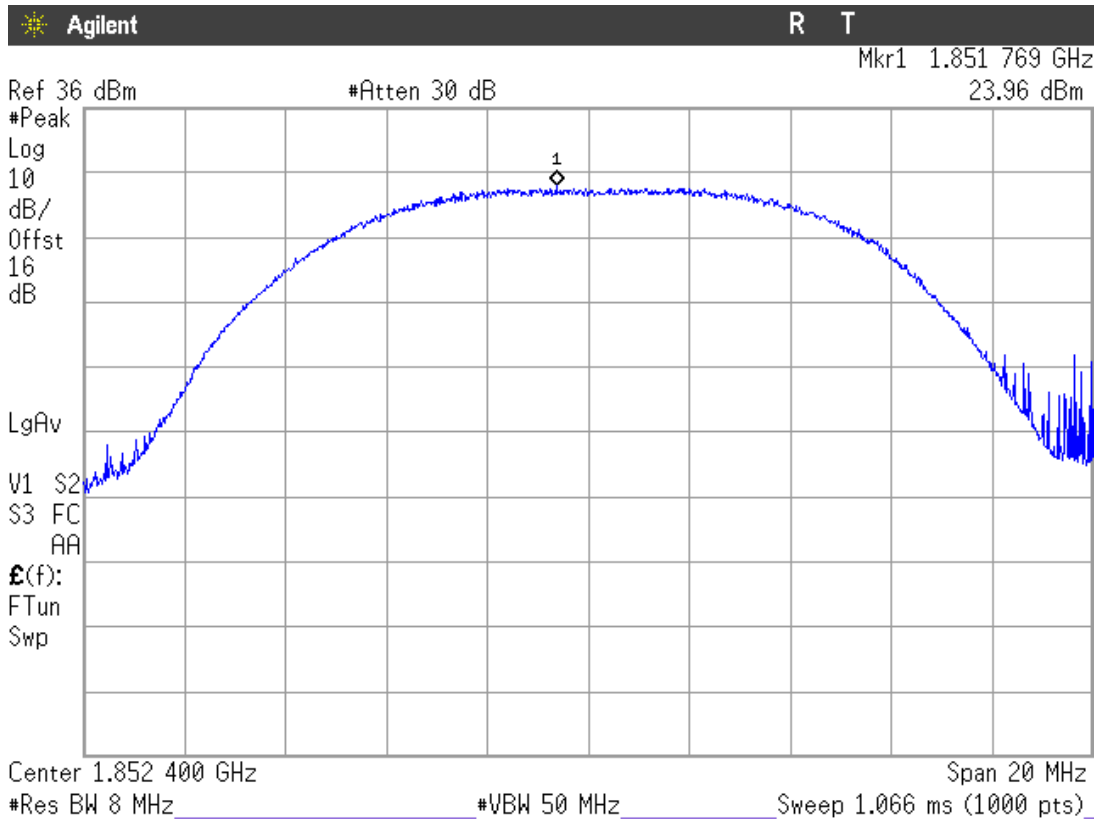

Middle Channel

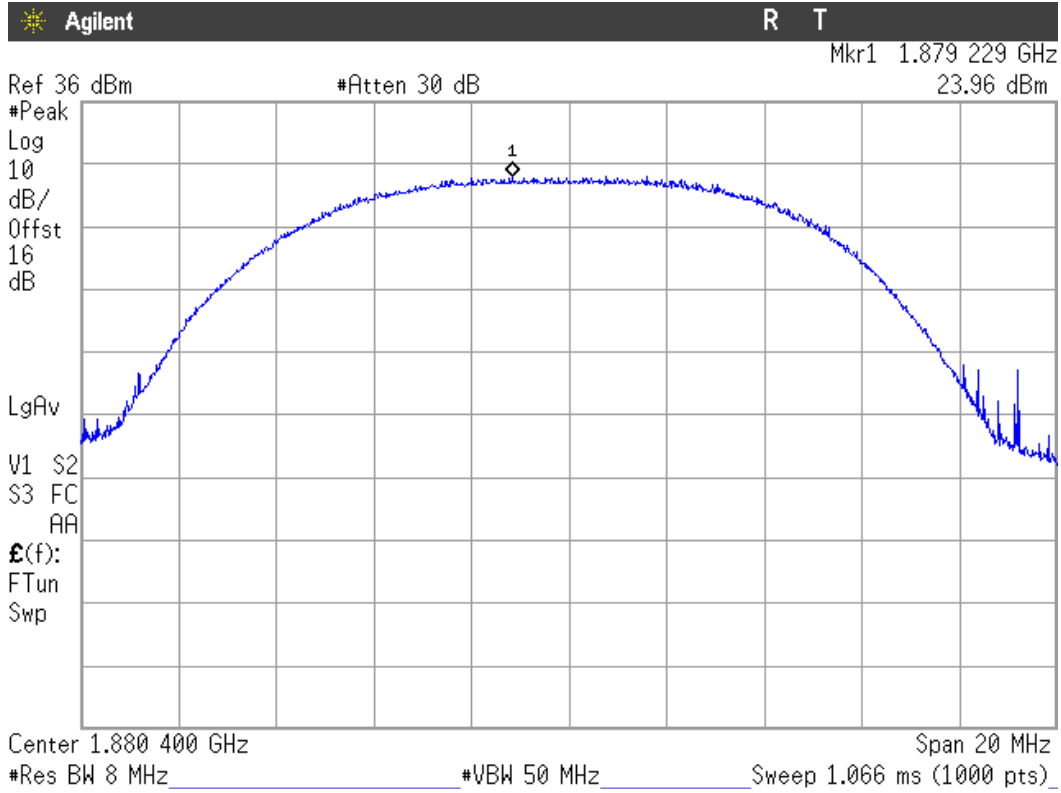


Highest Channel

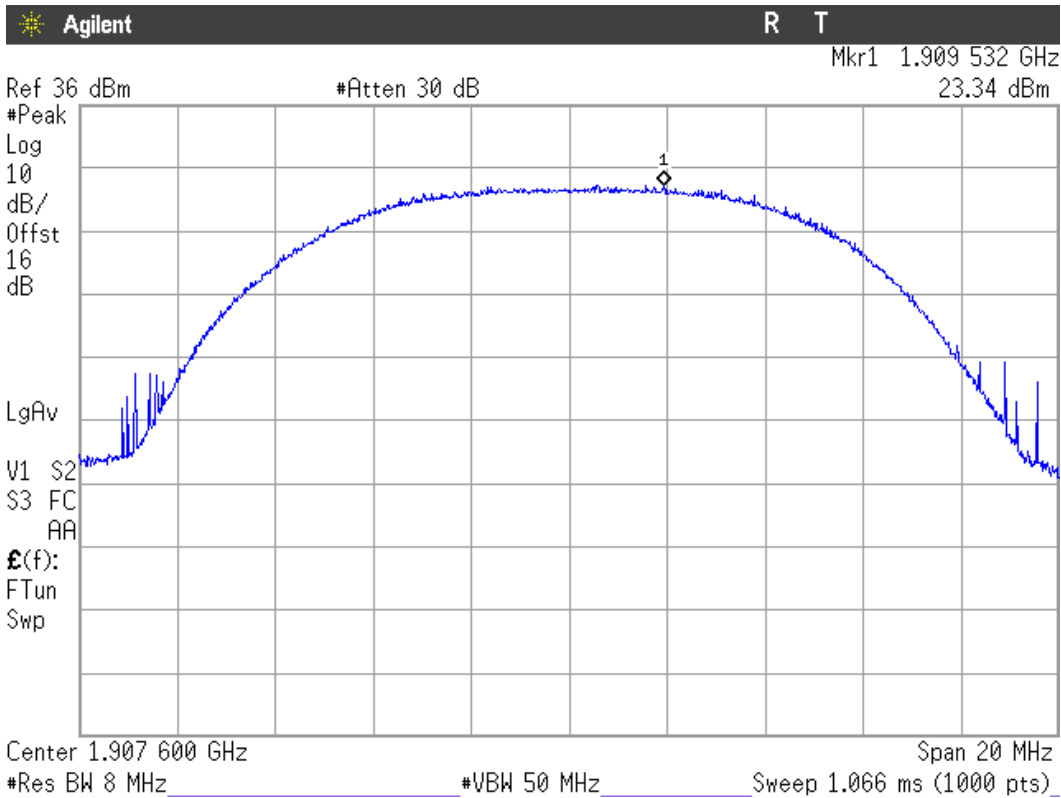


AVERAGE OUTPUT POWER (CONDUCTED).

GPRS MODULATION


Lowest Channel

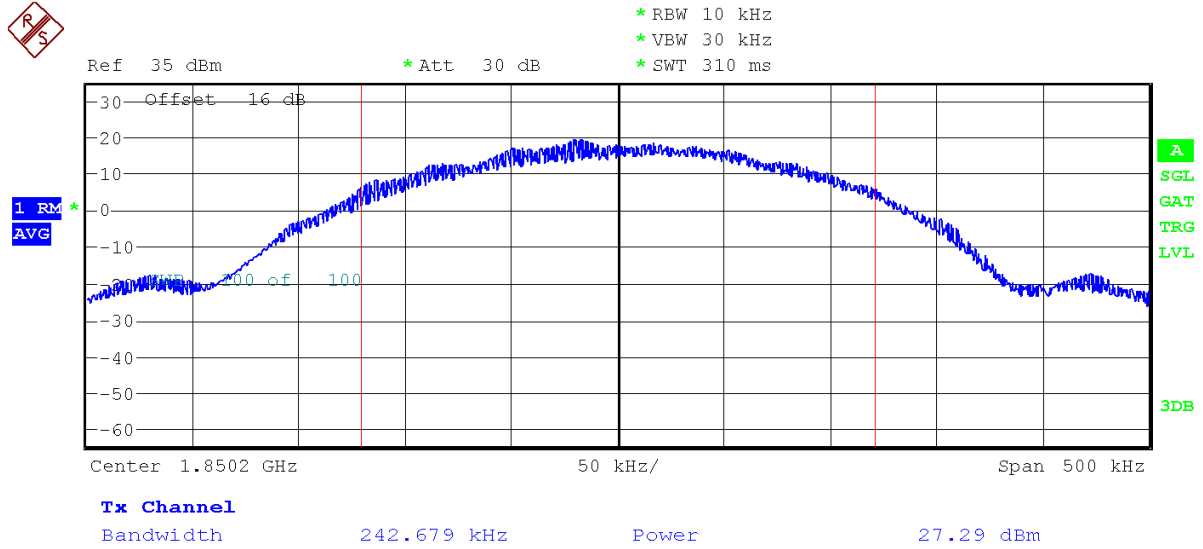

Middle Channel

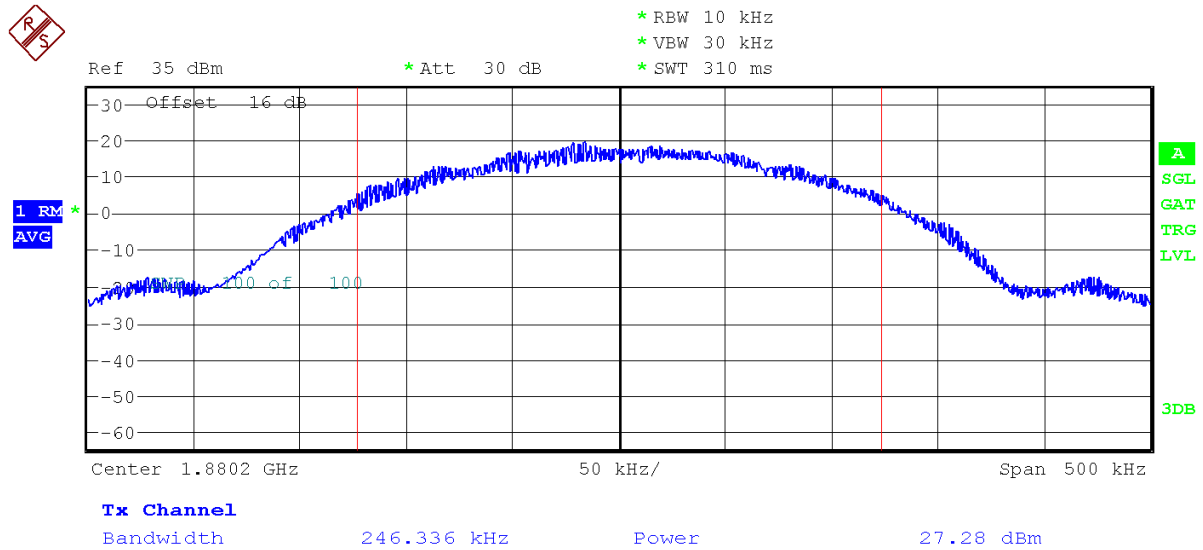


Highest Channel

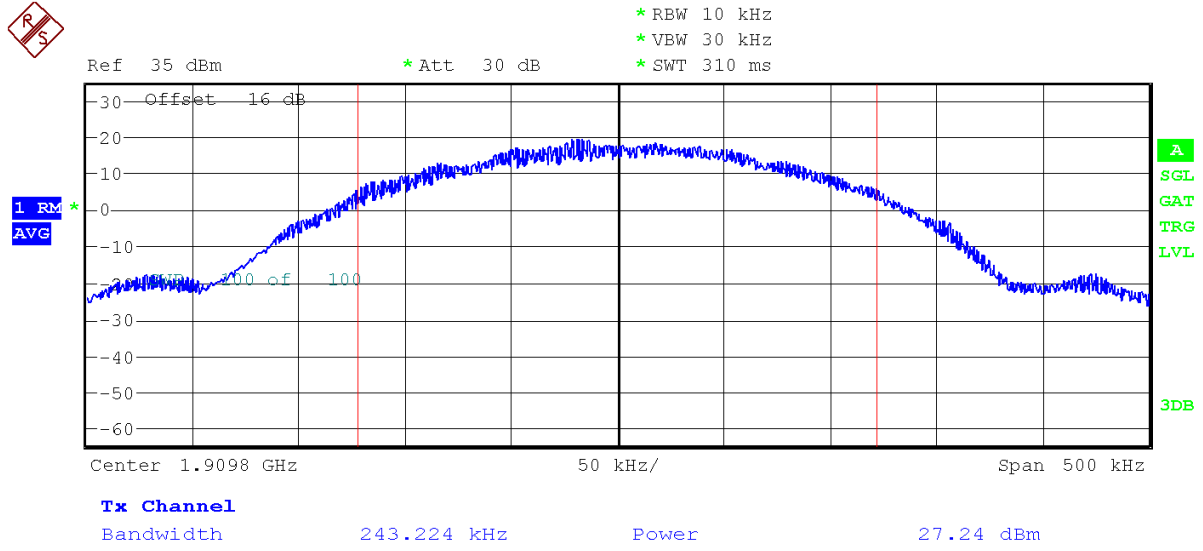


EDGE MODULATION


Lowest Channel

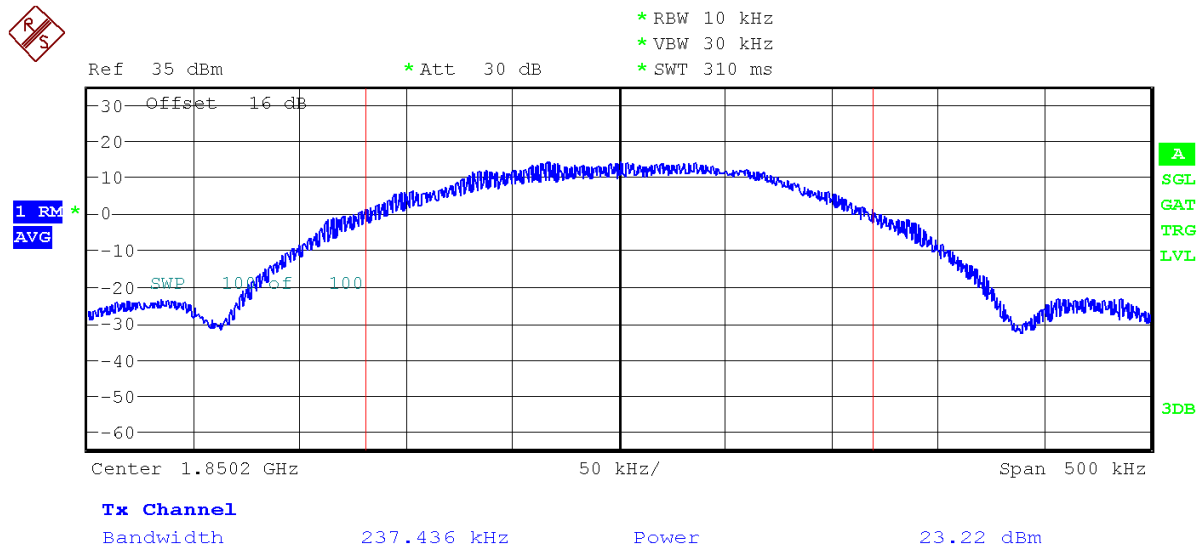

Middle Channel

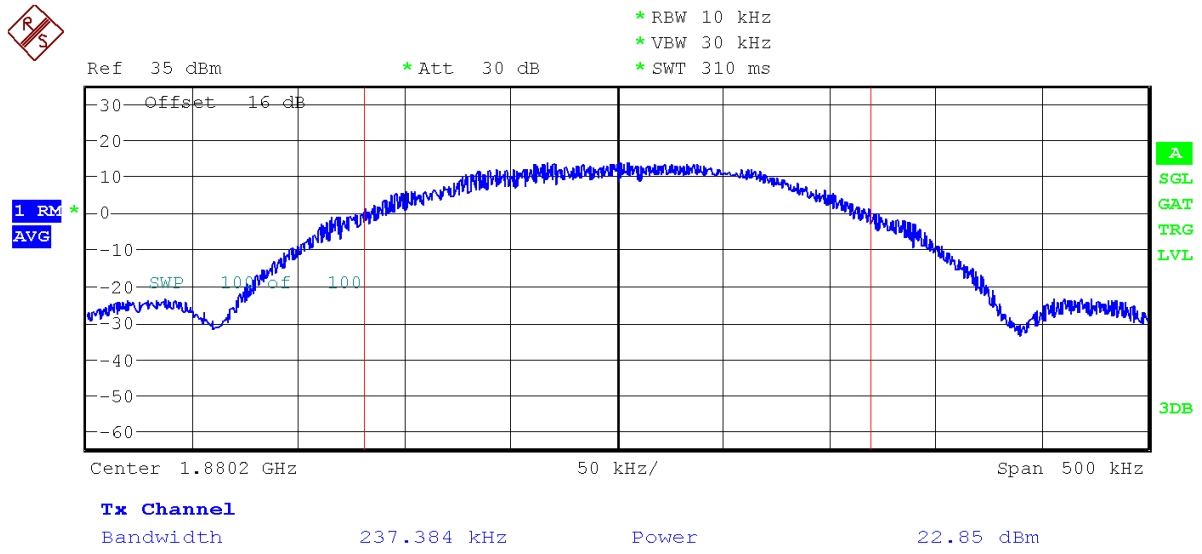


Highest Channel

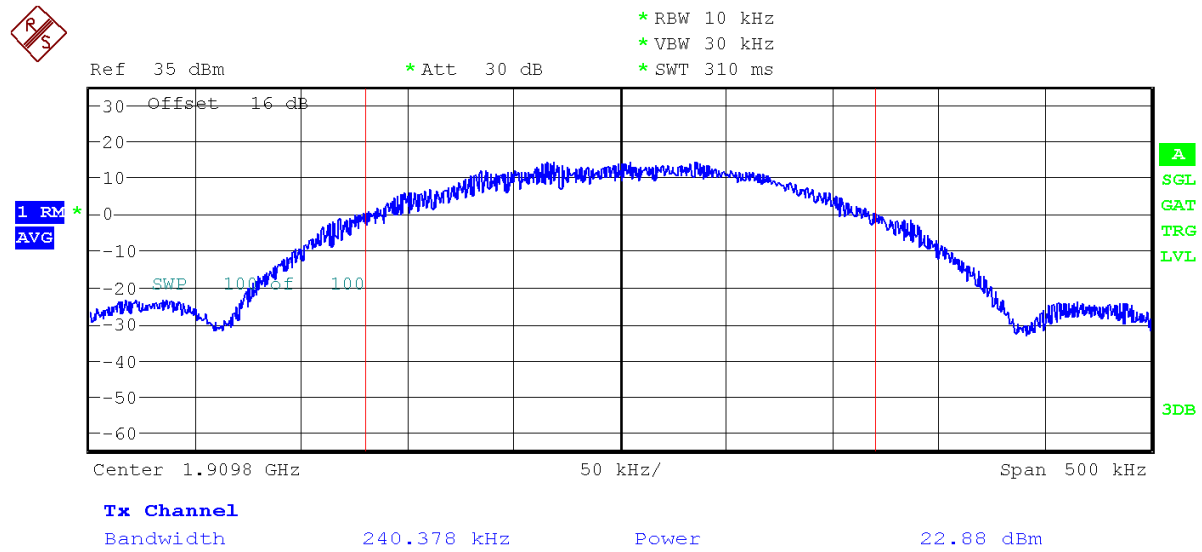


WCDMA MODULATION


Lowest Channel

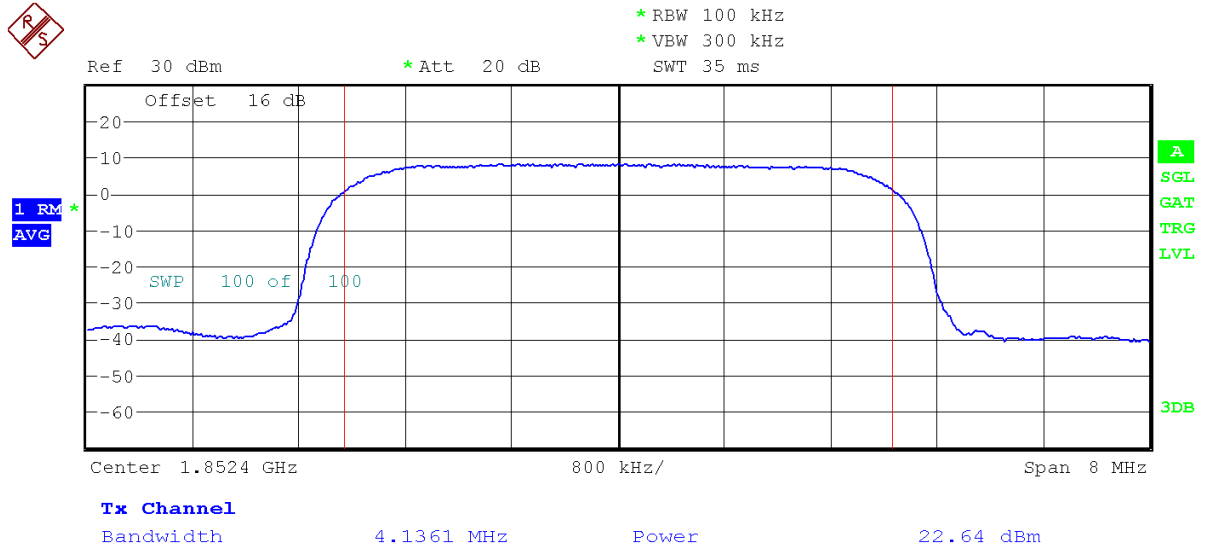

Middle Channel

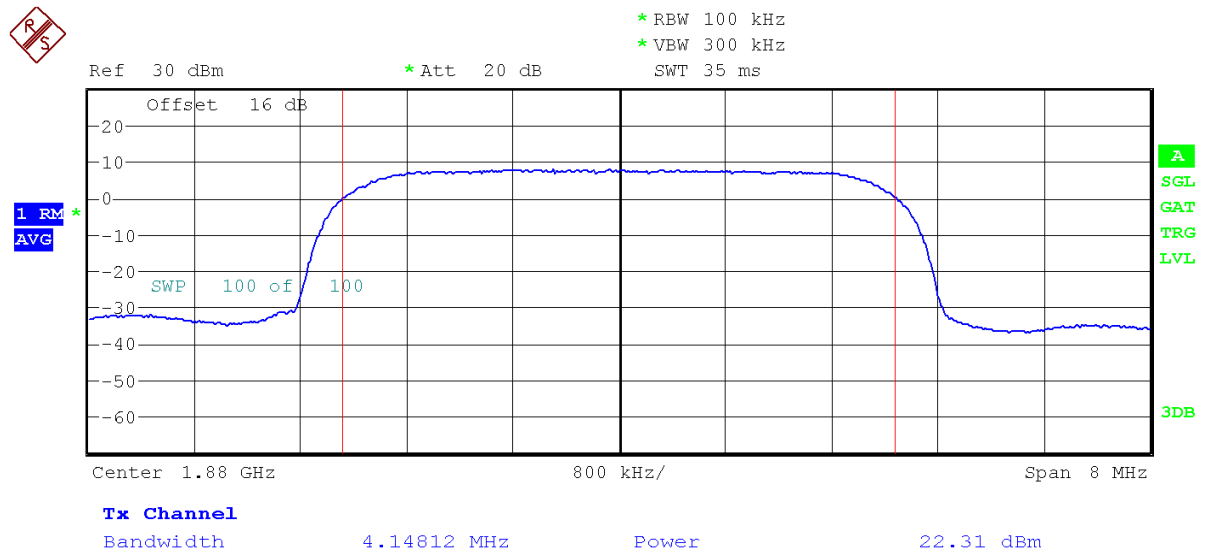


Highest Channel

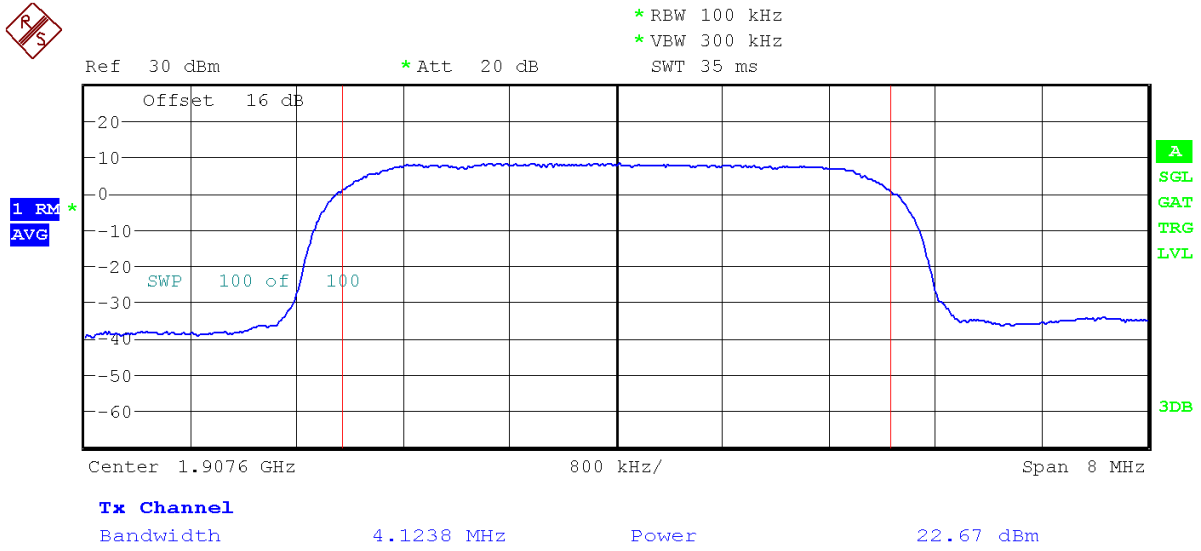


HSUPA MODULATION


Lowest Channel

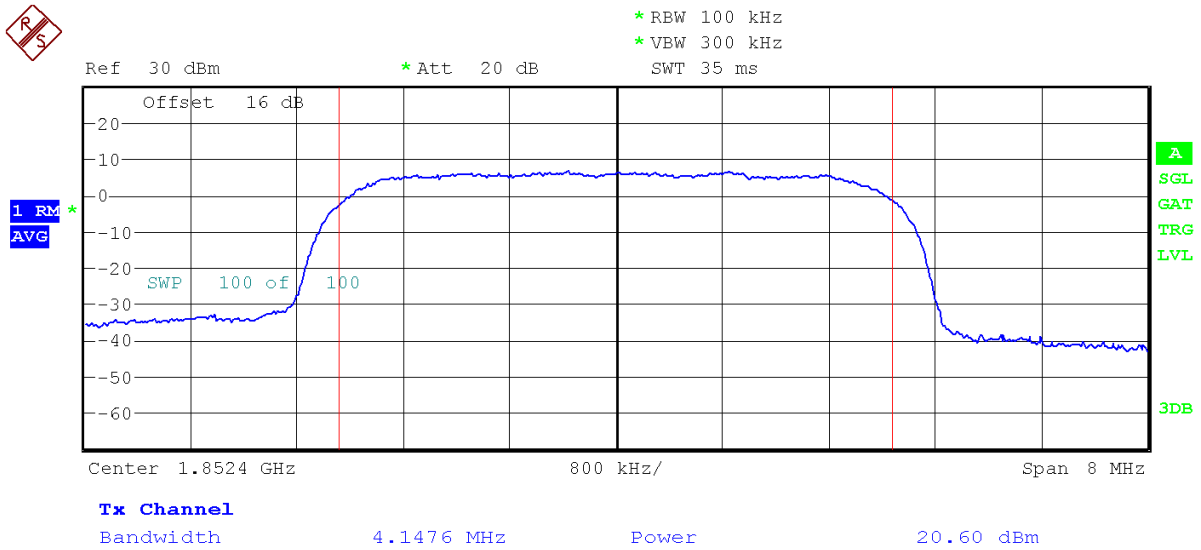

Middle Channel

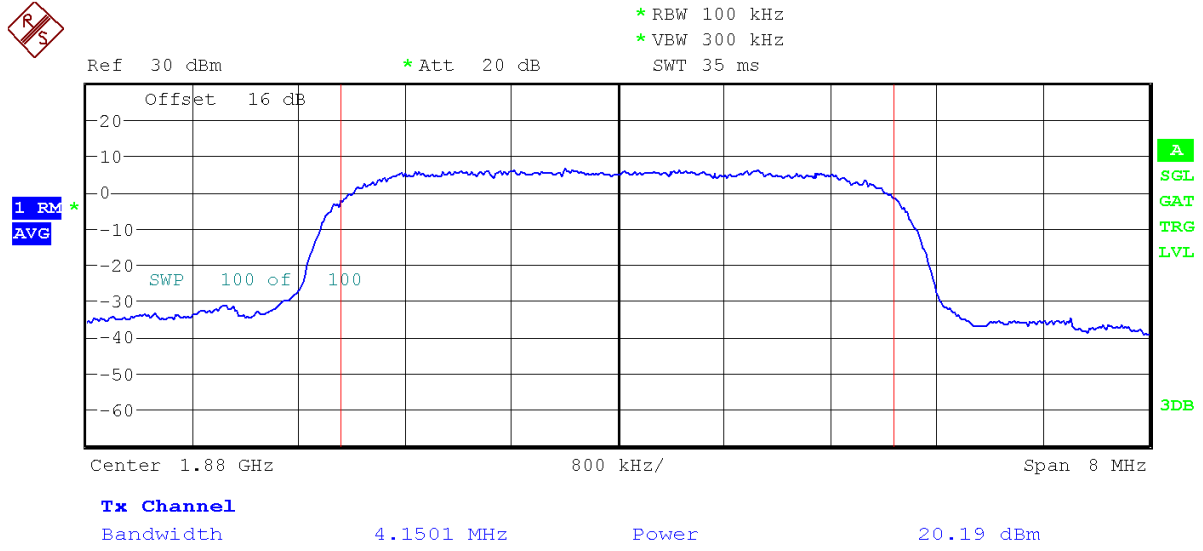

Highest Channel

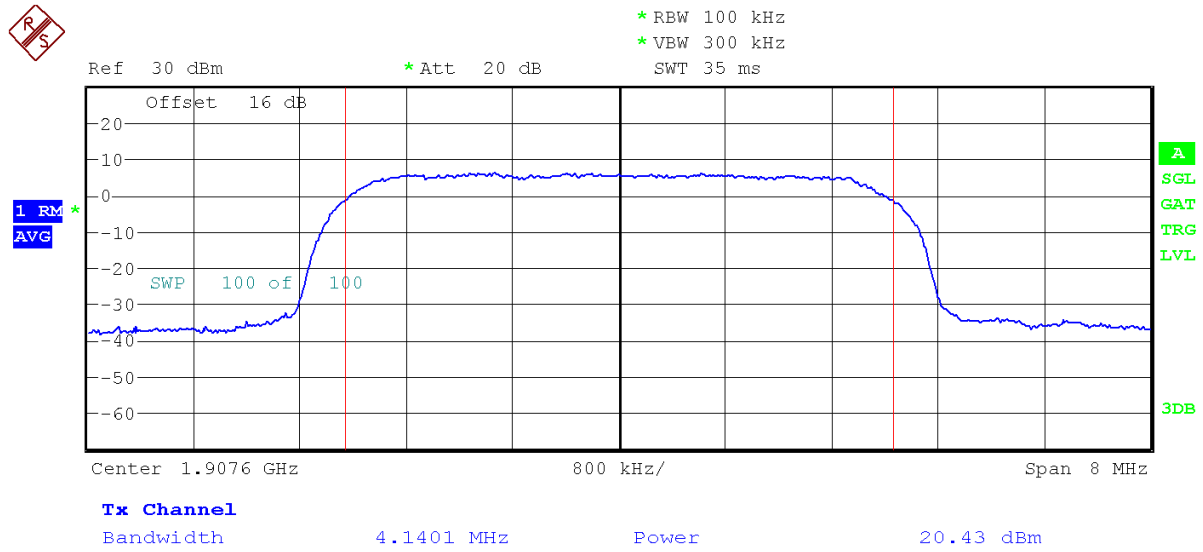

Modulation Characteristics

SPECIFICATION

§2.1047. RSS-133 Clause 6.2.


METHOD

The EUT operates with GPRS (GMSK). EDGE (8-PSK). WCDMA (QPSK) and HSUPA (QPSK) modes. in which the information is digitised and coded into a bit stream.


RESULTS

The following plot shows the modulation schemes in the EUT.


GPRS MODULATION

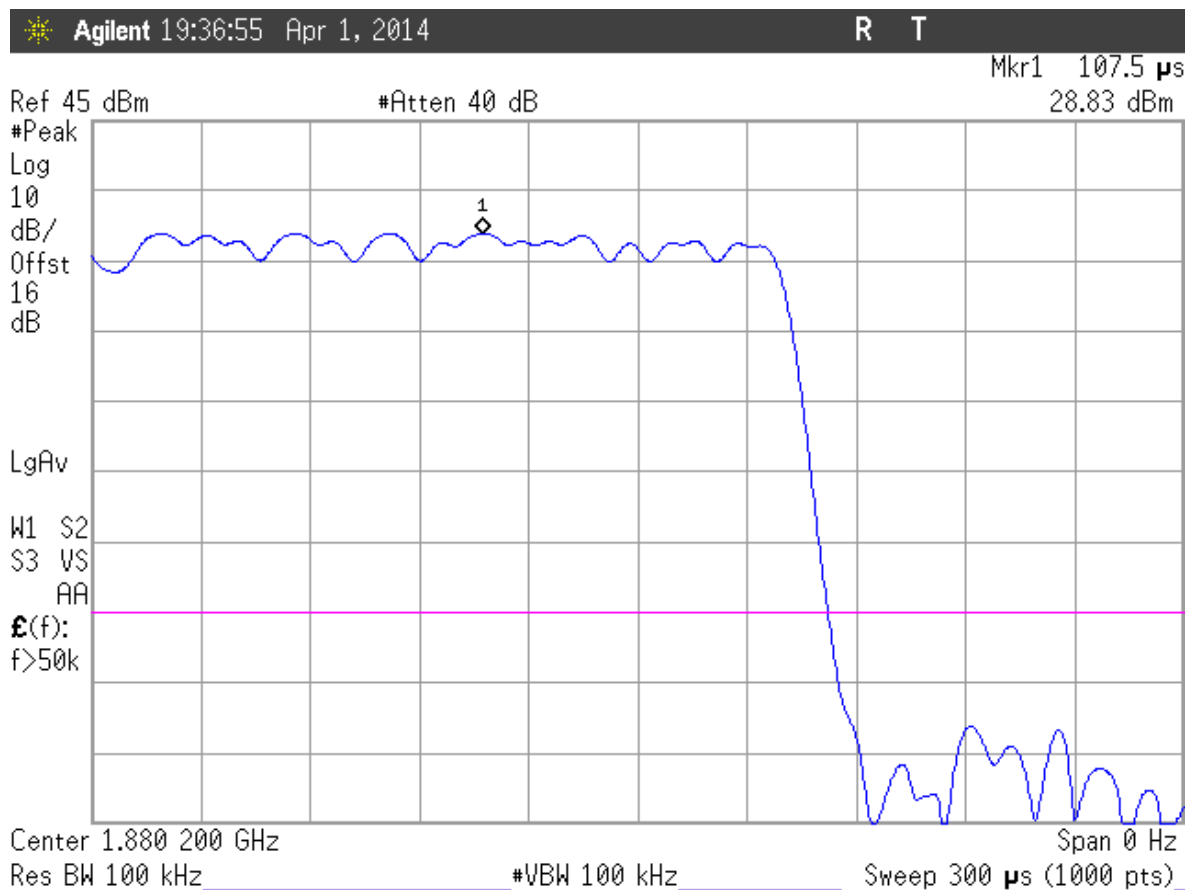


EDGE MODULATION

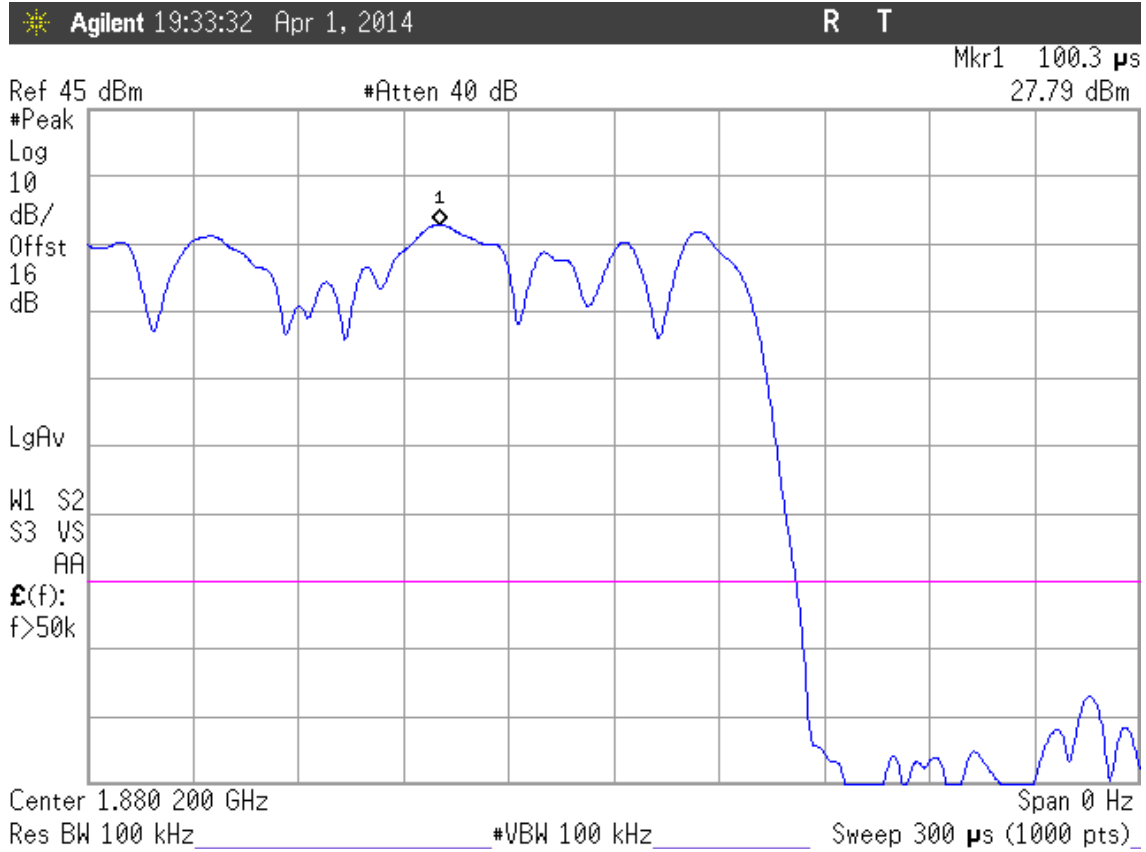

WCDMA MODULATION

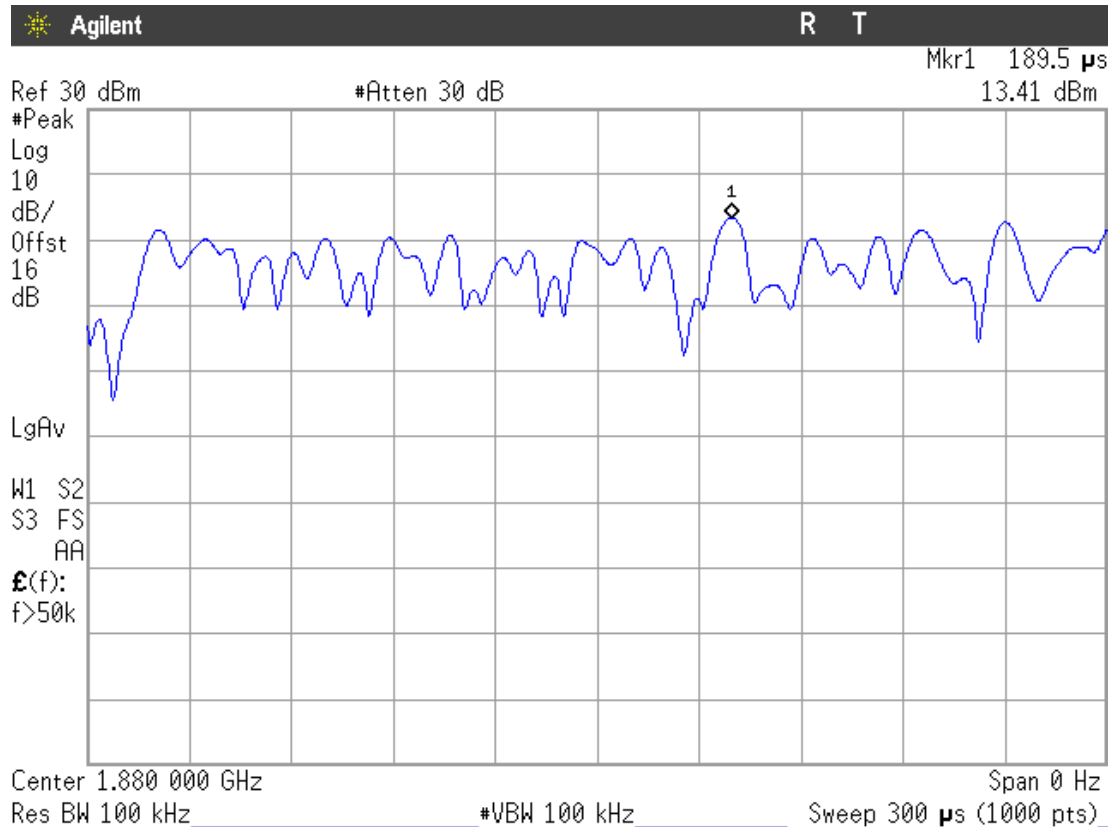

HSUPA MODULATION

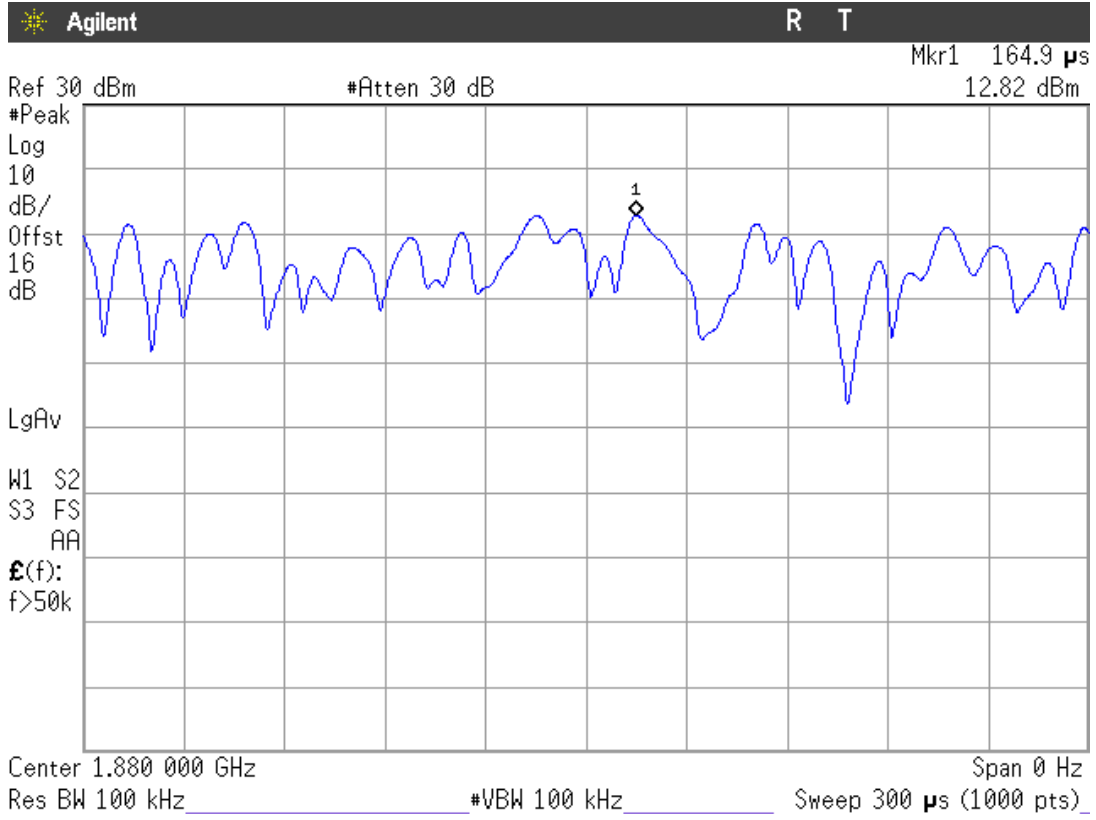

Frequency Stability

SPECIFICATION

§2.1055 and §24.235. RSS-133 Clause 6.3.

METHOD

The frequency tolerance measurements over temperature variations were made over the temperature range of -30°C to $+50^{\circ}\text{C}$. The EUT was placed inside a climatic chamber and the temperature was raised hourly in 10°C steps from -30°C up to $+50^{\circ}\text{C}$.

The EUT was set in “call mode” in the middle channel using the Universal Radio Communication tester R&S CMU200 (for modulations GPRS, EDGE, WCDMA and HSUPA) and the maximum frequency error was measured using the frequency meter of CMU200.

RESULTS

Frequency stability over temperature variations.

GPRS MODULATION

Temperature ($^{\circ}\text{C}$)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
+50	20	0.0106	0.00000106
+40	18	0.0096	0.00000096
+30	13	0.0069	0.00000069
+20	14	0.0074	0.00000074
+10	70	0.0372	0.00000372
0	86	0.0457	0.00000457
-10	56	0.0298	0.00000298
-20	55	0.0293	0.00000293
-30	54	0.0287	0.00000287

EDGE MODULATION

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
+50	-19	-0.0101	-0.00000101
+40	-17	-0.0090	-0.00000090
+30	-14	-0.0074	-0.00000074
+20	12	0.0064	0.00000064
+10	49	0.0261	0.00000261
0	73	0.0388	0.00000388
-10	78	0.0415	0.00000415
-20	70	0.0372	0.00000372
-30	77	0.0410	0.00000410

WCDMA AND HSUPA MODULATION

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
+50	31	0.0165	0.00000165
+40	29	0.0154	0.00000154
+30	25	0.0133	0.00000133
+20	27	0.0144	0.00000144
+10	31	0.0165	0.00000165
0	27	0.0144	0.00000144
-10	28	0.0149	0.00000149
-20	28	0.0149	0.00000149
-30	-27	-0.0144	-0.00000144

Frequency stability over voltage variations.

GPRS MODULATION

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	4.4	26	0.0138	0.00000138
Vmin	3.4	32	0.0170	0.00000170

EDGE MODULATION

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	4.4	-21	-0.0112	-0.00000112
Vmin	3.4	66	0.0351	0.00000351

WCDMA AND HSUPA MODULATION

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	4.4	32	0.0170	0.00000170
Vmin	3.4	24	0.0128	0.00000128

Occupied Bandwidth

SPECIFICATION

§2.1049

METHOD

The EUT was configured to transmit a modulated carrier signal. An IF bandwidth of 3 kHz was used to determine the occupied bandwidth of the modulated emission for GPRS and EDGE modulation and 50 kHz for WCDMA and HSUPA modulation. The 99% occupied bandwidth and the -26 dBc bandwidth were measured directly using the built-in bandwidth measuring option of spectrum analyser E4440A.

RESULTS

GPRS MODULATION

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	242.68	246.34	243.22
-26 dBc bandwidth (kHz)	313.85	319.27	312.75
Measurement uncertainty (kHz)	<±1.67		

EDGE MODULATION

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	237.44	237.38	240.38
-26 dBc bandwidth (kHz)	310.03	307.87	313.60
Measurement uncertainty (kHz)	<±1.67		

WCDMA MODULATION


Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	4136.1	4148.1	4123.8
-26 dBc bandwidth (kHz)	4624	4625	4610
Measurement uncertainty (kHz)	<±13.3		

HSUPA MODULATION


Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	4147.6	4150.1	4140.1
-26 dBc bandwidth (kHz)	4646	4630	4630
Measurement uncertainty (kHz)	<±13.3		

GPRS MODULATION


Lowest Channel

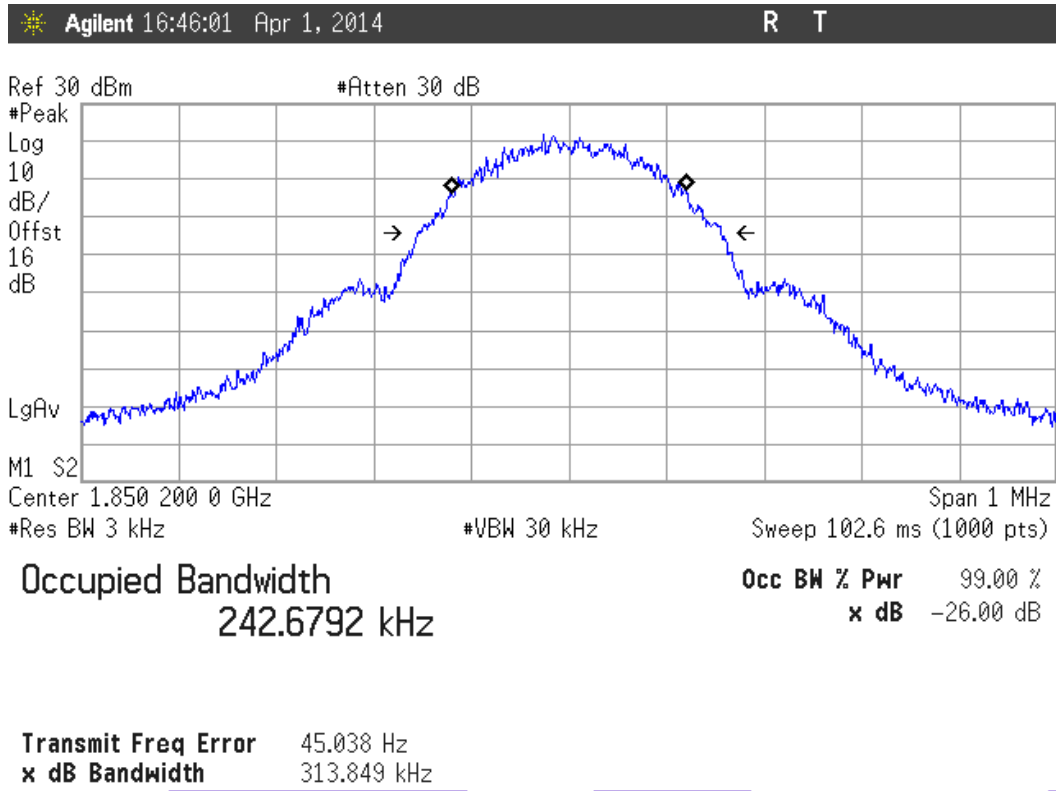

Middle Channel

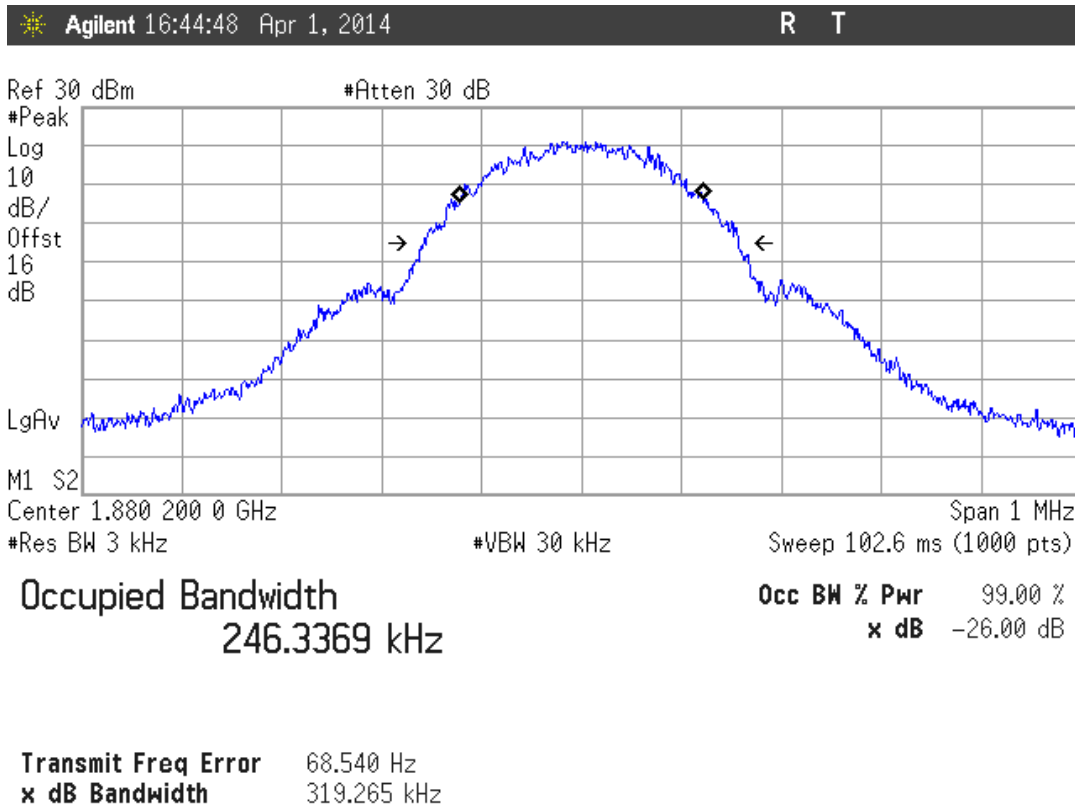


Highest Channel

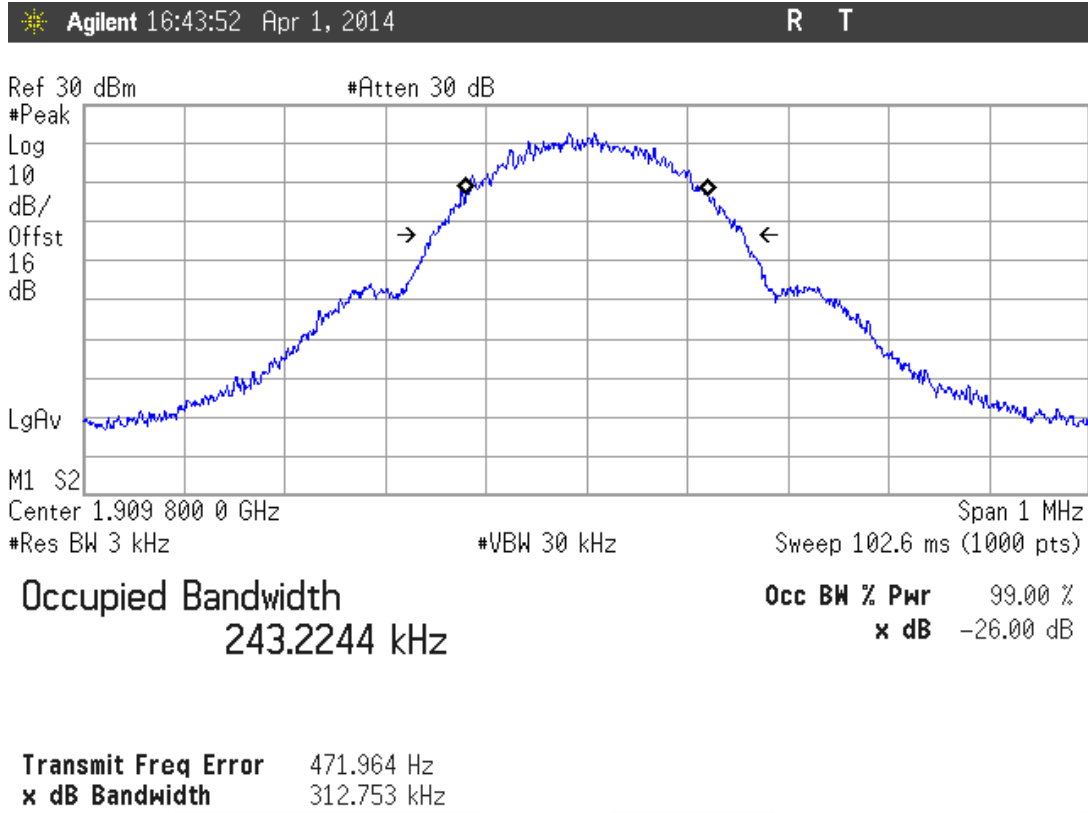


EDGE MODULATION


Lowest Channel

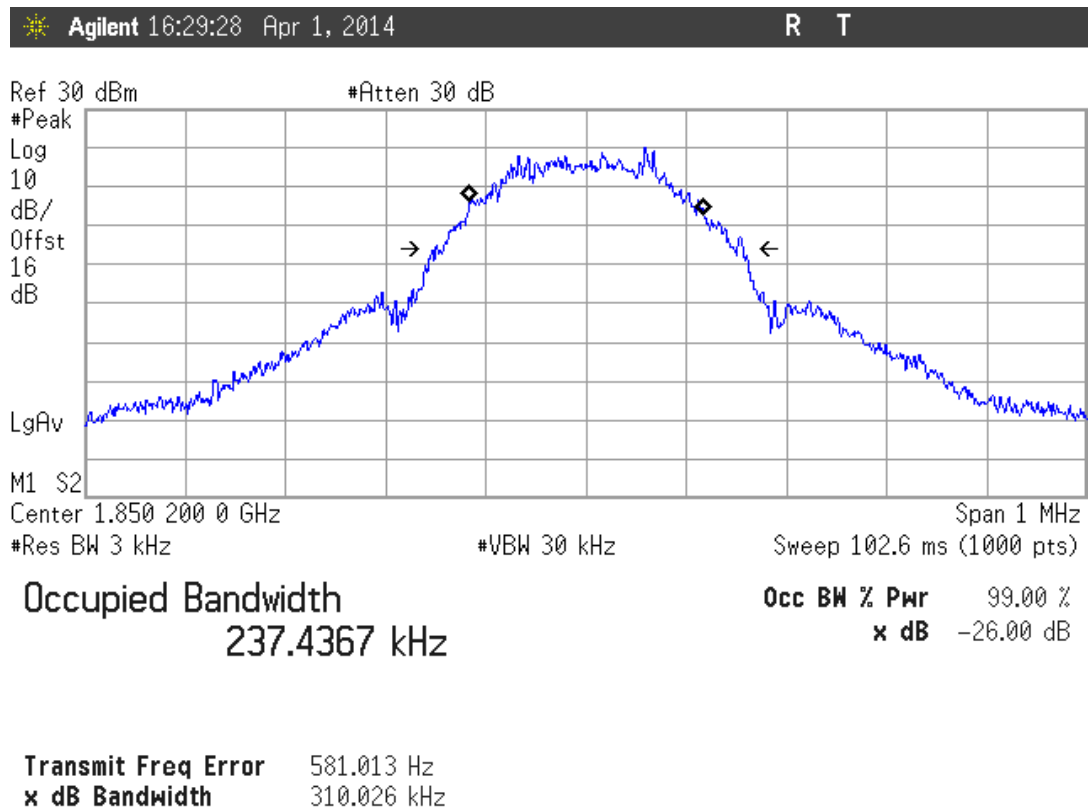

Middle Channel

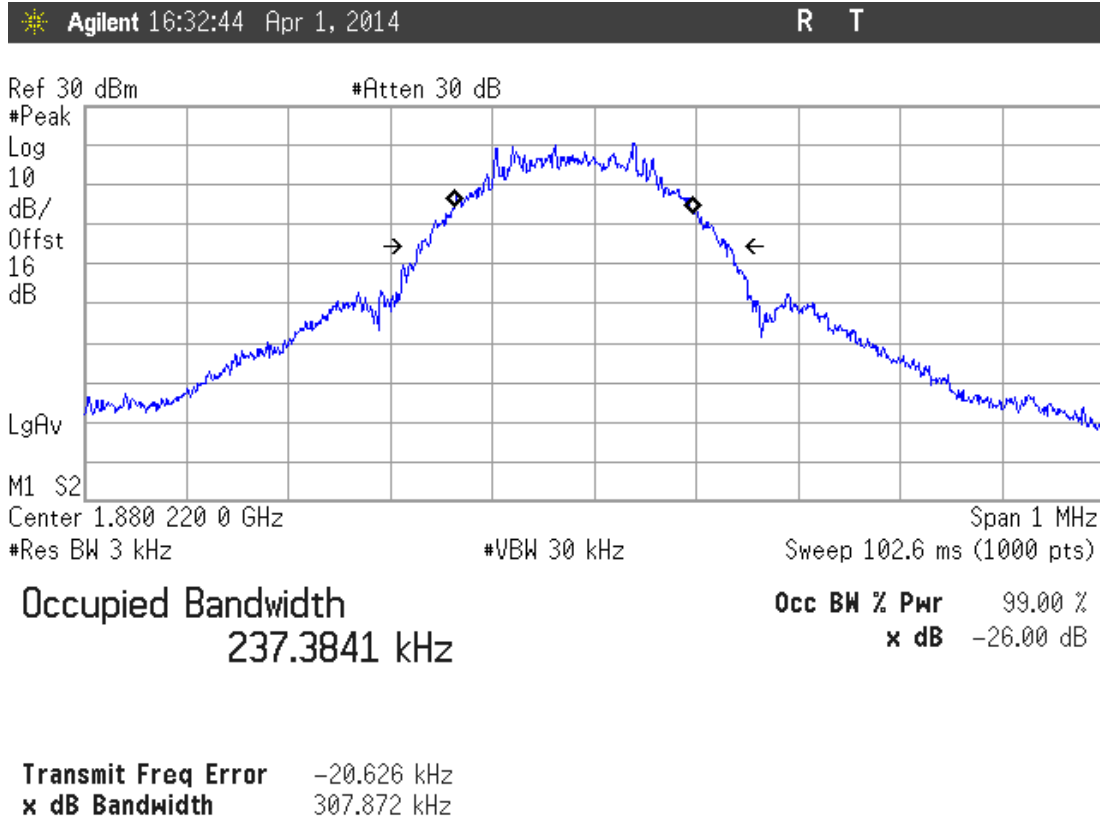


Highest Channel

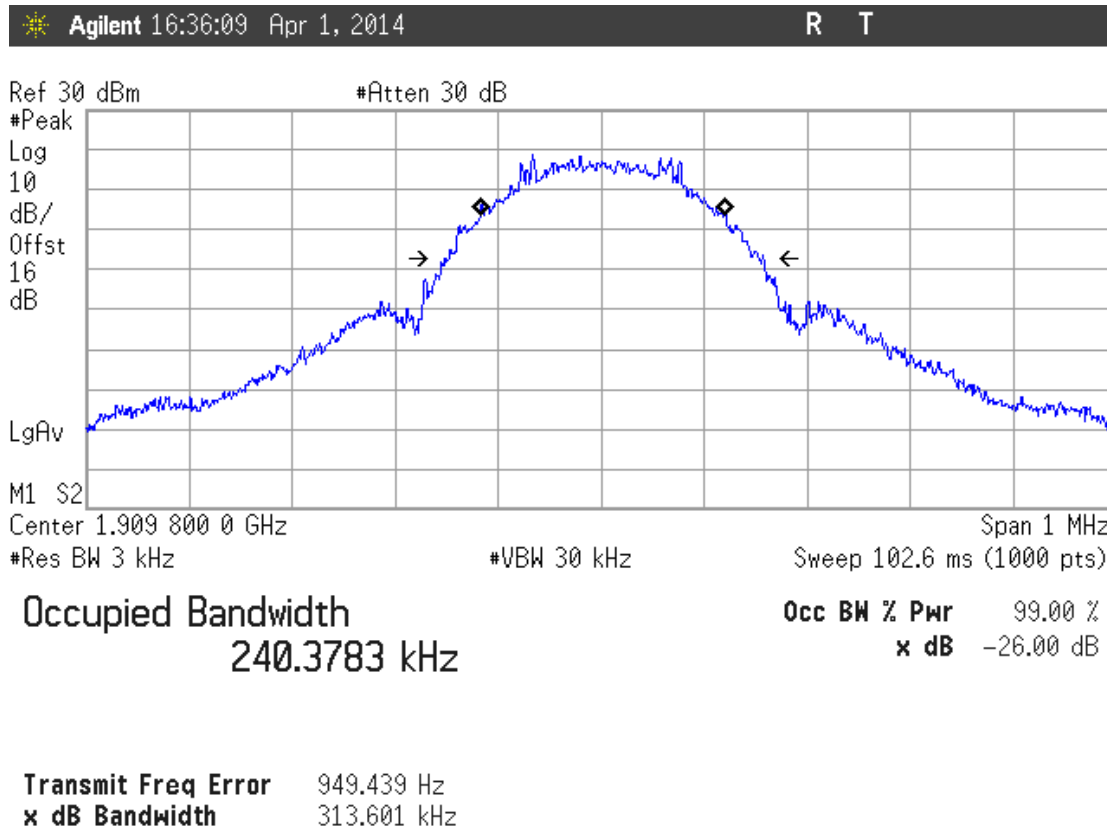


WCDMA MODULATION


Lowest Channel

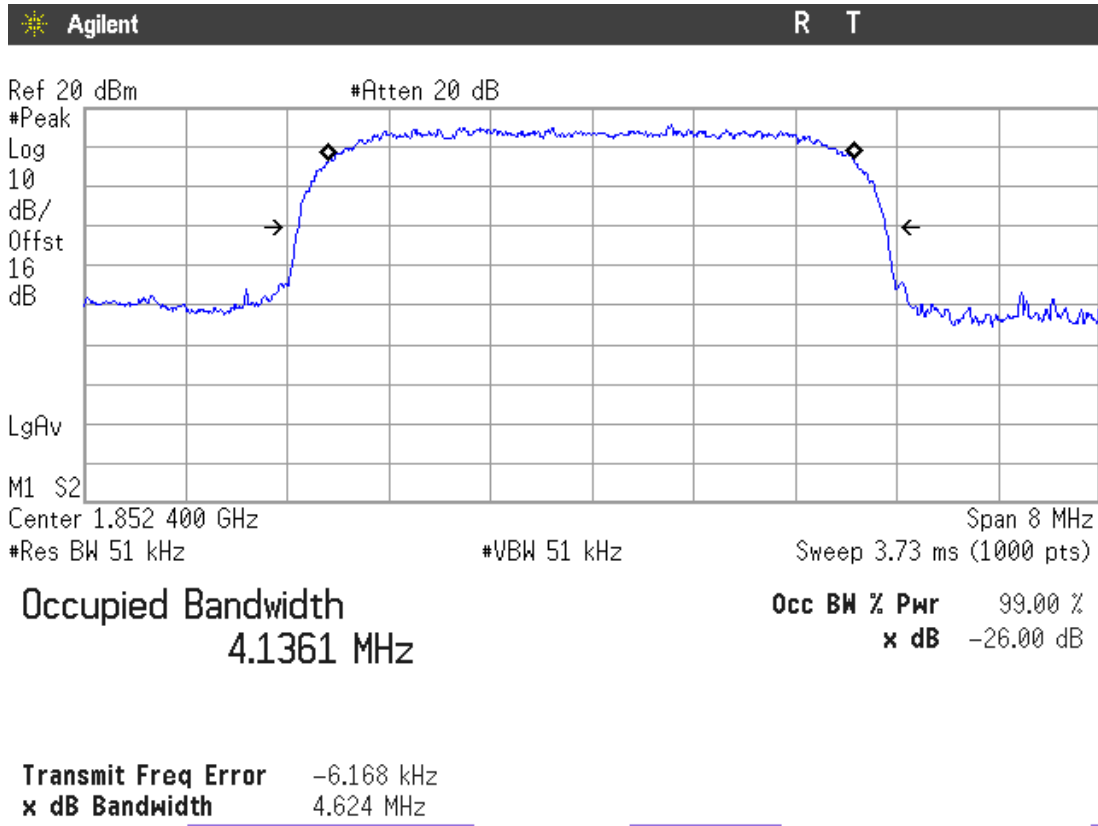

Middle Channel

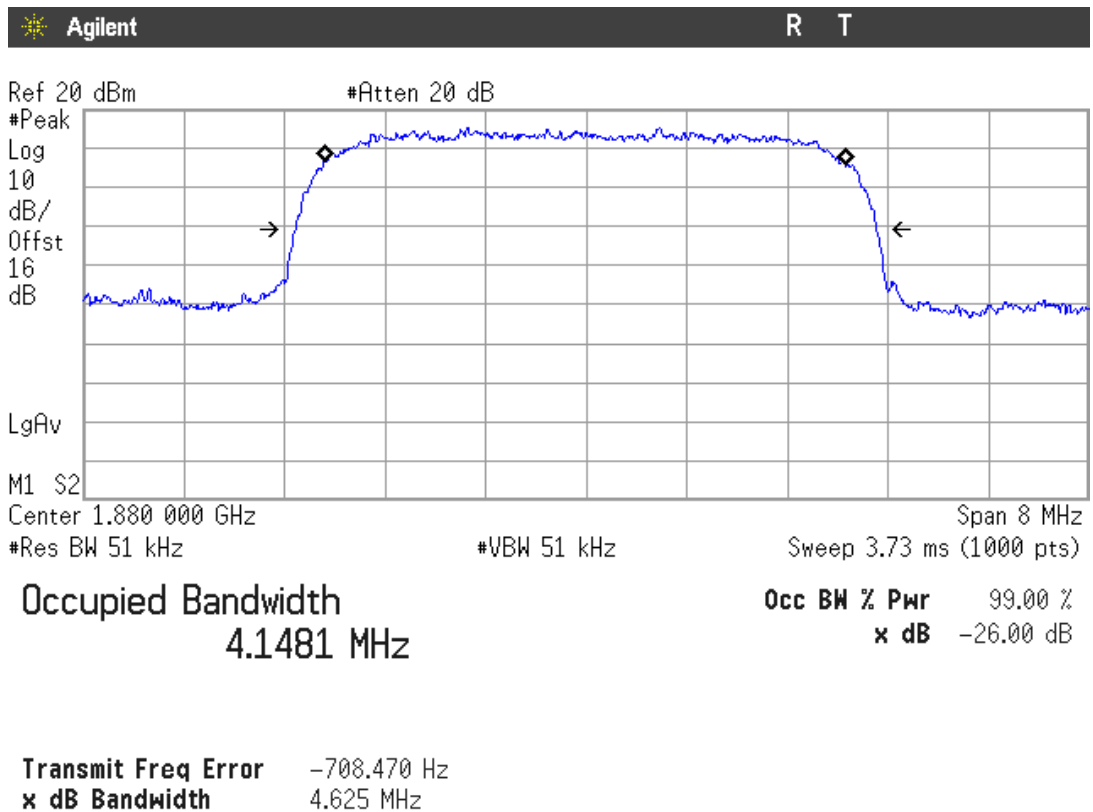


Highest Channel

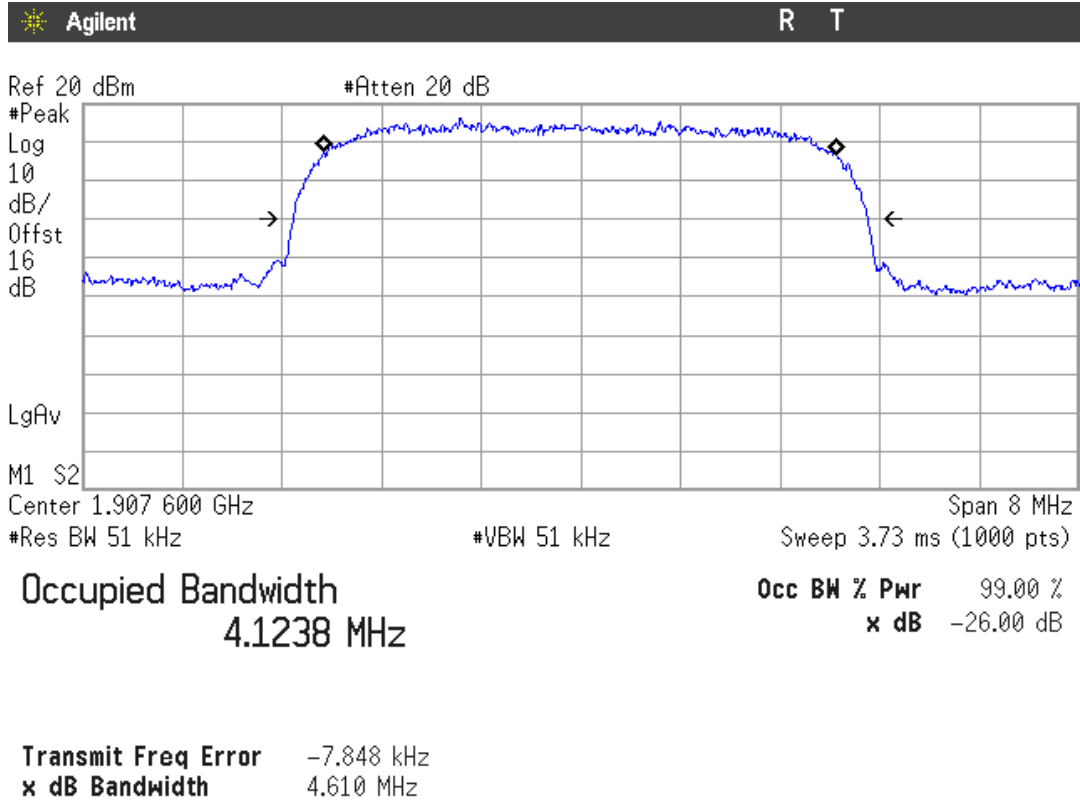


HSUPA MODULATION


Lowest Channel

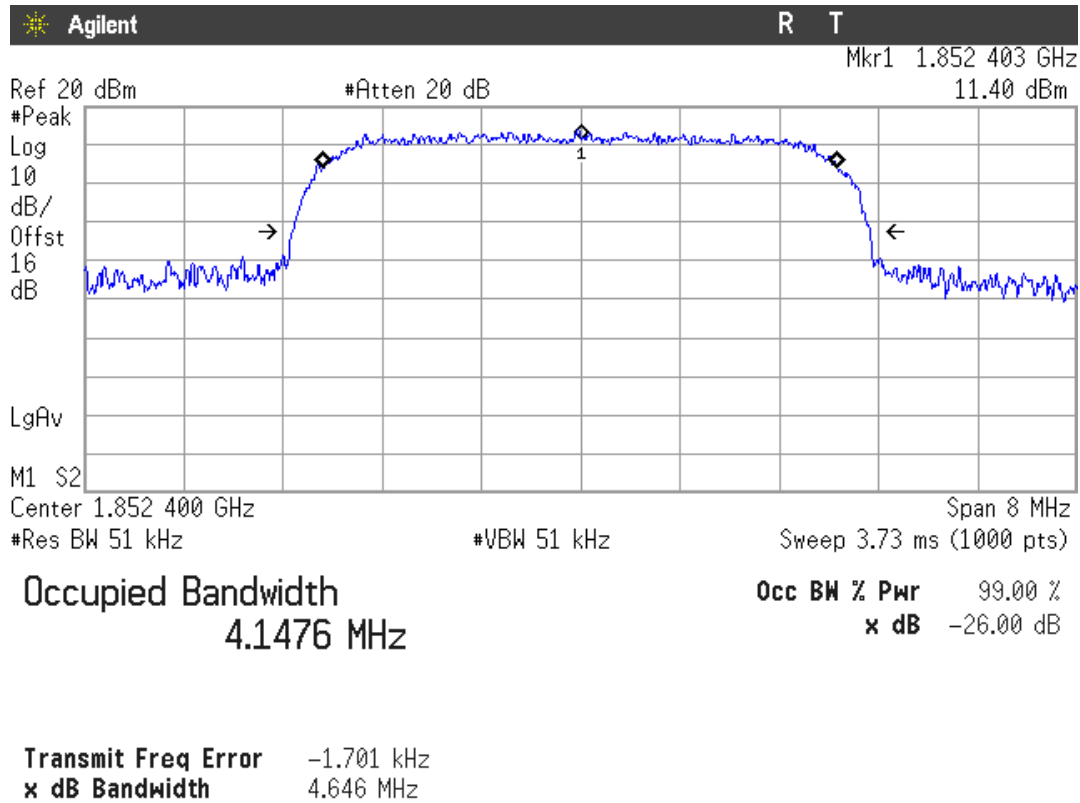

Middle Channel

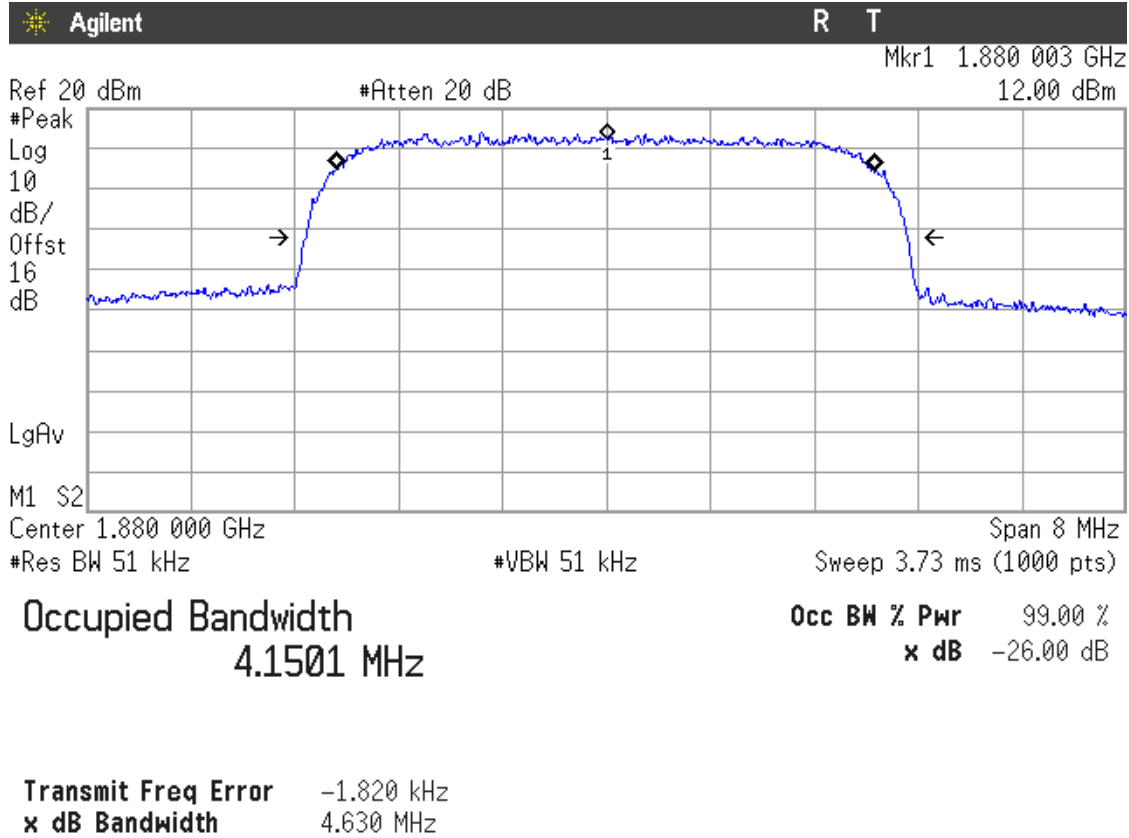

Highest Channel

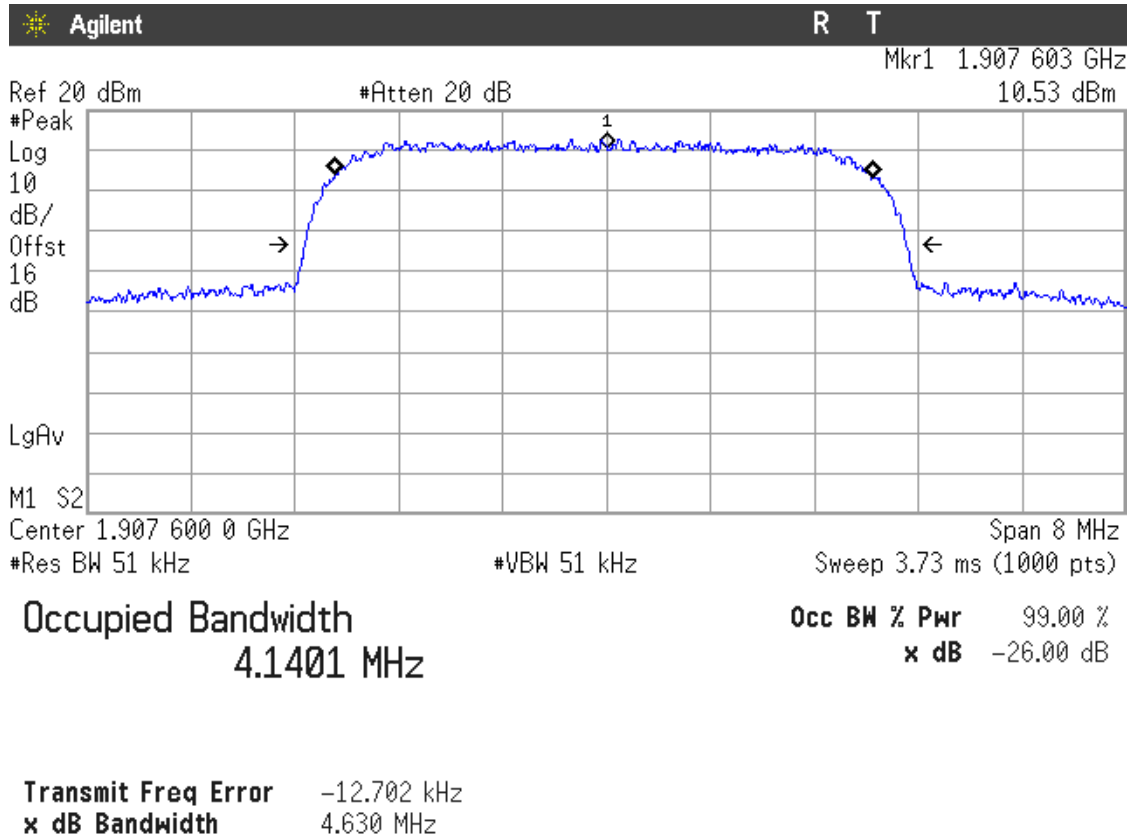

Spurious emissions at antenna terminals

SPECIFICATION

§2.1051 and §24.238. RSS-133 Clause 6.5.

METHOD

The EUT RF output connector was connected to a spectrum analyser using an 50 ohm attenuator and the resolution bandwidth of the spectrum analyser was set to 1 MHz. The spectrum was investigated from 30 MHz to 20 GHz.

The reading of the spectrum analyser is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyser.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43+10\log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

RESULTS (see plots in next pages)

GPRS MODULATION

1. CHANNEL: LOWEST

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE

No spurious signals were found in all the range.

3. CHANNEL: HIGHEST

No spurious signals were found in all the range.

EDGE MODULATION

1. CHANNEL: LOWEST

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE

No spurious signals were found in all the range.

3. CHANNEL: HIGHEST

No spurious signals were found in all the range.

WCDMA MODULATION

1. CHANNEL: LOWEST

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE

No spurious signals were found in all the range.

3. CHANNEL: HIGHEST

No spurious signals were found in all the range.

HSUPA MODULATION

1. CHANNEL: LOWEST

No spurious signals were found in all the range.

2. CHANNEL: MIDDLE

No spurious signals were found in all the range.


3. CHANNEL: HIGHEST

No spurious signals were found in all the range.

Verdict: PASS


GPRS MODULATION

1. CHANNEL: LOWEST

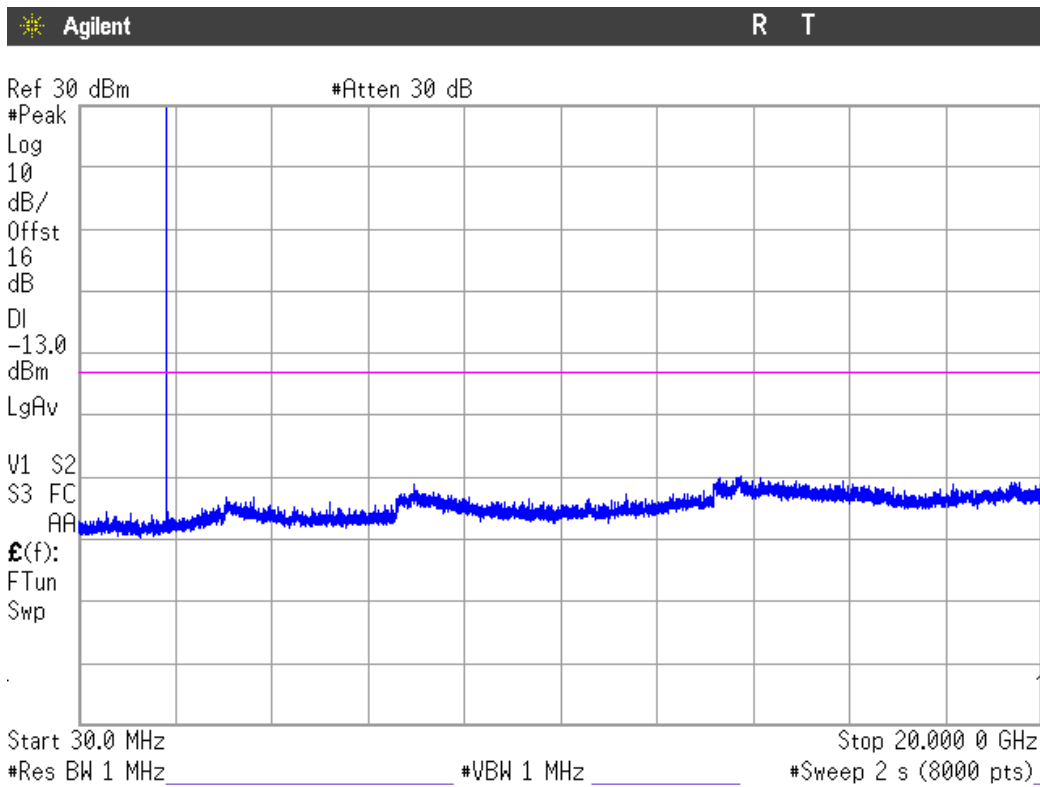


Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE

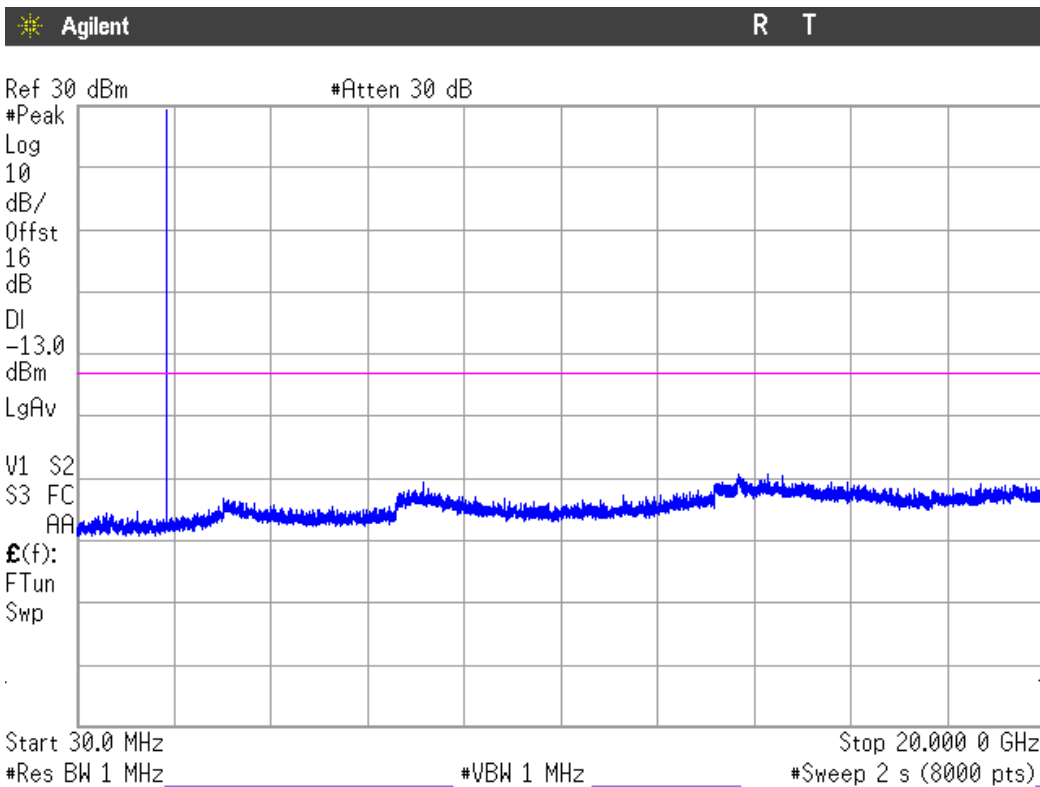

Note: The peak above the limit is the carrier frequency.


3. CHANNEL: HIGHEST

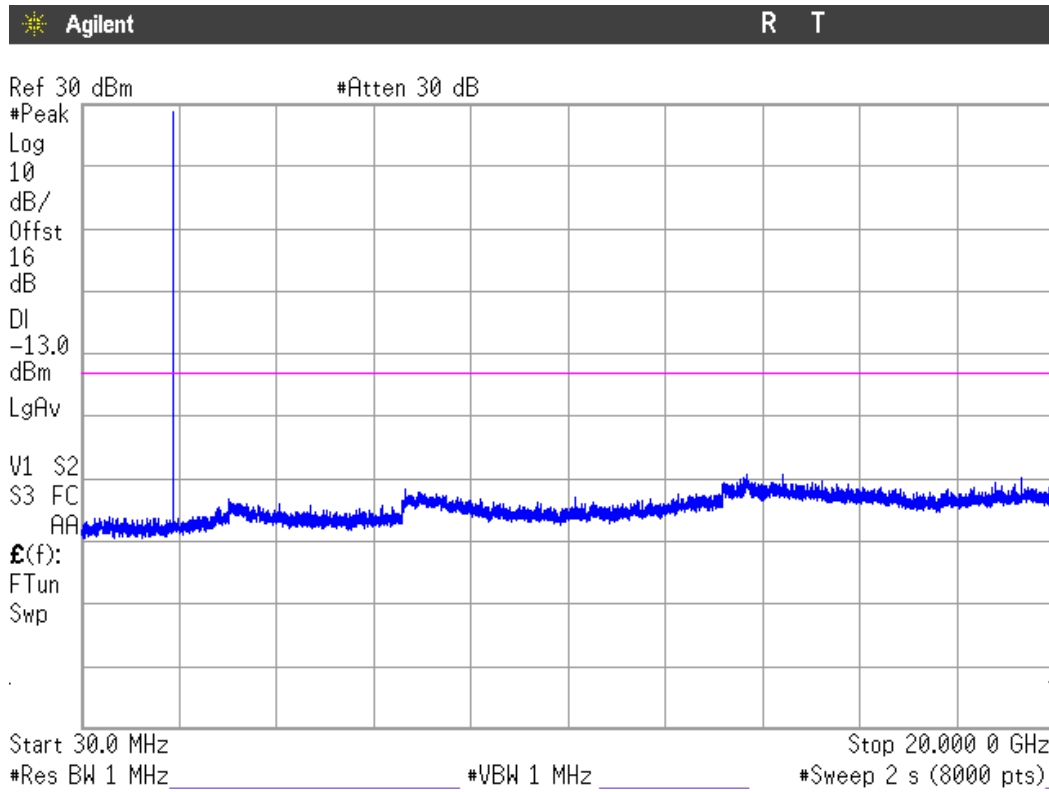

Note: The peak above the limit is the carrier frequency.


EDGE MODULATION

1. CHANNEL: LOWEST

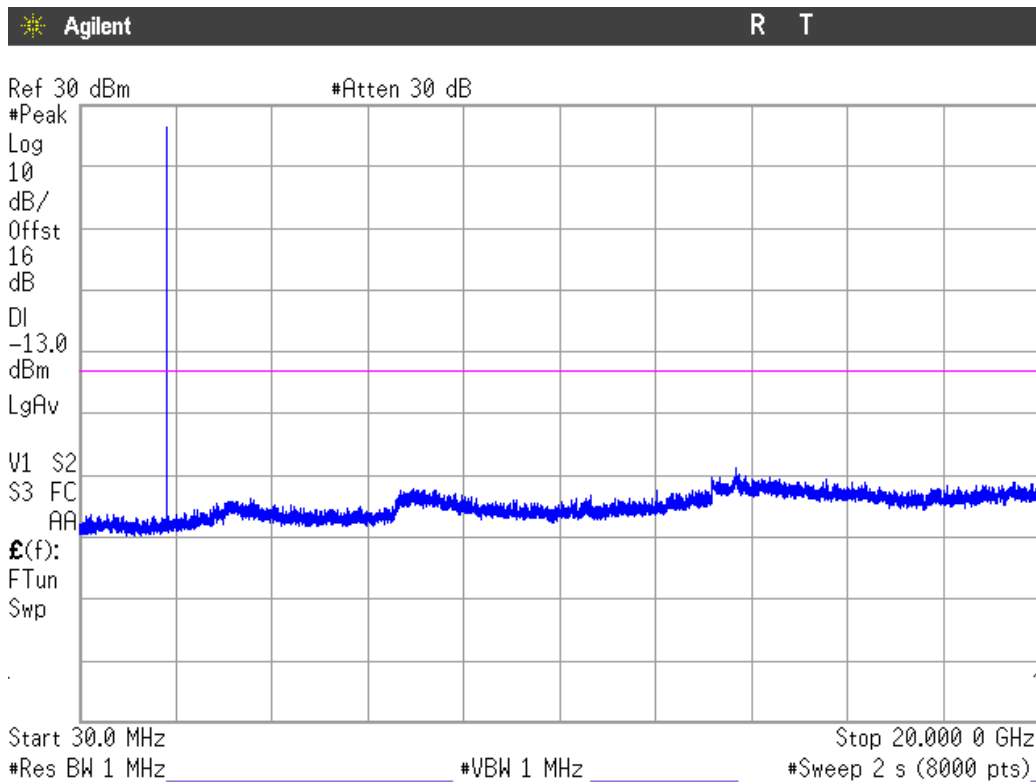


Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE

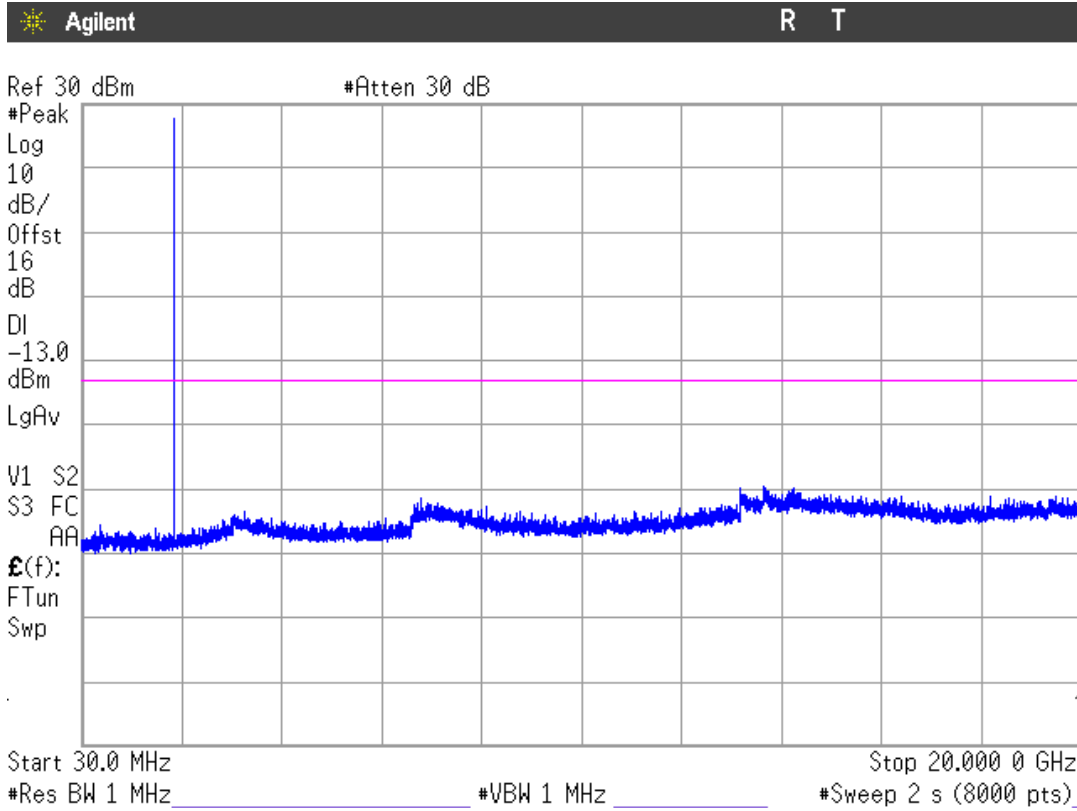

Note: The peak above the limit is the carrier frequency.


3. CHANNEL: HIGHEST

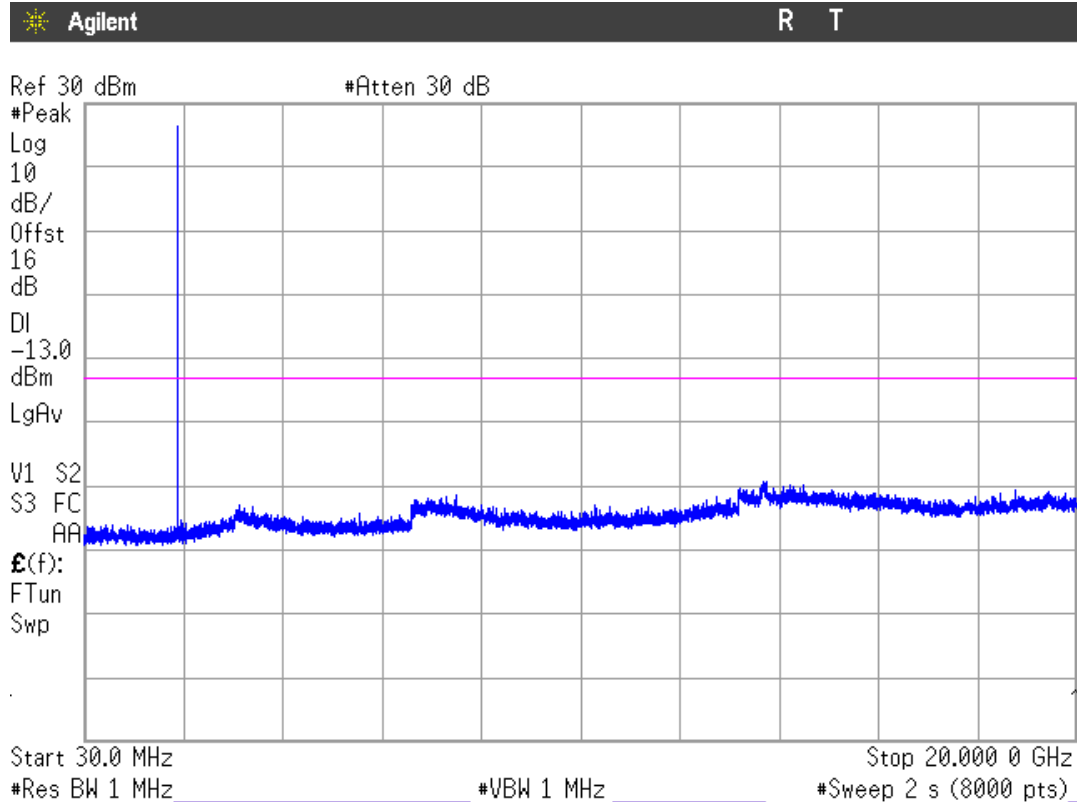

Note: The peak above the limit is the carrier frequency.


WCDMA MODULATION

1. CHANNEL: LOWEST

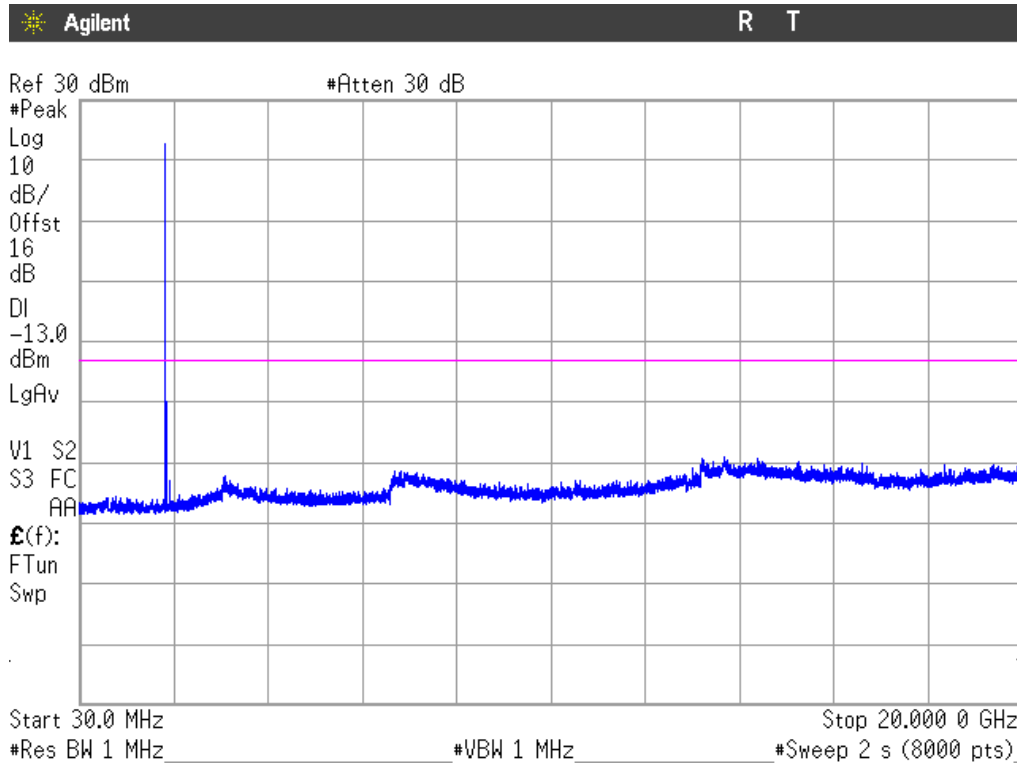


Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE

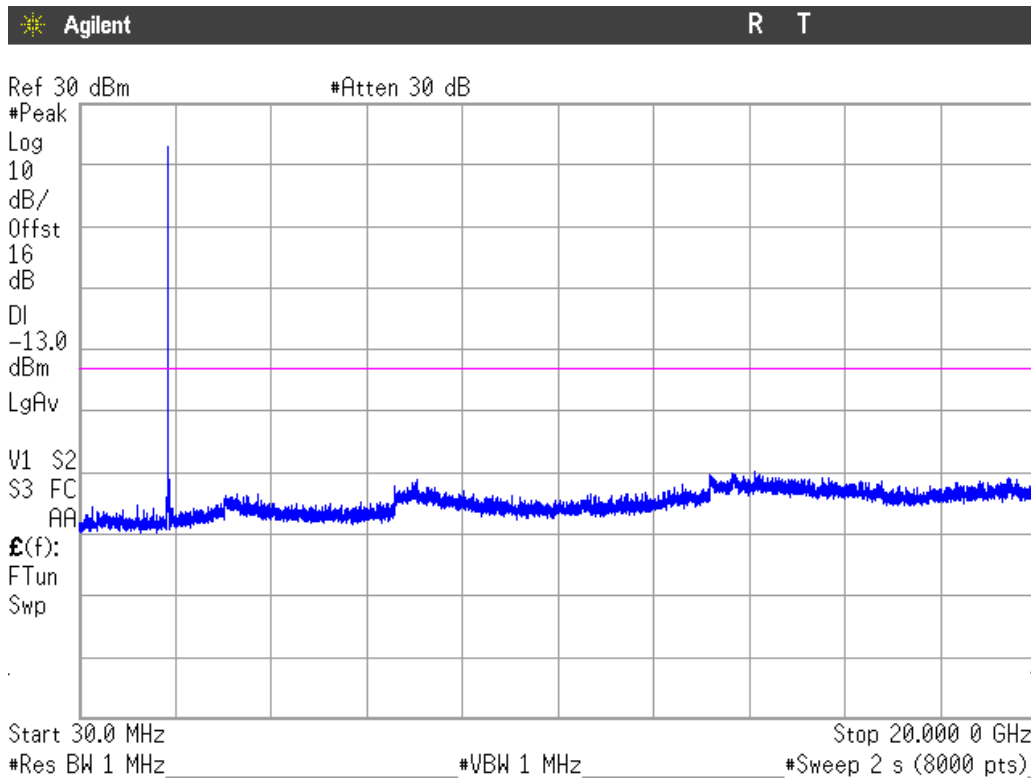

Note: The peak above the limit is the carrier frequency.


3. CHANNEL: HIGHEST

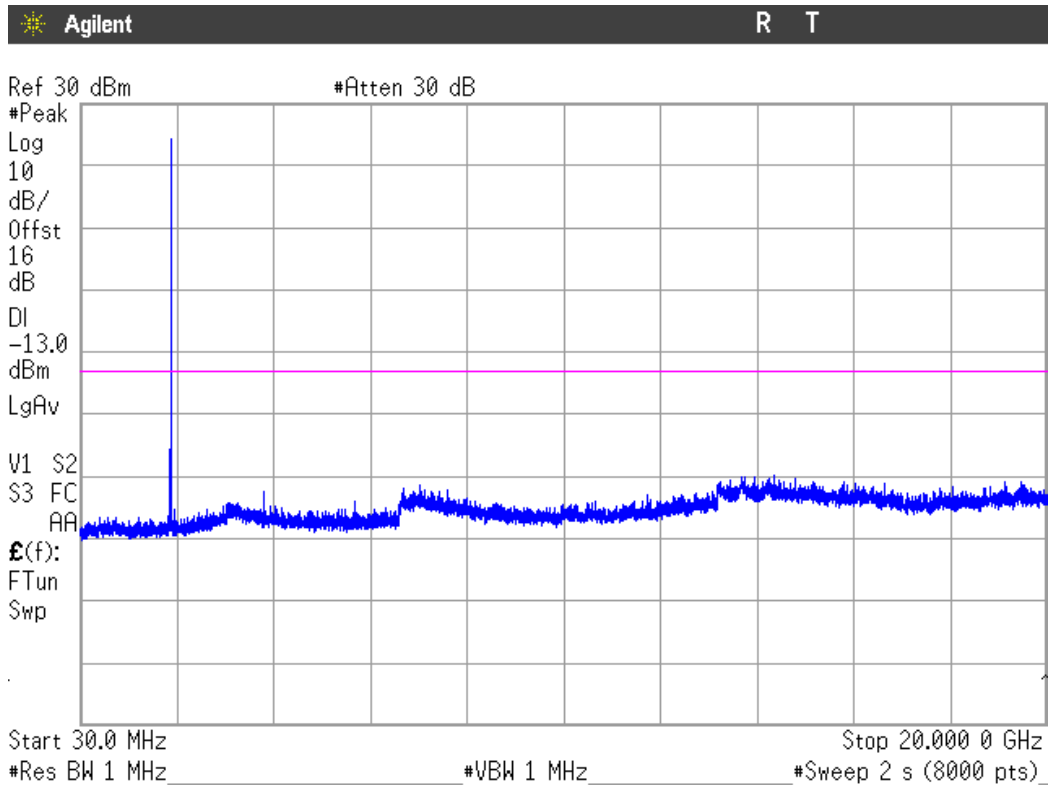

Note: The peak above the limit is the carrier frequency.


HSUPA MODULATION

1. CHANNEL: LOWEST

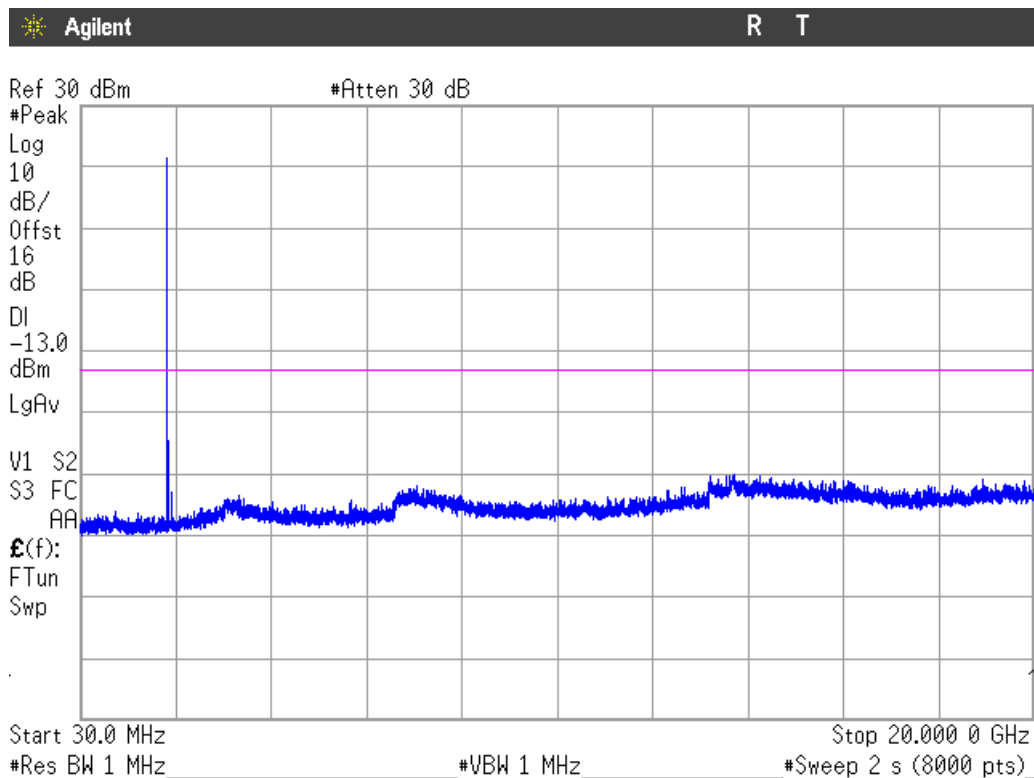


Note: The peak above the limit is the carrier frequency.

2. CHANNEL: MIDDLE

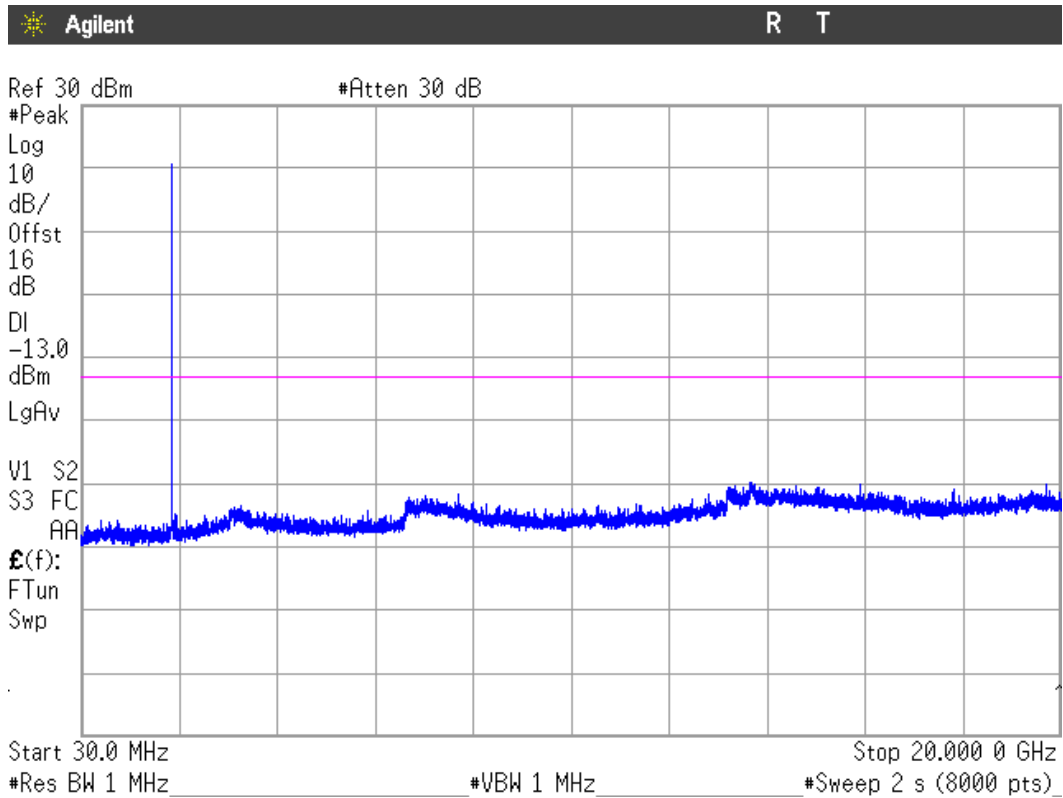

Note: The peak above the limit is the carrier frequency.

3. CHANNEL: HIGHEST

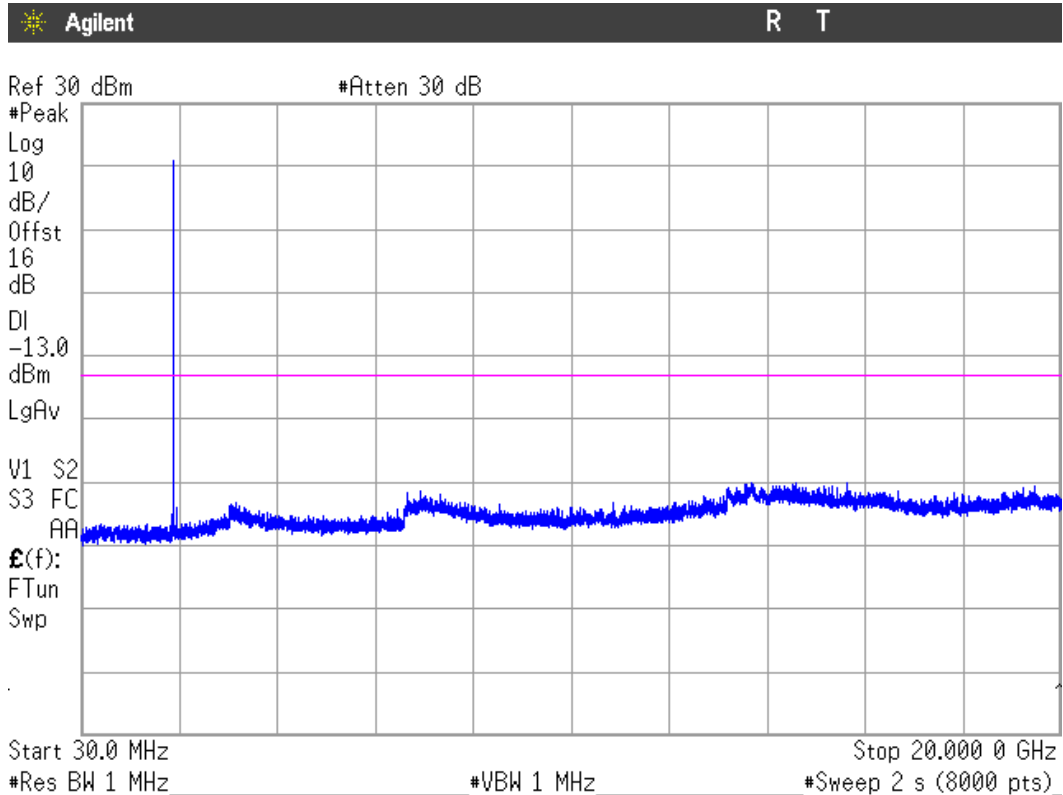

Note: The peak above the limit is the carrier frequency.

Spurious emissions at antenna terminals at Block Edges

SPECIFICATION

§2.1051 and §24.238. RSS-133 Clause 6.5.

METHOD

As indicated in FCC part 24, in the 1 MHz bands immediately outside and adjacent to the frequency block or band a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A resolution bandwidth of 5 kHz/3.3 kHz was used for GPRS and EDGE modulations, and 51 kHz for WCDMA and HSUPA modulations.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43+10\log (P_o)$, and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$


RESULTS (see plots in next pages)

MODULATION:	GPRS	EDGE	WCDMA	HSUPA
Maximum measured level at lowest Block Edge at antenna port (dBm)	-24.39	-28.36	-31.17	-32.66

MODULATION:	GPRS	EDGE	WCDMA	HSUPA
Maximum measured level at highest Block Edge at antenna port (dBm)	-22.28	-29.06	-29.73	-30.97


Measurement uncertainty = ± 1.57 dB.

GPRS MODULATION
 CHANNEL LOWEST

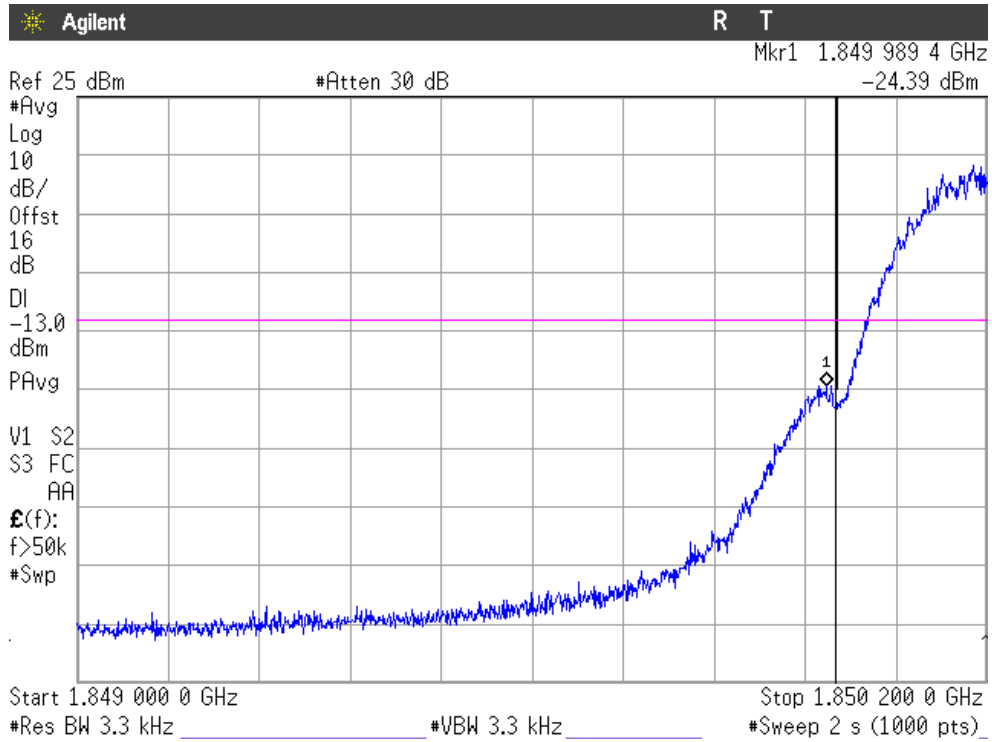

NOTE: The equipment transmits at the maximum output power


CHANNEL HIGHEST

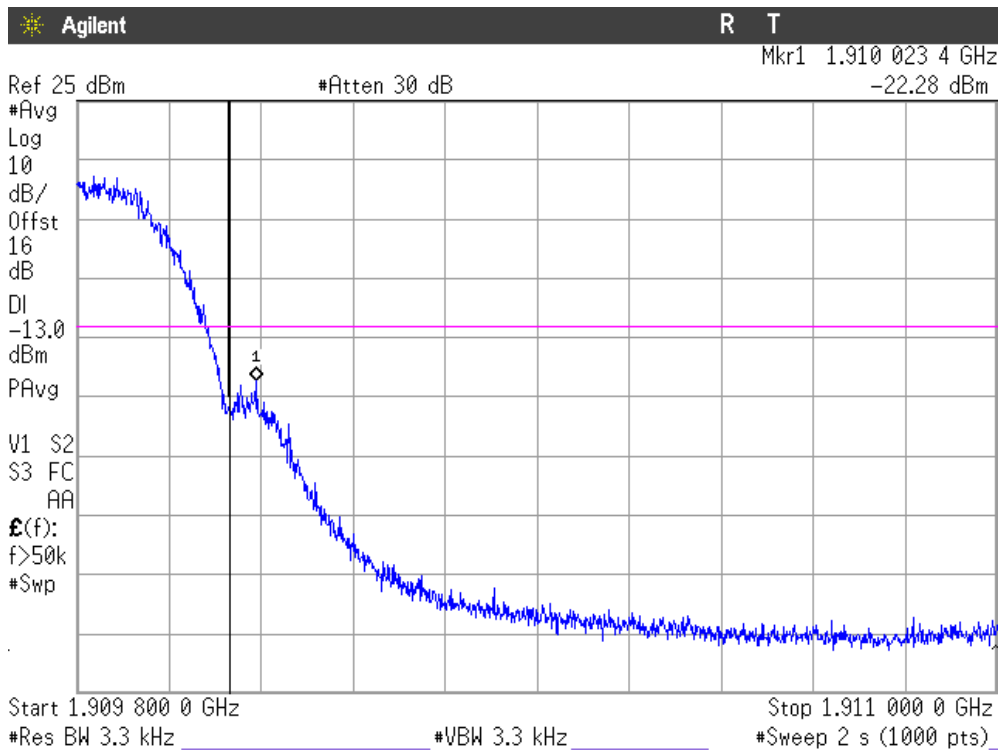

NOTE: The equipment transmits at the maximum output power


Verdict: PASS

EDGE MODULATION
 CHANNEL LOWEST

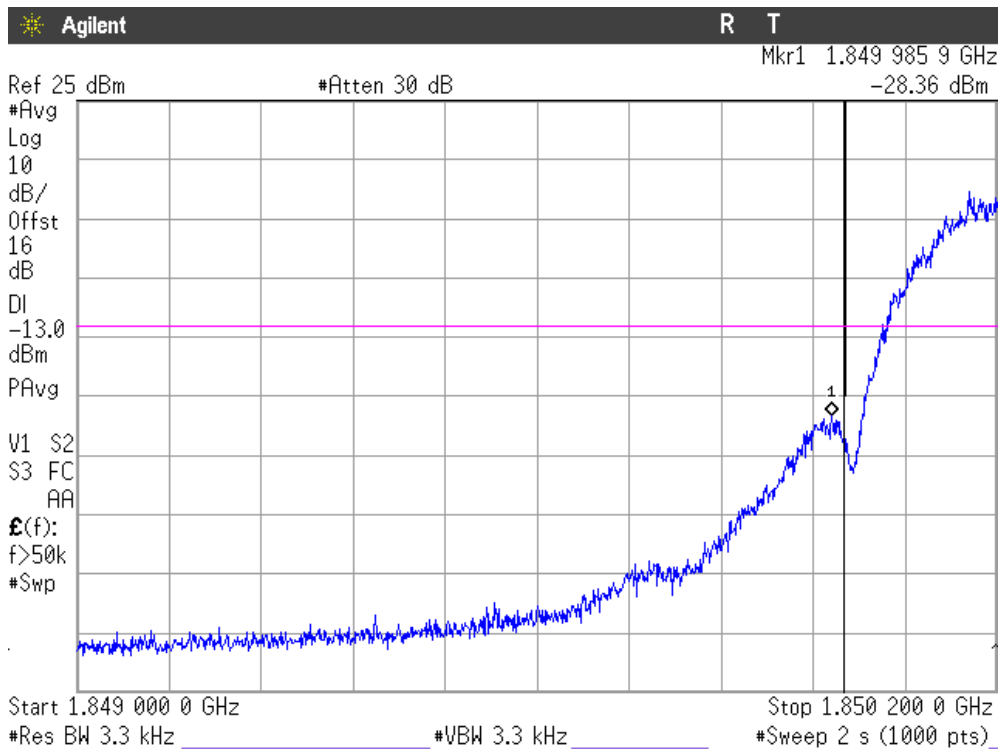

NOTE: The equipment transmits at the maximum output power


CHANNEL HIGHEST

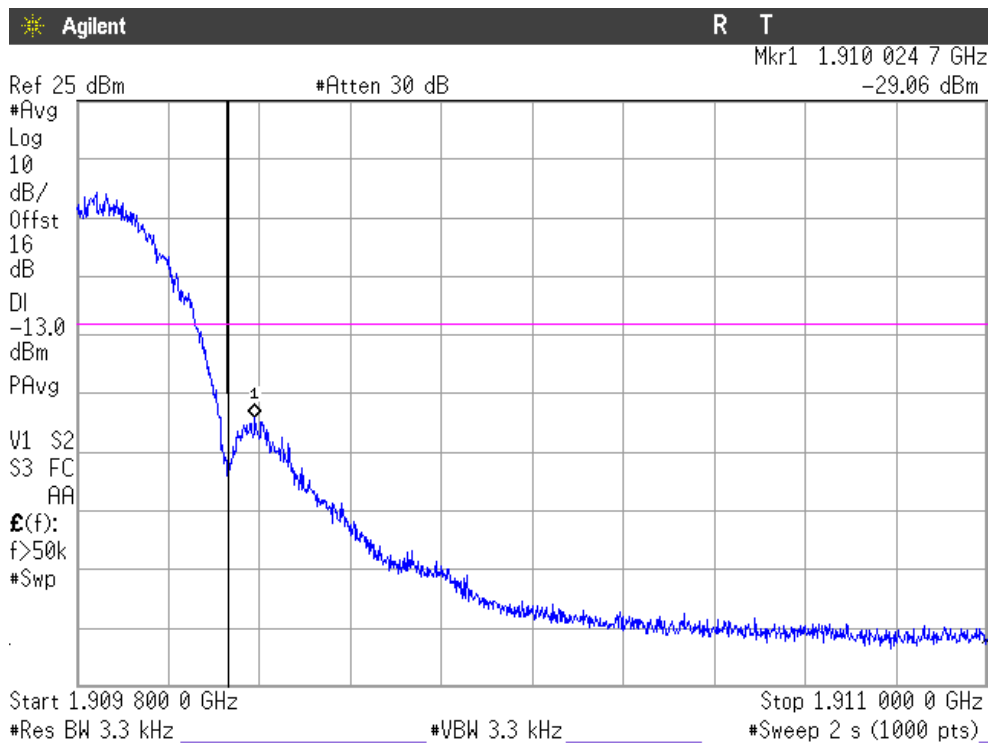

NOTE: The equipment transmits at the maximum output power


Verdict: PASS

WCDMA MODULATION
 CHANNEL LOWEST

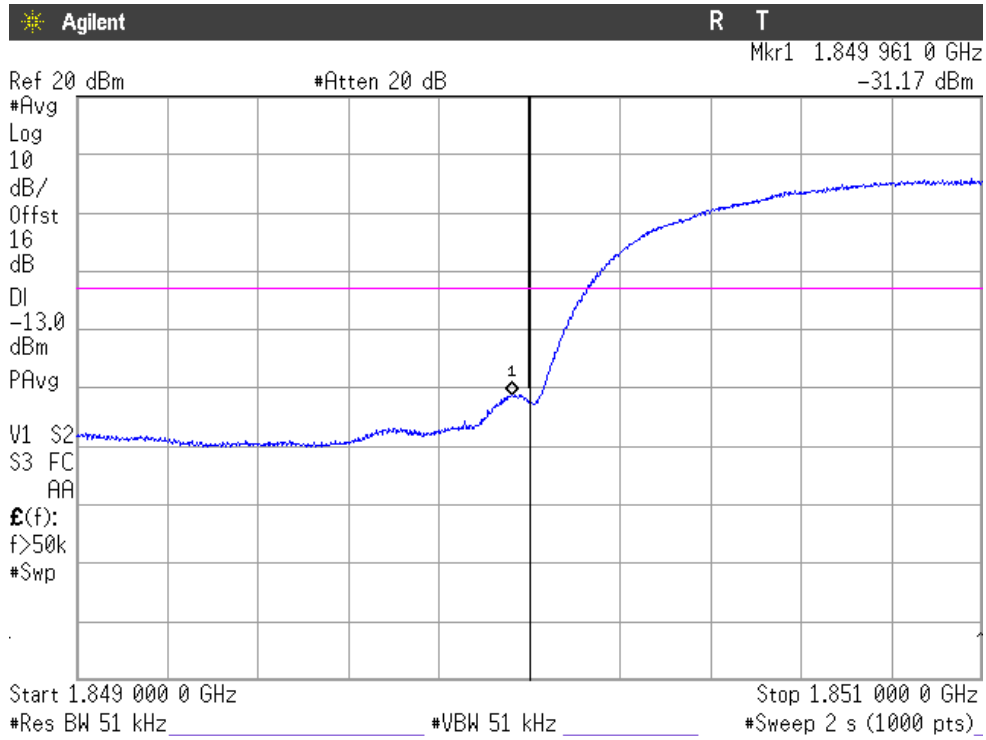

NOTE: The equipment transmits at the maximum output power


CHANNEL HIGHEST

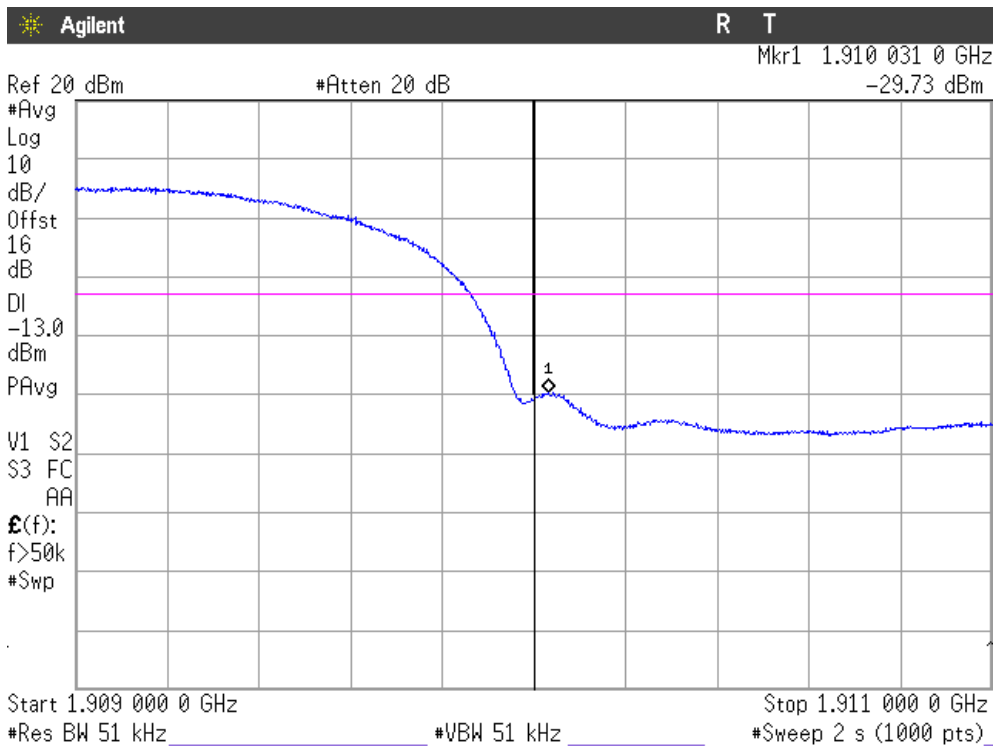

NOTE: The equipment transmits at the maximum output power


Verdict: PASS

HSUPA MODULATION
 CHANNEL LOWEST

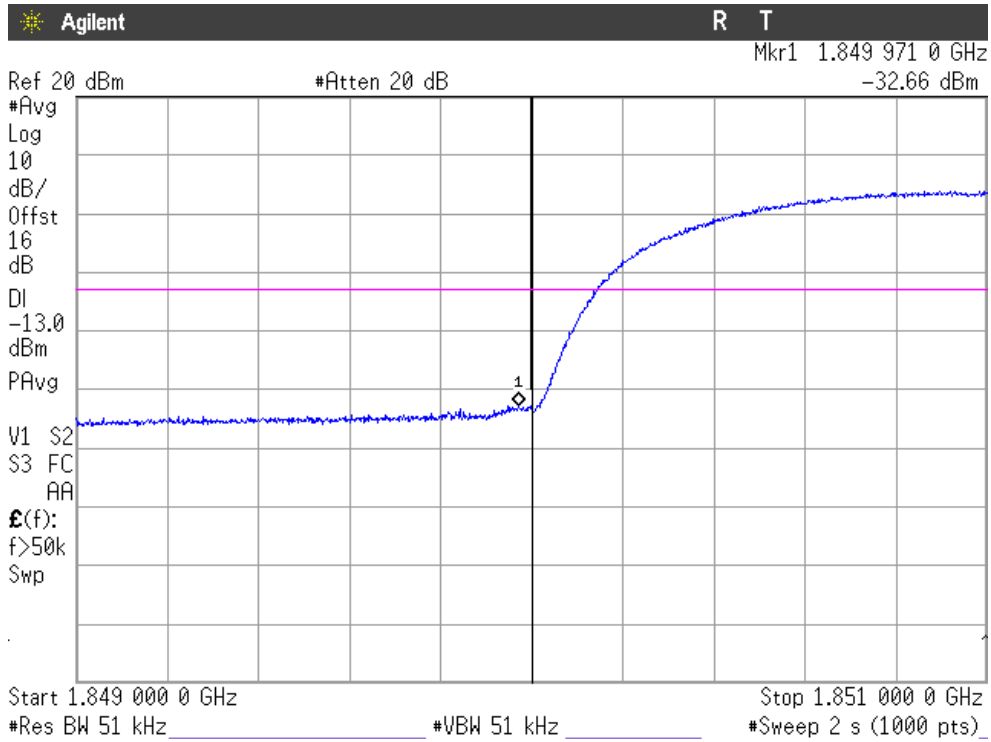

NOTE: The equipment transmits at the maximum output power

CHANNEL HIGHEST

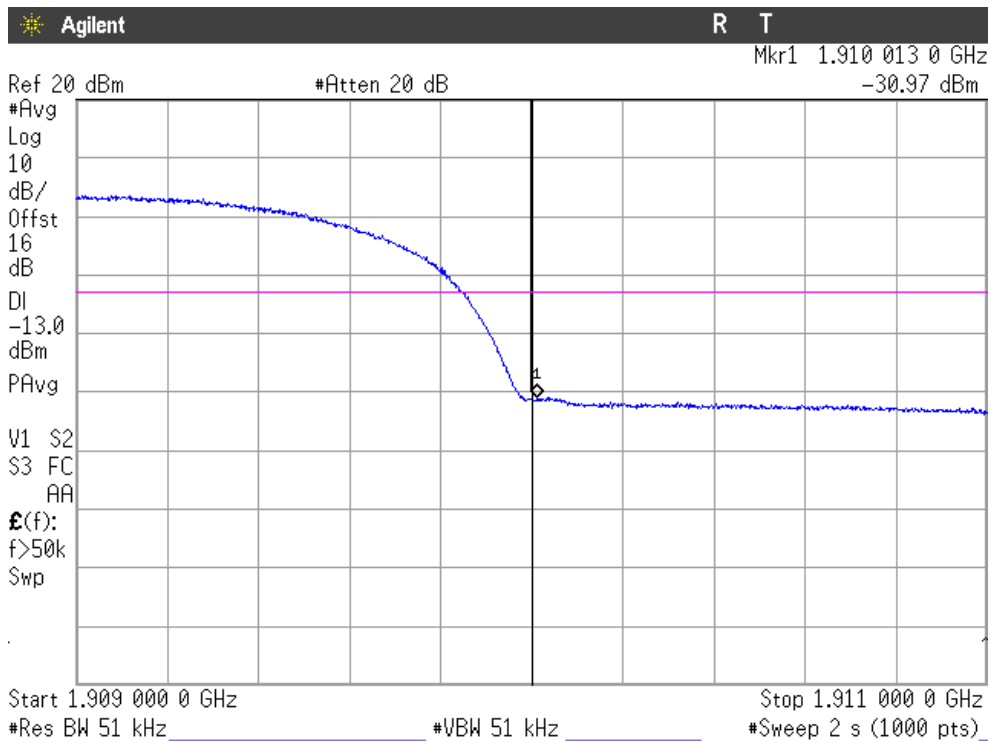

NOTE: The equipment transmits at the maximum output power

Verdict: PASS

Radiated emissions

SPECIFICATION

§ 24.238. RSS-133 Clause 6.5.

METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 1 GHz and at 1 m distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded. The radiated emissions were measured with peak detector and 1 MHz bandwidth.

Each detected emissions were substituted by the Substitution method. in accordance with the ANSI/TIA/EIA-603-C: 2004.

Measurement Limit:

According to specification. the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power. the specified minimum attenuation becomes $43+10\log (P_o)$. and the level in dBm relative P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

RESULTS

GPRS AND EDGE MODULATION

A preliminary scan determined the GPRS modulation as the worst case. The following tables and plots show the results for GPRS modulation.

1. CHANNEL: LOWEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

2. CHANNEL: MIDDLE

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.

No spurious signals were found in all the range.

3. CHANNEL: HIGHEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.

No spurious signals were found in all the range.

WCDMA AND HSUPA MODULATION

A preliminary scan determined the WCDMA modulation as the worst case. The following tables and plots show the results for WCDMA modulation.

1. CHANNEL: LOWEST

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

2. CHANNEL: MIDDLE

Frequency range 30 MHz-1000 MHz.

No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

3. CHANNEL: HIGHEST

Frequency range 30 MHz-1000 MHz.


No spurious signals were found in all the range.

Frequency range 1 GHz-20 GHz.

No radiated spurious signals were detected at less than 20 dB respect to the limit.

Verdict: PASS

WCDMA MODULATION

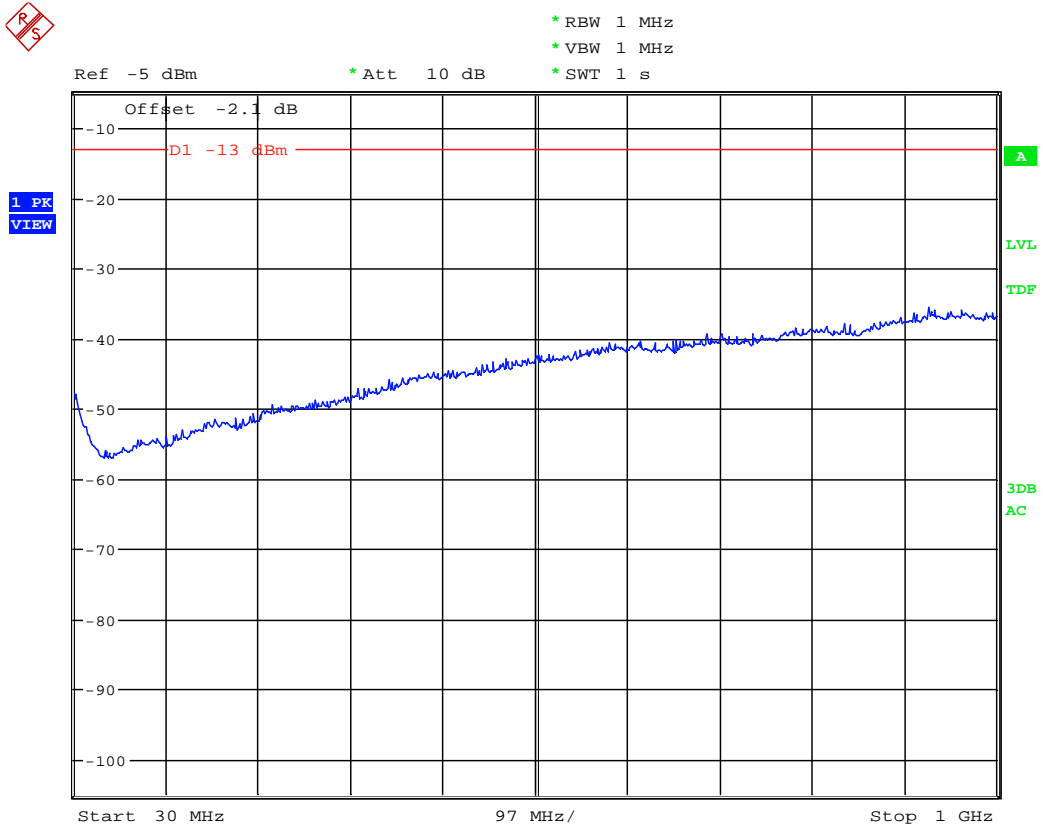


(This plot is valid for all three channels)

FREQUENCY RANGE 1 GHz to 3 GHz.


GPRS MODULATION

CHANNEL: LOWEST

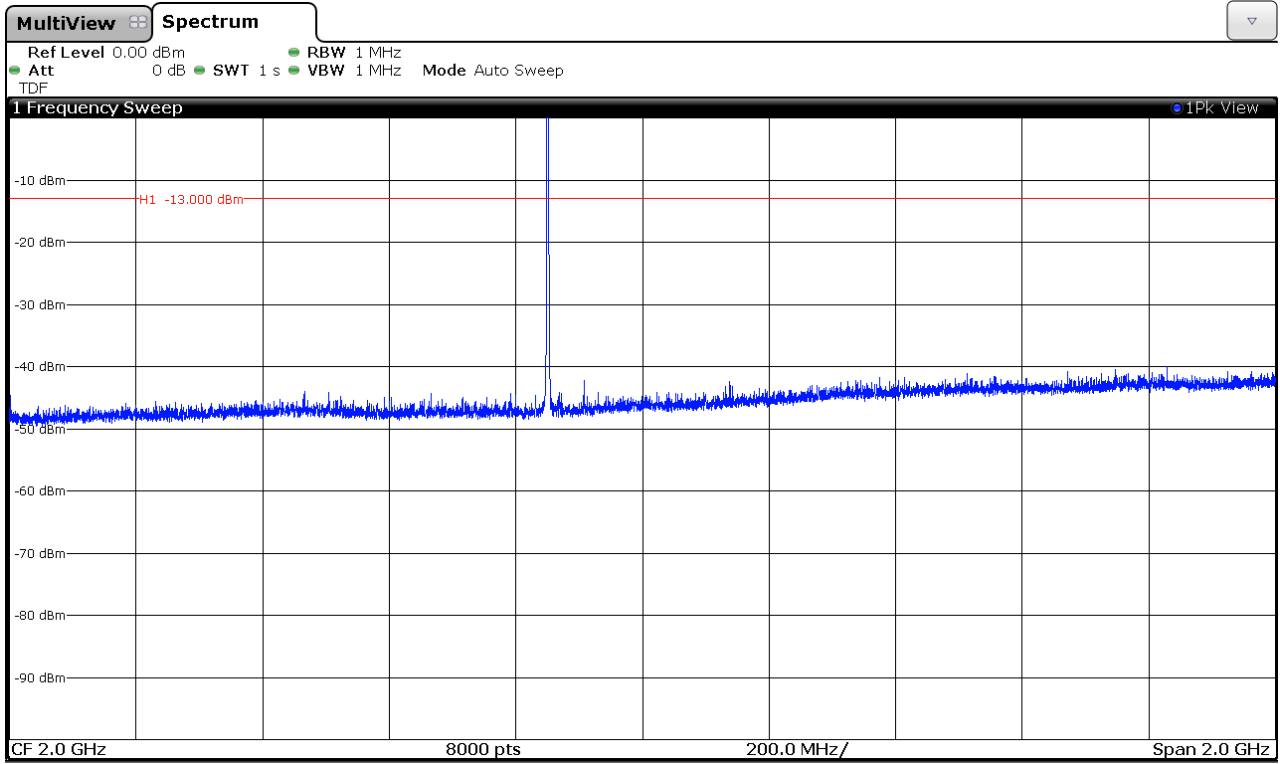


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

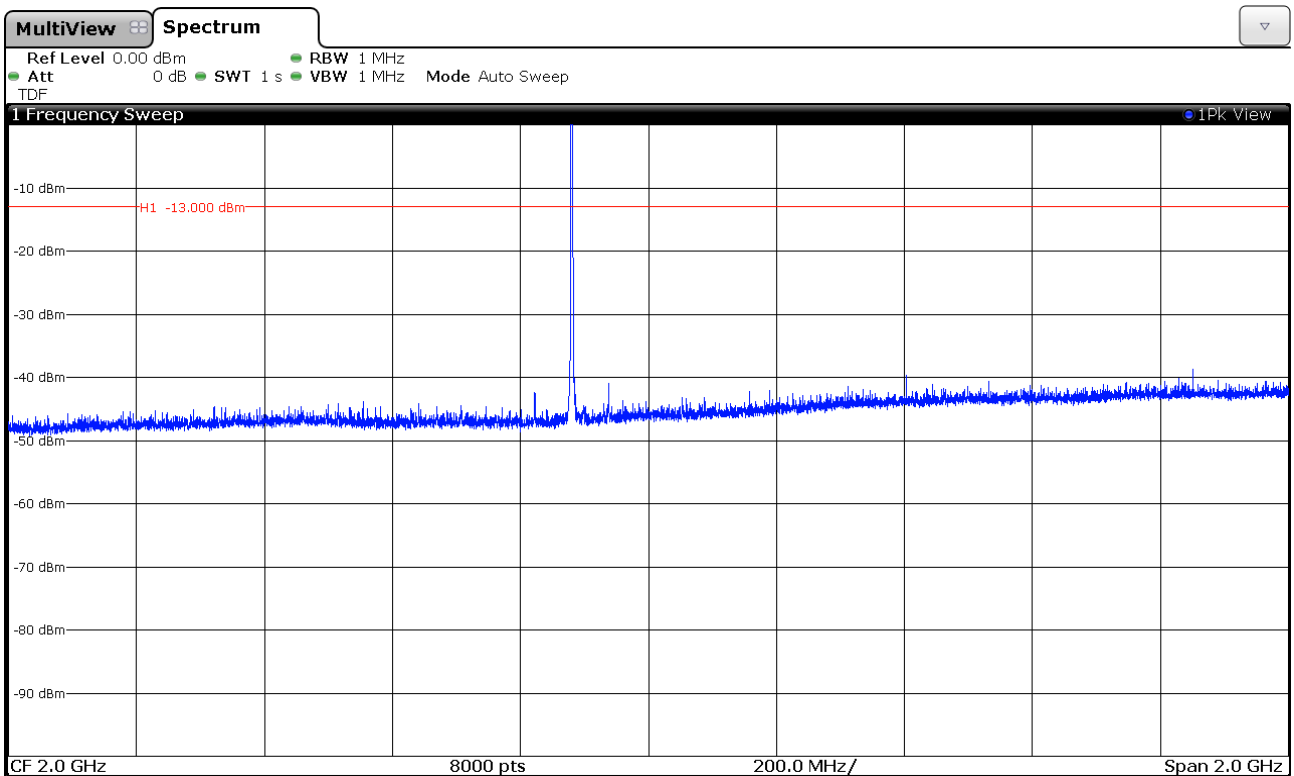

Note: The peak above the limit is the carrier frequency.


CHANNEL: HIGHEST

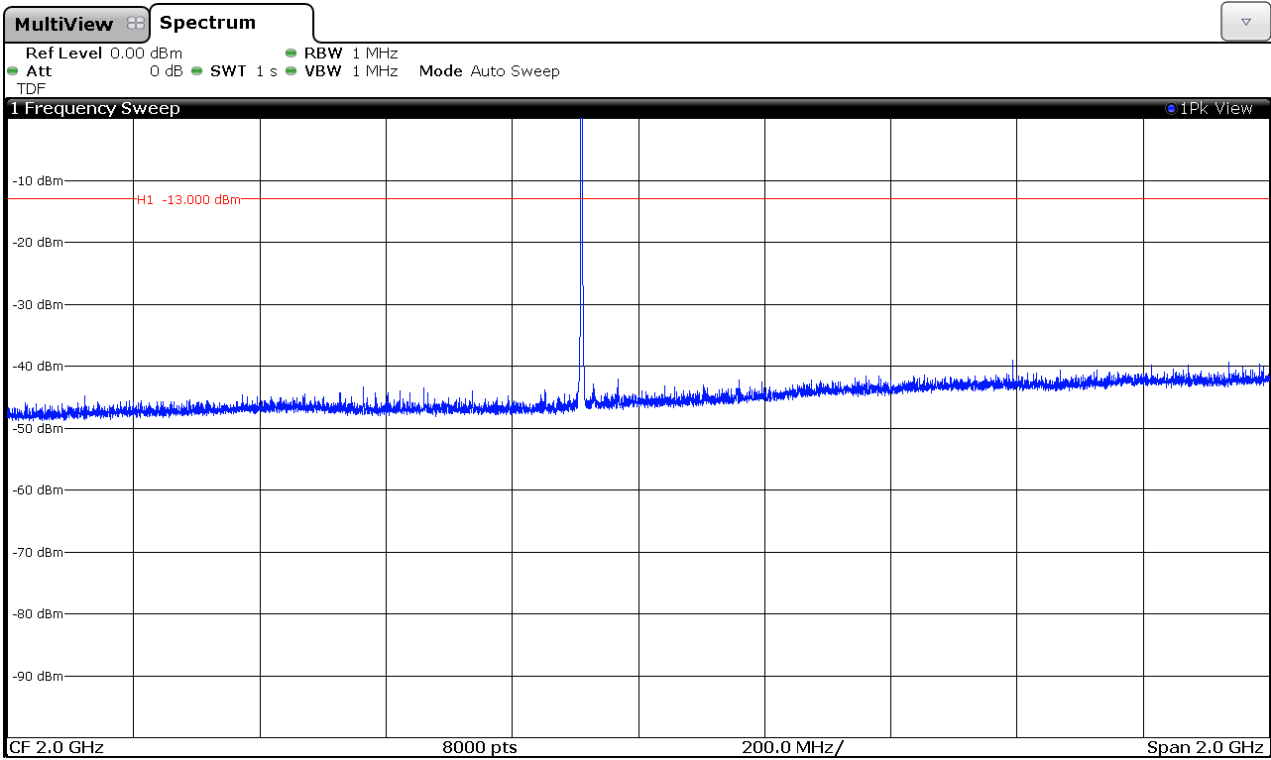

Note: The peak above the limit is the carrier frequency.


WCDMA MODULATION

CHANNEL: LOWEST

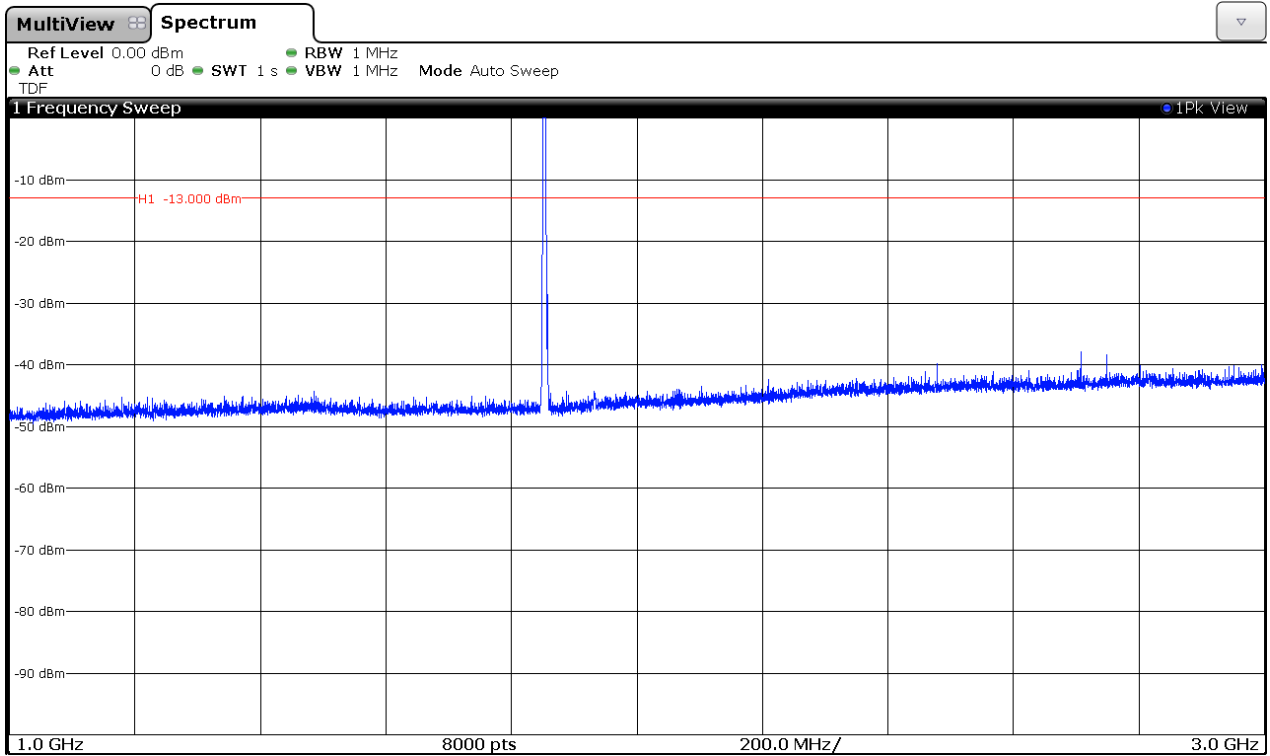


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

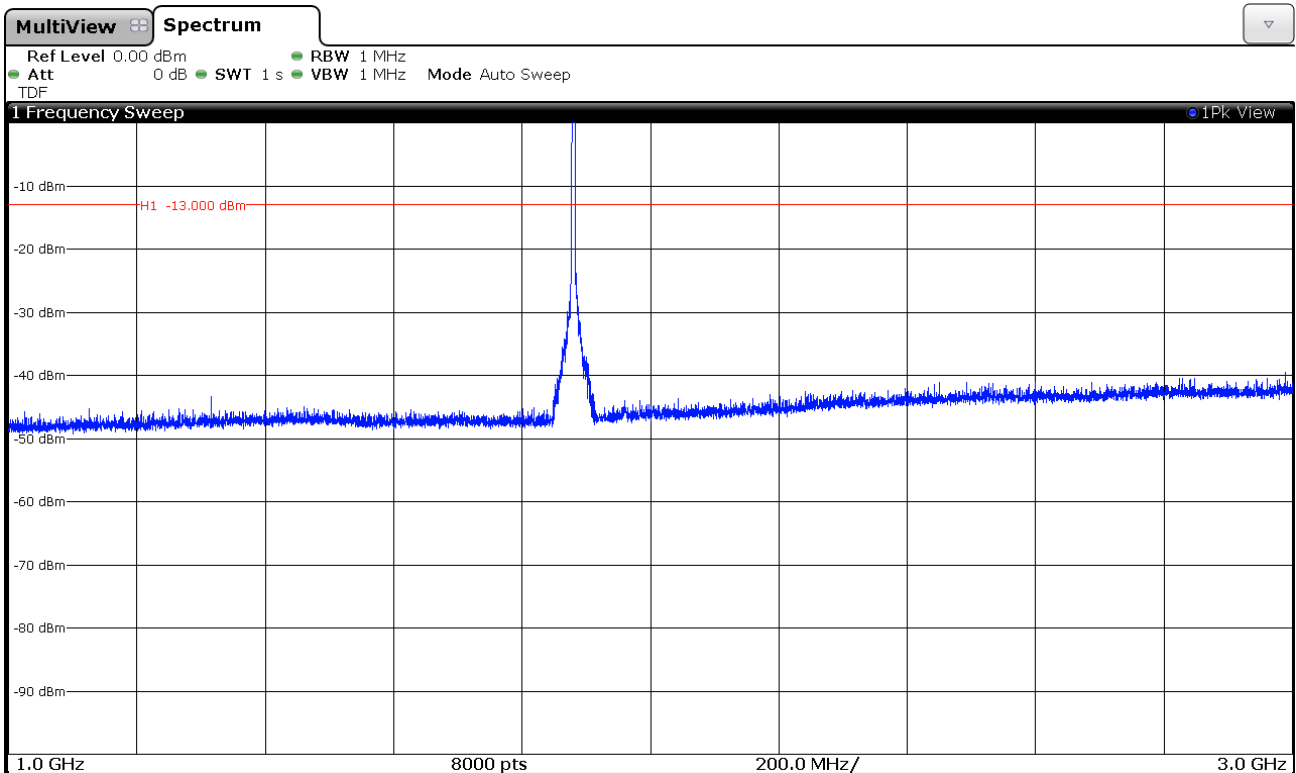

Note: The peak above the limit is the carrier frequency.

CHANNEL: HIGHEST

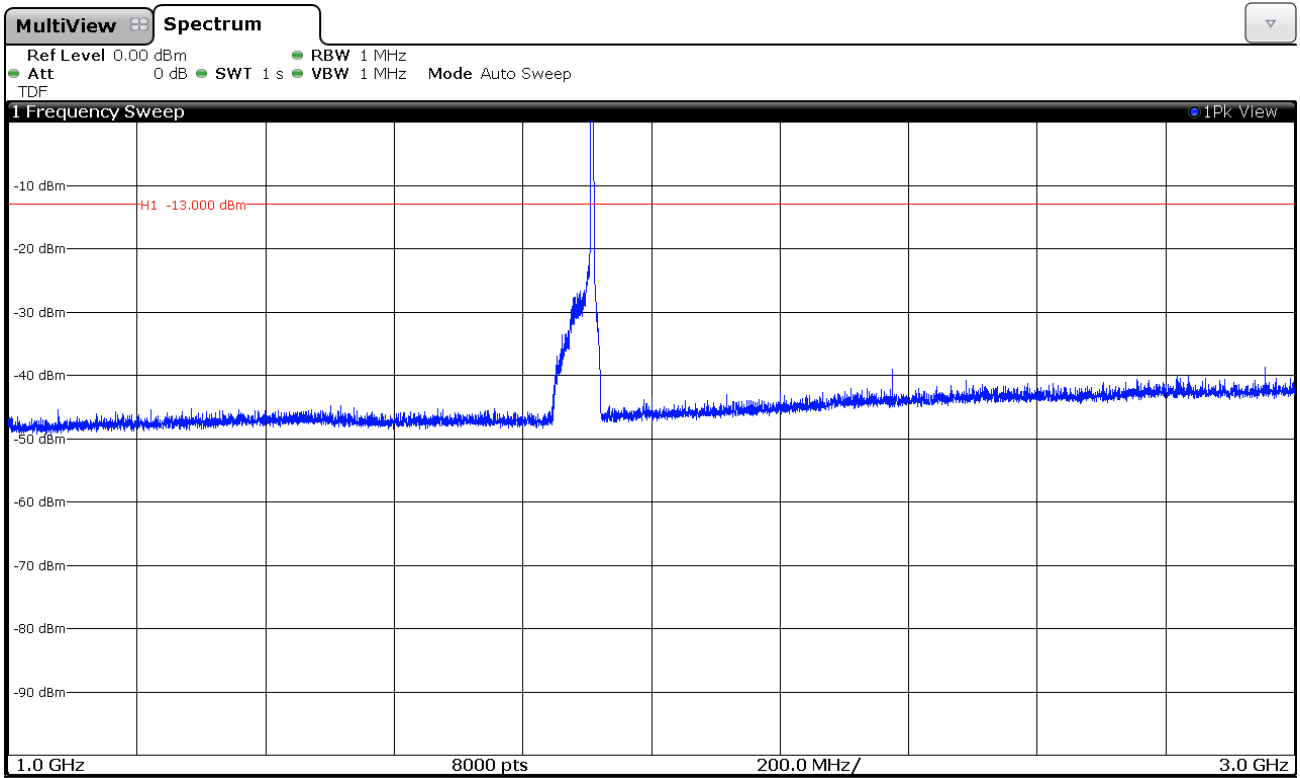


Note: The peak above the limit is the carrier frequency.


FREQUENCY RANGE 3 GHz to 12.75 GHz.

GPRS MODULATION


CHANNEL: LOWEST

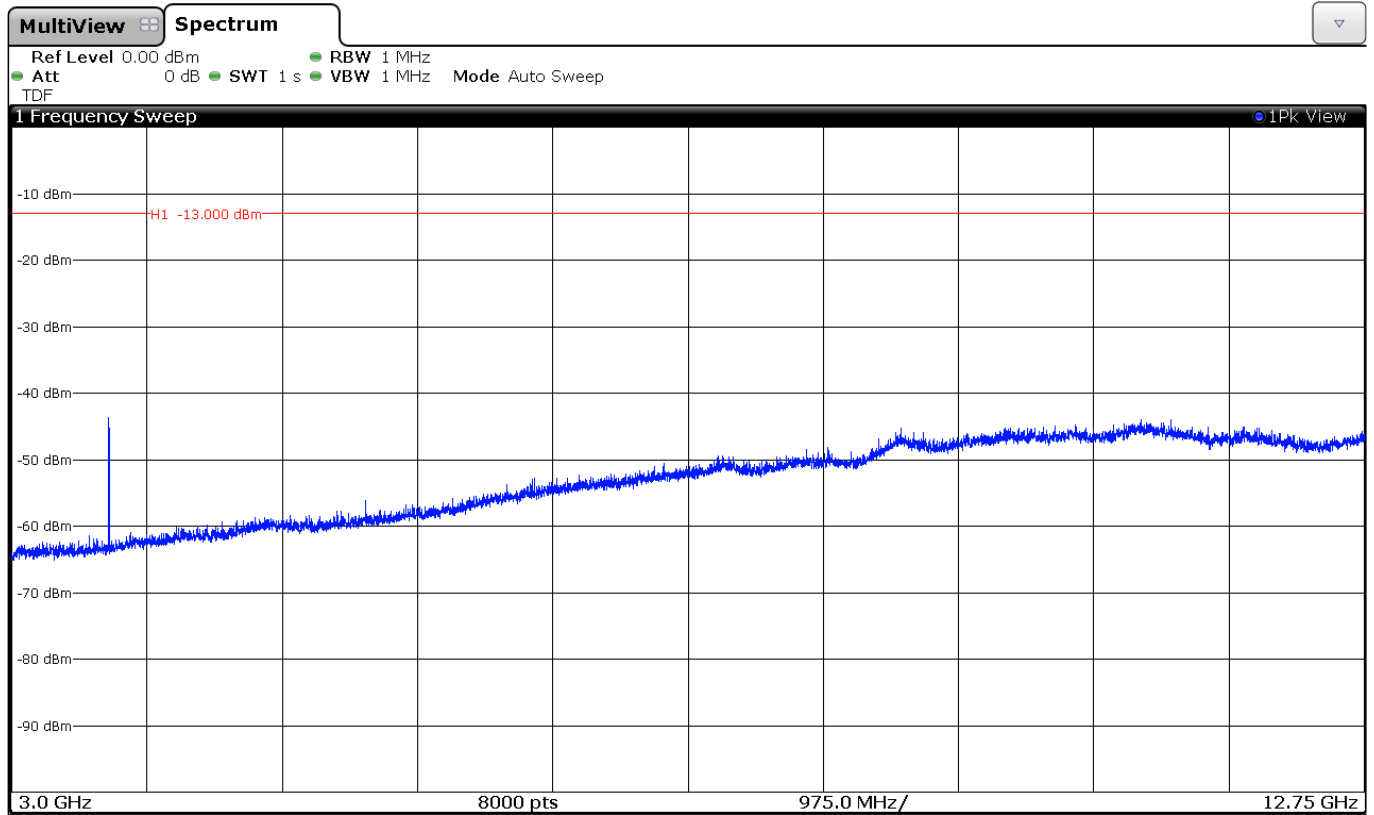

CHANNEL: MIDDLE

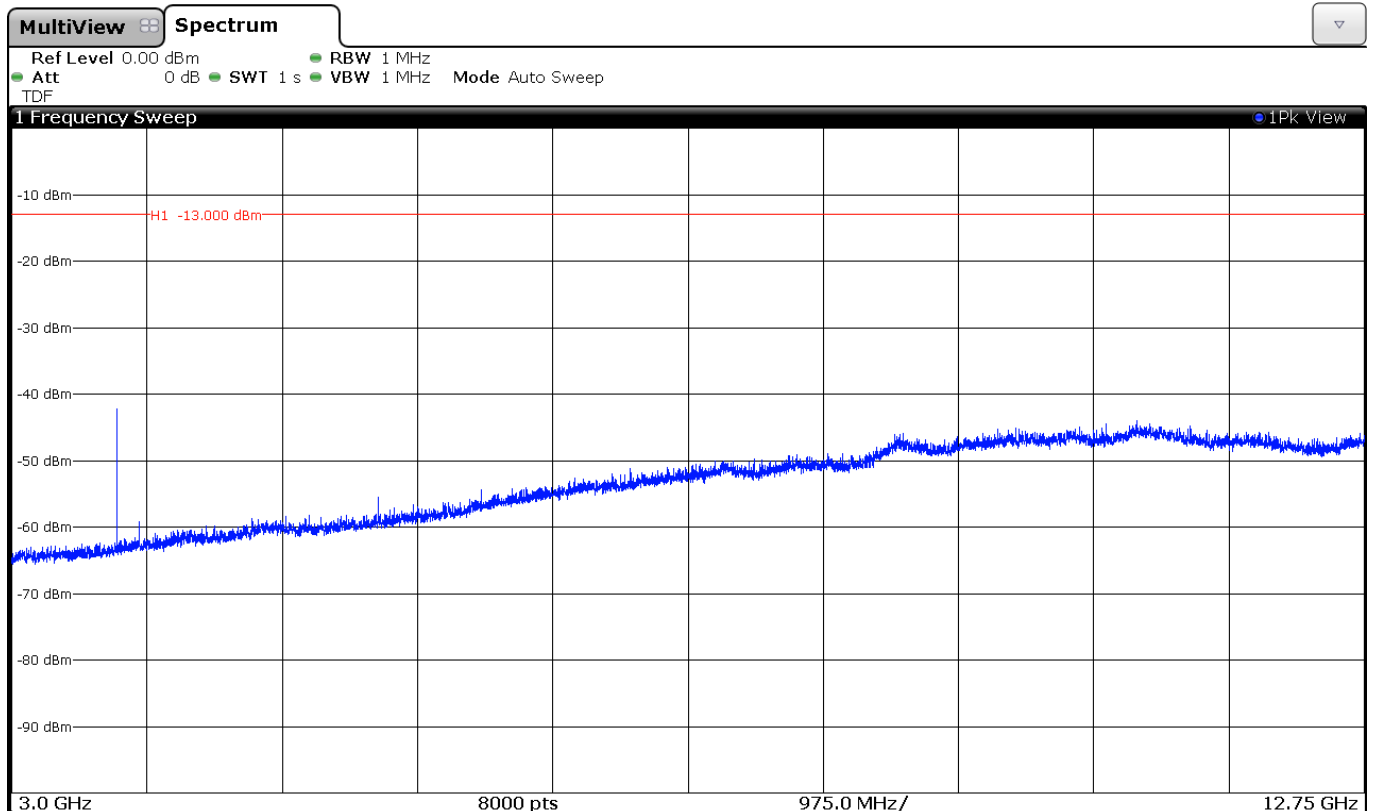


CHANNEL: HIGHEST

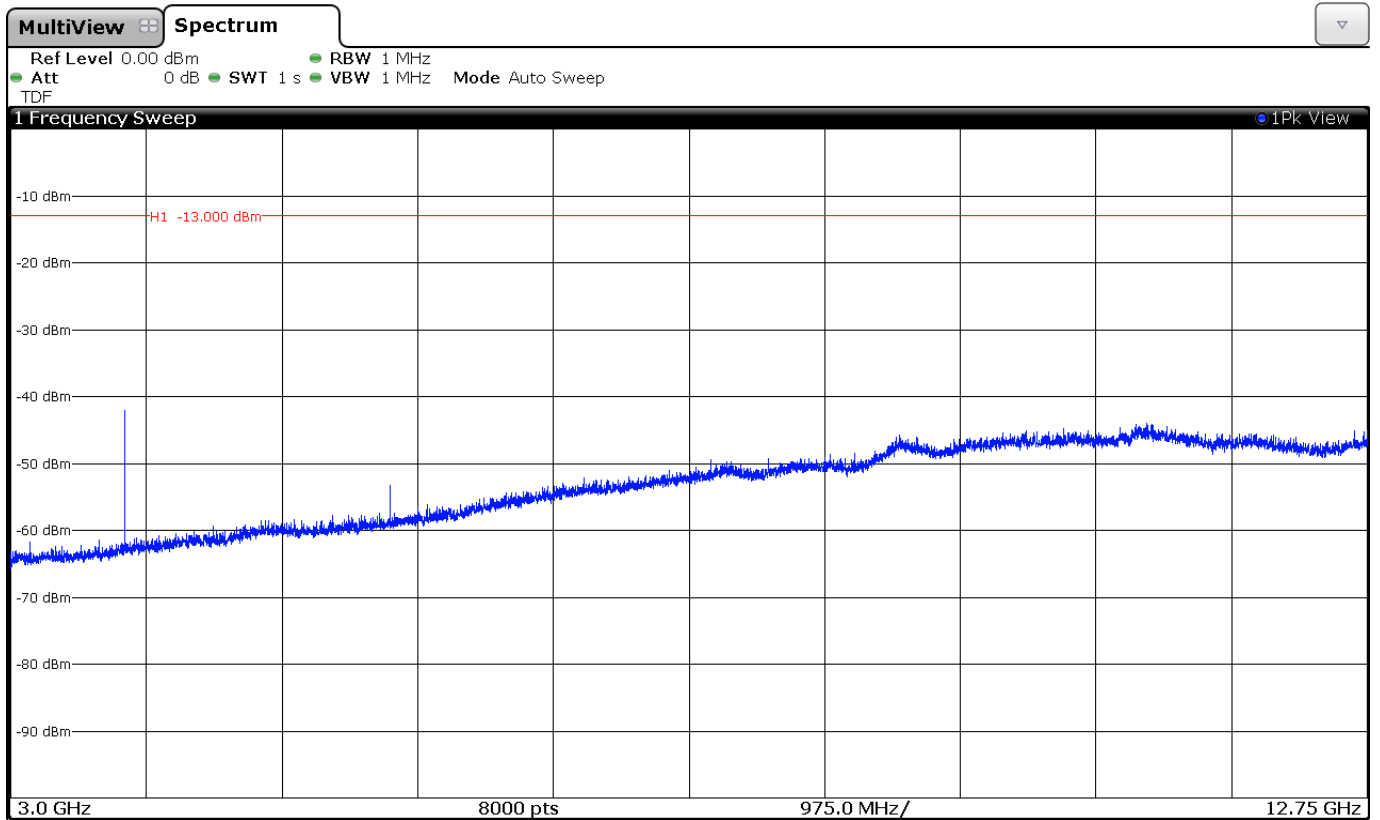


WCDMA MODULATION


CHANNEL: LOWEST

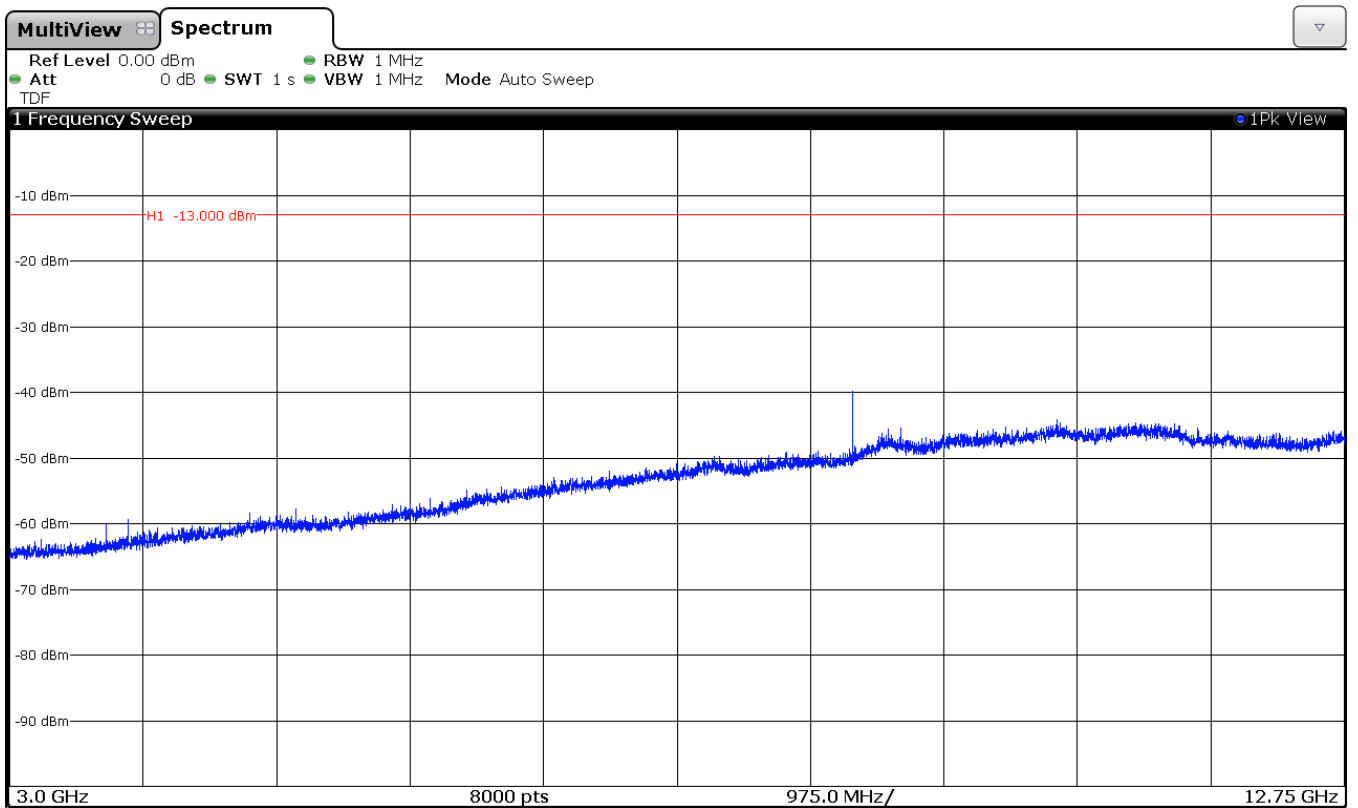

CHANNEL: MIDDLE

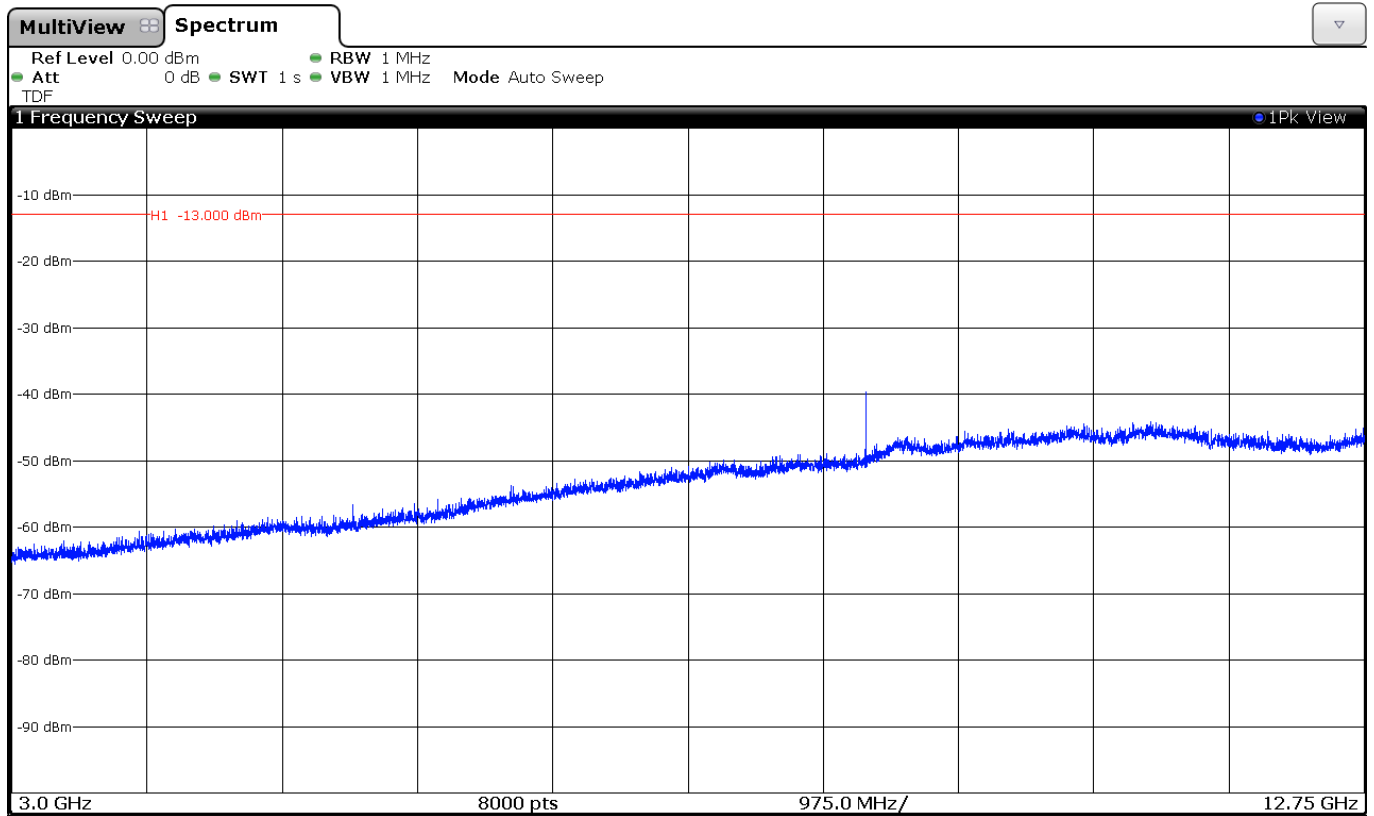


CHANNEL: HIGHEST

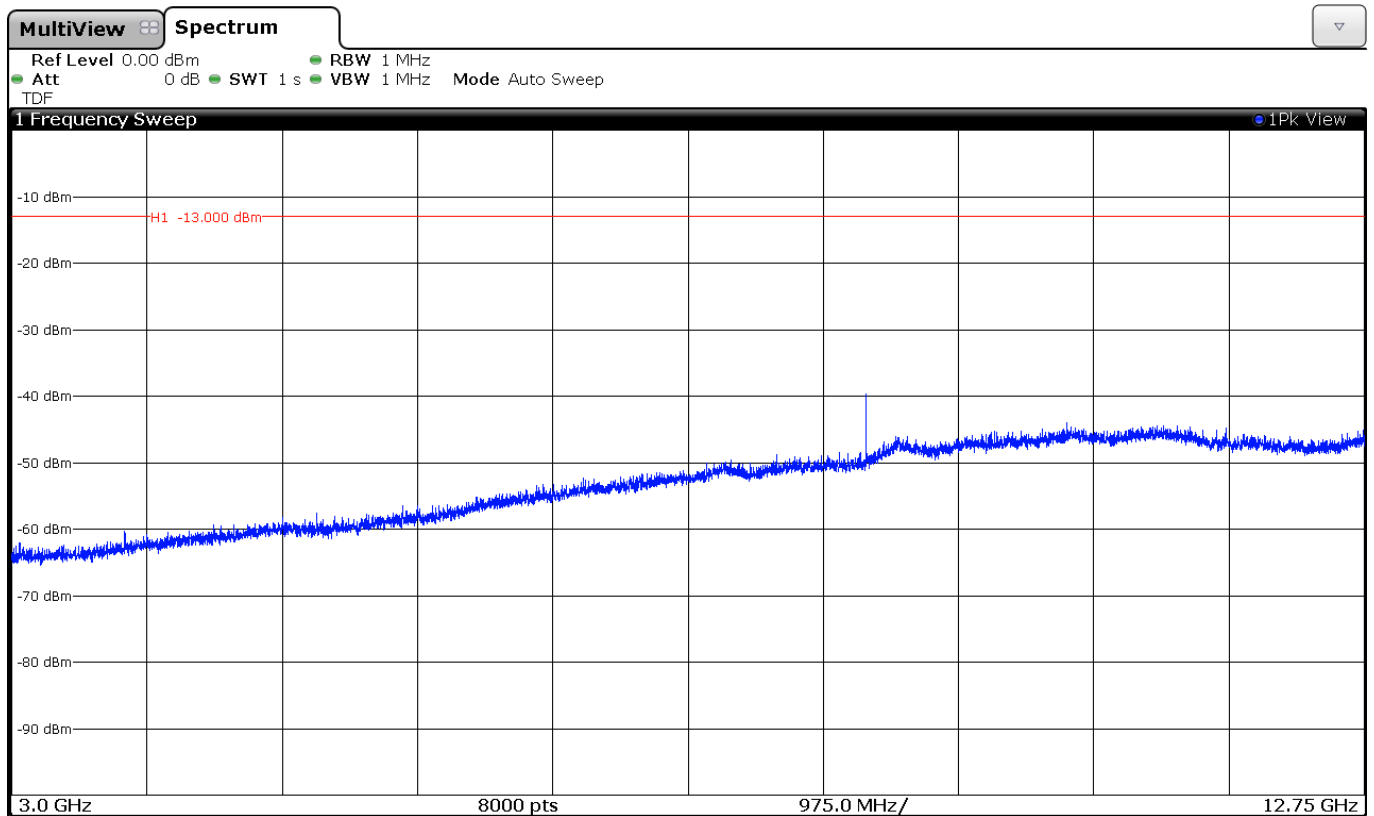


FREQUENCY RANGE 12.75 GHz TO 18 GHz.

GPRS MODULATION

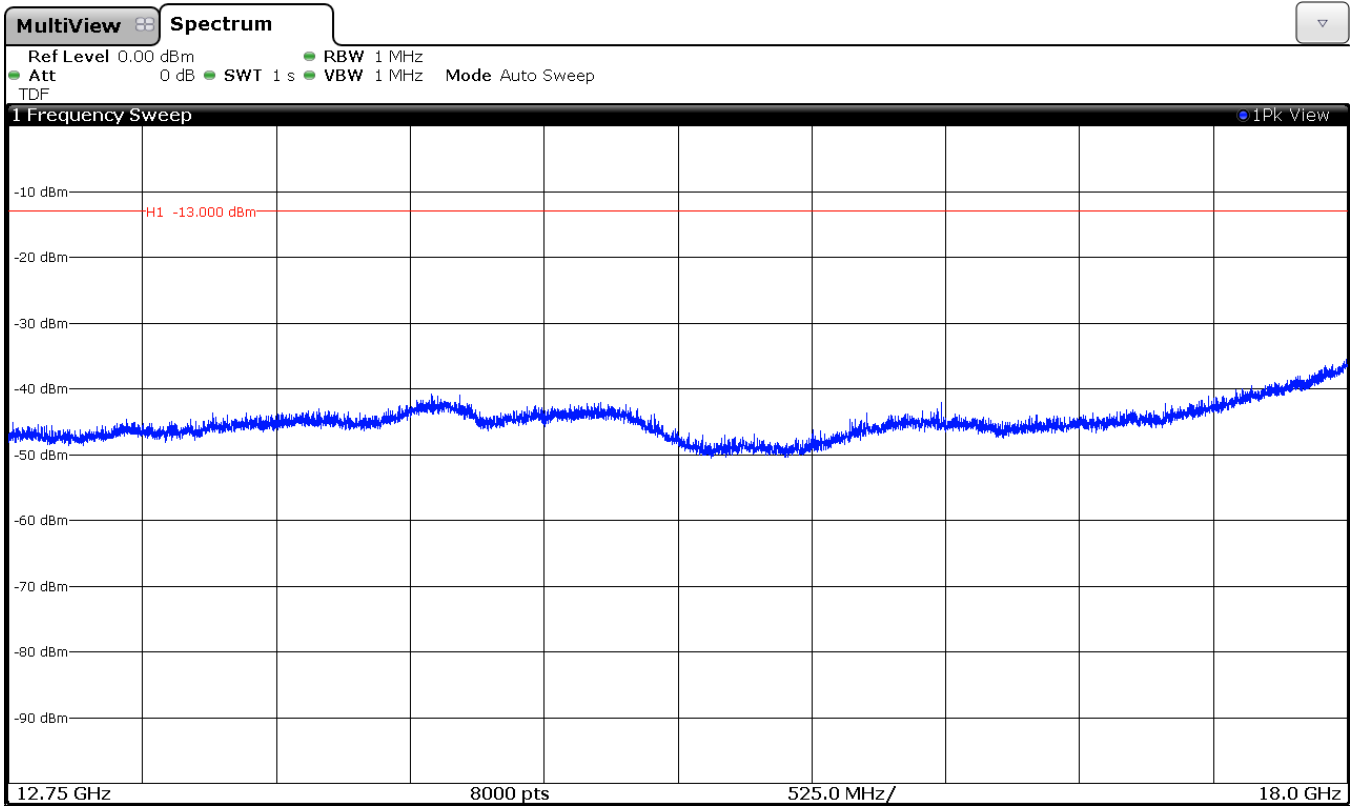

(This plot is valid for all three channels)


WCDMA MODULATION

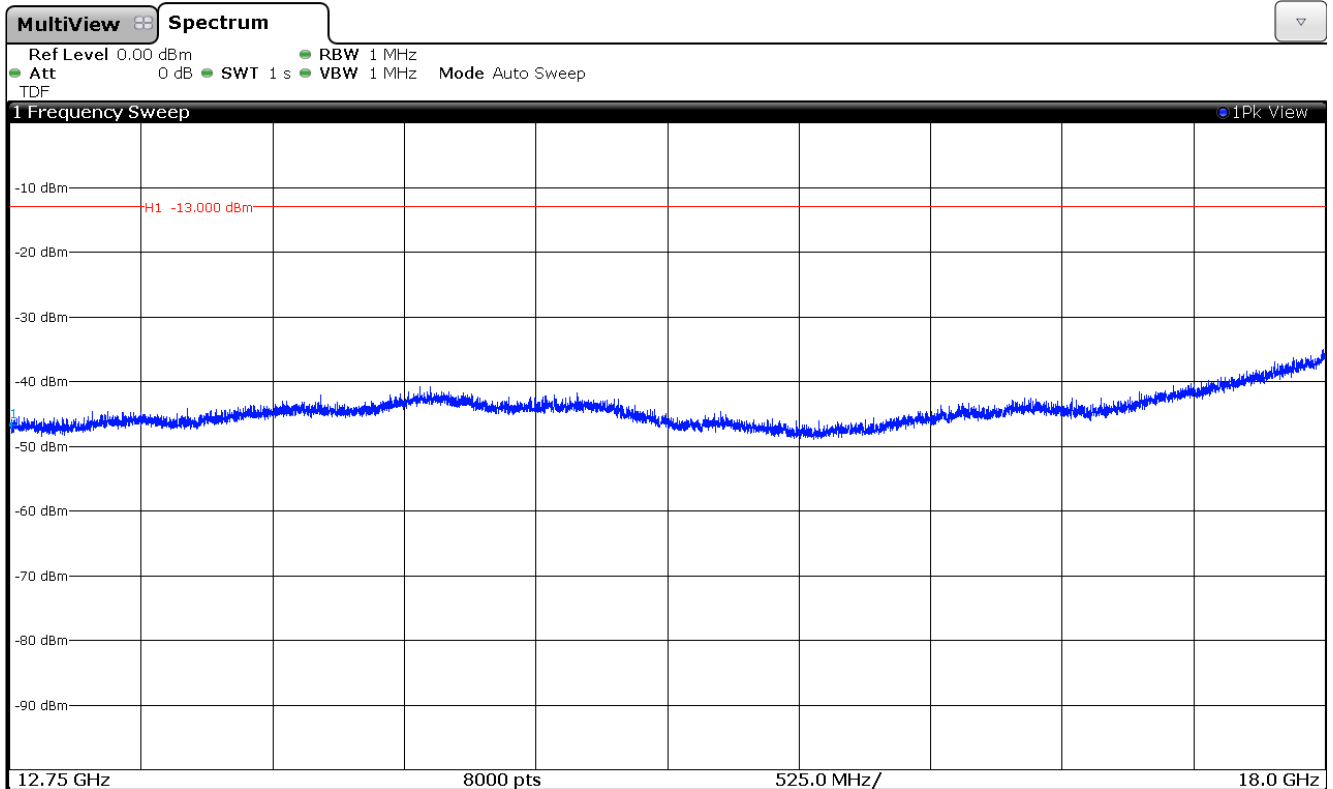

(This plot is valid for all three channels)


FREQUENCY RANGE 18 GHz TO 20 GHz.

GPRS MODULATION

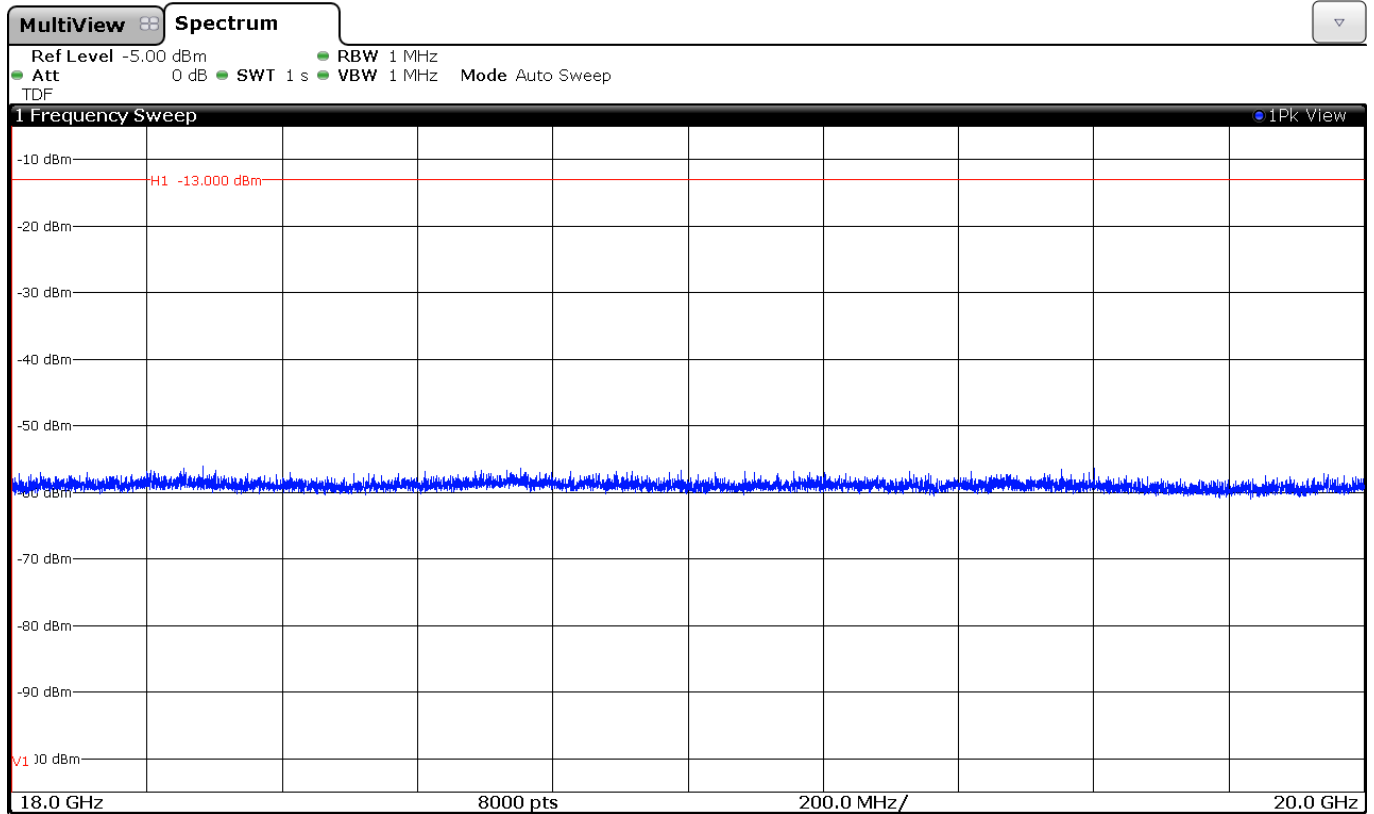

(This plot is valid for all three channels)

WCDMA MODULATION

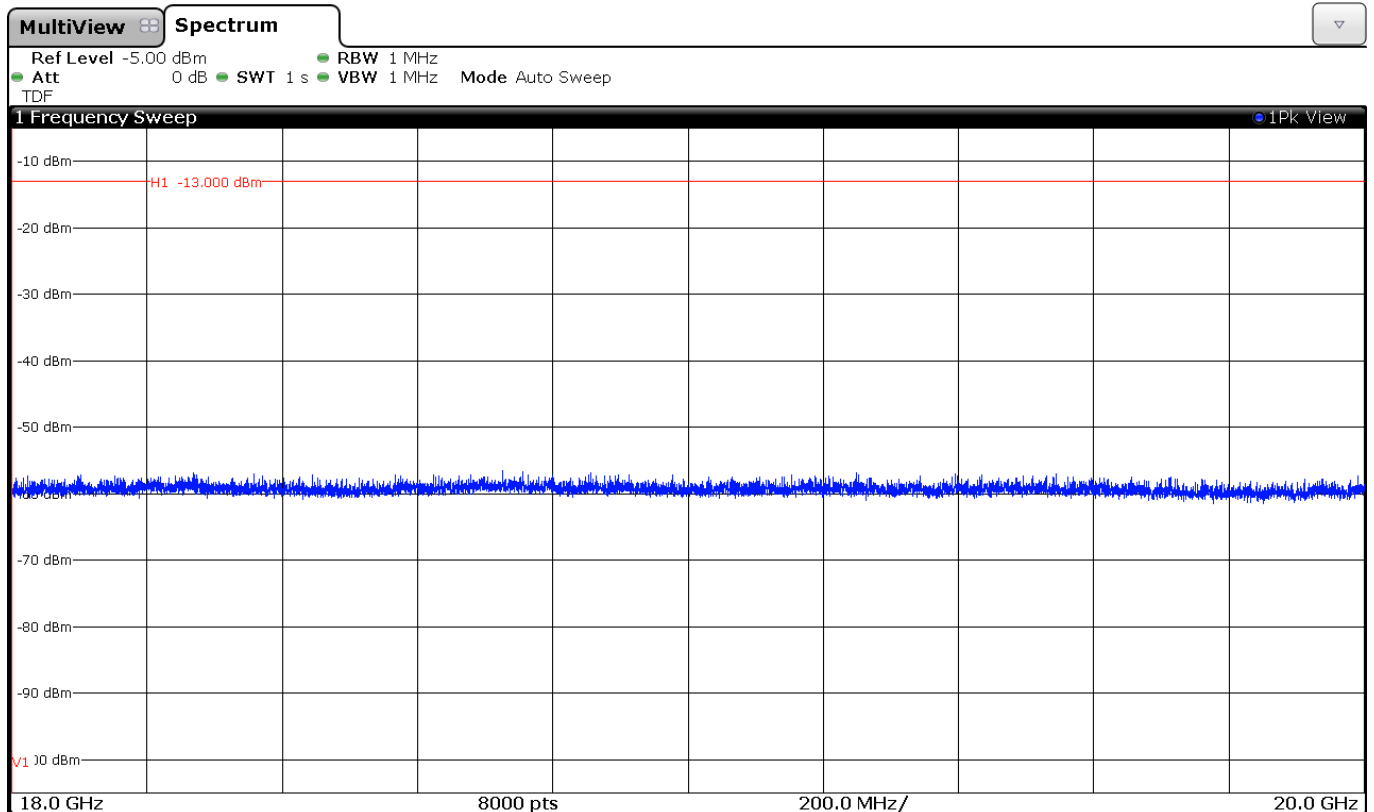

(This plot is valid for all three channels)