


## LABEL LAYOUT SPECIFICATION

2001701918 ATOP DEVICE LABEL LAYOUT Rev. 6 2014/11/05

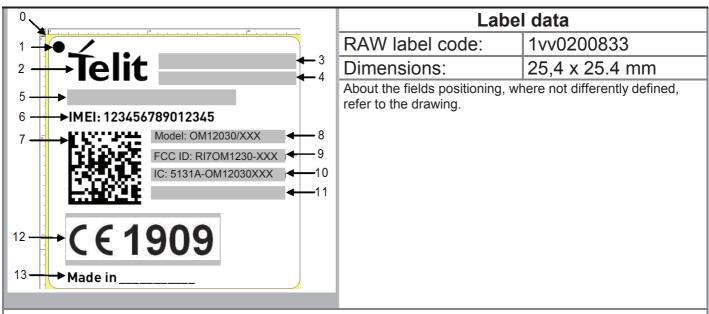

## LAYOUT DESCRIPTION:

- 1) Reference for module Pin 1. Place a black filled circle 1,2mm diameter.
- 2) Telit Logo (8x4mm) (File telit.bmp).
- 3) Clear writing of text reported on row 0005 of Master BOM Font ARIAL-Bold 4pt
- 4) Clear writing of text reported on row 0012 of Master BOM Font ARIAL-Bold 4pt
- 5) Clear writing of text reported on row 0085 of Master BOM Font ARIAL-Bold 4pt
- 6) Clear writing **IMEI:**\* followed by clear writing of ID number as indicated on the P32-EN Product ID number allocation document. Font ARIAL-Bold 4pt
  - \*For modules managed by Telit Serial Number (TSN) clear writing **TSN**:
- 7) Barcode type 2D Data Matrix, ECC200 of **ID number** as indicated on the P32-EN Product ID number allocation document, followed by the **String code for Contract Manufacturer internal use**, separated by a semicolon ";". Barcode max size 8x8 mm tolerance xy +/-0.5mm
  - Offset between (ref.0) point and barcode upper left corner x=1,5mm y=9.6mm tolerance xy +/- 0.5mm
- 8) Clear writing of text reported on row 0036 of Master BOM Font ARIAL-Bold 4pt
- 9) Clear writing of text reported on row 0030 of Master BOM Font ARIAL-Bold 4pt
- 10) Clear writing of text reported on row 0035 of Master BOM Font ARIAL-Bold 4pt
- 11) Clear writing of text reported on row 0044 of Master BOM Font ARIAL-Bold 4pt
- 12) Placement of the logo reported on row 0060 of Master BOM respecting the dimensions in brackets.
- 13) Clear writing "Made in" followed by the name of production country. Font ARIAL-Bold 4pt

**NOTE:** If in Master BOM the lines to which reference is done on layout specification don't exist, the field on the label is not applicable and therefore must not be filled.