



FCC LISTED, REGISTRATION
 NUMBER: 720267

Informe de ensayo n°:
 Test report No:

IC LISTED REGISTRATION
 NUMBER IC 4621A-2

NIE: 52339RRF.002

Test report

USA FCC Part 15.247, 15.209

CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and
 5725 - 5850 MHz.

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt
 Local Area Network (LE-LAN) Devices.

General Requirements and Information for the Certification of Radio Apparatus.

Identificación del objeto ensayado.....: Identification of item tested	Short Range
Marca Trademark	TELIT
Modelo y/o referencia tipo Model and /or type reference	WE922-3GR
Other identification of the product	FCC ID: RI7WE9223GR IC: 5131A-WE9223GR
Final HW version	CS1772b-B
Final SW version	MR1.4_A60_01.1647.06
Características Features	Connectivity (WiFi, BT & GNSS)
Solicitante Applicant	TELIT COMMUNICATIONS S.P.A. Via Stazione di Prosecco n. 5/B 34010 Sgornico (TS) - ITALY
Método de ensayo solicitado, norma.....: Test method requested, standard	USA FCC Part 15.247 10-1-15 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 10-1-15 Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 1 (May 2015). CANADA RSS-Gen Issue 4 (November 2014). Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v03r05 dated 04/08/2016. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Resultado.....: Summary	IN COMPLIANCE

Aprobado por (nombre / cargo y firma) Approved by (name / position & signature)	A. Llamas RF Lab. Manager
Fecha de realización Date of issue	2017-02-09
Formato de informe No. Report template No	FDT08_18

Index

Competences and guarantees.....	4
General conditions.....	4
Uncertainty	4
Usage of samples.....	5
Test sample description	5
Identification of the client	5
Testing period.....	5
Environmental conditions.....	5
Remarks and comments.....	6
Testing verdicts	6
Appendix A – Test result (Bluetooth Low Energy)	9
Appendix B – Test result (Bluetooth EDR).....	25
Appendix C – Test result “WiFi 2.4 GHz (802.11b/g/n20)”	56

Competences and guarantees

AT4 wireless is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

AT4 wireless is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 720267.

AT4 wireless is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621A-2.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance program for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the AT4 wireless internal document PODT000.

Usage of samples

Samples undergoing test have been selected by: **the client**

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
52339/009	Short Range	WE922-3GR	1777A109000399	2017-01-31
52339/008	Cradle	---	1742C180000119	2017-01-31
52339/011	USB cable	---	---	2017-01-31
52339/013	AC/DC adapter	XY-1201250-Z	---	2017-01-31
50716/016	BT+Wifi antenna	---	---	2016-09-27
50431/005	GPS antenna	---	---	2016-06-16
52339/010	Cellular antenna	---	---	2017-01-31

1. Sample S/01 has undergone following test(s).

All radiated tests indicated in appendixes A, B and C.

Test sample description

The test sample consists of a module integrating Intel Sofia-3R chipset solution with BT, WiFi and GNSS features.

Identification of the client

TELIT AUTOMOTIVE SOLUTIONS
5, Esplanade Anton Philips
14460 COLOMBELLES FRANCE

Testing period

The performed test started on 2017-02-02 and finished on 2017-02-03.

The tests have been performed at AT4 wireless.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 1 Ω

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 1 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 1 Ω

Remarks and comments

1: Used instrumentation:

Radiated Measurements

		Last Cal. date	Cal. due date
1.	Semianechoic Absorber Lined Chamber ETS FACT3 200STP	N.A.	N.A.
2.	BiconicalLog antenna ETS LINDGREN 3142E	2014/03	2017/03
3.	Multi Device Controller EMCO 2090	N.A.	N.A.
4.	Double-ridge Guide Horn antenna 1-18 GHz SCHWARZBECK BBHA 9120 D	2016/11	2019/11
5.	Broadband Horn antenna 18-40 GHz SCHWARZBECK BBHA 9170	2014/03	2017/03
6.	EMI Test Receiver R&S ESU 40	2016/03	2018/03
7.	Spectrum analyser Rohde & Schwarz FSW50	2015/12	2017/12
8.	RF pre-amplifier 10 MHz-6 GHz SCHWARZBECK BBV9743	2016/04	2017/04
9.	RF pre-amplifier 1-18 GHz Bonn Elektronik BLMA 0118-1M	2016/02	2018/02
10.	RF pre-amplifier 18-40 GHz BONN ELEKTRONIK BLMA 1840-1M	2015/12	2017/12

2: Only radiated tests of spurious emissions were requested.

Testing verdicts

Not applicable	N/A
Pass	P
Fail	F
Not measured	N/M

1. BTLE

FCC PART 15 PARAGRAPH / RSS-247		VERDICT			
		NA	P	F	NM ²
Section 15.247 Subclause (a) (2) / RSS-247 5.2. (1)	6 dB Bandwidth				NM ²
Section 15.247 Subclause (b) / RSS-247 5.4. (4)	Maximum output power and antenna gain				NM ²
Section 15.247 Subclause (d) / RSS-247 5.5	Emission limitations conducted (Transmitter)				NM ²
Section 15.247 Subclause (d) / RSS-247 5.5. ..	Band-edge emissions compliance (Transmitter)				NM ²
Section 15.247 Subclause (e) / RSS-247 5.2. (2)	Power spectral density				NM ²
Section 15.247 Subclause (d) / RSS-247 5.5.	Emission limitations radiated (Transmitter)		P		

2: See section “Remarks and comments”.

2. BT EDR

FCC PART 15 PARAGRAPH / RSS-247		VERDICT			
		NA	P	F	NM ²
FCC 15.247 Subclause (a) (1) / RSS-247 Clause 5.1 (2)	20 dB Bandwidth and Carrier frequency separation				NM ²
FCC 15.247 Subclause (a)(1)(iii) / RSS-247 Clause 5.1 (4)	Number of hopping channels				NM ²
FCC 15.247 Subclause (a)(1)(iii) / RSS-247 Clause 5.1 (4)	Time of occupancy (Dwell Time)				NM ²
FCC 15.247 Subclause (b) / RSS-247 Clause 5.4 (2)	Maximum peak output power and antenna gain				NM ²
FCC 15.247 Subclause (d) / RSS-247 Clause 5.5	Emission limitations conducted (Transmitter)				NM ²
FCC 15.247 Subclause (d) / RSS-247 Clause 5.5	Emission limitations radiated (Transmitter)		P		

2: See section “Remarks and comments”.

3. WiFi 2.4 GHz (802.11b/g/n20).

FCC PART 15 PARAGRAPH / RSS-247		VERDICT			
		NA	P	F	NM
Section 15.247 Subclause (a) (2) / RSS-247 5.2. (1)	6 dB Bandwidth				NM ²
Section 15.247 Subclause (b) / RSS-247 5.4. (4)	Maximum output power and antenna gain				NM ²
Section 15.247 Subclause (d) / RSS-247 5.5	Emission limitations conducted (Transmitter)				NM ²
Section 15.247 Subclause (d) / RSS-247 5.5. ...	Band-edge conducted emissions compliance (Transmitter)				NM ²
Section 15.247 Subclause (e) / RSS-247 5.2. (2)	Power spectral density				NM ²
Section 15.247 Subclause (d) / RSS-247 5.5. ...	Emission limitations radiated (Transmitter)		P		

2: See section “Remarks and comments”.

Appendix A – Test result (Bluetooth Low Energy)

INDEX

TEST CONDITIONS	11
Section 15.247 Subclause (d) / RSS-247 5.5. Emission limitations radiated (Transmitter)	13

TEST CONDITIONS

Power supply (V):

$$V_{\text{nominal}} = 3.8 \text{ Vdc}$$

Type of power supply = DC voltage from external power supply

Type of antenna = External attachable antenna

Declared Gain for antenna (maximum) = +2.3 dBi

TEST FREQUENCIES:

Lowest channel: 2402 MHz

Middle channel: 2440 MHz

Highest channel: 2480 MHz

RADIATED MEASUREMENTS


All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup $f < 1$ GHz

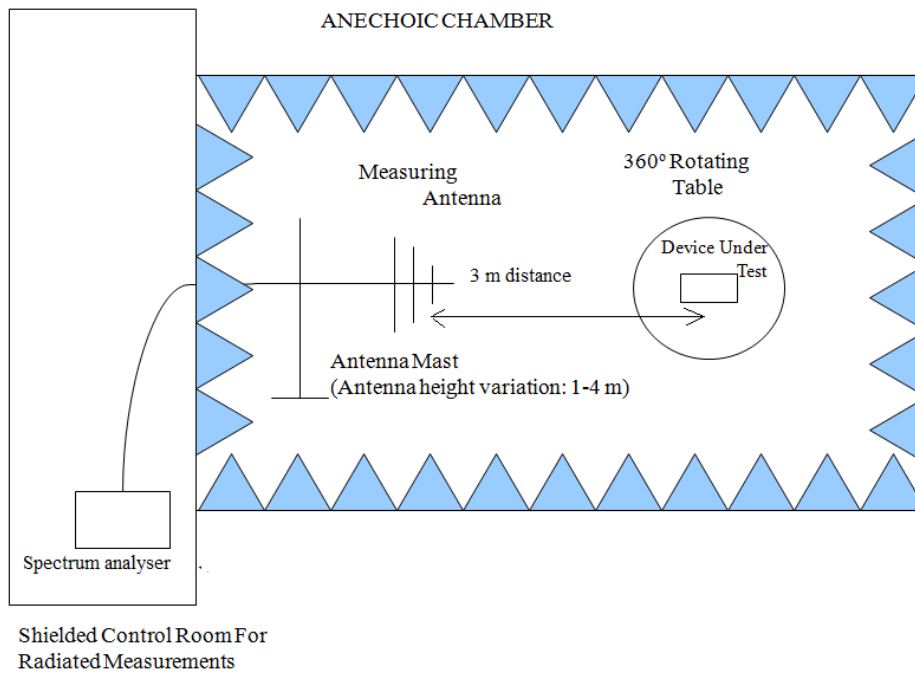

Radiated measurements setup $f > 1$ GHz

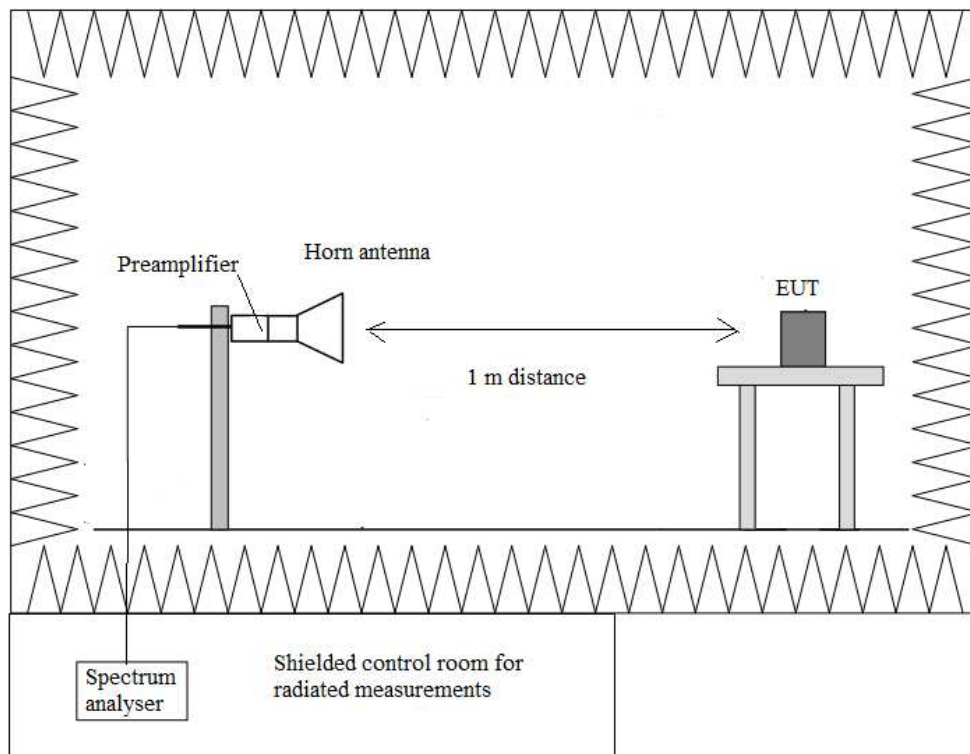

Section 15.247 Subclause (d) / RSS-247 5.5. Emission limitations radiated (Transmitter)

SPECIFICATION

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz-1000 MHz.

The spurious signals detected do not depend on the operating channel.

All peaks are more than 20 dB below the limit.

Frequency range 1 GHz-25 GHz

The results in the next tables show the maximum measured levels in the 1-25 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).

Spurious signals with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.14403	H	Peak	45.68	± 4.87
1.21330	H	Peak	45.69	± 4.87
2.34989	V	Peak	48.16	± 4.87
2.49473	H	Peak	49.67	± 4.87
2.50657	V	Peak	49.45	± 4.87
4.80425	V	Peak	44.54	± 4.87

2. CHANNEL: MIDDLE (2440 MHz).


Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.40433	H	Peak	44.85	± 4.87
1.14383	H	Peak	44.19	± 4.87
2.38805	V	Peak	48.27	± 4.87
2.49194	V	Peak	49.59	± 4.87
2.54423	V	Peak	48.48	± 4.87
4.87925	V	Peak	46.24	± 4.87

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.10990	H	Peak	44.95	± 4.87
1.14417	H	Peak	45.10	± 4.87
1.24810	V	Peak	44.53	± 4.87
2.32750	V	Peak	48.50	± 4.87
2.486378	V	Peak	59.96	± 4.87
		Avg	52.74	± 4.87
4.96025	V	Peak	41.99	± 4.87

Verdict: PASS


FREQUENCY RANGE 30 MHz-1000 MHz.

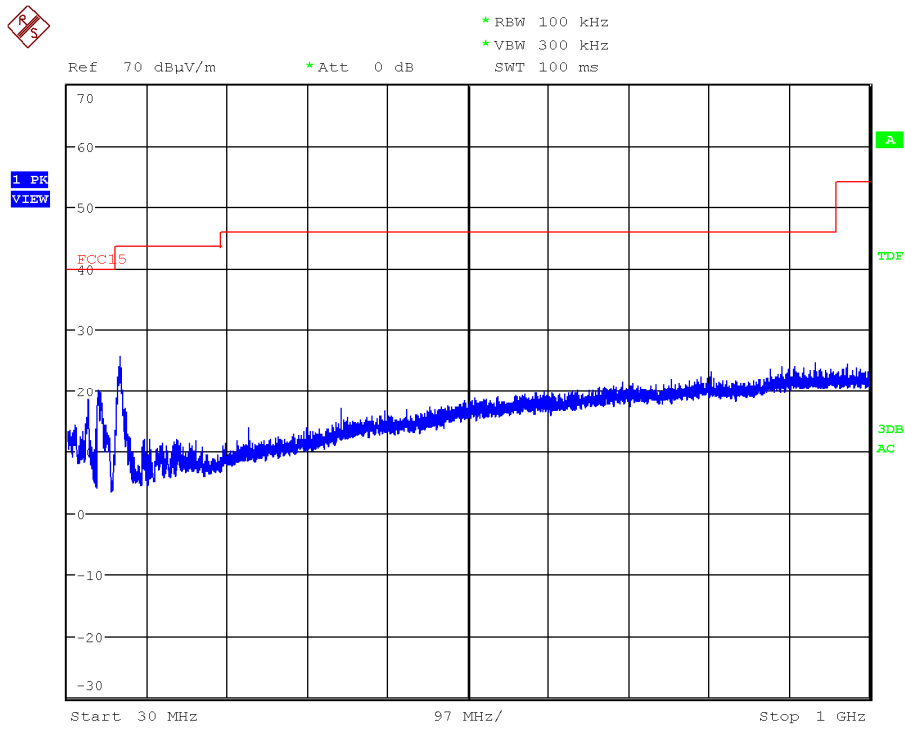

(This plot is valid for all three channels).


FREQUENCY RANGE 1 GHz to 3 GHz.

CHANNEL: Lowest (2402 MHz).

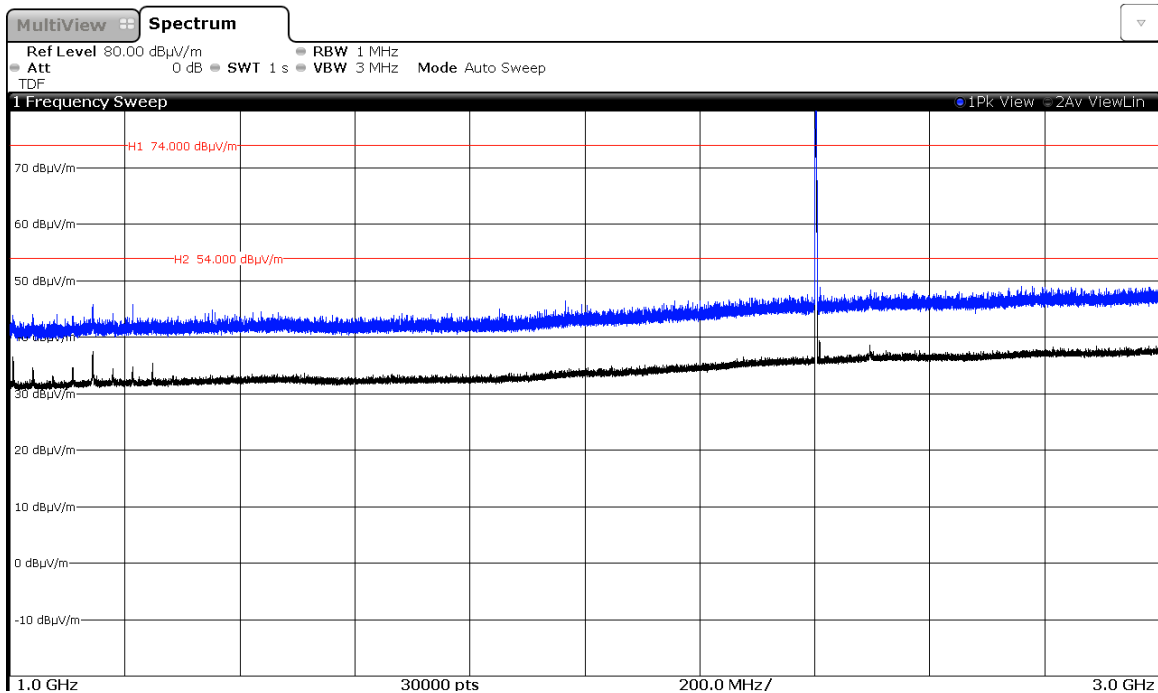


Note: The peak shown in the plot above the limit is the carrier frequency.

CHANNEL: Middle (2440 MHz).

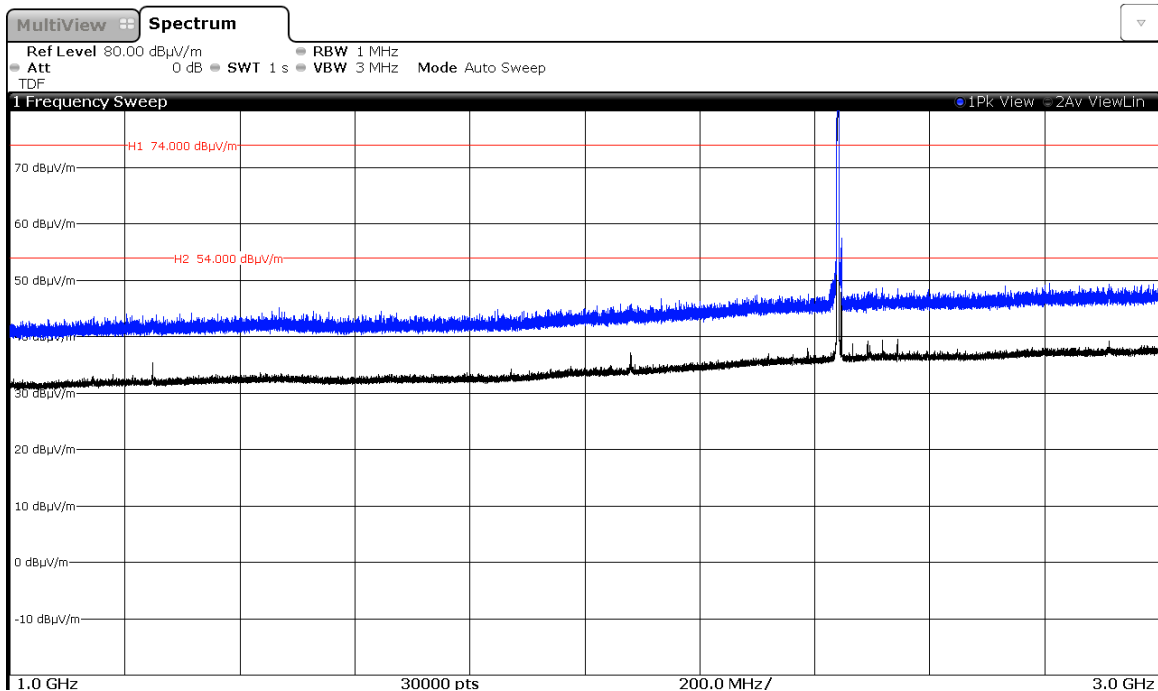

Note: The peak shown in the plot above the limit is the carrier frequency.


CHANNEL: Highest (2480 MHz).

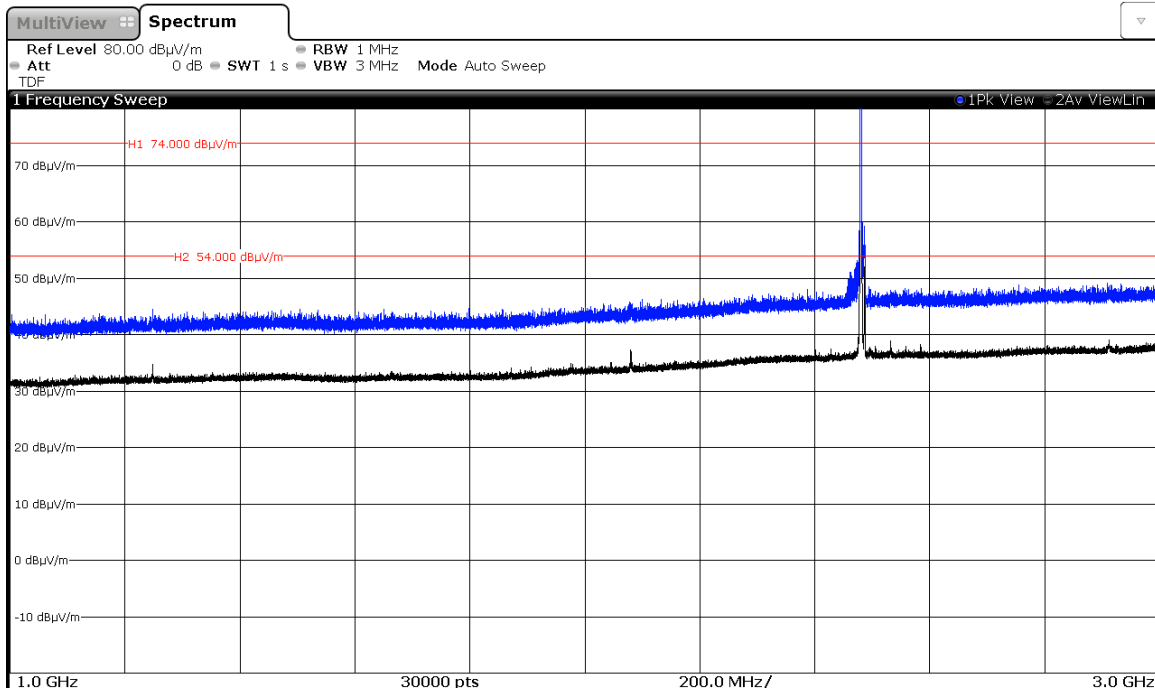


Note: The peak shown in the plot above the limit is the carrier frequency.

FREQUENCY RANGE 3 GHz to 18 GHz.


CHANNEL: Lowest (2402 MHz).

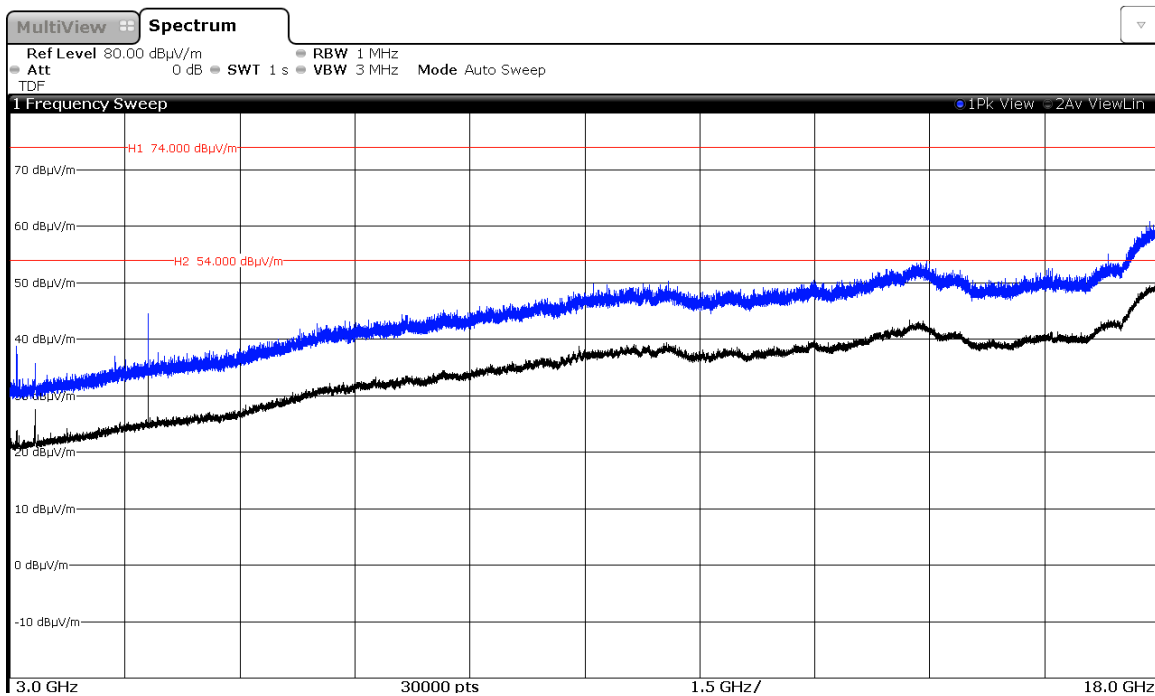


CHANNEL: Middle (2440 MHz).

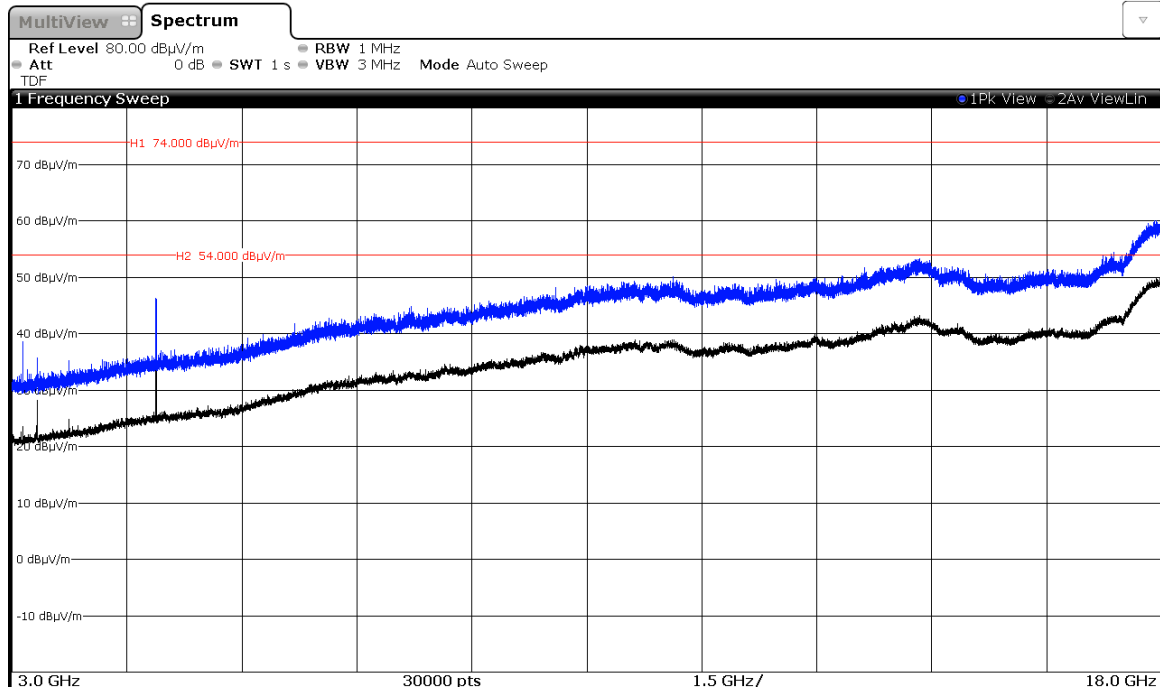

CHANNEL: Highest (2480 MHz).

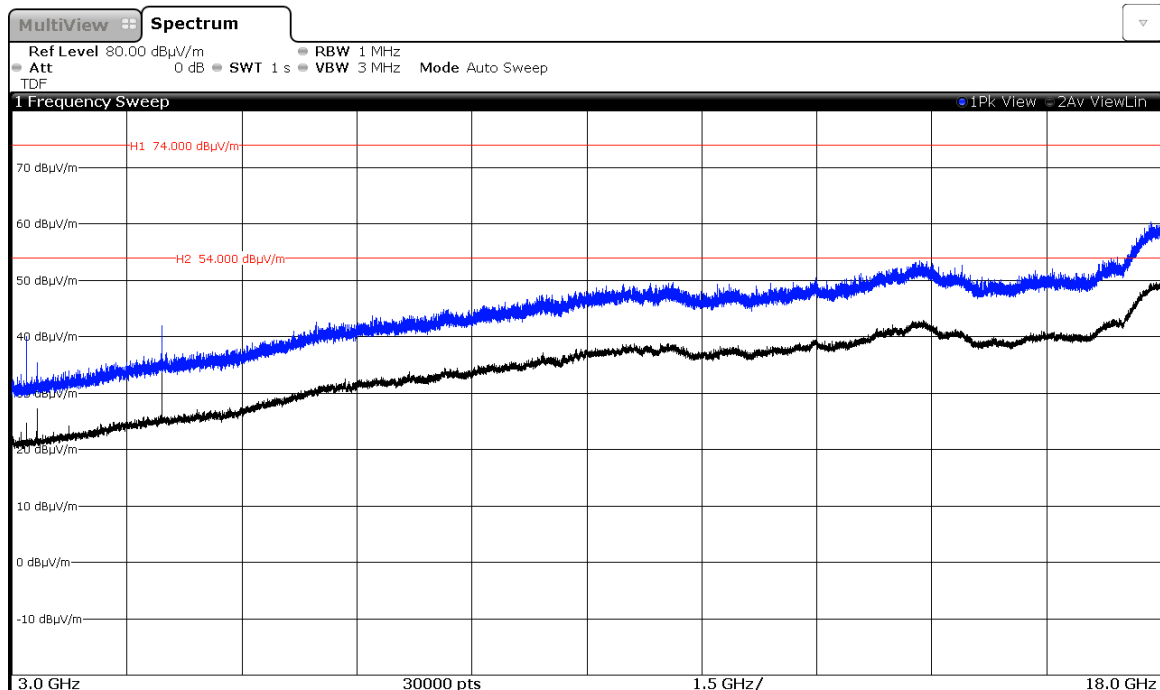


FREQUENCY RANGE 18 GHz to 26 GHz.

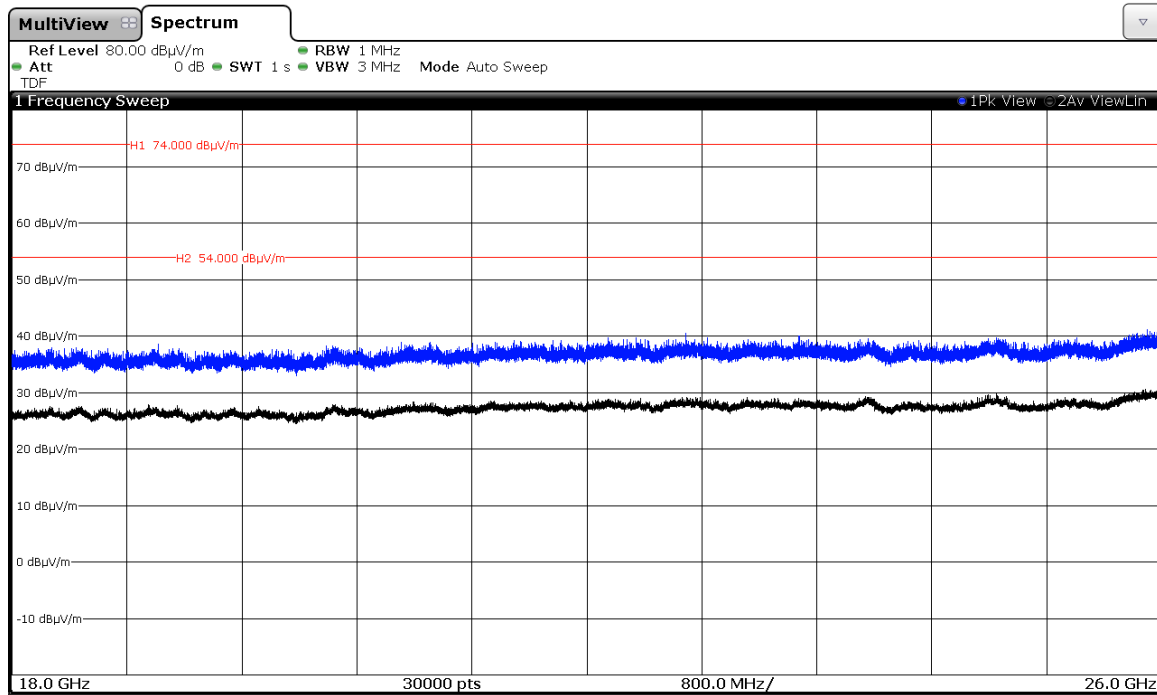


(This plot is valid for all three channels).

FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)


CHANNEL: Lowest (2402 MHz).

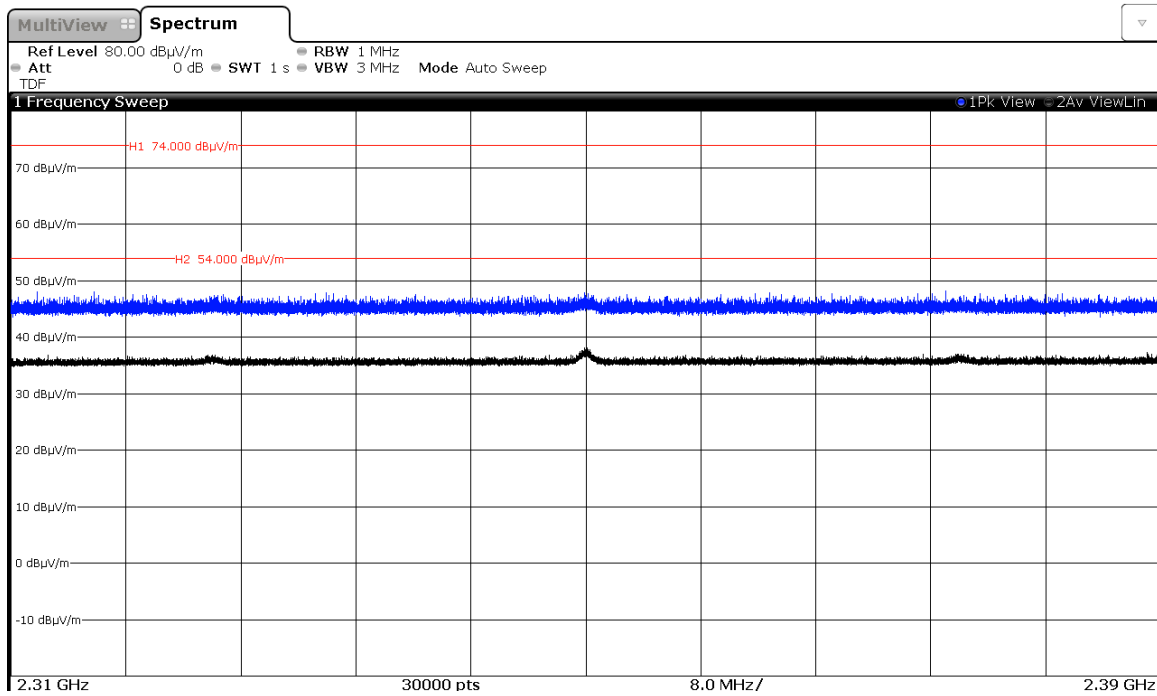

CHANNEL: Middle (2440 MHz).

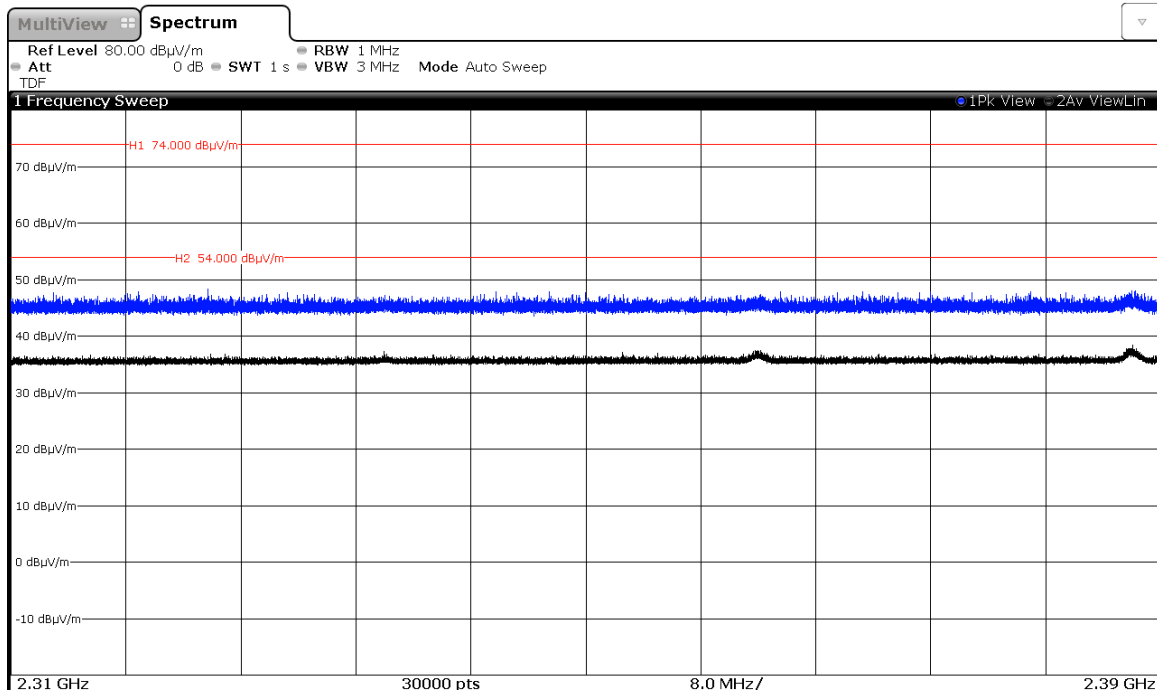


CHANNEL: Highest (2480 MHz).

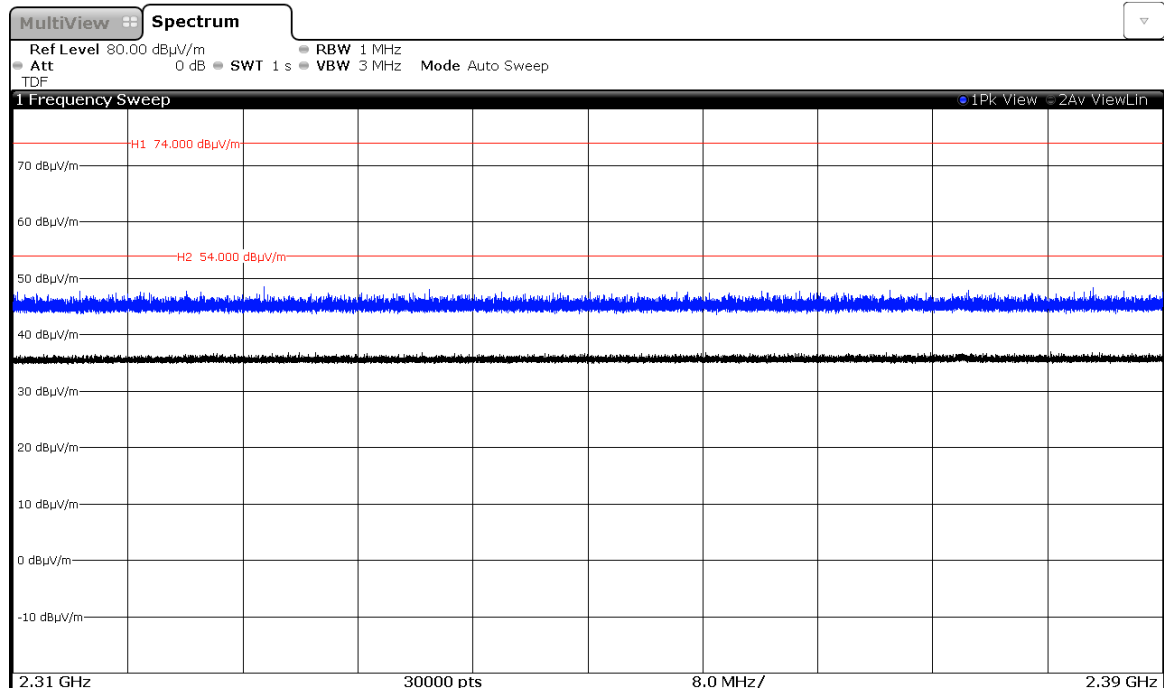


FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND).


CHANNEL: Lowest (2402 MHz).

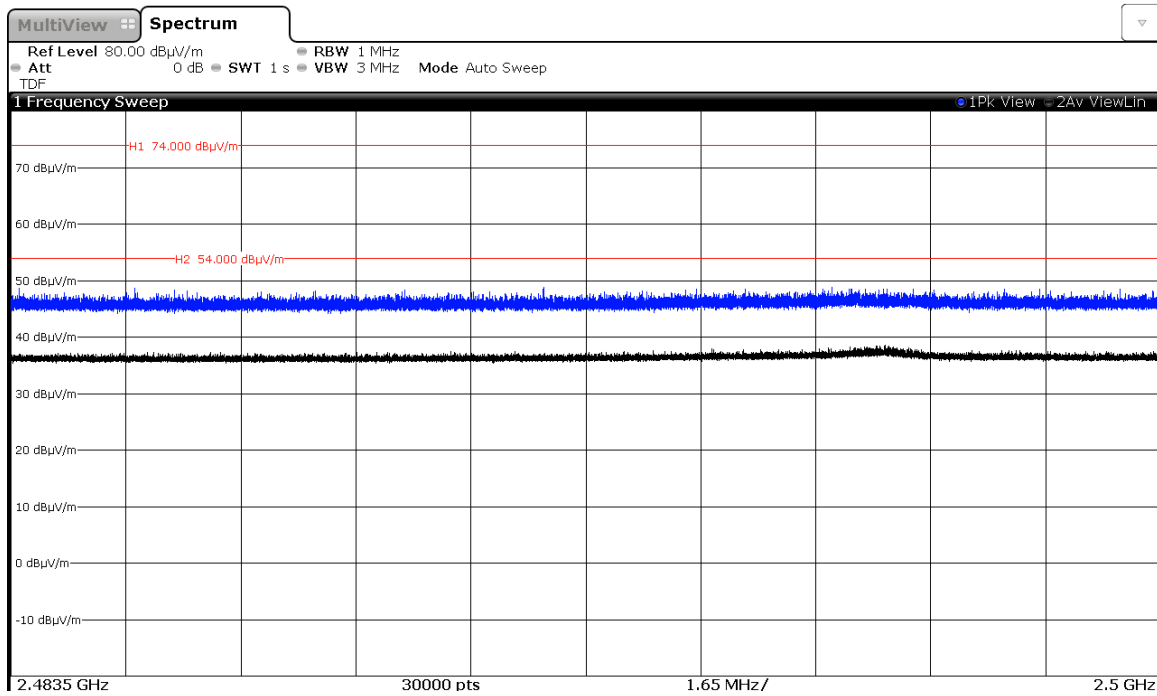

CHANNEL: Middle (2440 MHz).

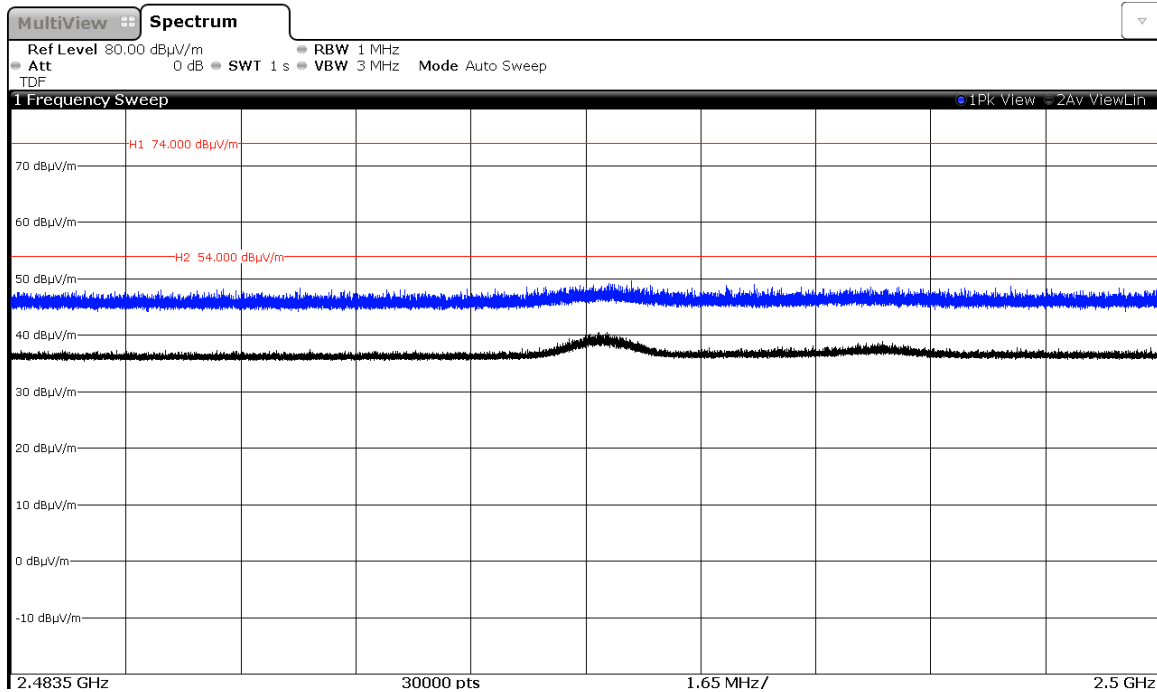

CHANNEL: Highest (2480 MHz).

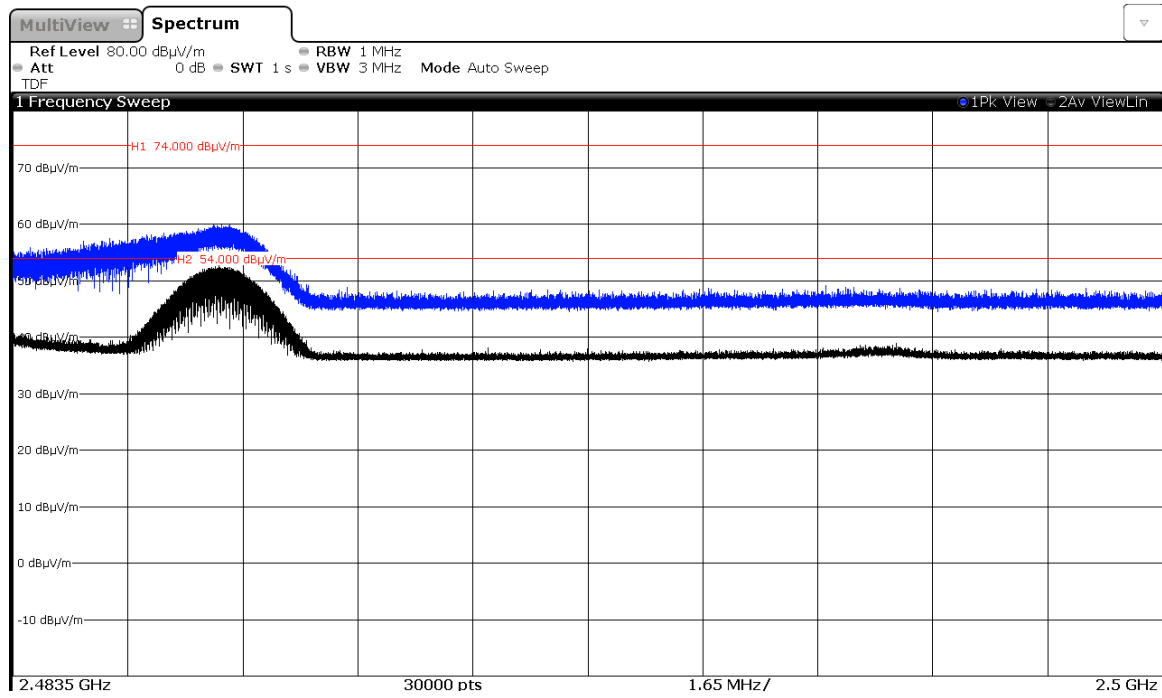

Appendix B – Test result (Bluetooth EDR)

INDEX

TEST CONDITIONS	27
FCC Section 15.247 Subclause (d) / RSS-247 Clause 5.5 Emission limitations radiated (Transmitter)	29

TEST CONDITIONS

Power supply (V):

$$V_{\text{nominal}} = 3.8 \text{ Vdc}$$

Type of power supply = DC voltage from external power supply

Type of antenna = External antenna

Declared Gain for antenna (maximum) = +2.3 dBi

TEST FREQUENCIES:

Lowest channel: 2402 MHz

Middle channel: 2441 MHz

Highest channel: 2480 MHz

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).


For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission.


It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup $f < 1$ GHz

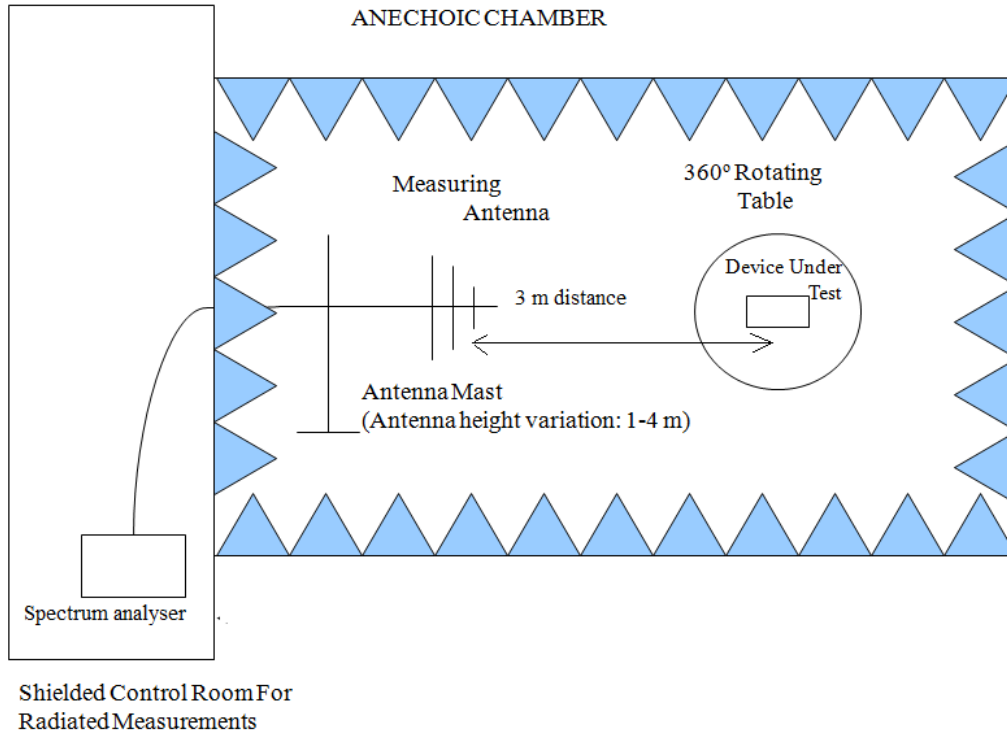

Radiated measurements setup $f > 1$ GHz

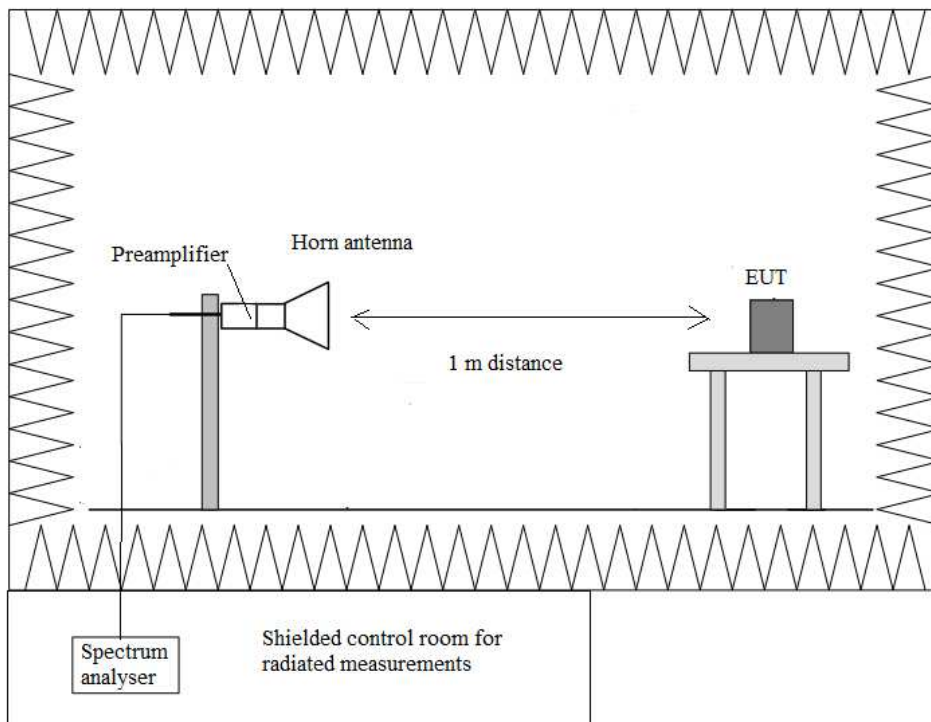

FCC Section 15.247 Subclause (d) / RSS-247 Clause 5.5 Emission limitations radiated (Transmitter)

SPECIFICATION

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious signals closest to the limit

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
416.06	V	QuasiPeak	30.12	± 3.88

Frequency range 1 GHz-25 GHz

The results in the next tables show the maximum measured levels in the 1-25 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).

Spurious signals with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

Modulation: GFSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.14410	H	Peak	45.36	± 4.87
2.34994	V	Peak	47.14	± 4.87
2.49605	H	Peak	49.13	± 4.87
2.50610	V	Peak	47.83	± 4.87
4.80425	V	Peak	44.92	± 4.87

2. CHANNEL: MIDDLE (2441 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.14390	H	Peak	45.23	± 4.87
1.21323	H	Peak	45.10	± 4.87
2.08010	V	Peak	46.22	± 4.87
2.37530	H	Peak	48.94	± 4.87
2.49605	H	Peak	49.71	± 4.87
4.88225	V	Peak	46.33	± 4.87

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.14403	H	Peak	44.55	± 4.87
1.21350	H	Peak	44.71	± 4.87
2.07987	V	Peak	45.47	± 4.87
2.48638	V	Peak	59.58	± 4.87
		Average	52.52	± 4.87
4.95975	V	Peak	41.81	± 4.87

Verdict: PASS

Modulation: $\Pi/4$ -DQPSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.04023	H	Peak	43.79	± 4.87
1.24783	H	Peak	46.09	± 4.87
2.07997	V	Peak	46.32	± 4.87
2.34976	V	Peak	48.37	± 4.87
2.49584	H	Peak	49.32	± 4.87
3.08825	V	Peak	42.56	± 4.87
4.80425	V	Peak	43.30	± 4.87

2. CHANNEL: MIDDLE (2441 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.14423	H	Peak	44.54	± 4.87
2.38921	V	Peak	48.59	± 4.87
2.49282	V	Peak	50.07	± 4.87
2.80300	V	Peak	45.99	± 4.87
3.13825	V	Peak	41.61	± 4.87
4.88175	V	Peak	43.92	± 4.87

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμV/m)	Measurement Uncertainty (dB)
1.04010	H	Peak	44.47	± 4.87
1.14403	H	Peak	44.87	± 4.87
2.08030	V	Peak	45.58	± 4.87
2.48356	V	Peak	59.25	± 4.87
		Average	41.29	± 4.87
2.48652	V	Peak	59.64	± 4.87
		Average	52.38	± 4.87
3.18875	V	Peak	42.49	± 4.87
4.96025	V	Peak	40.20	± 4.87

Verdict: PASS

Modulation: 8-DPSK

1. CHANNEL: LOWEST (2402 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμV/m)	Measurement Uncertainty (dB)
1.14377	H	Peak	44.20	± 4.87
2.38911	V	Peak	52.26	± 4.87
2.50597	V	Peak	47.79	± 4.87
3.08825	V	Peak	42.75	± 4.87
4.80425	V	Peak	43.87	± 4.87

2. CHANNEL: MIDDLE (2441 MHz).


Spurious frequency (GHz)	Polarization	Detector	Emission Level (dBμV/m)	Measurement Uncertainty (dB)
1.14357	H	Peak	44.02	± 4.87
1.21337	V	Peak	44.67	± 4.87
2.08010	V	Peak	45.06	± 4.87
2.49311	V	Peak	49.72	± 4.87
3.13825	V	Peak	42.02	± 4.87
4.88225	V	Peak	44.64	± 4.87

3. CHANNEL: HIGHEST (2480 MHz).

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.06490	H	Peak	44.13	± 4.87
1.14423	H	Peak	44.32	± 4.87
2.08017	V	Peak	45.71	± 4.87
2.48355	V	Peak	64.89	± 4.87
		Average	43.65	± 4.87
2.48645	V	Peak	59.48	± 4.87
		Average	52.49	± 4.87
3.18825	V	Peak	42.29	± 4.87
4.95975	V	Peak	41.52	± 4.87

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

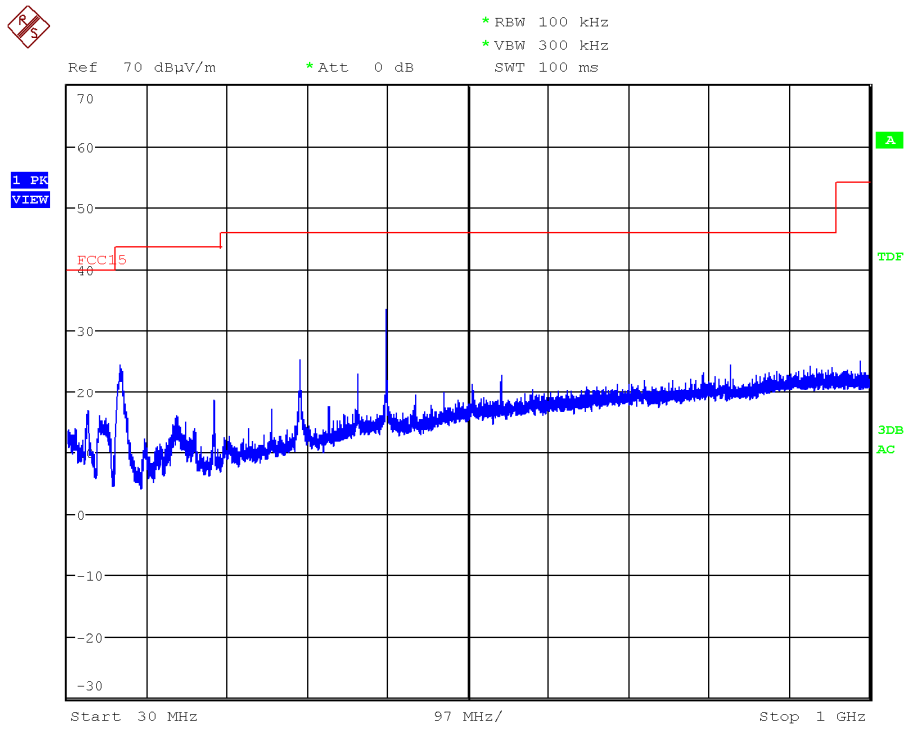


(This plot is valid for all three channels and all modulation modes).

FREQUENCY RANGE 1 GHz to 3 GHz.


Modulation: GFSK

CHANNEL: Lowest (2402 MHz).

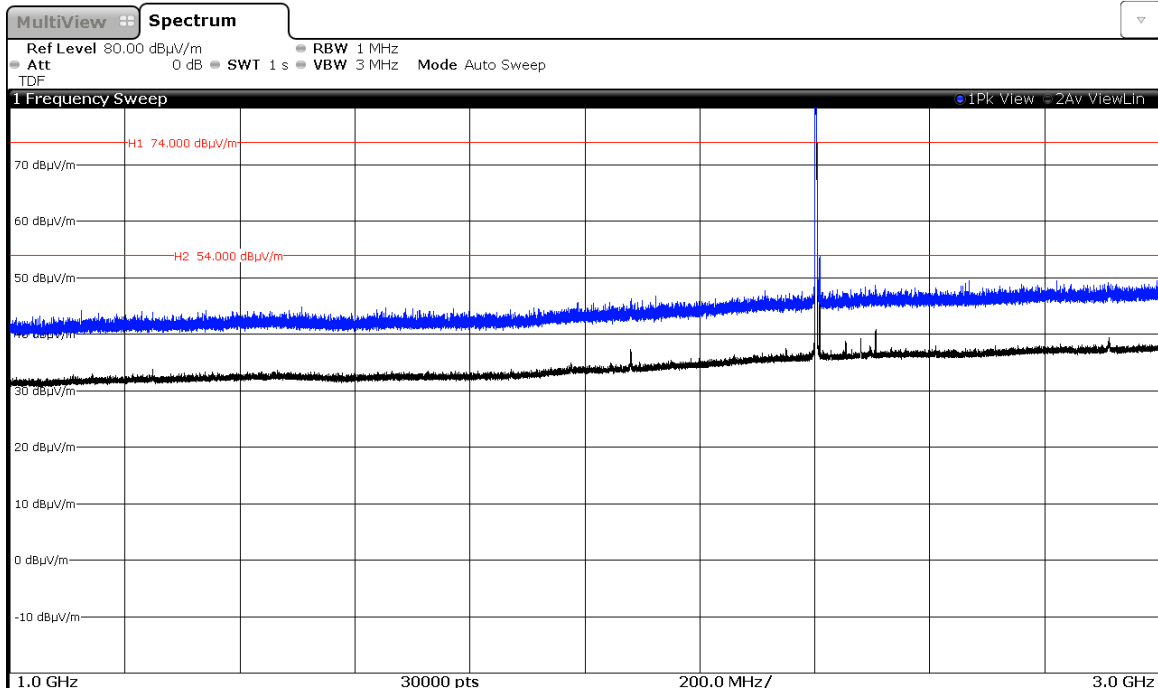


Note: The peak shown in the plot above the limits is the carrier frequency.

CHANNEL: Middle (2441 MHz).

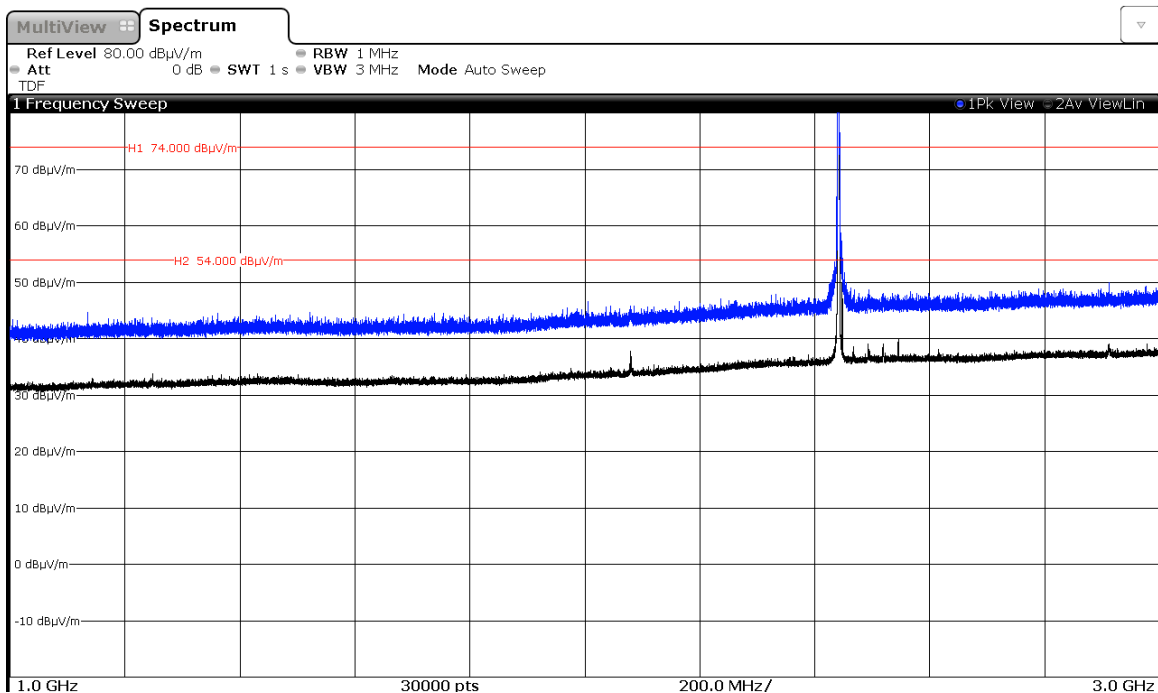

Note: The peak shown in the plot above the limits is the carrier frequency.


CHANNEL: Highest (2480 MHz).

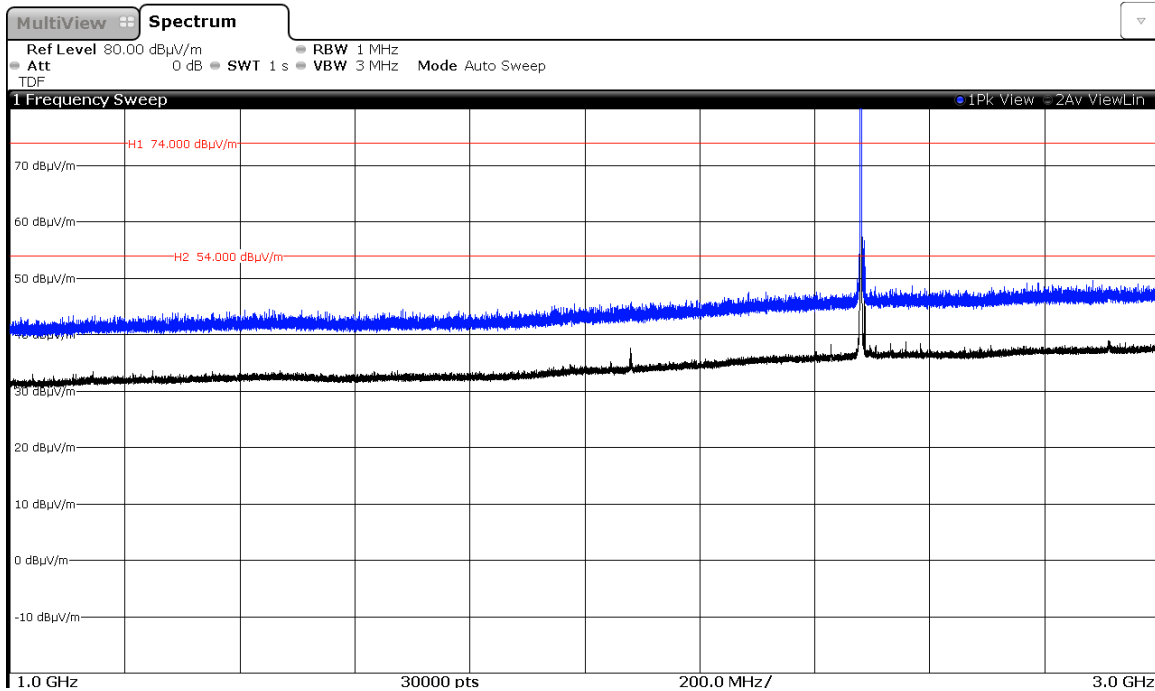

Note: The peak shown in the plot above the limits is the carrier frequency.


Modulation: $\pi/4$ -DQPSK

CHANNEL: Lowest (2402 MHz).

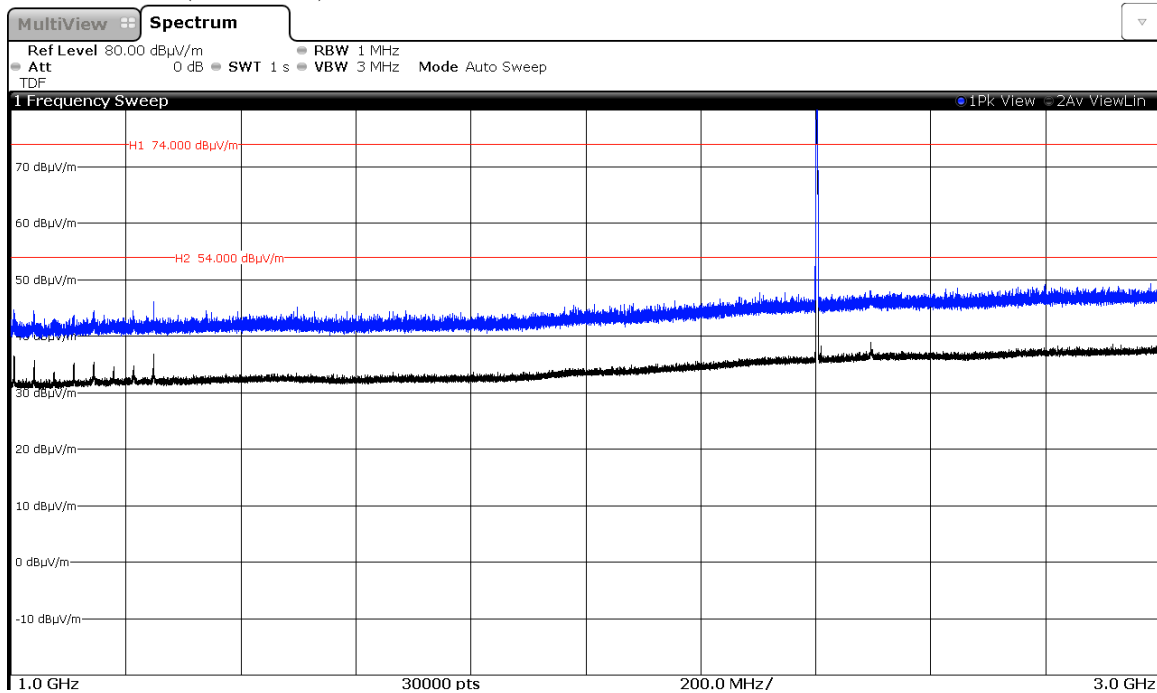


Note: The peak shown in the plot above the limits is the carrier frequency.

CHANNEL: Middle (2441 MHz).

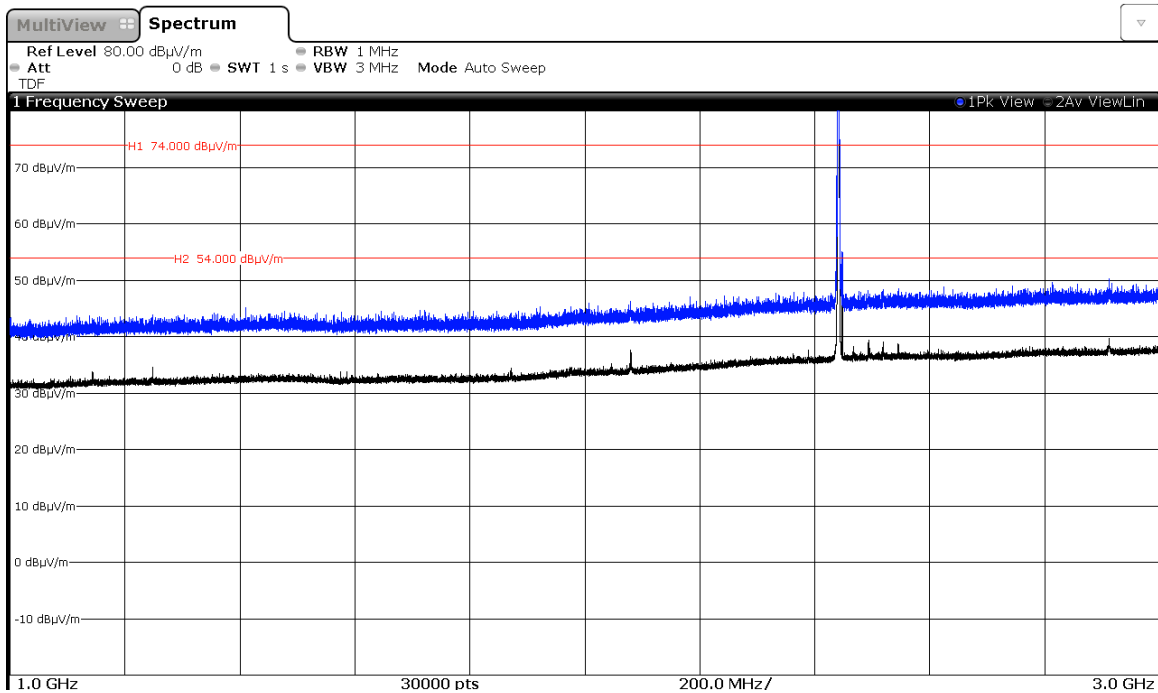

Note: The peak shown in the plot above the limits is the carrier frequency.


CHANNEL: Highest (2480 MHz).

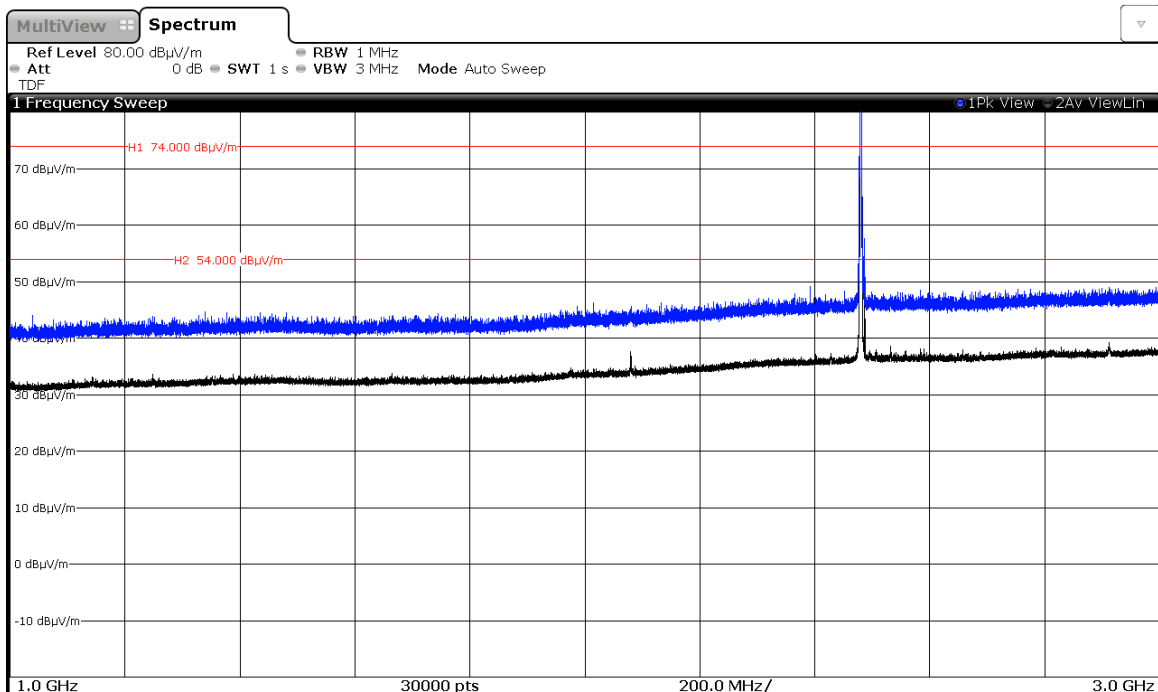

Note: The peak shown in the plot above the limits is the carrier frequency.


Modulation: 8-DPSK

CHANNEL: Lowest (2402 MHz).

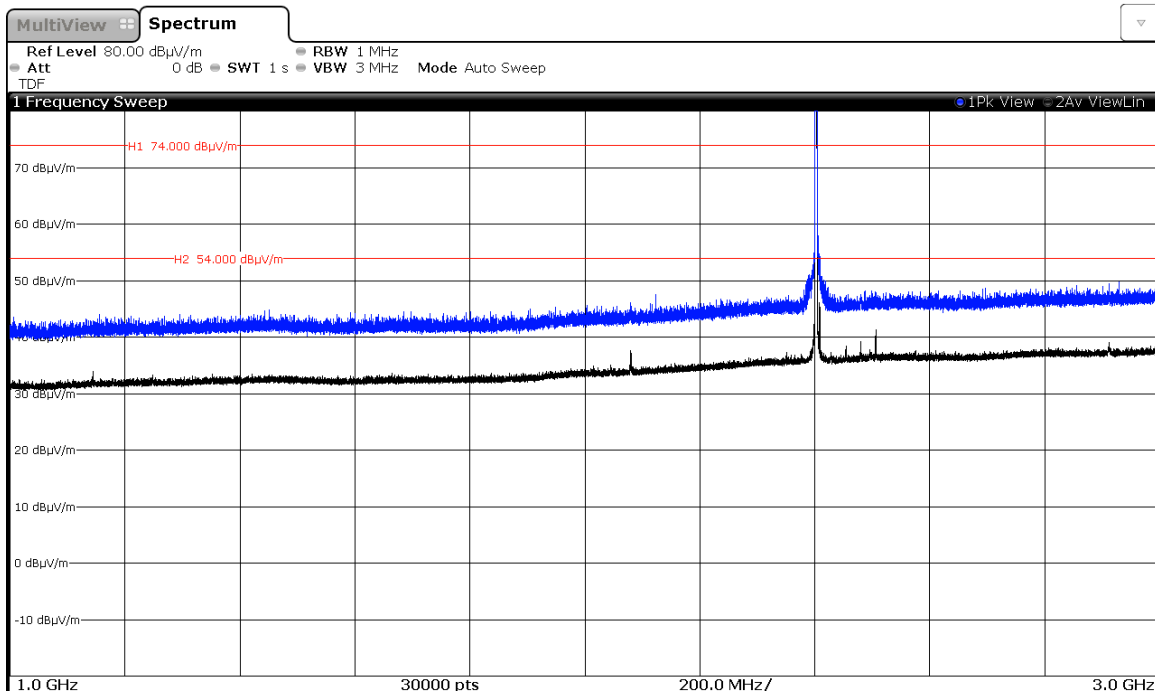


Note: The peak shown in the plot above the limits is the carrier frequency.

CHANNEL: Middle (2441 MHz).

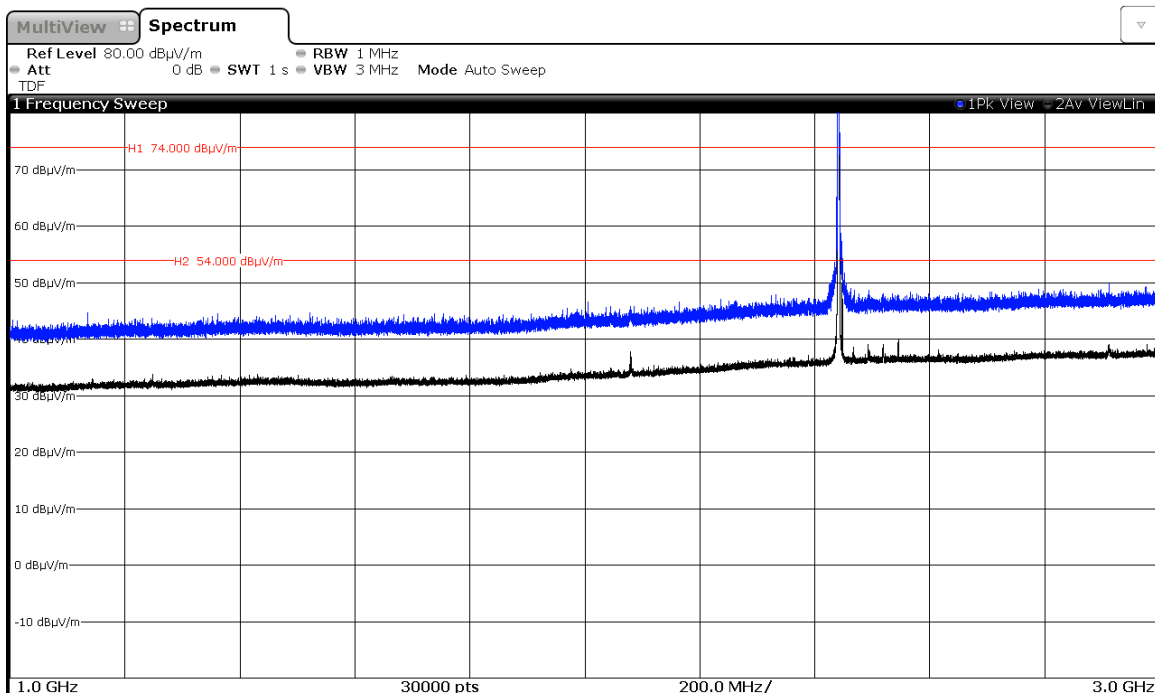

Note: The peak shown in the plot above the limits is the carrier frequency.

CHANNEL: Highest (2480 MHz).

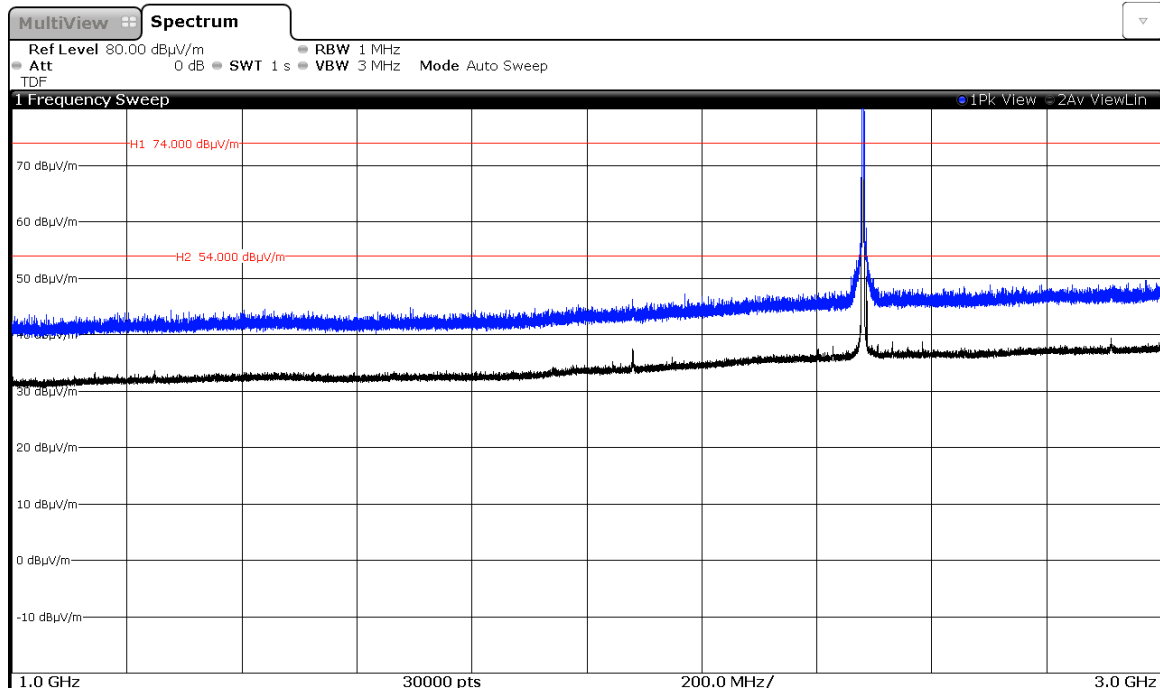


Note: The peak shown in the plot above the limits is the carrier frequency.


FREQUENCY RANGE 3 GHz to 18 GHz.

Modulation: GFSK


CHANNEL: Lowest (2402 MHz).

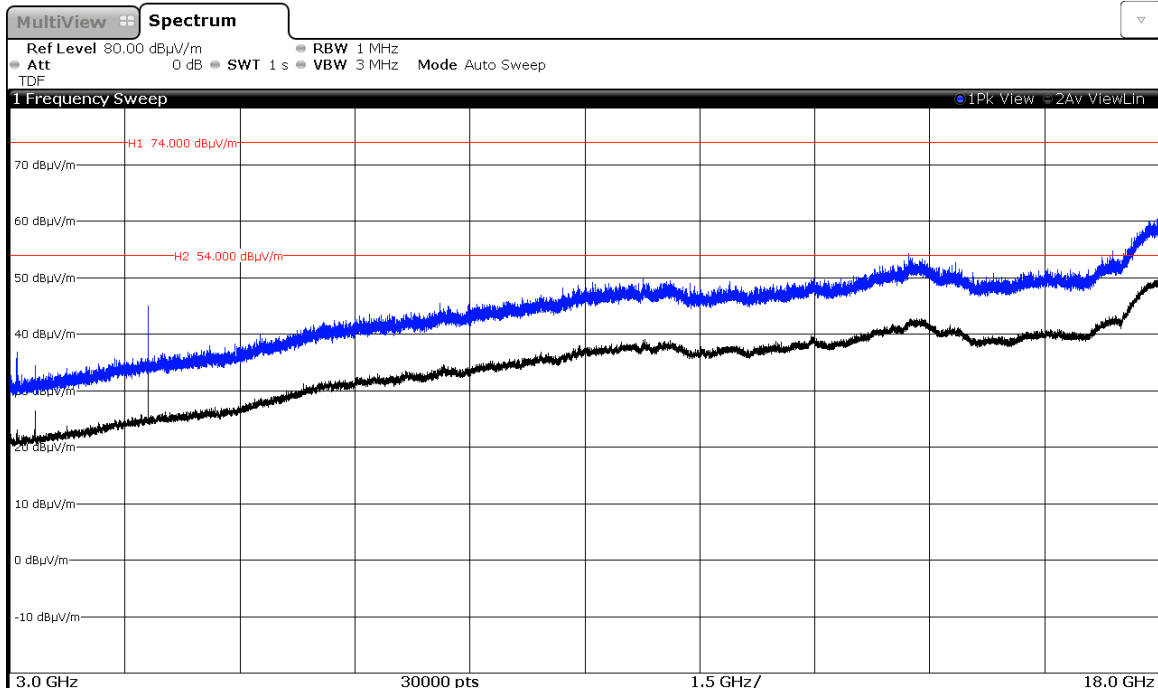

CHANNEL: Middle (2441 MHz).

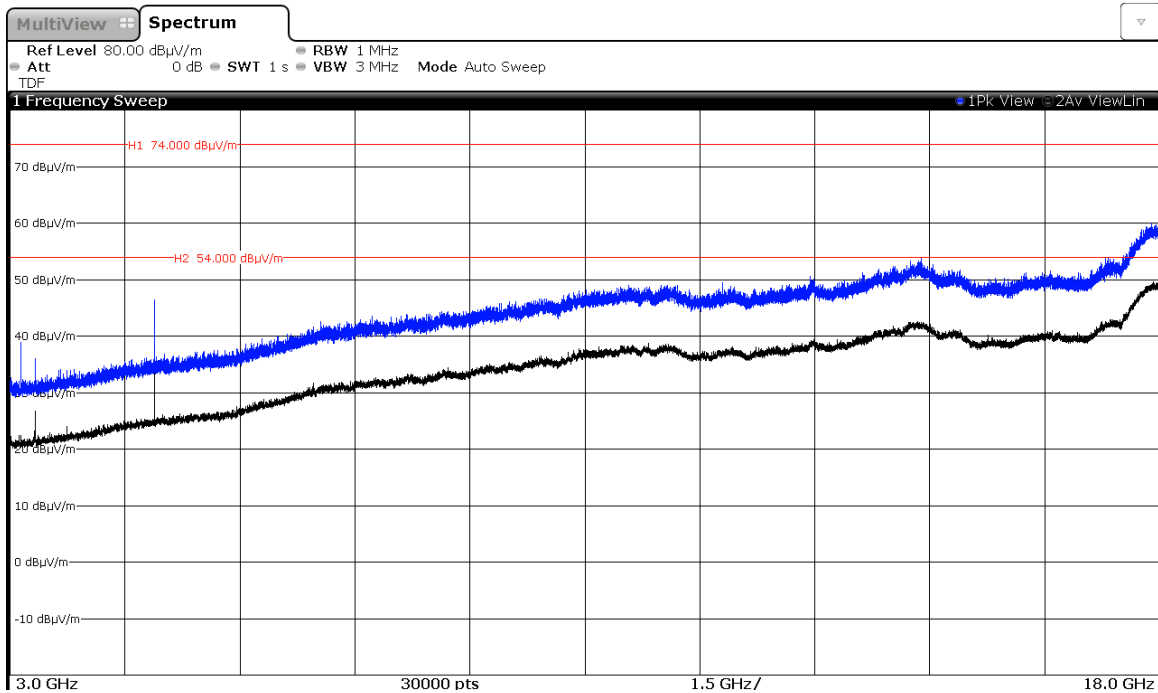


CHANNEL: Highest (2480 MHz).

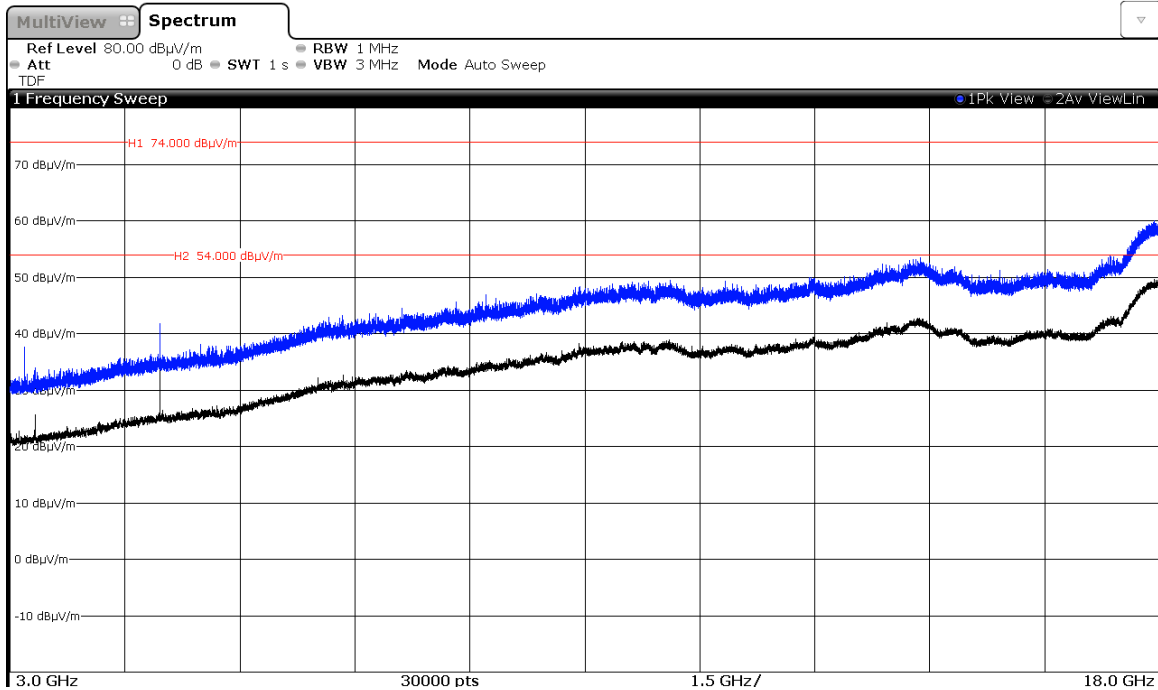


Modulation: $\Pi/4$ -DQPSK


CHANNEL: Lowest (2402 MHz).

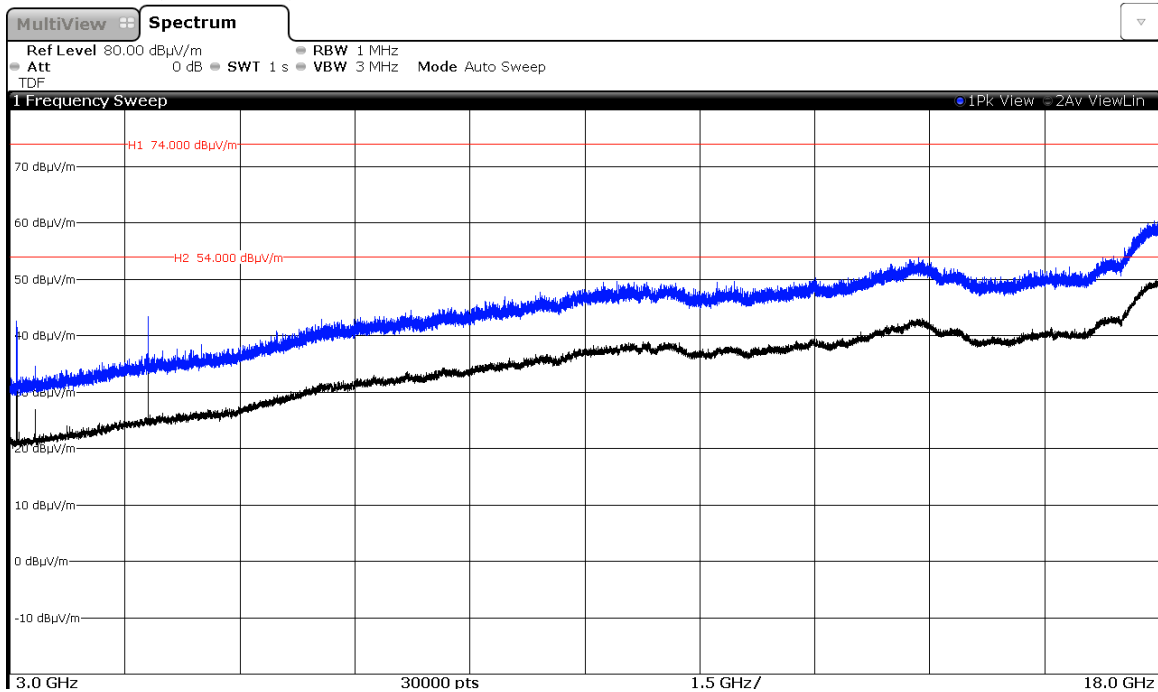

CHANNEL: Middle (2441 MHz).

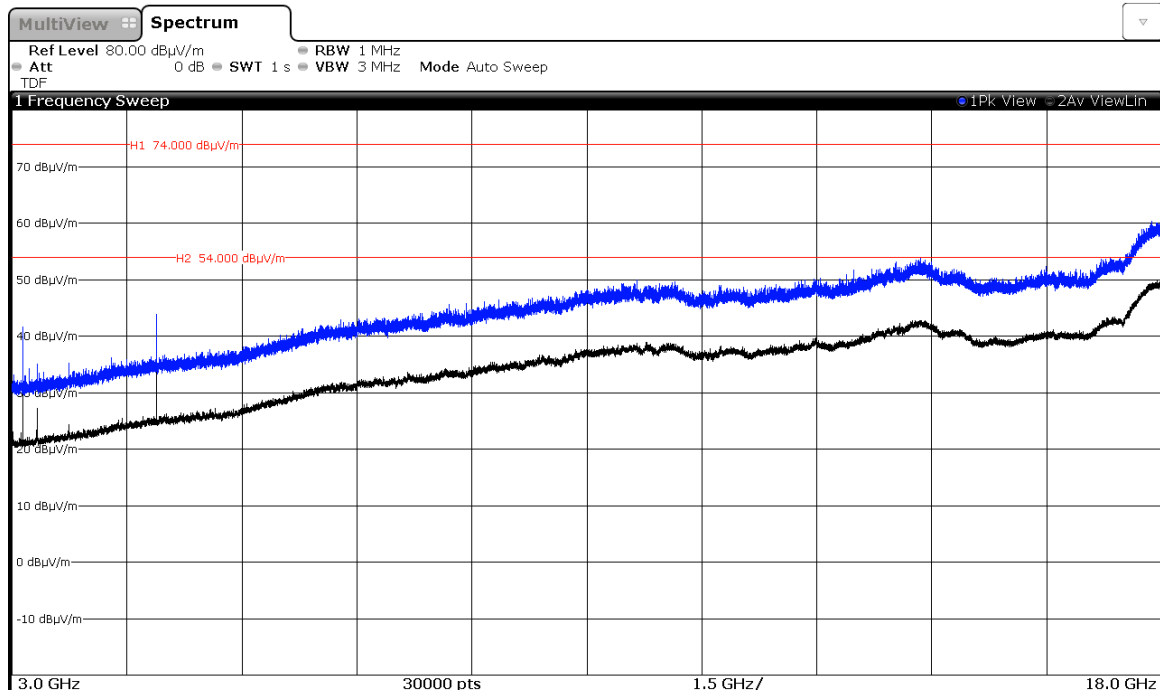


CHANNEL: Highest (2480 MHz).

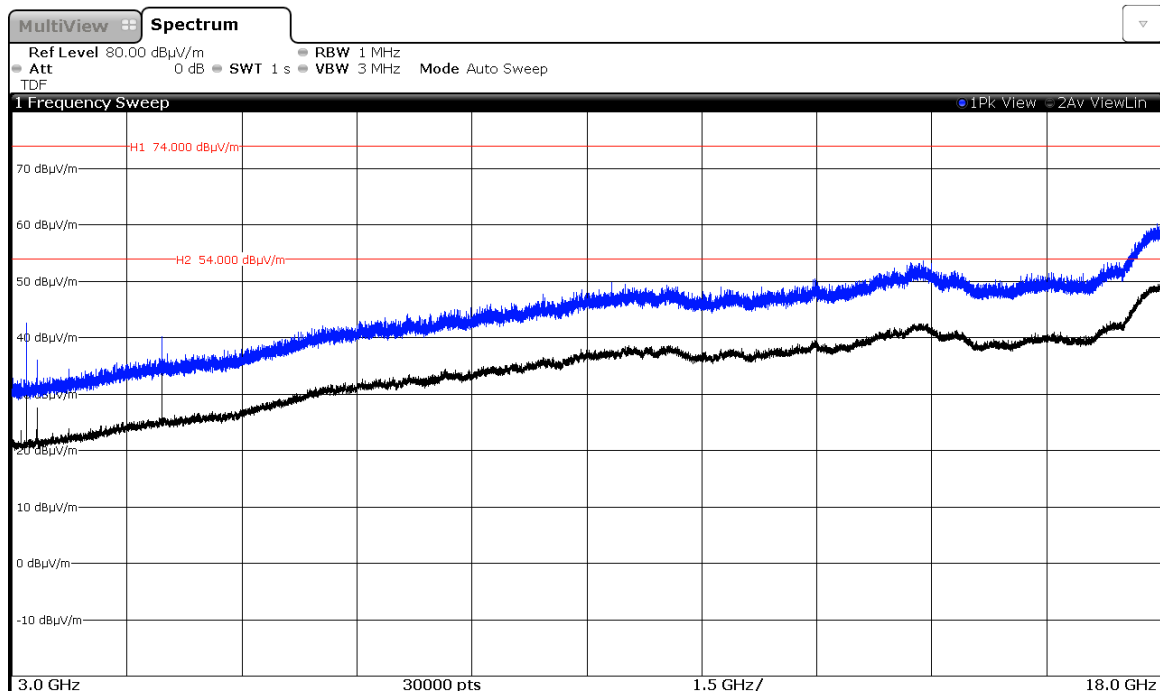


Modulation: 8-DPSK


CHANNEL: Lowest (2402 MHz).

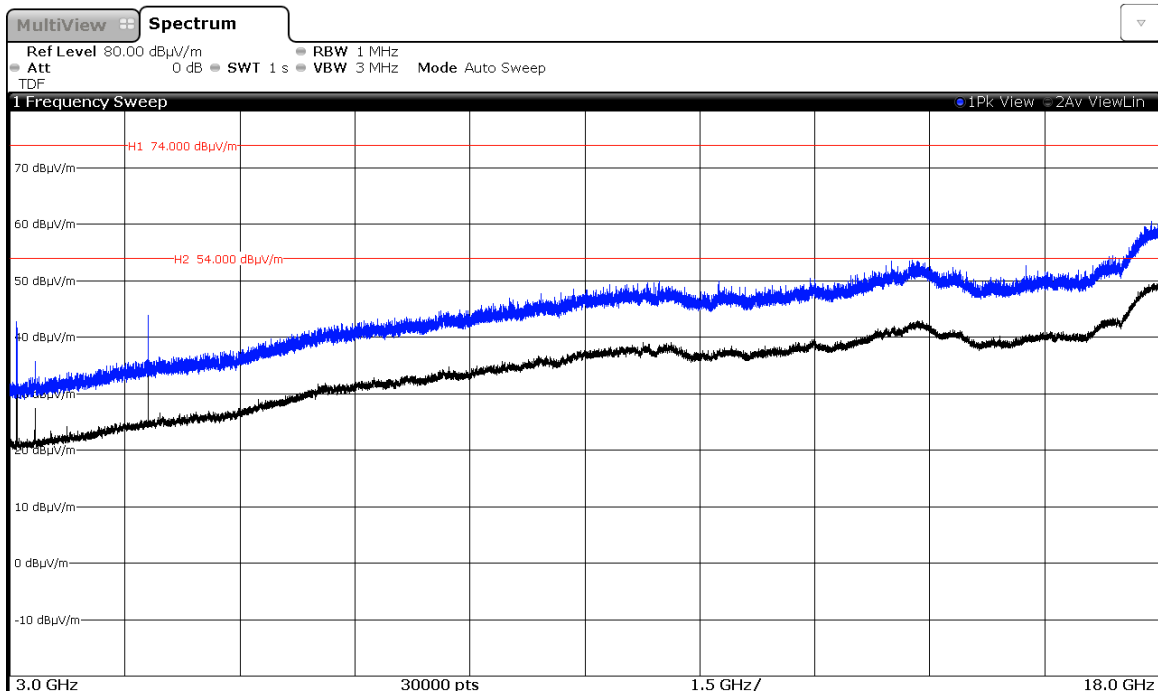


CHANNEL: Middle (2441 MHz).

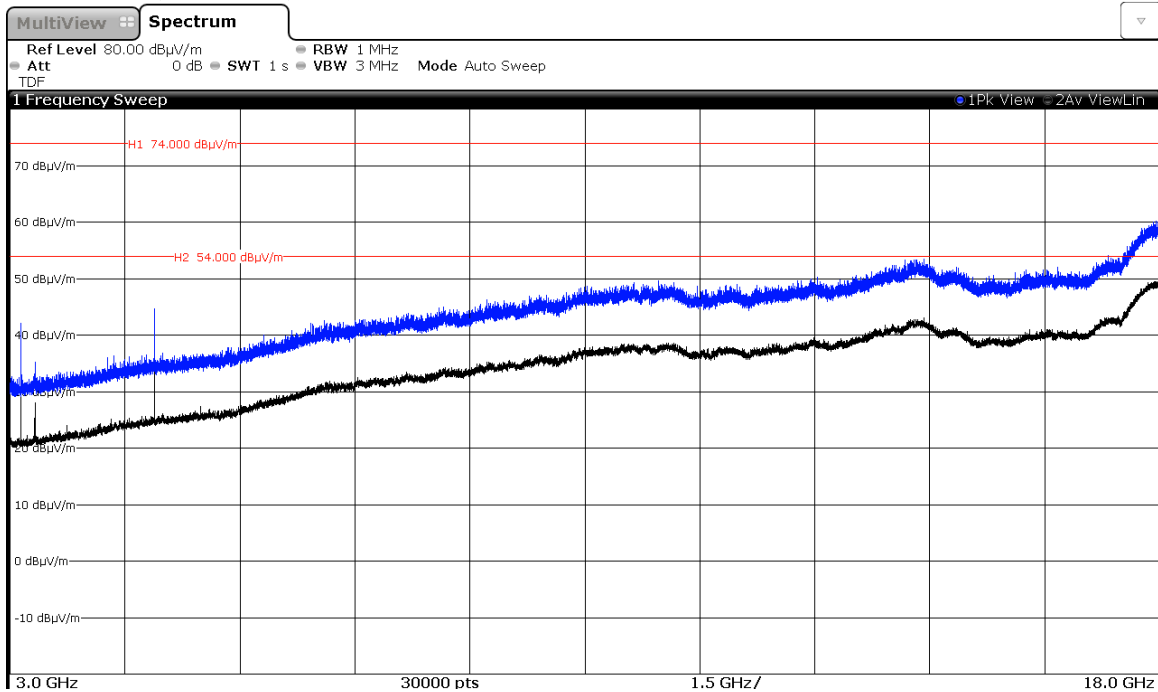

CHANNEL: Highest (2480 MHz).

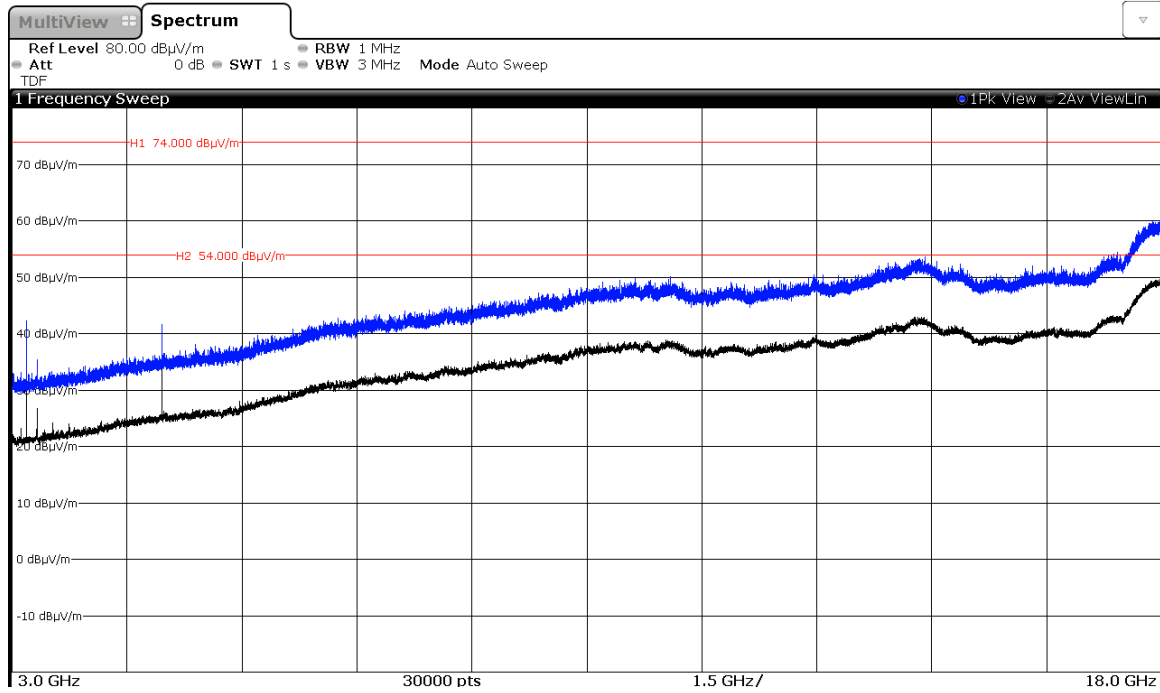

FREQUENCY RANGE 18 GHz to 26 GHz.

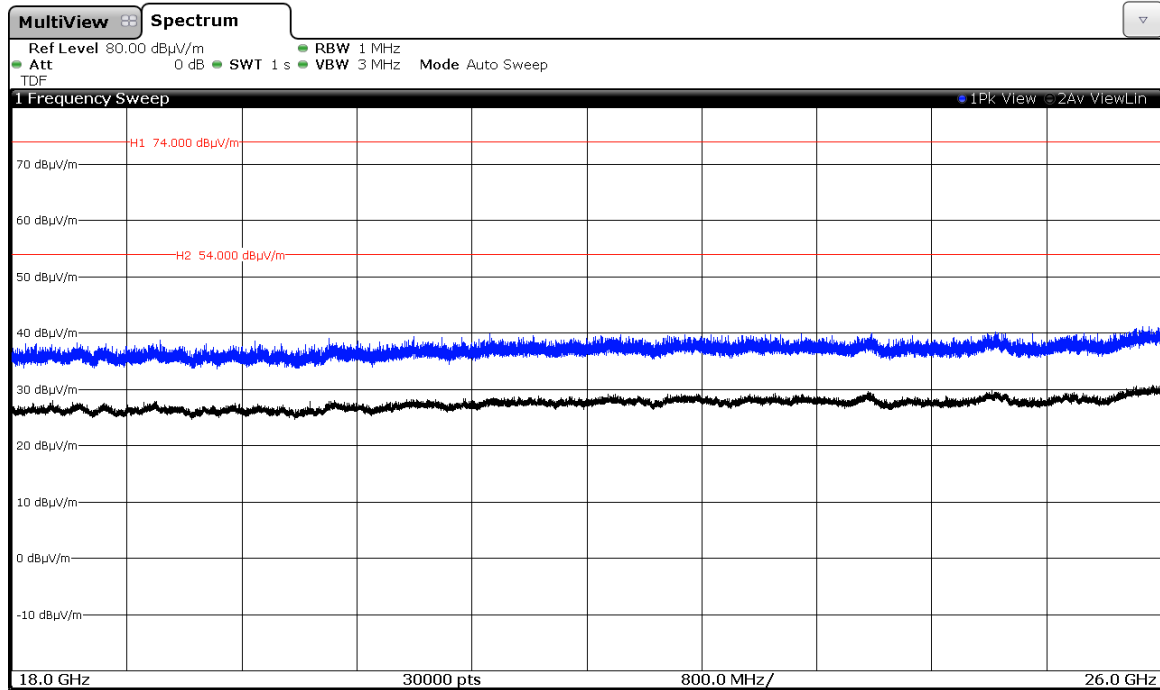


(This plot is valid for all three channels and all modulation modes).


FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)

CHANNEL: Lowest


Modulation: GFSK

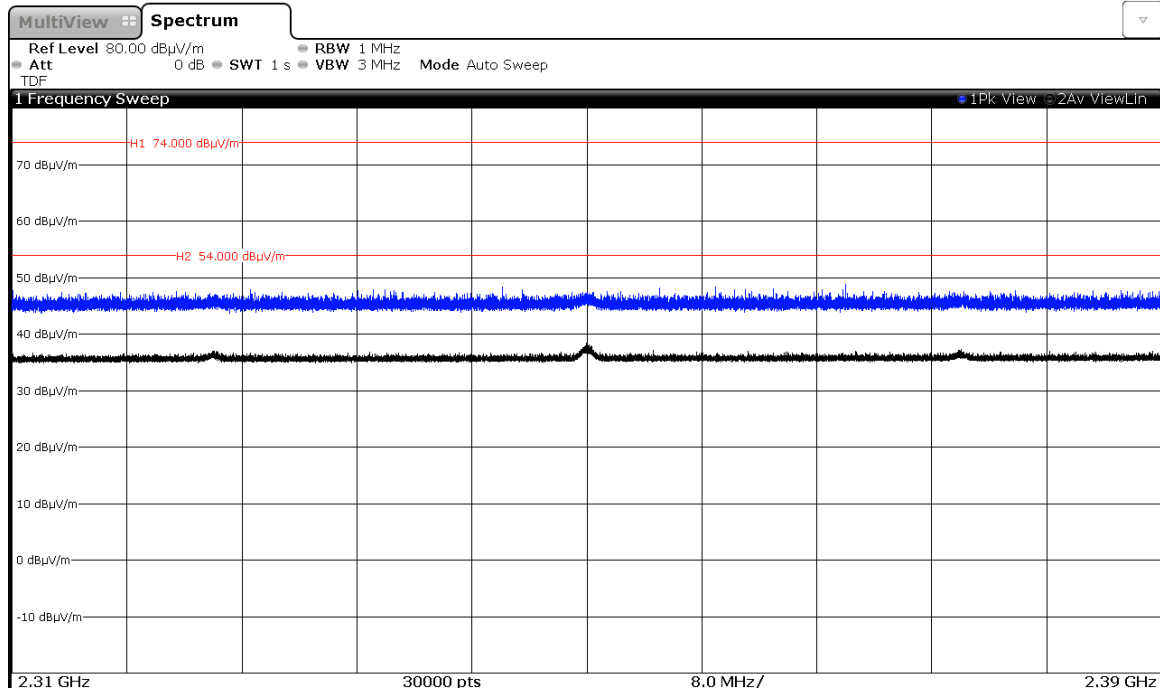

Modulation: Π/4-DQPSK

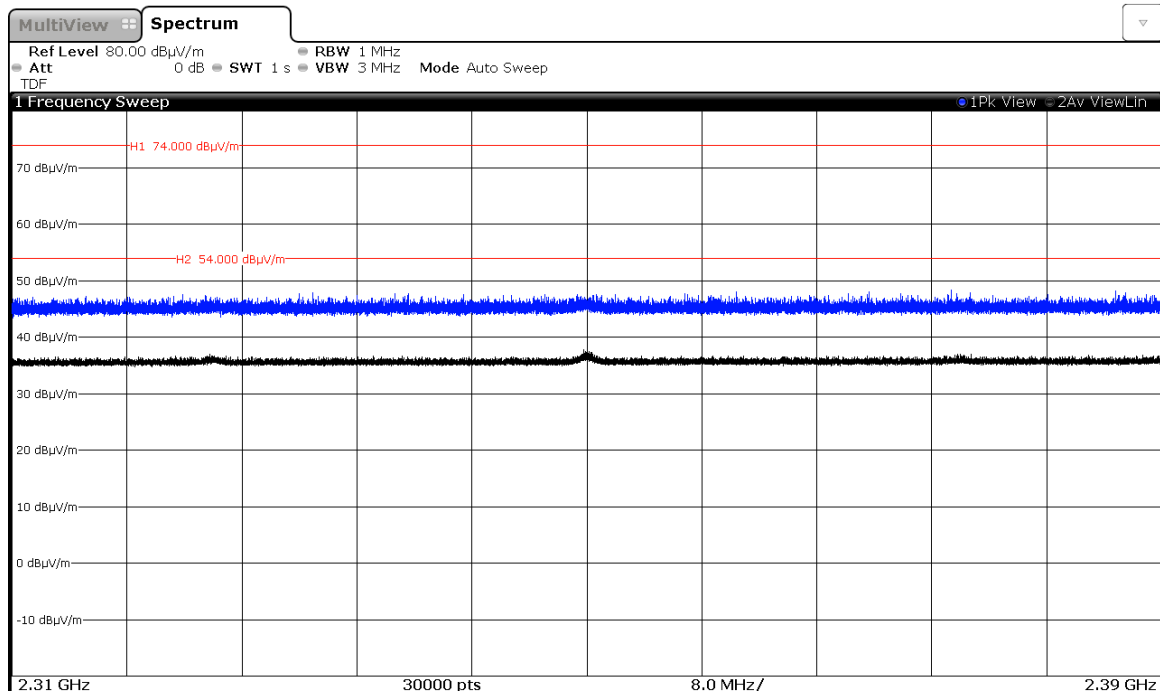


Modulation: 8-DPSK

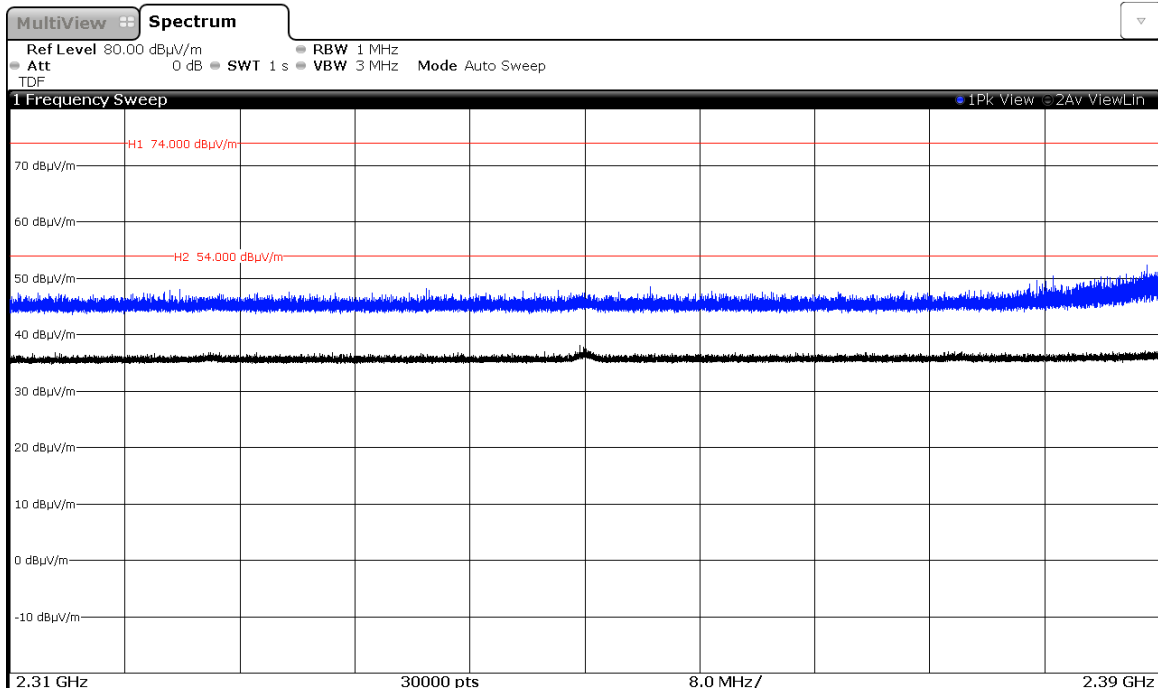


CHANNEL: Middle


Modulation: GFSK

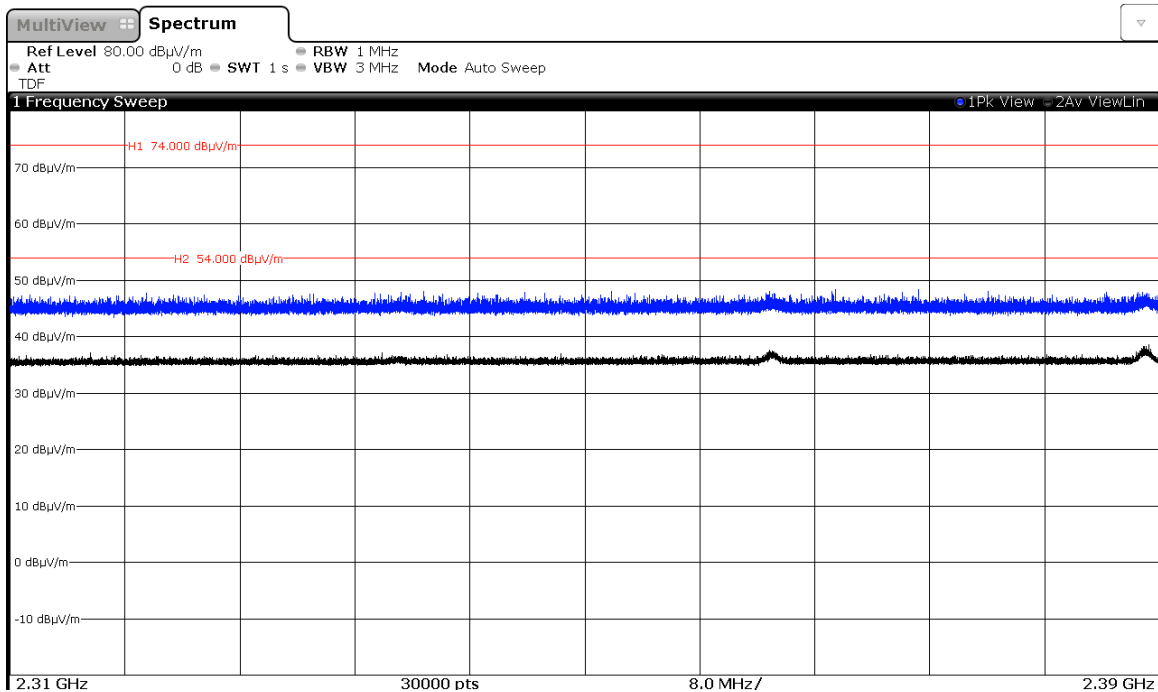

Modulation: $\Pi/4$ -DQPSK

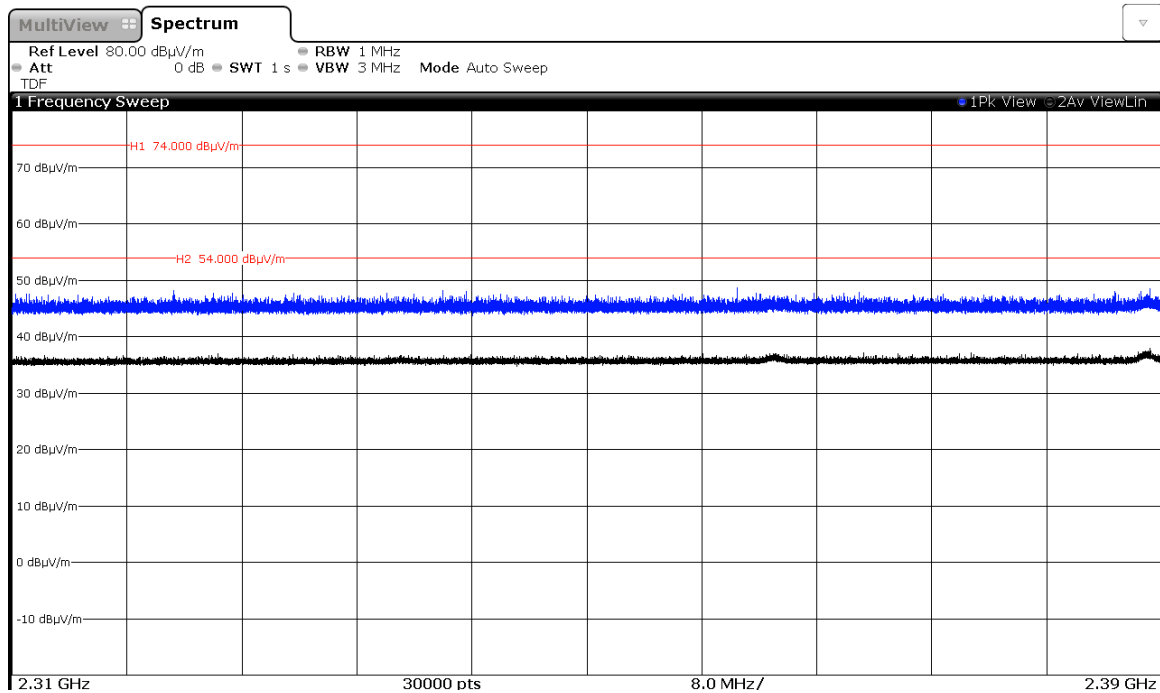


Modulation: 8-DPSK

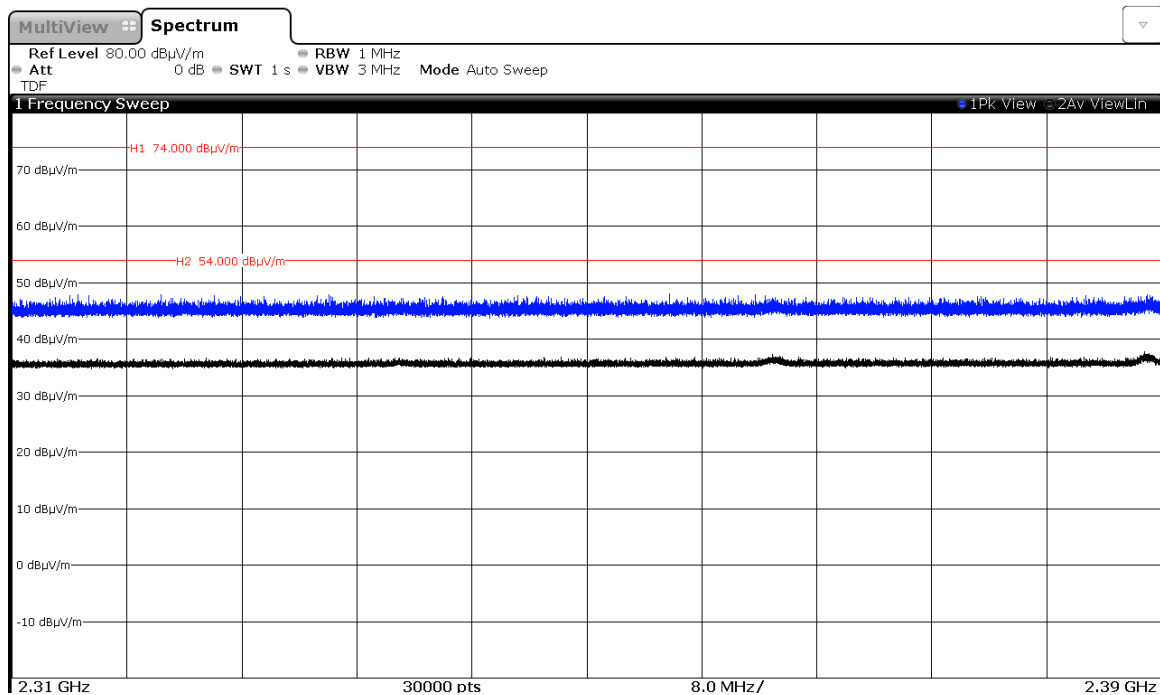


CHANNEL: Highest


Modulation: GFSK

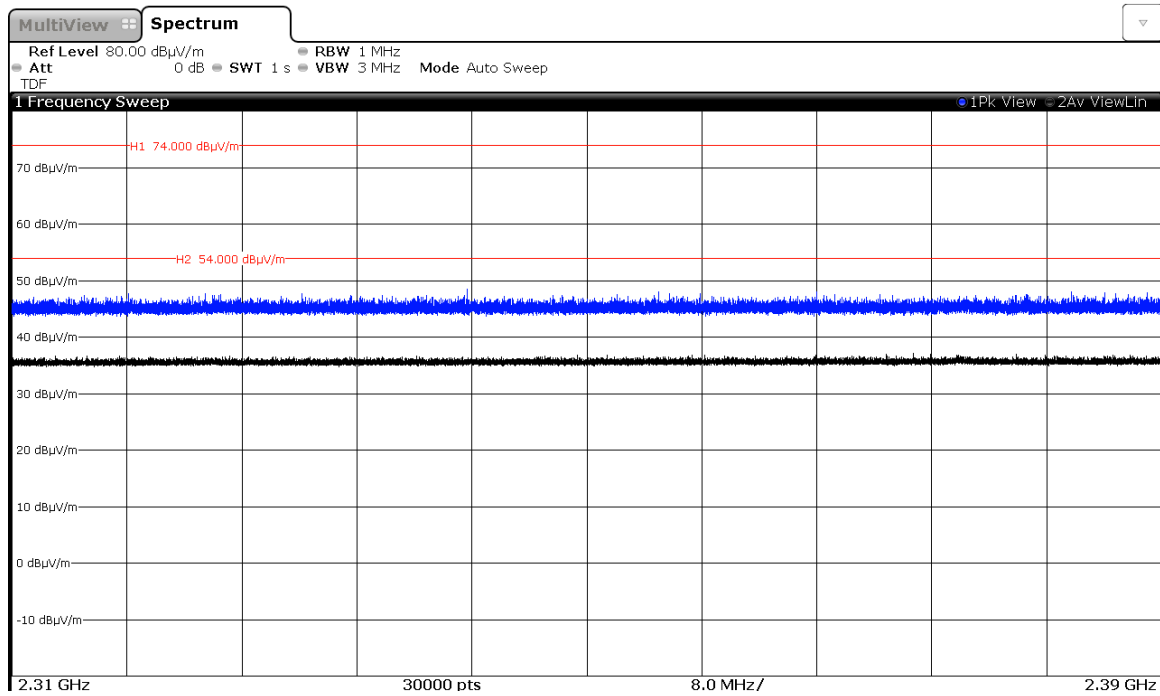

Modulation: Π/4-DQPSK

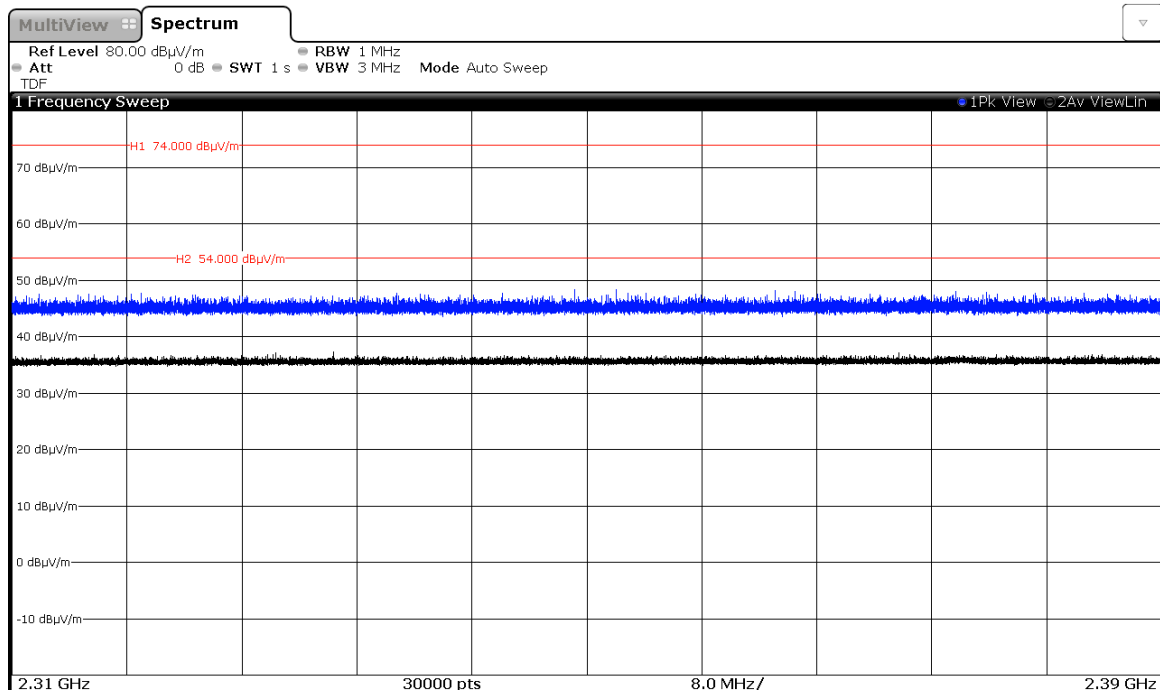


Modulation: 8-DPSK

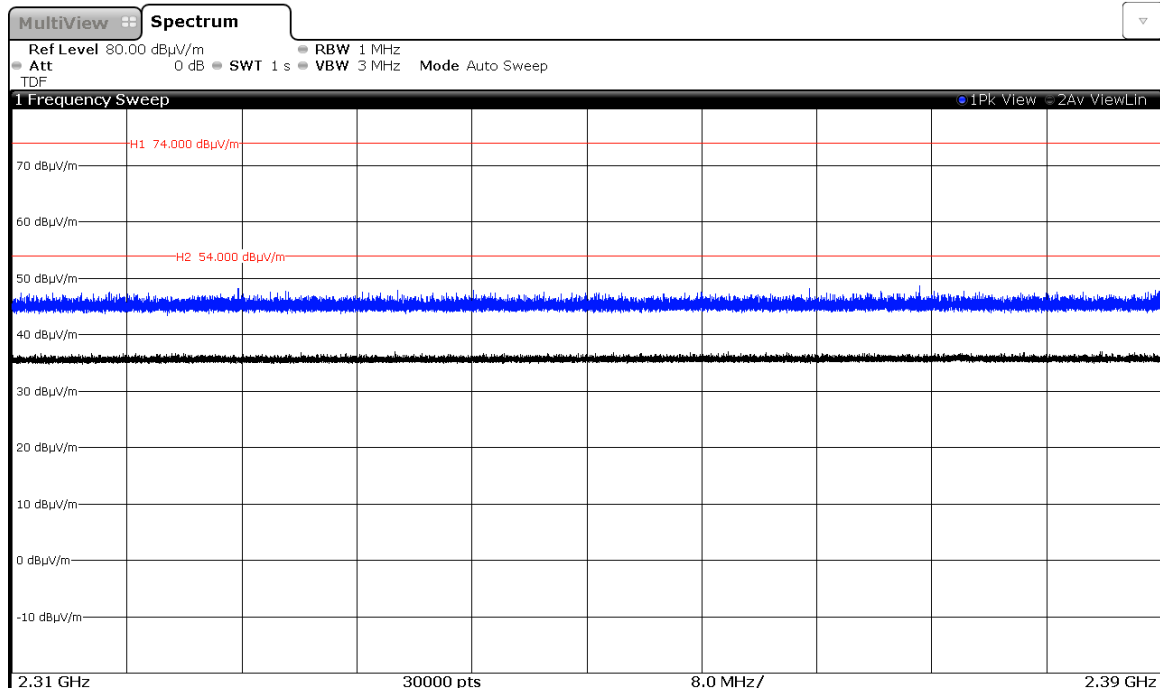


FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND)

CHANNEL: Lowest


Modulation: GFSK

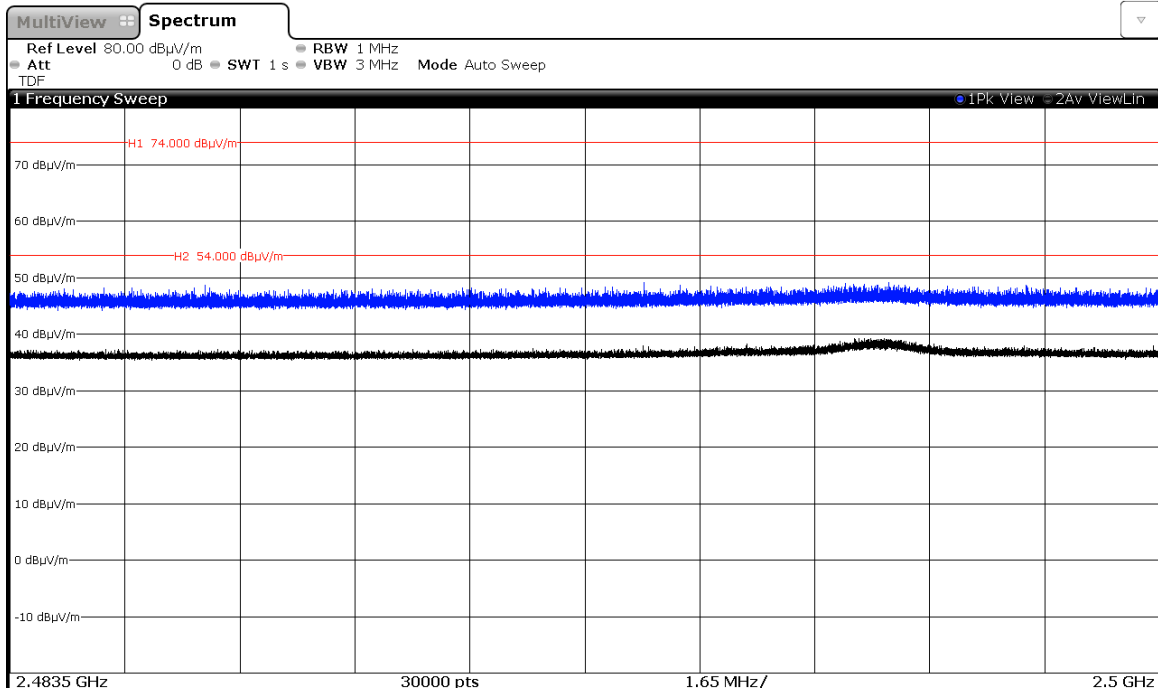

Modulation: Π/4-DQPSK

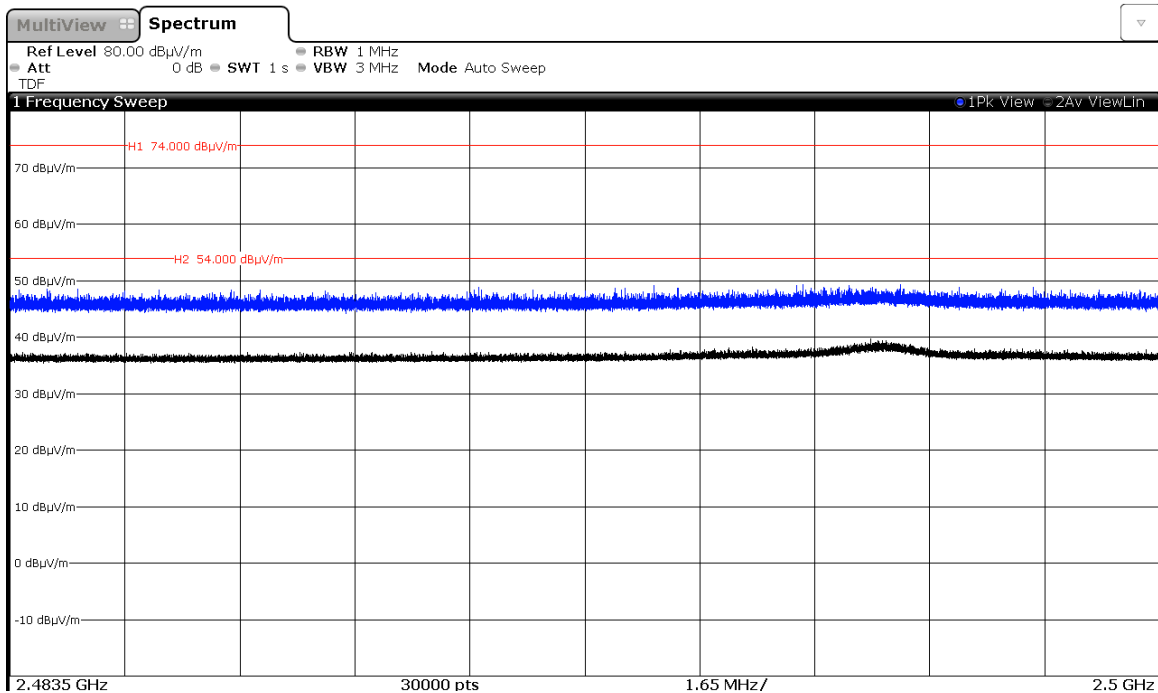


Modulation: 8-DPSK

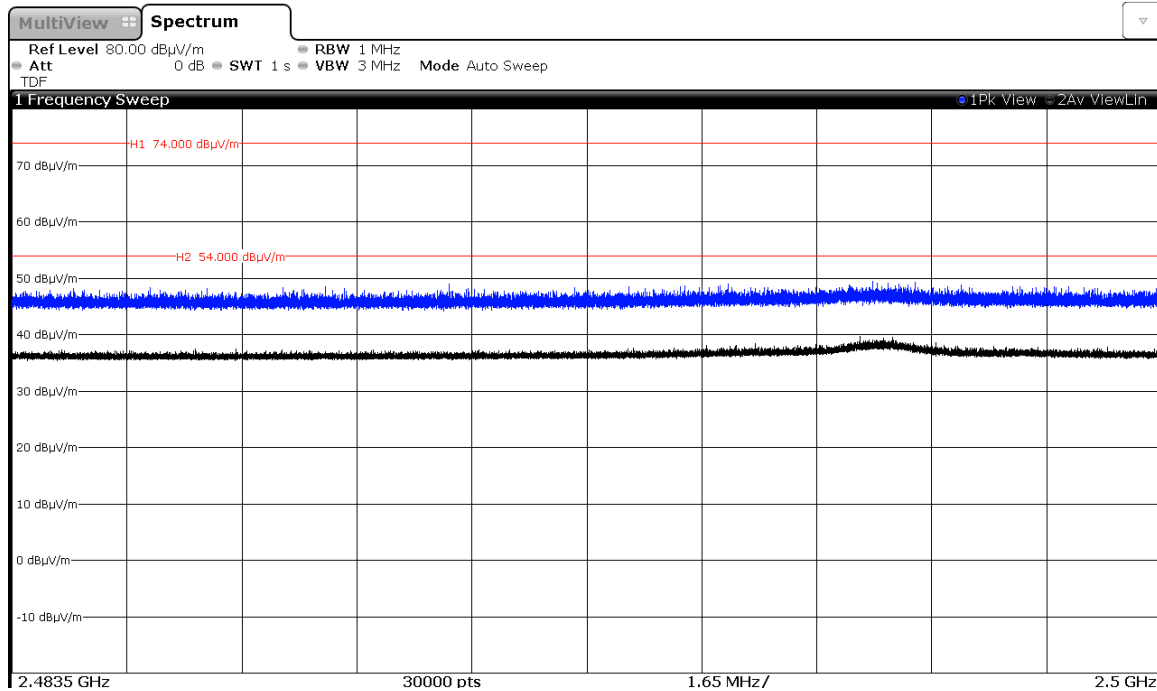


CHANNEL: Middle


Modulation: GFSK

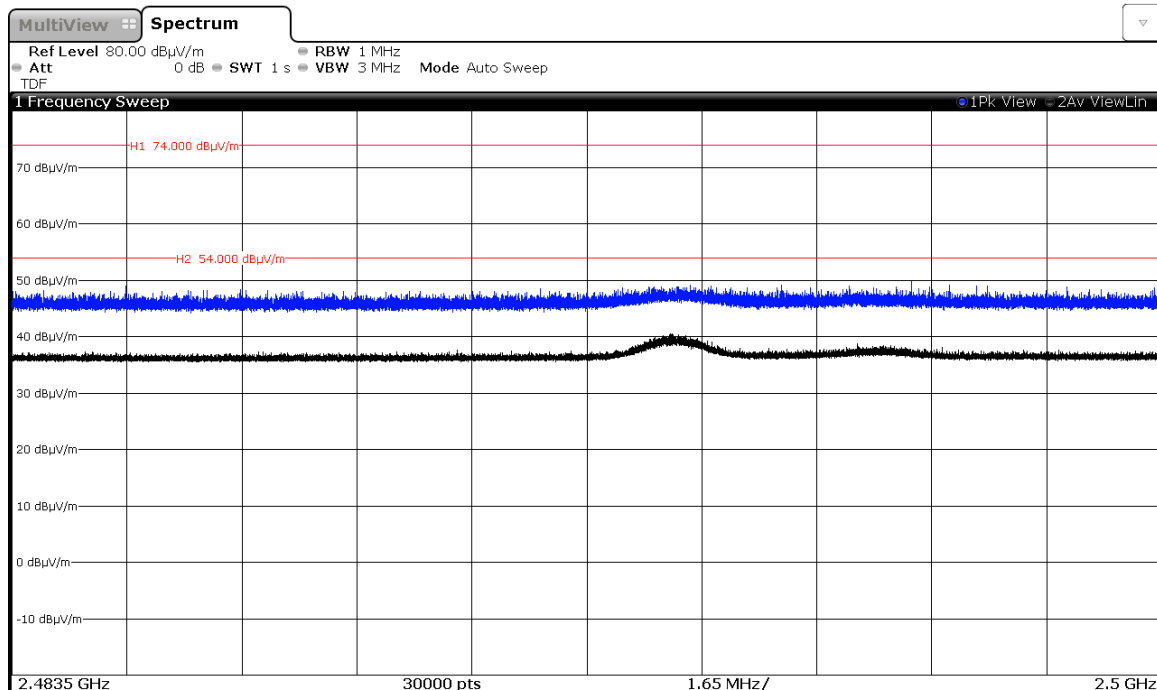

Modulation: $\Pi/4$ -DQPSK

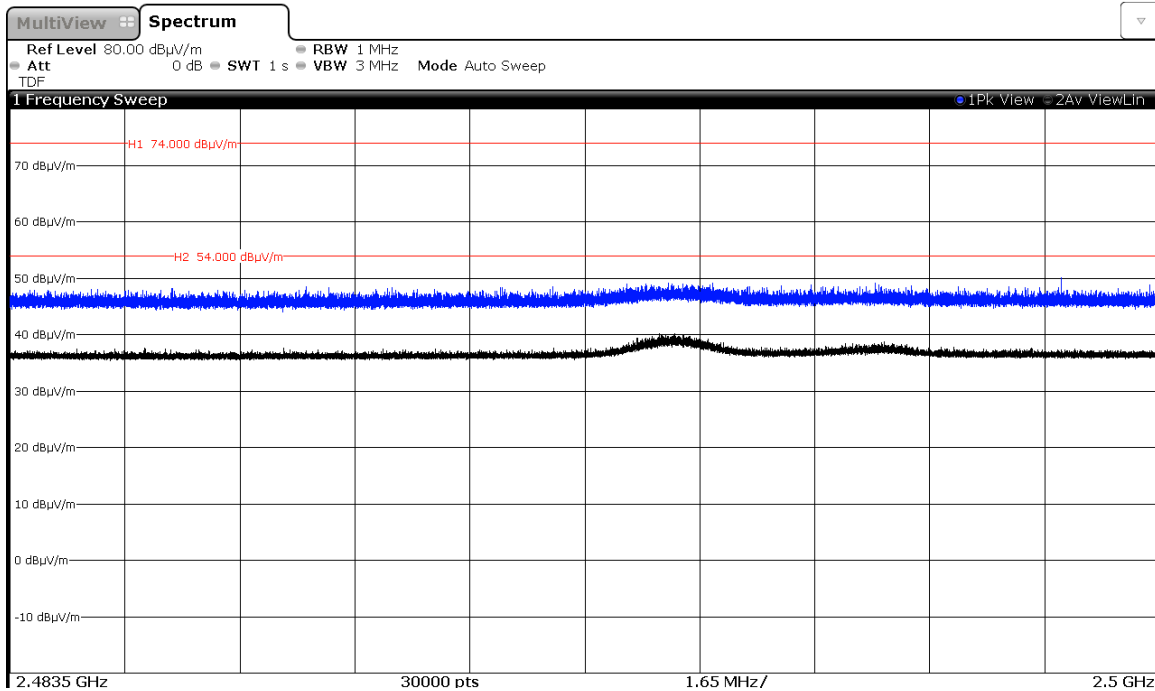


Modulation: 8-DPSK

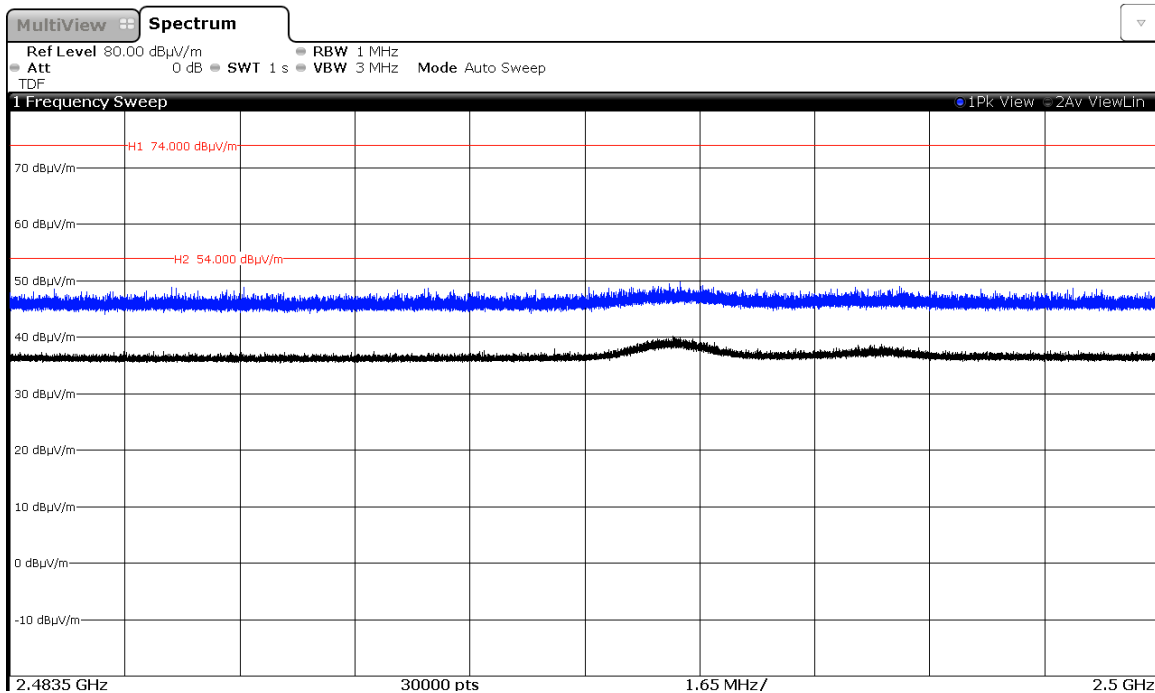


CHANNEL: Highest


Modulation: GFSK

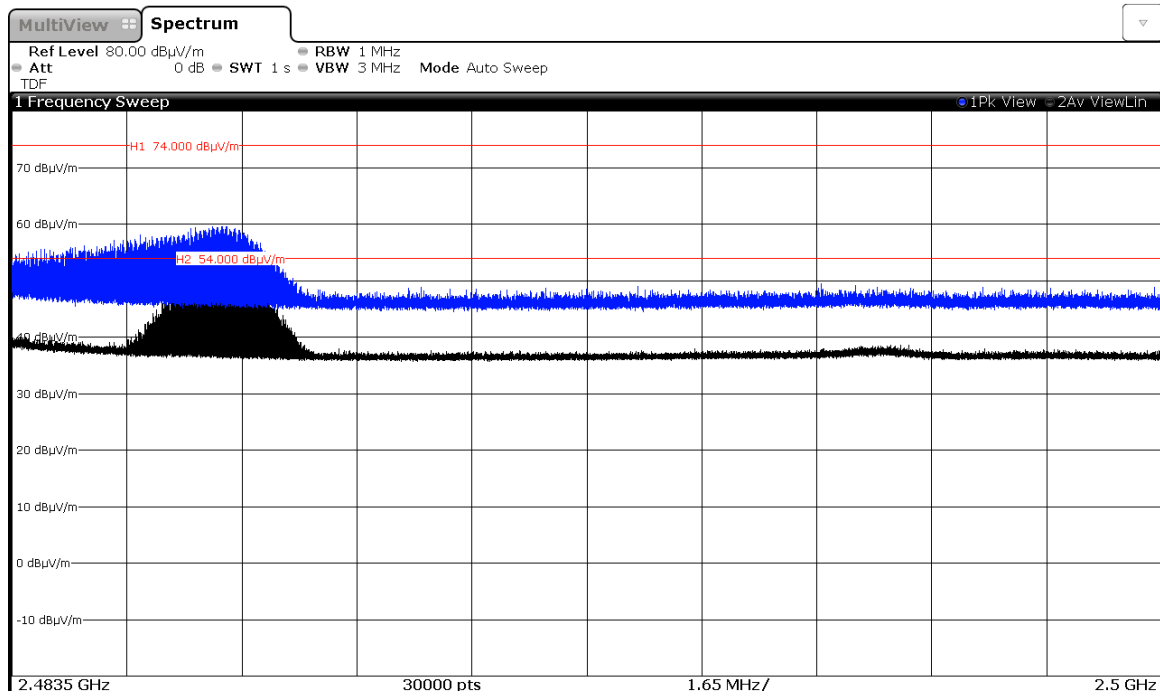

Modulation: Π/4-DQPSK

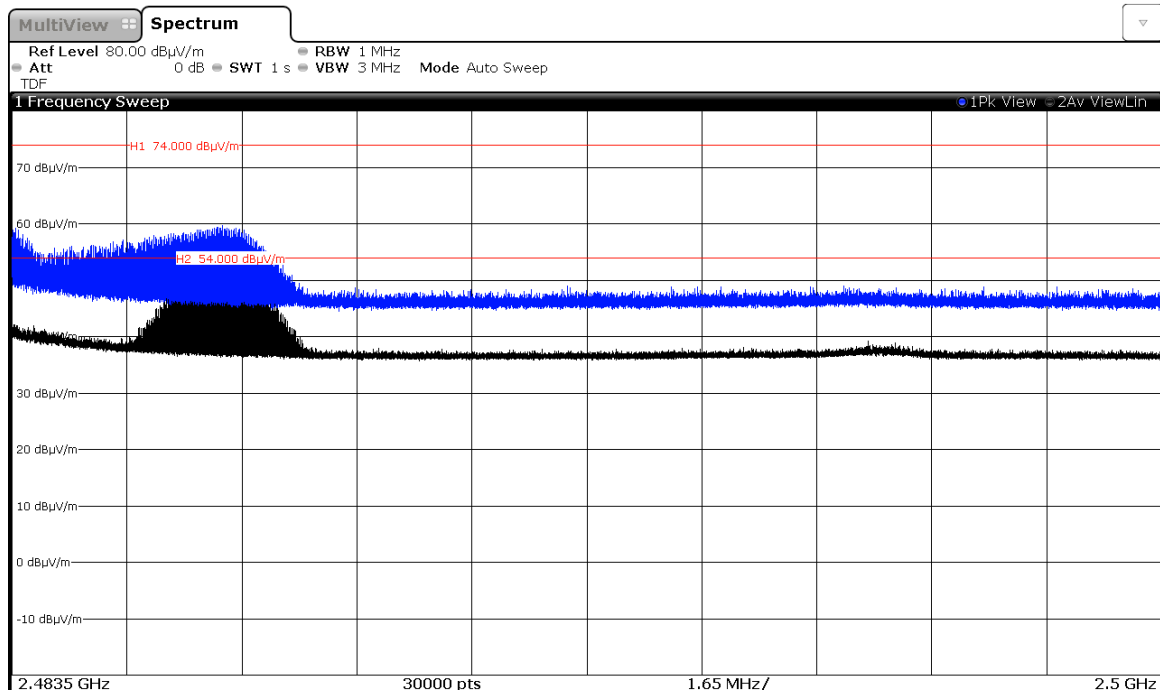

Modulation: 8-DPSK

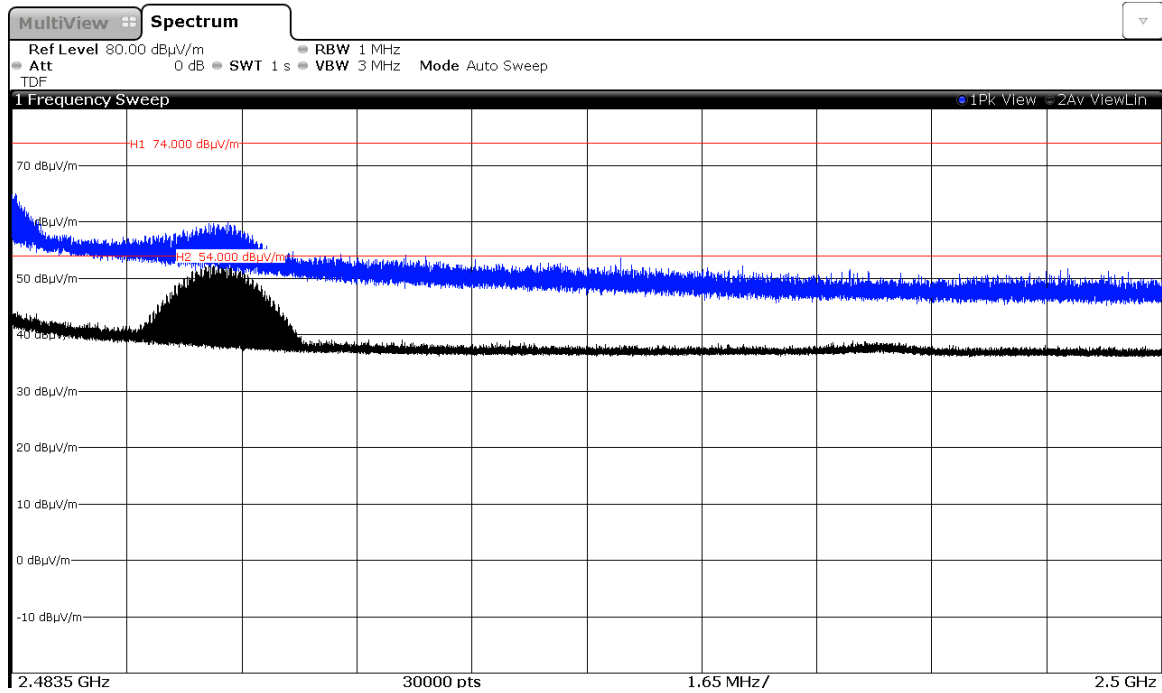

Appendix C – Test result “WiFi 2.4 GHz (802.11b/g/n20)”

INDEX

TEST CONDITIONS	58
Section 15.247 Subclause (d) / RSS-247 5.5. Emission limitations radiated (Transmitter)	61

TEST CONDITIONS

Power supply (V):

$$V_{\text{nominal}} = 3.8 \text{ Vdc}$$

Type of power supply = DC voltage from external power supply

Type of antenna = External antenna

Declared Gain for antenna (maximum) = +2.3 dBi

TEST FREQUENCIES:

For WiFi 802.11b/g/n20:

Lowest channel (1): 2412 MHz

Middle channel (6): 2437 MHz

Highest channel (11): 2462 MHz

The test set-up was made in accordance to the general provisions of FCC DTS Measurement 558074 D01 DTS Meas Guidance v03r05 dated 04/08/2016.

The laptop computer (“PhoneTool”) was used to configure the EUT to continuously transmit at a specified output power in all channels with different modes and modulation schemes.

WiFi 2.4 GHz	WIFI Tool: TX Power (dBm)
802.11b	17
802.11g	10
802.11n20	9

The field strength at the band edges was evaluated for each mode for the channel under test.

During transmitter test the EUT was being controlled by the SW tool to operate in a continuous transmit mode on the test channel as required and in each of the different modulation modes.

The data rates of 1Mb/s for 802.11b, 6Mb/s for 802.11g, MSC0 for 802.11n20 were selected based on preliminary testing that identified those rates corresponding to the worst cases for output power and band edge levels at restricted bands.

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).


For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission.


It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup $f < 1$ GHz

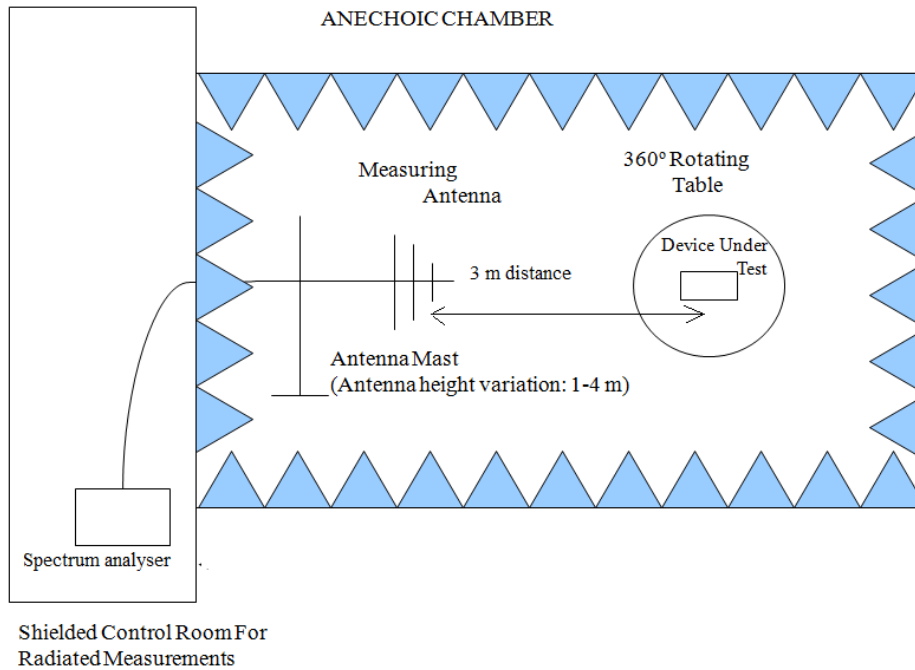

Radiated measurements setup $f > 1$ GHz

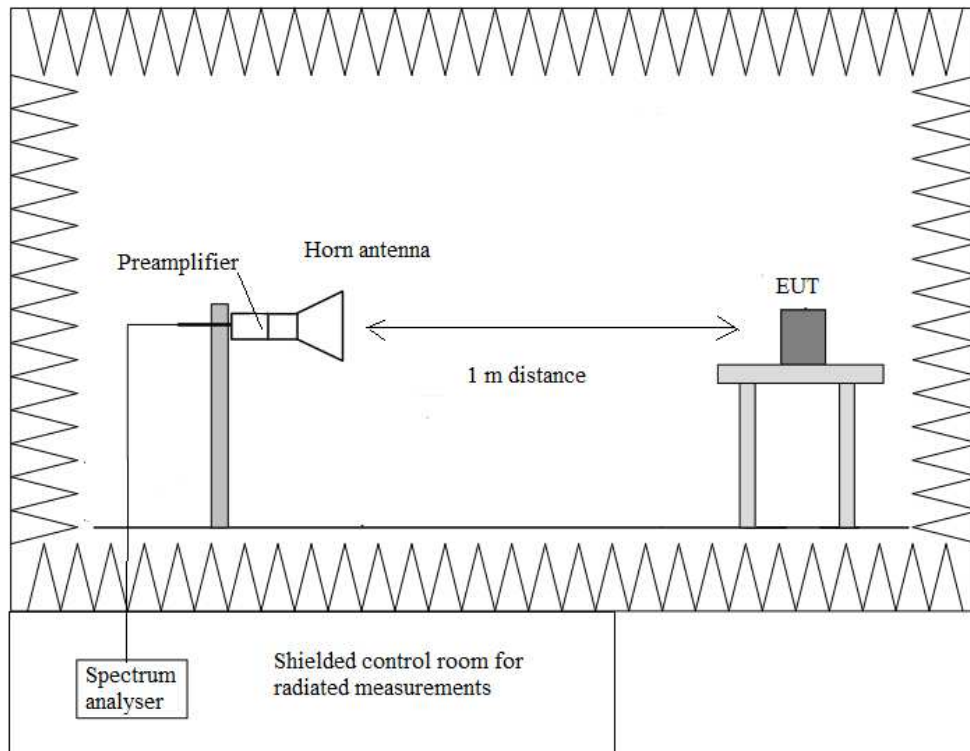

Section 15.247 Subclause (d) / RSS-247 5.5. Emission limitations radiated (Transmitter)

SPECIFICATION

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-1000 MHz and at distance of 1m for the frequency range 1 GHz-25 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz-1000 MHz.

The spurious signals detected do not depend on either the operating channel or the modulation mode.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
122.732	V	QuasiPeak	35.12	± 3.88
416.060	V	QuasiPeak	30.81	± 3.88

Frequency range 1 GHz-25 GHz.

The results in the next tables show the maximum measured levels in the 1-25 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).

The field strength at the band edges was evaluated for each mode for the channel under test.

Spurious signals with peak levels above the average limit (54 dB μ V/m at 3 m) are measured with AVG detector for checking compliance with the average limit.

1. WiFi 2.4GHz 802.11 b mode.

1.1. CHANNEL 1: LOWEST (2412 MHz). Out-of-band spurious emissions in the 1-25 GHz range and inside restricted band 2.31-2.39 GHz.

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.03403	H	Peak	48.55	± 4.87
1.10743	H	Peak	43.57	± 4.87
1.14417	H	Peak	44.35	± 4.87
1.24817	H	Peak	44.15	± 4.87
2.37443	V	Peak	50.30	± 4.87
2.38959	V	Peak	51.92	± 4.87
2.51750	V	Peak	49.48	± 4.87
2.58510	V	Peak	53.46	± 4.87
2.76150	V	Peak	51.55	± 4.87
4.82425	V	Peak	41.98	± 4.87

1.2. CHANNEL 6: MIDDLE (2437 MHz). Out-of-band spurious emissions in the 1-25 GHz.

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.00523	H	Peak	45.27	± 4.87
1.0401	H	Peak	44.13	± 4.87
1.14390	H	Peak	44.34	± 4.87
1.24810	V	Peak	43.72	± 4.87
2.33170	V	Peak	47.44	± 4.87
2.54030	V	Peak	49.50	± 4.87
2.60770	V	Peak	53.85	± 4.87
2.78390	V	Peak	48.93	± 4.87
4.87425	V	Peak	47.35	± 4.87

1.3. CHANNEL 11: HIGHEST (2462 MHz). Out-of-band spurious emissions in the 1-25 GHz range and inside restricted band 2.4835-2.5 GHz.

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.00517	H	Peak	44.21	± 4.87
1.04003	H	Peak	44.23	± 4.87
1.10983	H	Peak	43.94	± 4.87
1.14363	V	Peak	45.12	± 4.87
1.24797	V	Peak	43.81	± 4.87
2.35890	V	Peak	49.25	± 4.87
2.48820	V	Peak	60.41	± 4.87
		Average	51.84	± 4.87
2.49414	V	Peak	54.20	± 4.87
		Average	42.33	± 4.87
2.56650	V	Peak	51.22	± 4.8
2.63550	V	Peak	53.00	± 4.87
2.80890	V	Peak	48.98	± 4.87
4.92375	V	Peak	49.20	± 4.87

Verdict: PASS

2. WiFi 2.4GHz 802.11g mode

2.1. CHANNEL 1: LOWEST (2412 MHz). Out-of-band spurious emissions in the 1-25 GHz range and inside restricted band 2.31-2.39 GHz.

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.00570	H	Peak	43.51	± 4.87
1.03990	H	Peak	44.30	± 4.87
1.10957	H	Peak	45.28	± 4.87
1.14397	H	Peak	44.47	± 4.87
2.08003	V	Peak	44.85	± 4.87
2.38994	V	Peak	66.37	± 4.87
		Average	52.27	± 4.87
2.51983	V	Peak	47.89	± 4.87
2.58143	V	Peak	51.62	± 4.87

2.2. CHANNEL 6: MIDDLE (2437 MHz). Out-of-band spurious emissions in the 1-25 GHz.

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.00537	H	Peak	44.82	± 4.87
1.04047	H	Peak	43.65	± 4.87
1.10917	H	Peak	44.26	± 4.87
1.14377	V	Peak	45.61	± 4.87
2.07983	V	Peak	46.39	± 4.87
2.54697	V	Peak	49.23	± 4.87
2.60610	V	Peak	51.93	± 4.87

2.3. CHANNEL 11: HIGHEST (2462 MHz). Out-of-band spurious emissions in the 1-25 GHz range and inside restricted band 2.4835-2.5 GHz.

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.04003	H	Peak	44.06	± 4.87
1.10890	H	Peak	43.81	± 4.87
1.14417	H	Peak	45.05	± 4.87
2.08017	V	Peak	45.13	± 4.87
2.48448	V	Peak	64.80	± 4.87
		Average	50.58	± 4.87
2.57257	V	Peak	47.73	± 4.8
2.62850	V	Peak	51.42	± 4.87

Verdict: PASS

3. WiFi 2.4GHz 802.11 n20 mode

3.1. CHANNEL 1: LOWEST (2412 MHz). Out-of-band spurious emissions in the 1-25 GHz range and inside restricted band 2.31-2.39 GHz.

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.00537	H	Peak	44.01	± 4.87
1.10950	H	Peak	43.91	± 4.87
1.14397	H	Peak	44.63	± 4.87
1.24797	H	Peak	43.52	± 4.87
2.07977	V	Peak	45.86	± 4.87
2.38714	V	Peak	73.12	± 4.87
		Average	52.63	± 4.87
2.57790	V	Peak	51.16	± 4.87

3.2. CHANNEL 6: MIDDLE (2437 MHz). Out-of-band spurious emissions in the 1-25 GHz.


Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.00570	H	Peak	43.66	± 4.87
1.04023	H	Peak	44.13	± 4.87
1.10910	H	Peak	43.28	± 4.87
1.14383	H	Peak	46.43	± 4.87
2.07977	V	Peak	45.48	± 4.87
2.54610	V	Peak	50.28	± 4.87
2.61403	V	Peak	50.13	± 4.87

3.3. CHANNEL 11: HIGHEST (2462 MHz). Out-of-band spurious emissions in the 1-25 GHz range and inside restricted band 2.4835-2.5 GHz.

Spurious frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Measurement Uncertainty (dB)
1.00510	H	Peak	43.55	± 4.87
1.03957	H	Peak	44.21	± 4.87
1.14390	H	Peak	44.99	± 4.87
1.24797	V	Peak	43.29	± 4.87
2.08030	V	Peak	46.34	± 4.87
2.48392	V	Peak	68.04	± 4.87
		Average	49.80	± 4.87
2.56937	V	Peak	47.73	± 4.8
2.63090	V	Peak	49.84	± 4.87

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

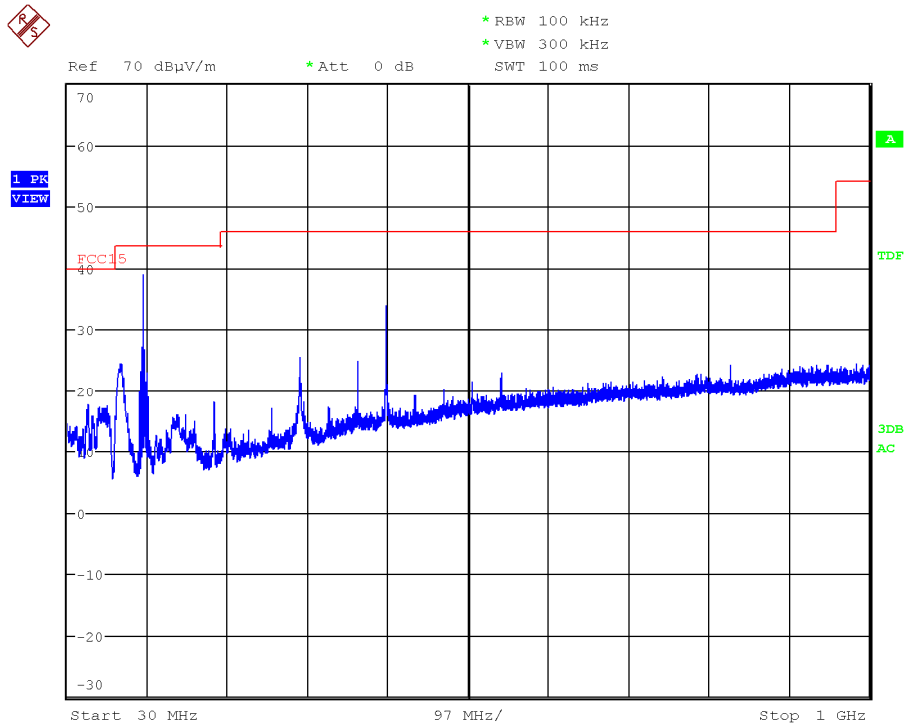


(This plot is valid for all three channels and modulation modes).

FREQUENCY RANGE 1 GHz to 3 GHz.


1. WiFi 2.4GHz 802.11 b mode

CHANNEL 1 (2412 MHz).

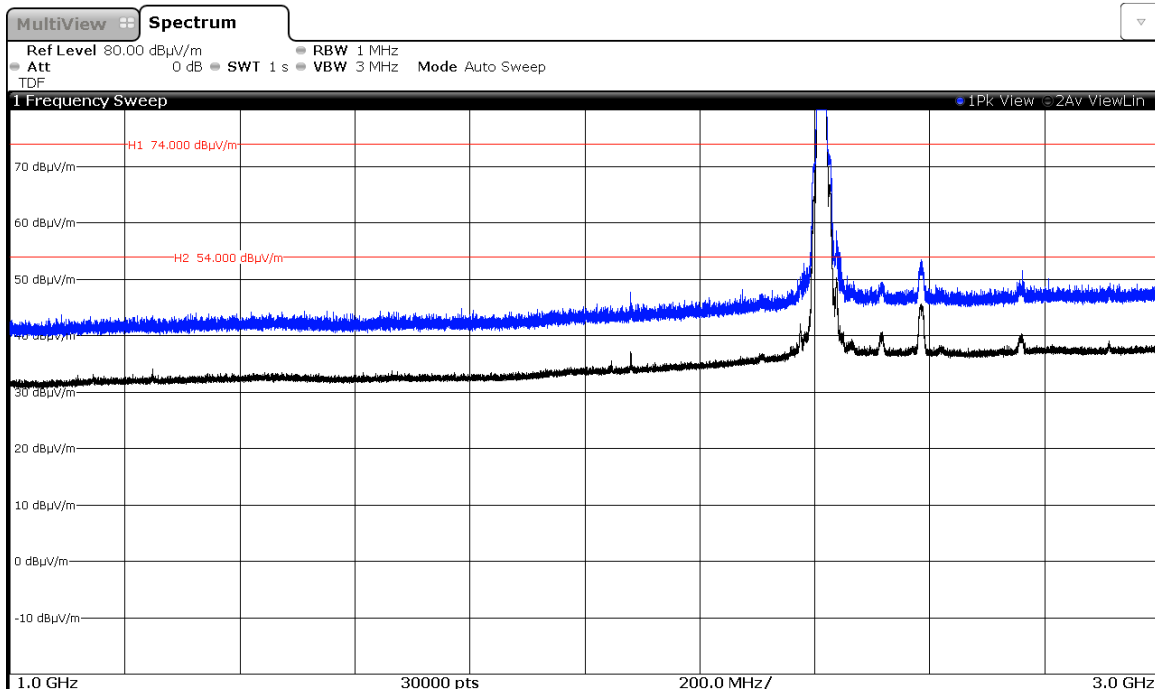


Note: The peak above the limit is the carrier frequency.

CHANNEL 6 (2437 MHz).

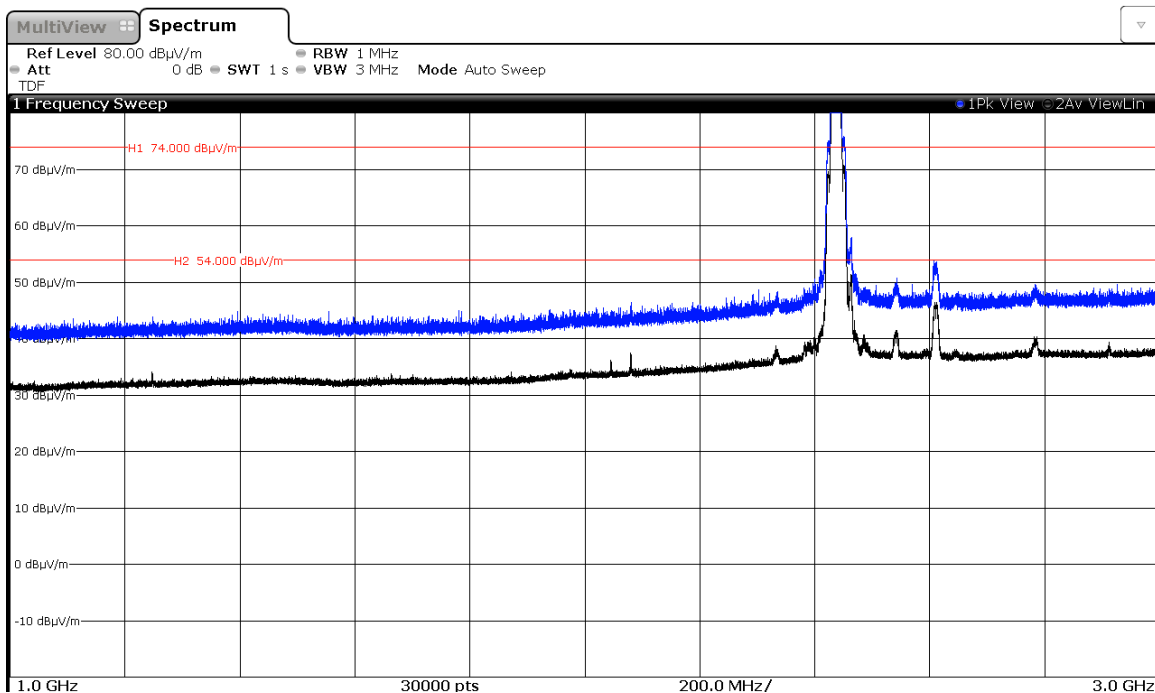

Note: The peak above the limit is the carrier frequency.


CHANNEL 11 (2462 MHz).

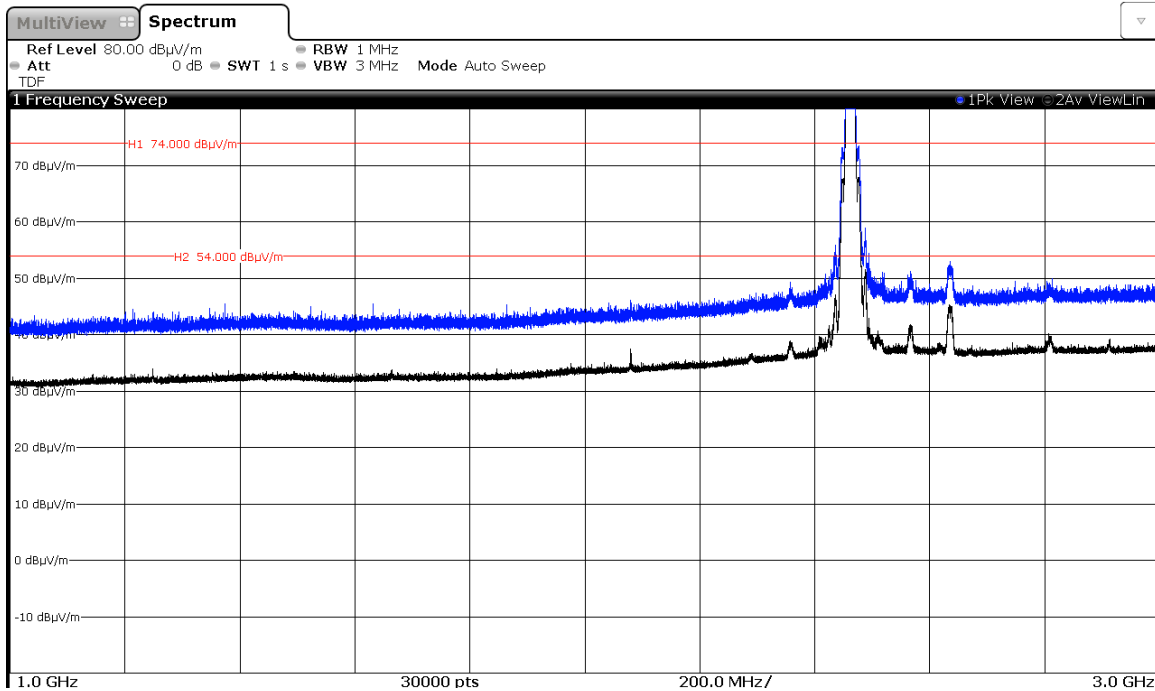

Note: The peak above the limit is the carrier frequency.


2. WiFi 2.4GHz 802.11 g mode

CHANNEL 1 (2412 MHz).

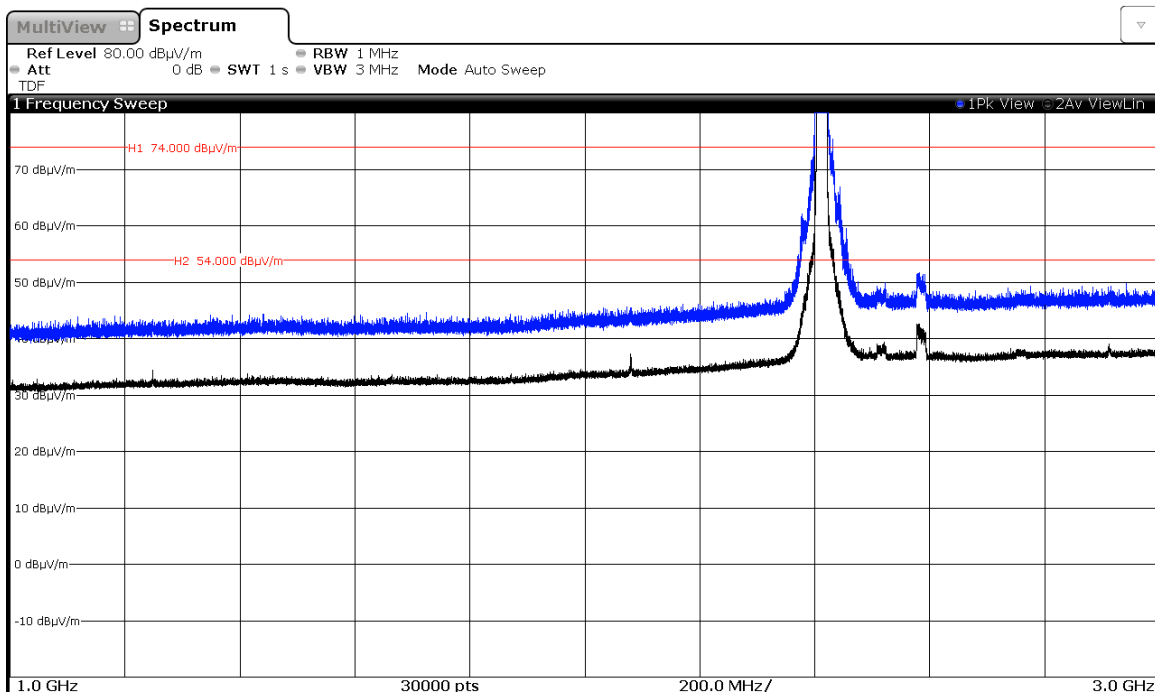


Note: The peak above the limit is the carrier frequency.

CHANNEL 6 (2437 MHz).

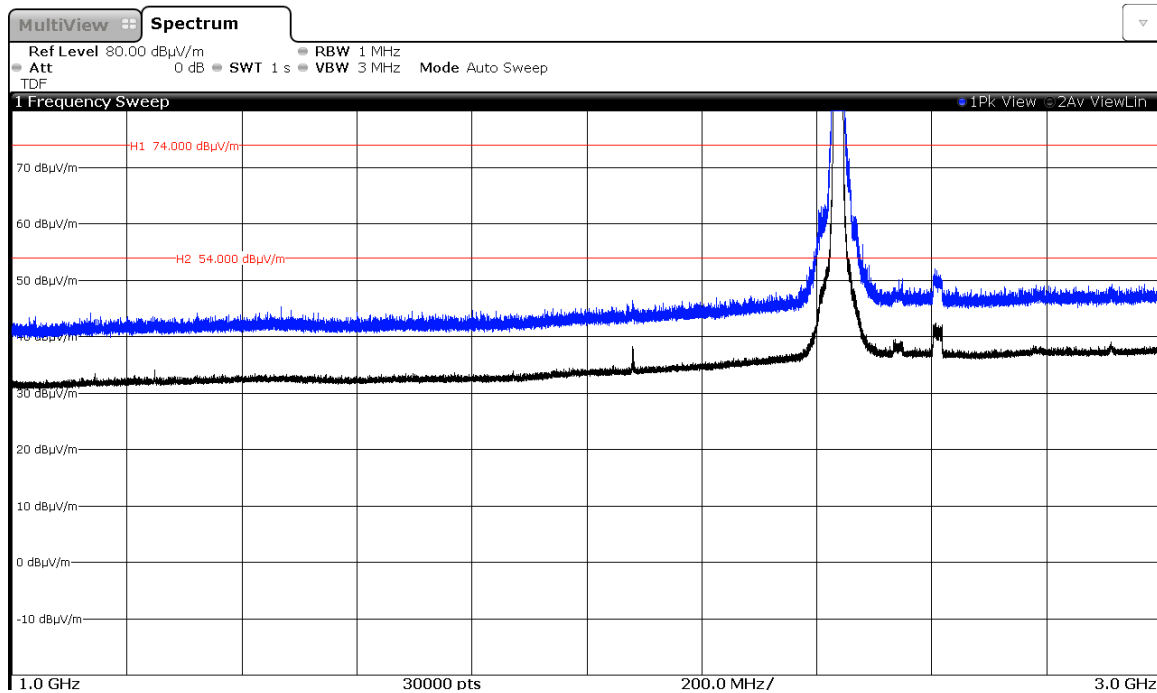

Note: The peak above the limit is the carrier frequency.


CHANNEL 11 (2462 MHz).

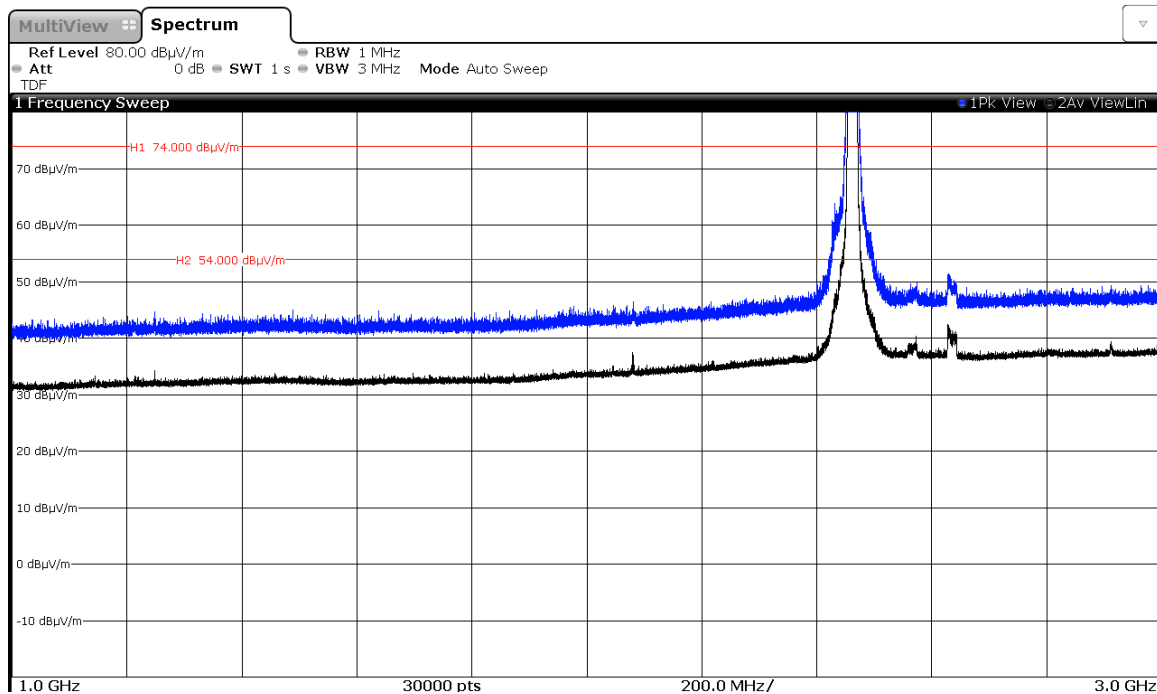

Note: The peak above the limit is the carrier frequency.


3. WiFi 2.4GHz 802.11 n20 mode

CHANNEL 1 (2412 MHz).

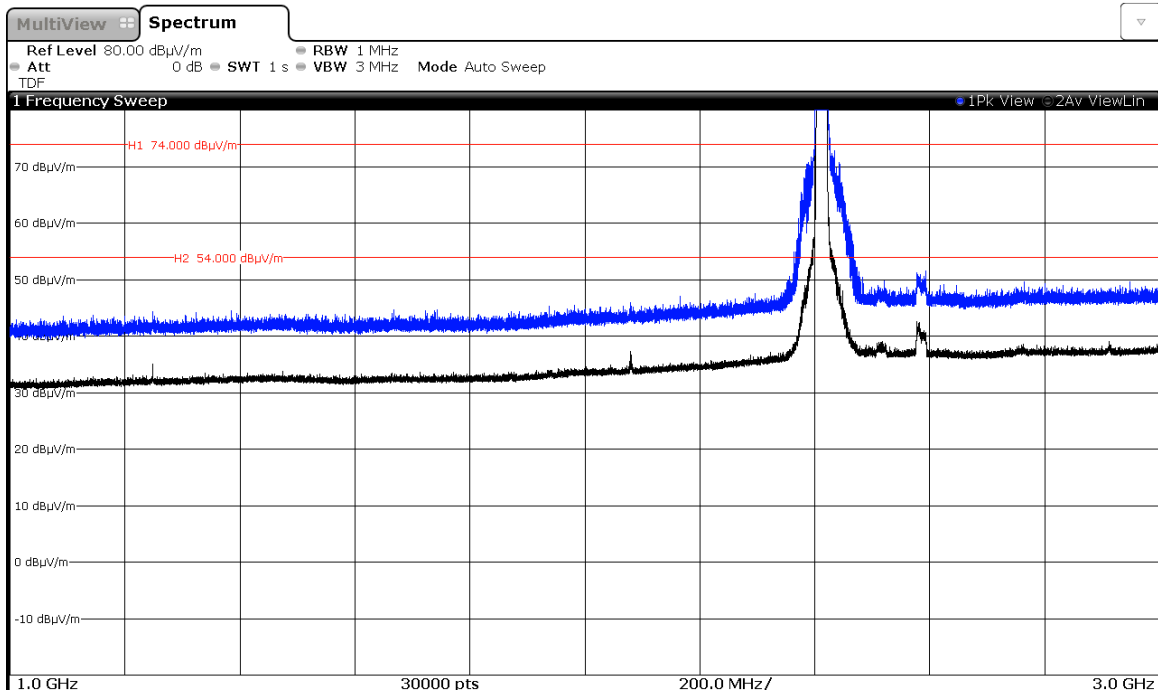


Note: The peak above the limit is the carrier frequency.

CHANNEL 6 (2437 MHz).

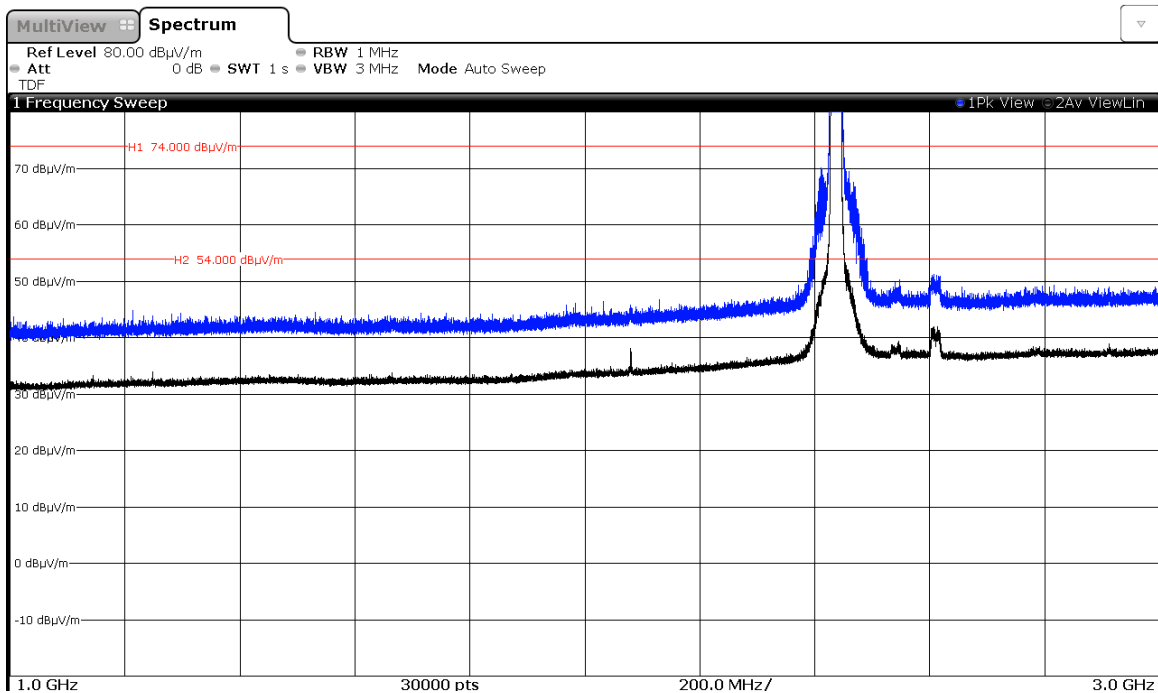

Note: The peak above the limit is the carrier frequency.

CHANNEL 11 (2462 MHz).

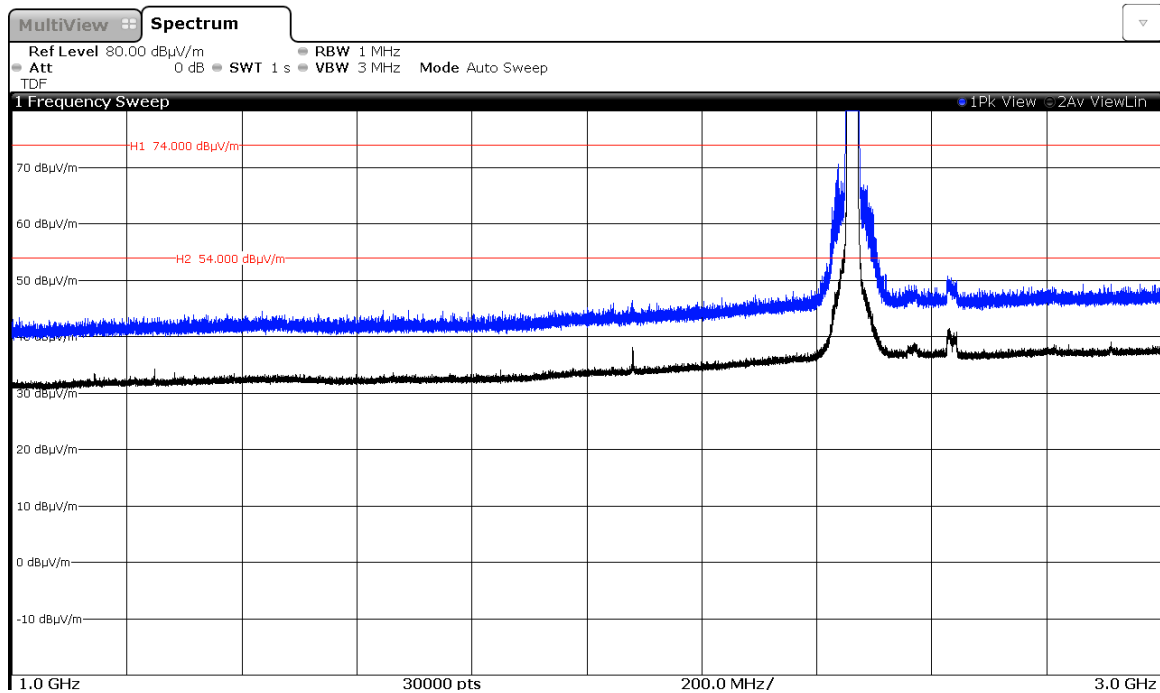


Note: The peak above the limit is the carrier frequency.


FREQUENCY RANGE 3 GHz to 18 GHz.

1. WiFi 2.4GHz 802.11 b mode


CHANNEL 1 (2412 MHz).

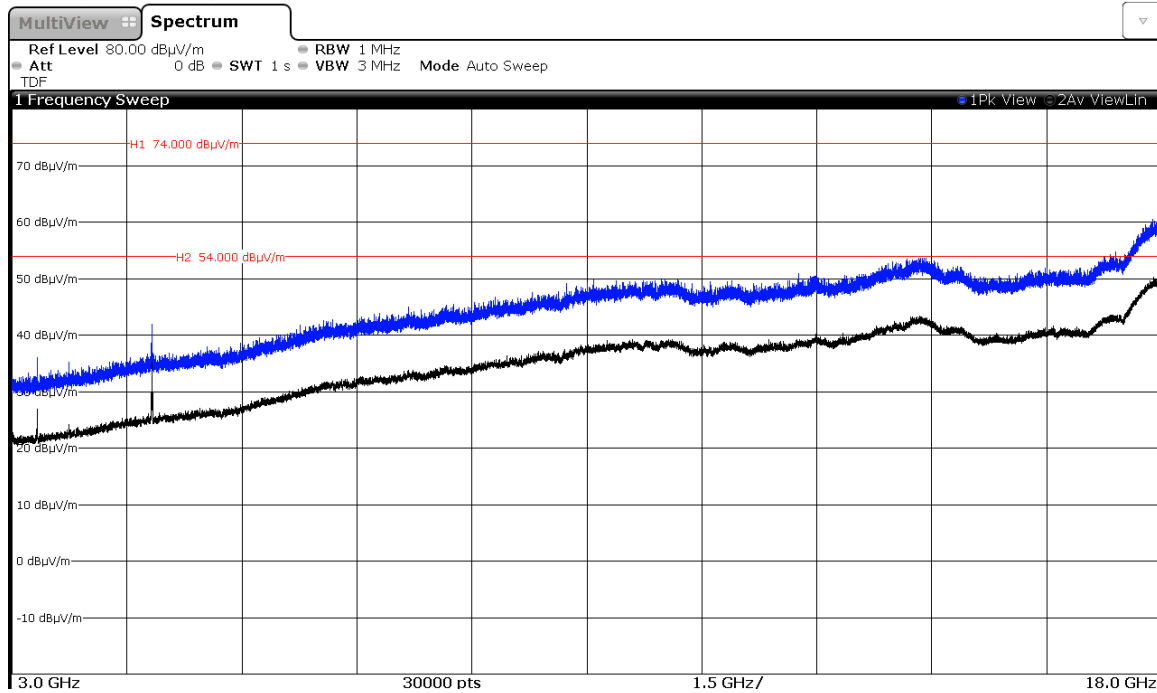

CHANNEL 6 (2437 MHz).

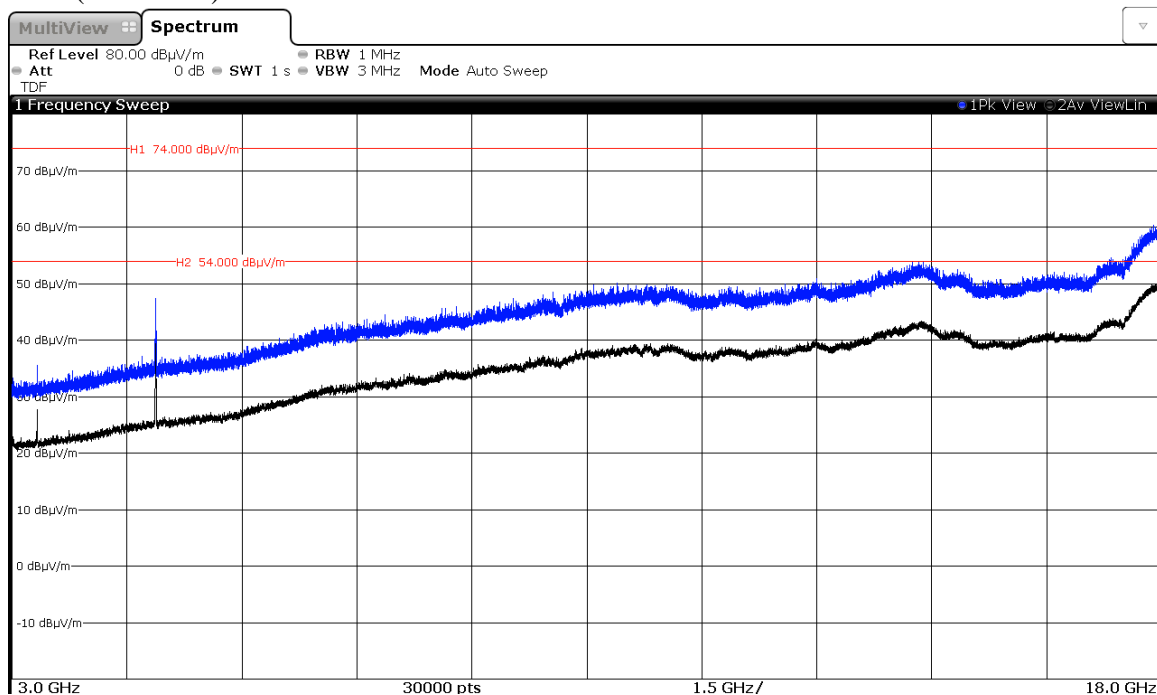


CHANNEL 11 (2462 MHz).

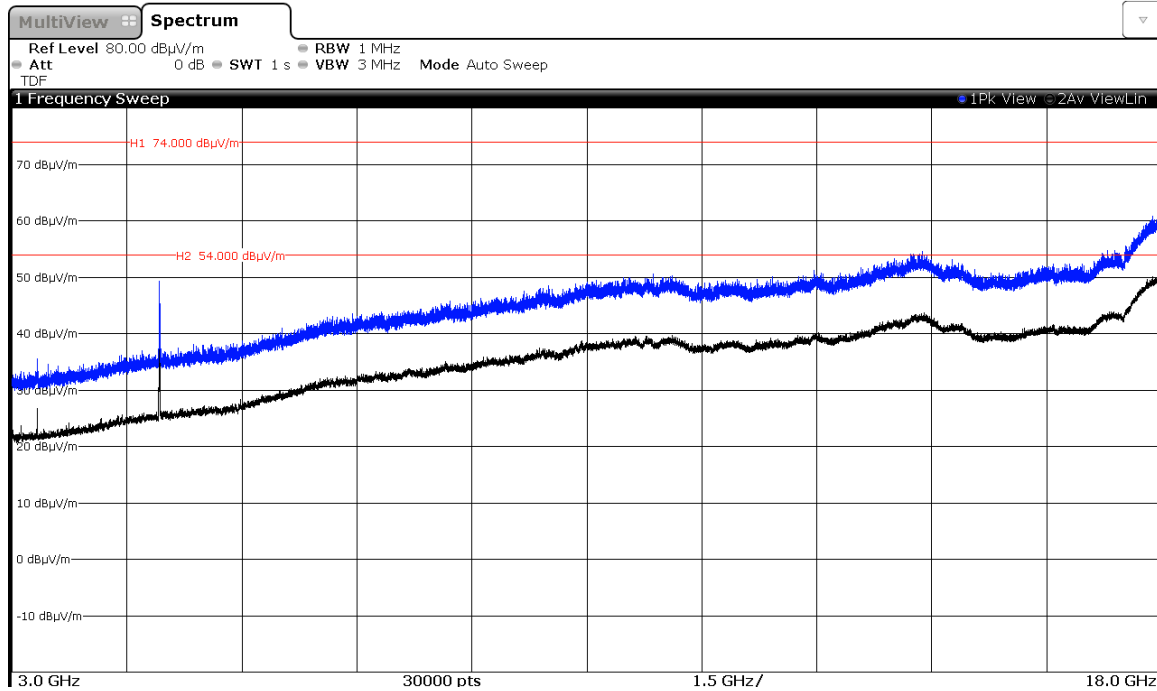


2. WiFi 2.4GHz 802.11 g mode


CHANNEL 1 (2412 MHz).

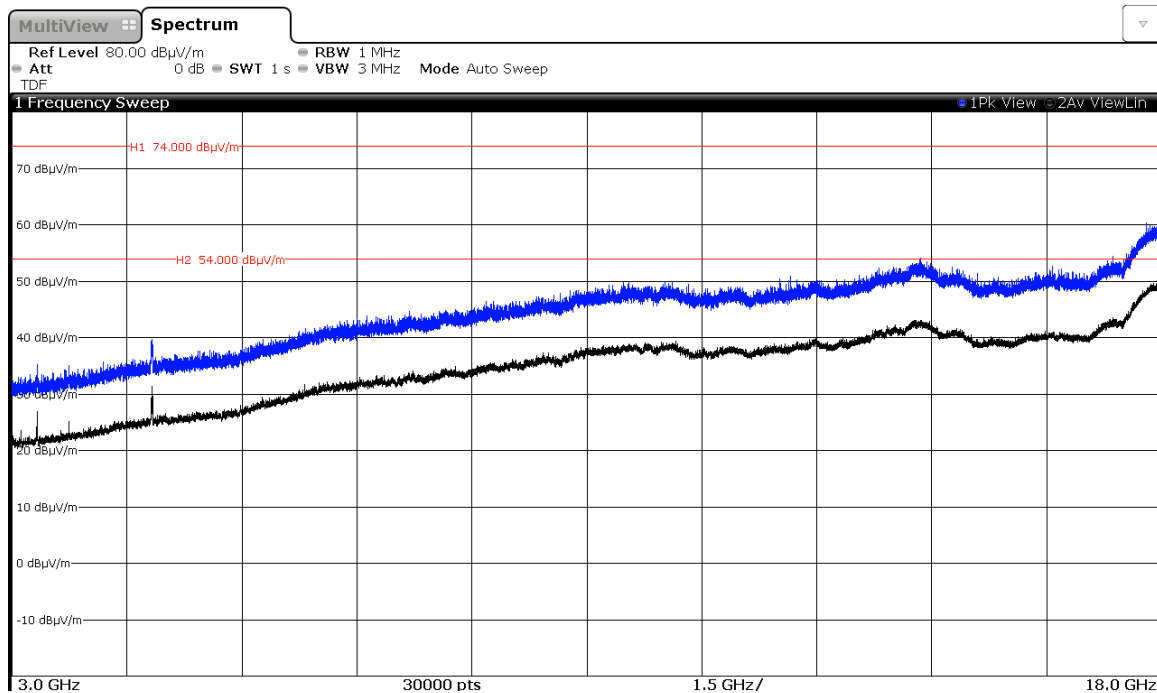

CHANNEL 6 (2437 MHz).

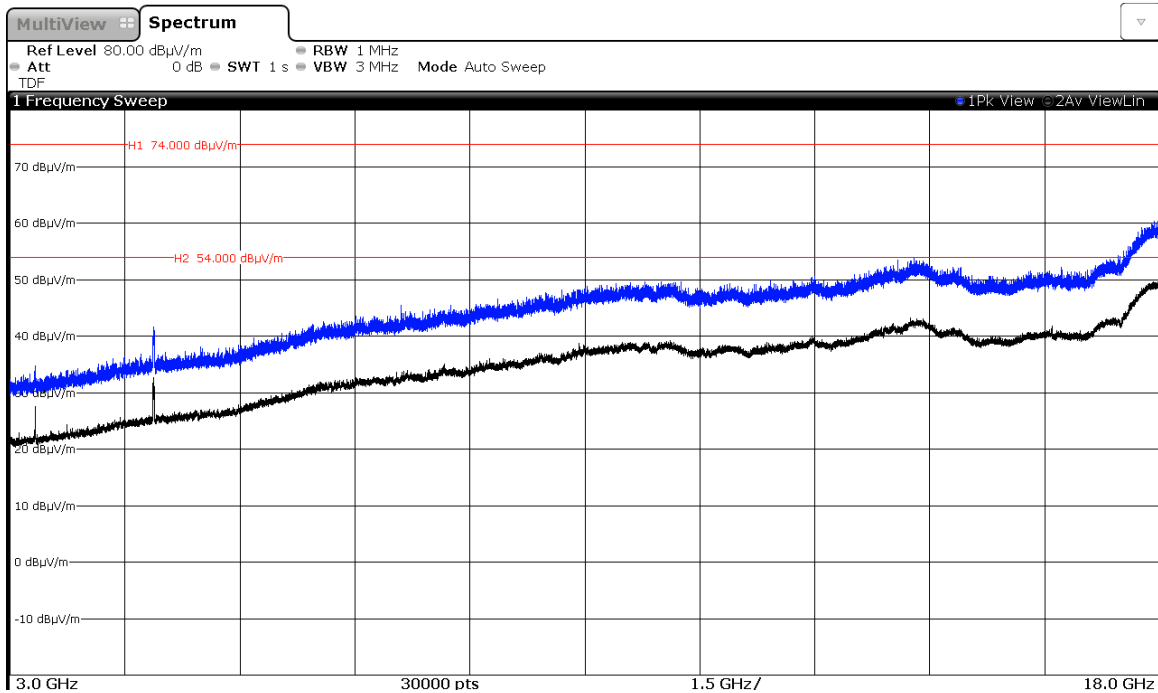


CHANNEL 11 (2462 MHz).

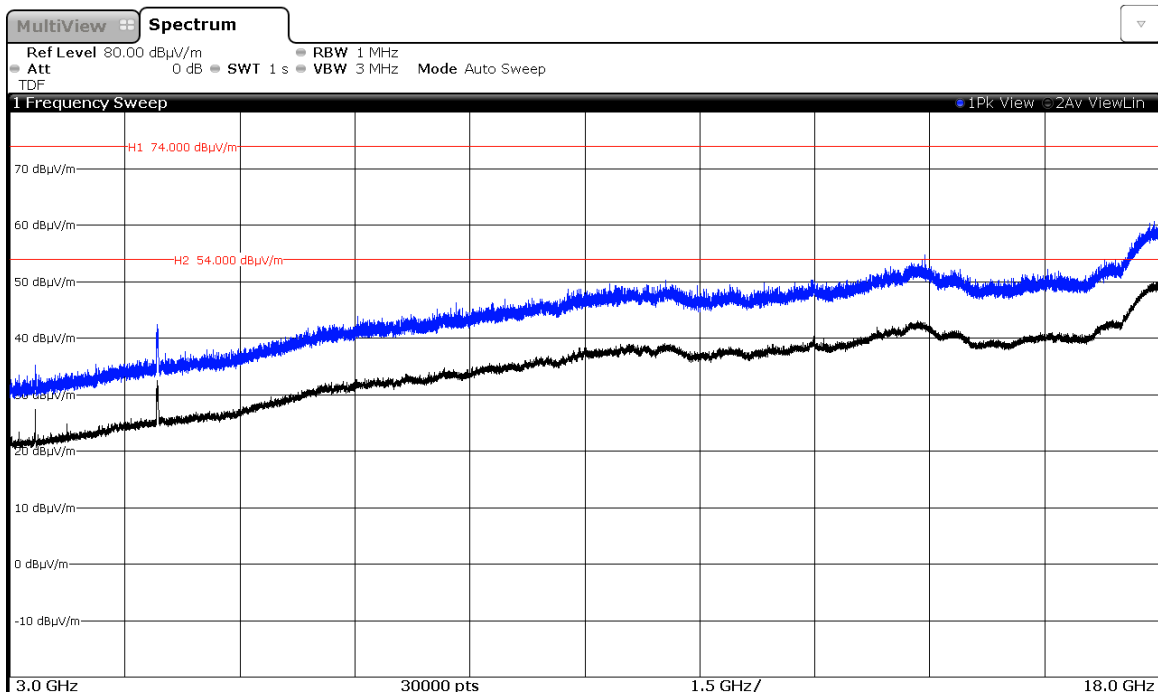


3. WiFi 2.4GHz 802.11 n20 mode


CHANNEL 1 (2412 MHz).

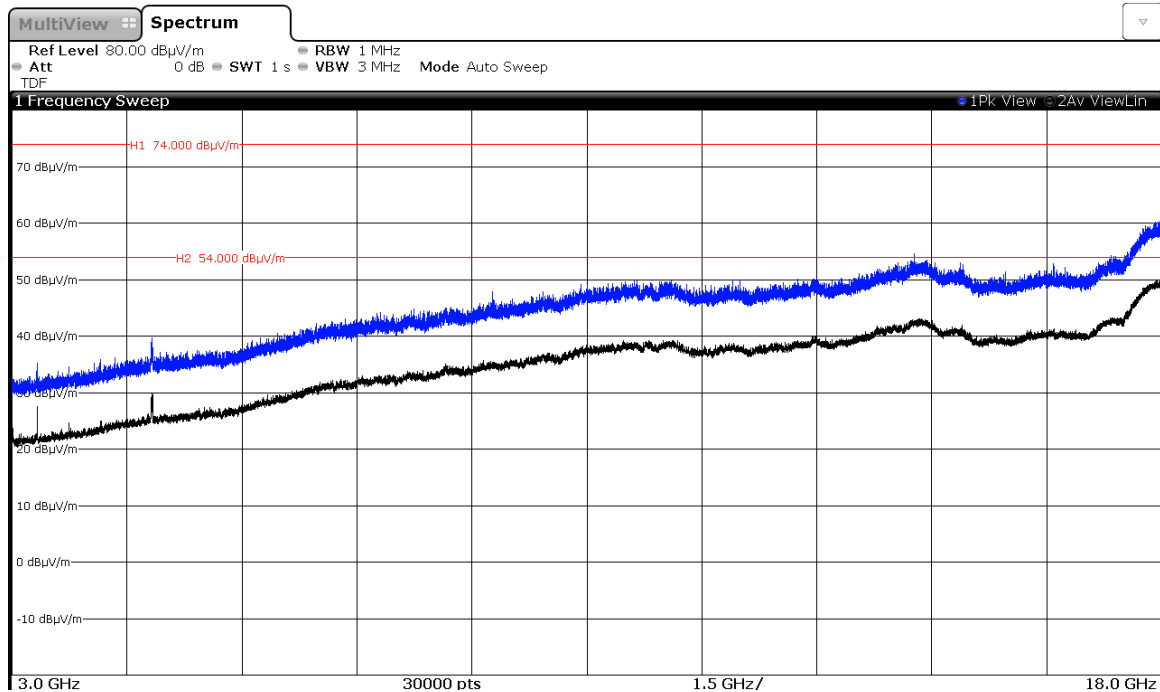


CHANNEL 6 (2437 MHz).

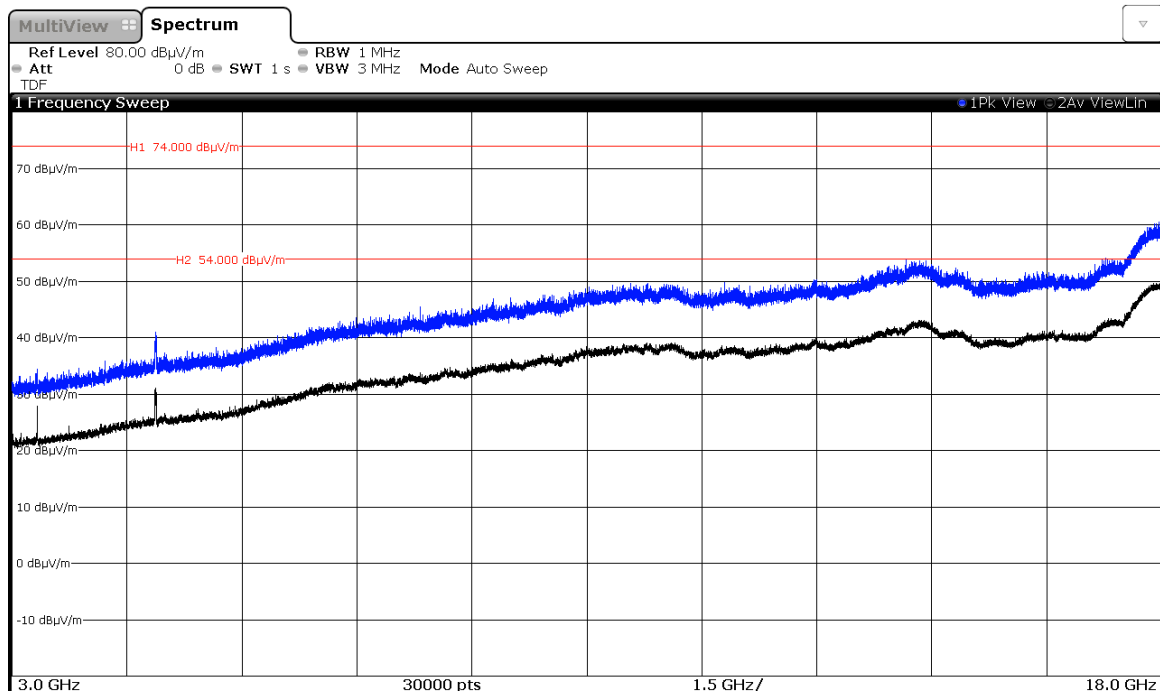

CHANNEL 11 (2462 MHz).

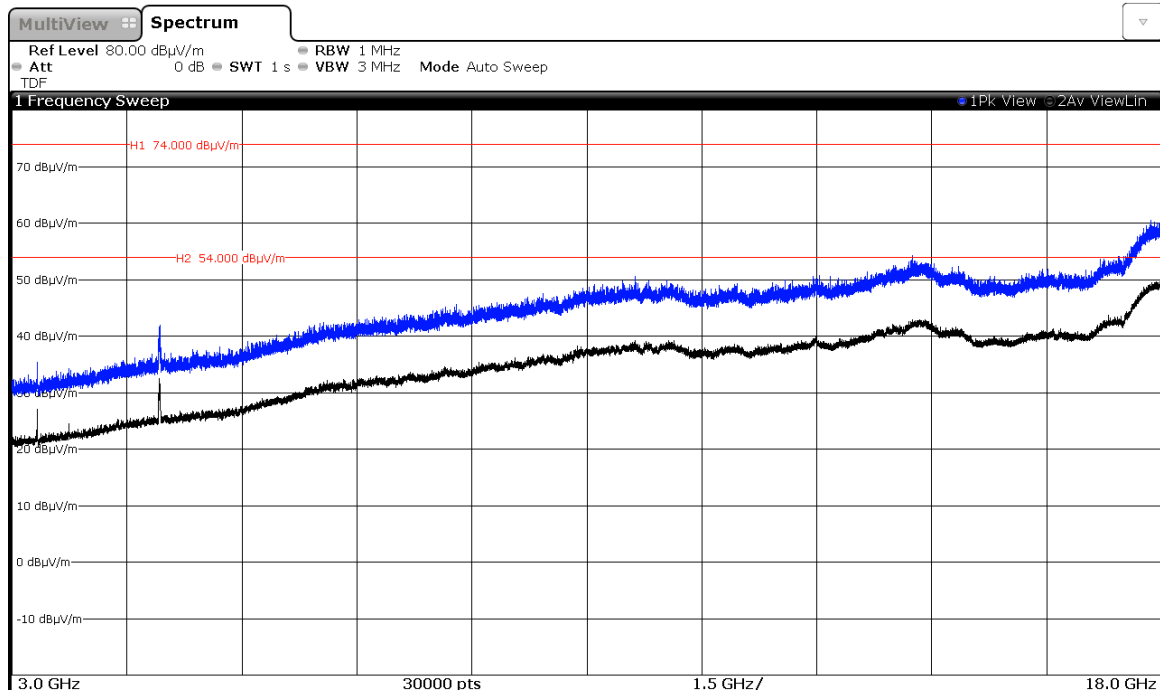

FREQUENCY RANGE 18 GHz to 26 GHz.

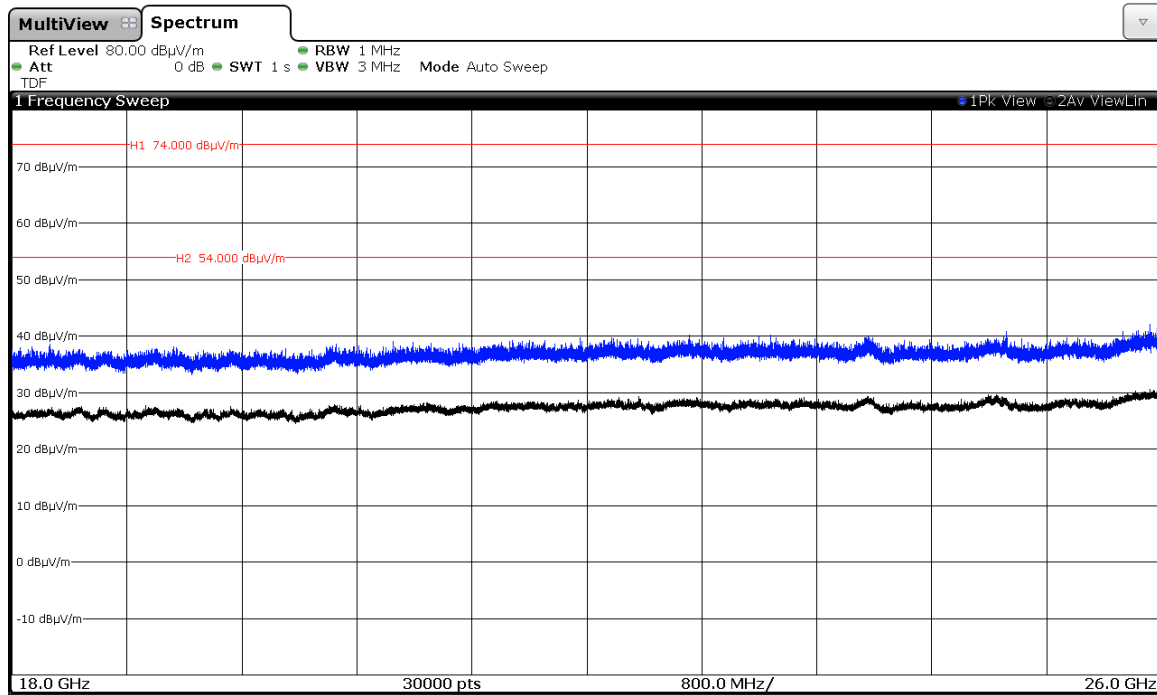


(This plot is valid for all three channels and modulation modes).

FREQUENCY RANGE 2.31 GHz to 2.39 GHz. (RESTRICTED BAND)


1. WiFi 2.4GHz 802.11 b mode

CHANNEL 1 (2412 MHz).

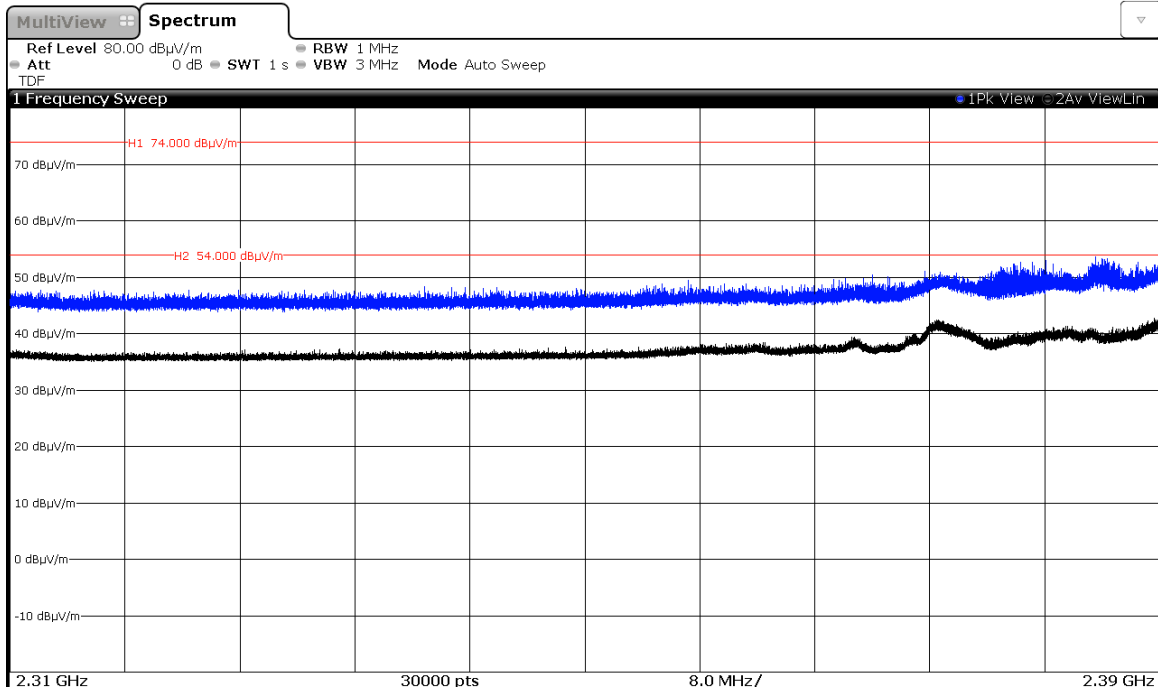


2. WiFi 2.4GHz 802.11 g mode

CHANNEL 1 (2412 MHz).

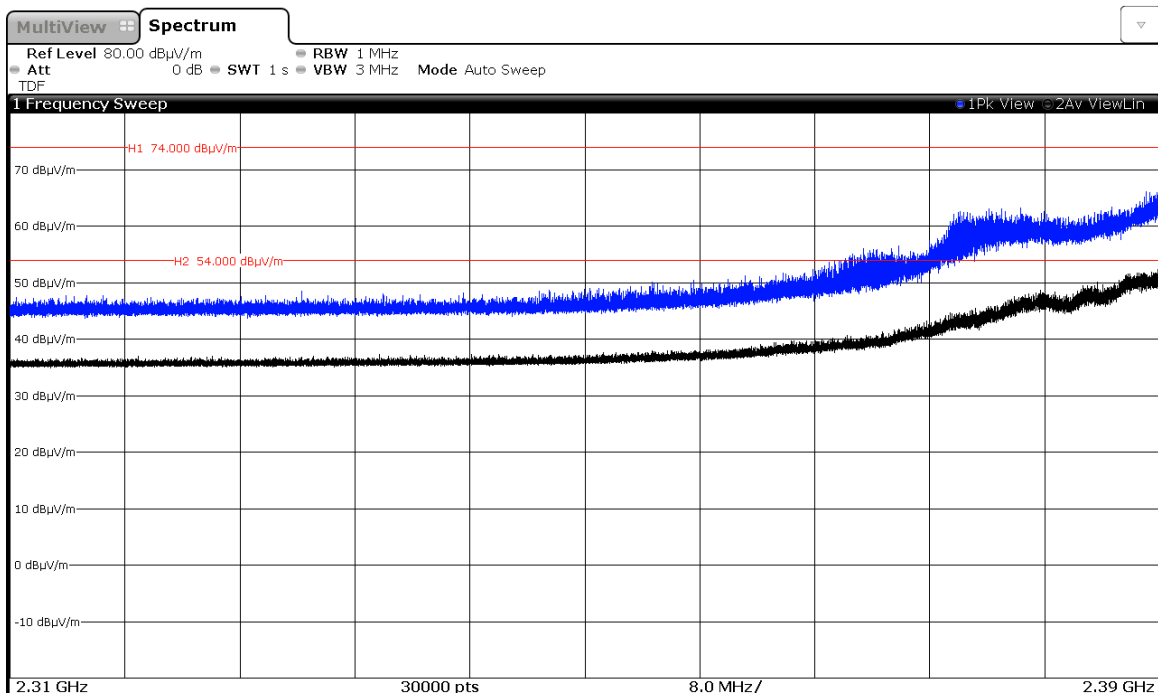

3. WiFi 2.4GHz 802.11 n20 mode


CHANNEL 1 (2412 MHz).

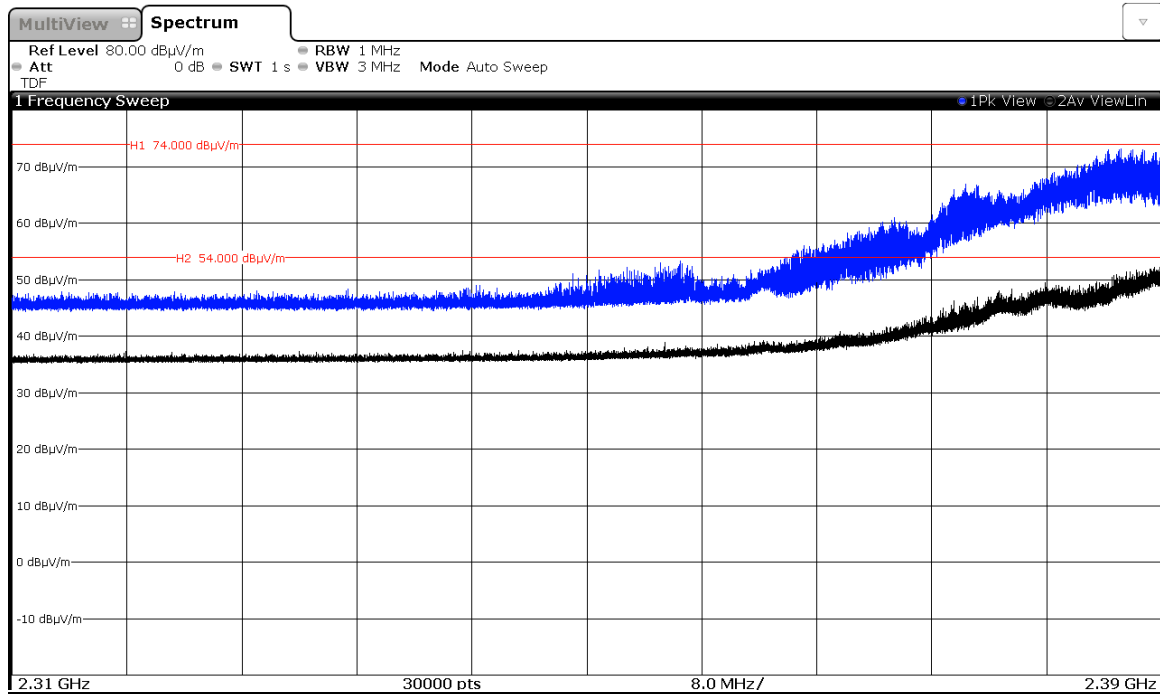

FREQUENCY RANGE 2.4835 GHz to 2.5 GHz. (RESTRICTED BAND)


1. WiFi 2.4GHz 802.11 b mode

CHANNEL 11 (2462 MHz).

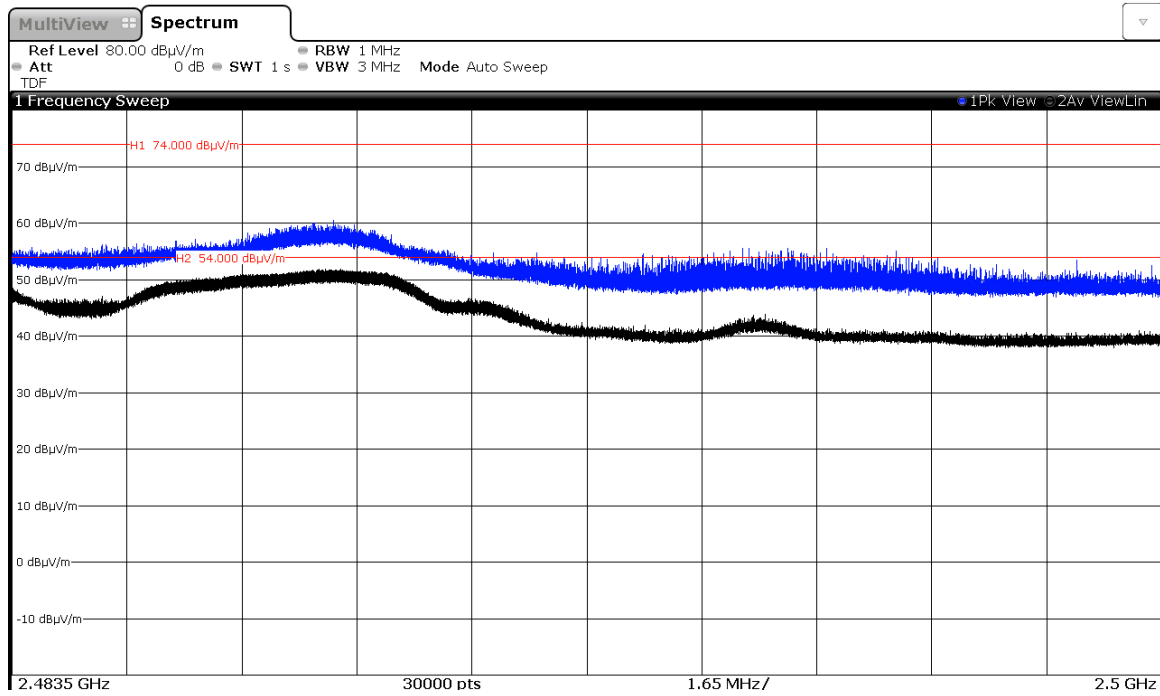

2. WiFi 2.4GHz 802.11 g mode

CHANNEL 11 (2462 MHz).

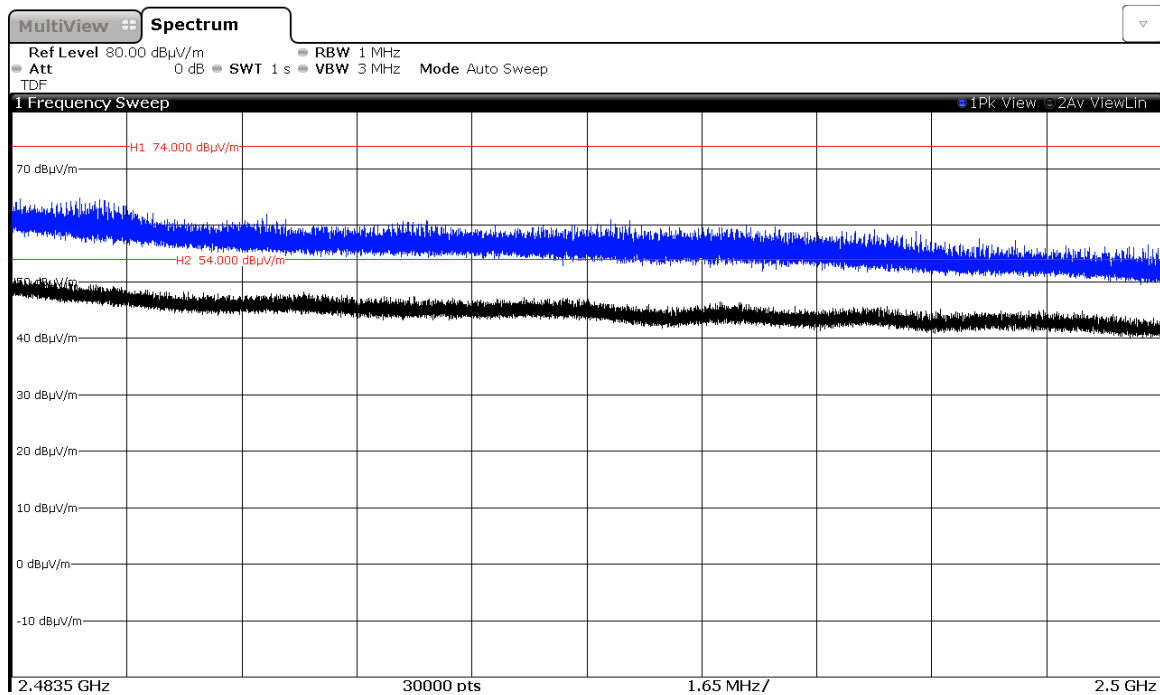

3. WiFi 2.4GHz 802.11 n20 mode

CHANNEL 11 (2462 MHz).

