



A D T

FCC TEST REPORT

(PART 24)

REPORT NO.: RF120912C15-1

MODEL NO.: TR-606B (refer to item 3.1 for more details)

FCC ID: RID-TR606

RECEIVED: Sep. 12, 2012

TESTED: Oct. 22 ~ Nov. 02, 2012

ISSUED: Nov. 09, 2012

APPLICANT: GlobalSat WorldCom Corporation

ADDRESS: 16F., No.186, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 CERTIFICATION	4
2 SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
2.2 TEST SITE AND INSTRUMENTS	6
3 GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 CONFIGURATION OF SYSTEM UNDER TEST	8
3.3 DESCRIPTION OF SUPPORT UNITS	8
3.4 TEST ITEM AND TEST CONFIGURATION	9
3.5 EUT OPERATING CONDITIONS	10
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
4 TEST TYPES AND RESULTS	11
4.1 OUTPUT POWER MEASUREMENT	11
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	11
4.1.2 TEST PROCEDURES	11
4.1.3 TEST SETUP.....	11
4.1.4 TEST RESULTS	12
4.2 FREQUENCY STABILITY MEASUREMENT	14
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	14
4.2.2 TEST PROCEDURE	14
4.2.3 TEST SETUP.....	14
4.2.4 TEST RESULTS	15
4.3 OCCUPIED BANDWIDTH MEASUREMENT.....	16
4.3.1 TEST PROCEDURES	16
4.3.2 TEST SETUP.....	16
4.3.3 TEST RESULTS	17
4.4 BAND EDGE MEASUREMENT	18
4.4.1 LIMITS OF BAND EDGE MEASUREMENT.....	18
4.4.2 TEST SETUP.....	18
4.4.3 TEST PROCEDURES	18
4.4.4 TEST RESULTS	19
4.5 CONDUCTED SPURIOUS EMISSIONS.....	20
4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	20
4.5.2 TEST PROCEDURE	20
4.5.3 TEST SETUP.....	20
4.5.4 TEST RESULTS	21
4.6 RADIATED EMISSION MEASUREMENT	27
4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	27
4.6.2 TEST PROCEDURES	27
4.6.3 DEVIATION FROM TEST STANDARD	27
4.6.4 TEST SETUP.....	28
4.6.5 TEST RESULTS	29
5 PHOTOGRAPHS OF THE TEST CONFIGURATION	36
6 INFORMATION ON THE TESTING LABORATORIES.....	37
7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	38



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120912C15-1	Original release	Nov. 09, 2012



A D T

1 CERTIFICATION

PRODUCT: Tracker

MODEL: TR-606B (refer to item 3.1 for more details)

BRAND: GlobalSat

APPLICANT: GlobalSat WorldCom Corporation

TESTED: Oct. 22 ~ Nov. 02, 2012

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 24, Subpart E

The above equipment (model: TR-606B) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Polly Chien, **DATE :** Nov. 09, 2012
Polly Chien / Specialist

APPROVED BY : Ken Liu, **DATE :** Nov. 09, 2012
Ken Liu / Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 24.232	Equivalent isotropically radiated power	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -27.08dB at 5550.60MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



A D T

2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100744	Apr. 19, 2012	Apr. 18, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jan. 30, 2012	Jan. 29, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 03, 2012	Apr. 02, 2013
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Sep. 12, 2012	Sep. 11, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 11, 2012	Jul. 10, 2013
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier Agilent	8449B	3008A01911	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8447D	2944A10638	Oct. 25, 2012	Oct. 24, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295013/4 283403/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 11, 2012	Aug. 10, 2013
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Mar. 23, 2012	Mar. 22, 2013
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. The test was performed in HwaYa Chamber 9.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 5. The FCC Site Registration No. is 460141.
 6. The IC Site Registration No. is IC 7450F-4.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Tracker
MODEL NO.	TR-606B (Refer to Note for more details)
IMEI CODE	012813000016131
HW VERSION	GS-EB-TR600G-01-V1.1
SW VERSION	F-0TR-606MHT-12092621.dfu
POWER SUPPLY	3.7Vdc (battery) 12Vdc
MODULATION TYPE	GPRS: GMSK WCDMA : BPSK
FREQUENCY RANGE	GPRS, EDGE: 1850.2MHz ~ 1909.8MHz WCDMA: 1852.4MHz ~ 1907.6MHz
MAX. EIRP POWER	GPRS: 304.08mW (24.84dBm) EDGE: 103.0mW (20.13dBm) WCDMA: 18.2mW (12.59dBm)
MULTI-SLOTS CLASS	12
WCDMA RELEASE VERSION	5/6
ANTENNA TYPE	Patchantenna with 2.0 ± 0.7 dBi gain
I/O PORTS	Refer to users' manual
DATA CABLE	1.45m non-shielded 14 Pin I/O cable without core
ACCESSORY DEVICES	Battery, GSM antenna (Brand: INVAX, Model: AB8919D-7620RS, 3m cable)

NOTE:

1. All models are listed as below.


Brand	Model	Difference
GlobalSat	TR-606B	With battery
	TR-606A	Without battery

2. The EUT uses following battery.

Brand	Li-Polymer
Model	H483448
Rating	12Vdc, 820mAh

3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

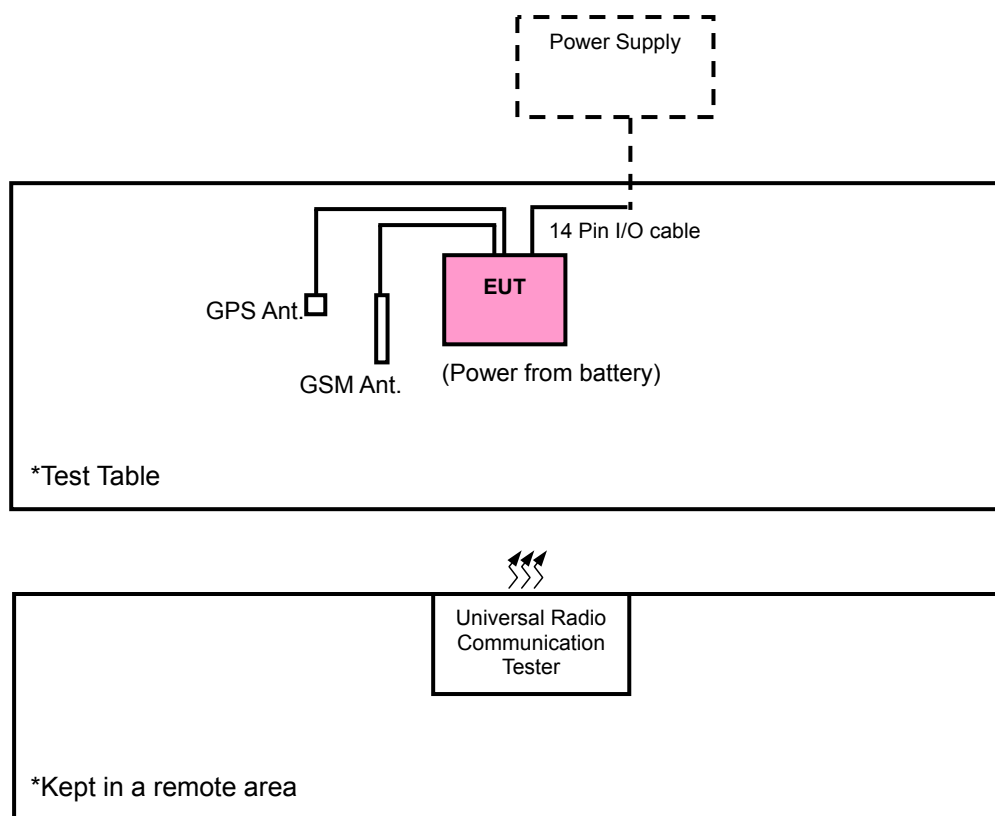

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	POWER SUPPLY	TOP WARD	6306A	713585	NA
2	UNIVERSAL RADIO COMMUNICATION TESTER	R&S	CMU200	101372	NA
3	GPS ANTENNA	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	5m cable

NOTE:

- All power cords of the above support units are non shielded (1.8m).
- Item 3 was provided by the client.

3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-plane for antenna and X-axis for EUT. Following channel(s) was (were) selected for the final test as listed below:

GPRS MODE

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
EIRP	512 to 810	512, 661, 810	GPRS, EDGE
FREQUENCY STABILITY	512 to 810	512	GPRS
OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GPRS, EDGE
BAND EDGE	512 to 810	512, 810	GPRS
CONDUCTED EMISSION	512 to 810	512, 661, 810	GPRS
RADIATED EMISSION BELOW 1 GHz	512 to 810	512	GPRS
RADIATED EMISSION ABOVE 1 GHz	512 to 810	512, 661, 810	GPRS

WCDMA MODE

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
FREQUENCY STABILITY	9262 to 9538	9262	WCDMA
OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
BAND EDGE	9262 to 9538	9262, 9538	WCDMA
CONDUCTED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
RADIATED EMISSION ABOVE 1 GHz	9262 to 9538	9262, 9400, 9538	WCDMA

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	24deg. C, 64%RH	12Vdc	Brad Wu
FREQUENCY STABILITY	24deg. C, 64%RH	12Vdc	Brad Wu
OCCUPIED BANDWIDTH	24deg. C, 64%RH	12Vdc	Brad Wu
BAND EDGE	24deg. C, 64%RH	12Vdc	Brad Wu
CONDUCTED EMISSION	24deg. C, 64%RH	12Vdc	Brad Wu
RADIATED EMISSION	25deg. C, 68%RH	12Vdc	Sun Lin



A D T

3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP


4.1.2 TEST PROCEDURES

CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with GPRS, EDGE & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GPRS1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GPRS 8 (1 Uplink)	22.14	20.89	18.53
GPRS 10 (2 Uplink)	20.38	19.32	17.01
EDGE 8 (1 Uplink)	17.43	16.38	14.07
EDGE 10 (2 Uplink)	17.38	16.34	14.05

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	9.89	9.26	8.99
HSDPA Subtest-1	9.70	9.25	8.86
HSDPA Subtest-2	9.76	9.25	8.91
HSDPA Subtest-3	9.34	8.74	8.41
HSDPA Subtest-4	9.31	8.72	8.37
HSUPA Subtest-1	9.75	9.04	8.74
HSUPA Subtest-2	8.01	7.41	7.01
HSUPA Subtest-3	8.96	8.24	7.97
HSUPA Subtest-4	7.98	7.34	6.69
HSUPA Subtest-5	9.71	9.00	8.54

EIRP POWER (dBm)

GPRS

Channel	Frequency (MHz)	Conduction Power (dBm)	Ant Gain (dBi)	ERP(dBm)	Output Power (mW)
512	1850.2	22.14	2.7	24.84	304.8
661	1880.0	20.89	2.7	23.59	228.6
810	1909.8	18.53	2.7	21.23	132.7

EDGE

Channel	Frequency (MHz)	Conduction Power (dBm)	Ant Gain (dBi)	ERP(dBm)	Output Power (mW)
512	1850.2	17.43	2.7	20.13	103.0
661	1880.0	16.38	2.7	19.08	80.9
810	1909.8	14.07	2.7	16.77	47.5

WCDMA

Channel	Frequency (MHz)	Conduction Power (dBm)	Ant Gain (dBi)	ERP(dBm)	Output Power (mW)
9262	1852.4	9.89	2.7	12.59	18.2
9400	1880.0	9.26	2.7	11.96	15.7
9538	1907.6	8.99	2.7	11.69	14.8

NOTE: ERP= conducted power(dBm) + Antenna gain(dBi)

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

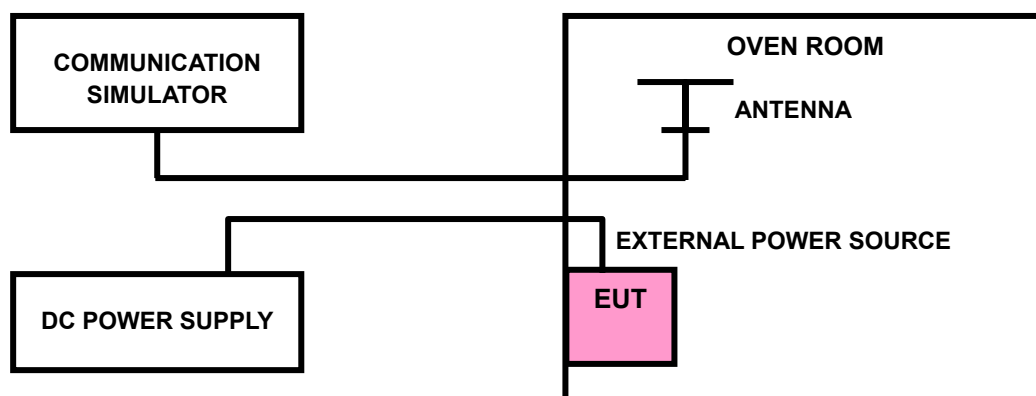

4.2.4 TEST RESULTS

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	GPRS	WCDMA	
13.8	-0.020	-0.018	2.5
10.2	-0.020	-0.016	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 10.2Vdc to 13.8Vdc.

FREQUENCY ERROR vs. TEMPERATURE.


TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	GPRS	WCDMA	
50	-0.021	-0.020	2.5
40	-0.024	-0.023	2.5
30	-0.022	-0.021	2.5
20	-0.020	-0.018	2.5
10	-0.018	-0.020	2.5
0	-0.021	-0.022	2.5
-10	-0.022	-0.022	2.5
-20	-0.023	-0.021	2.5
-30	-0.021	-0.022	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 TEST PROCEDURES


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 TEST SETUP

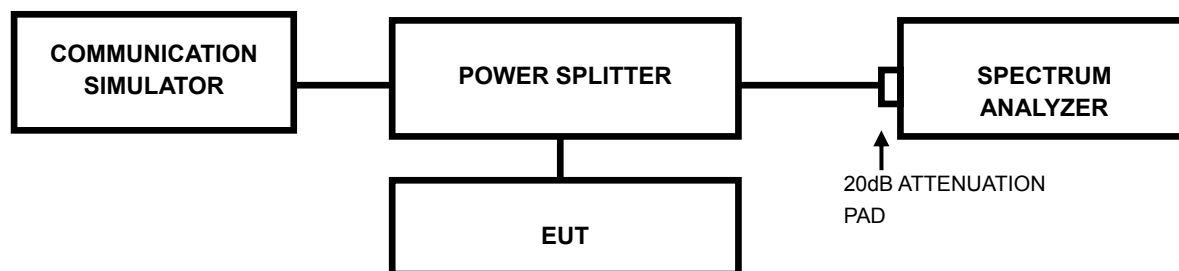

4.3.3 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
		GPRS	EDGE			
512	1850.2	255	250	9262	1852.4	4.17
661	1880.0	250	250	9400	1880.0	4.17
810	1909.8	255	255	9538	1907.6	4.18

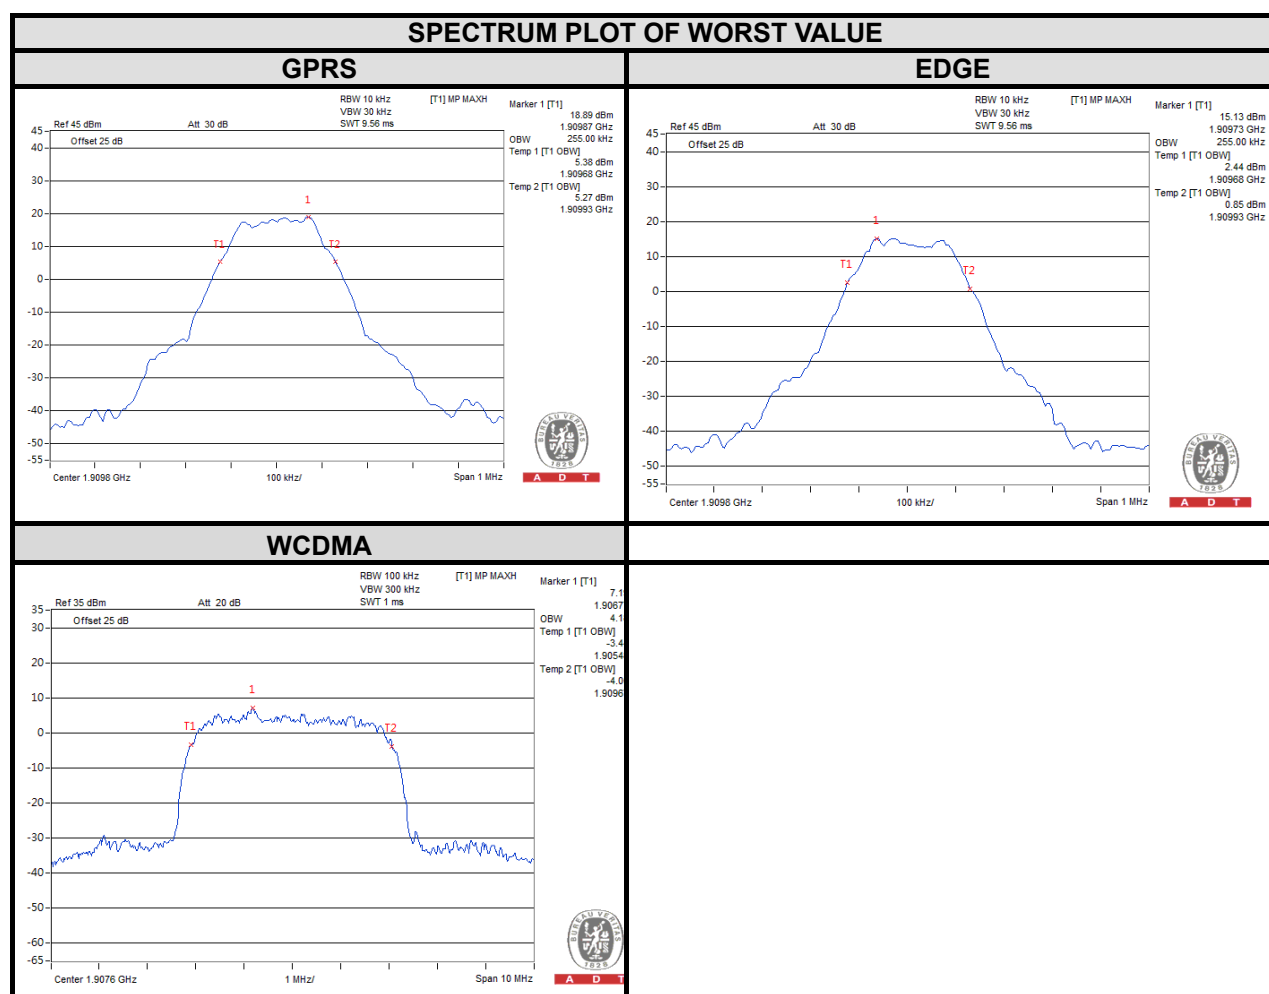


4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.4.2 TEST SETUP

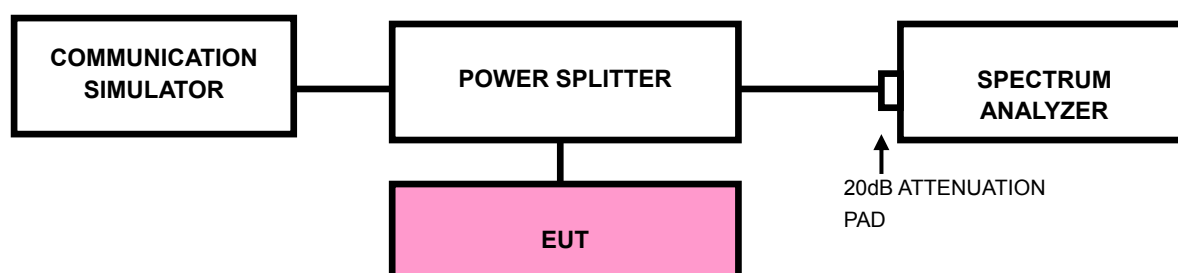

4.4.3 TEST PROCEDURES

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GPRS/ EDGE).
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- Record the max trace plot into the test report.

4.4.4 TEST RESULTS

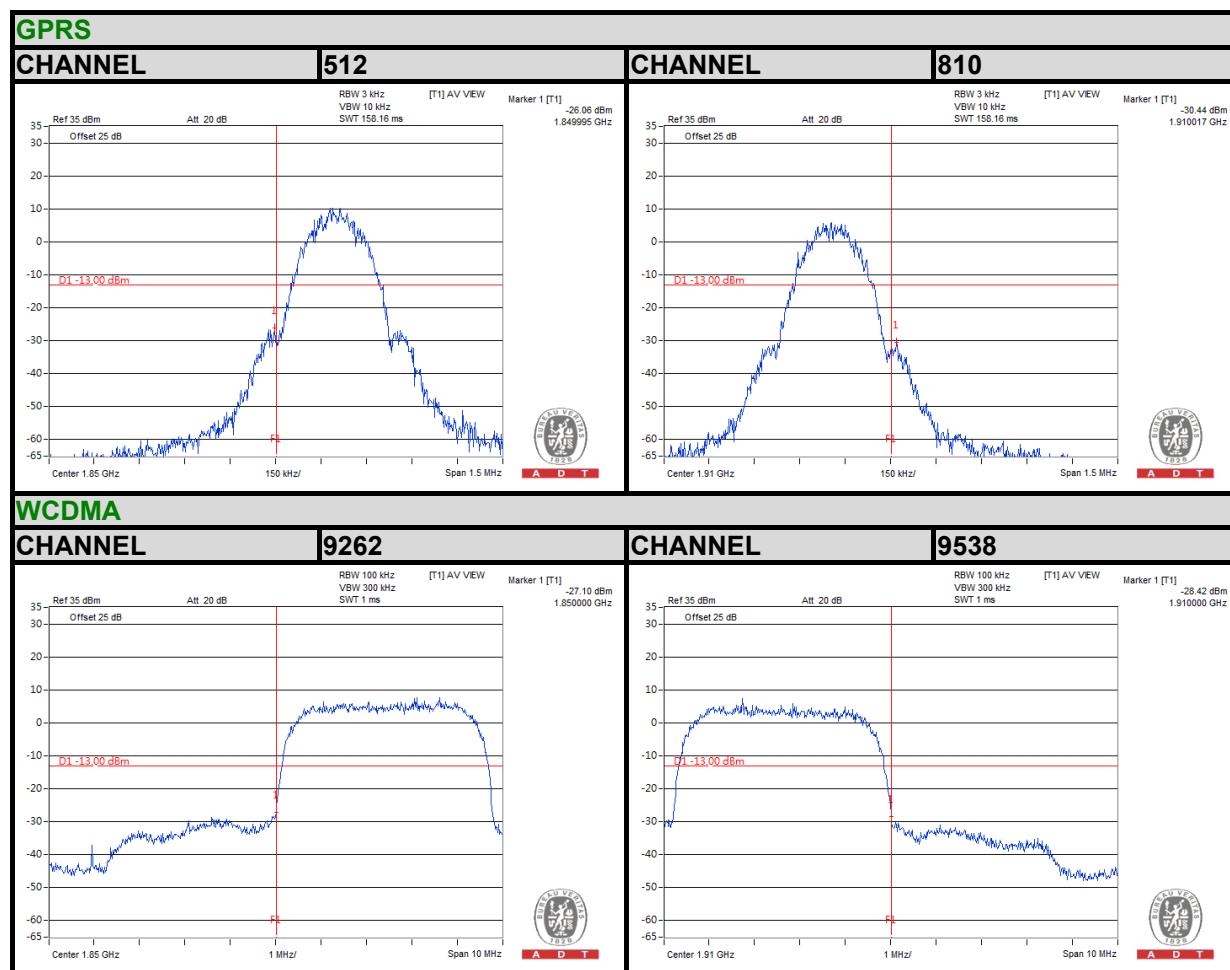

4.5 CONDUCTED SPURIOUS EMISSIONS


4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .


4.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 20GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.5.3 TEST SETUP

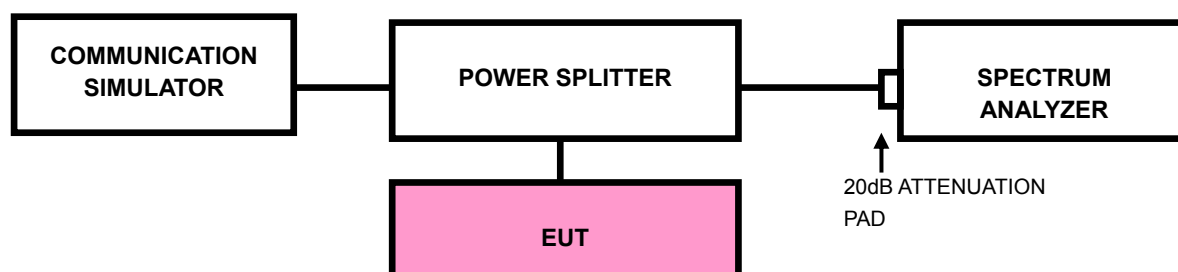

4.5.4 TEST RESULTS

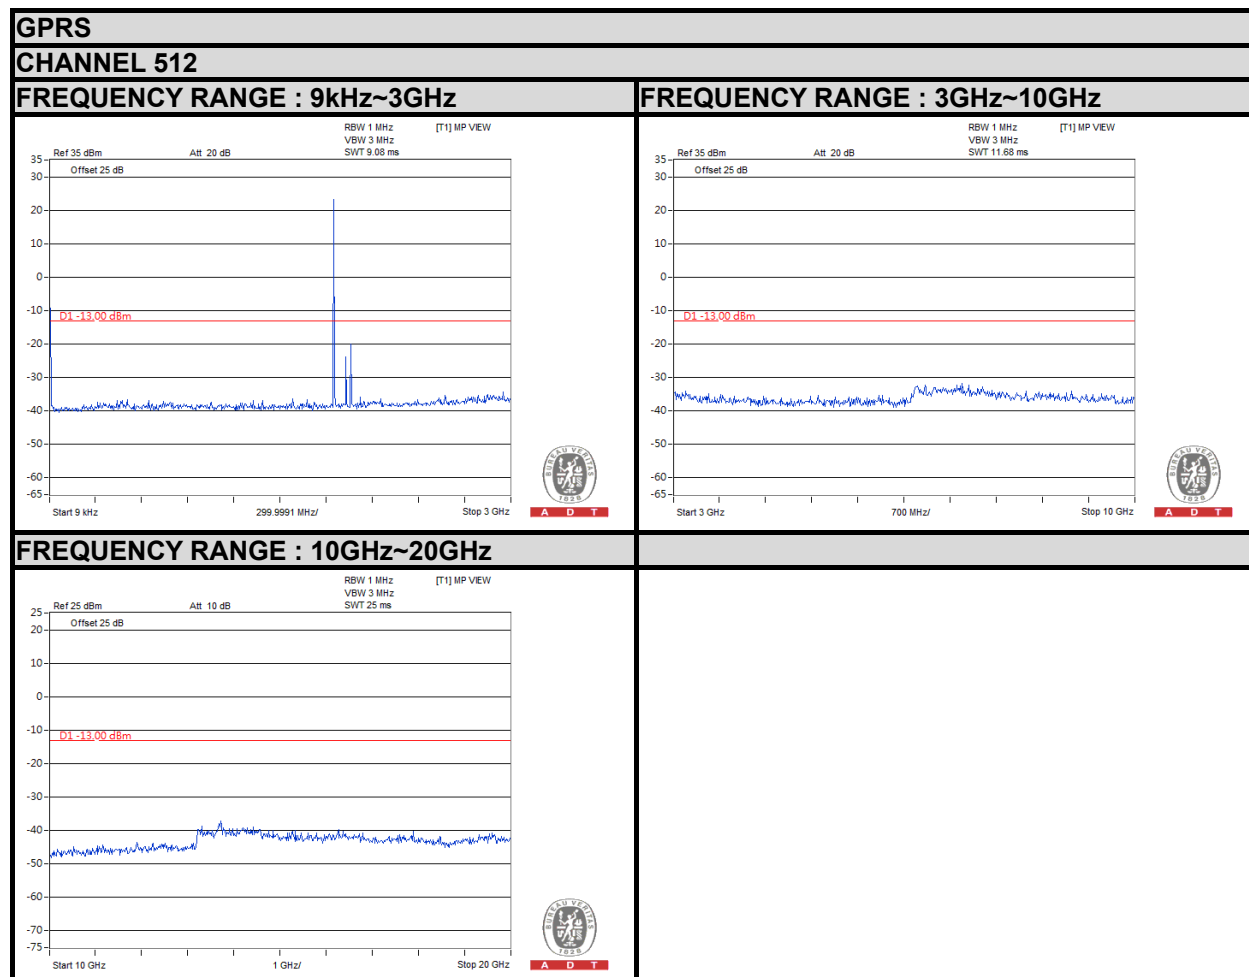




A D T


GPRS

CHANNEL 661


FREQUENCY RANGE : 9kHz~3GHz

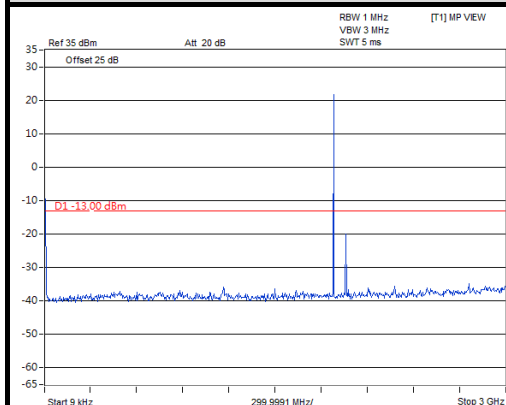

FREQUENCY RANGE : 3GHz~10GHz

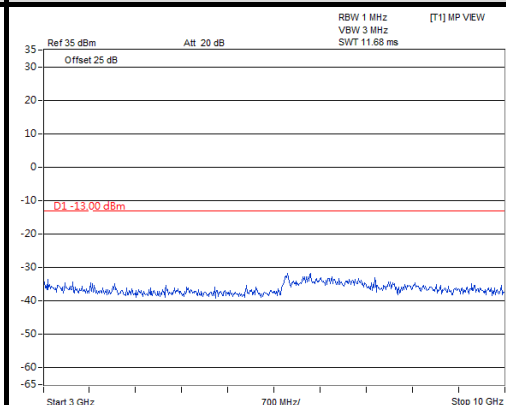

FREQUENCY RANGE : 10GHz~20GHz

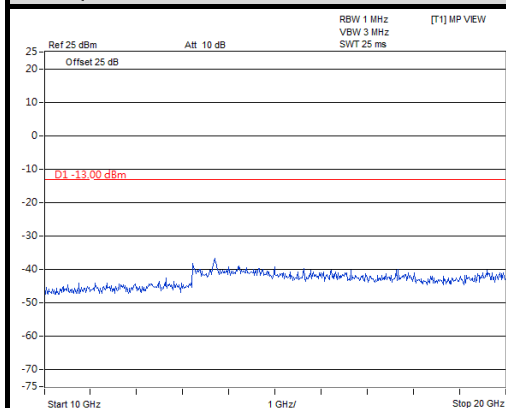




A D T


GPRS

CHANNEL 810


FREQUENCY RANGE : 9kHz~3GHz

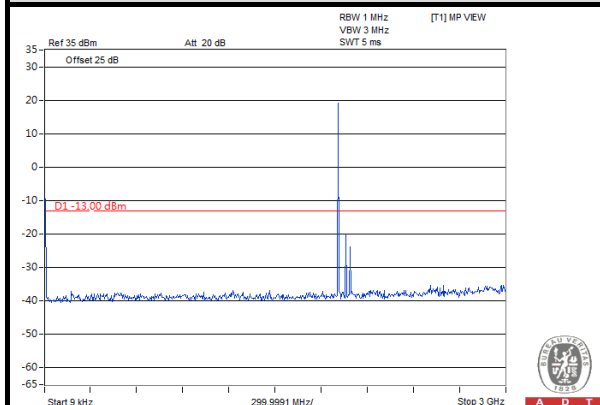

FREQUENCY RANGE : 3GHz~10GHz

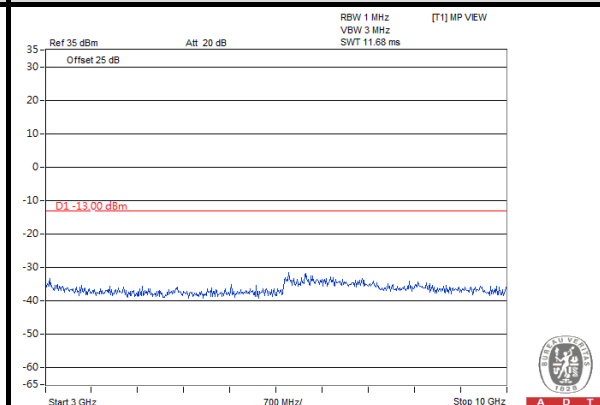


FREQUENCY RANGE : 10GHz~20GHz

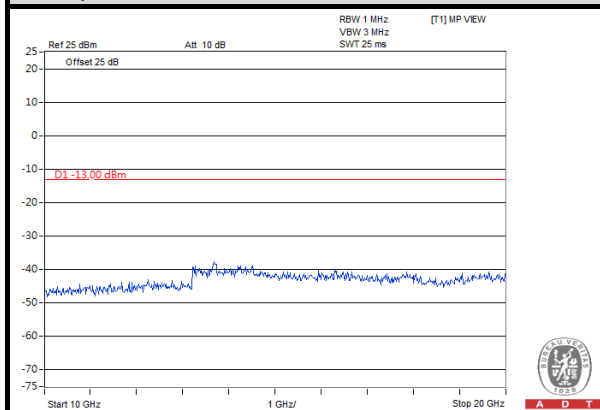


WCDMA

CHANNEL 9262


FREQUENCY RANGE : 9kHz~3GHz

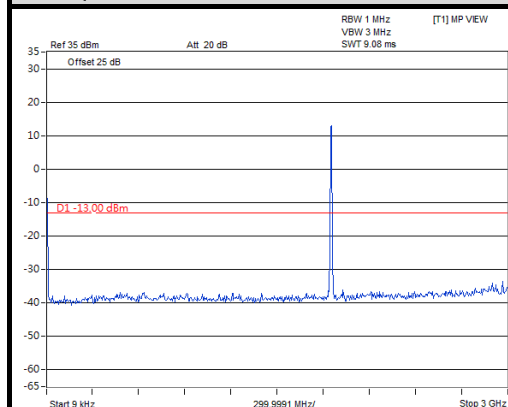

FREQUENCY RANGE : 3GHz~10GHz

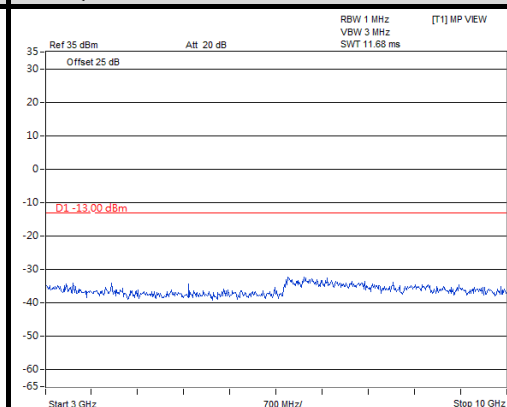


FREQUENCY RANGE : 10GHz~20GHz

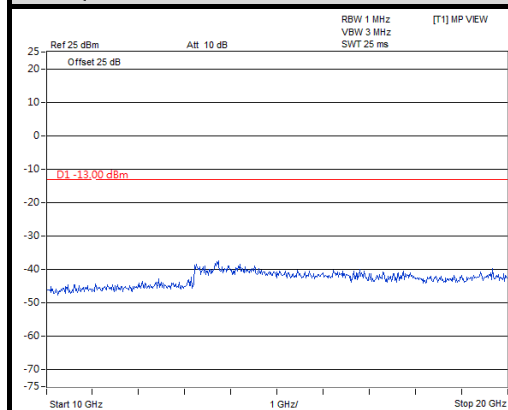


WCDMA

CHANNEL 9400


FREQUENCY RANGE : 9kHz~3GHz

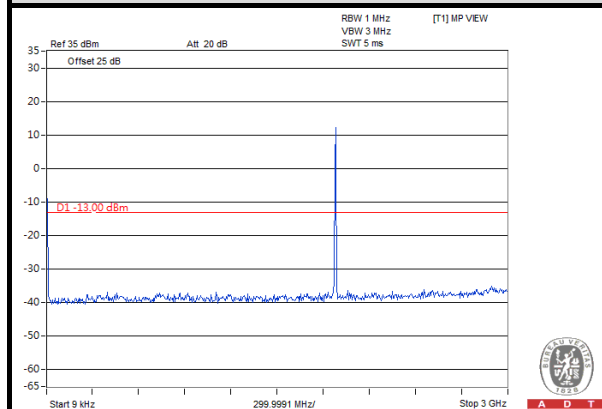

FREQUENCY RANGE : 3GHz~10GHz

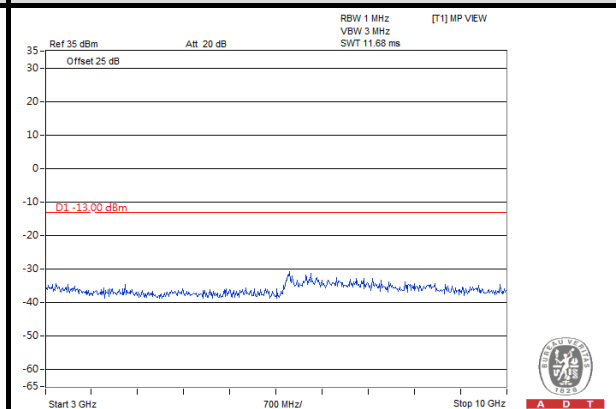


FREQUENCY RANGE : 10GHz~20GHz

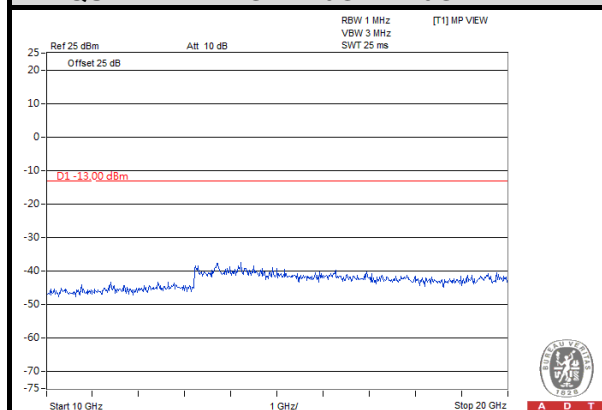


WCDMA

CHANNEL 9538


FREQUENCY RANGE : 9kHz~3GHz

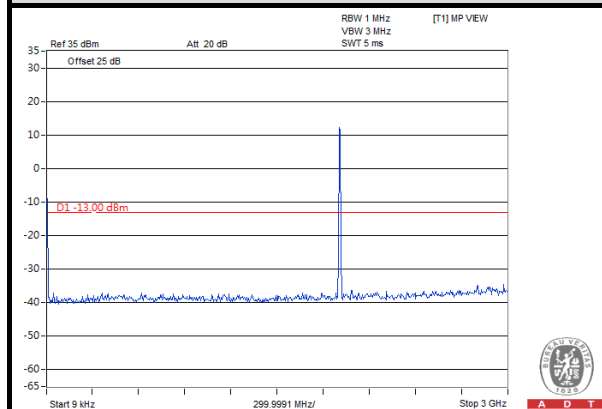

FREQUENCY RANGE : 3GHz~10GHz

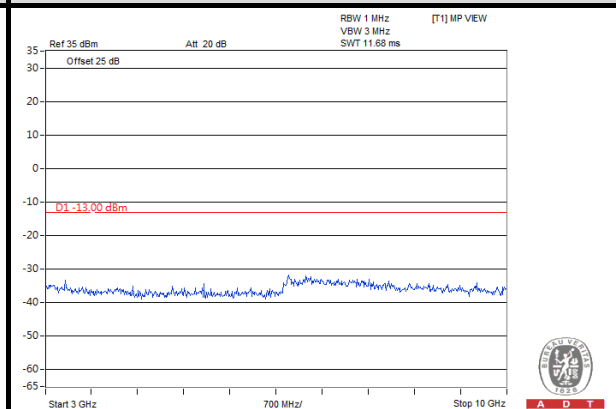

FREQUENCY RANGE : 10GHz~20GHz

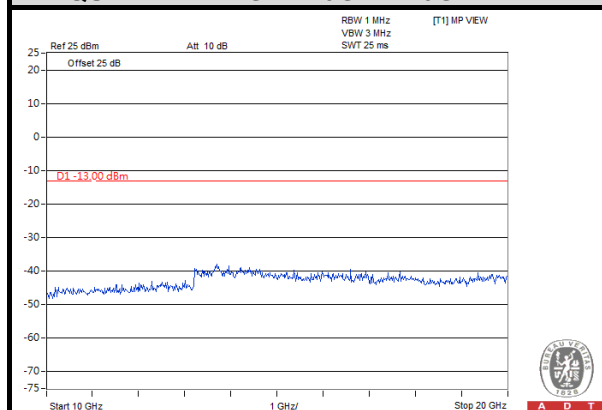

4.6 RADIATED EMISSION MEASUREMENT

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.6.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}.$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.6.3 DEVIATION FROM TEST STANDARD

No deviation

4.6.4 TEST SETUP

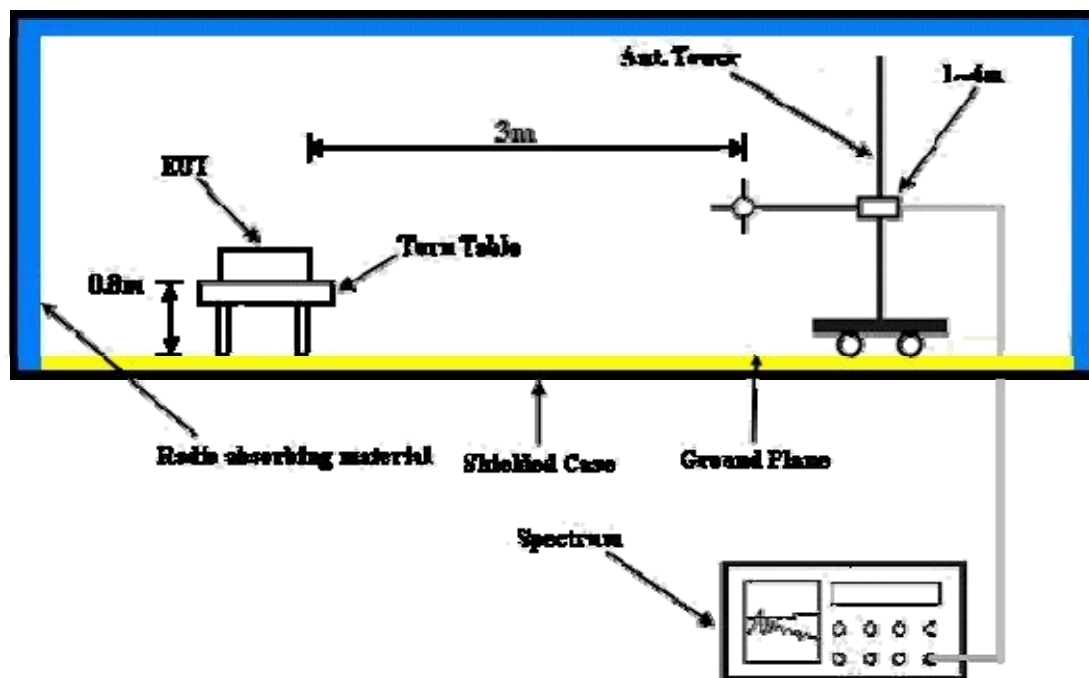

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.5 TEST RESULTS

Below 1GHz

GPRS

MODE	TX channel 512	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	12Vdc	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH
TESTED BY	Sun Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	39.70	-53.05	-37.81	-11.41	-49.22	-13.00	-36.22
2	88.20	-41.97	-49.42	0.63	-48.79	-13.00	-35.79
3	171.62	-50.72	-56.70	1.85	-54.85	-13.00	-41.85
4	237.58	-44.53	-55.19	5.41	-49.78	-13.00	-36.78
5	293.84	-47.94	-56.92	5.16	-51.76	-13.00	-38.76
6	427.70	-59.25	-64.12	5.16	-58.96	-13.00	-45.96
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	39.70	-51.11	-46.60	-11.41	-58.01	-13.00	-45.01
2	92.08	-67.21	-62.89	1.08	-61.81	-13.00	-48.81
3	125.06	-73.20	-70.01	0.00	-70.01	-13.00	-57.01
4	171.62	-69.83	-71.45	1.85	-69.60	-13.00	-56.60
5	229.82	-78.45	-76.97	5.43	-71.54	-13.00	-58.54
6	293.84	-77.43	-76.54	5.16	-71.38	-13.00	-58.38

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

Above 1GHz

GPRS

MODE	Channel 512	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	12Vdc	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH
TESTED BY	Sun Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-56.43	-54.71	7.16	-47.55	-13.00	-34.55
2	5550.60	-54.81	-46.86	6.78	-40.08	-13.00	-27.08
3	7400.80	-60.22	-46.84	4.31	-42.53	-13.00	-29.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3700.40	-56.10	-54.91	7.16	-47.75	-13.00	-34.75
2	5550.60	-52.78	-47.82	6.78	-41.04	-13.00	-28.04
3	7400.80	-60.47	-47.63	4.31	-43.32	-13.00	-30.32

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	Channel 661	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	12Vdc	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH
TESTED BY	Sun Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-54.77	-52.79	7.10	-45.69	-13.00	-32.69
2	5640.00	-56.50	-48.34	6.77	-41.57	-13.00	-28.57
3	7520.00	-59.89	-46.40	4.23	-42.17	-13.00	-29.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-52.50	-51.24	7.10	-44.14	-13.00	-31.14
2	5640.00	-55.62	-50.40	6.77	-43.63	-13.00	-30.63
3	7520.00	-60.41	-47.17	4.23	-42.94	-13.00	-29.94

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	Channel 810	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	12Vdc	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH
TESTED BY	Sun Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3819.60	-55.10	-52.88	7.06	-45.82	-13.00	-32.82
2	5729.40	-59.10	-50.70	6.74	-43.96	-13.00	-30.96
3	7639.20	-60.88	-47.21	4.20	-43.01	-13.00	-30.01
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3819.60	-54.59	-53.28	7.06	-46.22	-13.00	-33.22
2	5729.40	-57.29	-51.78	6.74	-45.04	-13.00	-32.04
3	7639.20	-60.71	-47.25	4.20	-43.05	-13.00	-30.05

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

WCDMA

MODE	Channel 9262	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	12Vdc	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH
TESTED BY	Sun Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.80	-60.20	-58.46	7.16	-51.30	-13.00	-38.30
2	5557.20	-61.24	-53.28	6.78	-46.50	-13.00	-33.50
3	7409.60	-60.92	-47.53	4.30	-43.23	-13.00	-30.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3704.80	-58.45	-57.26	7.16	-50.10	-13.00	-37.10
2	5557.20	-61.00	-56.03	6.78	-49.25	-13.00	-36.25
3	7409.60	-60.95	-48.07	4.30	-43.77	-13.00	-30.77

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	Channel 9400	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	12Vdc	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH
TESTED BY	Sun Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-59.10	-57.12	7.10	-50.02	-13.00	-37.02
2	5640.00	-61.10	-52.94	6.77	-46.17	-13.00	-33.17
3	7520.00	-62.65	-49.16	4.23	-44.93	-13.00	-31.93
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3760.00	-60.60	-59.34	7.10	-52.24	-13.00	-39.24
2	5640.00	-63.44	-58.22	6.77	-51.45	-13.00	-38.45
3	7520.00	-60.20	-46.96	4.23	-42.73	-13.00	-29.73

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

MODE	Channel 9538	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	12Vdc	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH
TESTED BY	Sun Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.20	-58.65	-56.44	7.06	-49.38	-13.00	-36.38
2	5722.80	-60.10	-51.72	6.74	-44.98	-13.00	-31.98
3	7630.40	-60.80	-47.14	4.20	-42.94	-13.00	-29.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	3815.20	-60.41	-59.10	7.06	-52.04	-13.00	-39.04
2	5722.80	-61.61	-56.12	6.74	-49.38	-13.00	-36.38
3	7630.40	-58.89	-45.44	4.20	-41.24	-13.00	-28.24

REMARKS:

1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



A D T

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

**A D T**

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---