

***Electromagnetic Emissions Test Report
and
Application for Grant of Equipment Authorization
pursuant to
FCC Part 15, Subpart C Specifications for an
Intentional Radiator, Industry Canada
Radio Standards Specification 210
and FCC Part 15, Subpart B Specifications for a
Receiver on the
Lasershield Systems, Inc.
Model: Wireless Detection Unit (WDU)***

FCC ID: RIHW0013300


GRANTEE: Lasershield Systems, Inc.
5931 Sea Lion Place, Suite 114
Carlsbad, CA. 92008

TEST SITE: Elliott Laboratories, Inc.
684 W. Maude Avenue
Sunnyvale, CA 94086

REPORT DATE: October 13, 2003

FINAL TEST DATE: September 25, 2003

AUTHORIZED SIGNATORY:

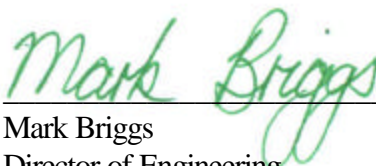
Mark Briggs
Director of Engineering



Elliott Laboratories, Inc. is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this report. This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

TABLE OF CONTENTS

COVER PAGE.....	1
TABLE OF CONTENTS	2
SCOPE.....	3
OBJECTIVE.....	3
STATEMENT OF COMPLIANCE.....	4
TEST RESULTS SUMMARY.....	5
MEASUREMENT UNCERTAINTIES	6
EQUIPMENT UNDER TEST (EUT) DETAILS	7
GENERAL.....	7
ENCLOSURE	7
SUPPORT EQUIPMENT.....	7
EUT OPERATION	7
TEST SITE.....	8
GENERAL INFORMATION.....	8
CONDUCTED EMISSIONS CONSIDERATIONS.....	8
RADIATED EMISSIONS CONSIDERATIONS	8
MEASUREMENT INSTRUMENTATION.....	9
RECEIVER SYSTEM.....	9
INSTRUMENT CONTROL COMPUTER.....	9
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	9
FILTERS/ATTENUATORS.....	10
ANTENNAS.....	10
ANTENNA MAST AND EQUIPMENT TURNABLE	10
INSTRUMENT CALIBRATION.....	10
TEST PROCEDURES	11
EUT AND CABLE PLACEMENT	11
CONDUCTED EMISSIONS.....	11
RADIATED EMISSIONS	11
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	12
CONDUCTED EMISSIONS SPECIFICATION LIMITS, SECTION 15.207 & 15.107(A).....	12
CONDUCTED EMISSIONS SPECIFICATION LIMITS, RSS 210.....	12
FUNDAMENTAL AND HARMONIC LIMITS 15.231 (B) / RSS 210 TABLE 1	13
FUNDAMENTAL AND HARMONIC LIMITS 15.231 (E)/RSS 210 TABLE 4.....	14
RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209 / RSS 210 TABLE 3.....	14
RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.109(A) (RECEIVER).....	15
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS.....	15
SAMPLE CALCULATIONS - RADIATED EMISSIONS	16
EXHIBIT 1: Test Equipment Calibration Data	1
EXHIBIT 2: Test Data Log Sheets.....	2
EXHIBIT 3: Test Configuration Photographs.....	3
EXHIBIT 4: Theory of Operation	4
EXHIBIT 5: Proposed FCC ID Label & Label Location.....	5
EXHIBIT 6: Detailed Photographs.....	6
EXHIBIT 7: Installation Guide.....	7
EXHIBIT 8: Block Diagram.....	8
EXHIBIT 9: Schematic Diagrams.....	9

SCOPE

An electromagnetic emissions test has been performed on the Lasershield Systems, Inc. model Wireless Detection Unit (WDU) pursuant to Subpart C of Part 15 of FCC Rules for intentional radiators, Industry Canada Radio Standards Specification RSS-210 for Low Power, License-Exempt Radio Communication Devices and Subpart B of Part 15 of FCC Rules for digital devices. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-1992 as outlined in Elliott Laboratories test procedures.

The transmitter and digital device detailed above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC and Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Lasershield Systems, Inc. model Wireless Detection Unit (WDU) and therefore apply only to the tested sample. The sample was selected and prepared by Dennis Perry of Lasershield Systems, Inc.

OBJECTIVE

The primary objective of the manufacturer is compliance with Subparts B and C of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators and digital devices and Industry Canada RSS-210 for Low Power, License-Exempt Radio Communication Devices. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules and Industry Canada Radio Standards Procedure RSP-100.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

STATEMENT OF COMPLIANCE

The tested sample of Lasershield Systems, Inc. model Wireless Detection Unit (WDU) complied with the requirements of Subpart C of Part 15 of the FCC Rules for low power intentional radiators and Industry Canada specification RSS 210 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands).

The tested sample of Lasershield Systems, Inc. model Wireless Detection Unit (WDU) complied with the requirements of Subpart B of Part 15 of the FCC Rules for digital devices.

Maintenance of FCC compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

TEST RESULTS SUMMARY

FCC Part 15 Section	RSS 210 Section	Description	Comments	Result
15.207 / 15.107		AC Conducted Emissions, 0.15 – 30 MHz	-6.7dB @ 0.436MHz	Complies
	6.6 / 7.4	AC Conducted emissions 0.45 – 30 MHz	-3.3dB @ 0.872MHz	Complies
15.109	-	Radiated Spurious Emissions (Digital Device) 30 – 1000 MHz	-10.6dB @ 70.833MHz	Complies (Note 2)
15.231 (a) (1)	6.1.1(a) (1)	Duration of manually activated transmission	All transmissions manually activated have a duration of less than 5 seconds from the instant the button is released	Complies
15.231 (a) (2)	6.1.1(a) (2)	Duration of automatically activated transmission	All transmissions automatically activated are less than 5 seconds in duration.	Complies (Note 1)
15.231 (a) (3)	6.1.1(a) (3)	Transmissions at predetermined / regular intervals are not permitted	Predetermined/regular transmissions are only polling transmissions to determine system integrity of transmitters with a periodic rate of less than one transmission per hour and duration of less than one second.	Complies (Note 1)
15.231 (a) (4)	6.1.1(a) (4)	Pendency of transmissions used during emergencies involving fire, security, and safety of life		N/A
15.231 (b)	6.1.1(b) / Table 1	Transmitter Radiated Emissions, 418 MHz	75.6 dBuV/m @ 3m (-4.6dB)	Complies
15.231 (b)	6.1.1(b) / Table 1	Transmitter Radiated Spurious Emissions, 30-4180 MHz	33.4dBuV/m @ 1254.0MHz (-26.8dB)	Complies
15.231 (c)	6.1.1 (c)	Bandwidth	Measured bandwidth was 410 kHz. The maximum permitted is 0.25% of the fundamental frequency (1MHz)	Complies
15.231 (d)	6.1.1 (d)	Frequency Stability	N/A for devices operating at 418 MHz	N/A
15.231 (e)	6.1.1 (e)			
15.109	7.3	Receiver Spurious Emissions	The device is not a receiver	N/A

Note 1 – Refer to the operational description included with this application for detailed description and timing diagrams for transmission duration.

Note 2 – WDU was tested simultaneously with the MAU

MEASUREMENT UNCERTAINTIES

ISO Guide 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.6

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Lasershield Systems, Inc. model Wireless Detection Unit (WDU) is one part of a wireless intruder detection system with the capability to dial in to a remote security service. The Wireless Detection Units (WDU) contains a 418MHz transmitter and a motion sensor that will transmit to the MAU when the motion sensor detects motion.

The sample was received on September 23, 2003 and tested on September 25, 2003. The EUT consisted of the following component(s):

Manufacturer	Model	Description	Serial Number	FCC ID
Lasershield Systems	MAU	Master Alarm Unit		LASDT01BB001310
MEI AH Electrical & Industry (HK) Limited	ED24468	Power supply		
Oriental Hero	OH-1048A1000500U	Power Supply		

ENCLOSURE

The WDU enclosure is primarily constructed of injection molded plastic. It measures approximately 7.6 cm wide by 16.5 cm deep by 19 cm high.

SUPPORT EQUIPMENT

No remote support equipment was used during emissions testing. The equipment under test has no signal interface ports and only a dc input port intended for connection to an AC-DC adapter.

EUT OPERATION

For measurements of emissions from the transmitters the WDU was configured to continuously transmit the panic alarm which is a pulsed signal.

For measurements of emissions from the digital device the WDU was configured in its normal operating mode without any transmissions being triggered.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken on September 25, 2003 at the Elliott Laboratories Open Area Test Site #2 located at 684 West Maude Avenue, Sunnyvale, California. The test site contains separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4-1992. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

MEASUREMENT INSTRUMENTATION**RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors programmed into the test receivers.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES**EUT AND CABLE PLACEMENT**

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

RADIATED EMISSIONS

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions, which have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS, SECTION 15.207 & 15.107(a)

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

CONDUCTED EMISSIONS SPECIFICATION LIMITS, RSS 210

Frequency Range (MHz)	Class B Limit (uV)	Class B Limit (dBuV)
0.450 to 30.000	250	48

FUNDAMENTAL AND HARMONIC LIMITS 15.231 (b) / RSS 210 Table 1

The table below shows the limits for both the Fundamental and Harmonic emissions for each frequency band of operation detailed in Section 15.231 (b) for control signals.

Operating Frequency (MHz)	Field strength (microvolts/m)	Harmonics (microvolts/m)
70 - 130	1250	125
130 - 174	1250 - 3750	125 - 375
174 – 260	3750	375
260 – 470	3750 – 12,500	375 - 1250
Above 470	12,500	1250

FUNDAMENTAL AND HARMONIC LIMITS 15.231 (e)/RSS 210 Table 4

The table below shows the limits for both the Fundamental and Harmonic emissions (that do not fall in restricted bands) for each frequency band of operation detailed in Section 15.231 (e) for data signals.

Operating Frequency (MHz)	Field strength (microvolts/m)	Harmonics (microvolts/m)
70 - 130	500	50
130 - 174	500 - 1500	50 - 150
174 - 260	1500	150
260 - 470	1500 - 5000	150 - 500
Above 470	5000	500

RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209 / RSS 210 Table 3

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
0.009-0.490	$2400/F_{\text{KHz}} @ 300\text{m}$	$67.6-20*\log_{10}(F_{\text{KHz}}) @ 300\text{m}$
0.490-1.705	$24000/F_{\text{KHz}} @ 30\text{m}$	$87.6-20*\log_{10}(F_{\text{KHz}}) @ 30\text{m}$
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.109(a) (RECEIVER)

The table below shows the limits for emissions from the receiver.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

EXHIBIT 1: Test Equipment Calibration Data

1 Page

Radiated Emissions, 30 - 1000 MHz, 23-Sep-03**Engineer: Mhill**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Biconical Antenna, 30-300 MHz	3110B	363	24	5/28/2002	5/28/2004
EMCO	Log Periodic Antenna, 0.2-2 GHz	3148	1347	12	10/30/2002	10/30/2003
Rohde & Schwarz	Test Receiver, 20-1300MHz	ESVP	273	12	2/13/2003	2/13/2004

Conducted Emissions, 23-Sep-03**Engineer: jgonzalez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	372	12	7/17/2003	7/17/2004
Rohde & Schwarz	Test Receiver, 0.009-30 MHz	ESH3	274	12	1/24/2003	1/24/2004
Solar Electronics Co	LISN	8028-50-TS-24-BNC support	904	12	8/7/2003	8/7/2004

Radiated Emissions, 30 - 6500 MHz, 25-Sep-03**Engineer: Chris**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Horn Antenna, D. Ridge 1-18GHz	3115	487	12	4/24/2003	4/24/2004
EMCO	Log Periodic Antenna, 0.2-2 GHz	3148	1321	12	3/31/2003	3/31/2004
Filtek	High Pass Filter, 1GHz	HP12/1000-5BA	956	12	3/11/2003	3/11/2004
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	12	1/24/2003	1/24/2004
Rohde & Schwarz	Test Receiver, 0.009-2000 MHz	ESN	1332	12	7/24/2003	7/24/2004
Hewlett Packard	Spectrum Analyzer, 9KHz - 22GHz	8593EM	1319	12	11/19/2002	11/19/2003

EXHIBIT 2: Test Data Log Sheets

ELECTROMAGNETIC EMISSIONS

TEST LOG SHEETS

AND

MEASUREMENT DATA

T52793 18 Pages



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
		Account Manager:	Danni Olivas
Contact:			
Emissions Spec:	FCC 15B; 15.231; RSS210	Class:	B
Immunity Spec:	-	Environment:	-

EMC Test Data

For The

LaserShield

Model

MAU, WDU and KeyFob

Date of Last Test: 9/25/2003



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
		Account Manager:	Danni Olivas
Contact:	Enter contact name on cover shee		
Emissions Spec:	FCC 15B; 15.231; RSS210	Class:	B
Immunity Spec:	-	Environment:	-

EUT INFORMATION

General Description

The EUT is a wireless intruder detection system with the capability to dial in to a remote security service. The system consists of a Master Alarm Unit, a Wireless Detection Unit and a Key Chain Remote (KR).

The Master Alarm Unit (MAU) contains a 418MHz receiver and integrated modem. It is intended for desktop use. It is powered from an external AC-DC adapter.

The Wireless Detection Units (WDU) contains a 418MHz transmitter and a motion sensor that will transmit to the MAU when the motion sensor detects motion.

The Key Chain Remote is a hand-held 418MHz transmitter than can be used to wirelessly activate or deactivate the Master Alarm Unit.

Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Lasershield Systems	MAU	Master Alarm Unit		DoC
Lasershield Systems	WDU	Wireless Detection Unit		RIHW0013300
Lasershield Systems	Keyfob (KR)	Key Chain Remote		RIHK001150
MEI AH Electrical & Industry (HK) Limited	ED24468	Power supply		
Oriental Hero	OH-1048A1000500U	Power Supply		

Other EUT Details

There are two power supplies available for use with both the MAU and the WDU. They are the MEI AH and Oriental Heroe models listed in the **Equipment UnderTest** table.

All transmissions by the keyfob are manually triggered and do not occur at predetermined intervals. All transmissions from the keyfob are less than 5 seconds in duration.

Transmissions by the WDU can be at predetermined intervals (security system integrity transmissions) or are triggered by events that do not occur at predetermined intervals. The system integrity transmissions occur at predetermined intervals of at least one hour and are less than 1 second long and are of two types - a general heartbeat signal that indicates the WDU is operational and a low-battery warning that indicates a possible fault with the system. All other transmissions have a duration of no more than 5 seconds and are triggered by any of the following actions/events: Pressing the panic button; powering the unit on or off; motion sensor detecting movement.

All transmissions are at 418 MHz and use FSK modulation. They all meet the requirements of FCC Part 15.231(a) and RSS 210 section 6.1.1(a).



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
		Account Manager:	Danni Olivas
Contact:	Enter contact name on cover shee		
Emissions Spec:	FCC 15B; 15.231; RSS210	Class:	B
Immunity Spec:	-	Environment:	-

EUT Enclosure

The MAU enclosure is primarily constructed of injection molded plastic. It measures approximately 21 cm wide by 20 cm deep by 6.6 cm high.

The WDU enclosure is primarily constructed of injection molded plastic. It measures approximately 7.6 cm wide by 16.5 cm deep by 19 cm high.

The KeyFob enclosure is primarily constructed of injection molded plastic. It measures approximately 4.5 cm wide by 2.3 cm deep by 6.3 cm high.

Modification History

Mod. #	Test	Date	Modification
1			None made during testing

Modifications applied are assumed to be used on subsequent tests unless otherwise stated as a further modification.



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
		Account Manager:	Danni Olivas
Contact:	Enter contact name on cover shee		
Emissions Spec:	FCC 15B; 15.231; RSS210	Class:	B
Immunity Spec:	-	Environment:	-

Test Configuration #1

Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
-		Telephone		
-		Telephone		

Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None				

Interface Cabling and Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
MAU Phone Out	Telephone	Phone line	Unshielded	3
MAU Line In	Telephone	Phone line	Unshielded	3
MAU DC	AC-DC Adapter	2 wire	Unshielded	
MAU AC-DC Adapter AC	AC outlet			
WDU DC	AC-DC Adapter	2 wire	Unshielded	
WDU AC-DC Adapter AC	AC outlet			

EUT Operation During Emissions

For measurements of emissions from the digital device and the receiver the MAU and WDU were operational (powered on). The WDU was not transmitting during these tests.

For measurements of emissions from the transmitters the WDU and KeyFob were configured to transmit continuously.

For measurements of the timing of the transmissions the WDU and KeyFob were configured to transmit in their intended operational mode.



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
		Account Manager:	Danni Olivas
Contact:	Enter client contact on cover sheet		
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Radiated Emissions

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/25/2003
Test Engineer: Mark Briggs
Test Location: SVOATS #2

Config. Used: 1
Config Change: The WDU was tested alone
EUT Voltage: 120V/60Hz

General Test Configuration

The EUT was located on the center of the turntable for radiated emissions testing.

The measurement antenna was located 3m from the EUT.

Note, for testing above 1 GHz, the FCC specifies the limit as an average measurement. In addition, the FCC states that the peak reading of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

Ambient Conditions:
Temperature: 21 °C
Rel. Humidity: 63 %

Summary of Results

Run #	Test Performed	Limit	Result	Comment
1	Fundamental	15.231(a) / RSS 210	Pass	-4.6dB @ 418.000MHz
2	Spurious	15.231(a) / RSS 210	Pass	-26.8dB @ 1254.0MHz
3	Bandwidth	15.231 / RSS 210	Pass	410kHz

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
Contact:	Enter client contact on cover sheet	Account Manager:	Danni Olivas
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Run #1: Fundamental Field Strength

Frequency	Level	Pol	15.231(a)		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
418.000	75.6	v	80.2	-4.6	Avg	278	1.4	
418.000	69.1	h	80.2	-11.1	Avg	316	1.0	
418.000	78.7	v	100.2	-21.5	Pk	278	1.4	
418.000	72.4	h	100.2	-27.8	Pk	316	1.0	

Run #2: Field Strength of Spurious Emissions

All readings peak detector versus average limit

Frequency	Level	Pol	15.231(a)		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1254.000	33.4	V	60.2	-26.8	PK	0	1.0	Peak reading average limit
1254.000	32.7	H	60.2	-27.5	PK	0	1.0	Peak reading average limit
1672.000	24.3	H	54.0	-29.7	Avg	0	1.0	In a restricted band
1672.000	24.2	V	54.0	-29.8	Avg	0	1.0	In a restricted band
836.000	27.0	H	60.2	-33.2	Avg	0	1.0	Not in a restricted band
836.000	26.8	V	60.2	-33.4	Pk	0	1.0	Not in a restricted band
1672.000	36.7	V	74.0	-37.3	Pk	0	1.0	In a restricted band
1672.000	35.2	H	74.0	-38.8	Pk	0	1.0	In a restricted band

Note 1: No significant signals observed above the 4th harmonic (1672 MHz).

Run #3: 26dB Bandwidth


11:48:10 25 SEP 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRΔ 410 kHz
.26 dB

LOG REF 67.0 dBμV

10
dB/
#ATN
0 dB

DL
32.0
dBμV
MA SB
SC FC
CORR

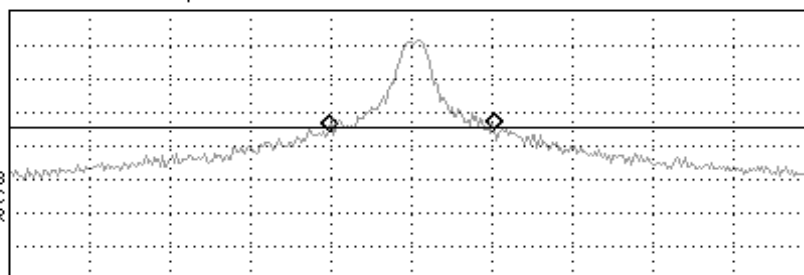

CENTER 418.000 MHz
RL #IF BW 30 kHz

AVG BW 30 kHz

SPAN 2.000 MHz
SWP 20.0 msec

Note 1: The 26dB bandwidth is 410 kHz as shown in the plot above. The maximum permitted is 0.25% of the fundamental frequency (1MHz)



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
		Account Manager:	Danni Olivas
Contact:	Enter client contact on cover sheet		
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Radiated Emissions

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/23/2003

Test Engineer: Mark Hill

Test Location: SVOATS #3

Config. Used: 1

Config Change: None

EUT Voltage: 120V/60Hz

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated emissions testing.

On the OATS, the measurement antenna was located 3 meters from the EUT for the measurement range 30 - 1000 MHz.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions:

Temperature:	24 °C
Rel. Humidity:	60 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
2	RE, 30 - 1000MHz, Maximized Emissions	FCC B w/Oriental Hero PSU	Pass	-10.6dB @ 70.833MHz
4	RE, 30 - 1000MHz, Maximized Emissions	FCC B W/MEI AH PSU	Pass	-12.0dB @ 64.910MHz

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
Contact:	Enter client contact on cover sheet	Account Manager:	Danni Olivas
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Run #1: Preliminary Radiated Emissions, 30-1000 MHz

The MAU was in receive mode and the WDU was in standby mode (not transmitting)

Power Supplies: Oriental Hero Electronics, m/n OH-1048A1000500U

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
70.833	29.4	V	40.0	-10.6	QP	170	1.0	
52.857	27.0	V	40.0	-13.0	QP	150	1.0	
52.085	24.6	V	40.0	-15.4	QP	155	1.0	
60.900	21.8	V	40.0	-18.2	QP	266	1.0	
135.000	22.1	V	43.5	-21.4	QP	187	1.1	
143.000	20.3	V	43.5	-23.2	QP	262	1.0	
139.000	19.4	V	43.5	-24.1	QP	195	1.0	

Run #2 Maximized Radiated Emissions from Run #1

The MAU and the WDU were in standby mode

Power Supplies: Oriental Hero Electronics, m/n OH-1048A1000500U

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
70.833	29.4	V	40.0	-10.6	QP	170	1.0	
52.857	27.1	V	40.0	-12.9	QP	145	1.0	
52.085	25.2	V	40.0	-14.8	QP	164	1.0	
60.900	21.8	V	40.0	-18.2	QP	266	1.0	
135.000	24.8	V	43.5	-18.7	QP	213	1.1	
143.000	23.0	V	43.5	-20.5	QP	262	1.0	



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
Contact:	Enter client contact on cover sheet	Account Manager:	Danni Olivas
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Run #3: Preliminary Radiated Emissions, 30-1000 MHz

The MAU and the WDU were in standby mode

Power Supplies: MEI AH Electrical, m/n: ED24468

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
64.910	26.6	V	40.0	-13.4	QP	230	1.0	
64.009	25.6	V	40.0	-14.4	QP	172	1.0	
38.874	22.9	V	40.0	-17.1	QP	212	1.0	
32.993	21.3	V	40.0	-18.7	QP	153	1.3	
257.015	25.3	H	46.0	-20.7	QP	174	1.8	
37.916	19.0	V	40.0	-21.0	QP	104	2.0	

Run #4: Maximized Radiated Emissions from Run #3

The MAU and the WDU were in standby mode

Power Supplies: MEI AH Electrical, m/n: ED24468

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
64.910	28.0	V	40.0	-12.0	QP	230	1.0	
64.009	26.9	V	40.0	-13.1	QP	207	1.0	
38.874	22.9	V	40.0	-17.1	QP	212	1.0	
37.916	22.2	V	40.0	-17.8	QP	121	1.0	
32.993	22.0	V	40.0	-18.0	QP	153	1.3	
257.015	25.3	H	46.0	-20.7	QP	174	1.8	



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
Contact:	Enter client contact on cover sheet	Account Manager:	Danni Olivas
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Conducted Emissions - Power Ports

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/25/2003
Test Engineer: Mark Briggs
Test Location: SVOATS #2

Config. Used: 1
Config Change: None
EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table, 40 cm from a vertical coupling plane and 80cm from the LISN.

Ambient Conditions:
Temperature: 24 °C
Rel. Humidity: 60 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	AC CE - WDU w/MEI AH	FCC 15.207 / 15.107	Pass	-8.5dB @ 0.810MHz
1	AC CE - WDU w/MEI AH	RSS 210	Pass	-4.6dB @ 0.810MHz
2	AC CE - WDU w/Oriental	FCC 15.207 / 15.107	Pass	-6.7dB @ 0.436MHz
2	AC CE - WDU w/Oriental	RSS 210	Pass	-3.3dB @ 0.872MHz
3	AC CE - MAU w/MEI AH	FCC 15.107	Pass	-9.4dB @ 0.171MHz
3	AC CE - MAU w/MEI AH	RSS 210	Pass	-8.2dB @ 0.682MHz
4	AC CE - MAU w/Oriental	FCC 15.107	Pass	-5.4dB @ 0.678MHz
4	AC CE - MAU w/Oriental	RSS 210	Fail	+1.5dB @ 0.678MHz

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
Contact:	Enter client contact on cover sheet	Account Manager:	Danni Olivas
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

WDU in Transmitt Mode

Power Supply: MEI AH Electrical, m/n: ED24468

Frequency	Level	AC	FCC B		Detector	Comments
MHz	dB μ V	Line	Limit	Margin	QP/Ave	
0.810	37.5	Line	46.0	-8.5	Average	
0.171	44.5	Line	54.9	-10.4	Average	
0.810	43.4	Line	56.0	-12.6	QP	
0.810	32.1	Neutral	46.0	-13.9	Average	
0.171	50.7	Line	64.9	-14.2	QP	
0.171	49.3	Neutral	64.9	-15.6	QP	
1.884	29.9	Line	46.0	-16.1	Average	
0.171	37.7	Neutral	54.9	-17.2	Average	
0.810	38.7	Neutral	56.0	-17.3	QP	
0.285	31.6	Line	50.7	-19.1	Average	
1.884	36.5	Line	56.0	-19.5	QP	
2.967	26.4	Line	46.0	-19.6	Average	
1.884	25.2	Neutral	46.0	-20.8	Average	
0.285	39.5	Line	60.7	-21.2	QP	
2.967	34.3	Line	56.0	-21.7	QP	
0.285	28.4	Neutral	50.7	-22.3	Average	
0.285	38.0	Neutral	60.7	-22.7	QP	
2.967	22.0	Neutral	46.0	-24.0	Average	
1.884	31.3	Neutral	56.0	-24.7	QP	
2.967	28.7	Neutral	56.0	-27.3	QP	

Frequency	Level	AC	RSS 210		Detector	Comments
MHz	dB μ V	Line	Limit	Margin	QP/Ave	
0.810	43.4	Line	48.0	-4.6	QP	
0.810	38.7	Neutral	48.0	-9.3	QP	
1.884	36.5	Line	48.0	-11.5	QP	
2.967	34.3	Line	48.0	-13.7	QP	
1.884	31.3	Neutral	48.0	-16.7	QP	
2.967	28.7	Neutral	48.0	-19.3	QP	



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
Contact:	Enter client contact on cover sheet	Account Manager:	Danni Olivas
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

WDU in Transmitt Mode

Power Supply Oriental Hero Electronics, m/n OH-1048A1000500U

Frequency	Level	AC	FCC B		Detector	Comments
MHz	dBμV	Line	Limit	Margin	QP/Ave	
0.436	50.4	Line	57.1	-6.7	QP	
0.436	48.6	Neutral	57.1	-8.5	QP	
0.436	38.4	Line	47.1	-8.7	Average	
0.436	37.8	Neutral	47.1	-9.3	Average	
1.220	34.9	Line	46.0	-11.1	Average	EUT and broadcast signal
0.872	44.7	Line	56.0	-11.3	QP	
1.220	42.2	Line	56.0	-13.8	QP	EUT and broadcast signal
4.612	41.1	Line	56.0	-14.9	QP	
0.872	30.0	Line	46.0	-16.0	Average	
1.220	29.6	Neutral	46.0	-16.4	Average	EUT and broadcast signal
0.740	29.5	Neutral	46.0	-16.5	Average	
0.740	39.2	Neutral	56.0	-16.8	QP	
1.220	39.0	Neutral	56.0	-17.0	QP	EUT and broadcast signal
1.961	38.9	Line	56.0	-17.1	QP	
4.564	35.3	Neutral	56.0	-20.7	QP	
2.000	34.0	Neutral	56.0	-22.0	QP	
4.612	23.6	Line	46.0	-22.4	Average	
1.961	23.5	Line	46.0	-22.5	Average	
2.000	22.4	Neutral	46.0	-23.6	Average	
4.564	19.0	Neutral	46.0	-27.0	Average	

Frequency	Level	AC	RSS 210		Detector	Comments
MHz	dBμV	Line	Limit	Margin	QP/Ave	
0.872	44.7	Line	48.0	-3.3	QP	
1.220	42.2	Line	48.0	-5.8	QP	EUT and broadcast signal
4.612	41.1	Line	48.0	-6.9	QP	
0.740	39.2	Neutral	48.0	-8.8	QP	
1.220	39.0	Neutral	48.0	-9.0	QP	EUT and broadcast signal
1.961	38.9	Line	48.0	-9.1	QP	
4.564	35.3	Neutral	48.0	-12.7	QP	
2.000	34.0	Neutral	48.0	-14.0	QP	



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
Contact:	Enter client contact on cover sheet	Account Manager:	Danni Olivas
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Run #3: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

MAU in Receive Mode

Power Supply: MEI AH Electrical, m/n: ED24468

Frequency	Level	AC	FCC B		Detector	Comments
MHz	dB μ V	Line	Limit	Margin	QP/Ave	
0.171	45.5	Line	54.9	-9.4	Average	
0.228	41.5	Line	52.5	-11.0	Average	
0.171	52.3	Line	64.9	-12.6	QP	
2.050	33.2	Line	46.0	-12.8	Average	
0.682	33.0	Line	46.0	-13.0	Average	
0.171	50.6	Neutral	64.9	-14.3	QP	
0.228	37.3	Neutral	52.5	-15.2	Average	
0.171	39.4	Neutral	54.9	-15.5	Average	
0.682	39.8	Line	56.0	-16.2	QP	
2.050	39.7	Line	56.0	-16.3	QP	
0.626	29.7	Neutral	46.0	-16.3	Average	
0.228	45.7	Line	62.5	-16.8	QP	
2.050	29.1	Neutral	46.0	-16.9	Average	
0.228	41.9	Neutral	62.5	-20.6	QP	
2.050	35.0	Neutral	56.0	-21.0	QP	
0.626	34.5	Neutral	56.0	-21.5	QP	

Frequency	Level	AC	RSS 210		Detector	Comments
MHz	dB μ V	Line	Limit	Margin	QP/Ave	
0.682	39.8	Line	48.0	-8.2	QP	
2.050	39.7	Line	48.0	-8.3	QP	
0.626	34.5	Neutral	48.0	-13.5	QP	
2.050	35.0	Neutral	48.0	-13.0	QP	



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
Contact:	Enter client contact on cover sheet	Account Manager:	Danni Olivas
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Run #4: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

MAU with Oriental Power Supply

Frequency MHz	Level dBμV	AC Line	FCC B		Detector QP/Ave	Comments
			Limit	Margin		
0.678	40.6	Line	46.0	-5.4	Average	
0.408	51.8	Line	57.7	-5.9	QP	
0.678	49.5	Line	56.0	-6.5	QP	EUT + ambient broadcast signal
0.408	51.1	Neutral	57.7	-6.6	QP	
0.404	41.0	Line	47.8	-6.8	Average	
0.404	40.2	Neutral	47.8	-7.6	Average	
0.461	48.9	Neutral	56.7	-7.8	QP	
0.458	48.7	Line	56.7	-8.0	QP	
2.173	47.7	Line	56.0	-8.3	QP	
0.456	38.4	Neutral	46.8	-8.4	Average	
4.734	47.4	Line	56.0	-8.6	QP	
0.678	47.1	Neutral	56.0	-8.9	QP	EUT + ambient broadcast signal
0.856	46.9	Line	56.0	-9.1	QP	
0.678	36.6	Neutral	46.0	-9.4	Average	
0.458	37.3	Line	46.7	-9.4	Average	
1.219	36.5	Line	46.0	-9.5	Average	
1.219	45.8	Line	56.0	-10.2	QP	
2.173	35.1	Line	46.0	-10.9	Average	
0.856	34.7	Line	46.0	-11.3	Average	
2.178	43.9	Neutral	56.0	-12.1	QP	
1.500	33.8	Line	46.0	-12.2	Average	
1.219	43.6	Neutral	56.0	-12.4	QP	
4.734	43.5	Neutral	56.0	-12.5	QP	
1.500	43.4	Line	56.0	-12.6	QP	
2.178	33.3	Neutral	46.0	-12.7	Average	
1.219	32.8	Neutral	46.0	-13.2	Average	
0.856	42.6	Neutral	56.0	-13.4	QP	
4.734	32.3	Line	46.0	-13.7	Average	
1.480	40.9	Neutral	56.0	-15.1	QP	
0.856	29.9	Neutral	46.0	-16.1	Average	
4.734	28.6	Neutral	46.0	-17.4	Average	
0.592	38.1	Line	56.0	-17.9	QP	
1.480	28.1	Neutral	46.0	-17.9	Average	
0.592	37.1	Neutral	56.0	-18.9	QP	
0.592	27.1	Line	46.0	-18.9	Average	
0.592	24.3	Neutral	46.0	-21.7	Average	



EMC Test Data

Client:	LaserShield	Job Number:	J52784
Model:	MAU, WDU and KeyFob	T-Log Number:	T52793
Contact:	Enter client contact on cover sheet	Account Manager:	Danni Olivas
Spec:	FCC 15B; 15.231; RSS210	Class:	B

Run #4 (continued - RSS 210 limits)

Frequency	Level	AC	RSS 210		Detector	Comments
MHz	dBμV	Line	Limit	Margin	QP/Ave	
0.678	49.5	Line	48.0	1.5	QP	Note 1, EUT + ambient broadcast signal
0.461	48.9	Neutral	48.0	0.9	QP	Note 1
0.458	48.7	Line	48.0	0.7	QP	Note 1
2.173	47.7	Line	48.0	-0.3	QP	
4.734	47.4	Line	48.0	-0.6	QP	
0.678	47.1	Neutral	48.0	-0.9	QP	EUT + ambient broadcast signal
0.856	46.9	Line	48.0	-1.1	QP	
1.219	45.8	Line	48.0	-2.2	QP	
2.178	43.9	Neutral	48.0	-4.1	QP	
1.219	43.6	Neutral	48.0	-4.4	QP	
4.734	43.5	Neutral	48.0	-4.5	QP	
1.500	43.4	Line	48.0	-4.6	QP	
0.856	42.6	Neutral	48.0	-5.4	QP	
1.480	40.9	Neutral	48.0	-7.1	QP	
0.592	38.1	Line	48.0	-9.9	QP	
0.592	37.1	Neutral	48.0	-10.9	QP	


Note 1: Signal was a broadband signal (average level was more than 6dB below the QP level). Although the FCC allows for a -13dB correction factor to be applied to the Quasi-Peak reading Industry Canada rules (RSS 210 and RSS 212) do not appear to allow this relaxation.

Elliott Labs

Conducted Emissions on AC

25. Sep 03 09:19

Operator: Mark Briggs
Comment: Lasershield
WDU with MEI AH Power Supply
FCC B/ RSS 210
J52784 / T52793 Run 1
120V / 60Hz
Neutral

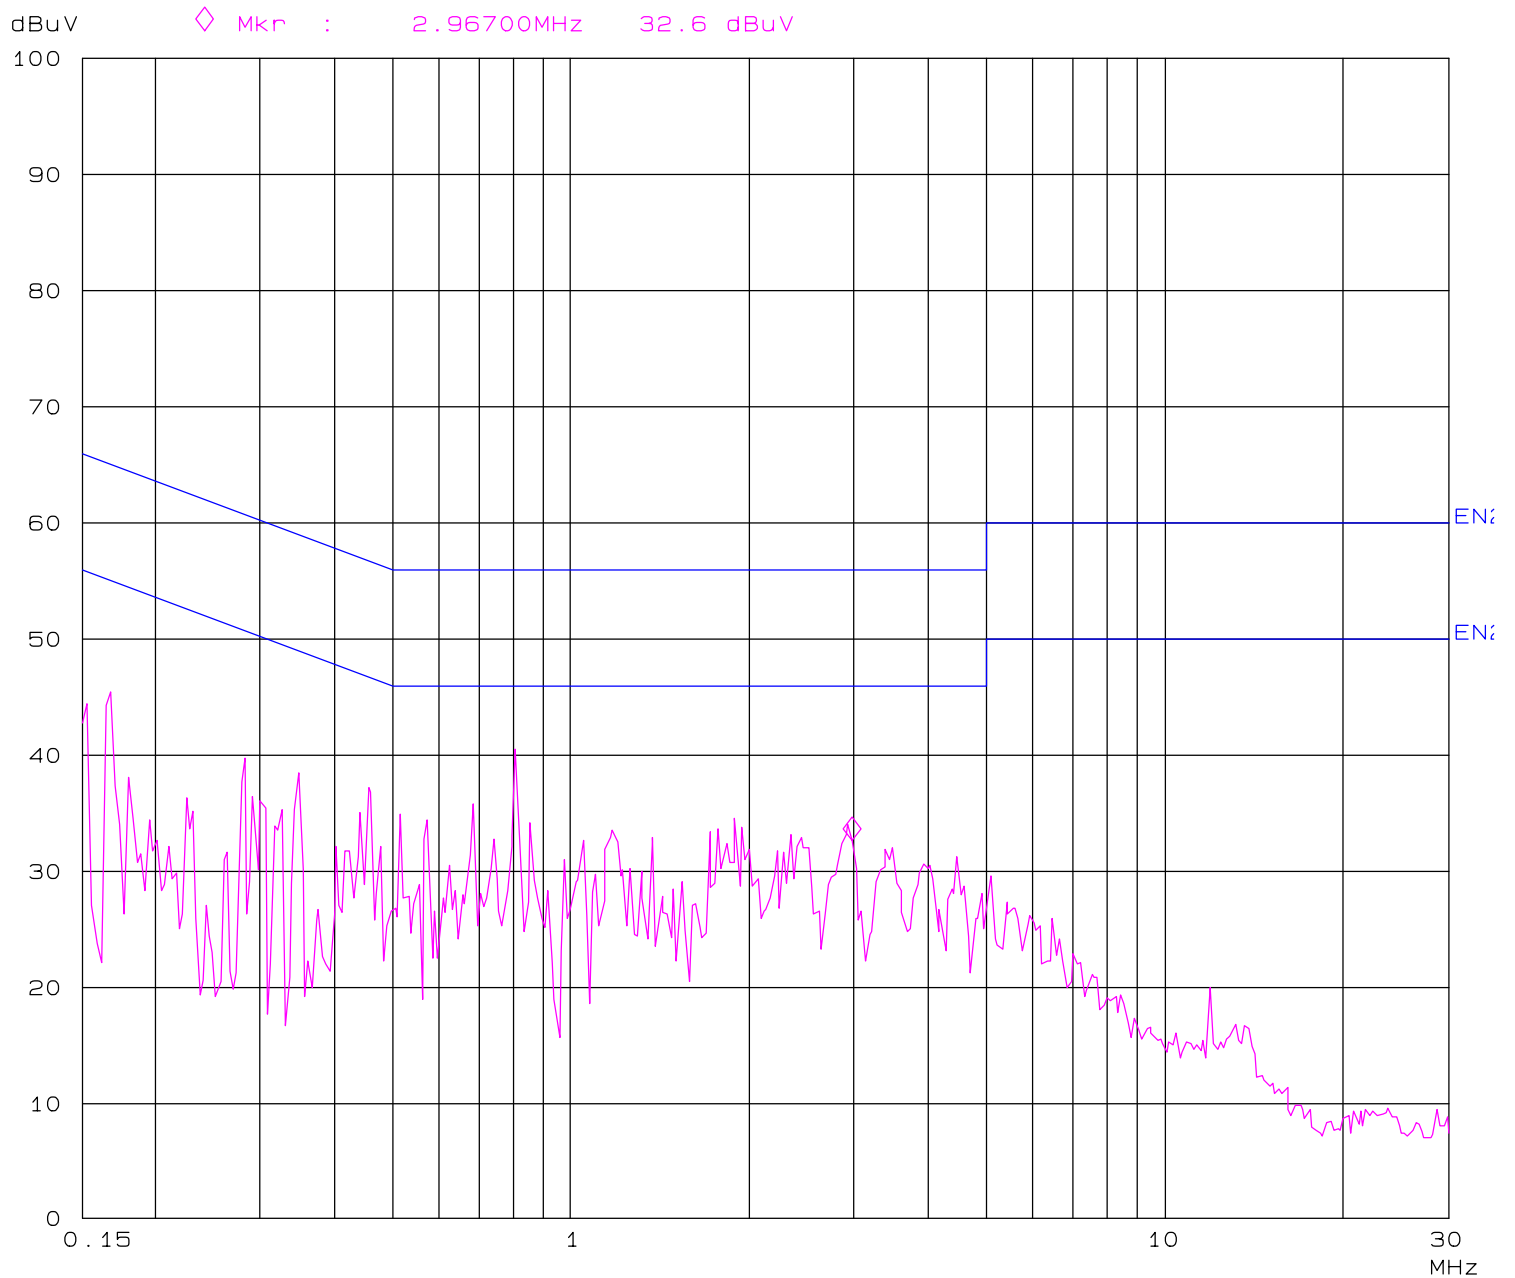


Elliott Labs

Conducted Emissions on AC

25. Sep 03 08:43

Operator: Mark Briggs
Comment: Lasershield
WDU with Orinetal Hero Power Supply
FCC B/ RSS 210
J52784 / T52793
120V / 60Hz
line

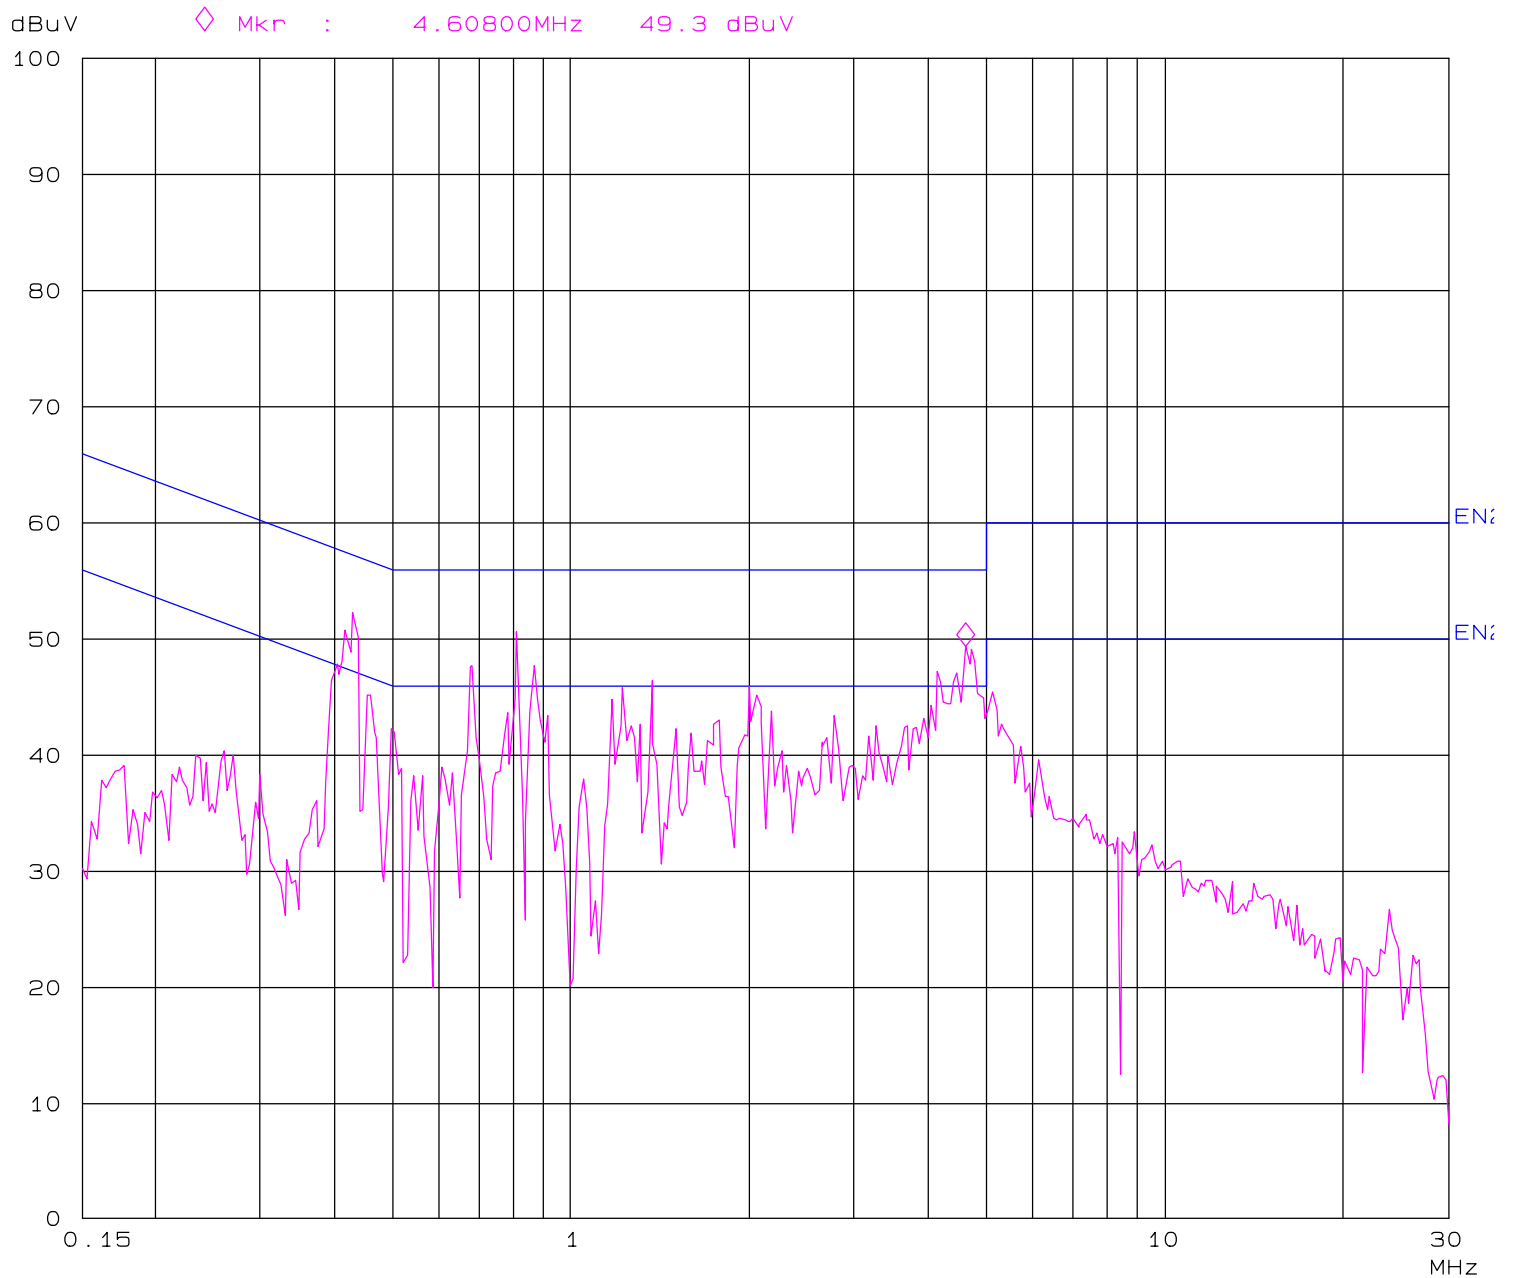

Elliott Labs

Conducted Emissions on AC

25. Sep 03 09:53

Operator: Mark Briggs
Comment: Lasershield
MAU with Oriental Power Supply
FCC B/ RSS 210
J52784 / T52793 Run 4
120V / 60Hz
Neutral

Note - there is no graph for run #3

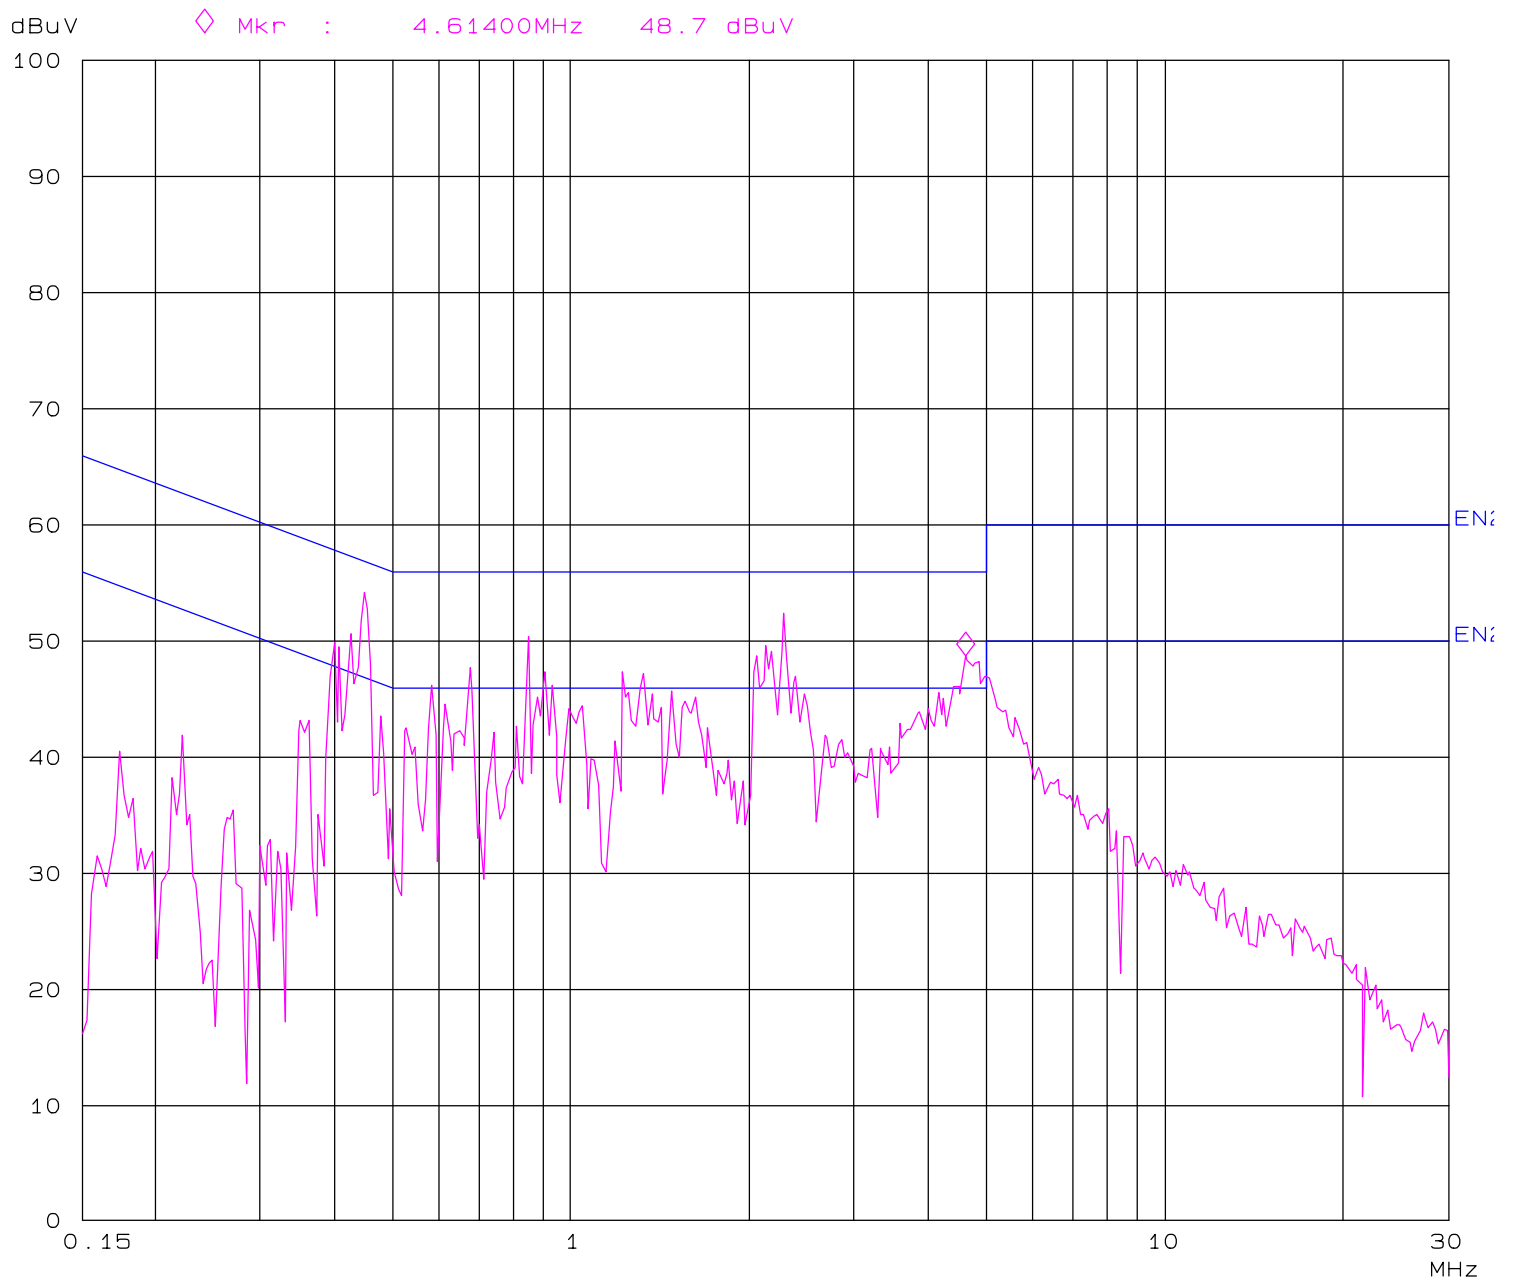


EXHIBIT 3: Test Configuration Photographs

6 Pages

EXHIBIT 4: Theory of Operation
Lasershield Systems, Inc. Model Wireless Detection Unit (WDU)

Uploaded as A Separate Attachment

EXHIBIT 5: Proposed FCC ID Label & Label Location

Uploaded as A Separate Attachment

EXHIBIT 6: Detailed Photographs
Lasershield Systems, Inc. Model Wireless Detection Unit (WDU)

Uploaded as A Separate Attachment

EXHIBIT 7: Installation Guide
Lasershield Systems, Inc. Model Wireless Detection Unit (WDU)

Uploaded as A Separate Attachment

EXHIBIT 8: Block Diagram
Lasershield Systems, Inc. Model Wireless Detection Unit (WDU)

Uploaded as A Separate Attachment

EXHIBIT 9: Schematic Diagrams
Lasershield Systems, Inc. Model Wireless Detection Unit (WDU)

Uploaded as A Separate Attachment