

No. 1 Workshop, M-10, Middle Section, Science & Technology Park,

District Shenzhen, China 518057

Telephone: +86 (0) 755 2601 2053 Report No.: SZEMO09020050801 Fax: +86 (0) 755 2671 0594

Email: +86 (0) 755 2671 0594 Page: 1 of 39

FCC ID: RIIBTS28V

# TEST REPORT

Application No.: SZEMO090200508RF

**Applicant:** UNIFAT TECHNOLOGY LTD. **Manufacturer/ Factory:** UNIFAT TECHNOLOGY LTD.

FCC ID: RIIBTS28V

**Fundamental Carrier** 

Frequency: 2.402GHz to 2.480GHz

**Equipment Under Test (EUT):** 

Name: BT SPEAKERPHONE (WITH TTS)

Model: BTS28V Trade Mark: BlueRadio

Standards: FCC PART 15 Subpart C

ANSI C63.4 2003

Date of Receipt: 20 February 2009

**Date of Test:** 27 February to 10 April 2009

Date of Issue: 10 April 2009

Test Result : PASS \*

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above. Please refer to section 2 of this report for further detail.

Authorized Signature:

Robinson Lo Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEMO09020050801

Page: 2 of 39

# 2 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Antenna Requirement	FCC PART 15	Section 15.247 (c)	PASS
Occupied Bandwidth	FCC PART 15	Section 15.247 (a1)	PASS
Carrier Frequencies Separated	FCC PART 15	Section 15.247(a)(1)	PASS
Hopping Channel Number	Hopping Channel Number FCC PART 15		PASS
Dwell Time	FCC PART 15	Section 15.247(a)(1)(iii)	PASS
Pseudorandom Frequency Hopping Sequence	FCC PART 15	Section 15.247(a)(1)	PASS
Maximum Peak Output Power	FCC PART 15	Section 15.247(b)(1)	PASS
RF Exposure Compliance Requirement	FCC PART 15	15.247(b)(4)& T 15 TCB Exclusion List (7 July 2002)	
Radiated Emission	FCC PART 15	Section 15.209 , 15.247(d)&15.205	PASS

#### Remark:

1. The EUT was tested installing fully charged batteries

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 3 of 39

## 3 Contents

			Page
2	TE	ST SUMMARY	
3	CC	ONTENTS	3
4	GE	ENERAL INFORMATION	4
	4.1	CLIENT INFORMATION	Δ
	4.2	GENERAL DESCRIPTION OF THE E.U.T.	
	4.3	DESCRIPTION OF SUPPORT UNITS	
	4.4	STANDARDS APPLICABLE FOR TESTING	
	4.5	TEST LOCATION	4
	4.6	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.7	TEST FACILITY	5
5	EC	QUIPMENTS USED DURING TEST	6
6		ST RESULTS	
Ī			
	6.1 6.2	E.U.T. TEST CONDITIONS	
		Antenna Requirement	
	-	2.2 EUT Antenna	
	6.3	OCCUPIED BANDWIDTH.	
	6.4	CARRIER FREQUENCIES SEPARATED	
	6.5	HOPPING CHANNEL NUMBER	
	6.6	DWELL TIME	
	6.7	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	21
	6.7	7.1 Standard requirement	
	_	7.2 EUT Pseudorandom Frequency Hopping Sequence	
	6.8	MAXIMUM PEAK OUTPUT POWER	
	6.9	RF EXPOSURE COMPLIANCE REQUIREMENT	
		9.1 Standard requirement	
		9.2 EUT RF Exposure	
	6.10	BAND EDGE	
	6.11	RADIATED EMISSIONS	
	• • • • • • • • • • • • • • • • • • • •	11.1 Radiated emission below 1GHz	
	n 7	i i Z - i ransminer emission anove 10-H7	17-14

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 4 of 39

## 4 General Information

## 4.1 Client Information

Applicant: UNIFAT TECHNOLOGY LTD.

Address of Applicant: 7/F., SUI HONG IND. BLOG., 547-549 CASTLE PEAK RD., KWAI

CHUANG, N.T., HONG KONG

Manufacturer/ Factory: UNIFAT TECHNOLOGY LTD.

Address of Manufacturer/ SIMA CHANG PING, DONGGUAN, P.R.C

Factory:

#### 4.2 General Description of the E.U.T

Product Name: BT SPEAKERPHONE (WITH TTS)

Model: BTS28V

Number of Channels 79 Channels

Channel Separation 1 MHz

Type of Modulation FHSS (Frequency Hopping Spread Spectrum);

Adaptive Frequency Hopping (AFH) is used.

Dwell time Per channel is less than 0.4s.

Antenna Type Integral
Antenna Gain 3.0dBi

DC Adapter: Input: 12V DC

Output: 5V/650mA

Battery: 3.7V/700mAH

#### 4.3 Description of Support Units

The EUT was tested independently

#### 4.4 Standards Applicable for Testing

The customer requested FCC tests for the EUT.

The standard used was FCC PART 15 Subpart C: 2008. ANSI C63.4:2003.and DA 00-705.

#### 4.5 Test Location

All tests were performed at:

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, District Shenzhen, China 518057 Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

#### 4.6 Other Information Requested by the Customer

None.

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 5 of 39

## 4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

NVLAP – Lab Code: 200611-0

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

FCC – Registration No.: 282399

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399. May 31. 2002. With the above and NVLAP's accreditation. SGS-CSTC is an authorized test laboratory for the DoC process.

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 6 of 39

# 5 Equipments Used during Test

	RE in Chamber								
Item	Test Equipment	Manufacturer Model No.		Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)			
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	16-06-2007	15-06-2009			
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	12-12-2008	11-12-2009			
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A			
4	Coaxial cable	SGS	N/A	SEL0028	18-06-2008	17-06-2009			
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0014	12-08-2008	11-08-2009			
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	18-06-2008	17-06-2009			
7	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0005	12-08-2008	11-08-2009			
8	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	12-08-2008	11-08-2009			
9	Pre-amplifier (1-18GHz)	Rohde & Schwarz	AFS42-00101 800-25-S-42	SEL0081	18-06-2008	17-06-2009			
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33- 18002650-30- 8P-44	SEL0080	18-06-2008	17-06-2009			
11	Band filter	Amindeon	82346	SEL0094	18-06-2008	17-06-2009			
12	Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	15-06-2008	14-06-2009			

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 7 of 39

## 6 Test Results

#### 6.1 E.U.T. test conditions

Operating Environment:

Temperature: 24.0 °C
Humidity: 50 % RH
Atmospheric Pressure: 1010 mbar

Test frequencies: According to the 15.31(m) Measurements on intentional radiators or

receivers, other than TV broadcast receivers, shall be performed and.

if required. reported for each band in which the device can be operated with the device operating at the number of frequencies in

each band specified in the following table:

Frequency range over which device operates frequencies of operation

1 MHz or less 1 Middle
1 to 10 MHz 2 1 near top and 1 near bottom

More than 10 MHz 3 1 near top 1 near middle and 1 near bottom

More than 10 MHz 3 1 near top. 1 near middle and 1 near bottom Test frequency is the lowest channel: 0 channel(2402MHz), middle channel: 38 channel(2441MHz) and

highest channel: 78 channel(2480MHz)

### 6.2 Antenna Requirement

### 6.2.1 Standard requirement

15.203 requirement:

For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### 6.2.2 EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.0 dBi.

Test result: The unit does meet the FCC requirements.

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 8 of 39

6.3 Occ	upied Bandwidth		
Test	Requirement:	FCC 15.247(a)	
Test	Method:	ANSI C63.4 2003&	DA 00-705
Test	Status:	Test in fixing opera	ting frequency at lowest, Middle, highest channel.
Test	Procedure:		
			spectrum analyzer. The 20 dB bandwidth of the spectrum analyzer is as follows;
	Equipment Mode		Spectrum Analyzer
	Detector Function		Peak Mode
	RBW		30KHz
	VBW		100KHz

#### Test result:

20dB Bandwidth:

Lowest Frequency	Middle Frequency	Highest Frequency
2.402GHz	2.441GHz	2.480GHz
1100 KHz	1104 KHz	1104 KHz

#### FCC ID:RIIBTS28V




Report No.: SZEMO09020050801

Page: 9 of 39

#### Result plot as follows:

#### 1. Lowest Channel:

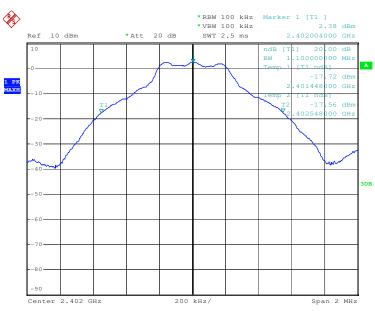

Date: 23.FEB.2009 13:17:04

#### 2. Middle Channel:



Date: 23.FEB.2009 12:58:18


#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 10 of 39

#### 3. Highest Channel:

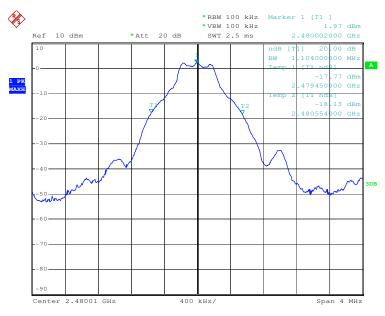

Date: 23.FEB.2009 11:06:36

Test result: The unit does meet the FCC requirements.

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 11 of 39

## 6.4 Carrier Frequencies Separated

Test Requirement: FCC 15.247(a)

Test Method: ANSI C63.4 2003& DA 00-705

Test requirements: Regulation 15.247(a), (1) Frequency hopping systems shall have hopping

channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater

than 125 mW.

Test Status: Test in hopping transmitting operating mode.

Test Procedure:

1 Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.

Equipment mode: Spectrum analyzer

Equipment Mode	Spectrum Analyzer		
Detector Function	Peak Mode		
RBW	100KHz		
VBW	100KHz		

- 2. By using the Max-Hold function record the separation of two adjacent channels.
- 3. Measure the frequency difference of these two adjacent channels by spectrum analyzer Marker function.
- 4. Repeat above procedures until all frequencies measured were complete.

#### Test result:

Lowest Frequency	Middle Frequency	Highest Frequency
2.402GHz	2.441GHz	2.480GHz
1.005 MHz	1.004 MHz	1.004 MHz


#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 12 of 39

#### 1. Lowest Channel:

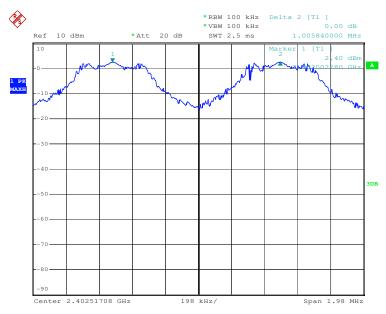

Date: 23.FEB.2009 13:54:00

#### 2. Middle Channel:



Date: 23.FEB.2009 13:04:44


#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 13 of 39

#### 3. Highest Channel:

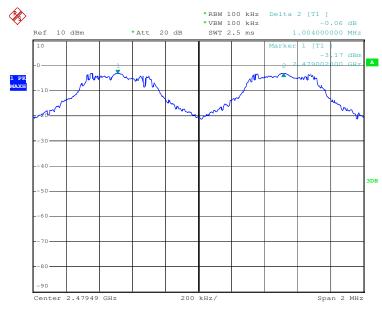

Date: 23.FEB.2009 11:12:11

Test result: The unit does meet the FCC requirements.

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 14 of 39

## 6.5 Hopping Channel Number

Test Requirement: FCC 15.247(a)

Test Method: ANSI C63.4:2003, 15.247 & DA 00-705

Regulation 15.247 (a) (1) (iii) Frequency hopping systems in the 2400-

2483.5 MHz band shall use at least 15 channels.

Test Status: Test in hopping transmitting operating mode.

#### Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.

- 3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
- 4. Set the spectrum analyzer: start frequency = 2400MHz. stop frequency = 2483.5MHz. Submit the test result graph.

Test result: Total channels are 79 channels.

#### Hopping channel numbers

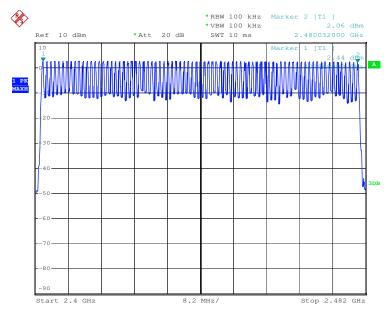

Date: 23.FEB.2009 14:01:20

Test result: The unit does meet the FCC requirements.

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 15 of 39

### 6.6 Dwell Time

Test Standards: FCC 15.247(a)

Test Method: ANSI C63.4 2003& DA 00-705

Test Requirements: Regulation 15.247(a) (1) (iii) Frequency hopping systems in the 2400-

2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a

minimum of 15 channels are used.

Test Status: Test in hopping transmitting operating mode.

Test Procedure:

 Connect EUT antenna terminal to the spectrum analyzer with a low loss cable. Equipment mode: spectrum analyzer, detector function: Peak RBW=1MHz, VBW=1MHz, Span=zero.

- 2. Adjust the center frequency of spectrum analyzer on any frequency be measured.
- 3. Measure the Dwell Time by spectrum analyzer Marker function.
- 4. Repeat above procedures until all frequencies measured were complete.

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as blow

DH1 time slot=0.550(ms)\*(1600/ (2\*79))\*31.6=176.0 ms

DH3 time slot=1.81(ms)\*(1600/ (4\*79))\*31.6=289.6 ms

DH5 time slot=3.01(ms)\*(1600/ (6\*79))\*31.6=320.8ms

Middle channel

DH1 time slot=0.550(ms)\*(1600/(2\*79))\*31.6=176.0ms

DH3 time slot=1.81(ms)\*(1600/ (4\*79))\*31.6=289.6 ms

DH5 time slot=3.09(ms)\*(1600/ (6\*79))\*31.6=329.3ms

Highest channel

DH1 time slot=0.550(ms)\*(1600/(2\*79))\*31.6=176.0ms

DH3 time slot=1.81(ms)\*(1600/ (4\*79))\*31.6=289.6ms

DH5 time slot=3.05(ms)\*(1600/ (6\*79))\*31.6=325.3ms

The unit does meet the FCC requirements.

#### FCC ID:RIIBTS28V




Report No.: SZEMO09020050801


Page: 16 of 39

#### Please refer the graph as below:

#### 1. Lowest Channel:

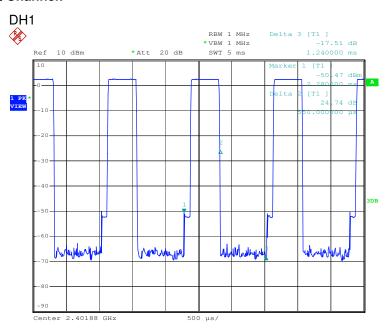

Date: 23.FEB.2009 13:44:02

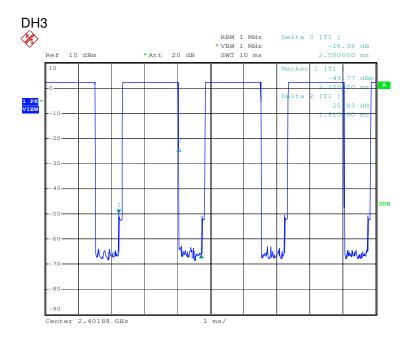


Date: 23.FEB.2009 13:46:41

#### FCC ID:RIIBTS28V




Report No.: SZEMO09020050801

Page: 17 of 39

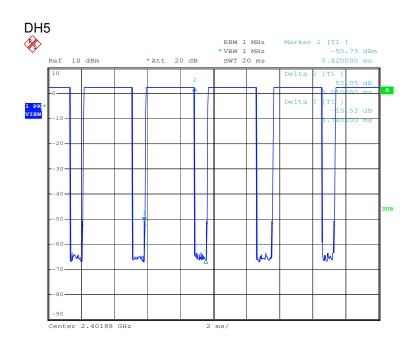

Date: 23.FEB.2009 13:48:11

#### 2. Middle Channel:

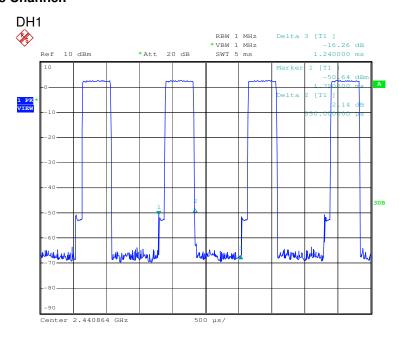


Date: 23.FEB.2009 13:07:24

#### FCC ID:RIIBTS28V




Report No.: SZEMO09020050801

Page: 18 of 39

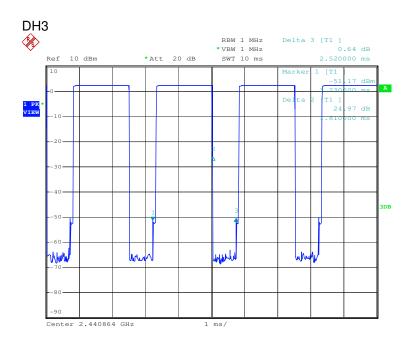

Date: 23.FEB.2009 13:08:34

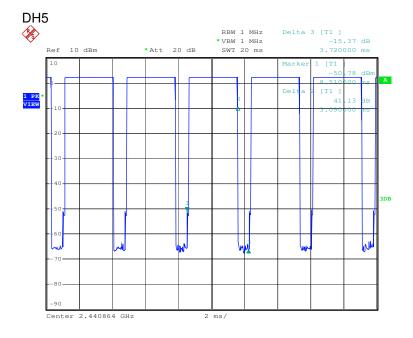

Date: 23.FEB.2009 13:09:35


#### FCC ID:RIIBTS28V




Report No.: SZEMO09020050801

Page: 19 of 39

#### 3. Highest Channel:

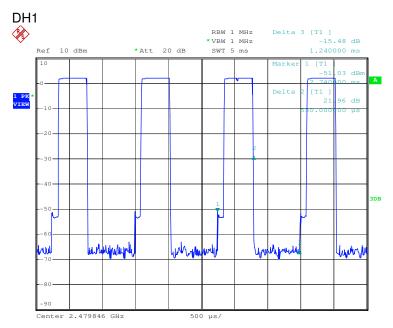

Date: 23.FEB.2009 11:30:47

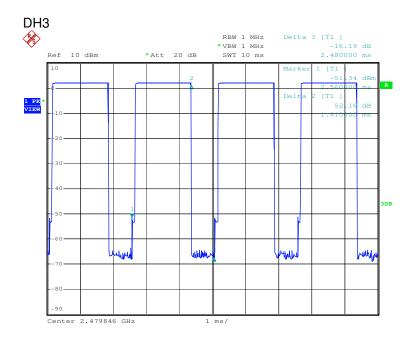


Date: 23.FEB.2009 11:33:01

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 20 of 39

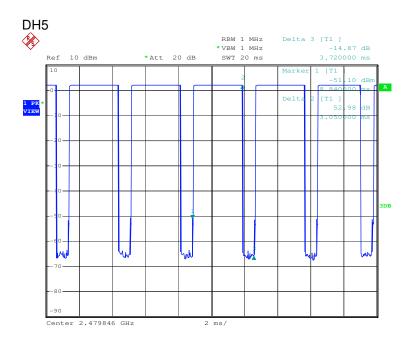

Date: 23.FEB.2009 11:34:41

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 21 of 39

## 6.7 Pseudorandom Frequency Hopping Sequence

#### 6.7.1 Standard requirement


15.247(a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 6.7.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence: 29-1 = 511 bits
- · Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 22 of 39

### **6.8 Maximum Peak Output Power**

Test Requirement: FCC Part 15.247 & DA 00-705

Test Method: ANSI C63.4 & DA 00-705

Test Limit: Regulation 15.247 (b)(1)For frequency hopping systems operating in


the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in

the 2400-2483.5 MHz band: 0.125 watts.

Refer to the result "Hopping channel number" of this document. The 1

watt (30.0dBm) limit applies.

Test Configuration:



Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
- 3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

#### **Test Result:**

Frequency	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
2.402GHz	2.47	1.2	3.67	30.00	26.33
2.441GHz	2.54	1.2	3.74	30.00	26.26
2.480GHz	2.06	1.2	3.26	30.00	26.74

Test result: The unit does meet the FCC requirements.

#### FCC ID:RIIBTS28V




Report No.: SZEMO09020050801

Page: 23 of 39


#### Test result plot as follows:

#### 1. Lowest Channel: (2.402GHz)

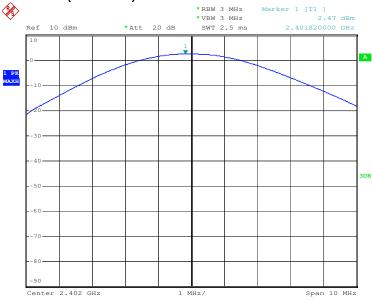

Date: 23.FEB.2009 13:18:47

#### 2. Middle Channel: (2.441GHz)

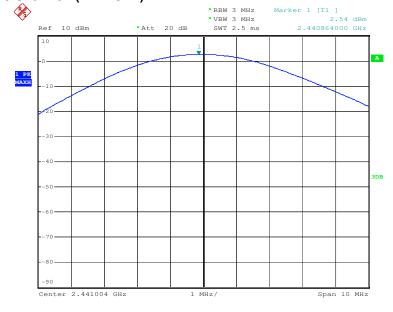

Date: 23.FEB.2009 13:01:31


#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 24 of 39

### 3. Highest Channel: (2.480GHz)

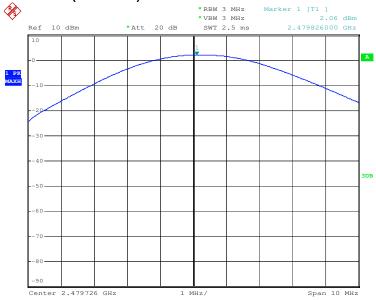

Date: 23.FEB.2009 11:13:45

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 25 of 39

## **6.9 RF Exposure Compliance Requirement**

#### 6.9.1 Standard requirement

15.247(b)(4) requirement:

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section. if transmitting antennas of directional gain greater than 6 dBi are used. the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1). (b)(2). and (b)(3) of this section. as appropriate. by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 6.9.2 EUT RF Exposure

The Max Conducted Peak Output Power is **3.74dBm(2.365mW)** in middle channel (2.441GHz);

The best case gain of the antenna is 3.0dBi.

3.0dB logarithmic terms convert to numeric result is nearly 2

According to the formula. calculate the EIRP test result:

EIRP= P x G =  $2.365 \text{ mW} \times 2 = 4.527 \text{mW}$  ①

SAR requirement:

S = 60 / f(GHz) = 60/2.441 = 24.58 mW ②;

(1) < (2).

So the SAR report is not required.

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 26 of 39

## 6.10 Band edge

Test Requirement: FCC 15.247(d)

Test Method: ANSI C63.4:2003 & DA 00-705

Test Status: Test lowest channel, highest channel.

Test site: The transmitter output is connected to spectrum analyzer. The resolution

bandwidth is set to 100KHz. The video bandwidth is set to 100KHz.

Limit: 15.247(d) In any 100 kHz bandwidth outside the frequency band in which

the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF

conducted or a radiated measurement.

#### FCC ID:RIIBTS28V





Report No.: SZEMO09020050801


Page: 27 of 39

#### Out-OFF-band spurious emissions-conducted measurement:

#### 1. The lowest channel (2402MHz)

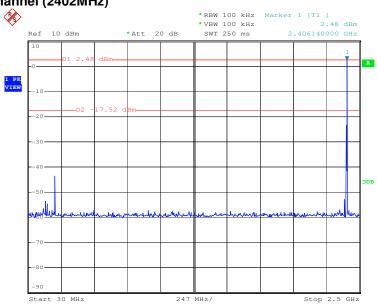



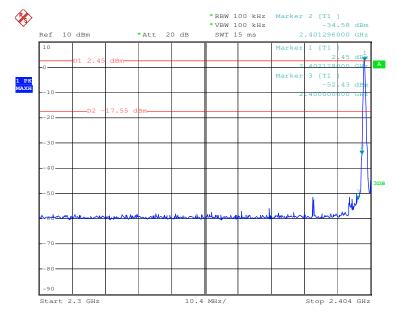


Date: 23.FEB.2009 13:23:33

#### FCC ID:RIIBTS28V




Report No.: SZEMO09020050801

Page: 28 of 39

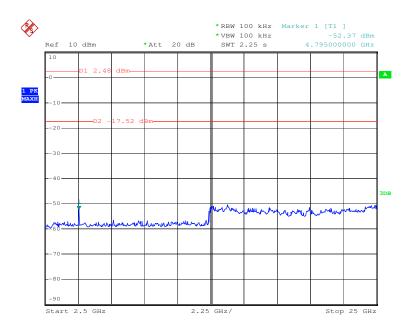

Date: 23.FEB.2009 13:32:16

#### 2. The Middle channel (2441MHz)

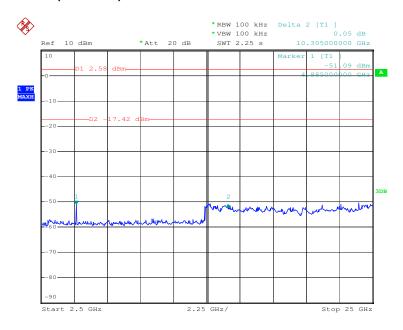


Date: 23.FEB.2009 13:14:57

#### FCC ID:RIIBTS28V




Report No.: SZEMO09020050801

Page: 29 of 39

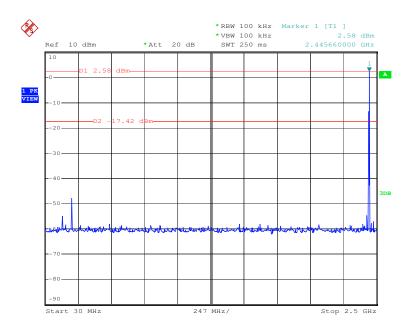

Date: 23.FEB.2009 13:12:33

#### 3. The highest channel (2480MHz)

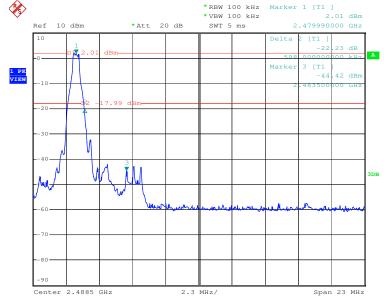


Date: 23.FEB.2009 11:24:03

#### FCC ID:RIIBTS28V




Report No.: SZEMO09020050801

Page: 30 of 39

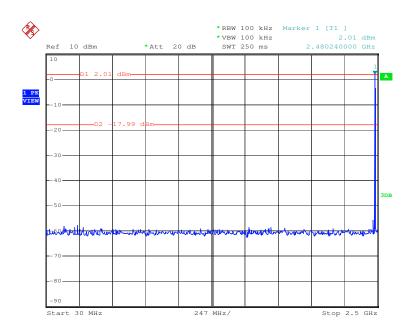



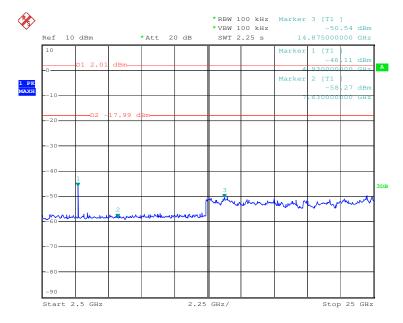

Date: 23.FEB.2009 12:51:13

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 31 of 39

### 6.11 Radiated Emissions

Test Requirement: 15.247(d),15.209 & 15.205

Test Method: ANSI C63.4:2003 & DA 00-705

Test Status: Test lowest channel, Middle, highest channel.

Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Test Range 30MHz to 25GHz

30MHz-1000MHz: RBW=100KHz, VBW=300KHz

Above 1GHz: PK RBW=1MHz, VBW=3MHz

Average RBW=1MHz, VBW=10Hz

15.209 Limit: 40.0 dBµV/m between 30MHz & 88MHz

43.5 dBµV/m between 88MHz & 216MHz

 $46.0 \text{ dB}\mu\text{V/m}$  between 216MHz & 960MHz

above 960MHz: Average value Limit 54.0  $dB\mu V/m$ 

Peak value Limit 74.0 dBµV/m.

## **Test Configuration:**

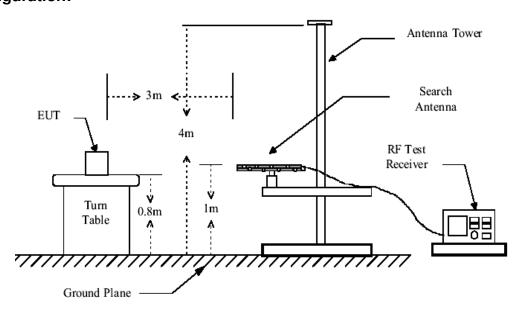


Figure1: 30MHz to 1GHz radiated emissions test configuration

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 32 of 39

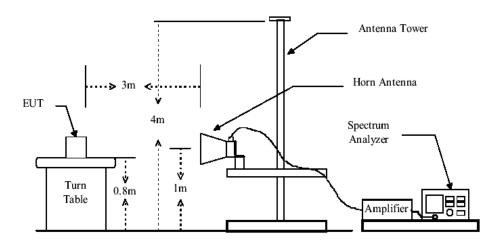


Figure 2: Above 1GHz radiated emissions test configuration

**Test Procedure:** The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 25GHz.When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 33 of 39

#### 6.11.1 Radiated emission below 1GHz

### **Charging mode**

#### Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
55.220	0.80	7.56	28.08	42.92	23.20	40.00	-16.80
89.170	1.10	8.64	27.95	45.56	27.35	43.50	-16.15
205.570	1.43	10.48	27.12	40.02	24.81	43.50	-18.69
279.290	1.81	12.98	26.80	47.79	35.78	46.00	-10.22
404.420	2.22	16.32	27.43	40.59	31.70	46.00	-14.30
797.270	3.19	22.09	26.95	38.50	36.83	46.00	-9.17

#### Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
62.980	0.80	7.11	28.03	39.88	19.76	40.00	-20.24
86.260	1.10	8.36	27.97	38.76	20.25	40.00	-19.75
191.020	1.39	10.11	27.20	34.81	19.11	43.50	-24.39
269.590	1.77	12.70	26.83	42.63	30.27	46.00	-15.73
288.020	1.85	13.40	26.76	40.94	29.43	46.00	-16.57
749.740	3.06	21.70	27.11	37.42	35.07	46.00	-10.93

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 34 of 39

## DC + Play mode

#### Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
85.290	1.10	8.26	27.97	45.01	26.40	40.00	-13.60
88.817	1.10	8.61	27.95	42.29	24.05	43.50	-19.45
190.050	1.38	10.10	27.20	37.28	21.56	43.50	-21.94
287.050	1.84	13.35	26.77	42.71	31.13	46.00	-14.87
359.800	2.09	15.65	27.16	38.43	29.01	46.00	-16.99
396.660	2.19	16.25	27.39	41.45	32.50	46.00	-13.50

#### Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
88.000	1.10	8.51	27.96	50.00	31.65	40.00	-8.35
196.840	1.39	10.16	27.17	45.08	29.46	43.50	-14.04
274.440	1.79	12.78	26.82	48.35	36.10	46.00	-9.90
285.110	1.84	13.26	26.77	50.67	39.00	46.00	-7.00
361.740	2.09	15.68	27.17	45.41	36.01	46.00	-9.99
402.480	2.21	16.31	27.42	45.96	37.06	46.00	-8.94

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 35 of 39

#### 6.11.2 Transmitter emission above 1GHz

#### The lowest channel (2.402GHz)

#### Peak Measurement

T Car Micasarch	r ear measurement							
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390	4.97	32.24	44.75	39.86	32.32	74.00	-41.68	Vertical
2400	4.97	32.25	44.75	39.26	31.73	74.00	-42.27	Vertical
3414	5.55	33.23	45.00	39.82	33.60	74.00	-40.40	Vertical
4451	6.44	34.05	45.28	40.09	35.30	74.00	-38.70	Vertical
6678	7.48	36.25	45.06	43.18	41.85	74.00	-32.15	Vertical
2258	4.80	32.16	44.72	41.57	33.81	74.00	-40.19	Horizontal
2390	4.97	32.24	44.75	40.30	32.76	74.00	-41.24	Horizontal
2400	4.97	32.25	44.75	40.30	32.77	74.00	-41.23	Horizontal
4162	6.19	33.63	45.19	41.19	35.82	74.00	-38.18	Horizontal
6746	7.53	36.34	44.99	44.44	43.32	74.00	-30.68	Horizontal

#### Average Measurement

Average ivicasi								
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit	Polarization
2390	4.97	32.24	44.75	27.46	19.92	54.00	-34.08	Vertical
2400	4.97	32.25	44.75	27.47	19.94	54.00	-34.06	Vertical
4604	6.52	34.08	45.33	27.22	22.49	54.00	-31.51	Vertical
6967	7.71	36.67	44.76	29.60	29.22	54.00	-24.78	Vertical
10843	9.50	38.17	42.47	25.72	30.92	54.00	-23.08	Vertical
2071	4.56	32.05	44.68	27.55	19.48	54.00	-34.52	Horizontal
2390	4.97	32.24	44.75	27.46	19.92	54.00	-34.08	Horizontal
2400	4.97	32.25	44.75	27.46	19.93	54.00	-34.07	Horizontal
3006	5.09	33.40	44.90	27.56	21.15	54.00	-32.85	Horizontal
4502	6.48	34.10	45.30	27.22	22.50	54.00	-31.50	Horizontal

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 36 of 39

#### The middle channel (2.441GHz)

#### Peak Measurement

I can incasui	Cilicit							
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit	Polarization
2190	4.71	32.12	44.71	41.03	33.15	74.00	-40.85	Vertical
2683	5.10	32.72	44.82	42.17	35.17	74.00	-38.83	Vertical
3567	5.71	33.23	45.04	41.72	35.62	74.00	-38.38	Vertical
4655	6.55	34.07	45.35	42.79	38.06	74.00	-35.94	Vertical
6695	7.49	36.28	45.04	45.21	43.94	74.00	-30.06	Vertical
2054	4.54	32.04	44.67	41.69	33.60	74.00	-40.40	Horizontal
2683	5.10	32.72	44.82	41.96	34.96	74.00	-39.04	Horizontal
4570	6.51	34.08	45.32	41.72	36.99	74.00	-37.01	Horizontal
6746	7.53	36.34	44.99	43.87	42.75	74.00	-31.25	Horizontal
10554	9.46	37.93	42.27	40.06	45.18	74.00	-28.82	Horizontal

#### Average Measurement

7 Worldge Mic	Average measurement							
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit	Polarization
2020	4.49	32.01	44.66	25.60	17.44	54.00	-36.56	Vertical
3057	5.15	33.37	44.91	26.41	20.02	54.00	-33.98	Vertical
4638	6.54	34.07	45.34	26.25	21.52	54.00	-32.48	Vertical
6967	7.71	36.67	44.76	28.58	28.20	54.00	-25.80	Vertical
12730	10.70	39.15	44.23	24.88	30.50	54.00	-23.50	Vertical
2173	4.69	32.11	44.70	27.47	19.57	54.00	-34.43	Horizontal
4162	6.19	33.63	45.19	27.15	21.78	54.00	-32.22	Horizontal
5233	6.83	34.34	45.53	27.42	23.06	54.00	-30.94	Horizontal
6967	7.71	36.67	44.76	29.60	29.22	54.00	-24.78	Horizontal
12730	10.70	39.15	44.23	25.88	31.50	54.00	-22.50	Horizontal

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 37 of 39

#### The highest channel (2.480GHz)

#### Peak Measurement

I can incasul	Cilicit							
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit	Polarization
2483.5	5.08	32.29	44.77	41.06	33.66	74.00	-40.34	Vertical
2500	5.10	32.30	44.78	40.87	33.49	74.00	-40.51	Vertical
4315	6.32	33.85	45.24	40.81	35.74	74.00	-38.26	Vertical
6678	7.48	36.25	45.06	43.50	42.17	74.00	-31.83	Vertical
10758	9.49	38.10	42.41	39.22	44.40	74.00	-29.60	Vertical
2483.5	5.08	32.29	44.77	40.69	33.29	74.00	-40.71	Horizontal
2500	5.10	32.30	44.78	40.94	33.56	74.00	-40.44	Horizontal
4383	6.38	33.94	45.26	42.14	37.20	74.00	-36.80	Horizontal
6695	7.49	36.28	45.04	43.96	42.69	74.00	-31.31	Horizontal
10435	9.37	37.79	42.18	39.97	44.95	74.00	-29.05	Horizontal

#### Average Measurement

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit	Polarization
2483.5	5.08	32.29	44.77	27.43	20.03	54.00	-33.97	Vertical
2500	5.10	32.30	44.78	27.44	20.06	54.00	-33.94	Vertical
4519	6.49	34.09	45.31	27.26	22.53	54.00	-31.47	Vertical
6967	7.71	36.67	44.76	29.61	29.23	54.00	-24.77	Vertical
10605	9.46	37.98	42.30	25.48	30.62	54.00	-23.38	Vertical
2483.5	5.08	32.29	44.77	27.43	20.03	54.00	-33.97	Horizontal
2500	5.10	32.30	44.78	27.44	20.06	54.00	-33.94	Horizontal
6933	7.68	36.62	44.80	29.60	29.10	54.00	-24.90	Horizontal
10809	9.49	38.15	42.45	25.68	30.87	54.00	-23.13	Horizontal
12730	10.70	39.15	44.23	25.87	31.49	54.00	-22.51	Horizontal

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 38 of 39

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor.

Remark: No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

#### Remark:

- 1). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.
- 2) Pre-test the Bluetooth normal mode
- 3) For this intentional radiator operates below 25 GHz. The spectrum shall be investigated to the tenth harmonic of the highest fundamental frequency. And above the fifth harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 5<sup>th</sup> harmonic.

Section 15.205 Restricted bands of operation.

#### FCC ID:RIIBTS28V



Report No.: SZEMO09020050801

Page: 39 of 39

(a) Except as shown in paragraph (d) of this section. only spurious emissions are permitted in any

of the frequency bands listed below:

or the frequency parios listed below.									
MHz	MHz	MHz	GHz						
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15						
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46						
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75						
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5						
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2						
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5						
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7						
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4						
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5						
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2						
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4						
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12						
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0						
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8						
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5						
12.57675 - 12.57725	240 - 285	3600 - 4400							
13.36 - 13.41	322 - 335.4								

The result: The unit does meet the FCC requirements

#### FCC ID:RIIBTS28V