

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: sgs internet operations@sgs.com

Report No.: SZEMO10070435201

Page : 1 of 68

FCC REPORT

Application No: SZEMO100704352RF **Applicant:** Unifat Technology Ltd

Manufacturer/Factory: DONGGUAN EASYFAT ELECTONIC MFY. SIMA CHANG PING

Product Name: Bluetooth speakerphone with TTS

Operation Frequency: 2402MHz to 2480MHz

FCC ID: RIIBTS90V01

Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247: 2009

Date of Receipt: 2010-07-14

Date of Test: 2010-07-14 to 2010-11-18

Date of Issue: 2010-11-22

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Jack Zhang

Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEMO10070435201

Page : 2 of 68

2 Contents

1	C	OVER PAGE	Page
2		ONTENTS	
3	TE	EST SUMMARY	3
4	G	ENERAL INFORMATION	5
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF E.U.T.	5
	4.3	E.U.T OPERATION MODE	7
	4.4	TEST FACILITY	8
	4.5	TEST LOCATION	
	4.6	OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
	4.7	TEST INSTRUMENTS LIST	9
5	TE	EST RESULTS AND MEASUREMENT DATA	10
	5.1	Antenna requirement:	10
	5.2	CONDUCTED PEAK OUTPUT POWER	11
	5.3	20DB OCCUPY BANDWIDTH	18
	5.4	CARRIER FREQUENCIES SEPARATION	24
	5.5	HOPPING CHANNEL NUMBER	31
	5.6	DWELL TIME	
	5.7	BAND EDGE	40
	5.8	RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	47
	5.9	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	53
	5.10	RADIATED EMISSION	
	5.	10.1 Radiated emission below 1GHz	
	5.	10.2 Transmitter emission above 1GHz	58
	5.	10.3 Band edge (Radiated Emission)	61-68





Report No.: SZEMO10070435201

Page : 3 of 68


3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass*
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.


* The EUT passed the Radiated Emission test after modification. See picture below:

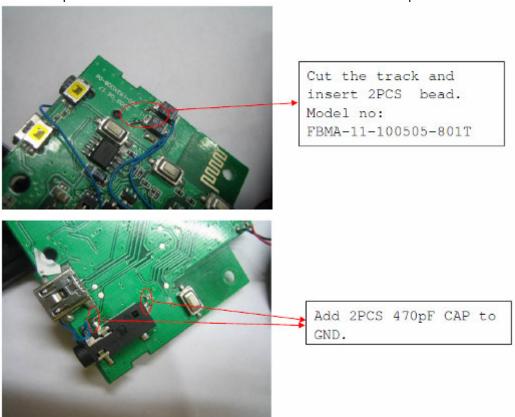



Report No.: SZEMO10070435201

Page : 4 of 68

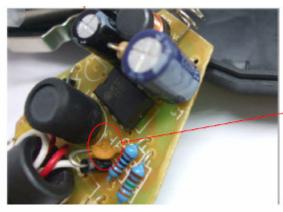

Replace the capacitor with new one which capacitance is 0.001uF as the picture shown.



Replace the capacitor with new one which capacitance is 220uF/35V as the picture shown.



Report No.: SZEMO10070435201

Page : 5 of 68

4 General Information

4.1 Client Information

Applicant:	Unifat Technology Ltd
Manufacturer/Factory:	DONGGUAN EASYFAT ELECTONIC MFY. SIMA CHANG PING
Address of Applicant:	7/F., Sui Hong Ind. Bldg., 547-549 Castle Peak Rd., Kwai Chung, N.T., Hong Kong
Address of Manufacturer:	Sheima Sheung, Shueng ping chang, Dongguan, People's Republic of China
Address of Factory:	Sheima Sheung, Shueng ping chang, Dongguan, People's Republic of China

4.2 General Description of E.U.T.

Product Name:	Bluetooth speakerphone with TTS
Model No.:	BTS90
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4QPSK, 8DPSK
Antenna Type:	Integral
Antenna gain:	3.0dBi
Vehicular adapter	Input: DC 12-24V
	Output: 5V ==650mA
Battery:	3.7V 450mAH DC (Li-ion Battery)



Report No.: SZEMO10070435201

Page : 6 of 68

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel for testing see below:

Channel	Frequency
lowest channel	2402MHz
middle channel	2441MHz
highest channel	2480MHz



Report No.: SZEMO10070435201

Page : 7 of 68

4.3 E.U.T Operation mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Vehicular charge +Bluetooth	Keep the EUT communicating with other Bluetooth device, and vehicular adapter charging to EUT.
Bluetooth	Keep the EUT communicating with other Bluetooth device.

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO10070435201

Page : 8 of 68

4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, June 27, 2008.

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 No tests were sub-contracted.

4.6 Other Information Requested by the Customer

None.



Report No.: SZEMO10070435201

Page : 9 of 68

4.7 Test Instruments list

RE i	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2010-06-17	2011-06-17	
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2010-07-05	2011-07-05	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A	
4	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18	
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2010-07-09	2011-07-09	
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2010-07-09	2011-07-09	
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2010-07-09	2011-07-09	
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2010-06-02	2011-06-02	
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2010-06-27	2011-06-27	
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	SEL0080	2010-06-04	2011-06-04	
11	Band filter	Amindeon	82346	SEL0094	2010-06-02	2011-06-02	

RF c	RF conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2010-06-27	2011-06-27
2	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18



Report No.: SZEMO10070435201

Page : 10 of 68

5 Test results and Measurement Data

5.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best gain of the antenna is 3.0dBi.

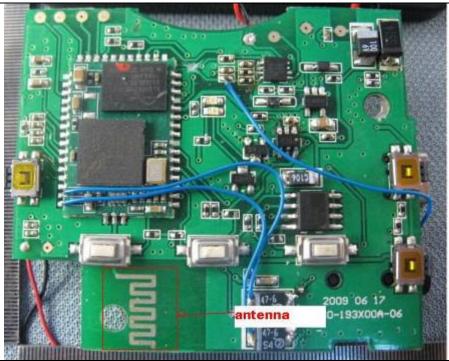



Report No.: SZEMO10070435201

Page : 11 of 68

5.2 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009 and KDB DA00-705	
Limit:	30dBm	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Test Instruments:	Refer to section 4.7 for details	
Test state:	Non-hopping transmitting with all kinds of modulation.	
Test results:	Pass	



Report No.: SZEMO10070435201

Page : 12 of 68

Measurement Data


GFSK mode					
Test channel	Test channel Peak Output Power (dBm)		Result		
Lowest	-3.60	30.00	Pass		
Middle	-3.63	30.00	Pass		
Highest	-5.10	30.00	Pass		
	Pi/4QPSK m	ode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	-4.03	30.00	Pass		
Middle	-5.22	30.00	Pass		
Highest	-6.64	30.00	Pass		
	8DPSK mo	de			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	-3.51	30.00	Pass		
Middle	-4.33	30.00	Pass		
Highest	-6.21	30.00	Pass		



Report No.: SZEMO10070435201


Page : 13 of 68

Test plot as follows:

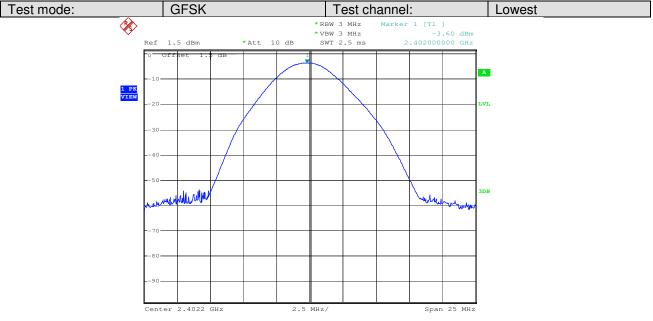

Date: 17.JUL.2010 13:43:41



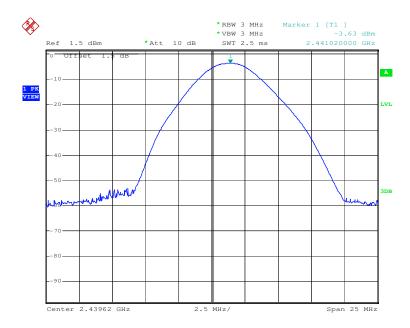


Date: 17.JUL.2010 14:00:58




Report No.: SZEMO10070435201

Page : 14 of 68

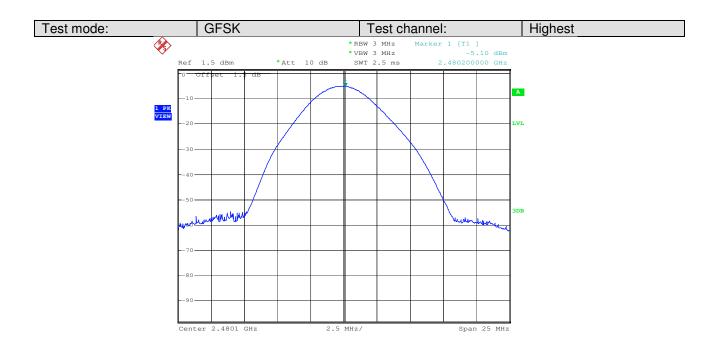

Date: 17.JUL.2010 14:09:18

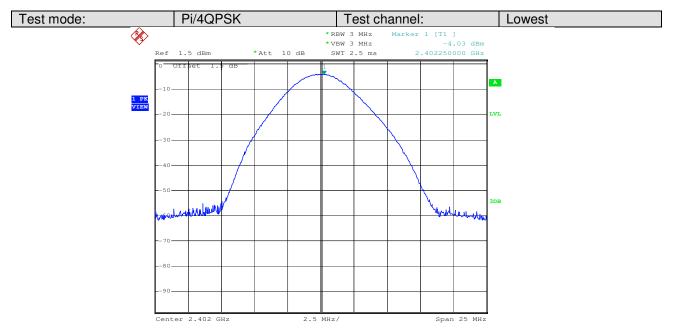


Date: 20.JUL.2010 08:37:25




Report No.: SZEMO10070435201

Page : 15 of 68

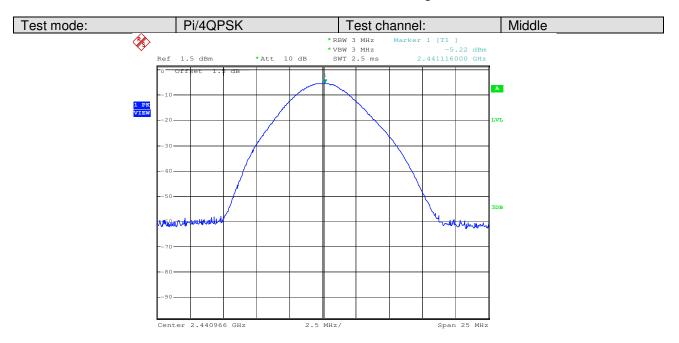

Date: 20.JUL.2010 08:19:35

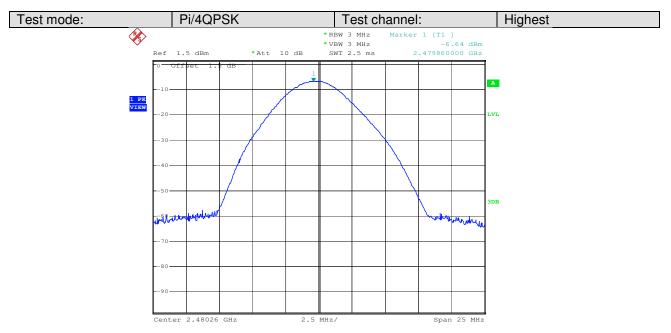


Date: 17.JUL.2010 14:38:05




Report No.: SZEMO10070435201

Page : 16 of 68

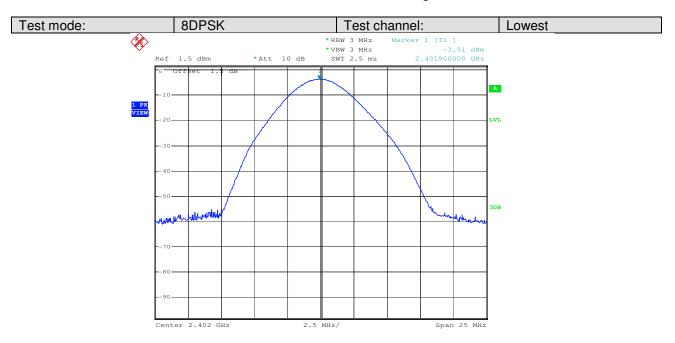

Date: 20.JUL.2010 09:19:18

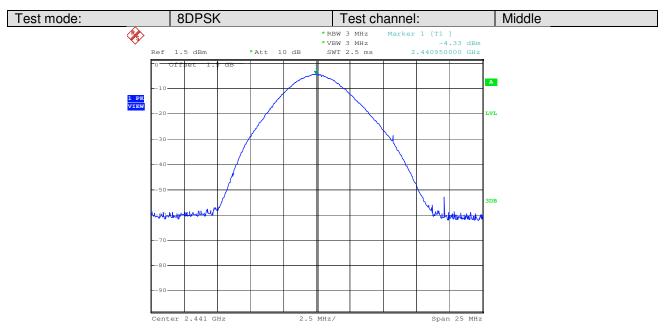


Date: 20.JUL.2010 09:32:02



Report No.: SZEMO10070435201

Page : 17 of 68

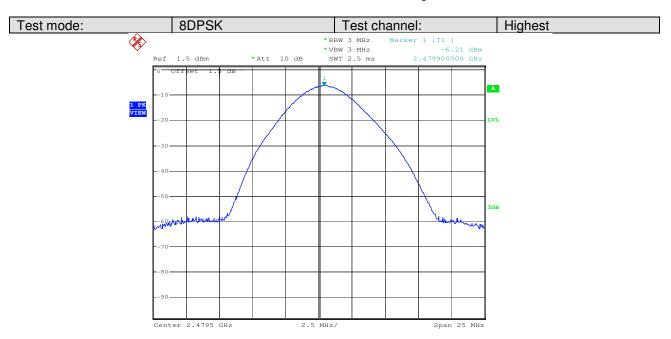

Date: 20.JUL.2010 12:33:18



Report No.: SZEMO10070435201

Page : 18 of 68

5.3 20dB Occupy Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009 and KDB DA00-705
Limit:	NA
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Test Instruments:	Refer to section 4.7 for details
Test state:	Non-hopping transmitting with all kind of modulation.
Test results:	Pass

Measurement Data

Test channel	20dB Occupy Bandwidth (KHz)		
	GFSK	Pi/4QPSK	8DPSK
Lowest	1088	1352	1328
Middle	1096	1348	1330
Highest	1088	1348	1336




Report No.: SZEMO10070435201

Page : 19 of 68

Test plot as follows:



Date: 17.JUL.2010 13:28:40

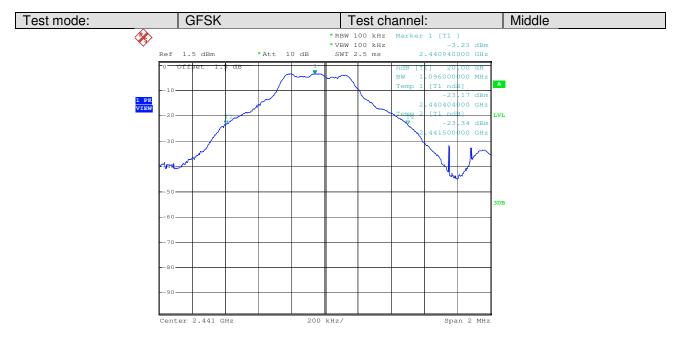


Date: 17.JUL.2010 13:55:56




Report No.: SZEMO10070435201

Page : 20 of 68

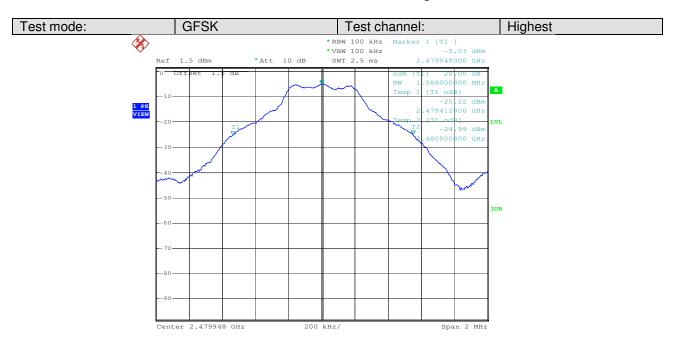

Date: 17.JUL.2010 14:10:05

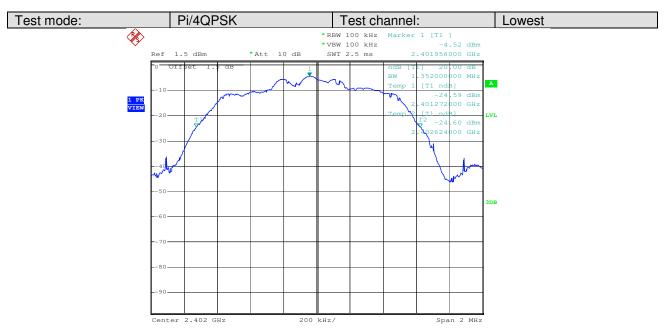


Date: 20.JUL.2010 08:37:58




Report No.: SZEMO10070435201

Page : 21 of 68

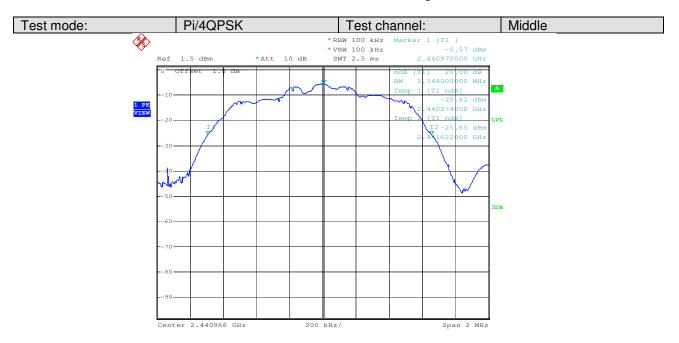

Date: 20.JUL.2010 08:16:30

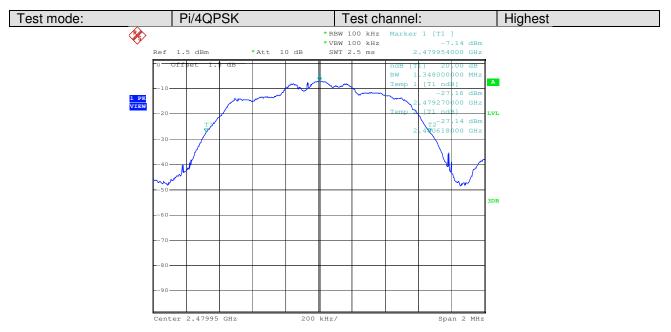


Date: 17.JUL.2010 14:33:05




Report No.: SZEMO10070435201

Page : 22 of 68

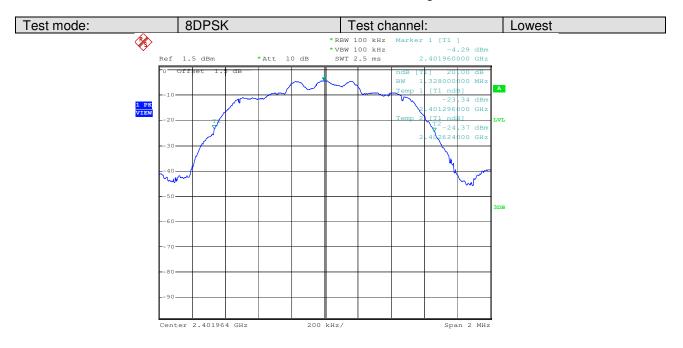

Date: 20.JUL.2010 09:57:58

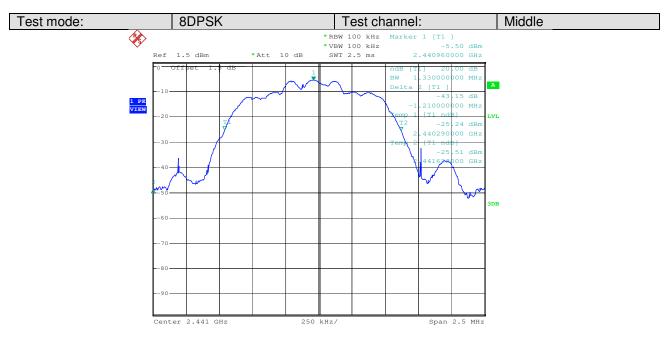


Date: 20.JUL.2010 10:29:46



Report No.: SZEMO10070435201

Page : 23 of 68

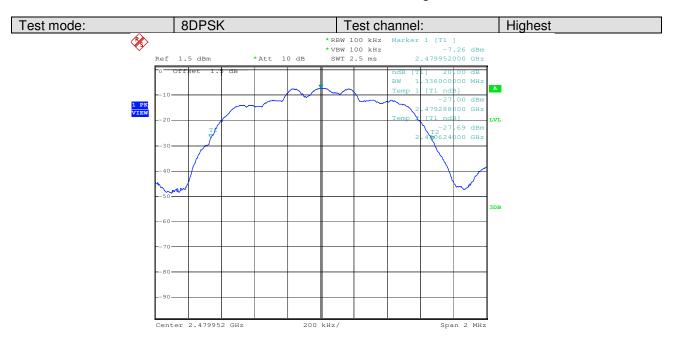

Date: 20.JUL.2010 12:29:59



Report No.: SZEMO10070435201

Page : 24 of 68

5.4 Carrier Frequencies Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009 and KDB DA00-705	
Test state:	Hopping transmitting with all kind of modulation.	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.7 for details	
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Test results:	Pass	



Report No.: SZEMO10070435201

Page : 25 of 68

Measurement Data

Measurement Data			
GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1015	901.3	Pass
Middle	1010	901.3	Pass
Highest	1005	901.3	Pass
	Pi/4QPSK m	ode	
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1005	901.3	Pass
Middle	1005	901.3	Pass
Highest	1005	901.3	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1005	901.3	Pass
Middle	1000	901.3	Pass
Highest	1003	901.3	Pass

Note: According to section 5.4,


Mode	20dB bandwidth (KHz)	Limit (KHz)	
	(worse case)	(Carrier Frequencies Separation)	
GFSK	1096	730.7	
PI/4QPSK	1352	901.3	
8DPSK	1336	890.7	




Report No.: SZEMO10070435201

Page : 26 of 68

Test plot as follows:

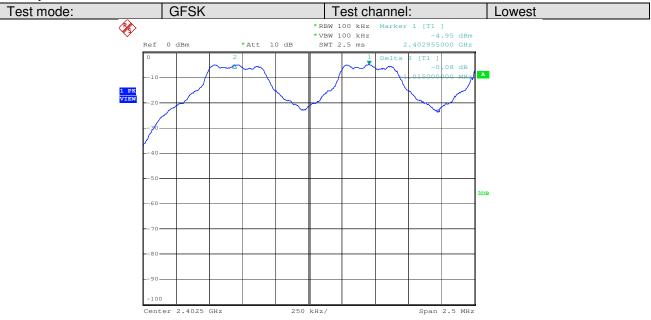

Date: 17.JUL.2010 13:30:46

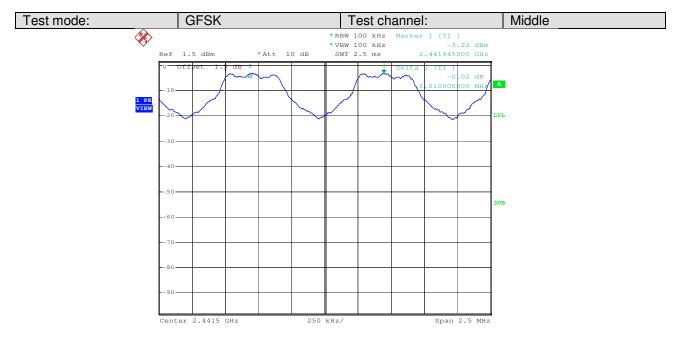


Date: 17.JUL.2010 13:57:08




Report No.: SZEMO10070435201

Page : 27 of 68

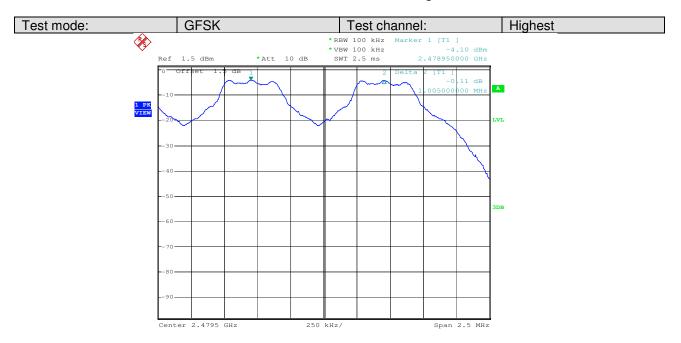

Date: 17.JUL.2010 14:12:36

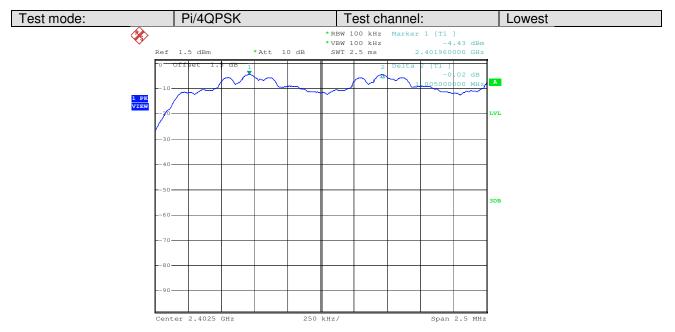


Date: 20.JUL.2010 09:09:11




Report No.: SZEMO10070435201

Page : 28 of 68

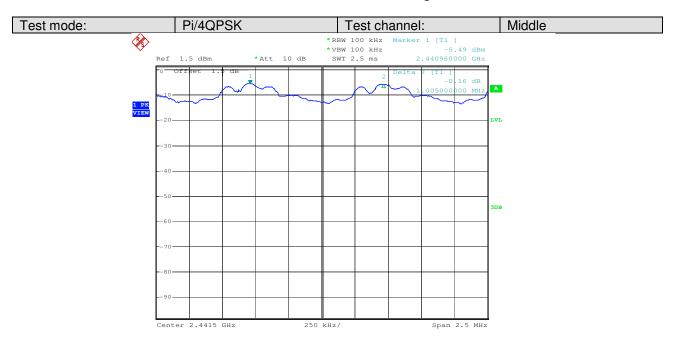

Date: 20.JUL.2010 08:21:51

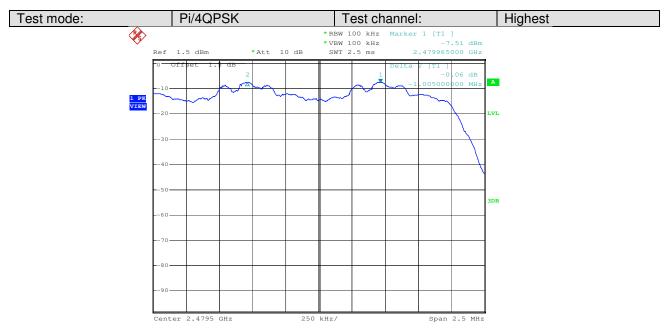


Date: 17.JUL.2010 14:39:46




Report No.: SZEMO10070435201

Page : 29 of 68

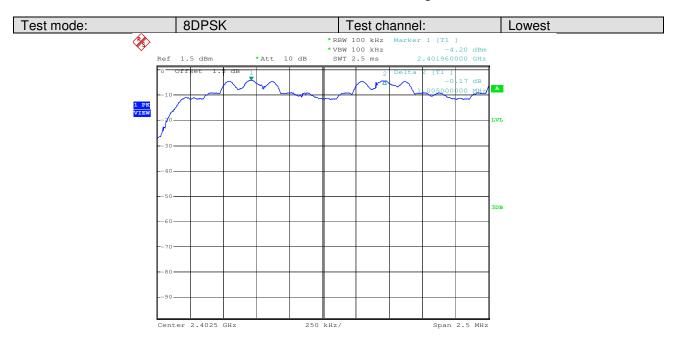

Date: 20.JUL.2010 10:28:18

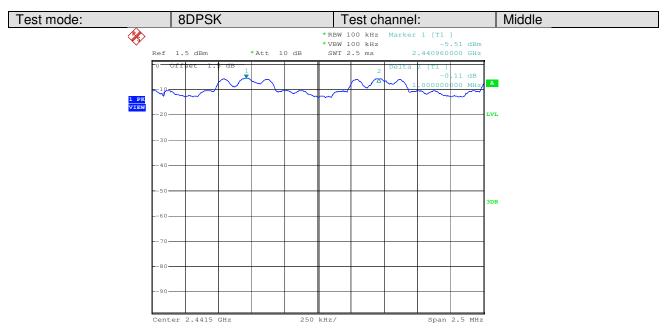


Date: 20.JUL.2010 10:34:01



Report No.: SZEMO10070435201

Page : 30 of 68

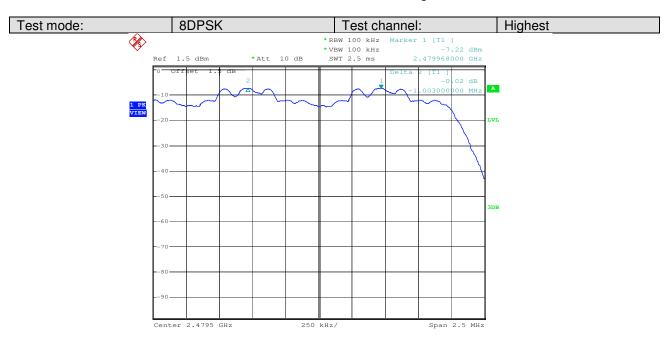

Date: 20.JUL.2010 12:32:27



Report No.: SZEMO10070435201

Page : 31 of 68

5.5 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009 and KDB DA00-705	
Requirement:	≥75 channels	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane	
Test Instruments:	Refer to section 4.7 for details	
Test state:	Hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data

model official bata			
Mode	Hopping channel	Requirement	
GFSK	79	≥75	
Pi/4QPSK	79	≥75	
8DPSK	79	≥75	




Report No.: SZEMO10070435201

Page : 32 of 68

Test plot as follows



Date: 17.JUL.2010 13:26:53

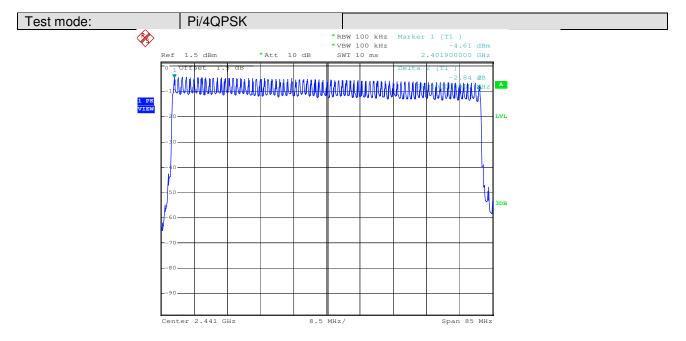


Date: 20.JUL.2010 12:53:01



Report No.: SZEMO10070435201

Page : 33 of 68

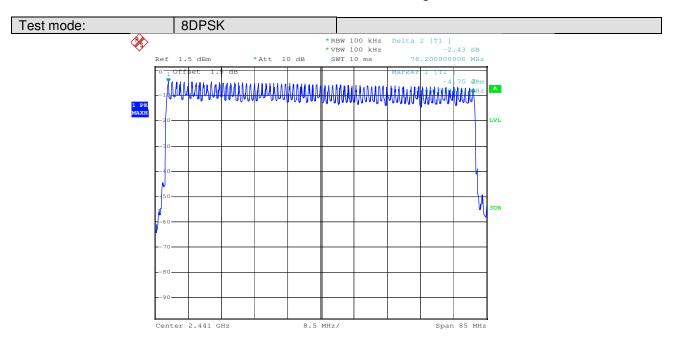

Date: 20.JUL.2010 12:58:44



Report No.: SZEMO10070435201

Page : 34 of 68

5.6 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009 and KDB DA00-705	
Limit:	≤ 0.4 Second	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.7 for details	
Test state:	Hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data


Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.1696	≤0.4
	DH3	0.2832	≤0.4
	DH5	0.3253	≪0.4
Pi/4QPSK	2-DH1	0.1728	≤0.4
	2-DH3	0.2848	≪0.4
	2-DH5	0.1941	≤0.4
8DPSK	3-DH1	0.1728	≪0.4
	3-DH3	0.2880	≤0.4
	3-DH5	0.3968	≤0.4




Report No.: SZEMO10070435201

Page : 35 of 68

Test plot as follows

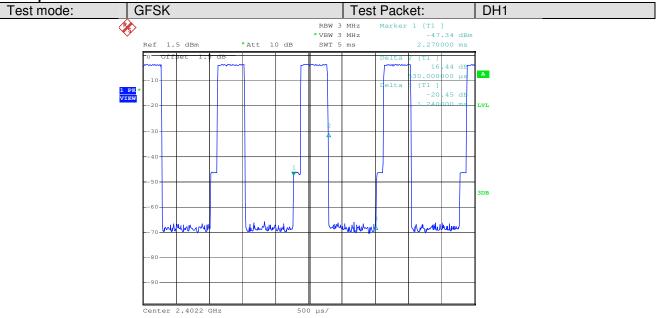

Date: 17.JUL.2010 13:44:19

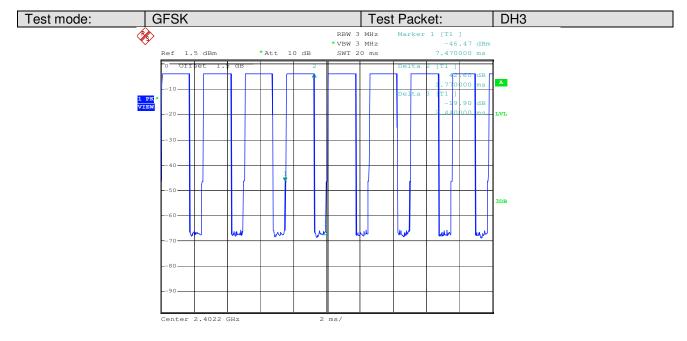


Date: 17.JUL.2010 13:45:11




Report No.: SZEMO10070435201

Page : 36 of 68

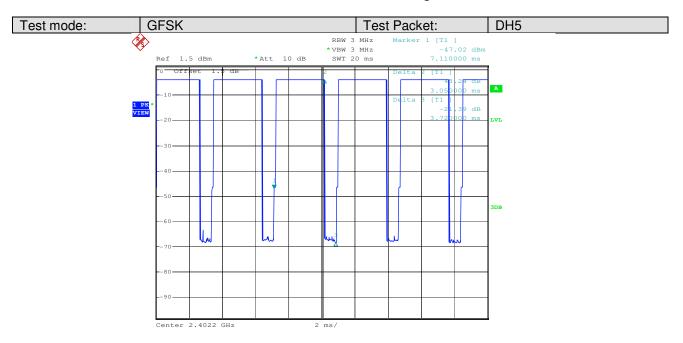

Date: 17.JUL.2010 13:45:51

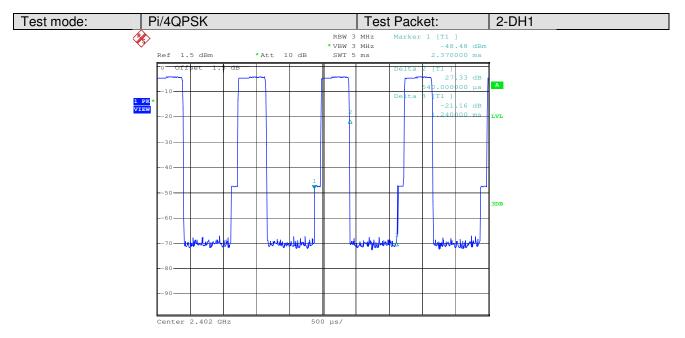


Date: 20.JUL.2010 09:10:21




Report No.: SZEMO10070435201

Page : 37 of 68

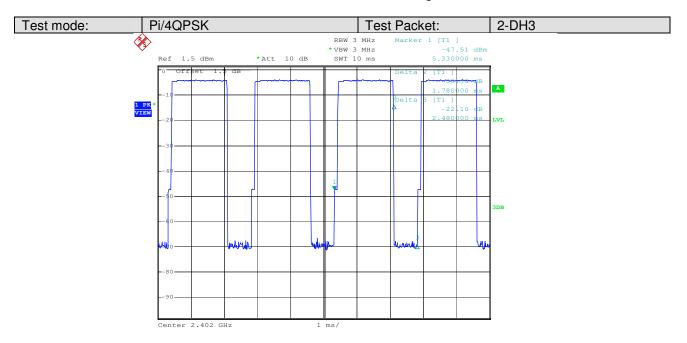

Date: 20.JUL.2010 09:11:27

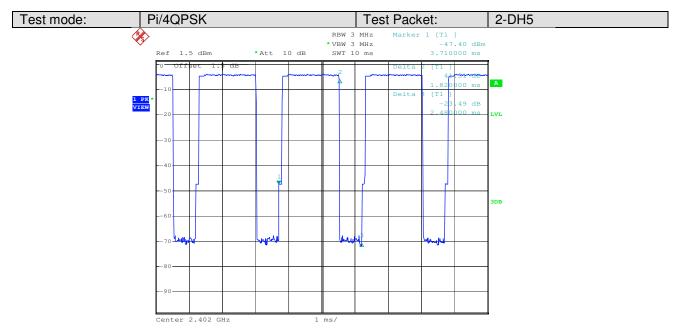


Date: 20.JUL.2010 09:12:25




Report No.: SZEMO10070435201

Page : 38 of 68

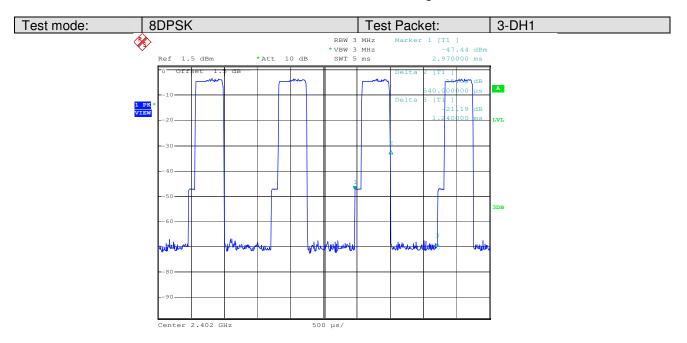

Date: 20.JUL.2010 09:16:18

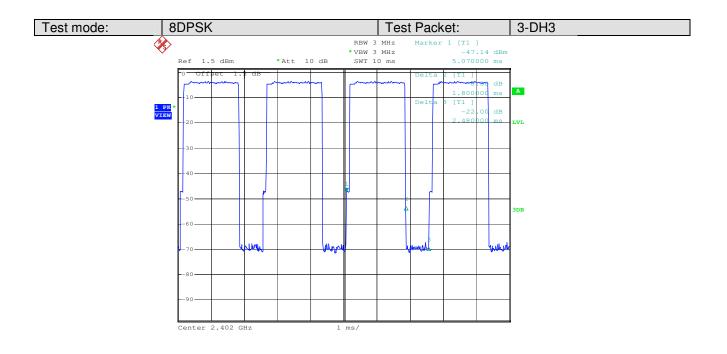


Date: 20.JUL.2010 09:17:22



Report No.: SZEMO10070435201

Page : 39 of 68

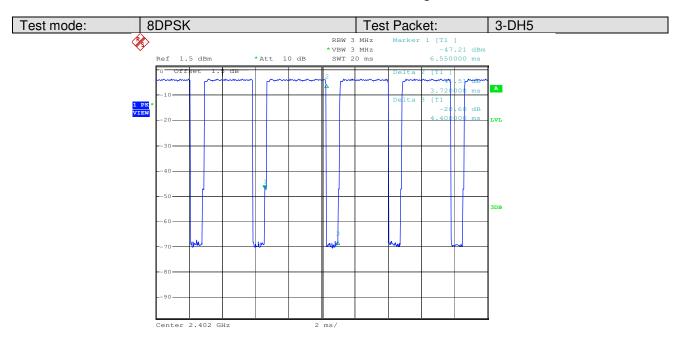

Date: 20.JUL.2010 09:18:29



Report No.: SZEMO10070435201

Page : 40 of 68

5.7 Band Edge


Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009 and KDB DA00-705
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
	Spectrum Analyzer E.U.T Non-Conducted Table
	Ground Reference Plane
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Test Instruments:	Refer to section 4.7 for details
Test state:	Hopping transmitting with all kinds of modulation.
Test results:	Pass




Report No.: SZEMO10070435201

Page : 41 of 68

Test plot as follows:

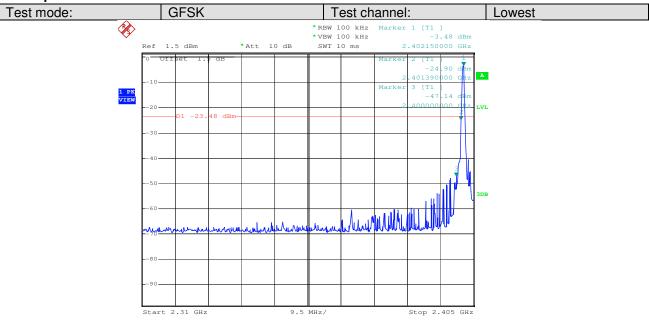

Date: 17.JUL.2010 13:35:06

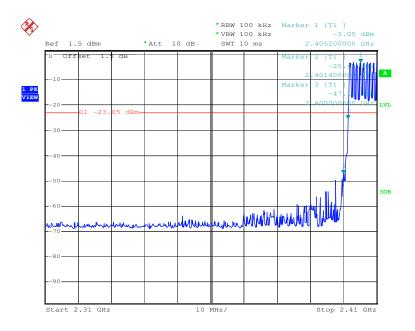


Date: 17.JUL.2010 13:42:43




Report No.: SZEMO10070435201

Page : 42 of 68

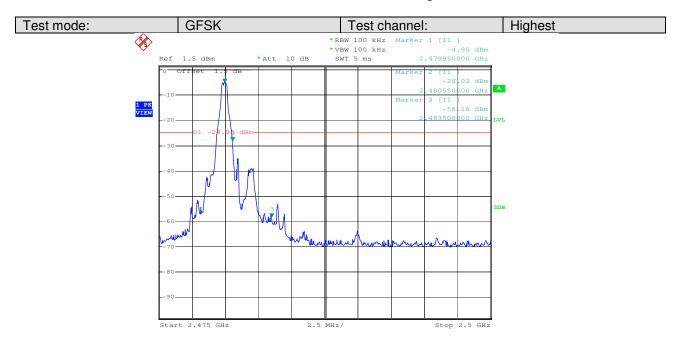

Date: 17.JUL.2010 14:05:38

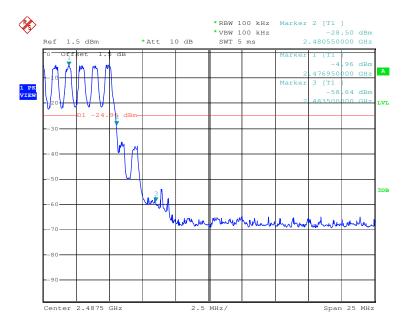


Date: 17.JUL.2010 14:08:28




Report No.: SZEMO10070435201

Page : 43 of 68

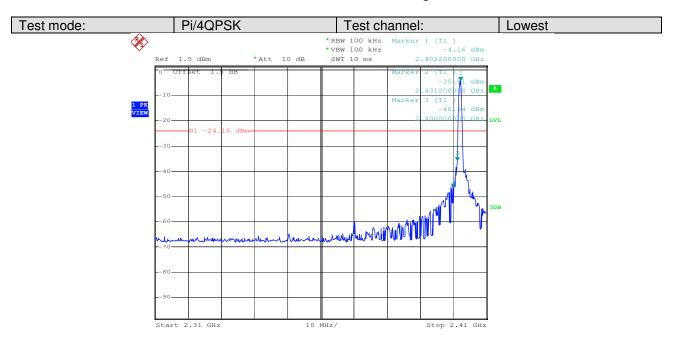

Date: 20.JUL.2010 08:47:57

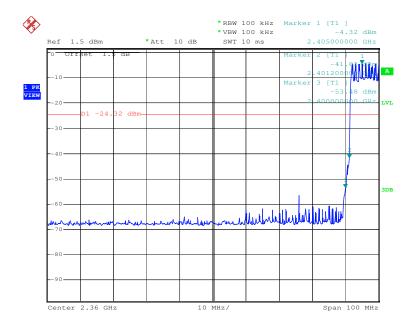


Date: 20.JUL.2010 08:53:25




Report No.: SZEMO10070435201

Page : 44 of 68

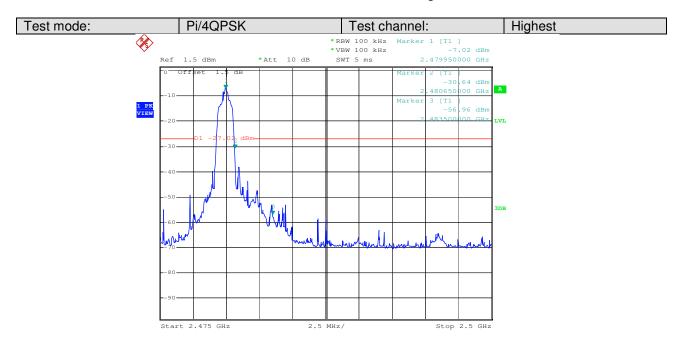

Date: 17.JUL.2010 14:33:56

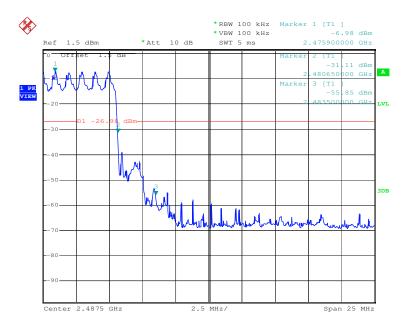


Date: 17.JUL.2010 14:35:44




Report No.: SZEMO10070435201

Page : 45 of 68

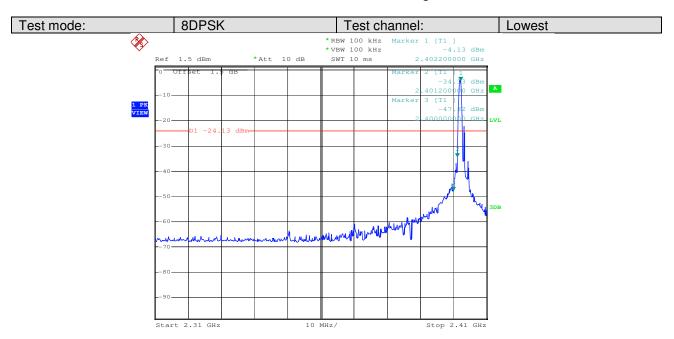

Date: 20.JUL.2010 09:52:27

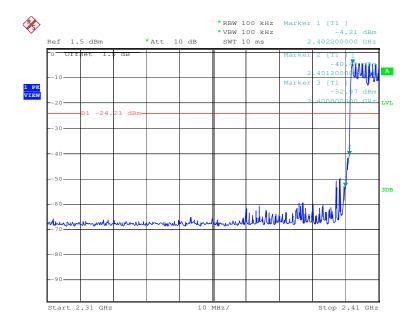


Date: 20.JUL.2010 09:56:46




Report No.: SZEMO10070435201

Page : 46 of 68

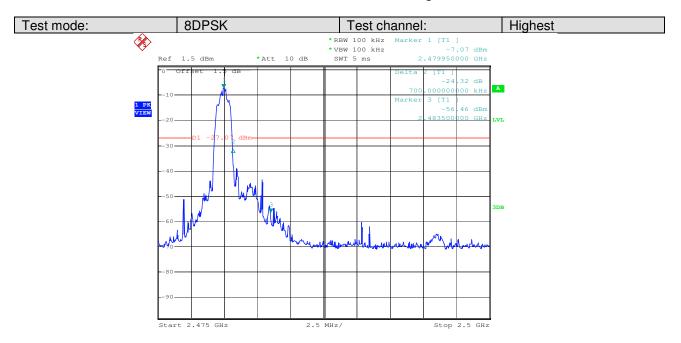

Date: 20.JUL.2010 10:48:52

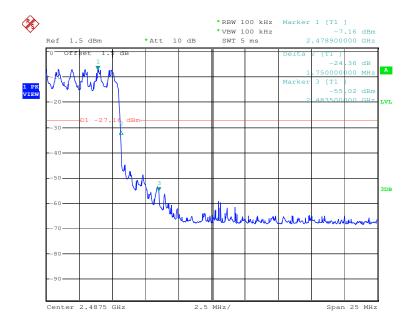

Date: 20.JUL.2010 11:02:25



Report No.: SZEMO10070435201

Page : 47 of 68


5.8 RF Antenna Conducted spurious emissions

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009 and KDB DA00-705
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Test Instruments:	Refer to section 4.7 for details
Test results:	Pass




Report No.: SZEMO10070435201

Page : 48 of 68

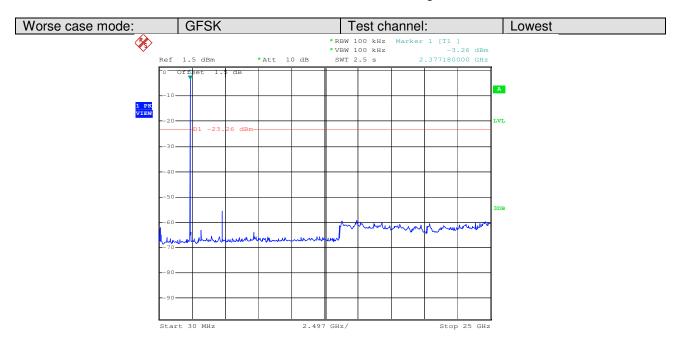

Date: 17.JUL.2010 13:38:53

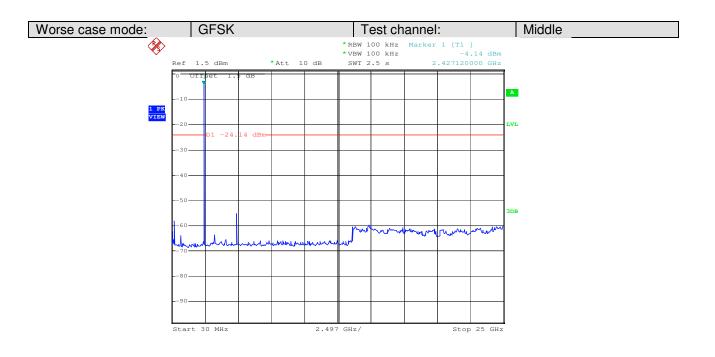


Date: 17.JUL.2010 13:59:32




Report No.: SZEMO10070435201

Page : 49 of 68

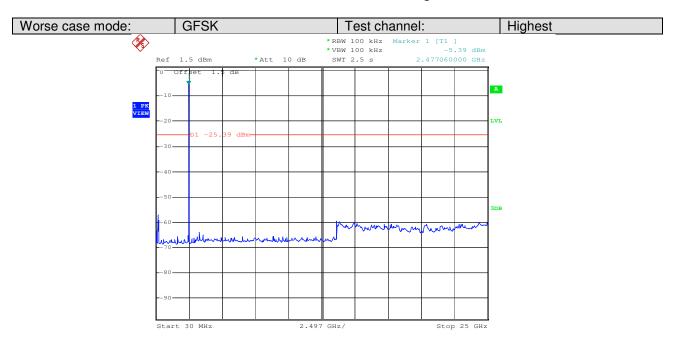

Date: 17.JUL.2010 14:16:22

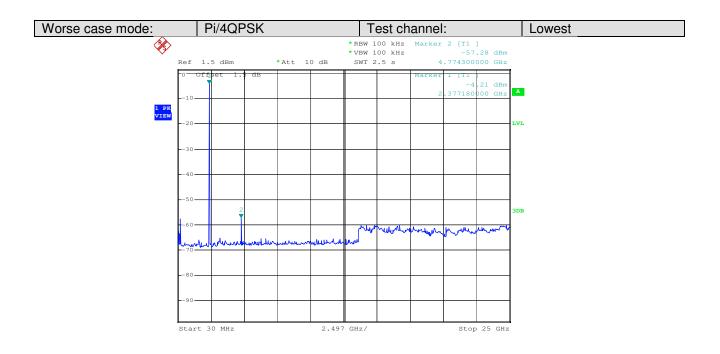


Date: 20.JUL.2010 09:05:10




Report No.: SZEMO10070435201

Page : 50 of 68

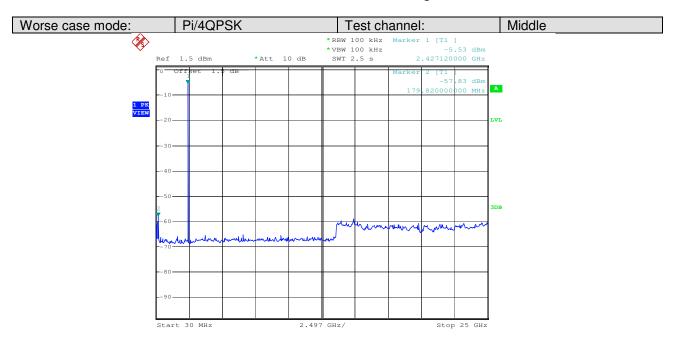

Date: 20.JUL.2010 08:32:01

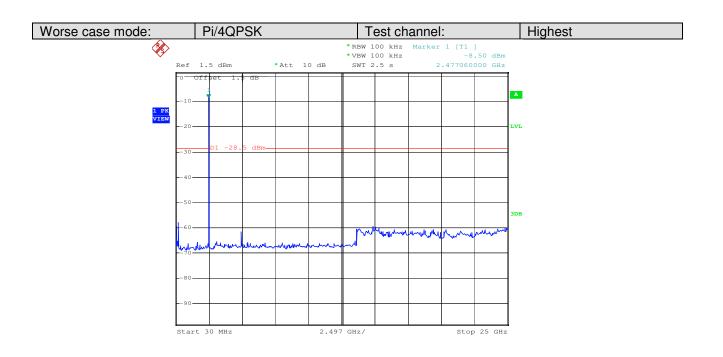


Date: 17.JUL.2010 14:37:04




Report No.: SZEMO10070435201

Page : 51 of 68

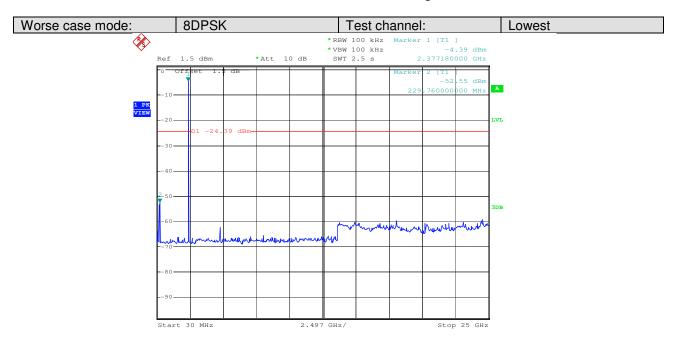

Date: 20.JUL.2010 10:20:39

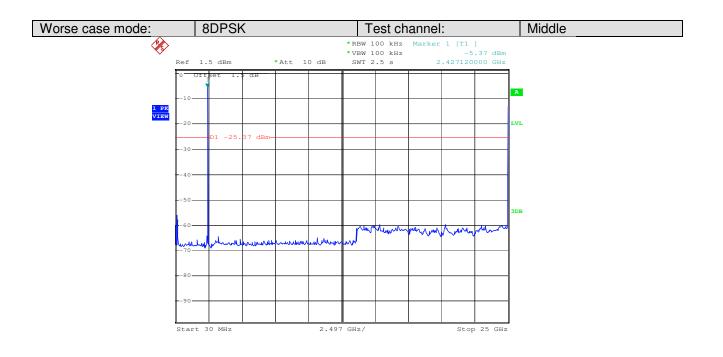


Date: 20.JUL.2010 10:35:56



Report No.: SZEMO10070435201

Page : 52 of 68

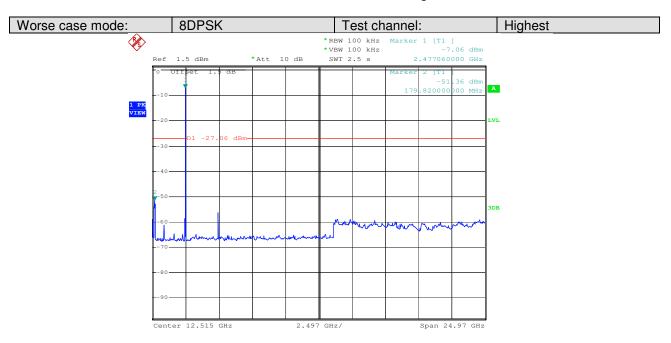

Date: 20.JUL.2010 10:45:56



Report No.: SZEMO10070435201

Page : 53 of 68

5.9 Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- · Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEMO10070435201

Page : 54 of 68


5.10 Radiated Emission

Test Requirement:	FCC Part15 C S	Section 15.209	and 15.205		
Test Method:	ANSI C63.10: 2	009			
Test Frequency Range:	30MHz to 25GH	lz			
Test site:	Measurement D	istance: 3m (S	emi-Anecho	ic Chamber	r)
Receiver setup:		`			,
	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Above Tall2	Peak	1MHz	10Hz	Average Value
Limit:					ı
	Freque	•	Limit (dBuV/		Remark
	30MHz-8		40.0		Quasi-peak Value
	88MHz-21		43.5		Quasi-peak Value
	216MHz-9		46.0		Quasi-peak Value
	960MHz-	1GHz	54.0		Quasi-peak Value
	Above 1	GHz	54.0 74.0		Average Value Peak Value
Test Procedure:	a. The EUT wa	as placed on th			0.8 meters above
	rotated 360 radiation. b. The EUT was mounted. c. The antennal ground to do horizontal at the measured. for each succase and the meters and degrees to fee. The test-recesspecified Base of the EUT have 10dB apeak or avesheet. g. The radiation	ed on the top of a height is varius termine the modern of the modern of the modern of the maximum of the modern of the position level of the position of the maximum of the maximum of the modern of the maximum of the maximum of the modern of the maximum of the m	termine the pass away from for a variable-hed from one laximum valuarizations of the control of	the receiving the receiving the receiving the enter to follow of the fiest the antennation heights find from 0 could be a set the emission of the enter the emission of the em	the highest ag antenna, which an tower. ar meters above the ald strength. Both a are set to make aged to its worst from 1 meter to 4 degrees to 360 Function and a 10dB lower than and the peak values assions that did not ausing peak, quasi- borted in a data Y, Z axis
Test Instruments:	Refer to section				
	<u> </u>				



Report No.: SZEMO10070435201

Page : 55 of 68

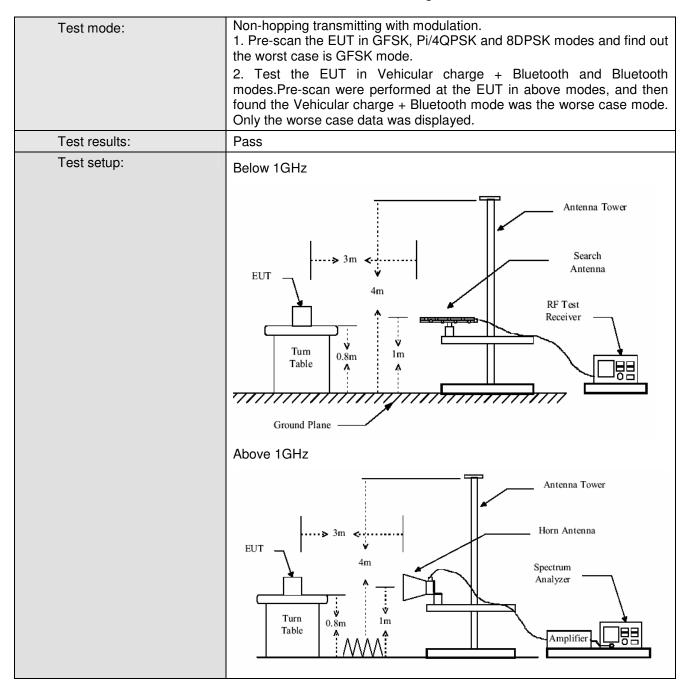

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor






Report No.: SZEMO10070435201

Page : 56 of 68

5.10.1 Radiated emission below 1GHz

Vehicular charge + Bluetooth mode

Vertical:

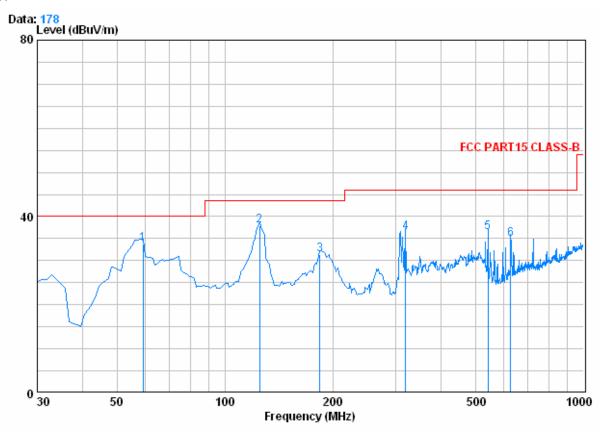


Frequency MHz	Cable A Loss F dB	ntenna actor dB/m	Preamp Factor dB	Read Level dBuV	level dBuV/m	Limit Line dBuV/m	Over Limit dB
59.100	7.27	0.80	27.47	53.27	33.87	40.00	-6.13
125.060	7.80	1.27	27.22	56.00	37.85	43.50	-5.65
184.230	9.98	1.38	26.90	46.89	31.35	43.50	-12.15
319.060	14.59	1.96	26.63	46.42	36.34	46.00	-9.66
541.190	18.78	2.64	27.57	42.45	36.30	46.00	-9.70
626.550	20.50	2.76	27.36	39.03	34.93	46.00	-11.07



Report No.: SZEMO10070435201

Page : 57 of 68

Horizontal:

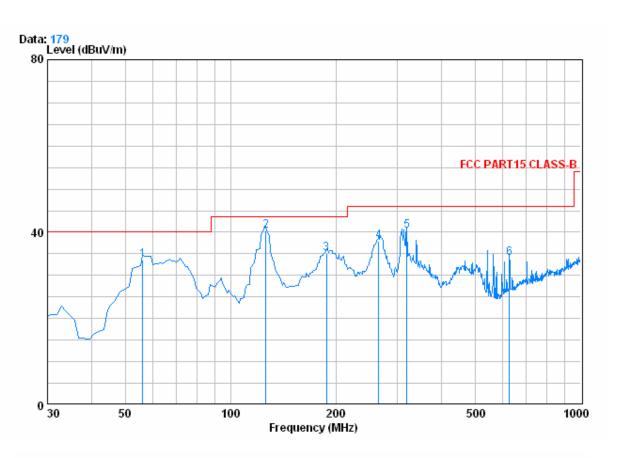

Frequency MHz		Antenna Factor dB/m	Preamp Factor dB	Read Level dBuV	level dBuV/m	Limit Line dBuV/m	Over Limit dB
56.190 126.030 188.110 264.740 319.060 626.550	7.65 7.77 10.06 12.61 14.59 20.50	0.80 1.27 1.38 1.74 1.96 2.76	27.48 27.21 26.89 26.60 26.63 27.36	52.62 58.49 50.55 50.22 50.32 38.13	33.59 40.31 35.10 37.97 40.24 34.02	40.00 43.50 43.50 46.00 46.00 46.00	-6.41 -3.19 -8.40 -8.03 -5.76



Report No.: SZEMO10070435201

Page : 58 of 68

5.10.2 Transmitter emission above 1GHz

Worse case r	node:	GFSK	Test	channel:	Lowest	Rema	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
1588	5.08	27.40	38.94	47.17	40.71	74.00	-33.29	Vertical
4804	9.36	34.25	41.53	55.16	57.24	74.00	-16.76	Vertical
7206	13.38	37.23	40.98	44.15	53.78	74.00	-20.22	Vertical
9608	13.39	37.99	37.56	41.31	55.13	74.00	-18.87	Vertical
12010	16.45	39.10	39.09	40.34	56.80	74.00	-17.20	Vertical
1588	5.08	27.40	38.94	50.18	43.72	74.00	-30.28	Horizontal
4804	9.36	34.25	41.53	54.23	56.31	74.00	-17.69	Horizontal
7206	13.38	37.23	40.98	44.34	53.97	74.00	-20.03	Horizontal
9608	13.39	37.99	37.56	42.02	55.84	74.00	-18.16	Horizontal
12010	16.45	39.10	39.09	41.44	57.90	74.00	-16.10	Horizontal

Worse case r	node:	GFSK	Test	channel:	Lowest	Rem	ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
4804	9.36	34.25	41.53	38.50	40.58	54.00	-13.42	Vertical
7206	13.38	37.23	40.98	32.19	41.82	54.00	-12.18	Vertical
9608	13.39	37.99	37.56	29.17	42.99	54.00	-11.01	Vertical
12010	16.45	39.10	39.09	28.98	45.44	54.00	-8.56	Vertical
1588	5.08	27.40	38.94	37.66	31.20	54.00	-22.80	Vertical
4804	9.36	34.25	41.53	37.00	39.08	54.00	-14.92	Horizontal
7206	13.38	37.23	40.98	32.38	42.01	54.00	-11.99	Horizontal
9608	13.39	37.99	37.56	29.04	42.86	54.00	-11.14	Horizontal
12010	16.45	39.10	39.09	29.04	45.50	54.00	-8.50	Horizontal
4804	9.36	34.25	41.53	38.50	40.58	54.00	-13.42	Horizontal



Report No.: SZEMO10070435201

Page : 59 of 68

Worse case	mode:	GFSK	Tes	t channel:	Middle	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
1602	5.13	27.44	38.81	49.93	43.69	74.00	-30.31	Vertical
4882	10.57	34.35	40.33	46.05	50.64	74.00	-23.36	Vertical
7323	12.91	37.31	40.40	49.17	58.99	74.00	-15.01	Vertical
9764	13.89	38.03	37.94	41.58	55.56	74.00	-18.44	Vertical
12205	17.95	39.23	39.30	43.12	61.00	74.00	-13.00	Vertical
1602	5.13	27.44	38.81	50.85	44.61	74.00	-29.39	Horizontal
4882	10.57	34.35	40.33	50.47	55.06	74.00	-18.94	Horizontal
7323	12.91	37.31	40.40	49.56	59.38	74.00	-14.62	Horizontal
9764	13.89	38.03	37.94	41.62	55.60	74.00	-18.40	Horizontal
12205	17.95	39.23	39.30	40.25	58.13	74.00	-15.87	Horizontal

Worse case	mode:	GFSK	Tes	t channel:	Middle	Rem	ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
1602	5.13	27.44	38.81	38.20	31.96	54.00	-22.04	Vertical
4882	10.57	34.35	40.33	34.47	39.06	54.00	-14.94	Vertical
7323	12.91	37.31	40.40	35.71	45.53	54.00	-8.47	Vertical
9764	13.89	38.03	37.94	29.01	42.99	54.00	-11.01	Vertical
12205	17.95	39.23	39.30	30.38	48.26	54.00	-5.74	Vertical
1602	5.13	27.44	38.81	34.85	28.61	54.00	-25.39	Horizontal
4882	10.57	34.35	40.33	34.51	39.10	54.00	-14.90	Horizontal
7323	12.91	37.31	40.40	33.29	43.11	54.00	-10.89	Horizontal
9764	13.89	38.03	37.94	28.74	42.72	54.00	-11.28	Horizontal
12205	17.95	39.23	39.30	30.10	47.98	54.00	-6.02	Horizontal



Report No.: SZEMO10070435201

Page : 60 of 68

Worse case	mode:	GFSK	Tes	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
1644	5.10	27.57	39.32	49.88	43.23	74.00	-30.77	Vertical
4960	10.43	34.45	41.03	51.32	55.17	74.00	-18.83	Vertical
7440	12.72	37.37	40.01	45.87	55.95	74.00	-18.05	Vertical
9920	14.24	38.08	37.78	40.31	54.85	74.00	-19.15	Vertical
12400	17.55	39.34	39.48	42.51	59.92	74.00	-14.08	Vertical
1644	5.10	27.57	39.32	48.74	42.09	74.00	-31.91	Horizontal
4960	10.43	34.45	41.03	47.32	51.17	74.00	-22.83	Horizontal
7440	12.72	37.37	40.01	44.98	55.06	74.00	-18.94	Horizontal
9920	14.24	38.08	37.78	39.99	54.53	74.00	-19.47	Horizontal
12400	17.55	39.34	39.48	43.07	60.48	74.00	-13.52	Horizontal

Worse case	mode:	GFSK	Tes	t channel:	Highest	Rem	ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
1644	5.10	27.57	39.32	37.72	31.07	54.00	-22.93	Vertical
4960	10.43	34.45	41.03	34.67	38.52	54.00	-15.48	Vertical
7440	12.72	37.37	40.01	32.99	43.07	54.00	-10.93	Vertical
9920	14.24	38.08	37.78	27.84	42.38	54.00	-11.62	Vertical
12400	17.55	39.34	39.48	29.28	46.69	54.00	-7.31	Vertical
1644	5.10	27.57	39.32	36.98	30.33	54.00	-23.67	Horizontal
4960	10.43	34.45	41.03	34.62	38.47	54.00	-15.53	Horizontal
7440	12.72	37.37	40.01	32.93	43.01	54.00	-10.99	Horizontal
9920	14.24	38.08	37.78	27.94	42.48	54.00	-11.52	Horizontal
12400	17.55	39.34	39.48	30.05	47.46	54.00	-6.54	Horizontal

Remark: The disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




Report No.: SZEMO10070435201

Page : 61 of 68

5.10.3 Band edge (Radiated Emission)

Test mode: Transmitting Test channel: Lowest Remark: Peak

Vertical:

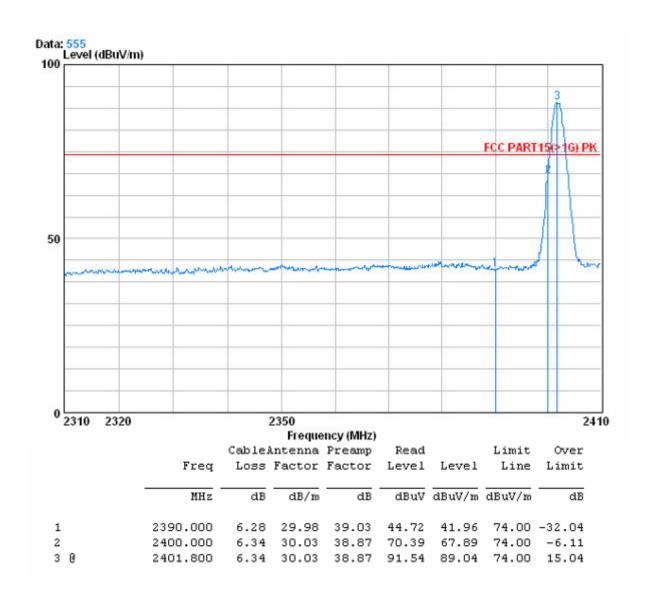




Report No.: SZEMO10070435201

Page : 62 of 68

Horizontal:

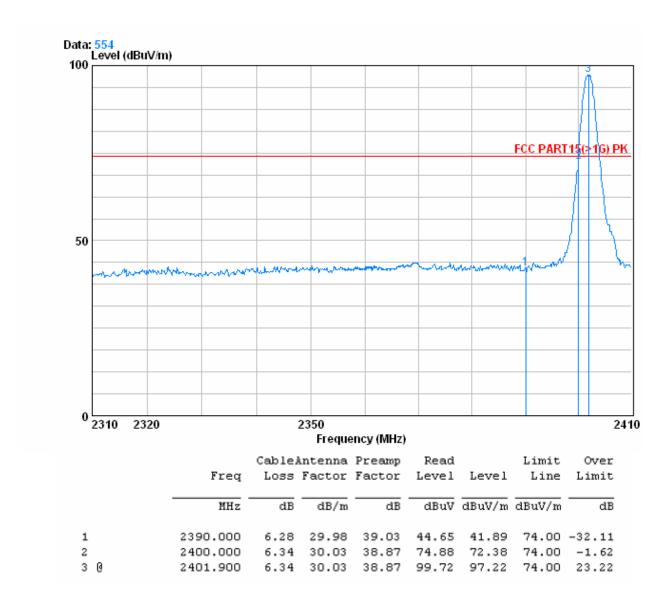




Report No.: SZEMO10070435201

Page : 63 of 68

Test mode: Transmitting Test channel: Lowest Remark: Average

Vertical:

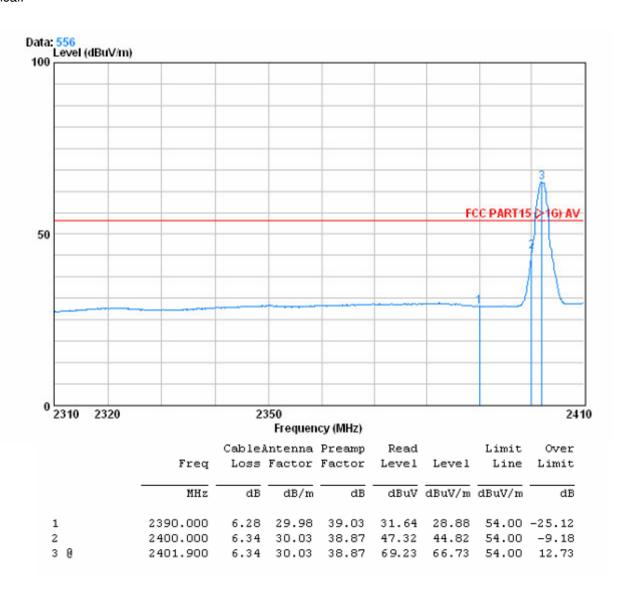




Report No.: SZEMO10070435201

Page : 64 of 68

Horizontal:

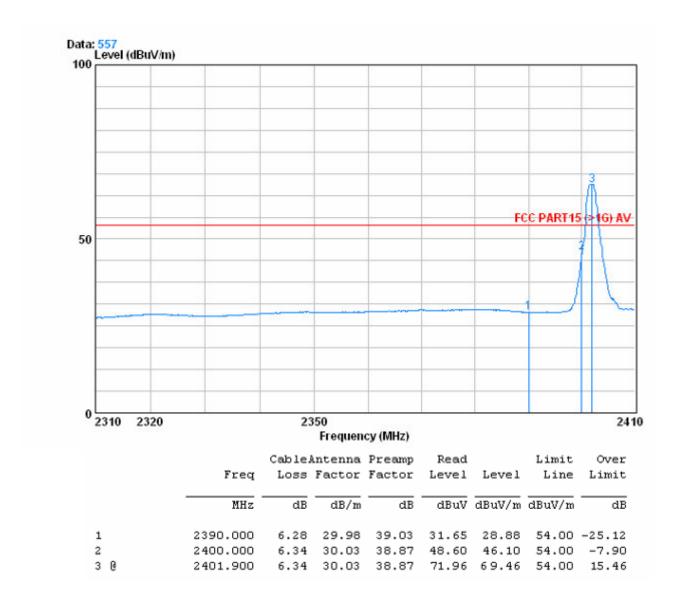




Report No.: SZEMO10070435201

Page : 65 of 68

|--|

Vertical:

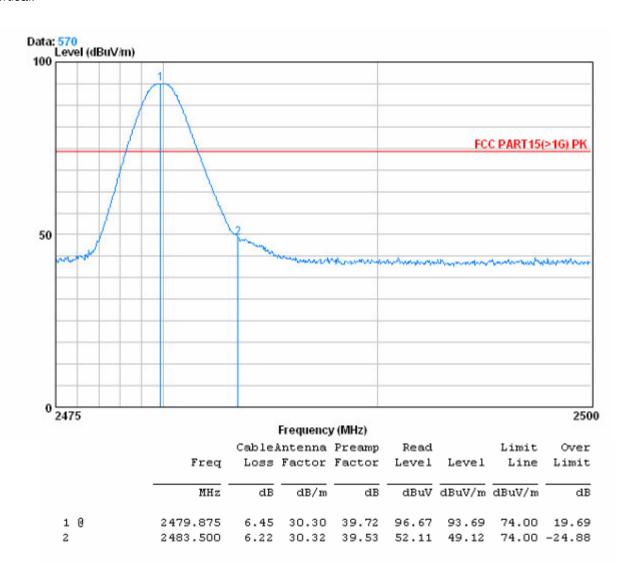






Report No.: SZEMO10070435201

Page : 66 of 68

Horizontal:

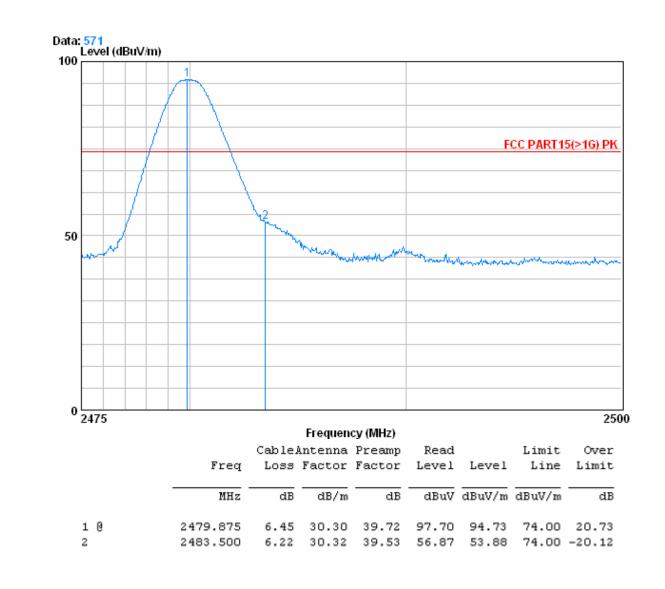




Report No.: SZEMO10070435201

Page : 67 of 68

Test mode: Transmitting Test channel: Highest Remark: Average

Vertical:

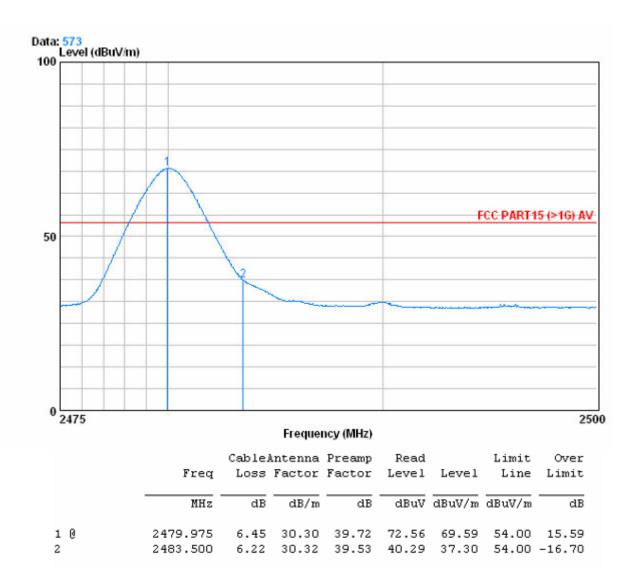




Report No.: SZEMO10070435201

: 68 of 68 Page

Horizontal:

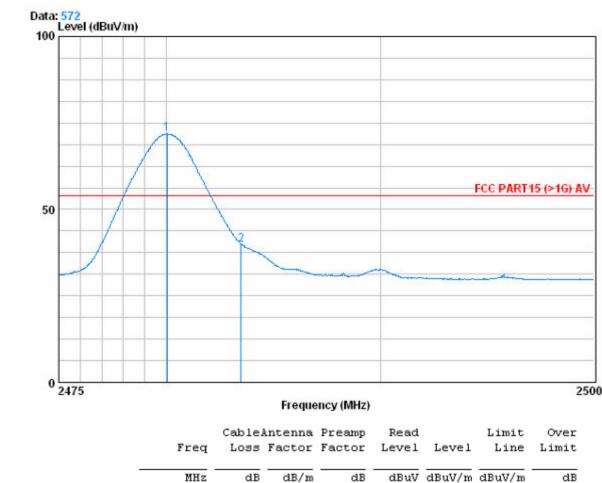

	Freq		intenna Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0 2	2480.050 2483.500	6.45 6.22		39.72 39.53	74.81 42.88		54.00 54.00	