

Rapport d'essai / Test report

N° 415377-A1-R2-E

JDE : 115009

DELIVRE A / ISSUED TO

: ZODIAC POOL CARE EUROPE
ZA de la balme
31450 BELBERAUD - FRANCE

Objet / Subject

: Essais de compatibilité électromagnétique conformément aux normes
FCC CFR 47 Part 15, Subpart B et C.
RSS-210 Issue 8
Electromagnetic compatibility tests according to the standards
FCC CFR 47 Part 15, Subpart B and C
RSS-210 Issue 8

Matériel testé / Apparatus under test :

• Produit / Product	: REMOTE CONTROL
• Marque / Trade mark	: ZODIAC POOL CARE EUROPE
• Constructeur / Manufacturer	: ZODIAC POOL CARE EUROPE
• Type / Model	: ZOD-2.4GHZ-ZT-V1_00
• N° de série / serial number	: PROTO1
• FCC ID	: RIR-24ZT100
• IC	: 10837A-24ZT100

Date des essais / Test date

: Du 10 au 13 Décembre 2012 – 12 Juillet 2013 /
From December 10th to 13th, 2012 and July 12th, 2013

Lieu d'essai / Test location

: LCIE SUD-EST
ZI Centr'Alp – 170 rue de Chatagnon
38430 MOIRANS - FRANCE

Test réalisé par / Test performed by : Anthony MERLIN

Ce document comporte / Composition of document : 48 pages.

MOIRANS, LE 12 JUILLET 2013 / JULY 12TH, 2013

Ecrit par / Written by,
Anthony MERLIN



Approuvé par / Approved By,
Jacques LORQUIN



LABORATOIRE CENTRAL DES
INDUSTRIES ELECTRIQUES
LCIE SUD-EST
ZI Centr'Alp
170, Rue de Chatagnon
38430 MOIRANS

La reproduction de ce document n'est autorisée que sous sa forme intégrale. Toute reproduction partielle ou toute insertion de résultats dans un texte d'accompagnement en vue de leur diffusion doit recevoir un accord préalable et formel du LCIE. Ce document résulte d'essais effectués sur un spécimen, un échantillon ou une éprouvette. Il ne préjuge pas de la conformité de l'ensemble des produits fabriqués à l'objet essayé. Sauf indication contraire, la décision de conformité prend en compte l'incertitude de mesures. Il ne préjuge en aucun cas d'une décision de certification.

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the item tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures. This document does not anticipate any certification decision.

LCIE

33, av du Général Leclerc
BP 8
92266 Fontenay-aux-Roses cedex
France

Tel : +33 1 40 95 60 60
Fax : +33 1 40 95 86 56
contact@lcie.fr
www.lcie.fr

Société par Actions Simplifiée
au capital de 15 745 984 €
RCS Nanterre B 408 363 174
www.lcie.com



SUMMARY

1.	TEST PROGRAM	3
2.	SYSTEM TEST CONFIGURATION.....	4
3.	RADIATED EMISSION DATA	6
4.	BANDWIDTH (15.247)	13
5.	MAXIMUM PEAK OUTPUT POWER (15.247)	16
6.	BAND EDGE MEASUREMENT (15.247)	19
7.	POWER SPECTRAL DENSITY (15.247)	26
8.	OCCUPIED BANDWIDTH.....	30
9.	ANNEX 1 (GRAPHS)	32
10.	UNCERTAINTIES CHART	48



1. TEST PROGRAM

Standard:

- FCC Part 15, Subpart C 15.247
- RSS-210 Issue 8 – Dec 2010
- RSS-Gen Issue 3 – Dec 2010
- ANSI C63.4 (2003)

EMISSION Test	LIMITS			RESULTS (Comments)
Limits for conducted disturbance at mains ports 150kHz-30MHz	Frequency	Quasi-peak value (dBμV)	Average value (dBμV)	NA
	150-500kHz	66 to 56	56 to 46	
	0.5-5MHz	56	46	
	5-30MHz	60	50	
Radiated emissions 9kHz-30MHz CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-210 §A8.5	Measure at 300m 9kHz-490kHz : 67.6dBμV/m /F(kHz) Measure at 30m 490kHz-1.705MHz : 87.6dBμV/m /F(kHz) 1.705MHz-30MHz : 29.5 dBμV/m			PASS
Radiated emissions 30MHz-25GHz* CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-210 §A8.5	Measure at 3m 30MHz-88MHz : 40 dBμV/m 88MHz-216MHz : 43.5 dBμV/m 216MHz-960MHz : 46.0 dBμV/m Above 960MHz : 54.0 dBμV/m			PASS
Bandwidth 6dB CFR 47 §15.247 (a) (2) RSS-210 §A8.2	At least 500kHz			PASS
Maximum Peak Output Power CFR 47 §15.247 (b) RSS-210 §A8.4 (4)	Limit: 30dBm Conducted or Radiated measurement			PASS
Band Edge Measurement CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-210 §A8.5	Limit: -20dBc or Radiated emissions limits in restricted bands			PASS
Power spectral Density CFR 47 §15.247 (e) RSS-210 §A8.2	Limit: 8dBm/3kHz			PASS
Occupied bandwidth RSS-Gen §4.6.1	No limit			PASS
Receiver Spurious Emission** RSS-Gen §4.10	See RSS-Gen §4.10			NA

***§15.33:** The highest internal source of a testing device is defined like more the highest frequency generated or used in the testing device or on which the testing device works or agrees.

- If the highest frequency of the internal sources of the testing device is lower than 108 MHz, measurement must be only performed until 1GHz.
- If the highest frequency of the internal sources of the testing device ranges between 108 MHz and 500 MHz, measurement must be only performed until 2GHz.
- If the highest frequency of the internal sources of the testing device ranges between 500 MHz and 1 GHz, measurement must be only performed until 5GHz.

If the highest frequency of the internal sources of the testing device is above 1 GHz, measurement must be only performed until 5 times the highest frequency or 40 GHz, while taking smallest of both.

****Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.**



2. SYSTEM TEST CONFIGURATION

2.1. JUSTIFICATION

The system was configured for testing in a typical fashion (as a customer would normally use it).

2.2. HARDWARE IDENTIFICATION

- **Equipment under test (EUT):**

ZOD-2.4GHz-ZT-V1_00

Serial number: PROTO1

FCC ID: RIR-24ZT100

IC: 10837A-24ZT100

- Internal max frequencies: 32MHz

- **Power supply:**

- Batteries: 2 x 1.5VDC LR03 AAA provide by manufacturer.

During all the tests, EUT is supplied by this power.

- **Input/output:**

- 1 x Antenna, ceramic

- **Cables:**

- None

- **Auxiliaries equipment used during test:**

- None

- **Equipment information:**

- Frequency band:	[2400.0-2483.5] MHz		
- Standard:	☐ Wifi	☐ Bluetooth	☒ Zigbee
- Spectrum Modulation:	☐ FHSS		☒ DSSS
- Modulation type:	☒ QPSK	☐ Pi/4 DQPSK	☐ 8DPSK
- Number of channel:	16 channels		
- Channel separation:	☒ 5MHz	☐ 2MHz	☐ 1MHz
- Channel tested:	Full test on 2405MHz, 2445MHz and 2480MHz		
- RF mode:	☒ TX/RX	☐ RX	☐ Standby
- Antenna type:	Integral, ceramic	2dBi (declaration of provider)	
- Antenna connector:	☐ Permanent external	☐ Permanent internal	
	☒ None	☐ Temporary (only for tests)	



2.3. EUT CONFIGURATION

EUT is set in a special mode for all tests. Followings configurations are used to perform tests.

1. Permanent Tx modulated, channel 11.
2. Permanent Tx modulated, channel 19.
3. Permanent Tx modulated, channel 26.

2.4. EQUIPMENT MODIFICATIONS

None

2.5. SPECIAL ACCESSORIES

None

3. RADIATED EMISSION DATA

3.1. CLIMATIC CONDITIONS

Date of test	: December 10 th , 2012	December 11 th , 2012	December 12 th , 2012
Test performed by	: A.MERLIN		
Atmospheric pressure	: 994hPa	997hPa	999hPa
Relative humidity	: 29%	32%	23%
Ambient temperature	: 21°C	21°C	21°C

3.2. TEST SETUP

The installation of EUT is identical for pre-characterization measurement in a 3 meters semi anechoic chamber and for measures on a 10 meters Open site.



Radiated emission test setup



3.3. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Amplifier 8 GHz	HEROTEK	A1080304A	A7102024
Amplifier 8-26GHz	ALDETEC	ALS01452	A7102026
Antenna Loop	ELECTRO-METRICS	EM-6879	C2040052
Antenna Bi-Log XWing	TESEQ	CBL6144	C2040145
Antenna Bi-log	CHASE	CBL6111A	C2040172
Antenna horn	EMCO	3115	C2042027
Antenna horn 26GHz	SCHWARZBECK	BBHA 9170	C2042028
Cable N/N	-	-	A5329038
Cable	UTIFLEX	-	A5329192
Cable N/N	-	-	A5329206
Cable	-	-	A5329352
Semi-Anechoic chamber #1	SIEPEL	-	D3044016
Semi-Anechoic chamber #3	SIEPEL	-	D3044017
Radiated emission comb generator	BARDET	-	A3169050
High Pass (4.8-18GHz)	BL Microwave	SH4800-1800	A7484034
Band Rejector (2.4GHz/9kHz-6GHz)	BL Microwave	BR2445-200-7CSJ	A7484043
Receiver 20Hz-26.5GHz	ROHDE & SCHWARZ	ESIB26	A2642021
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371
Turntable chamber (Cage#1)	MATURO Gmbh	TT 2.0 SI	F2000406
Antenna mast (Cage#1)	MATURO Gmbh	AM 4.0	F2000407
Turntable controller (Cage#1)	MATURO Gmbh	Control Unit	F2000408
Table	MATURO Gmbh	-	F2000437
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444

3.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



3.5. TEST SEQUENCE AND RESULTS

3.5.1. Pre-characterization at 3 meters [9kHz-30MHz]

A pre-scan of all the setup has been performed in a 3 meters semi anechoic chamber. The distance between EUT and antenna is 3 meters. For Pre-characterization, the loop antenna was rotated during the test for maximized the emission measurement. Measurement performed on 3 axis of EUT. Frequency band investigated is 9kHz to 30MHz.

The pre-characterization graphs are obtained in PEAK detection.

See graph for 9kHz-30MHz band:

Circular polarization (0°)	Emr#1	Axis XY – C11	(See annex 1)
Circular polarization (0°)	Emr#2	Axis Z – C11	(See annex 1)
Circular polarization (90°)	Emr#3	Axis XY – C11	(See annex 1)
Circular polarization (90°)	Emr#4	Axis Z – C11	(See annex 1)
Circular polarization (0°)	Emr#9	Axis XY – C26	(See annex 1)
Circular polarization (0°)	Emr#10	Axis Z – C26	(See annex 1)
Circular polarization (90°)	Emr#11	Axis XY – C26	(See annex 1)
Circular polarization (90°)	Emr#12	Axis Z – C26	(See annex 1)

Note: Same results with C19, worst case presented.

3.5.2. Pre-characterization [30MHz-25GHz]

For frequency band 30MHz to 1GHz, a pre-scan of all the setup has been performed in a 3 meters semi anechoic chamber.

The distance between EUT and antenna is 3 meters. Test is performed in horizontal (H) and vertical (V) polarization with a log-periodic antenna. The EUT is being rotated on 360° and on 3 axis during the measurement. The pre-characterization graphs are obtained in PEAK detection.

For frequency band 1GHz to 25GHz, a search is performed in the semi-anechoic chamber in order to determine frequencies radiated by the EUT (Measuring distance reduced to 1m and 20cm for frequencies from 12GHz to 25GHz).

See graphs for 30MHz-1GHz:

Horizontal polarization	Emr#5	Axis XY – C11	(See annex 1)
Horizontal polarization	Emr#6	Axis Z – C11	(See annex 1)
Vertical polarization	Emr#7	Axis XY – C11	(See annex 1)
Vertical polarization	Emr#8	Axis Z – C11	(See annex 1)
Horizontal polarization	Emr#13	Axis XY – C26	(See annex 1)
Horizontal polarization	Emr#14	Axis Z – C26	(See annex 1)
Vertical polarization	Emr#15	Axis XY – C26	(See annex 1)
Vertical polarization	Emr#16	Axis Z – C26	(See annex 1)

Note: Same results with C19, worst case presented.

**3.5.3. Characterization on 10 meters open site below 30 MHz**

The product has been tested according to ANSI C63.4 (2003), FCC part 15 subpart C. Radiated Emissions were measured on an open area test site. A description of the facility is on file with the FCC.

The product has been tested at a distance of **10 meters** from the antenna and compared to the FCC part 15 subpart C §15.109 limits and C §15.209.

Antenna height was 1m for both horizontal and vertical polarization.

Antenna was rotated around its vertical axis.

Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown in following tables.

Frequency (MHz)	QPeak Limit (dBµV/m) @ 30m	Qpeak (dBµV/m)	Qpeak-Limit (Margin dB)	Turntable Angle (deg)	Ant. Pol./ Angle (deg)	Tot Corr (dB)
--------------------	----------------------------------	-------------------	----------------------------	-----------------------------	---------------------------	------------------

No frequency observed, see graphs

*: Measure have been done at 10m distance and corrected according to requirements of 15.209.e) ($M@30m = M@10m - 19.1dB$)

**3.5.4. Characterization on 10 meters open site from 30MHz to 1GHz**

The product has been tested at a distance of **10 meters** from the antenna and compared to the FCC part 15 subpart B §15.109 limits and C §15.209 limits. Measurement bandwidth was 120kHz from 30 MHz to 1GHz. Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following tables.

Worst case final data result:

No	Frequency (MHz)	QPeak Limit (dBµV/m)	Qpeak * (dBµV/m)	Qpeak-Limit (Margin, dB)	Angle (deg)	Pol	Hgt (cm)	Tot Corr (dB)	Comments
----	--------------------	-------------------------	---------------------	-----------------------------	----------------	-----	-------------	------------------	----------

No frequency observed, see graphs

*: Measure have been done at 10m distance and corrected according to requirements of 15.209.e)
(M@3m = M@10m+10.5dB)



3.5.5. Characterization on 3 meters anechoic chamber from 1GHz to 25GHz

The product has been tested at a distance of **3 meters** from the antenna and compared to the FCC part 15 subpart B §15.109 limits and C §15.209 limits. Measurement bandwidth was 1MHz from 1GHz to 25GHz. Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following tables.

Frequency band 1GHz to 25GHz

Measurements are performed using a PEAK and Average detection. (RBW = 1MHz)

No	Frequency (MHz)	Limit Average (dBµV/m)	Measure Average (dBµV/m)	Margin (Mes-Lim) (dB)	Angle Table (deg)	Pol Ant.	Ht Ant. (cm)	Correc. factor (dB)	Comments
1	1216	54.0	24.5	-29.5	310	H	110	-5.2	Axis XY - ALL
2	2224	54.0	38.6	-15.4	10	V	110	-2.3	Axis XY - C26
3	2245	54.0	36.8	-17.2	325	V	110	-2.3	Axis XY - C11
4	2256	54.0	36.9	-17.1	15	V	110	-2.3	Axis XY - C26
5	2276	54.0	36.4	-17.6	320	V	110	-2.3	Axis XY - C11
6	2285	54.0	34.2	-19.8	320	V	110	-2.3	Axis XY - C19
7	2288	54.0	36.2	-17.8	350	V	110	-2.3	Axis XY - C26
8	2317	54.0	32.9	-21.1	355	V	110	-2.1	Axis XY - C19
9	2320	54.0	35.3	-18.7	25	V	110	-2.1	Axis XY - C26
10	2352	54.0	36.2	-17.8	320	V	110	-2.1	Axis XY - C26
11	2373	54.0	41.2	-12.8	10	V	110	-2.1	Axis XY - C11
12	4810	54.0	47.0	-7.0	55	V	110	5.1	Axis XY - C11
13	4890	54.0	45.7	-8.3	45	V	110	5.3	Axis XY - C19
14	4960	54.0	44.9	-9.1	60	V	110	5.4	Axis XY - C26
15	2483.5	54.0	32.3	-21.7	180	V	110	-2.0	Axis XY - C26

No	Frequency (MHz)	Limit Peak (dBµV/m)	Measure Peak (dBµV/m)	Margin (Mes-Lim) (dB)	Angle Table (deg)	Pol Ant.	Ht Ant. (cm)	Correc. factor (dB)	Comments
1	1216	74.0	43.7	-30.3	310	H	110	-5.2	Axis XY - ALL
2	2224	74.0	47.1	-26.9	10	V	110	-2.3	Axis XY - C26
3	2245	74.0	47.8	-26.2	325	V	110	-2.3	Axis XY - C11
4	2256	74.0	49.9	-24.1	15	V	110	-2.3	Axis XY - C26
5	2276	74.0	49.3	-24.7	320	V	110	-2.3	Axis XY - C11
6	2285	74.0	47.2	-26.8	320	V	110	-2.3	Axis XY - C19
7	2288	74.0	45.6	-28.4	350	V	110	-2.3	Axis XY - C26
8	2317	74.0	46.6	-27.4	355	V	110	-2.1	Axis XY - C19
9	2320	74.0	46.1	-27.9	25	V	110	-2.1	Axis XY - C26
10	2352	74.0	45.0	-29.0	320	V	110	-2.1	Axis XY - C26
11	2373	74.0	47.7	-26.3	10	V	110	-2.1	Axis XY - C11
12	4810	74.0	53.0	-21.0	55	V	110	5.1	Axis XY - C11
13	4890	74.0	52.2	-21.8	45	V	110	5.3	Axis XY - C19
14	4960	74.0	55.6	-18.4	60	V	110	5.4	Axis XY - C26
15	2483.5	74.0	43.8	-30.2	180	V	110	-2.0	Axis XY - C26

Note: Measures have been done at 3m distance.

RESULTS: PASS



3.6. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength
- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Factor
- AG = Amplifier Gain

Assume a receiver reading of 52.5dB μ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB μ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$



4. BANDWIDTH (15.247)

4.1. TEST CONDITIONS

Date of test : December 11th, 2012
Test performed by : A.MERLIN
Atmospheric pressure : 997mb
Relative humidity : 32%
Ambient temperature : 21°C

4.1. EQUIPMENT CONFIGURATION

Modulation: QPSK

4.2. LIMIT

The 6 dB bandwidth must be greater than 500 kHz.

4.3. SETUP

Radiated measurement:

The EUT is placed in an anechoic chamber; the center frequency of the spectrum analyzer is set to the fundamental frequency and using 100kHz RBW and VBW>RBW, the span greater than RBW.

The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete, a delta marker is used to measure the frequency difference as the emission bandwidth.

**4.4. TEST EQUIPMENT LIST**



DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Antenna horn	EMCO	3115	C2042027
Cable N/N	-	-	A5329038
Cable	UTIFLEX	-	A5329192
Cable N/N	-	-	A5329206
Semi-Anechoic chamber #3	SIEPEL	-	D3044017
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444

4.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

4.6. TEST SEQUENCE AND RESULTS

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	PASS / FAIL
11	2405	1756	PASS
19	2445	1597	PASS
26	2480	1726	PASS

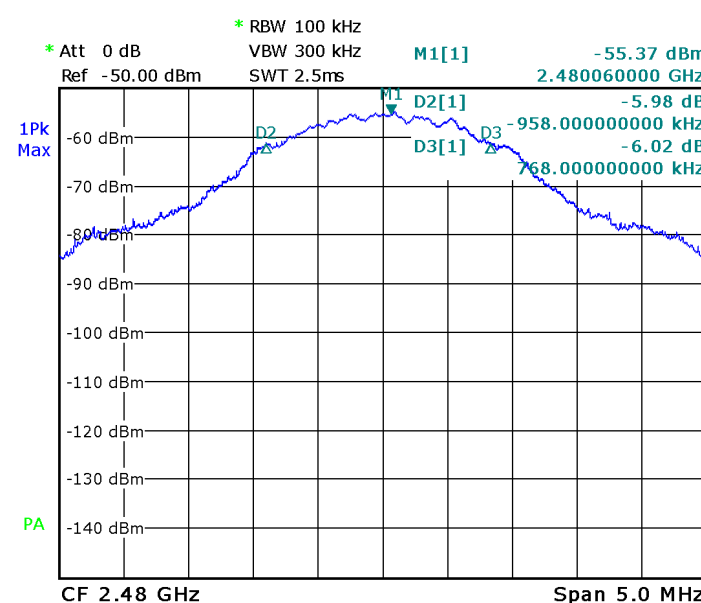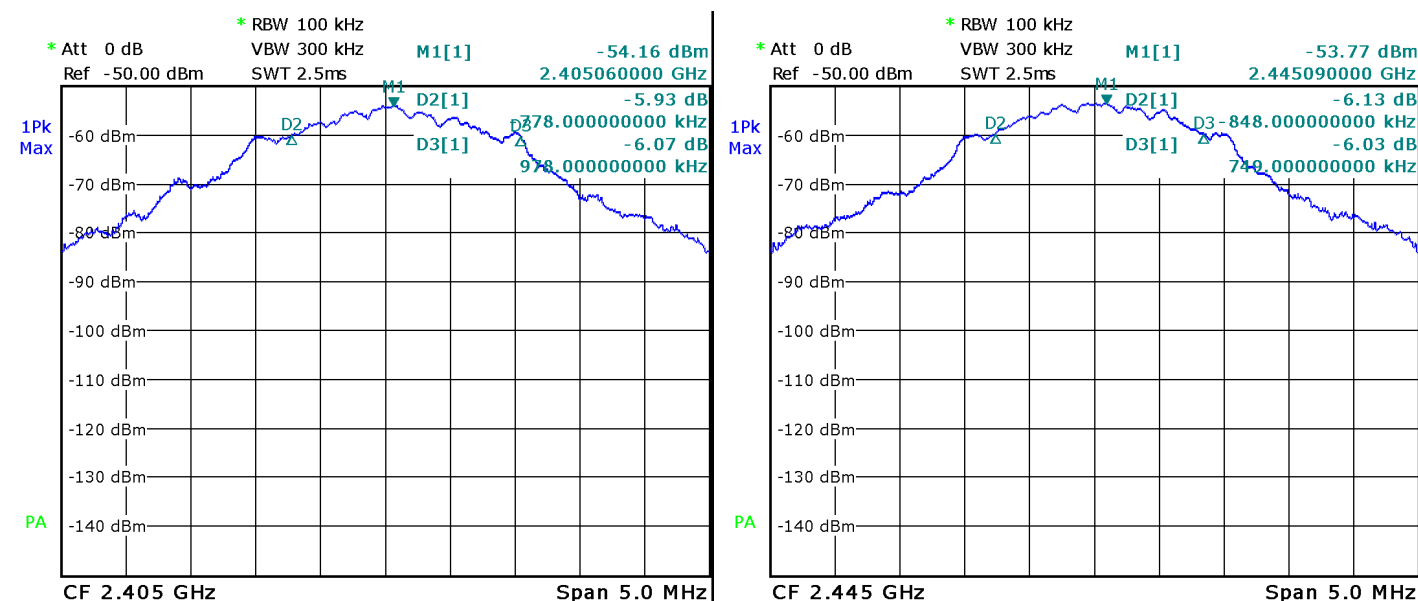

**5. MAXIMUM PEAK OUTPUT POWER (15.247)****5.1. TEST CONDITIONS**

Date of test : December 11th, 2012
Test performed by : A.MERLIN
Atmospheric pressure : 997mb
Relative humidity : 32%
Ambient temperature : 21°C

5.2. EQUIPMENT CONFIGURATION

Modulation: QPSK

5.3. SETUP*Radiated measurement:*

The product has been tested at a distance of 3 meters from the antenna and using 3MHz RBW and 10MHz VBW. Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following table. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

To demonstrate compliance with peak output power requirement of section 15.247 (b), the transmitter's peak output power is calculated using the following equation:

$$E = \frac{\sqrt{30 P G}}{d}$$

Where:

- E is the measured maximum fundamental field strength in V/m, utilizing a RBW $\geq$ the 20 dB bandwidth of the emission, VBW > RBW, peak detector function. Follow the procedures in C63.4-1992 with respect to maximizing the emission.
- G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.
- d is the distance in meters from which the field strength was measured.
- P is the power in watts for which you are solving:

$$P = \frac{(E d)^2}{30 G}$$

**5.4. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Antenna horn	EMCO	3115	C2042027
Cable	-	-	A5329183
Cable	-	-	A5329191
Cable	-	-	A5329590
Semi-Anechoic chamber #1	SIEPEL	-	D3044016
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020
Turntable chamber (Cage#1)	MATURO Gmbh	TT 2.0 SI	F2000406
Antenna mast (Cage#1)	MATURO Gmbh	AM 4.0	F2000407
Turntable controller (Cage#1)	MATURO Gmbh	Control Unit	F2000408
Table	MATURO Gmbh	-	F2000437


5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

5.1. TEST SEQUENCE AND RESULTS

Channel	Channel Frequency (MHz)	Maximum Field (dBμV/m)	Peak Output Power Conducted (dBm)	Power Limit (dBm)	FC (dB)	PASS / FAIL
C11	2405	96.6	-0.6	30	33.1	PASS
C19	2445	95.6	-1.6	30	33.1	PASS
C26	2480	94.5	-2.7	30	33.1	PASS

Alternative test procedure: Radiated measurements performed, ceramic antenna used with gain 2dBi.

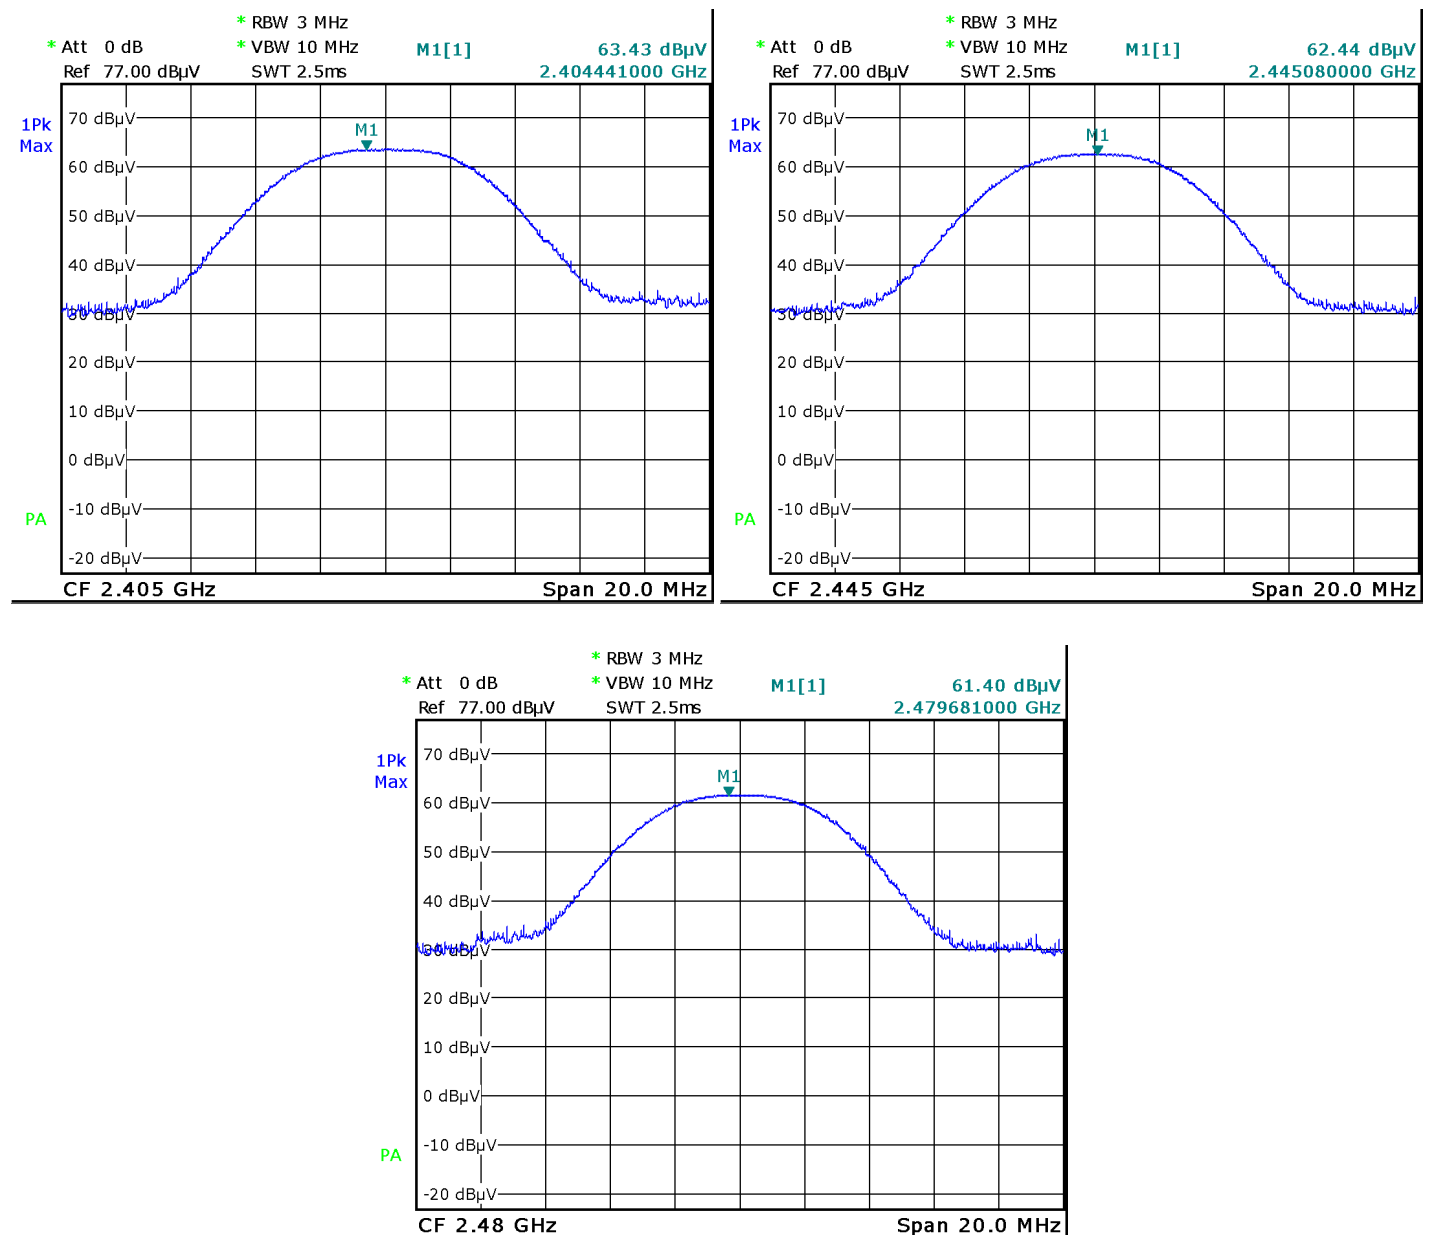

**6. BAND EDGE MEASUREMENT (15.247)****6.1. TEST CONDITIONS**

Date of test : December 11th, 2012
Test performed by : A.MERLIN
Atmospheric pressure : 997mb
Relative humidity : 32%
Ambient temperature : 21°C

6.2. LIMIT**RF antenna conducted test:**

Set RBW = 100 kHz, Video bandwidth (VBW) > RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.

Radiated emission test:

Applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See results in Radiated emissions section before.

6.3. EQUIPMENT CONFIGURATION

Modulation: QPSK
Channel frequency: C11, C19 and C26

6.4. SETUP

The EUT is placed in an anechoic chamber; levels have been corrected to be in compliant with Peak Output Power measurement. The EUT is turn ON; the graphs of the restrict frequency band are recorded with a display line indicating the highest level and other the 20dB offset below to show compliance with 15.247 (d) and 15.205. The emissions in restricted bands are compared to 15.209 limits.

RBW: 100kHz
VBW: 300kHz

6.5. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Attenuator 10dB	JFW	-	A7122166
Receiver 20Hz-26.5GHz	ROHDE & SCHWARZ	ESIB26	A2642021
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020


6.6. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None




6.7. TEST SEQUENCE AND RESULTS

Frequency: 30MHz – 1GHz

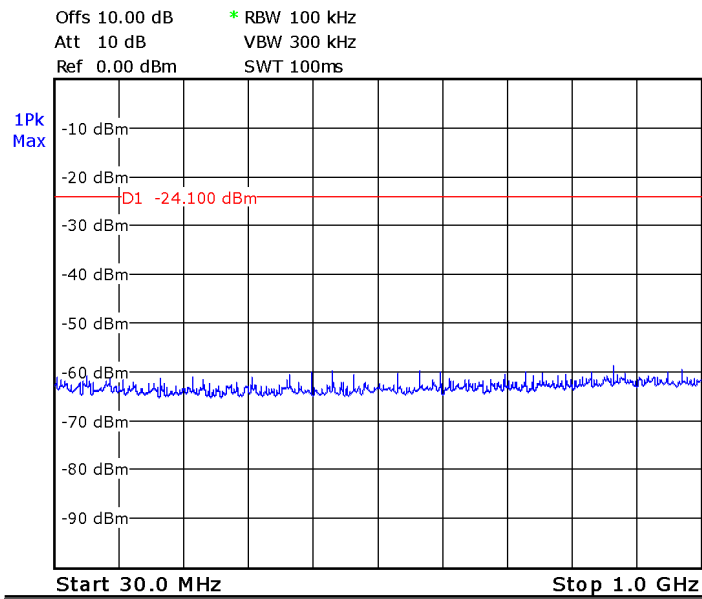


No frequency observed for all channels tested.


Frequency: 1GHz – 6GHz

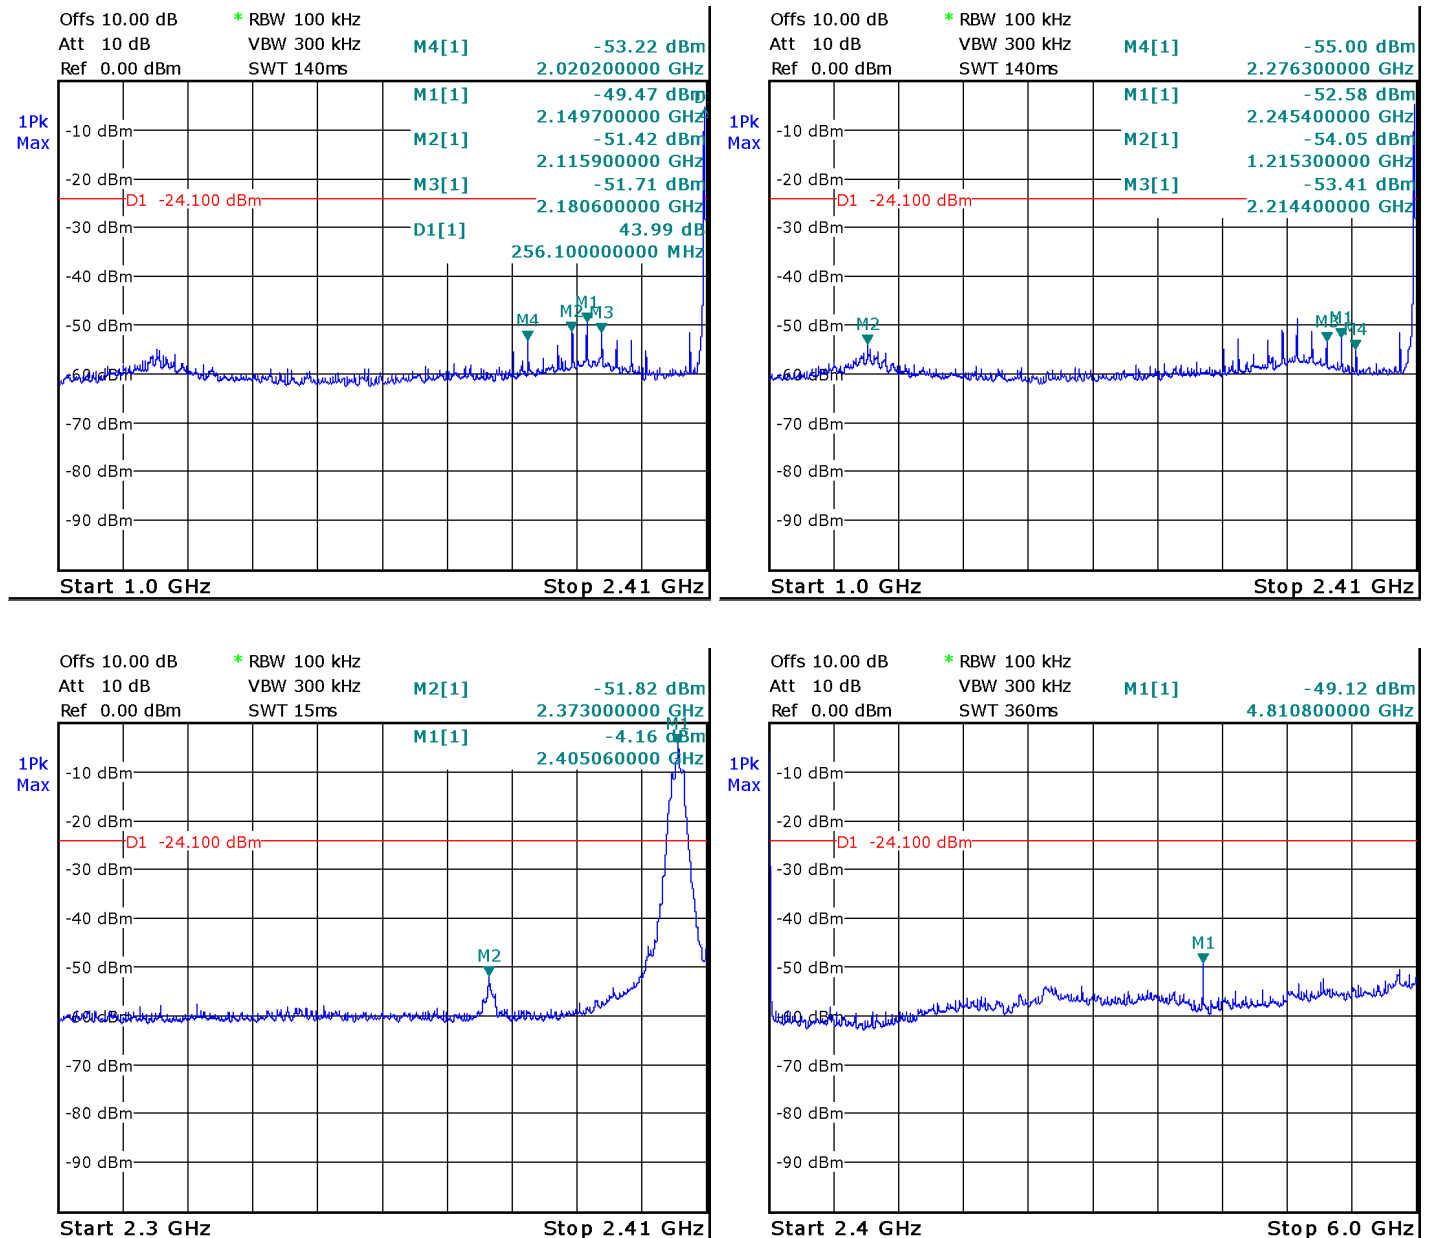

For channel C11, spurious in restricted frequency bands are measured in § 4 (Radiated emission data).

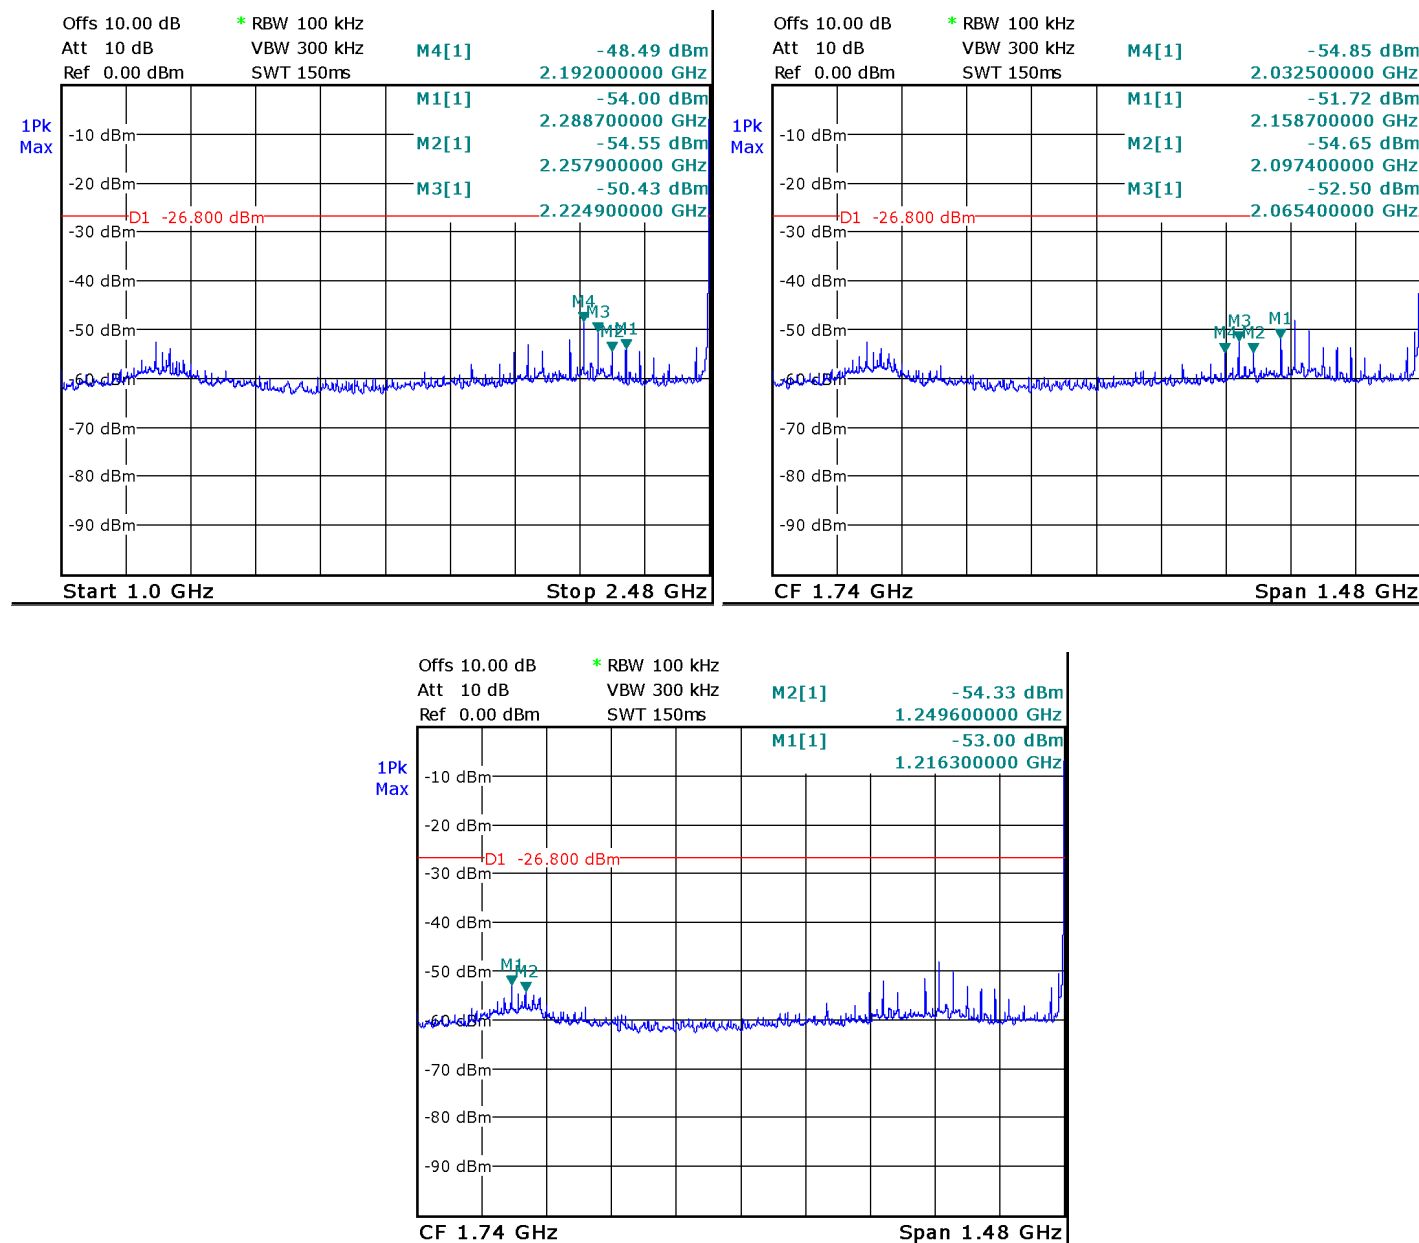

Frequency: 6GHz – 25GHz

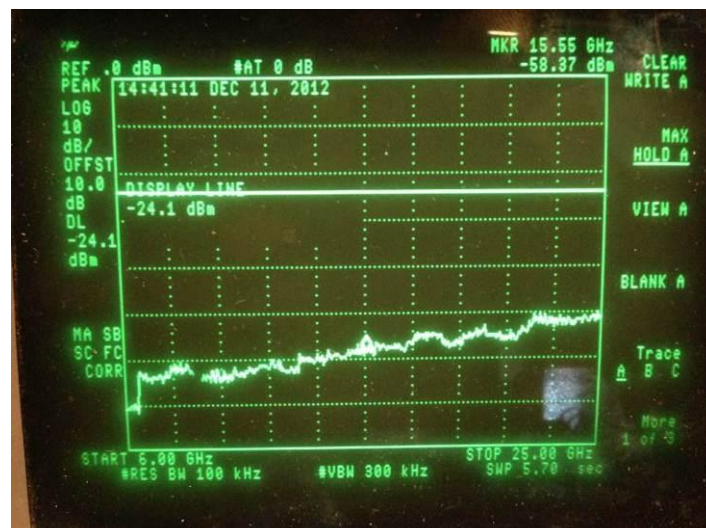

No frequency observed for all channels tested.

**7. POWER SPECTRAL DENSITY (15.247)****7.1. TEST CONDITIONS**

Date of test : December 11th, 2012
Test performed by : A.MERLIN
Atmospheric pressure : 997mb
Relative humidity : 32%
Ambient temperature : 21°C

7.1. SETUP*Radiated measurement:*

The product has been tested at a distance of 3 meters from the antenna and using 3kHz RBW and VBW>RBW. Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following table. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete. To demonstrate compliance with power spectral density requirement of section 15.247, the PSD is calculated using the following equation:

$$E = \frac{\sqrt{30PG}}{d}$$

Where:

- E is the measured maximum fundamental field strength in V/m, utilizing a RBW $\geq$ the 6dB bandwidth of the emission, VBW > RBW, peak detector function. Follow the procedures in C63.4-1992 with respect to maximizing the emission.
- G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.
- d is the distance in meters from which the field strength was measured.
- P is the power in watts for which you are solving:

$$P = \frac{(Ed)^2}{30G}$$

**7.2. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Antenna horn	EMCO	3115	C2042027
Cable	-	-	A5329183
Cable	-	-	A5329191
Cable	-	-	A5329590
Semi-Anechoic chamber #1	SIEPEL	-	D3044016
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020
Turntable chamber (Cage#1)	MATURO Gmbh	TT 2.0 SI	F2000406
Antenna mast (Cage#1)	MATURO Gmbh	AM 4.0	F2000407
Turntable controller (Cage#1)	MATURO Gmbh	Control Unit	F2000408
Table	MATURO Gmbh	-	F2000437

7.3. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION




None

8. OCCUPIED BANDWIDTH

8.1. CLIMATIC CONDITIONS

Date of test : July 12th, 2013
 Test performed by : A.MERLIN
 Atmospheric pressure : 989hPa
 Relative humidity : 45%
 Ambient temperature : 23°C

8.2. TEST RESULTS

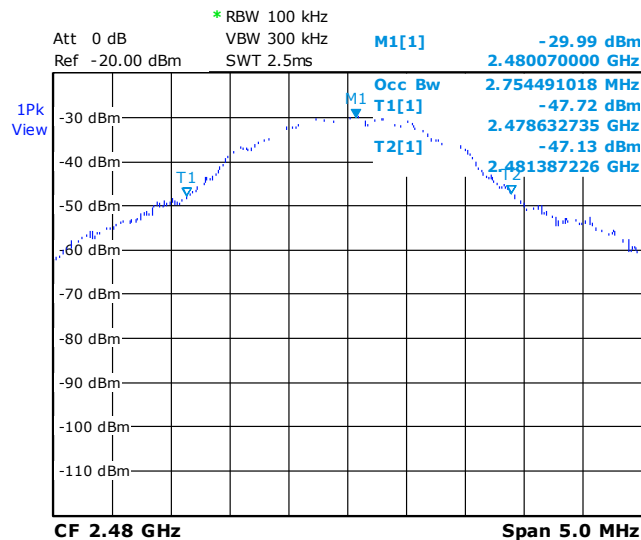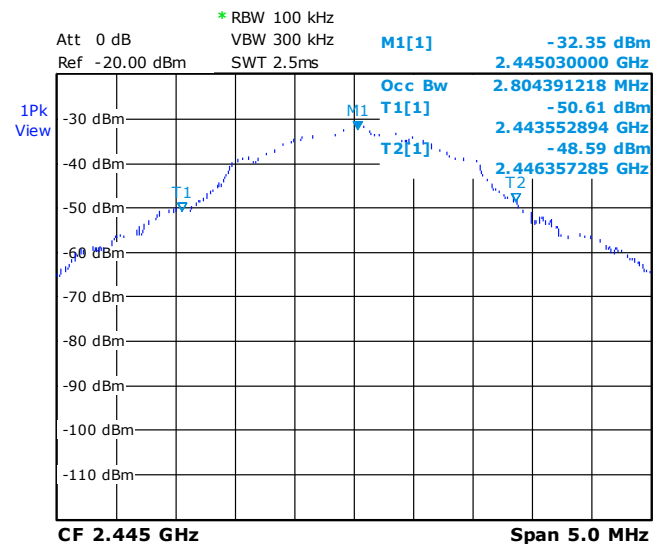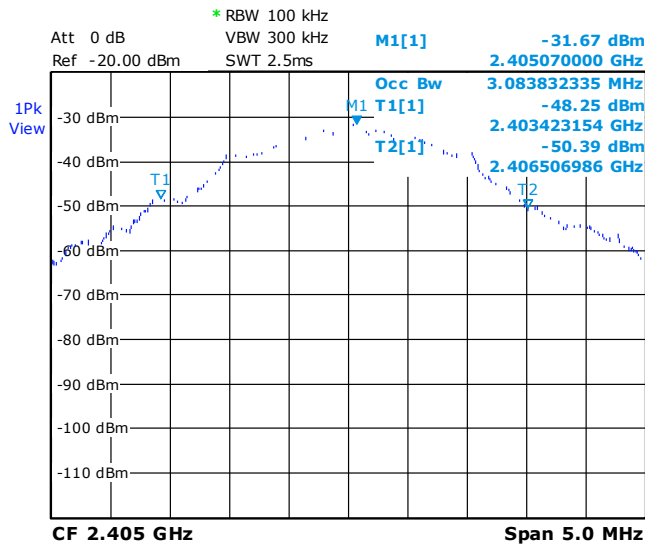

Worst measured occupied bandwidth is **3.084MHz**

Measurement settings:

RBW = 30kHz / Video BW = 100kHz / SPAN = 5.0MHz / MaxHold / PEAK

The occupied bandwidth is measured with OBW function of spectrum analyzer.

**8.3. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Antenna horn	EMCO	3115	C2042027
Cable	-	-	A5329183
Cable	-	-	A5329191
Cable	-	-	A5329590
Semi-Anechoic chamber #1	SIEPEL	-	D3044016
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020

8.1. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

**9. ANNEX 1 (GRAPHS)****RADIATED EMISSIONS**


Graph name :	Emr#1	Test configuration:
Limit :	FCC Part15C	(C-0°) - Axis XY - TX C11 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	300Hz	
VBW :	1kHz	QPeak Limit@3m
Frequency :	9kHz- 150kHz	

PARAMETERS

Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	10kHz	
VBW :	30kHz	QPeak Limit@3m
Frequency :	150kHz- 30MHz	

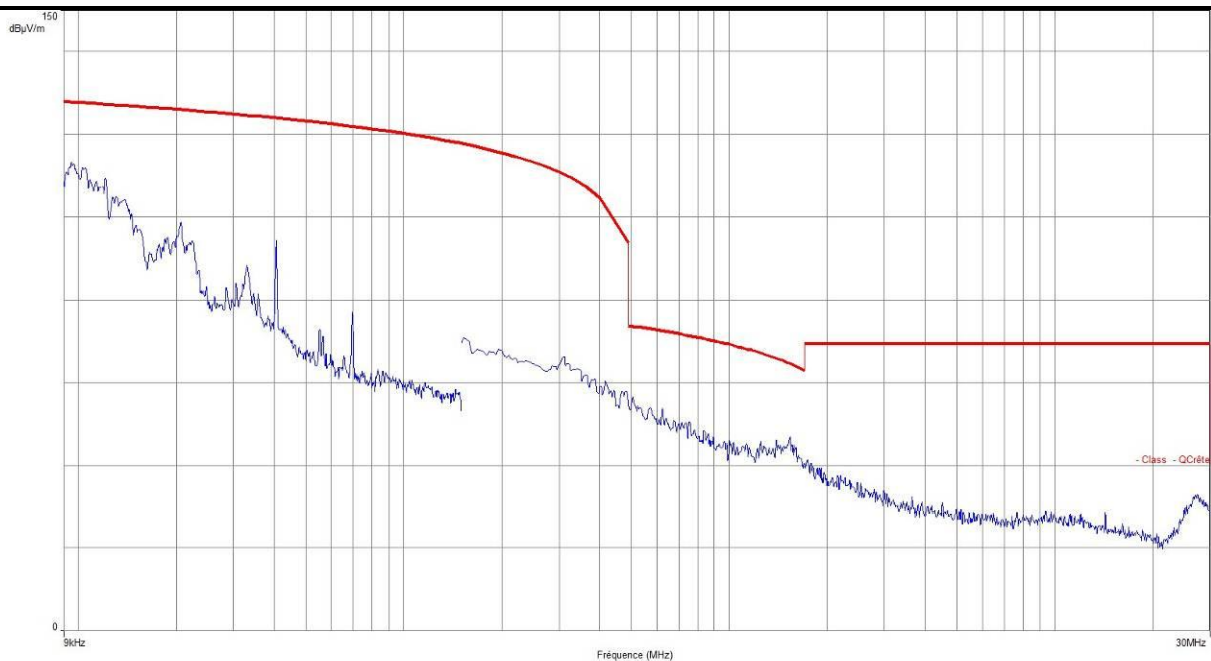



RADIATED EMISSIONS


Graph name :	Emr#2	Test configuration:
Limit :	FCC Part15C	(C-0°) - Axis Z - TX C11 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	300Hz	QPeak Limit@3m
VBW :	1kHz	
Frequency :	9kHz- 150kHz	

PARAMETERS

Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	10kHz	QPeak Limit@3m
VBW :	30kHz	
Frequency :	150kHz- 30MHz	

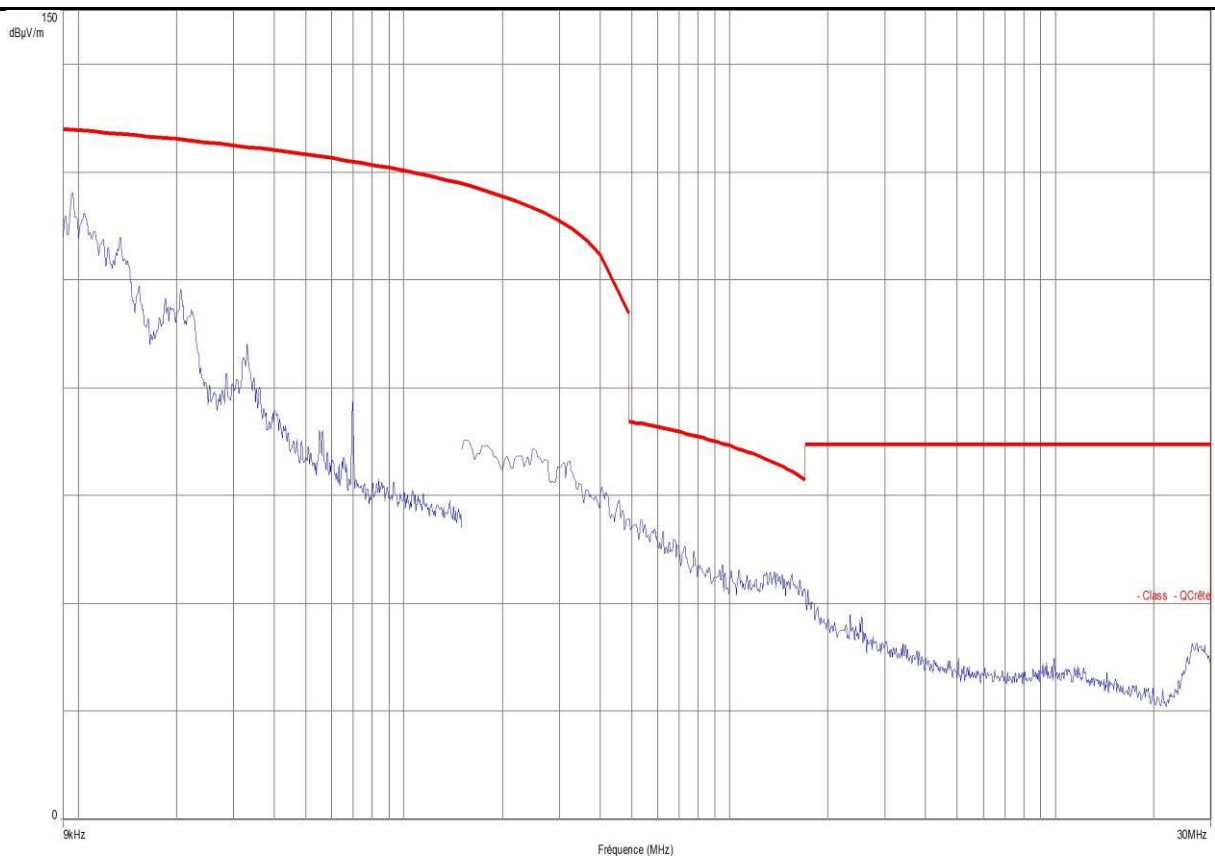



RADIATED EMISSIONS


Graph name :	Emr#3	Test configuration:
Limit :	FCC Part15C	(C-90°) - Axis XY - TX C11 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	90°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	300Hz	QPeak Limit@3m
VBW :	1kHz	
Frequency :	9kHz- 150kHz	

PARAMETERS

Antenna polarization:	90°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	10kHz	QPeak Limit@3m
VBW :	30kHz	
Frequency :	150kHz- 30MHz	

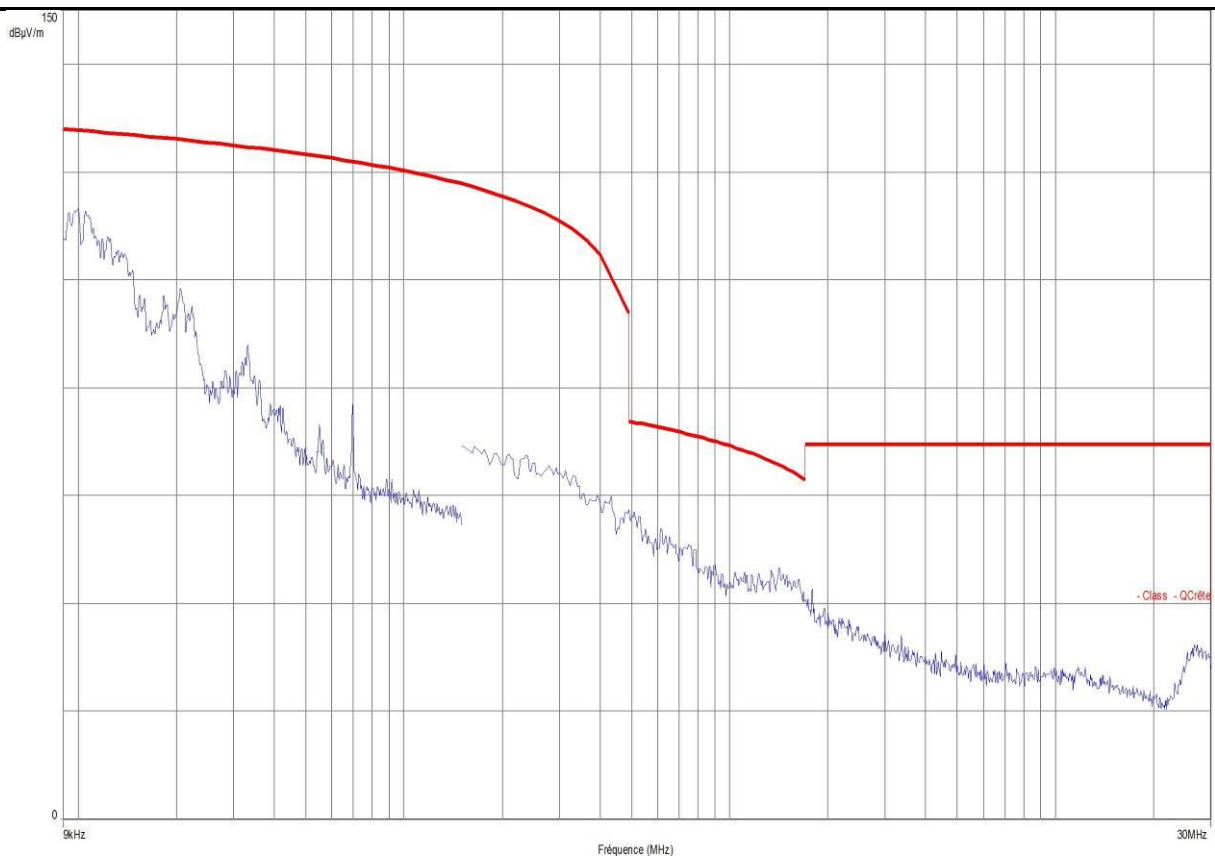



RADIATED EMISSIONS


Graph name :	Emr#4	Test configuration:
Limit :	FCC Part15C	(C-90°) - Axis Z - TX C11 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	90°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	300Hz	QPeak Limit@3m
VBW :	1kHz	
Frequency :	9kHz- 150kHz	

PARAMETERS

Antenna polarization:	90°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	10kHz	QPeak Limit@3m
VBW :	30kHz	
Frequency :	150kHz- 30MHz	

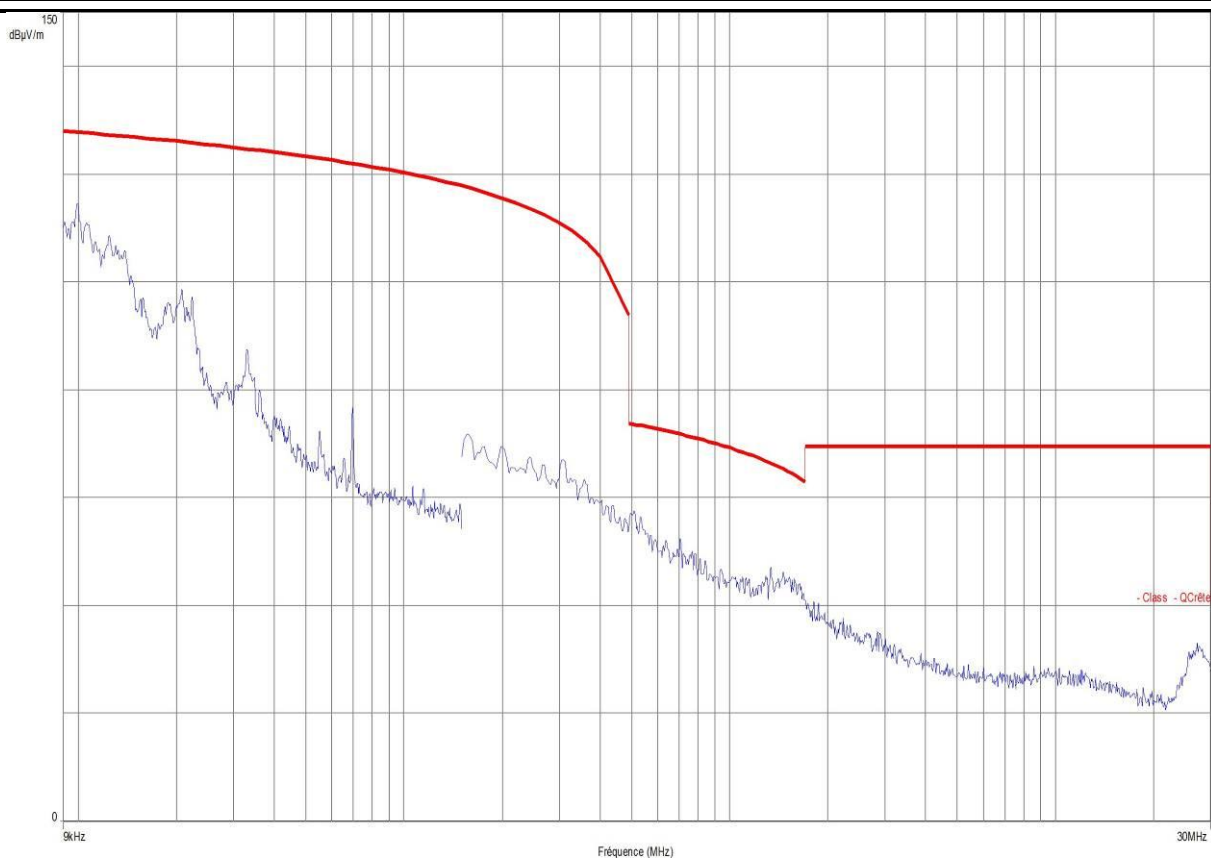




RADIATED EMISSIONS

Graph name :	Emr#5	Test configuration:
Limit :	FCC Part15C	(H) - Axis XY - TX C11 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	Horizontal	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	
VBW :	300kHz	QPeak Limit@3m
Frequency :	30MHz- 1GHz	

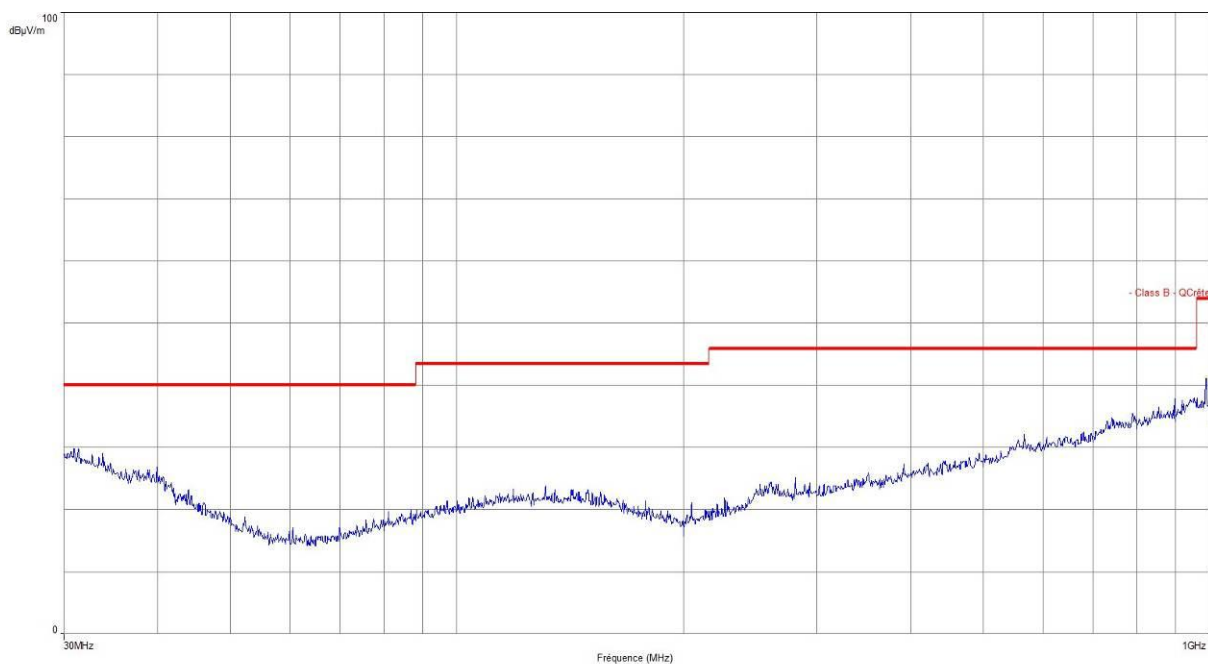

Frequency (MHz)	Peak (dBμV/m)
987.5*	41.26

* Frequency due to spectrum analyzer, not EUT.




RADIATED EMISSIONS

Graph name :	Emr#6	Test configuration:
Limit :	FCC Part15C	(H) - Axis Z - TX C11 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	Horizontal	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	
VBW :	300kHz	QPeak Limit@3m
Frequency :	30MHz- 1GHz	

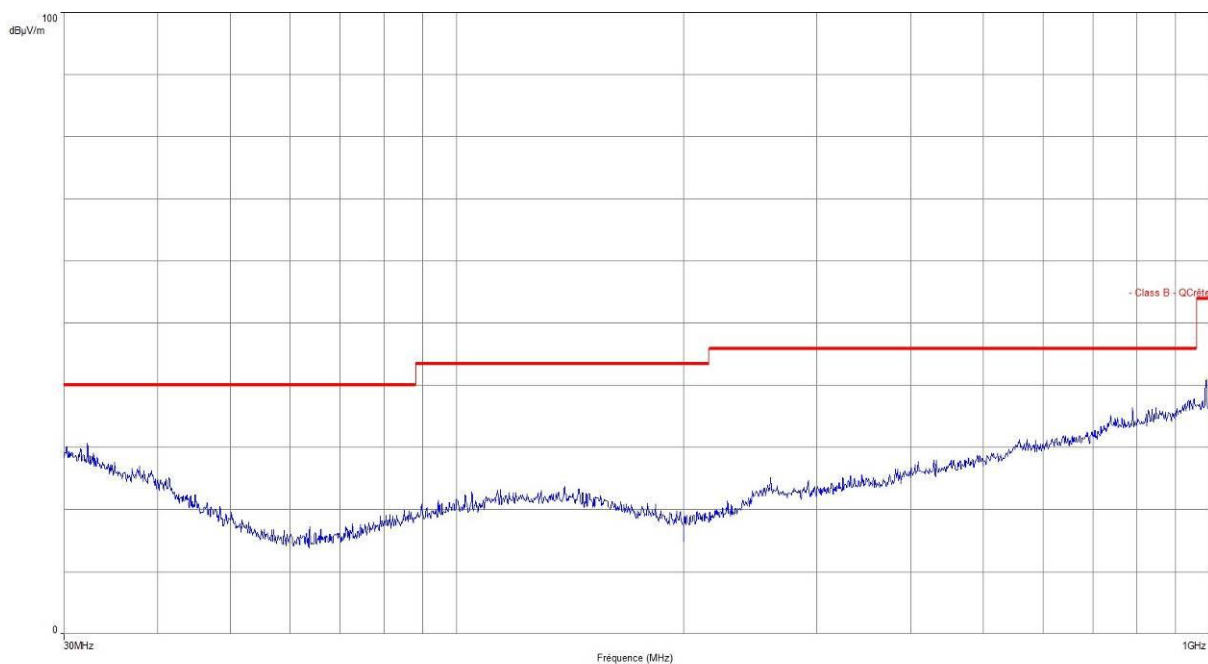

Frequency (MHz)	Peak (dBμV/m)
987.53*	40.88

* Frequency due to spectrum analyzer, not EUT.




RADIATED EMISSIONS

Graph name :	Emr#7	Test configuration:
Limit :	FCC Part15C	(V) - Axis XY - TX C11 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	Vertical	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	
VBW :	300kHz	QPeak Limit@3m
Frequency :	30MHz- 1GHz	

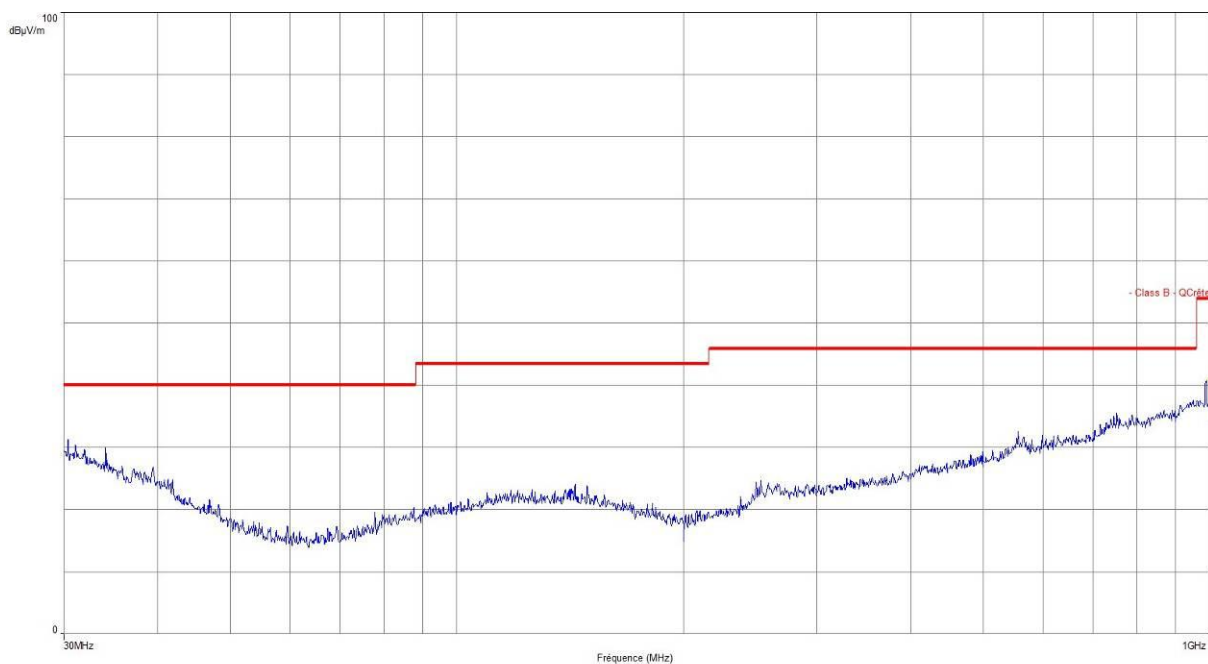

Frequency (MHz)	Peak (dBμV/m)
987.53*	40.77

* Frequency due to spectrum analyzer, not EUT.




RADIATED EMISSIONS

Graph name :	Emr#8	Test configuration:
Limit :	FCC Part15C	(V) - Axis Z - TX C11 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	Vertical	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz- 1GHz	

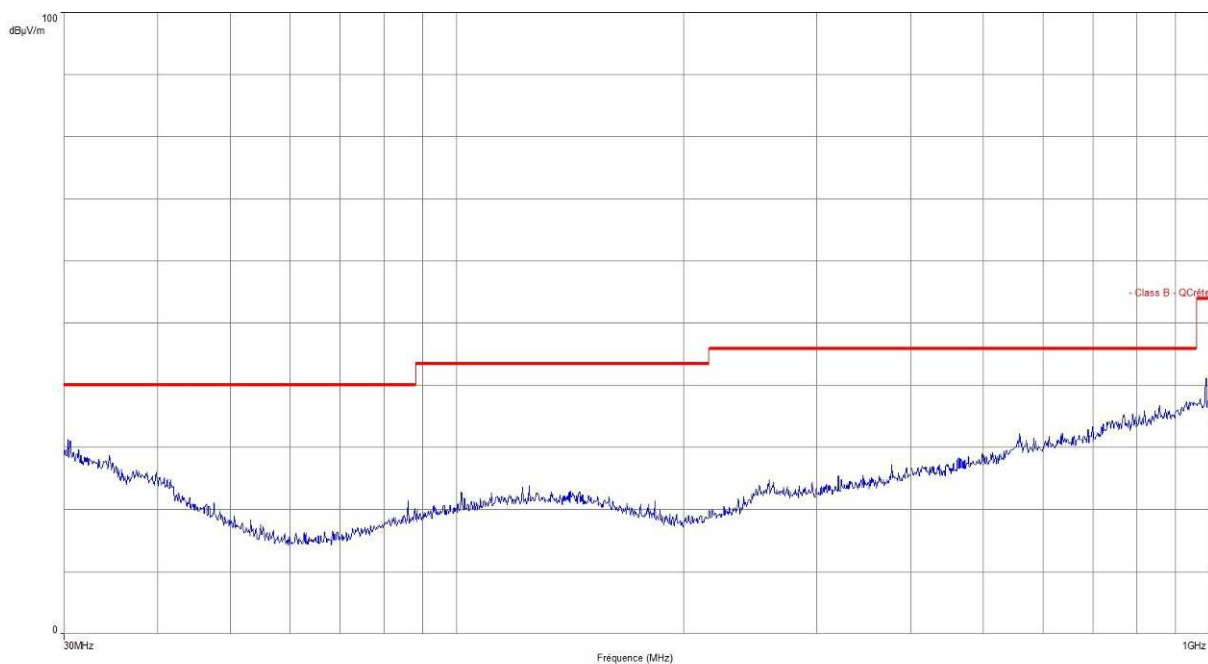

Frequency (MHz)	Peak (dBμV/m)
987.5*	41.26

* Frequency due to spectrum analyzer, not EUT.



RADIATED EMISSIONS


Graph name :	Emr#9	Test configuration:
Limit :	FCC Part15C	(C-0°) - Axis XY - TX C26 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	300Hz	QPeak Limit@3m
VBW :	1kHz	
Frequency :	9kHz- 150kHz	

PARAMETERS

Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	10kHz	QPeak Limit@3m
VBW :	30kHz	
Frequency :	150kHz- 30MHz	

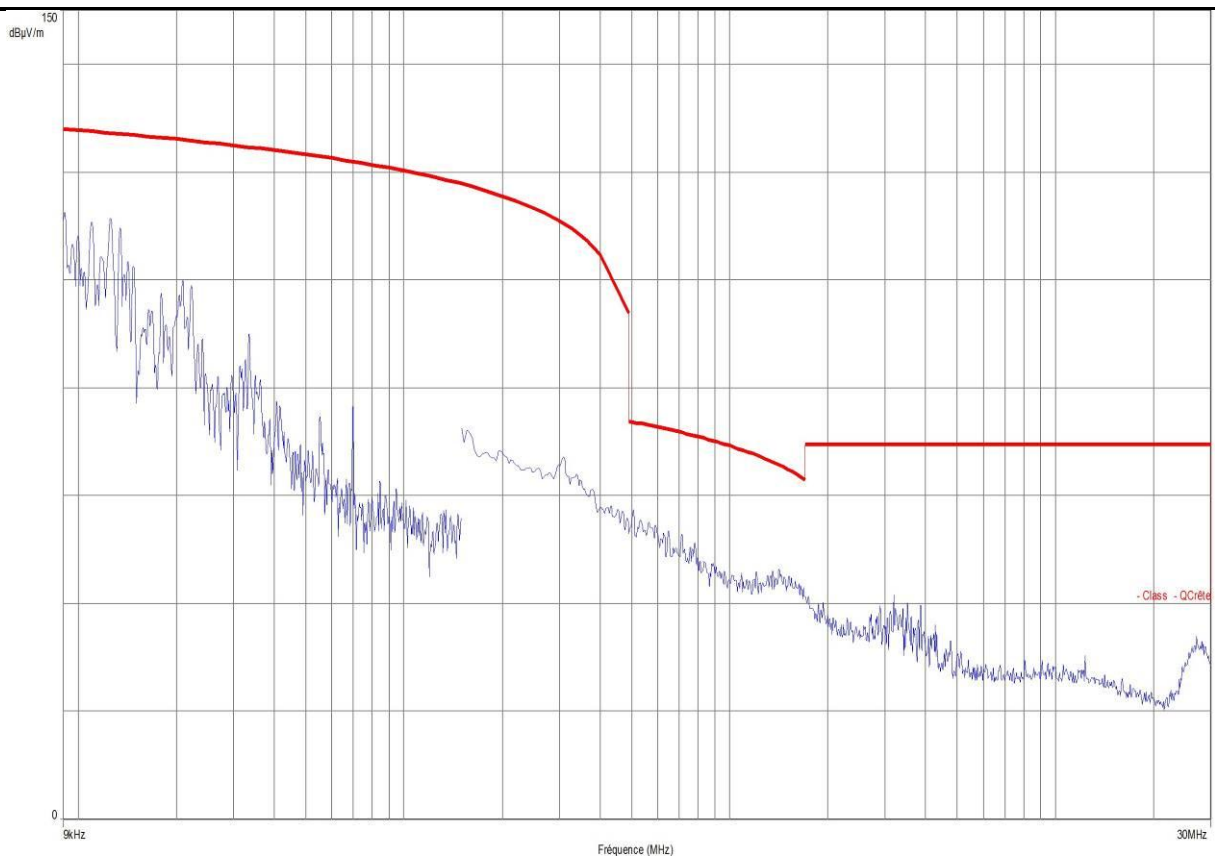



RADIATED EMISSIONS


Graph name :	Emr#10	Test configuration:
Limit :	FCC Part15C	(C-0°) - Axis Z - TX C26 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	300Hz	QPeak Limit@3m
VBW :	1kHz	
Frequency :	9kHz- 150kHz	

PARAMETERS

Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	10kHz	QPeak Limit@3m
VBW :	30kHz	
Frequency :	150kHz- 30MHz	

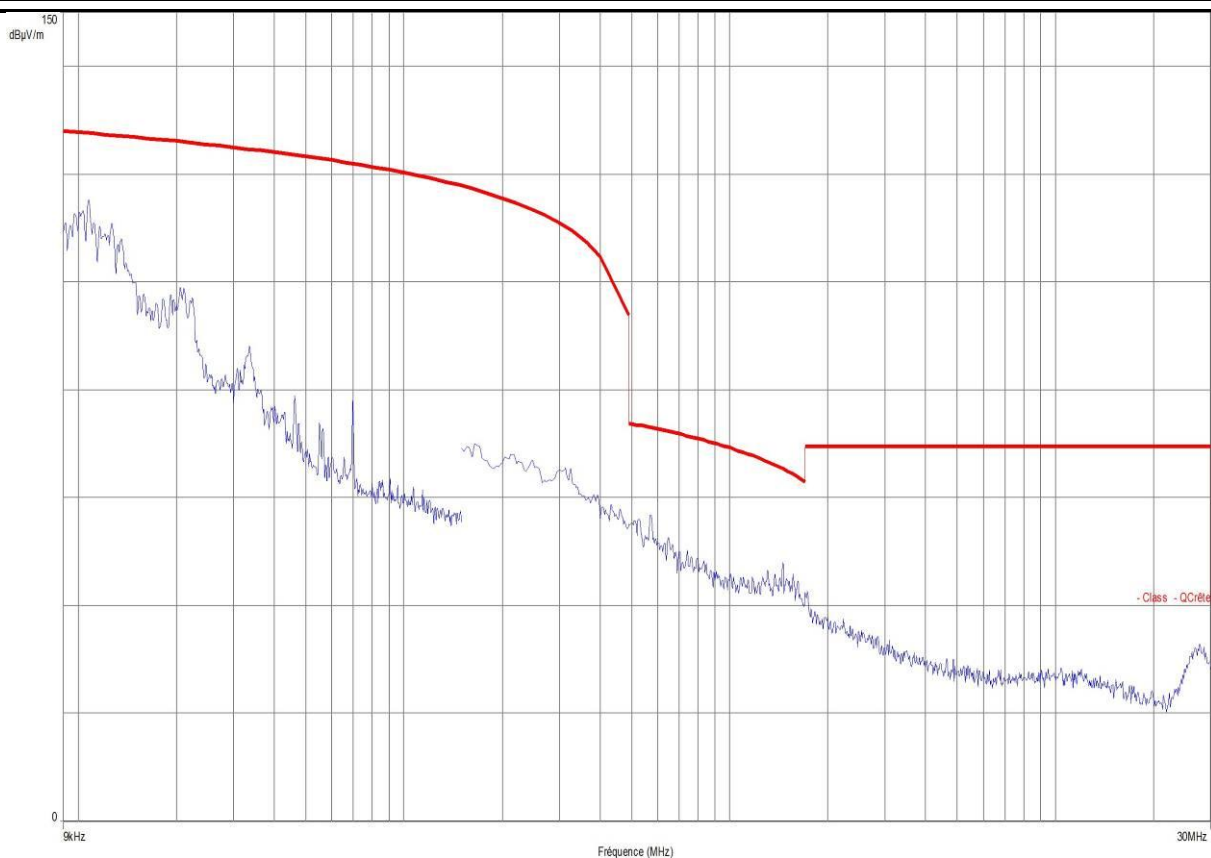



RADIATED EMISSIONS


Graph name :	Emr#11	Test configuration:
Limit :	FCC Part15C	(C-90°) - Axis XY - TX C26 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	90°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	300Hz	QPeak Limit@3m
VBW :	1kHz	
Frequency :	9kHz- 150kHz	

PARAMETERS

Antenna polarization:	90°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	10kHz	QPeak Limit@3m
VBW :	30kHz	
Frequency :	150kHz- 30MHz	

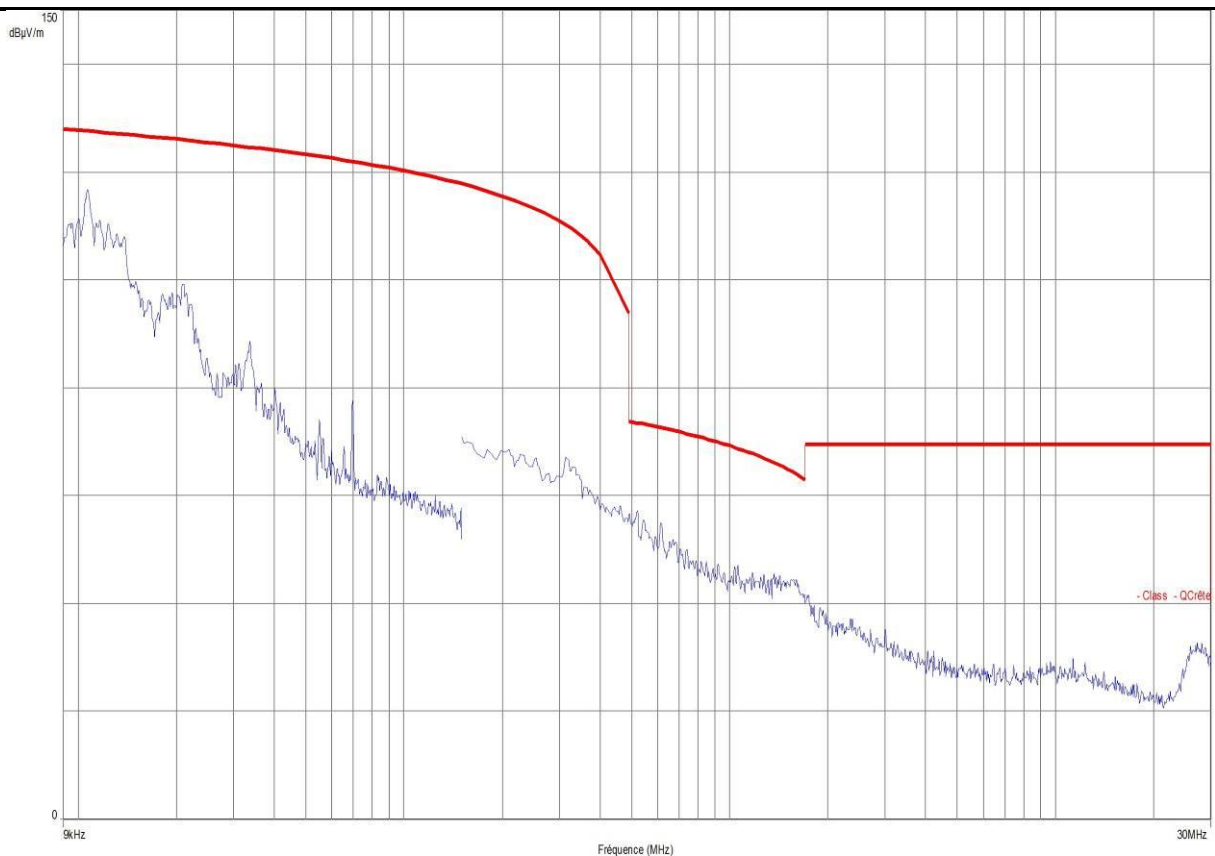



RADIATED EMISSIONS


Graph name :	Emr#12	Test configuration:
Limit :	FCC Part15C	(C-90°) - Axis Z - TX C26 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	90°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	300Hz	QPeak Limit@3m
VBW :	1kHz	
Frequency :	9kHz- 150kHz	

PARAMETERS

Antenna polarization:	90°	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	10kHz	QPeak Limit@3m
VBW :	30kHz	
Frequency :	150kHz- 30MHz	

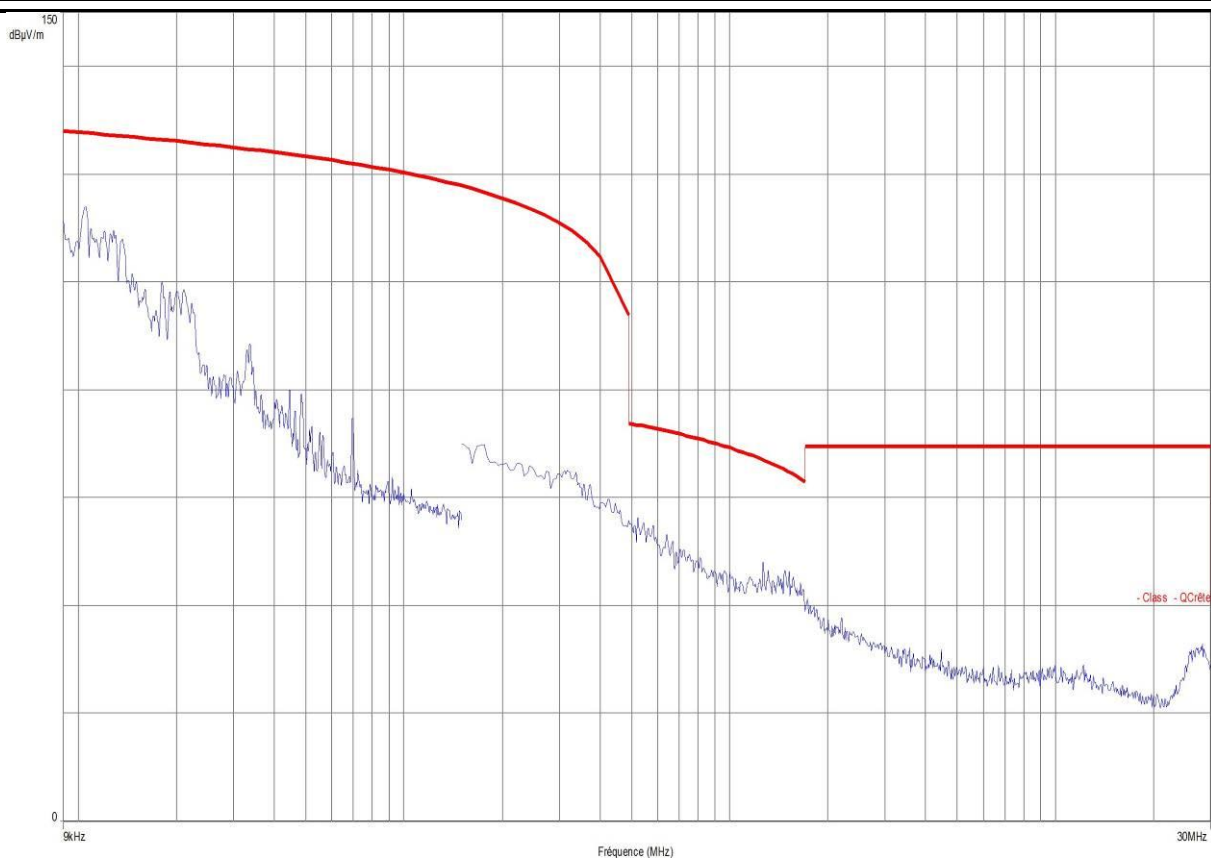




RADIATED EMISSIONS

Graph name :	Emr#13	Test configuration:
Limit :	FCC Part15C	(H) - Axis XY - TX C26 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	Horizontal	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	
VBW :	300kHz	QPeak Limit@3m
Frequency :	30MHz- 1GHz	

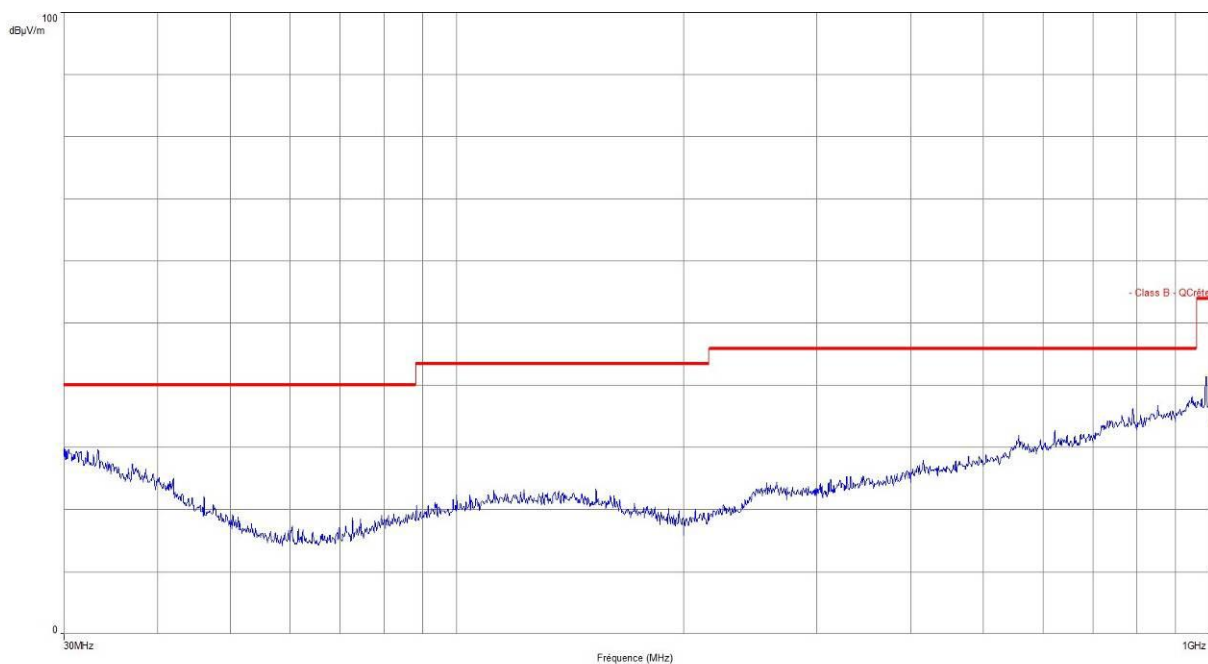

Frequency (MHz)	Peak (dBμV/m)
987.53*	41.44

* Frequency due to spectrum analyzer, not EUT.




RADIATED EMISSIONS

Graph name :	Emr#14	Test configuration:
Limit :	FCC Part15C	(H) - Axis Z - TX C26 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	Horizontal	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	
VBW :	300kHz	QPeak Limit@3m
Frequency :	30MHz- 1GHz	

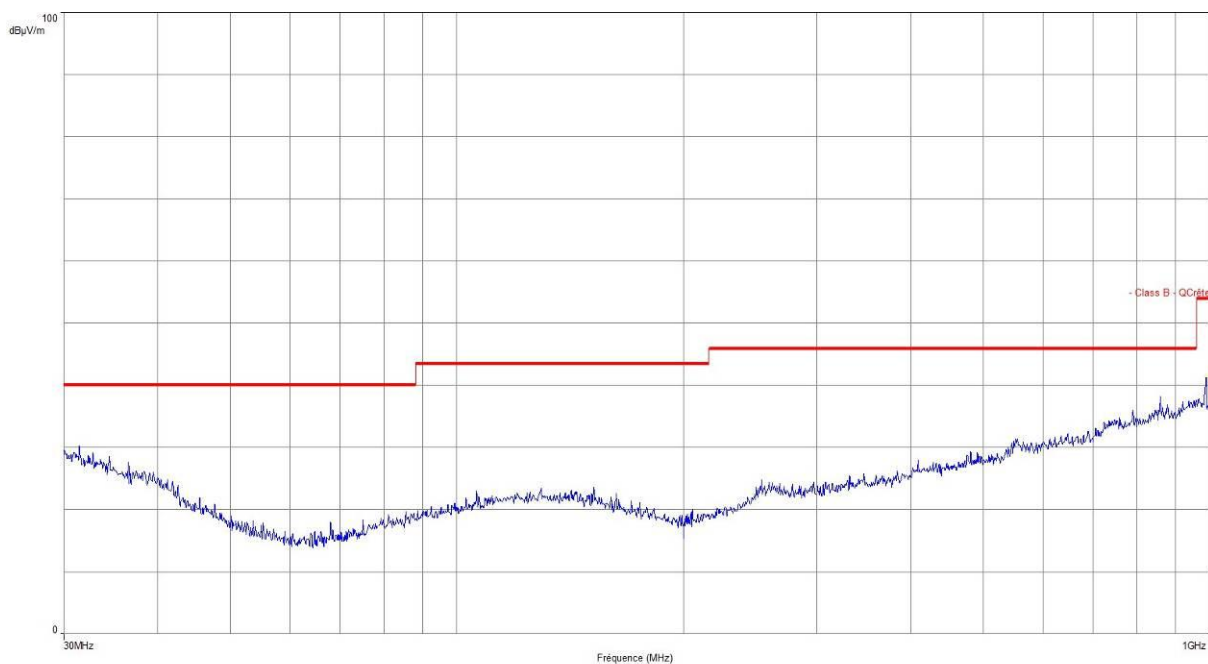

Frequency (MHz)	Peak (dBμV/m)
987.52*	41.4

* Frequency due to spectrum analyzer, not EUT.




RADIATED EMISSIONS

Graph name :	Emr#15	Test configuration:
Limit :	FCC Part15C	(V) - Axis XY - TX C26 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	Vertical	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	
VBW :	300kHz	QPeak Limit@3m
Frequency :	30MHz- 1GHz	

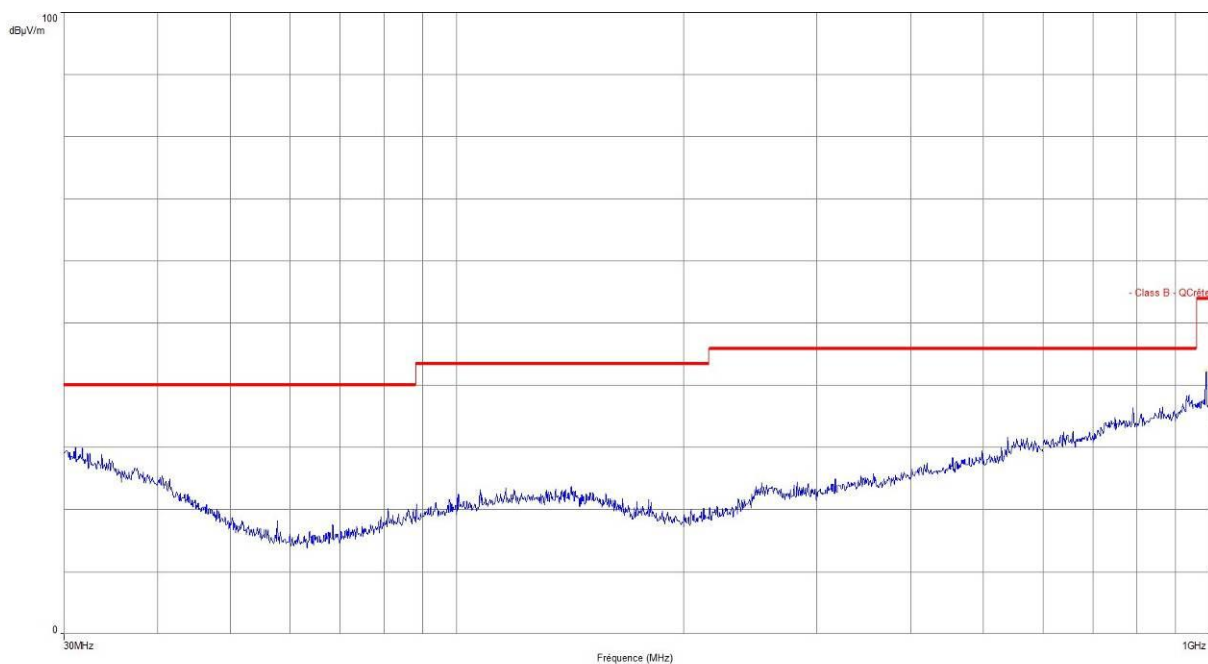

Frequency (MHz)	Peak (dBμV/m)
987.49*	40.77

* Frequency due to spectrum analyzer, not EUT.




RADIATED EMISSIONS

Graph name :	Emr#16	Test configuration:
Limit :	FCC Part15C	(V) - Axis Z - TX C26 - Remote
Class :	B	

PARAMETERS

Antenna polarization:	Vertical	Legend:
Azimuth :	0° - 360°	Peak Measure
RBW :	100kHz	
VBW :	300kHz	QPeak Limit@3m
Frequency :	30MHz- 1GHz	

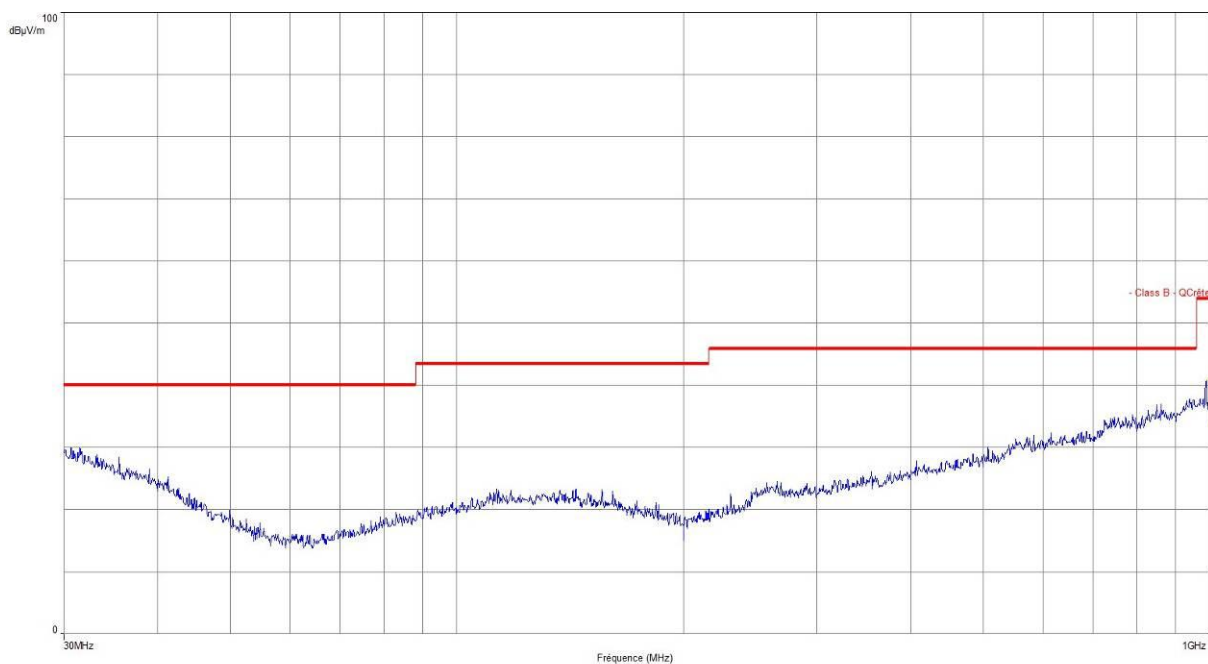

Frequency (MHz)	Peak (dBμV/m)
987.49*	40.77

* Frequency due to spectrum analyzer, not EUT.

**10. UNCERTAINTIES CHART**

Type de mesure / Kind of measurement	Incertitude élargie laboratoire / Wide uncertainty laboratory (k=2) $\pm x$	Incertitude limite du CISPR / CISPR uncertainty limit $\pm y$
Mesure des perturbations conduites en tension sur le réseau d'énergie <i>Measurement of conducted disturbances in voltage on the power port</i>	3.57 dB	3.6 dB
Mesure des perturbations conduites en tension sur le réseau de télécommunication <i>Measurement of conducted disturbances in voltage on the telecommunication port.</i>	3.28 dB	A l'étude / Under consid.
Mesure des perturbations discontinues conduites en tension <i>Measurement of discontinuous conducted disturbances in voltage</i>	3.47 dB	3.6 dB
Mesure des perturbations conduites en courant <i>Measurement of conducted disturbances in current</i>	2.90 dB	A l'étude / Under consid.
Mesure du champ électrique rayonné sur le site en espace libre de Moirans <i>Measurement of radiated electric field on the Moirans open area test site</i>	5.07 dB	5.2 dB

Les valeurs d'incertitudes calculées du laboratoire étant inférieures aux valeurs d'incertitudes limites établies par la norme, la conformité de l'échantillon est établie directement par les niveaux limites applicables. / The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limits values.