NO.25, CHUNG-YAUNG ROAD, YUNG-KANG CITY, TAINAN HSIEN, TAIWAN, R.O.C

TEL: +886-6-2819815 FAX: +886-6-2819752

with Gain 15DBI

- Designed for wireless LAN communications
- Mounts easily for indoor or outside applications
- Suited for IEEE 802.11b/g wireless LANs
- Made with high quality fiberglass material


OA-2450-15


Dipole Antennas for Base Stations with 15dBi Gain

This Omni antenna is an omni directional type that will increase signal range and strength greatly in a sphere shape. It comes with a very good fitting kit that includes high quality brackets nuts, bolts and washers. It can be used to cover 360 degree pops.

echnical information	
Frequency:	2400 - 2500MHz
Gain:	15 dBi
Polarization:	Vertical
Beamwidth deg: vertical & horizontal	Horz.360°Vert.6°
SWR:	≤1.5∶1
Impedance:	50 Ohm
imensions	
Length:	H1600 mm
Weight:	900g
Connector:	N-type / Female


SWR

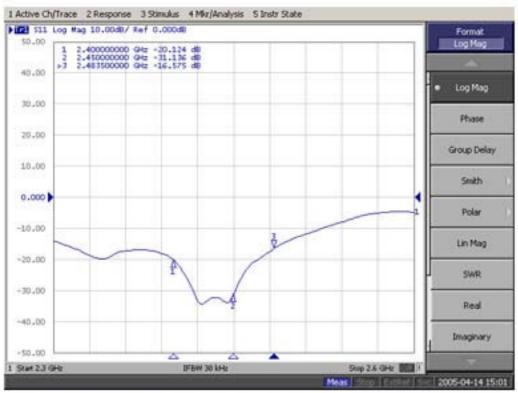

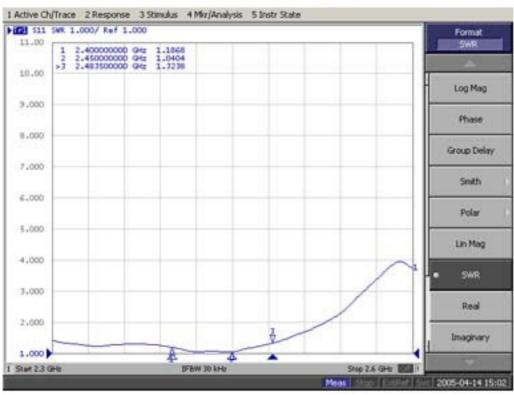

plane field patterns

H-PLANE FIELD PATTERNS

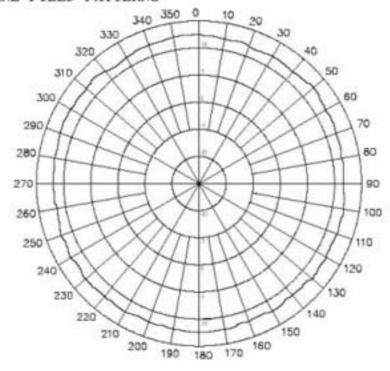

E-PLANE FIELD PATTERNS

