

Appendix B


Output Power (Field Strength

Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Wireless Footswitch / Transmitter
 Model: ASSY-000244
 Approval Holder: OraMetrix Inc.
 Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.249
 Comment 1: Dist.: 3m, Ant.: HL 223
 Comment 2: Freq: 916.391MHz, Emax: 80.91 dBµV/m, RBW: 1MHz

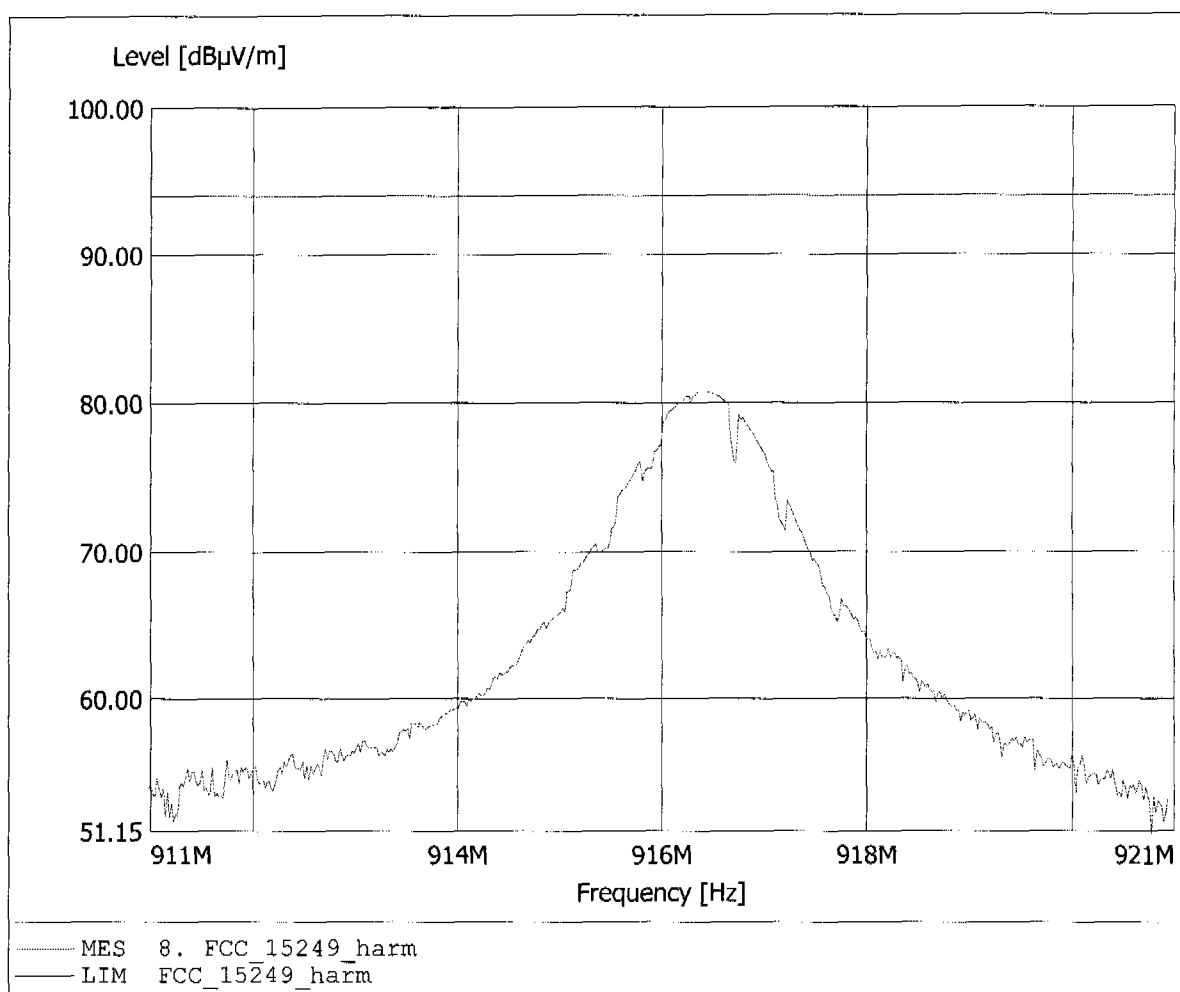


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Wireless Footswitch / Transmitter
 Model: ASSY-000244
 Approval Holder: OraMetrix Inc.
 Operating Condition: Thom: 23°C / Unom : 3.0 V DC (battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.249
 Comment 1: Dist.: 3m, Ant.: HL 223
 Comment 2: Freq: 916.391MHz, Emax: 79.91 dBµV/m, RBW: 1MHz

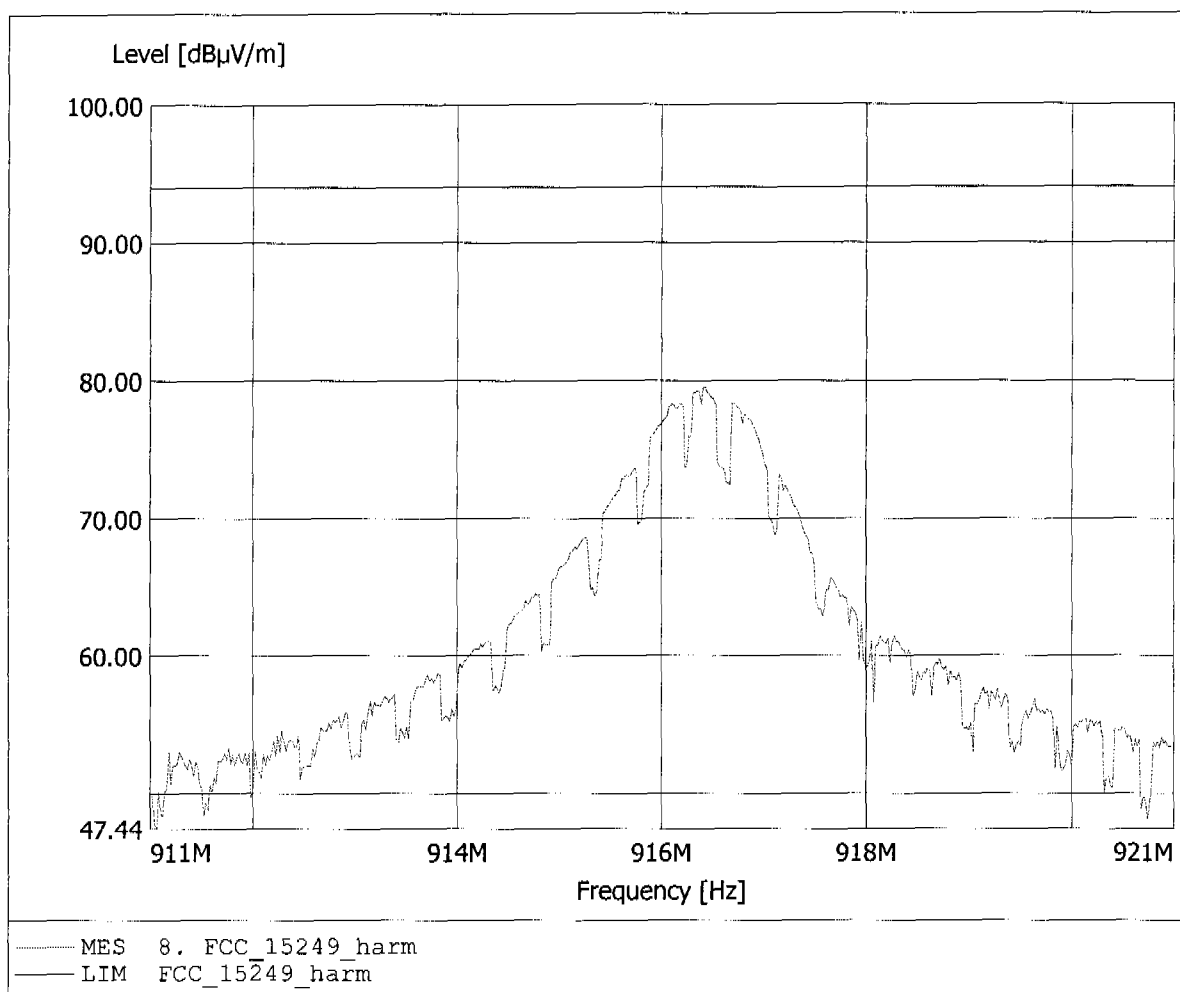


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Footswitch / Transmitter
Model: ASSY-000244
Approval Holder: OraMetrix Inc.
Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 30.17dBµV/m, RBW: 100kHz

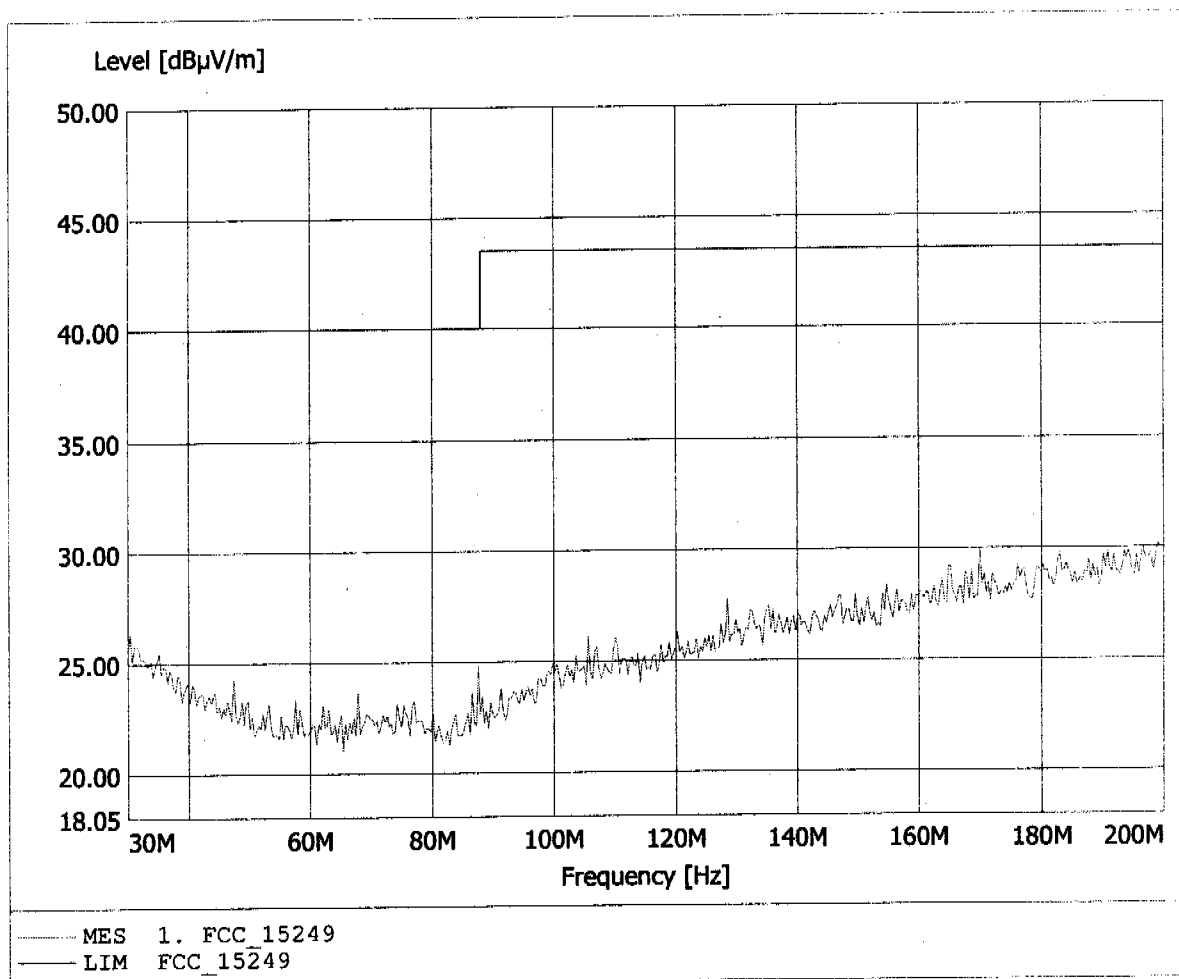


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Footswitch / Transmitter
Model: ASSY-000244
Approval Holder: OraMetrix Inc.
Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 193.527MHz, Emax: 30.23dBµV/m, RBW: 100kHz

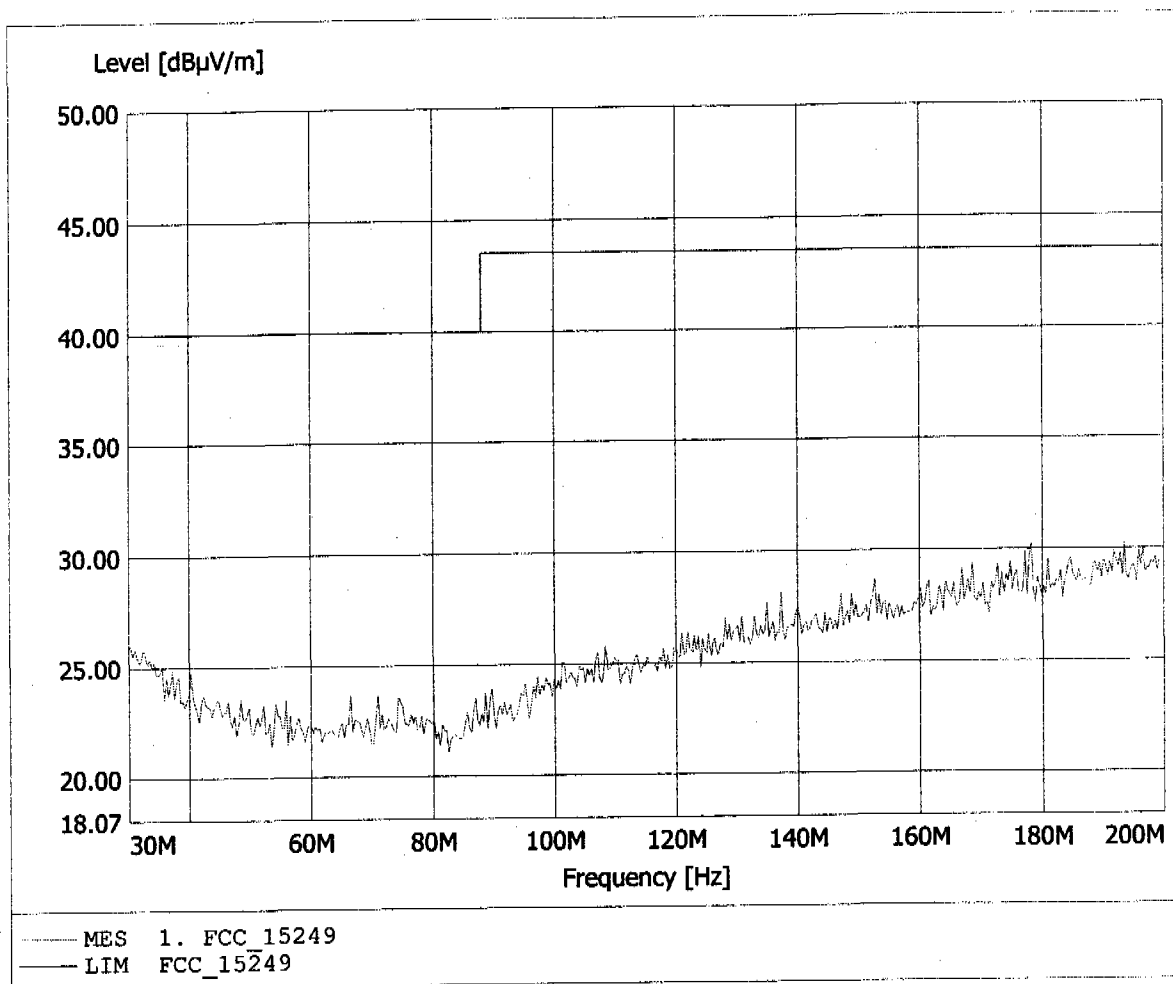


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Footswitch / Transmitter
Model: ASSY-000244
Approval Holder: OraMetrix Inc.
Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 987.014MHz, Emax: 22.10dBμV/m, RBW: 100kHz

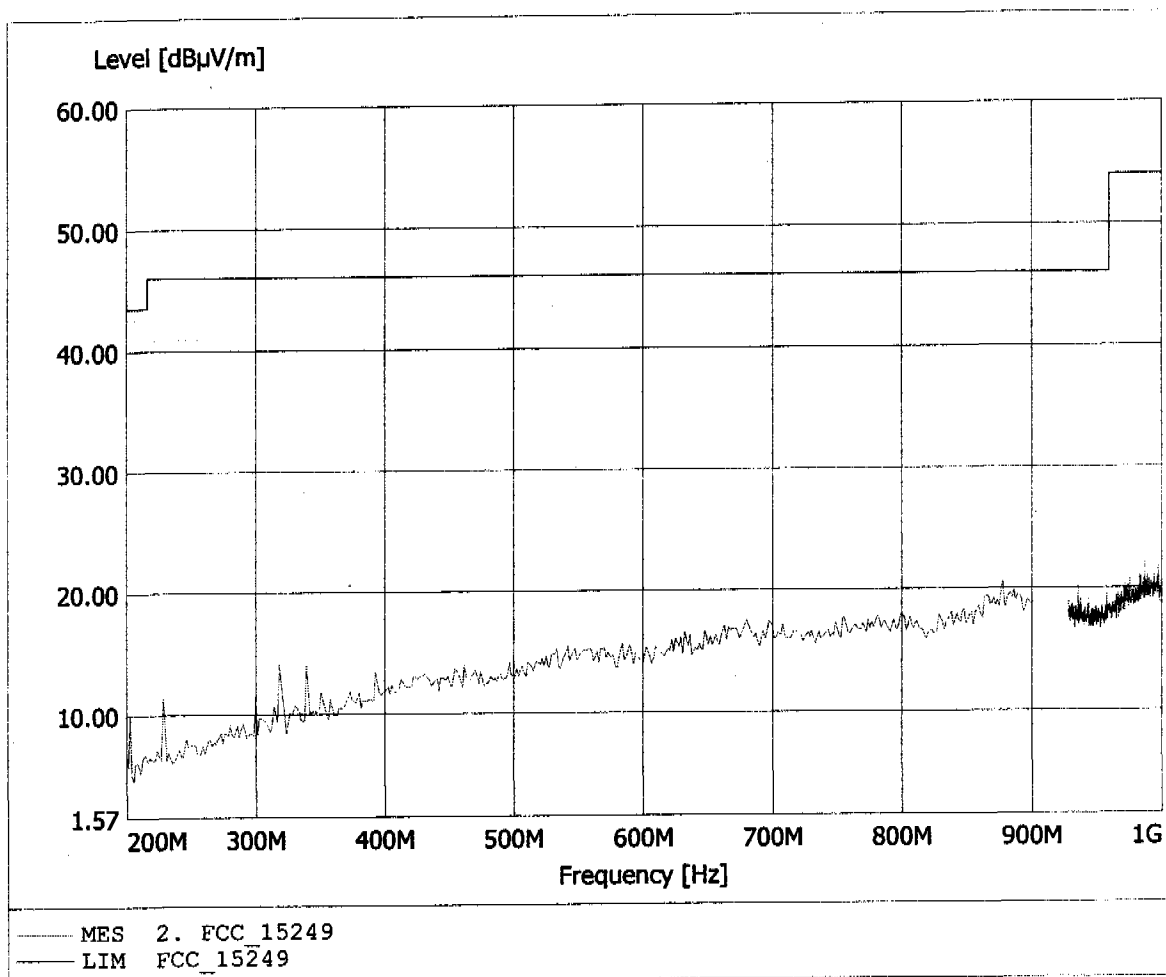


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Footswitch / Transmitter
Model: ASSY-000244
Approval Holder: OraMetrix Inc.
Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 982.108MHz, Emax: 21.40dBμV/m, RBW: 100kHz

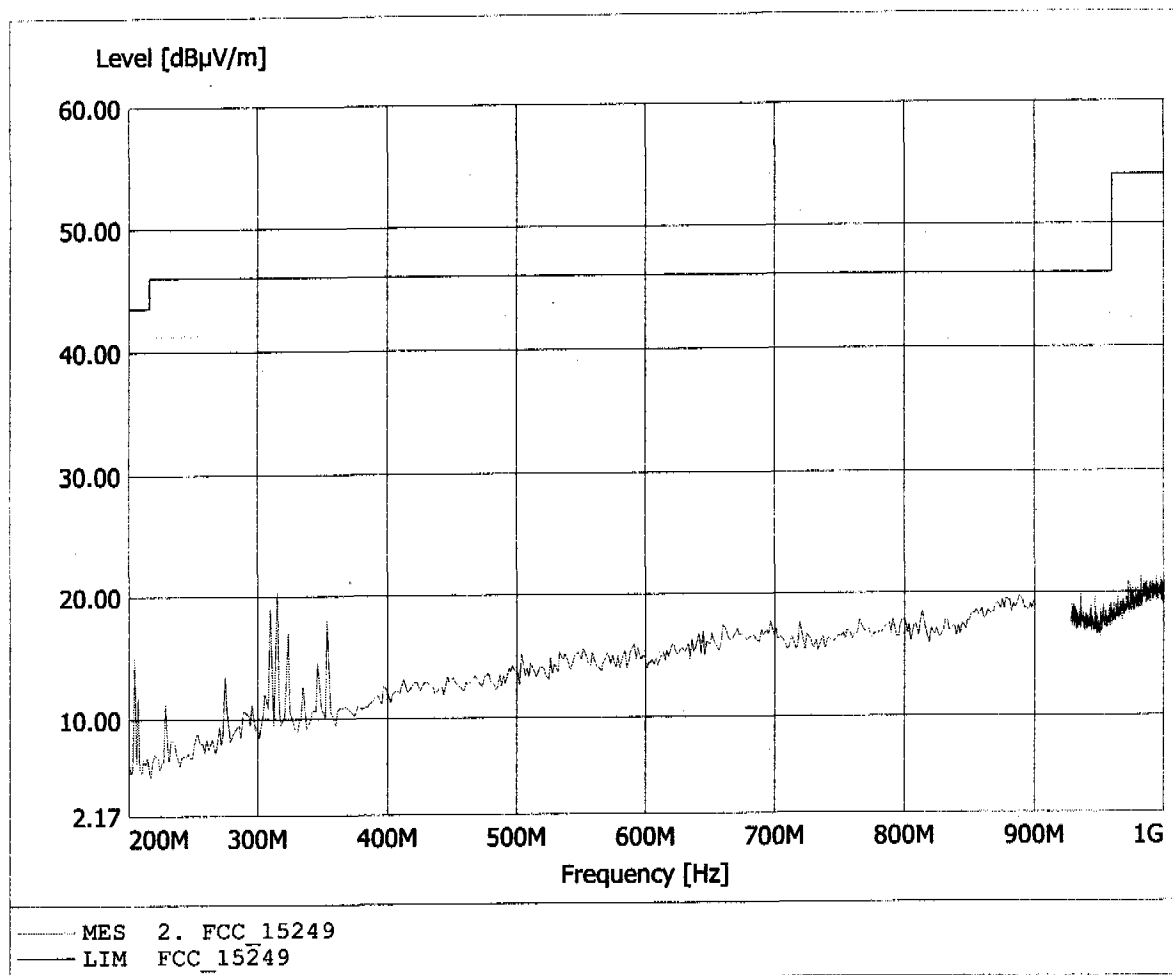


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Footswitch / Transmitter
Model: ASSY-000244
Approval Holder: OraMetrix Inc.
Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 3.669GHz, Emax: 50.60dBμV/m, RBW: 1MHz

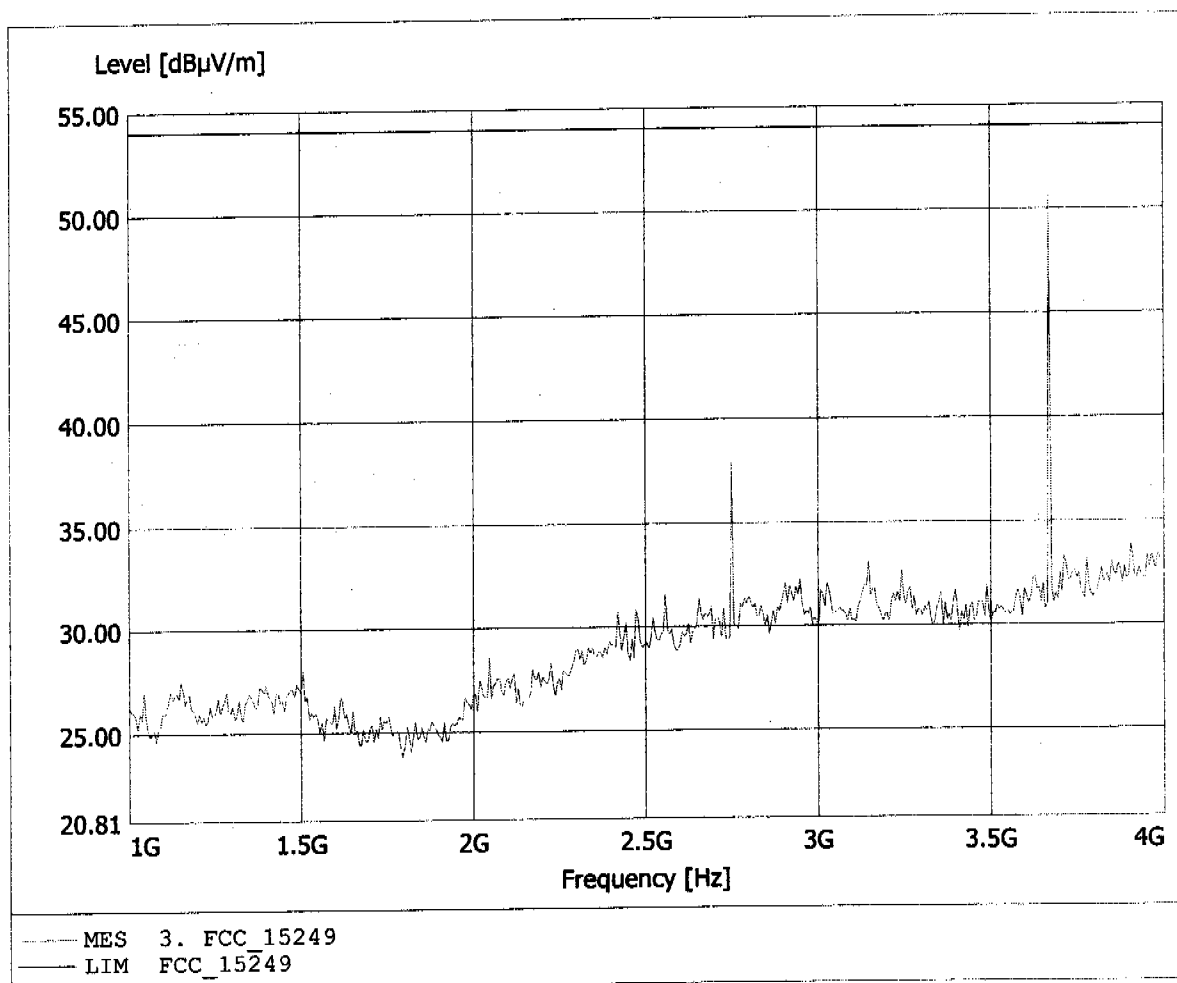


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Footswitch / Transmitter
Model: ASSY-000244
Approval Holder: OraMetrix Inc.
Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.249, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 3.669GHz, Emax: 50.77dB μ V/m, RBW: 1MHz

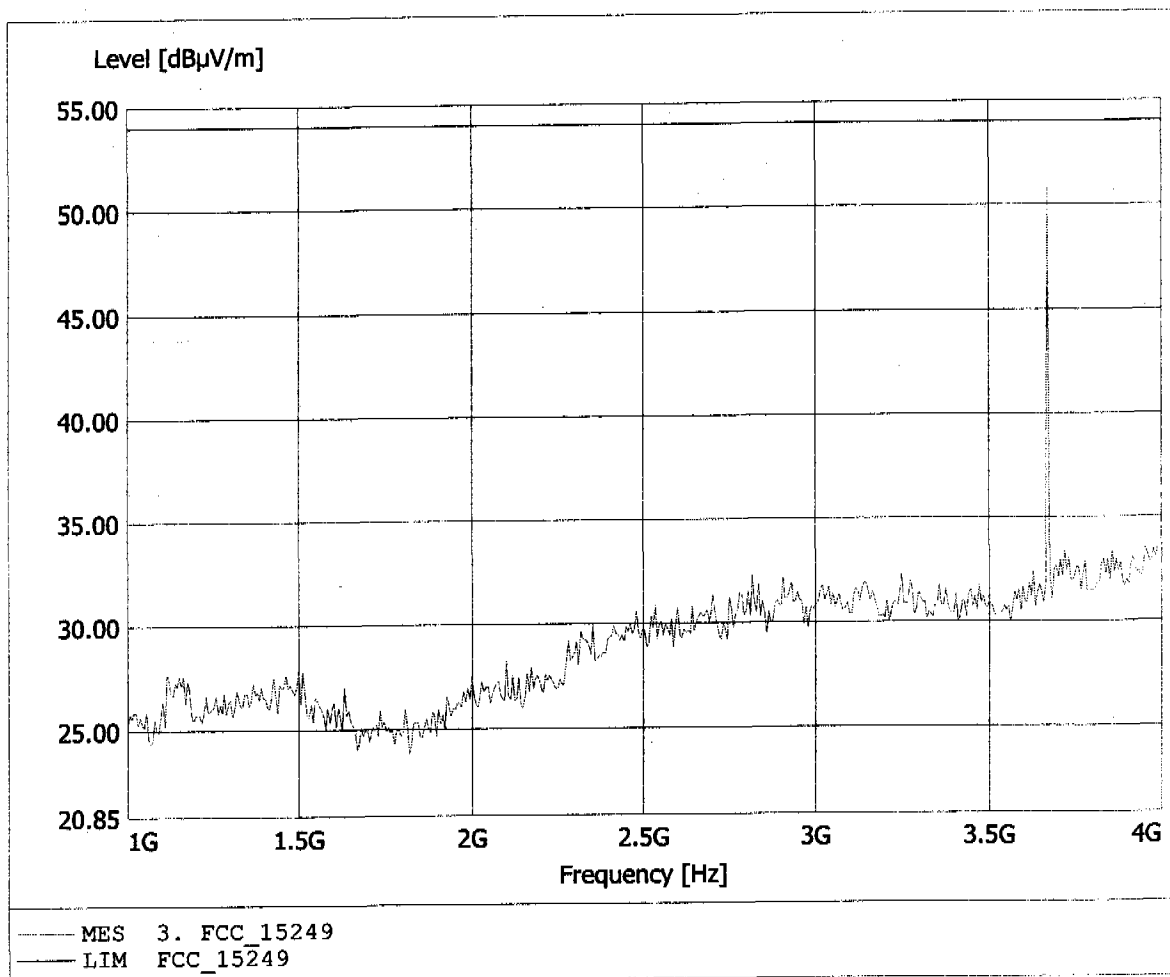


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Footswitch / Transmitter
Model: ASSY-000244
Approval Holder: OraMetrix Inc.
Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 4.577GHz, Emax: 41.85dBμV/m, RBW: 1MHz

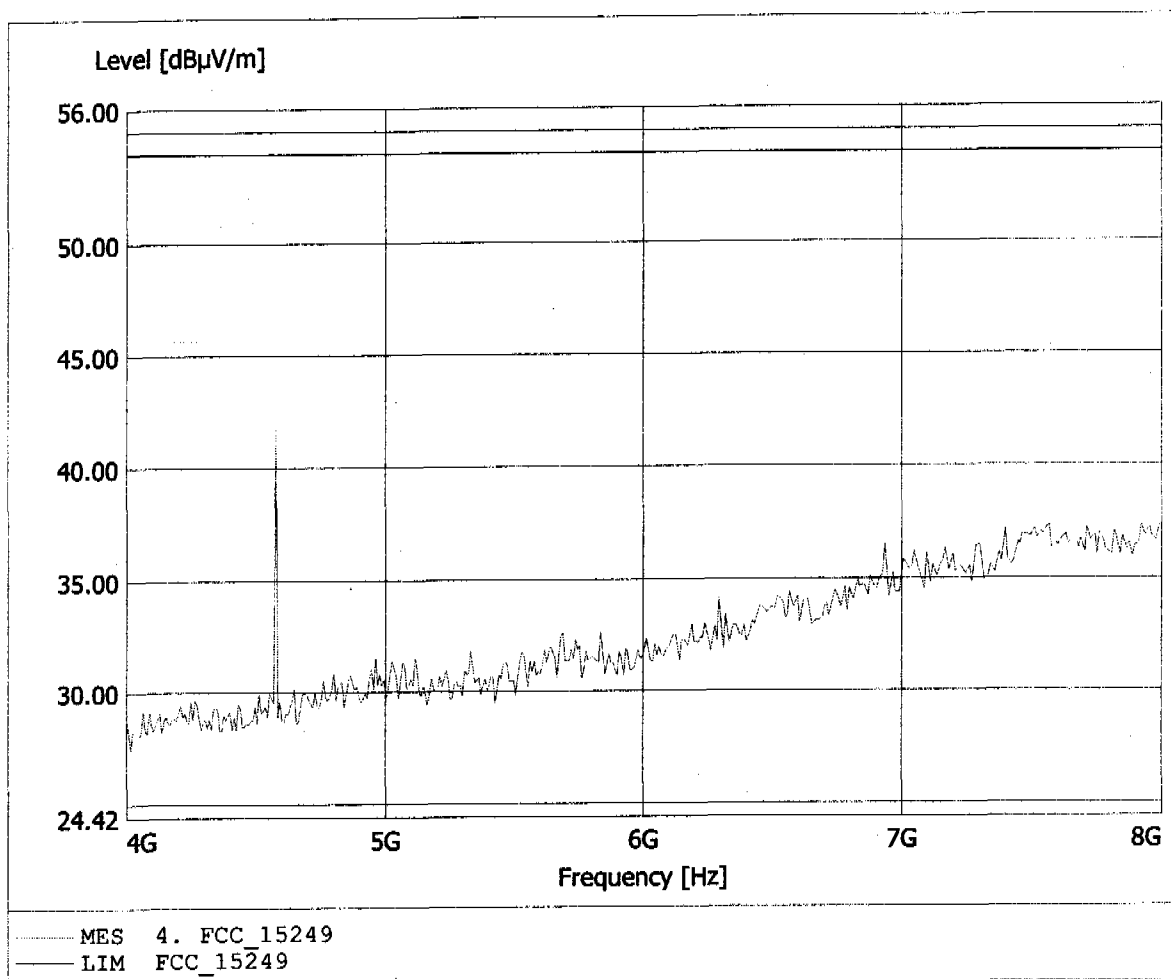


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Footswitch / Transmitter
Model: ASSY-000244
Approval Holder: OraMetrix Inc.
Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 4.577GHz, Emax: 52.22dBuV/m, RBW: 1MHz

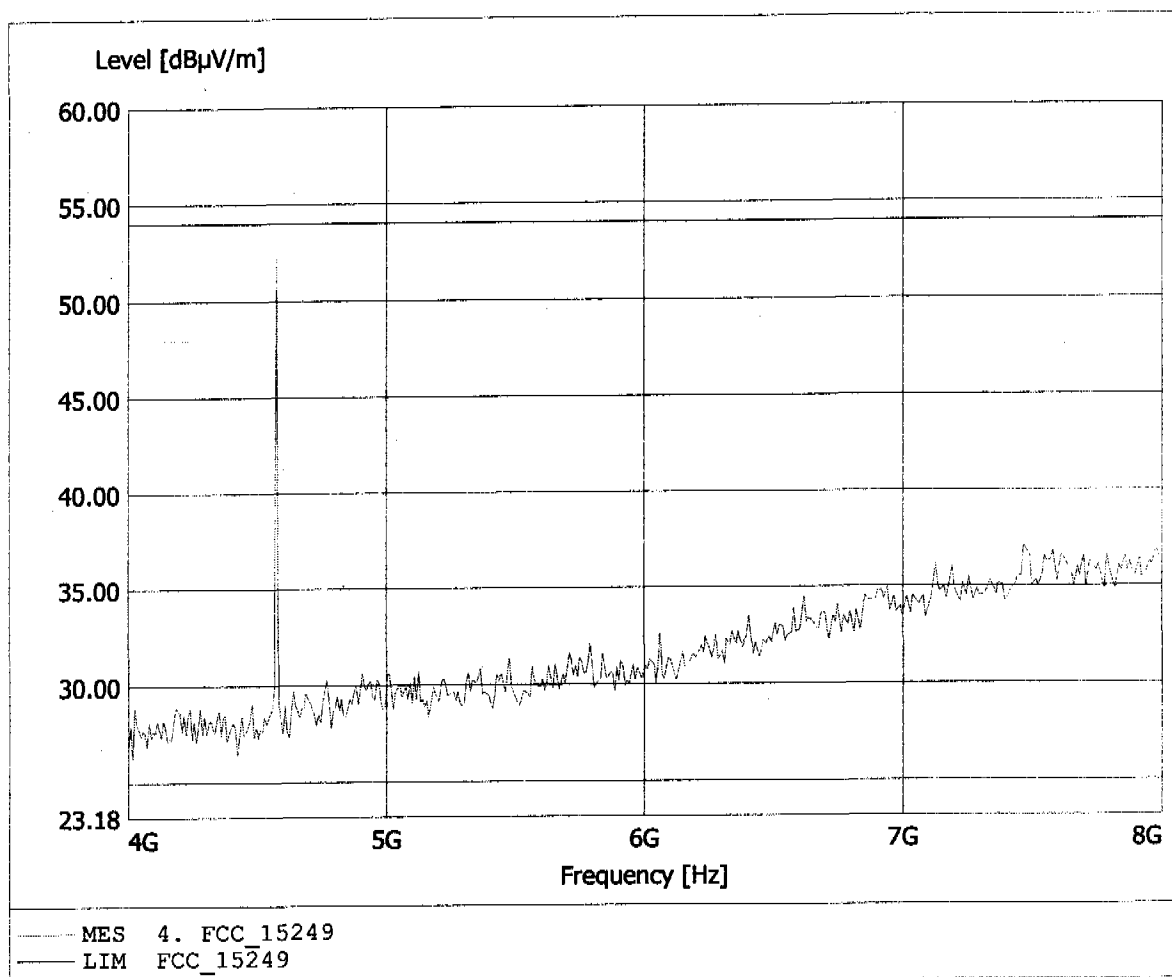


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Footswitch / Transmitter
Model: ASSY-000244
Approval Holder: OraMetrix Inc.
Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.150GHz, Emax: 42.31dBμV/m, RBW: 1MHz

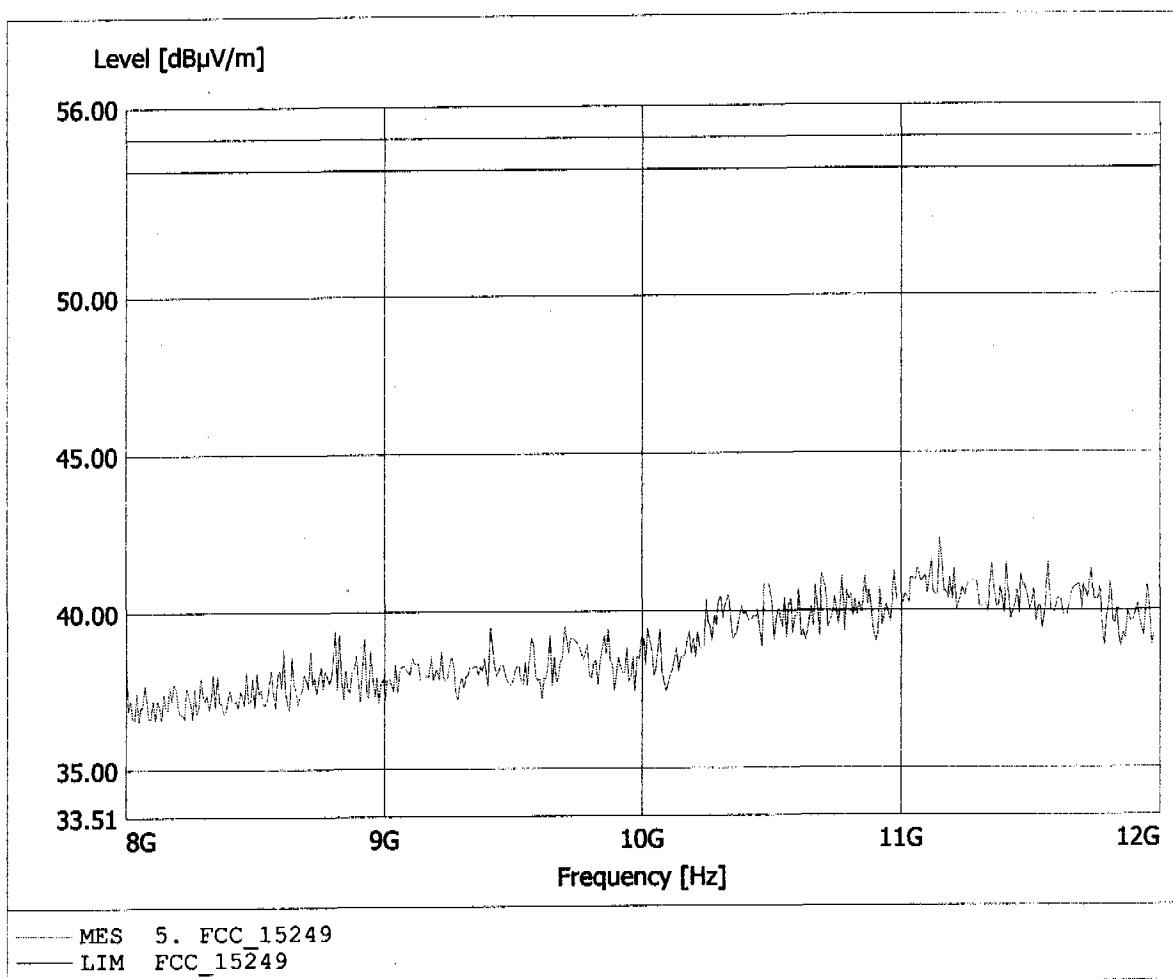

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Footswitch / Transmitter
Model: ASSY-000244
Approval Holder: OraMetrix Inc.
Operating Condition: Tnom: 23°C / Unom : 3.0 V DC (battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.271GHz, Emax: 42.88dBµV/m, RBW: 1MHz

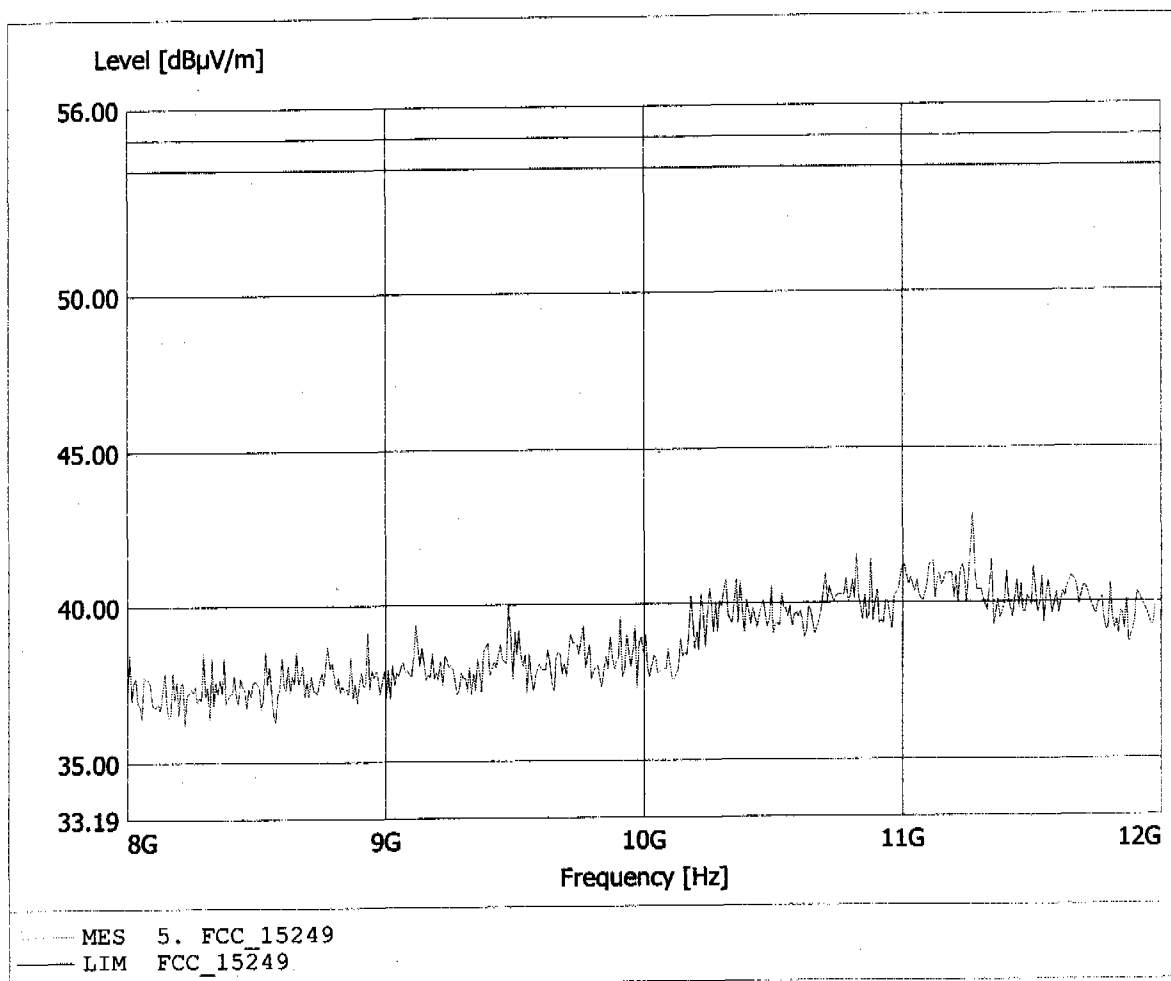

Appendix D

Spurious Emissions conducted - Transmitter operating

Test not applicable.