


Appendix B

Fundamental Field Strength


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 914.489MHz, Emax: 85.99dBµV/m, RBW: 1MHz

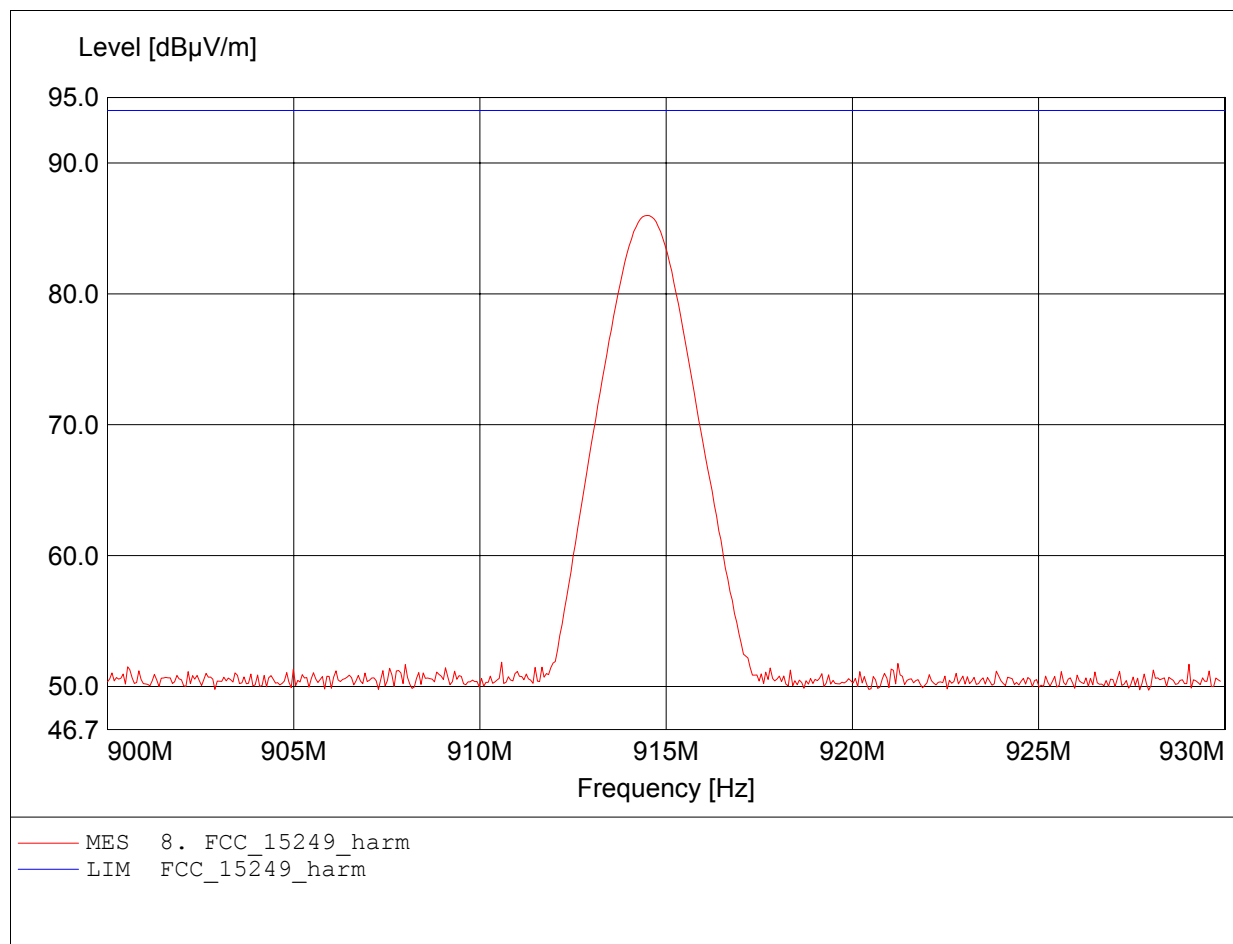

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 914.429MHz, Emax: 68.76dBµV/m, RBW: 1MHz

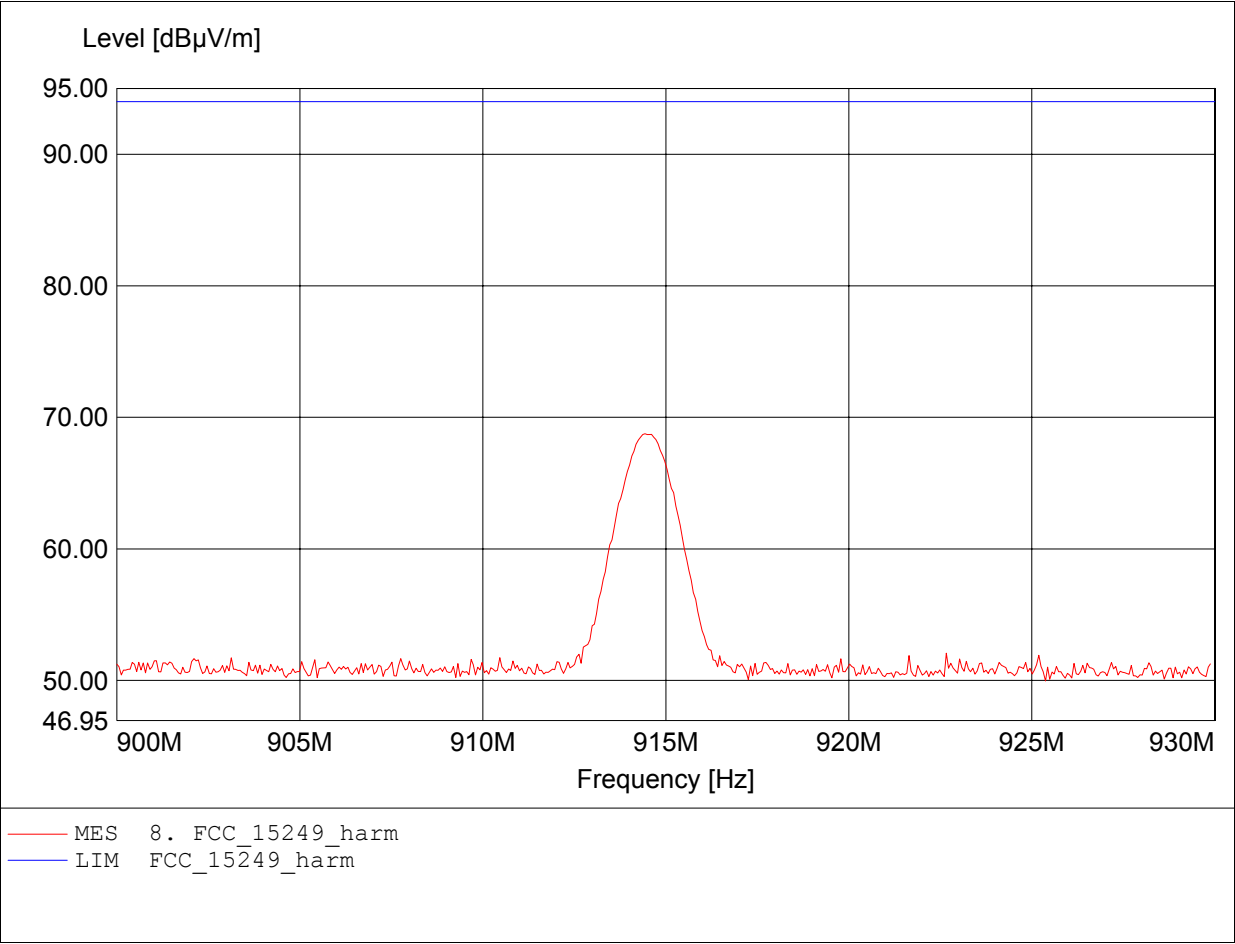


Appendix C

Spurious Emissions radiated - Transmitter operating


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.934MHz, Emax: 32.80dBµV/m, RBW: 100kHz

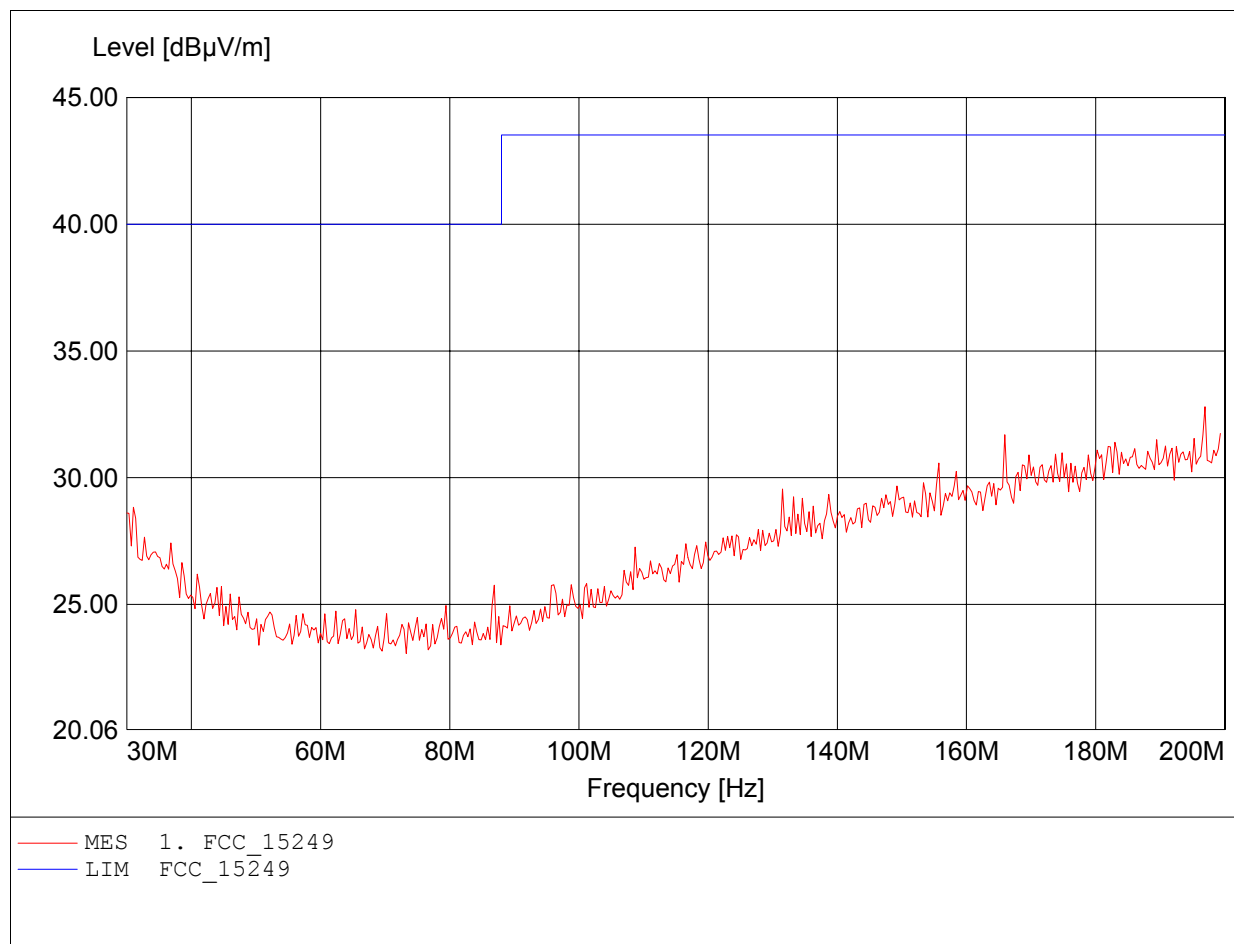


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 187.054MHz, Emax: 32.06dBµV/m, RBW: 100kHz

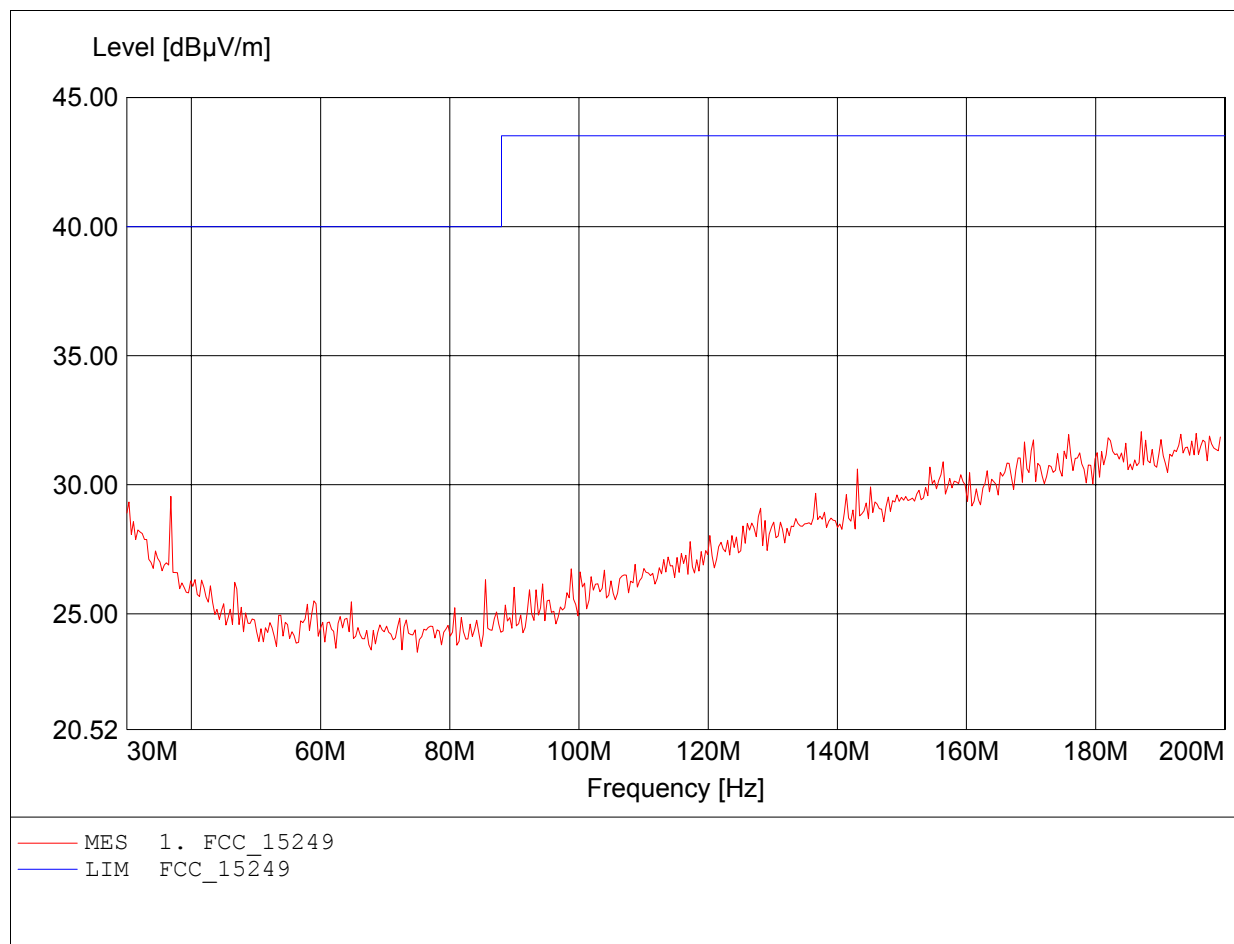


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 928.721MHz, Emax: 31.32dBµV/m, RBW: 100kHz

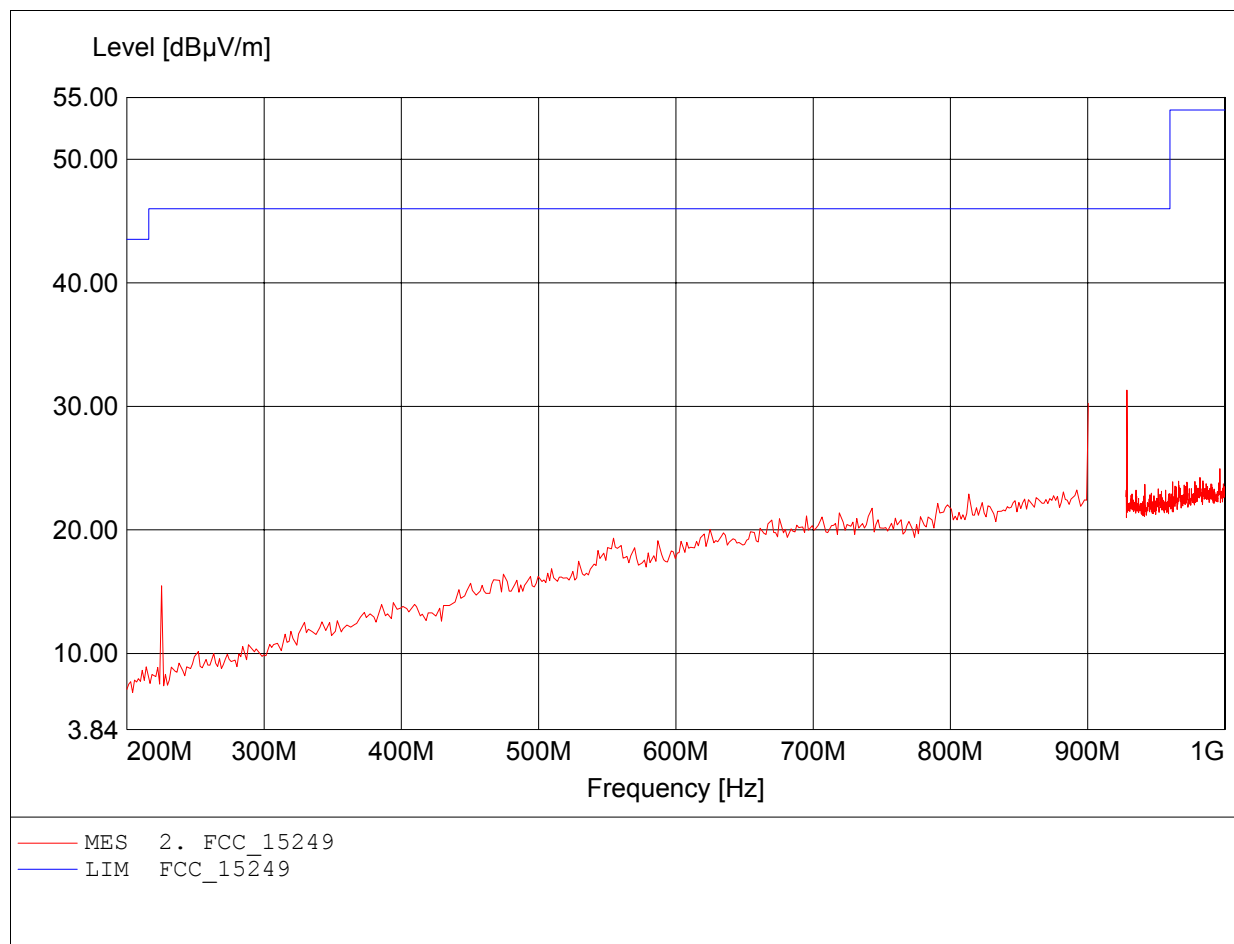


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.249
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 967.968MHz, Emax: 25.15dBµV/m, RBW: 100kHz

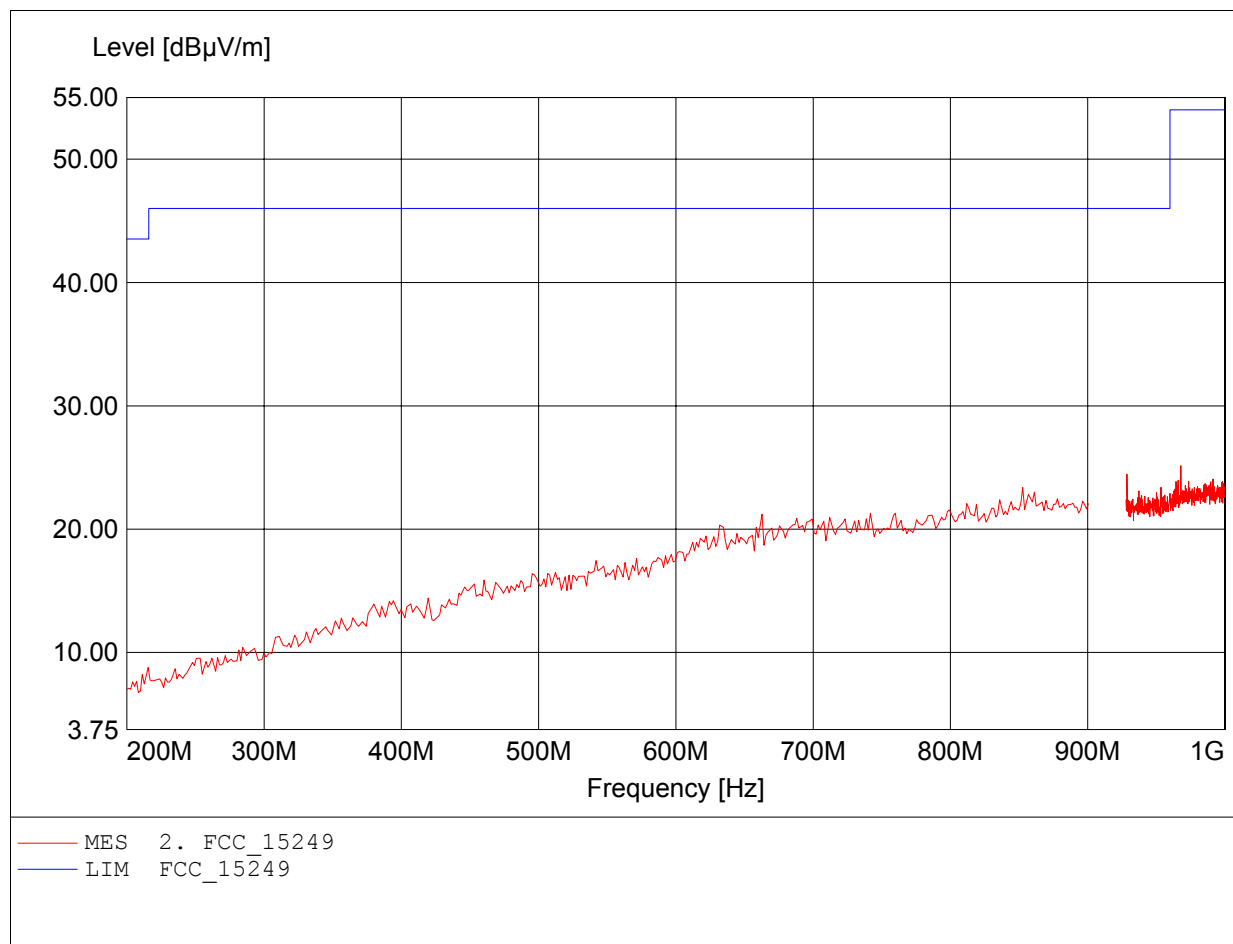


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to S15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.988GHz, Emax: 41.81dBµV/m, RBW: 1MHz

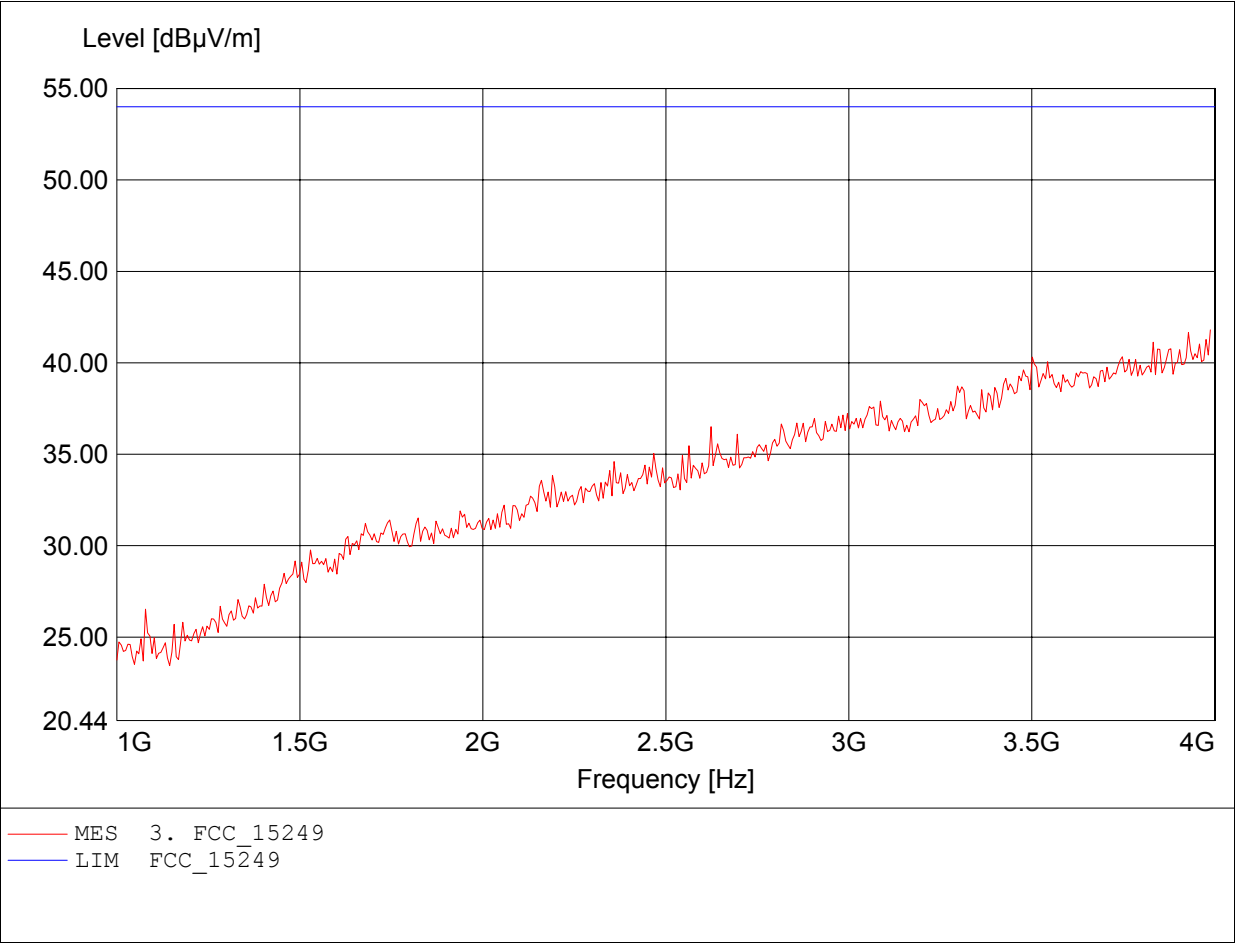


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to S15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.934GHz, Emax: 41.68dBµV/m, RBW: 1MHz

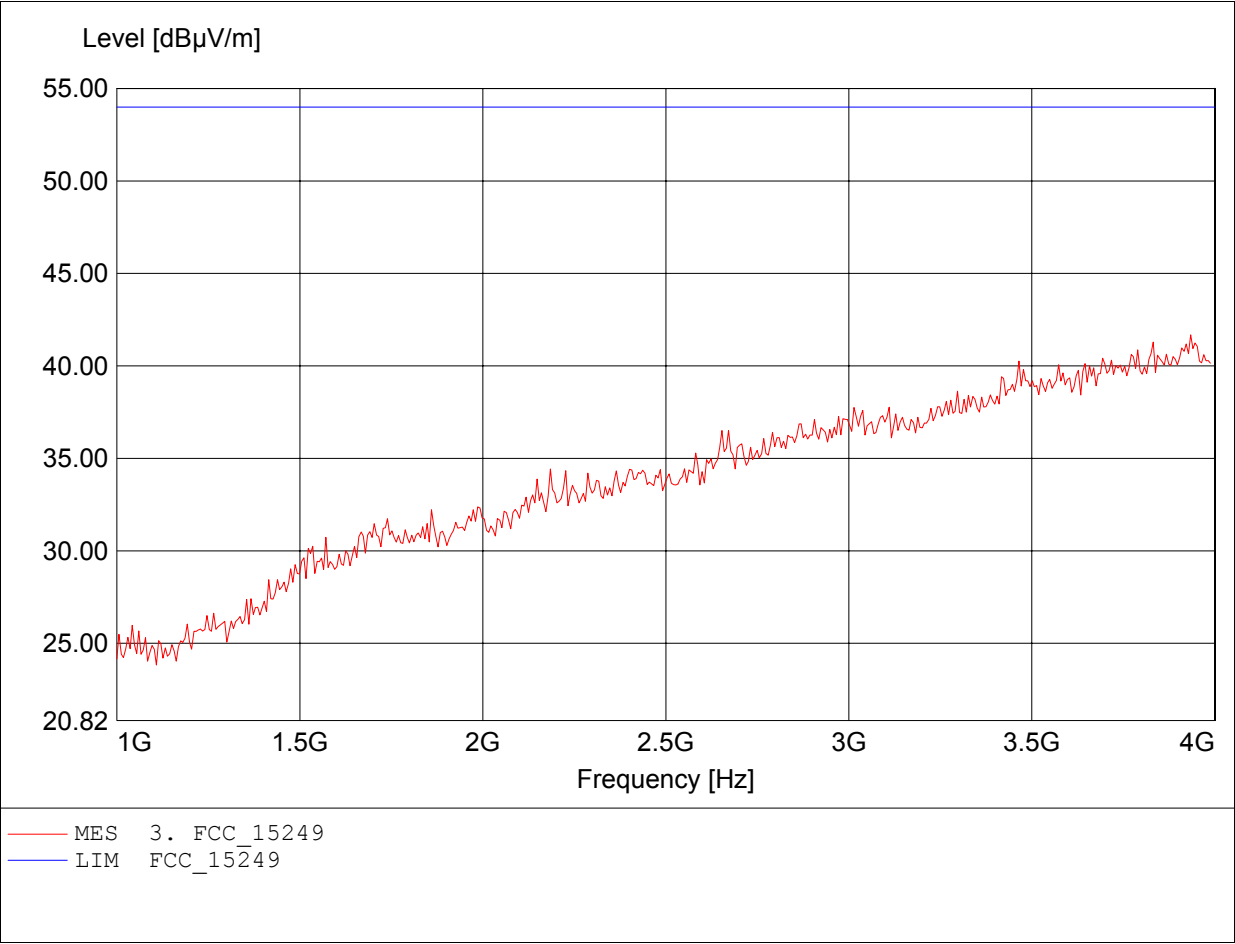


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to §15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, ampl.+HP.
Comment 2: Freq: 4.569GHz, Emax: 46.42dBµV/m, RBW: 1MHz

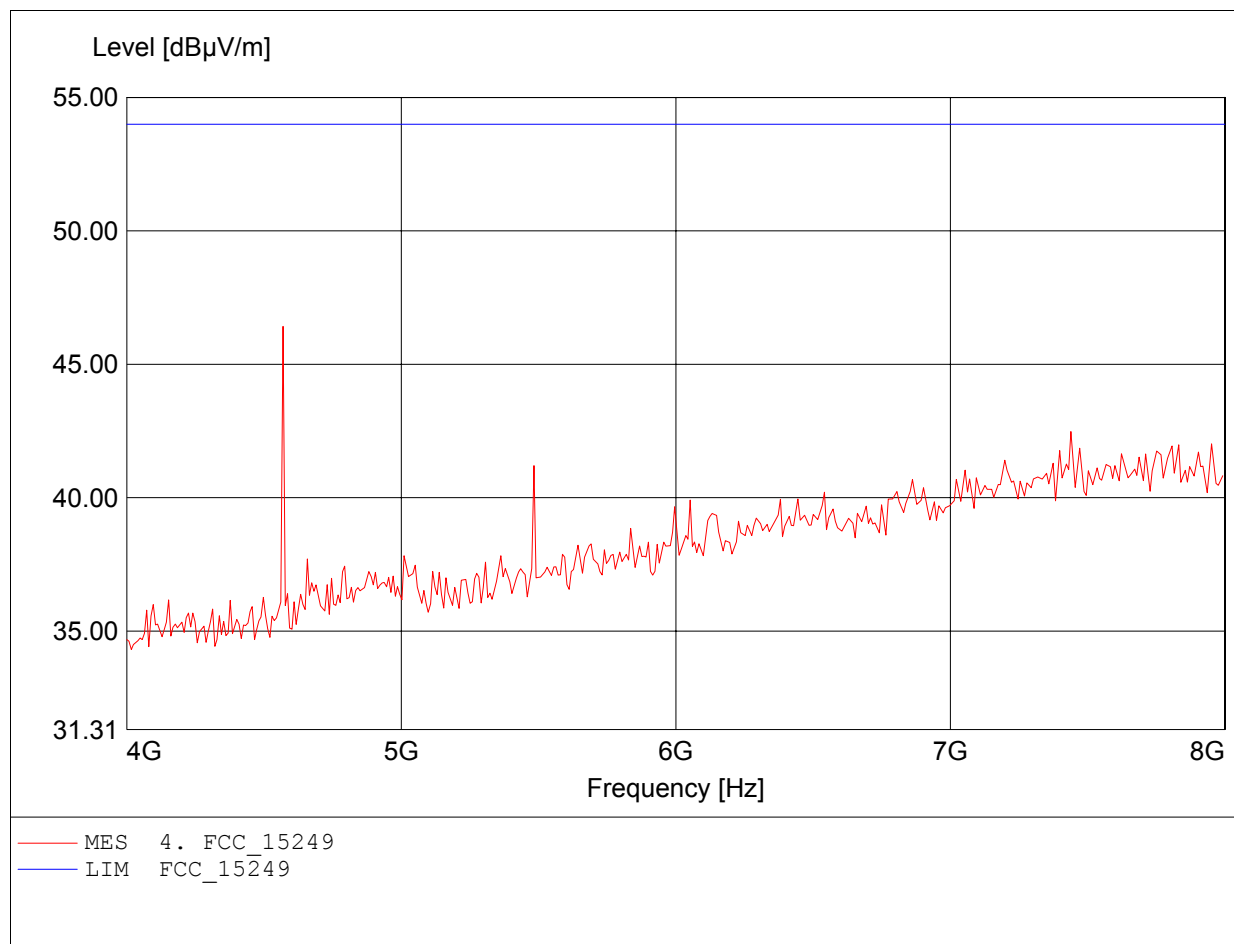


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to S15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, ampl.+HP.
Comment 2: Freq: 7.687GHz, Emax: 41.87dBµV/m, RBW: 1MHz

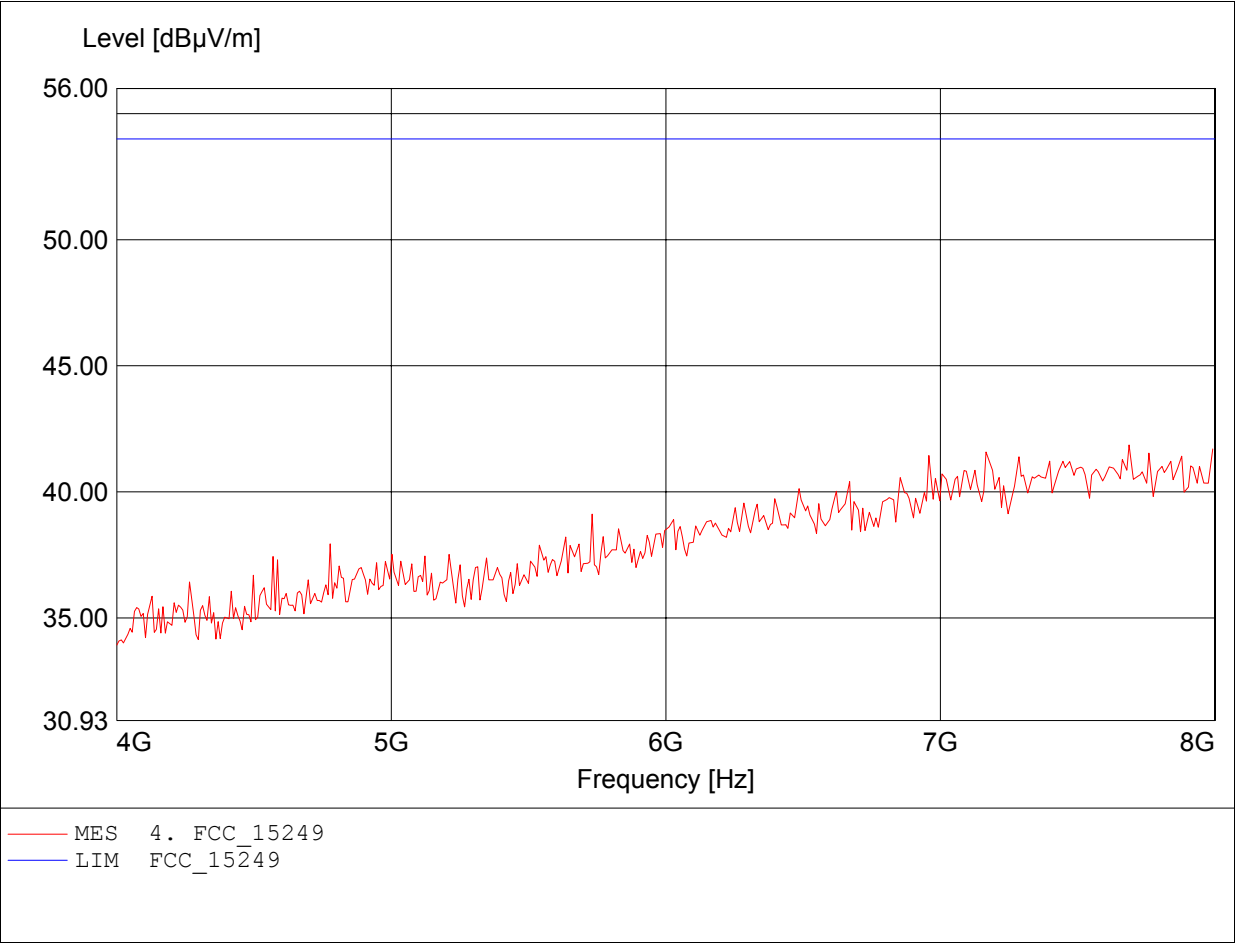


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to S15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, ampl.+HP.
Comment 2: Freq: 11.936GHz, Emax: 45.99dBµV/m, RBW: 1MHz

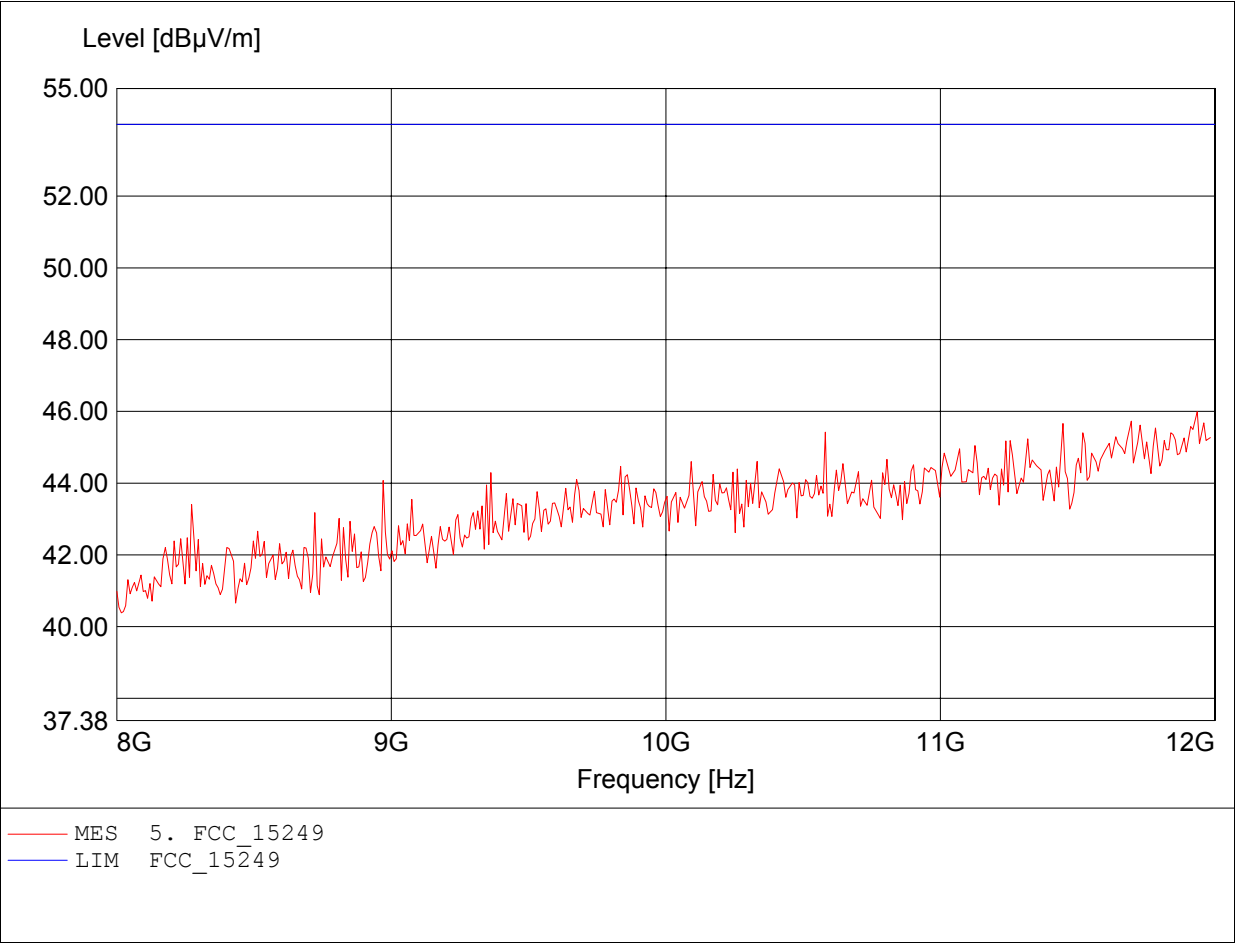

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Approval Holder: OraMetrix GmbH
EUT: WIRELESS FOOTSWITCH
Model: ASSY-000363
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.0 V DC (BATTERY)
Test Specification: according to S15.249, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, ampl.+HP.
Comment 2: Freq: 11.719GHz, Emax: 46.75dBµV/m, RBW: 1MHz

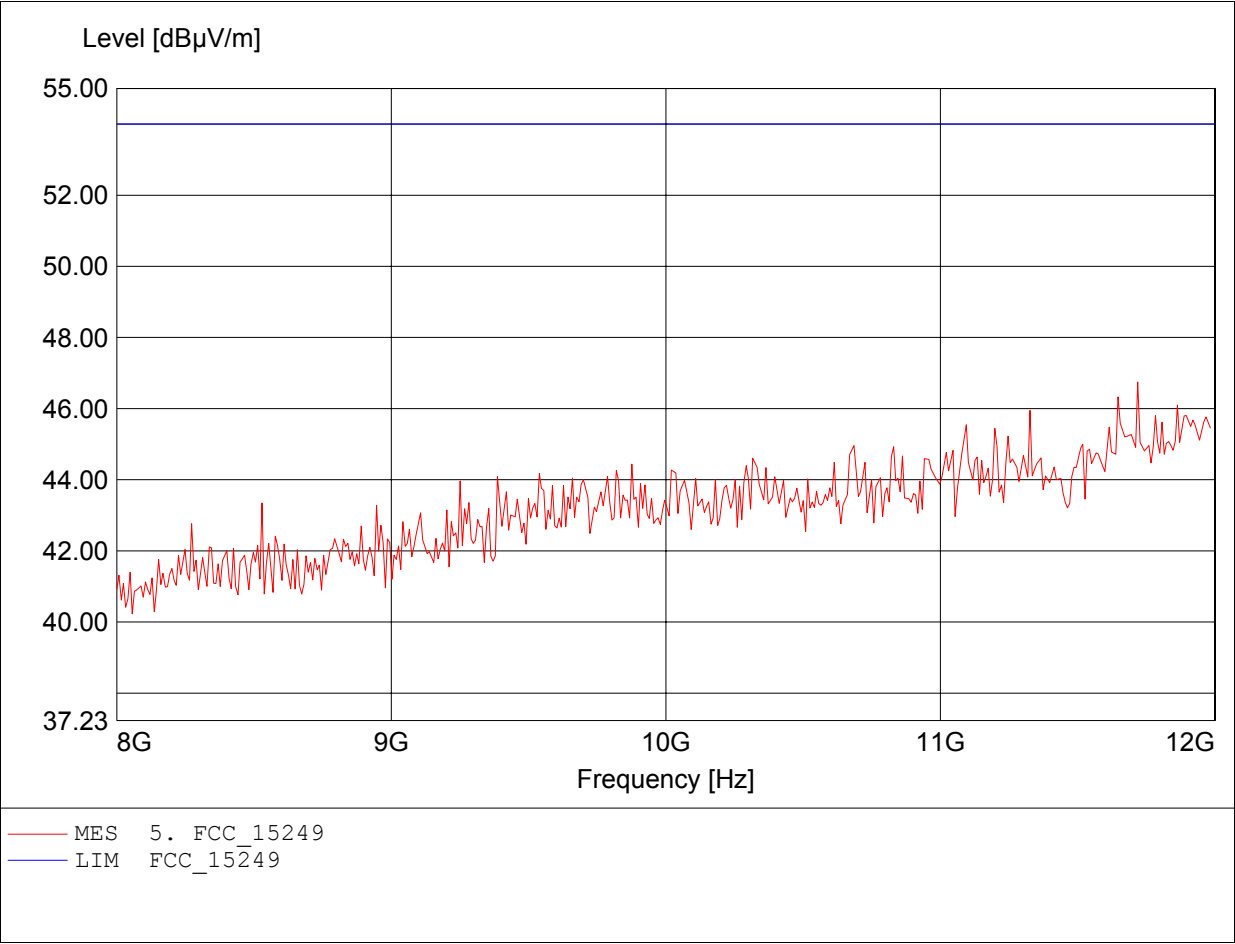

Appendix D

Out of band Spurious Emissions, Bandedge - Transmitter operating

Appendix E

Conducted Measurement at (AC) Power Line

Appendix F

Receiver radiated emissions