


Appendix B

RF Power Output




Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 29.95 dBm VBW 3 MHz
37 dBm 1.85010982 GHz SWT 5 ms Unit dBm

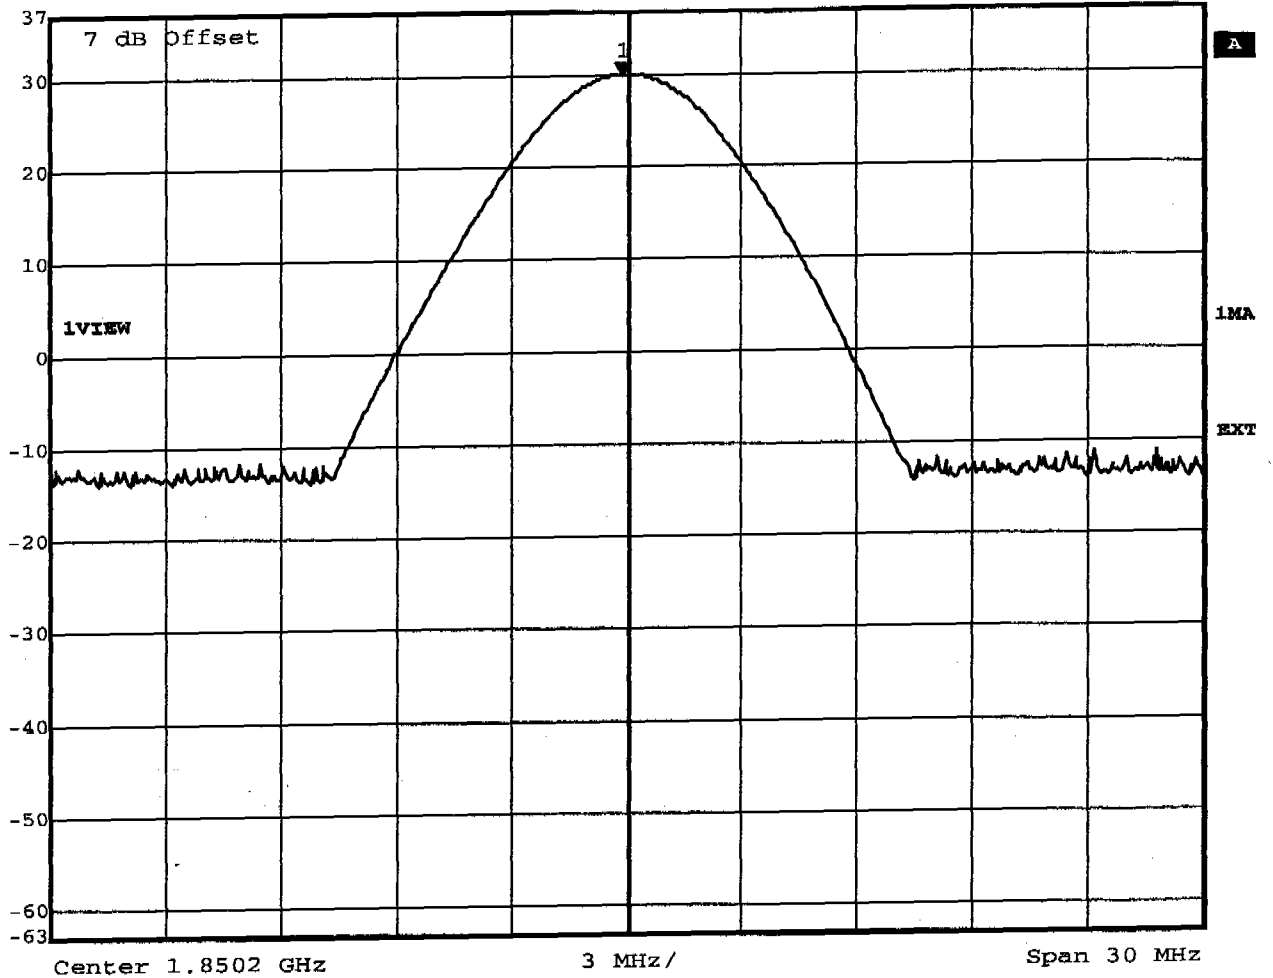

Title: Output Power Conducted Channel 512
Date: 1.SEP.2003 07:34:23




Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 29.84 dBm VBW 3 MHz
37 dBm 1.88009018 GHz SWT 5 ms Unit dBm

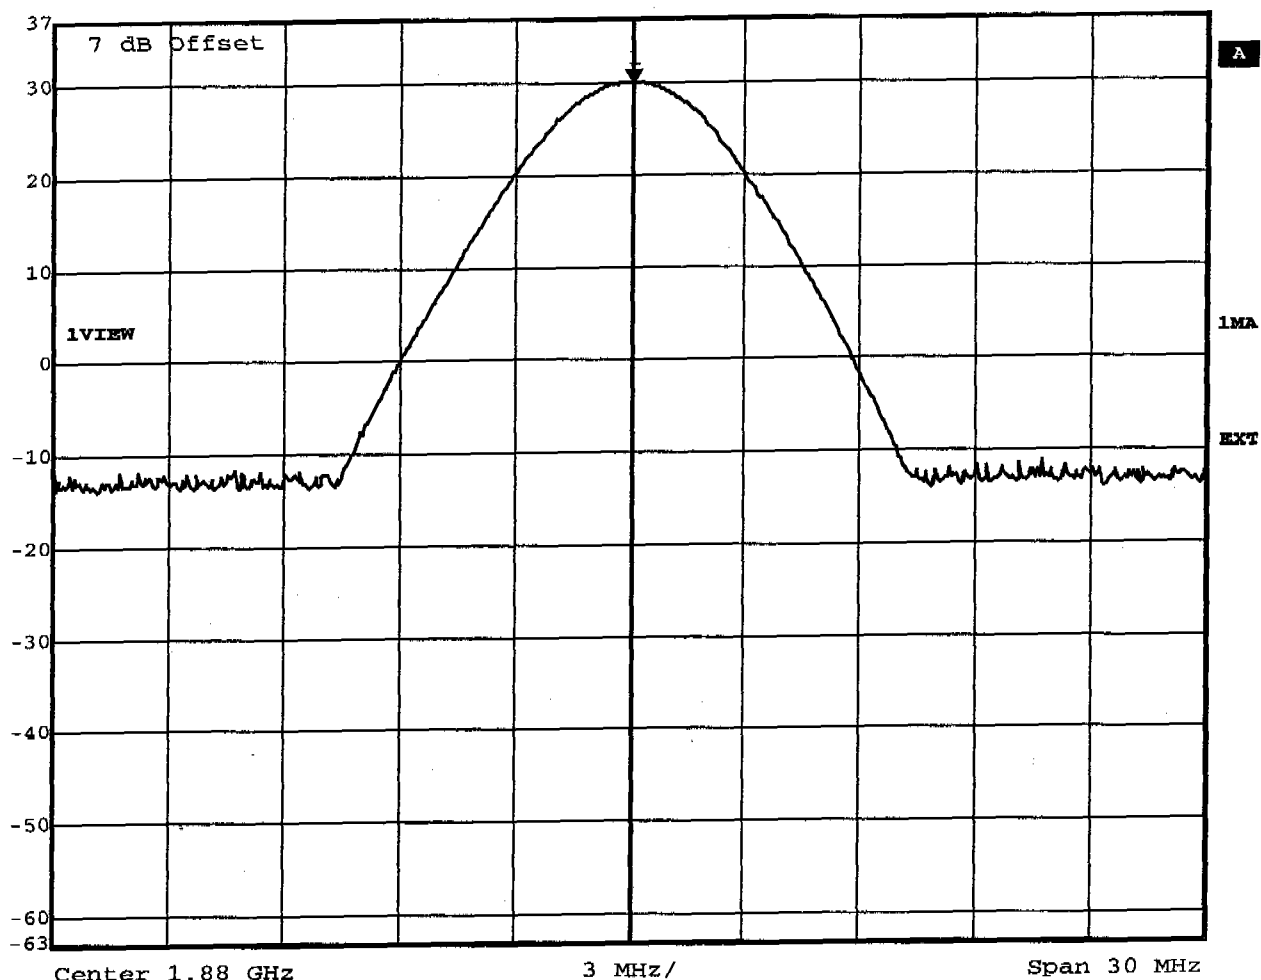

Title: Output Power Conducted Channel 661
Date: 1.SEP.2003 07:36:10



Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 29.38 dBm VBW 3 MHz
37 dBm 1.90983006 GHz SWT 5 ms Unit dBm

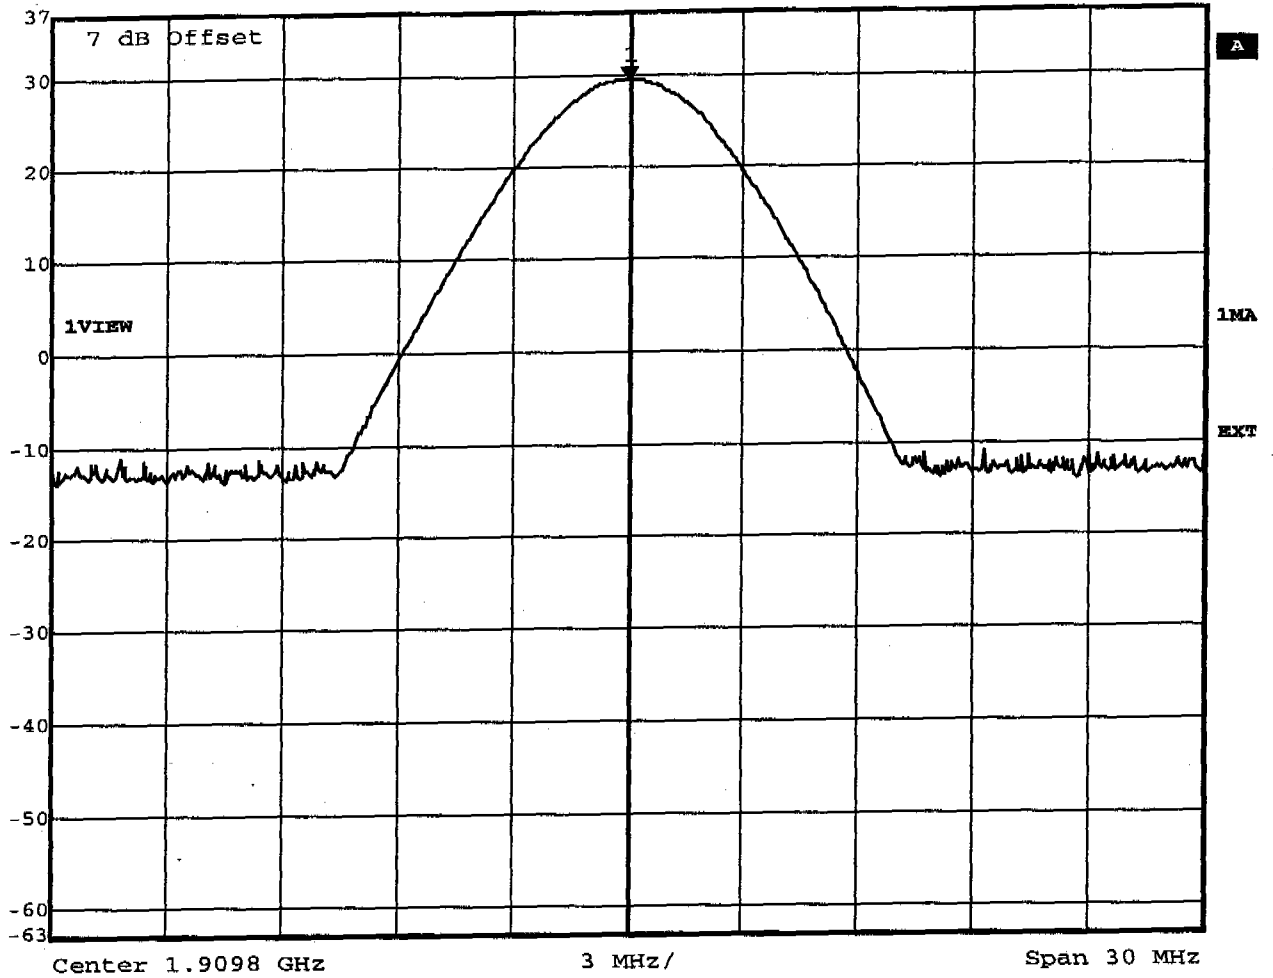


Title: Output Power Conducted Channel 810
Date: 1.SEP.2003 08:22:39

Appendix C

Radiated Power


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 22.95dBm, RBW: 3MHz

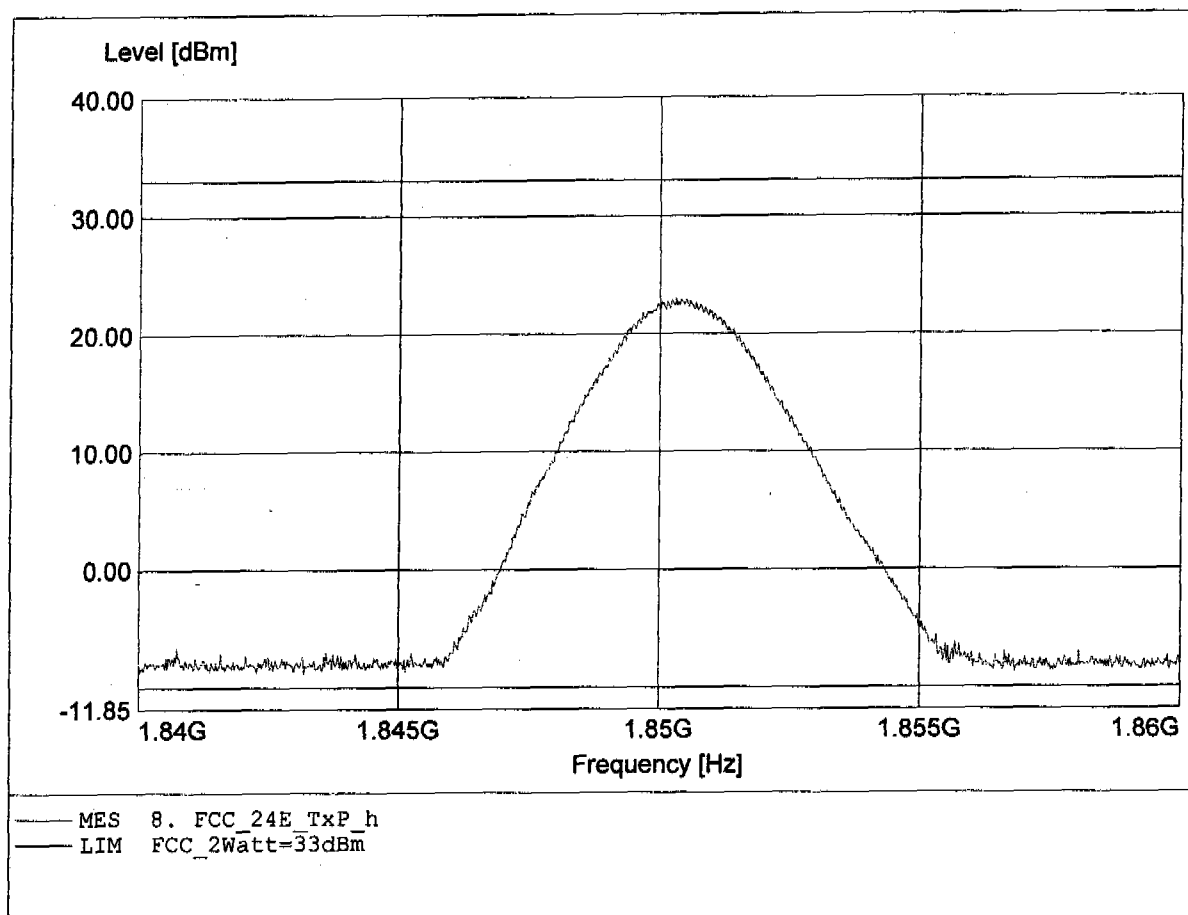


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 28.92dBm, RBW: 3MHz

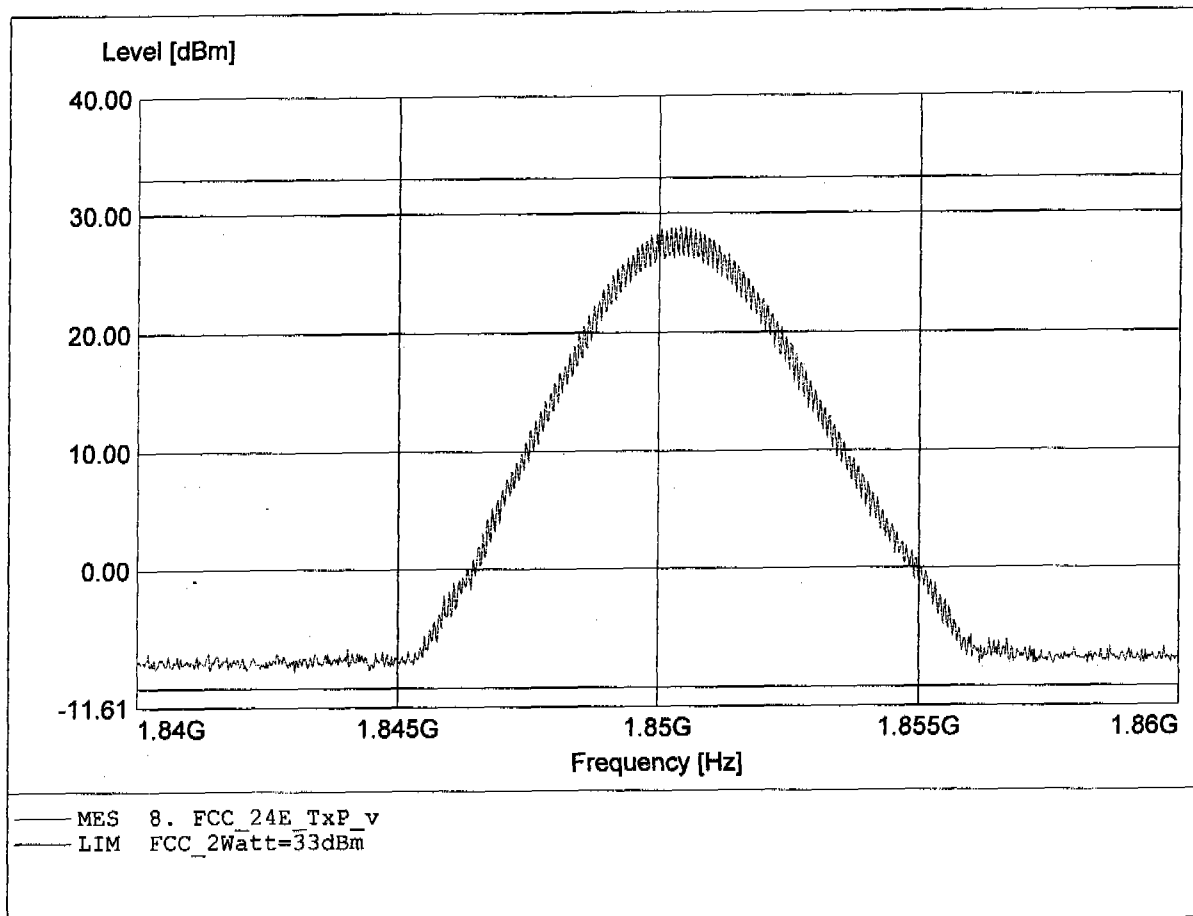


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 22.88dBm, RBW: 3MHz

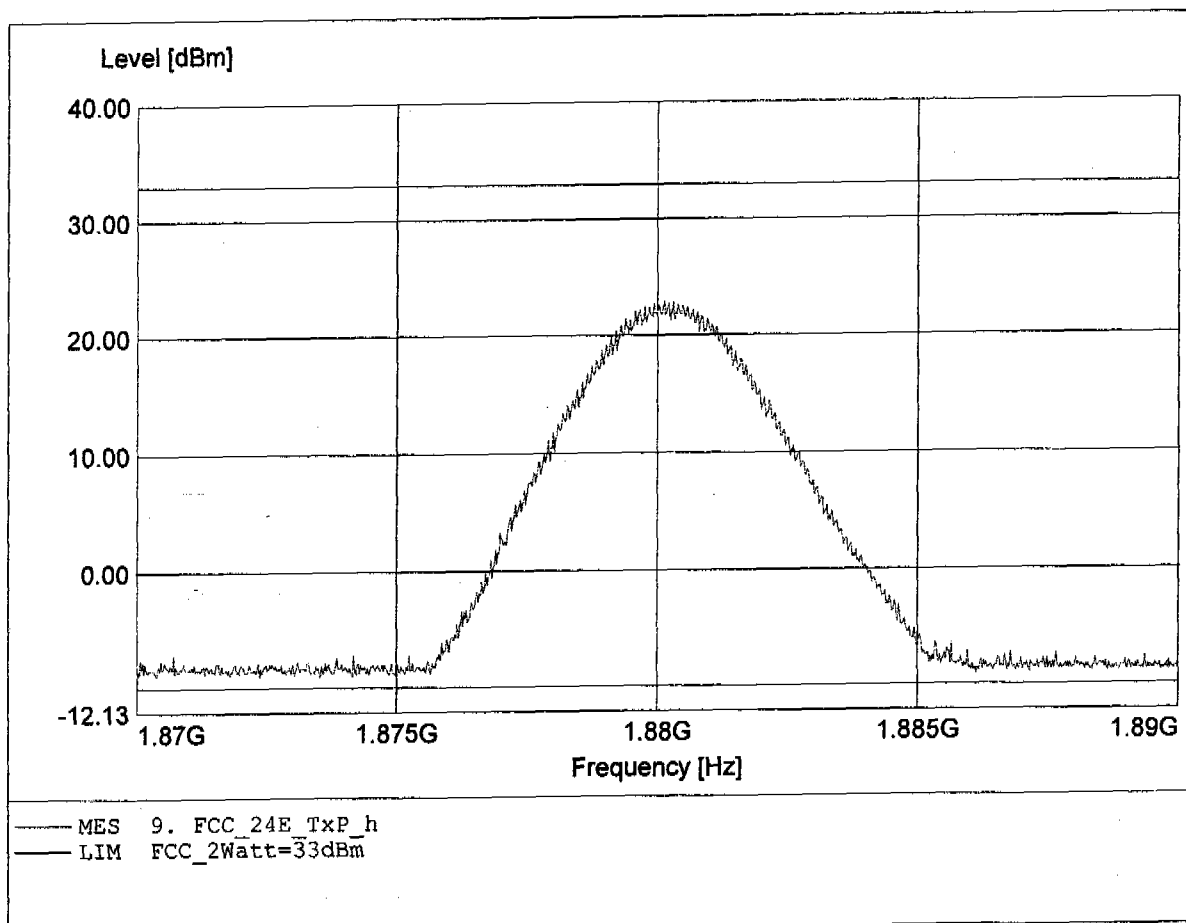


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 29.25dBm, RBW: 3MHz

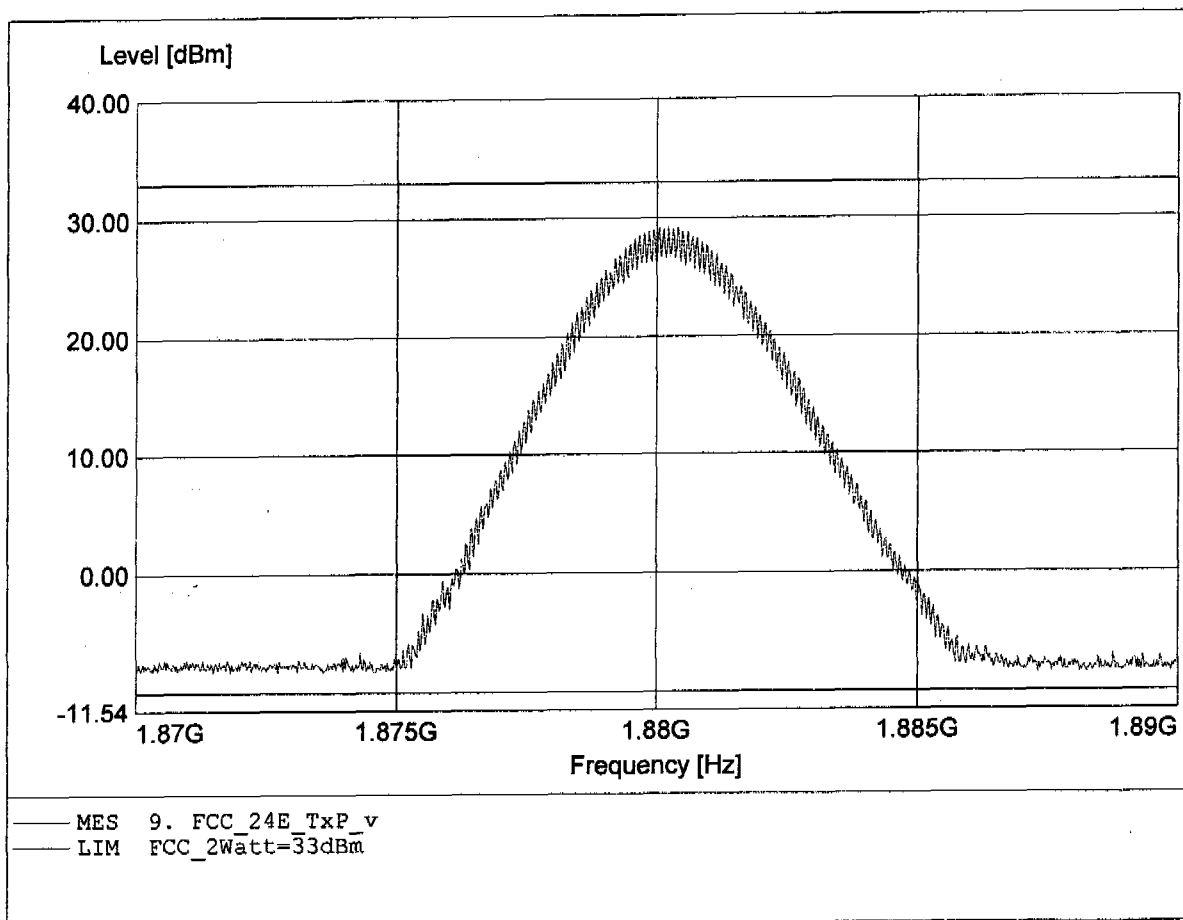


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 23.06dBm, RBW: 3MHz

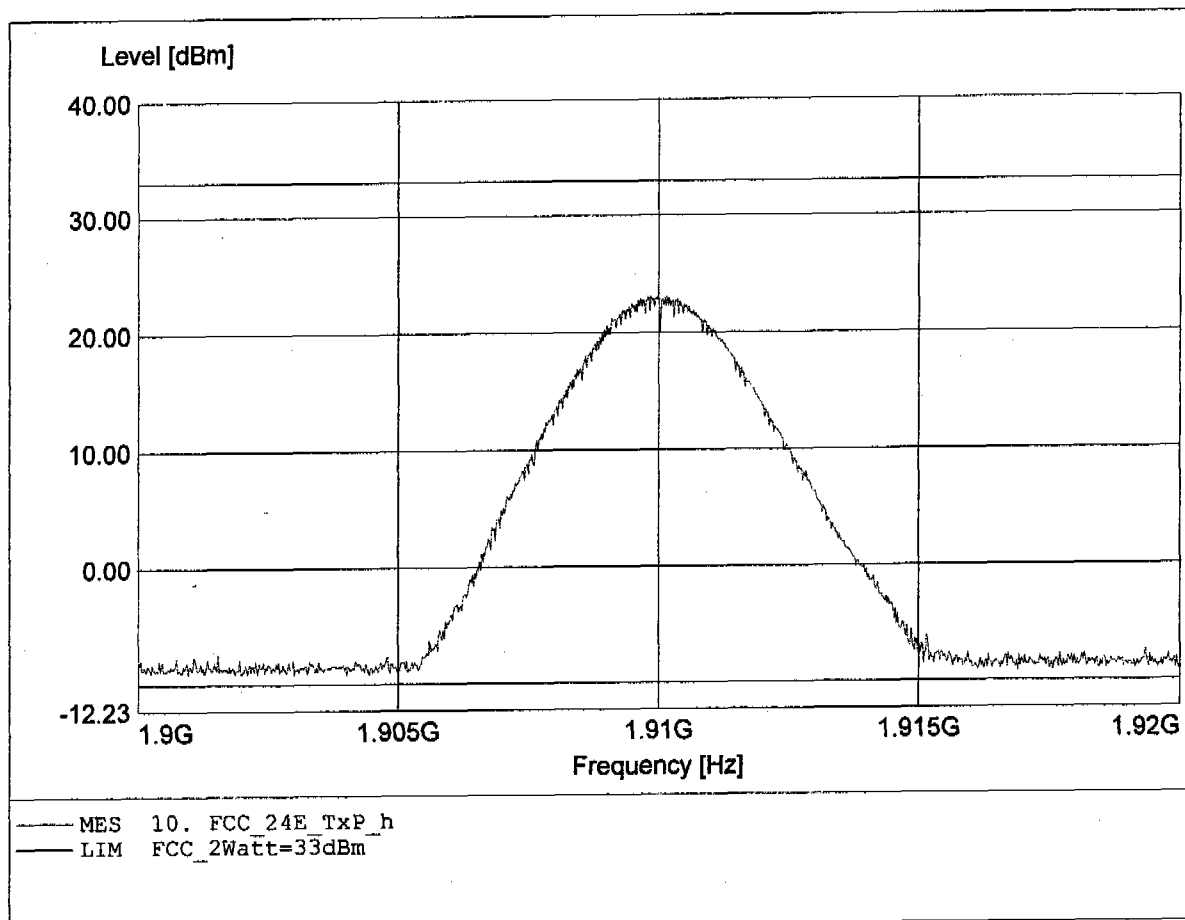

Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 28.57dBm, RBW: 3MHz

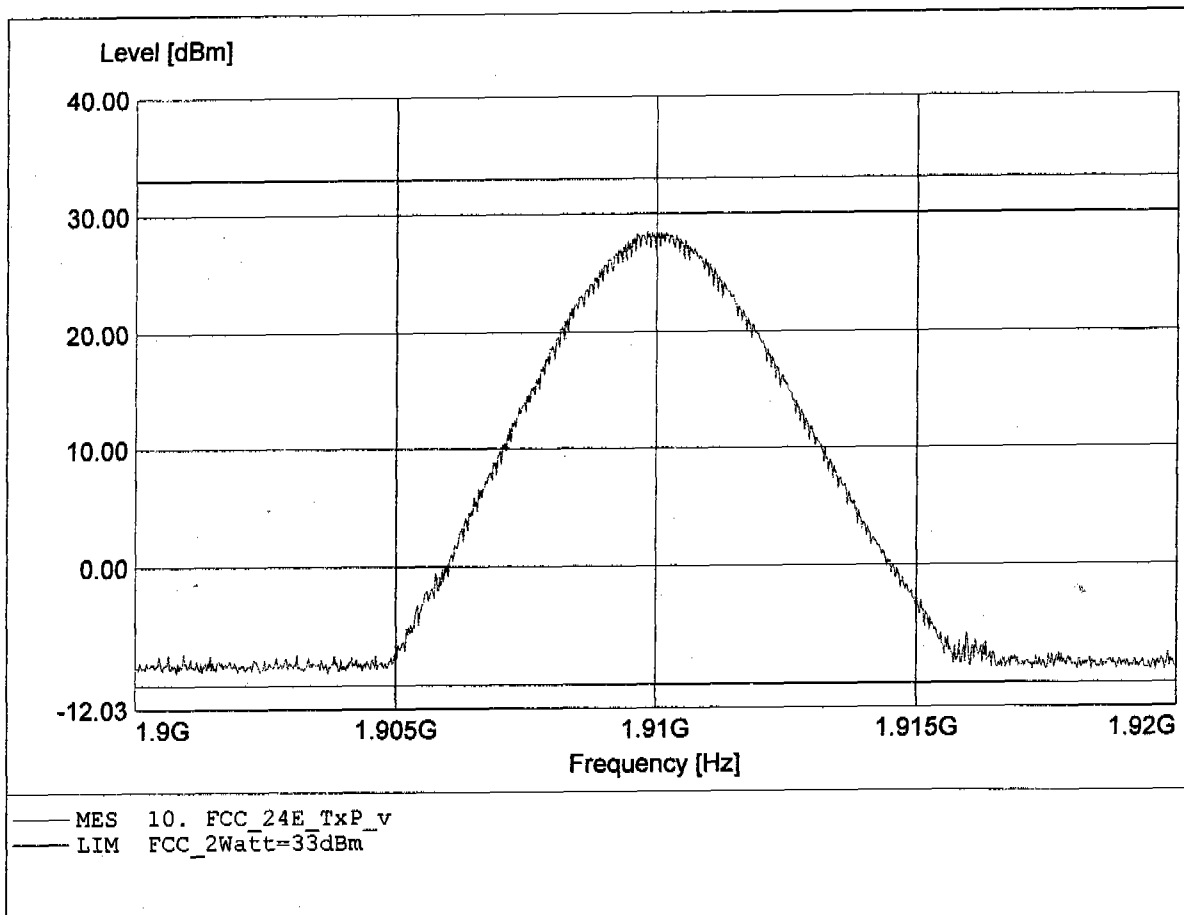


Appendix D

Occupied Bandwidth




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 20.95 dBm VBW 3 kHz
37 dBm 1.85020701 GHz SWT 280 ms Unit dBm

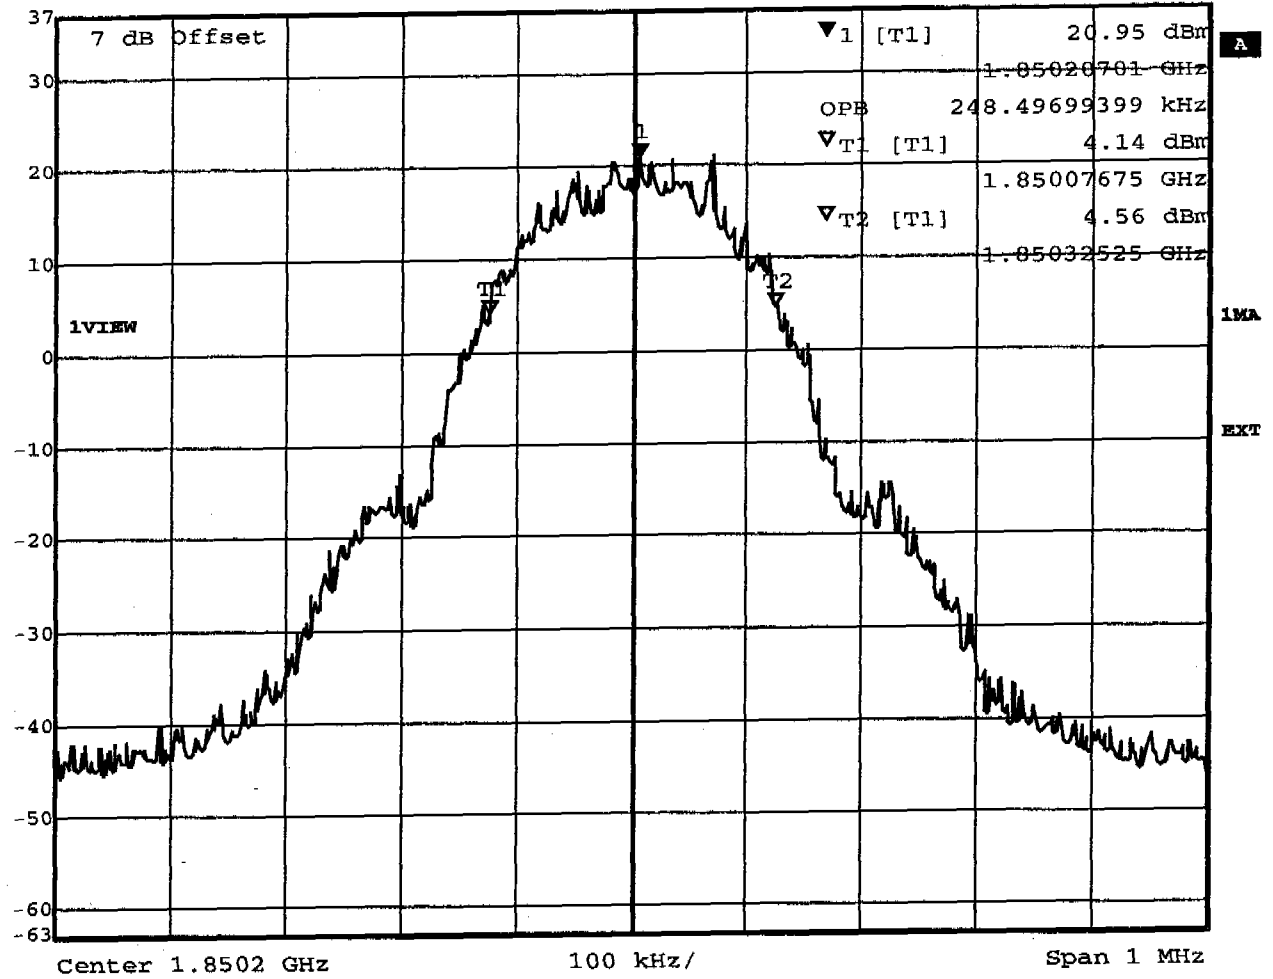

Title: Occpied Power Bandwidth Channel 512
Date: 1.SEP.2003 07:32:26




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 21.43 dBm VBW 3 kHz
37 dBm 1.88000902 GHz SWT 280 ms Unit dBm

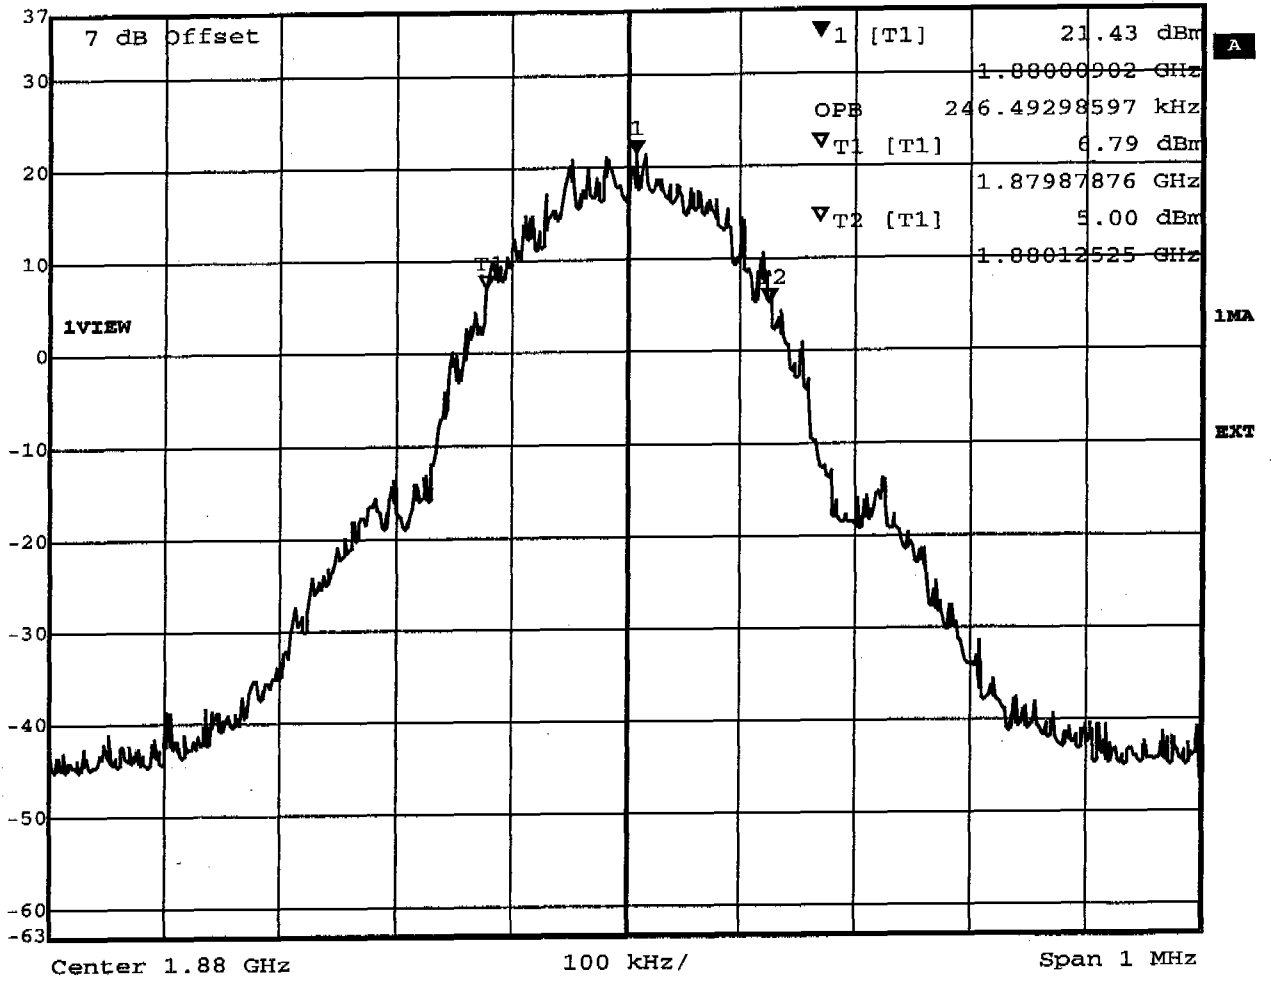

Title: Occupied Power Bandwidth Channel 661
Date: 1.SEP.2003 07:37:38




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 21.05 dBm VBW 3 kHz
37 dBm 1.90979098 GHz SWT 280 ms Unit dBm

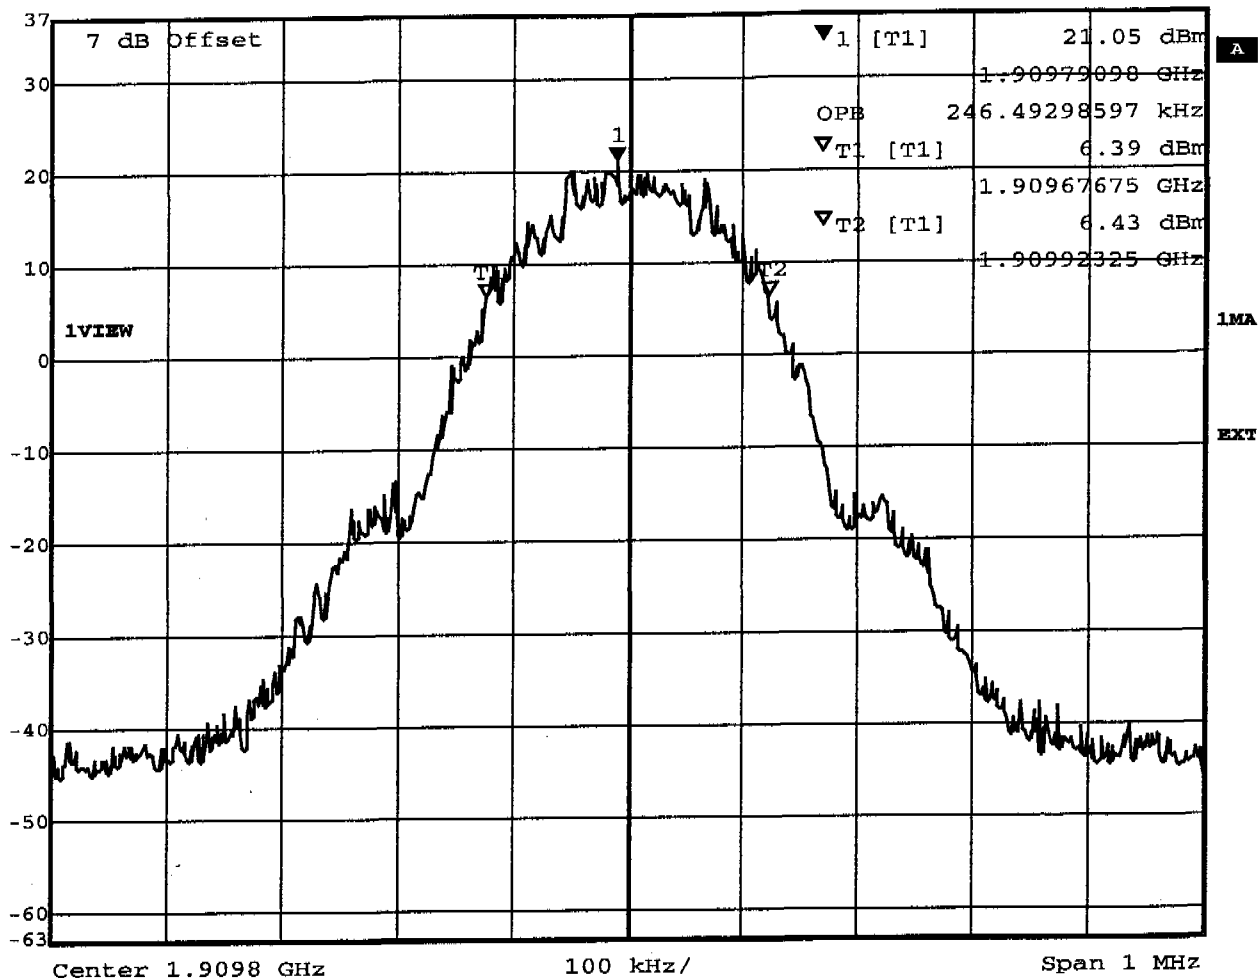

Title: Occpied Power Bandwidth Channel 810
Date: 1.SEP.2003 07:50:37




Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
37 dBm BW 314.62925852 kHz SWT 280 ms Unit dBm

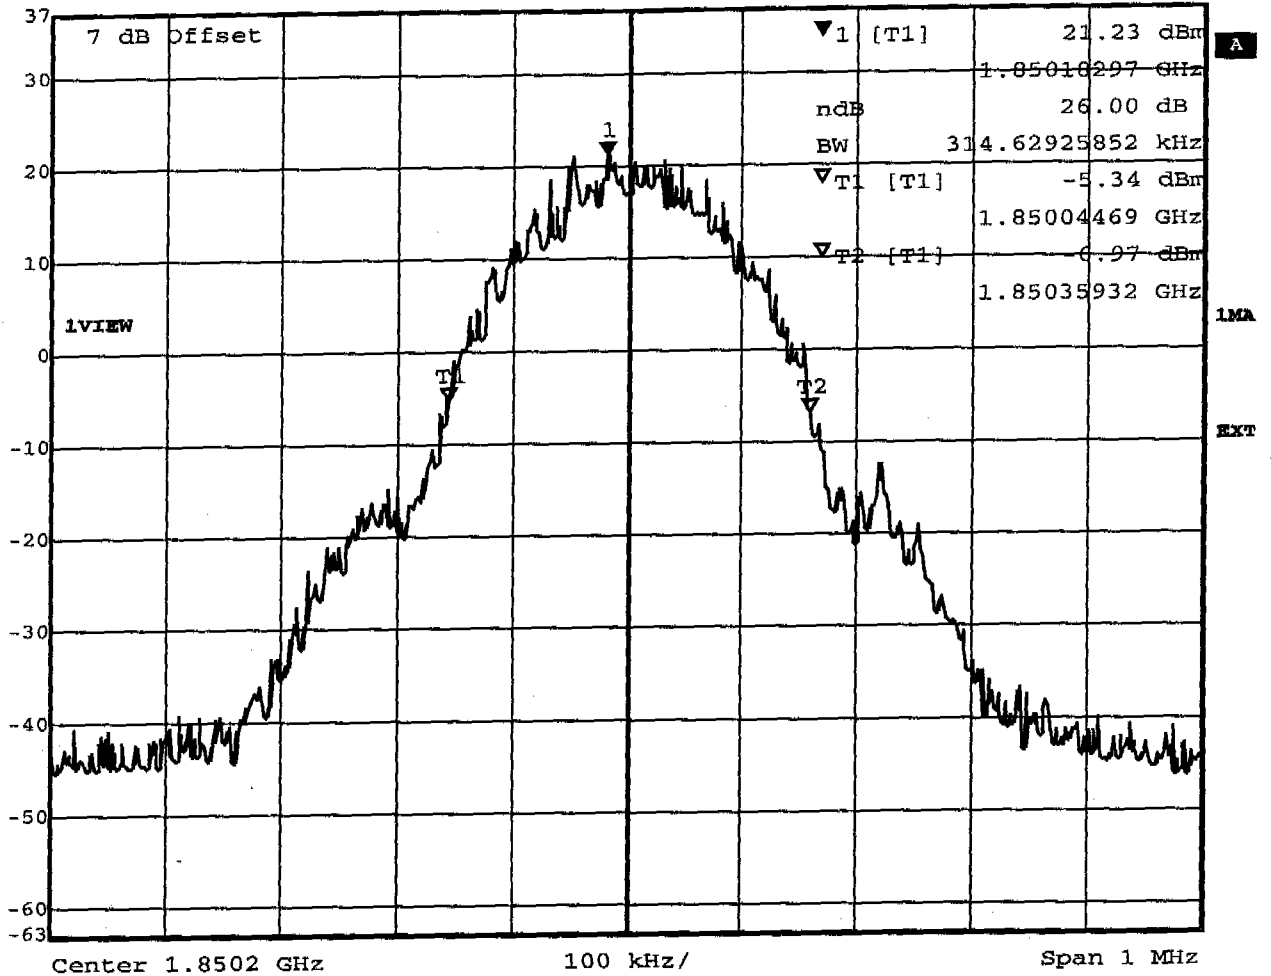

Title: -26 dBc Emission Bandwidth Channel 512
Comment A: Innostream I-2000
Date: 1.SEP.2003 07:29:42




Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
37 dBm BW 312.62525050 kHz SWT 280 ms Unit dBm

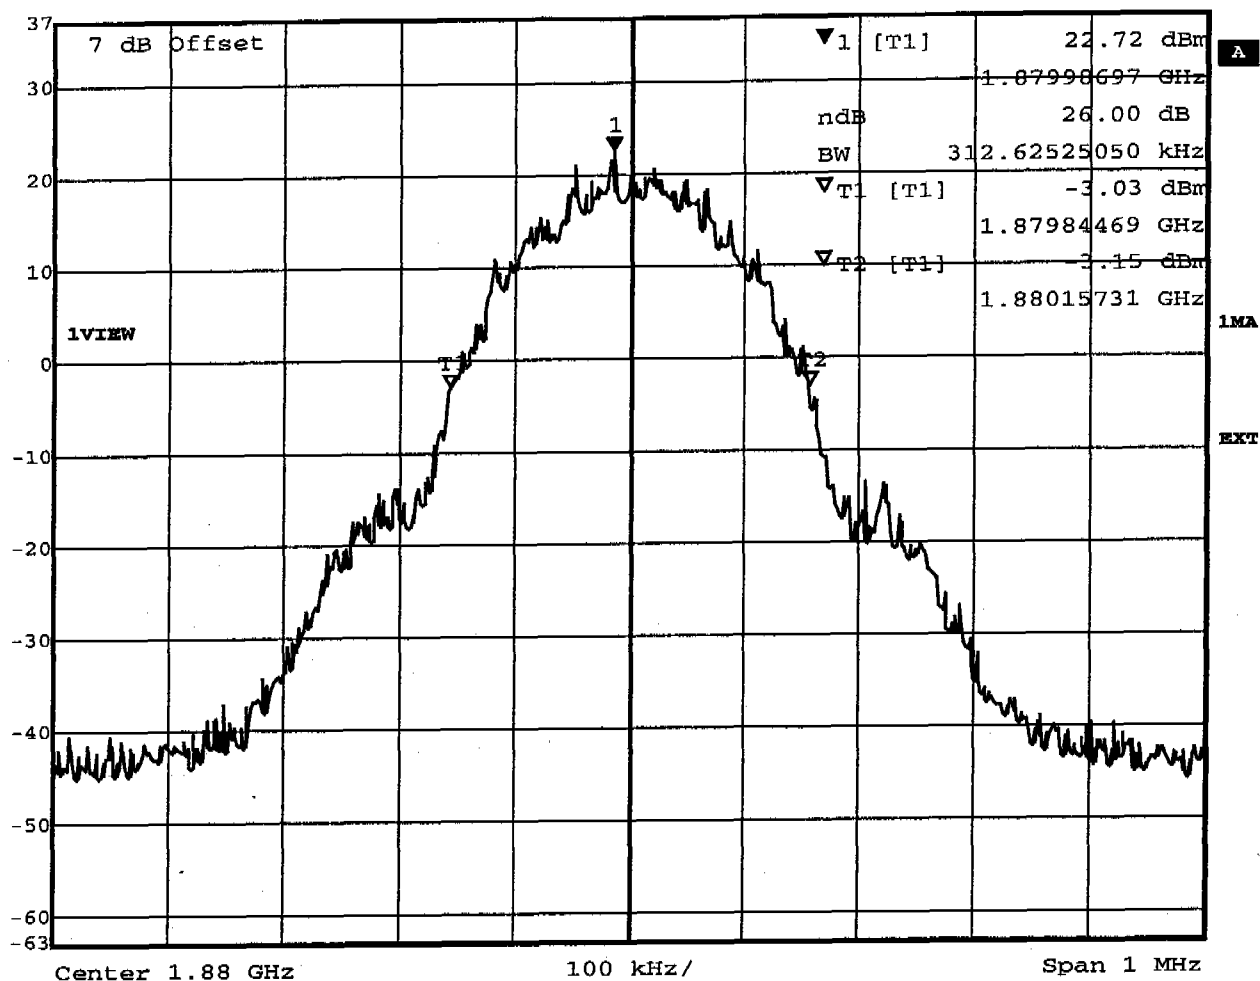

Title: -26 dBc Emission Bandwidth Channel 661
Date: 1.SEP.2003 07:41:07



Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
37 dBm BW 316.63326653 kHz SWT 280 ms Unit dBm

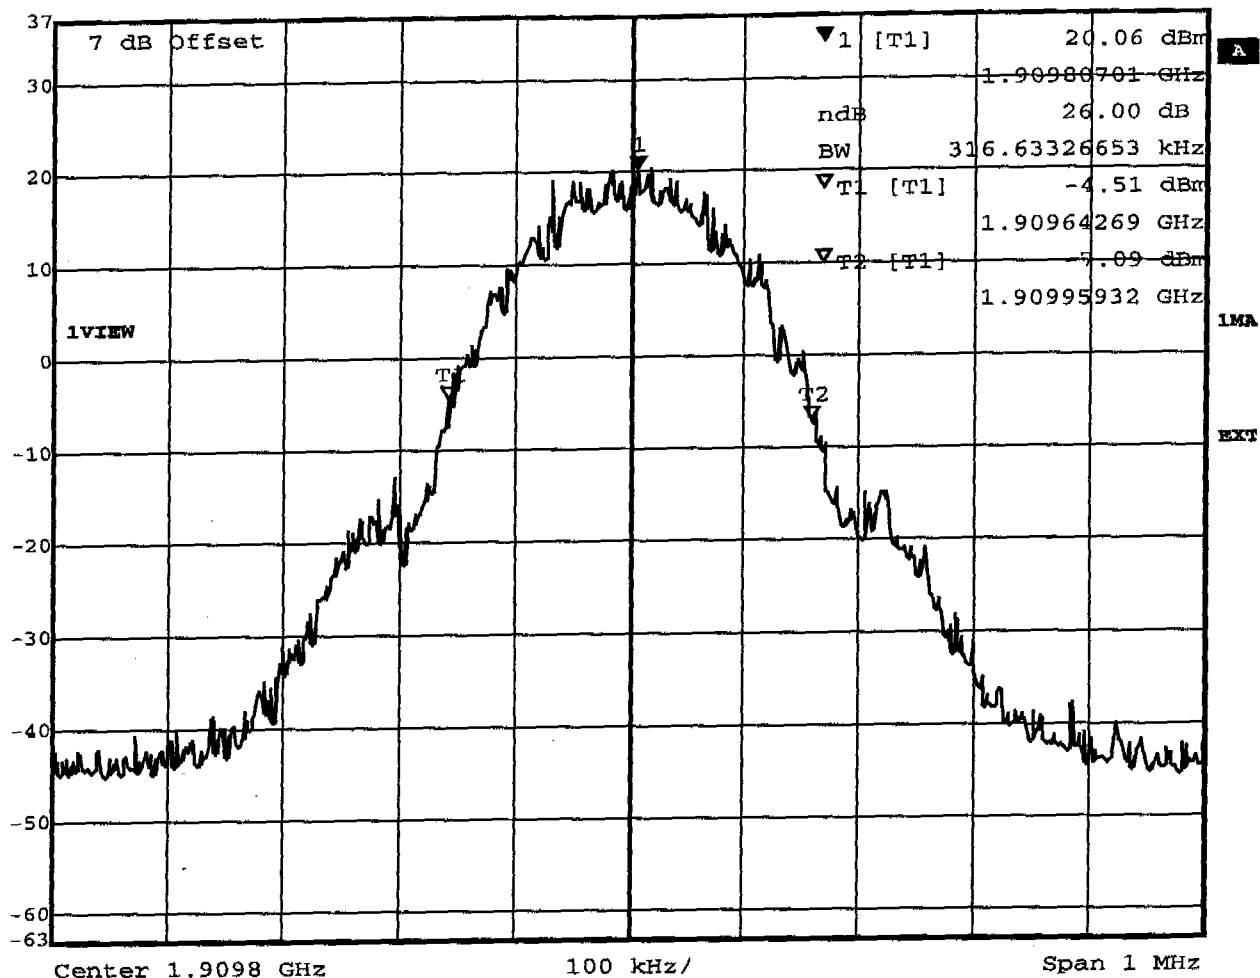


Title: -26 dBc Emission Bandwidth Channel 810
Date: 1.SEP.2003 07:47:33

Appendix E

Field Strength of Spurious Radiation




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 29.83 dBm VBW 3 kHz
37 dBm 1.85023046 GHz SWT 560 ms Unit dBm

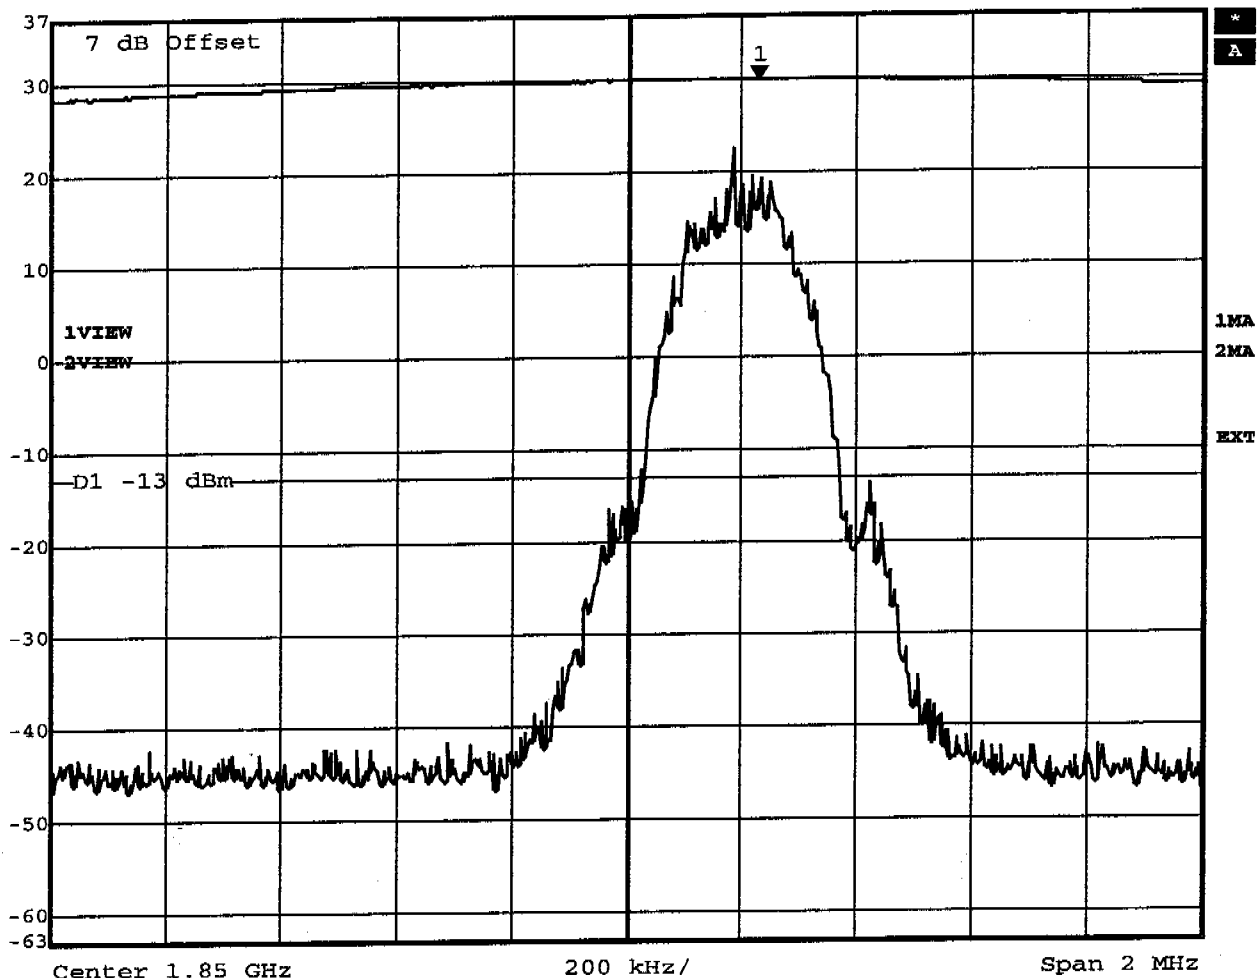

Title: Lower Band Edge
Date: 1.SEP.2003 08:00:31




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 29.46 dBm VBW 3 kHz
37 dBm 1.90978958 GHz SWT 560 ms Unit dBm

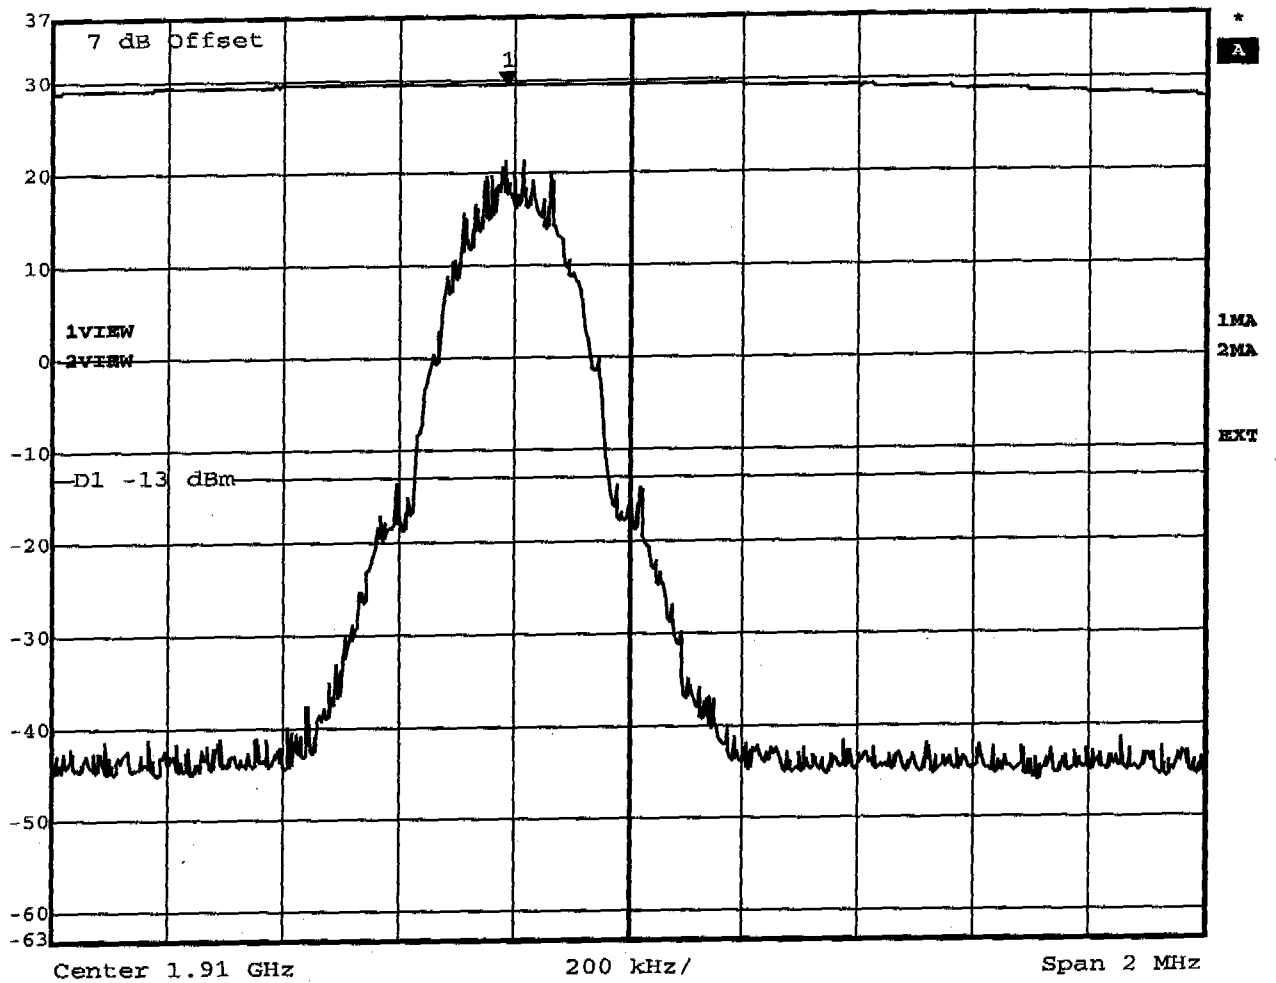

Title: Higher Band Edge
Date: 1.SEP.2003 07:56:33


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 194.711MHz, Pmax: -52.65dBm, RBW: 1MHz

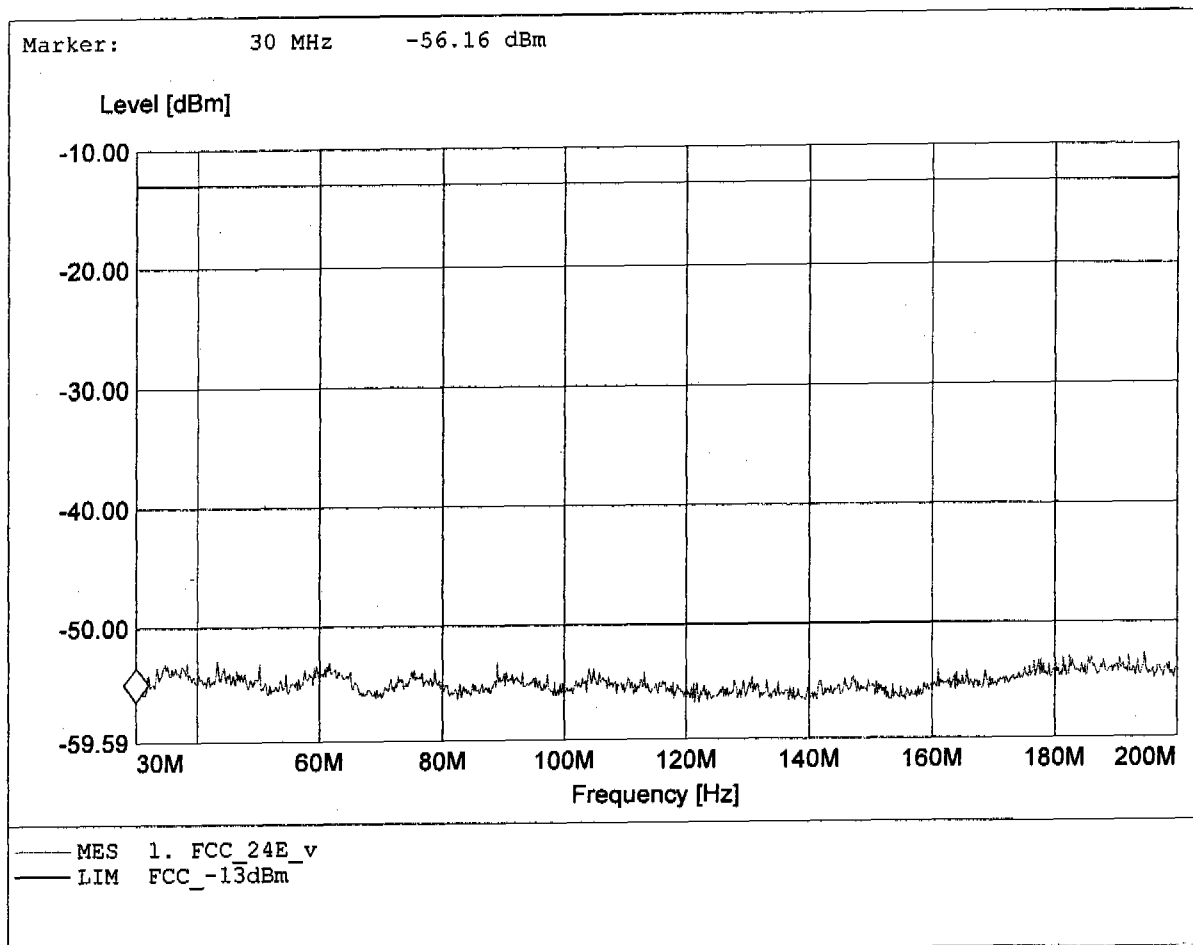


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 47.378MHz, Pmax: -51.49dBm, RBW: 1MHz

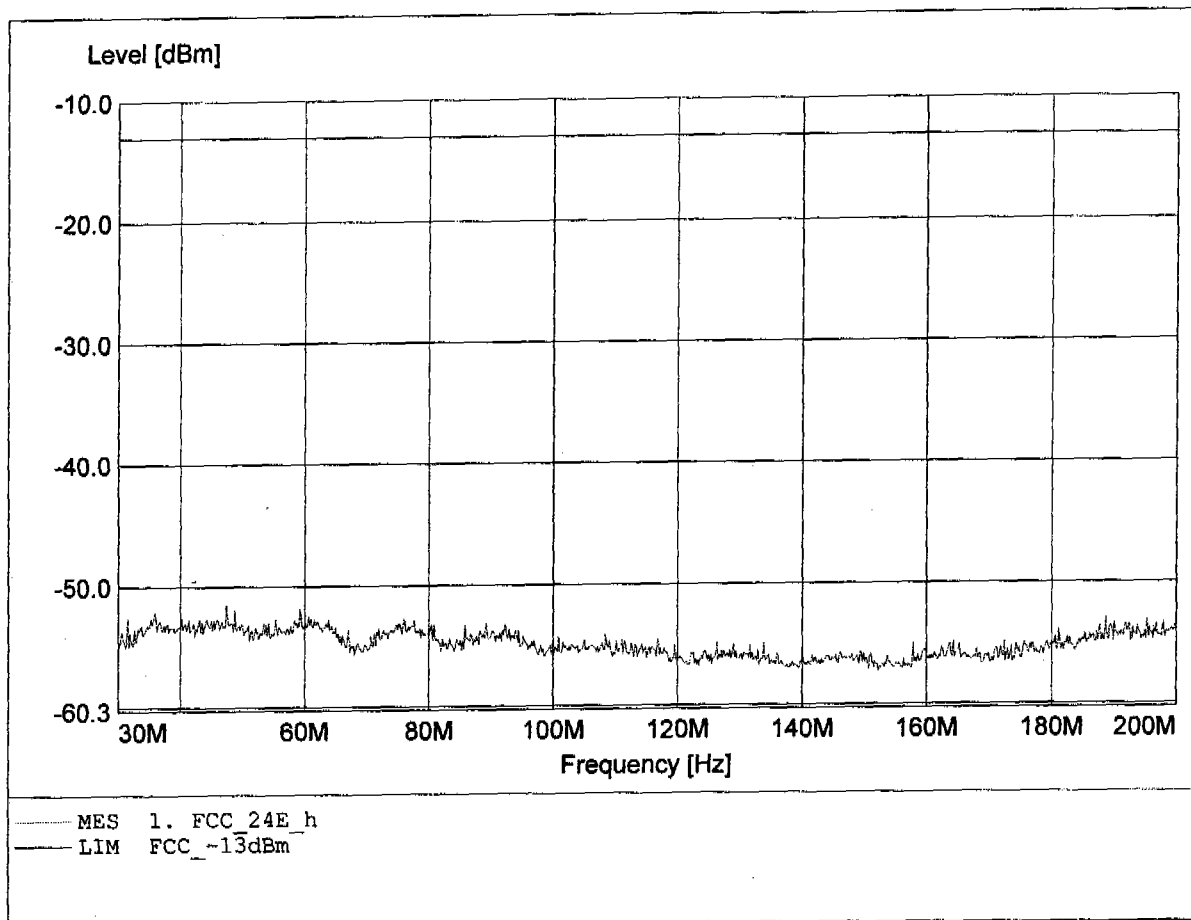


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 718.222MHz, Pmax: -39.24dBm, RBW: 1MHz

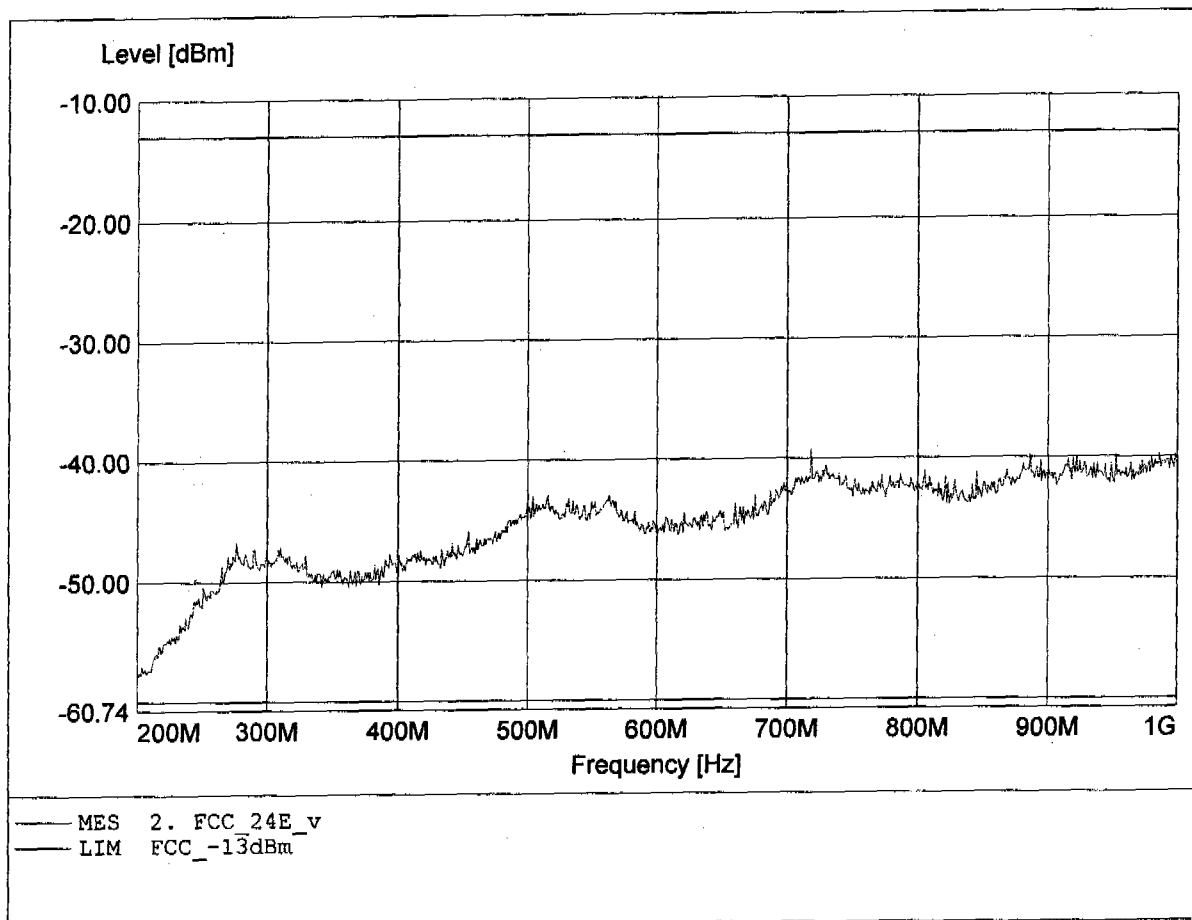


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 854.222MHz, Pmax: -74.02dBm, RBW: 1MHz

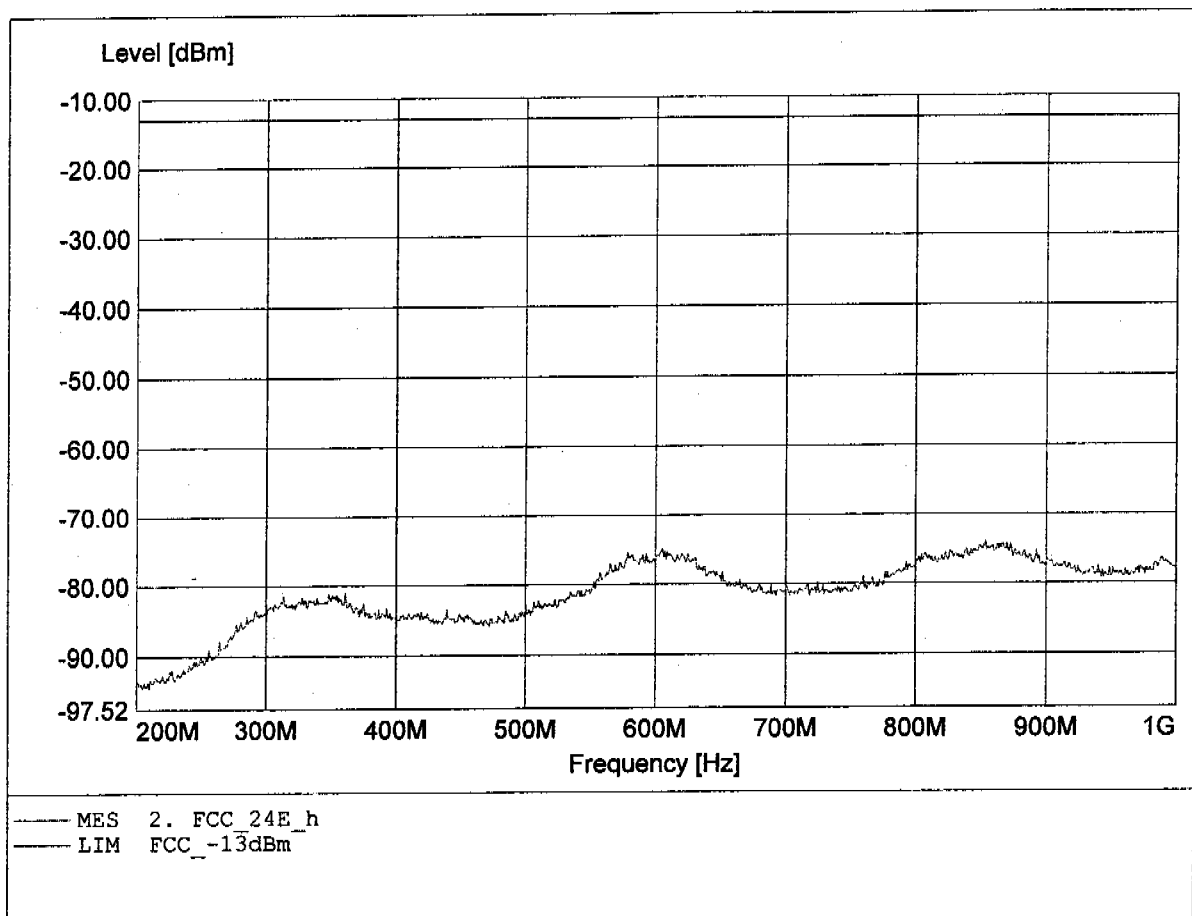


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.850GHz, Pmax: -20.93dBm, RBW: 1MHz/3kHz

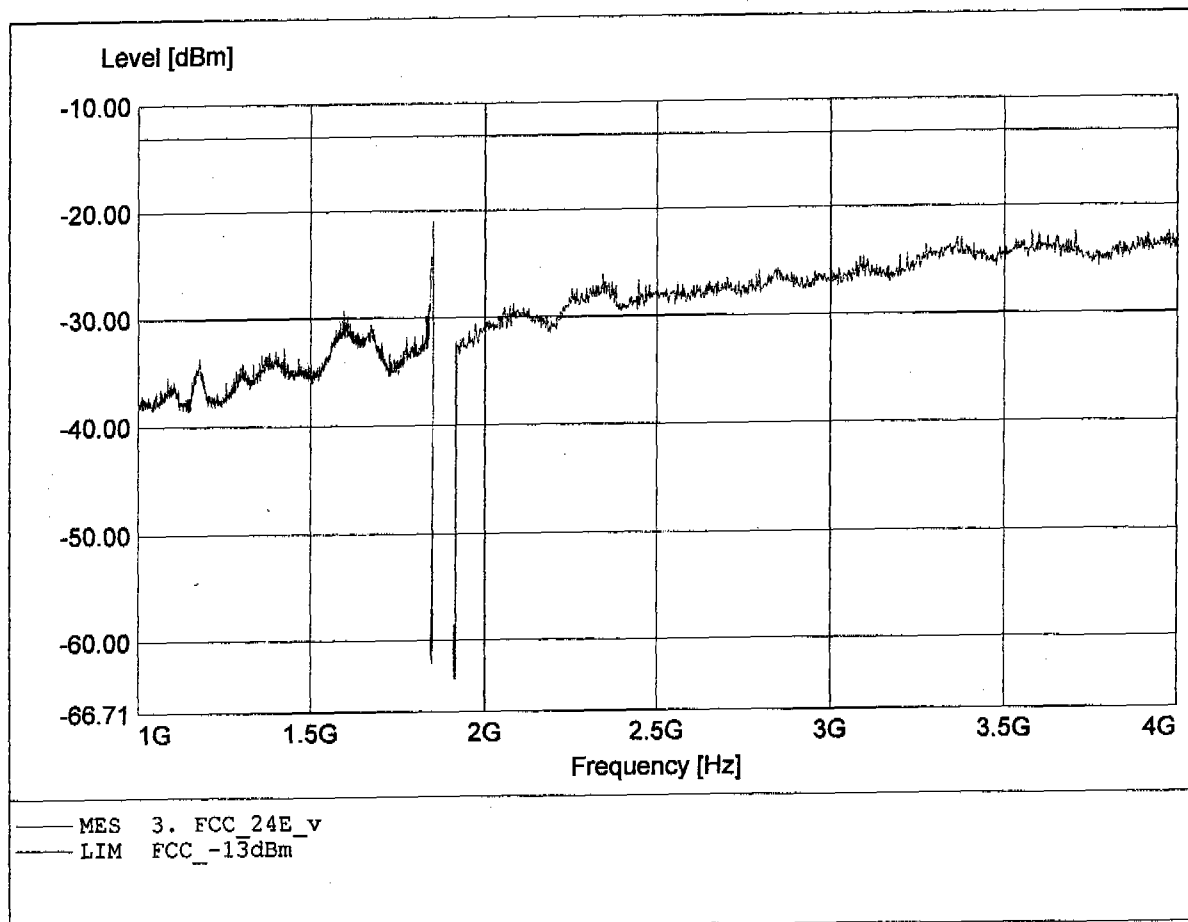


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.703GHz, Pmax: -19.44dBm, RBW: 1MHz/3kHz

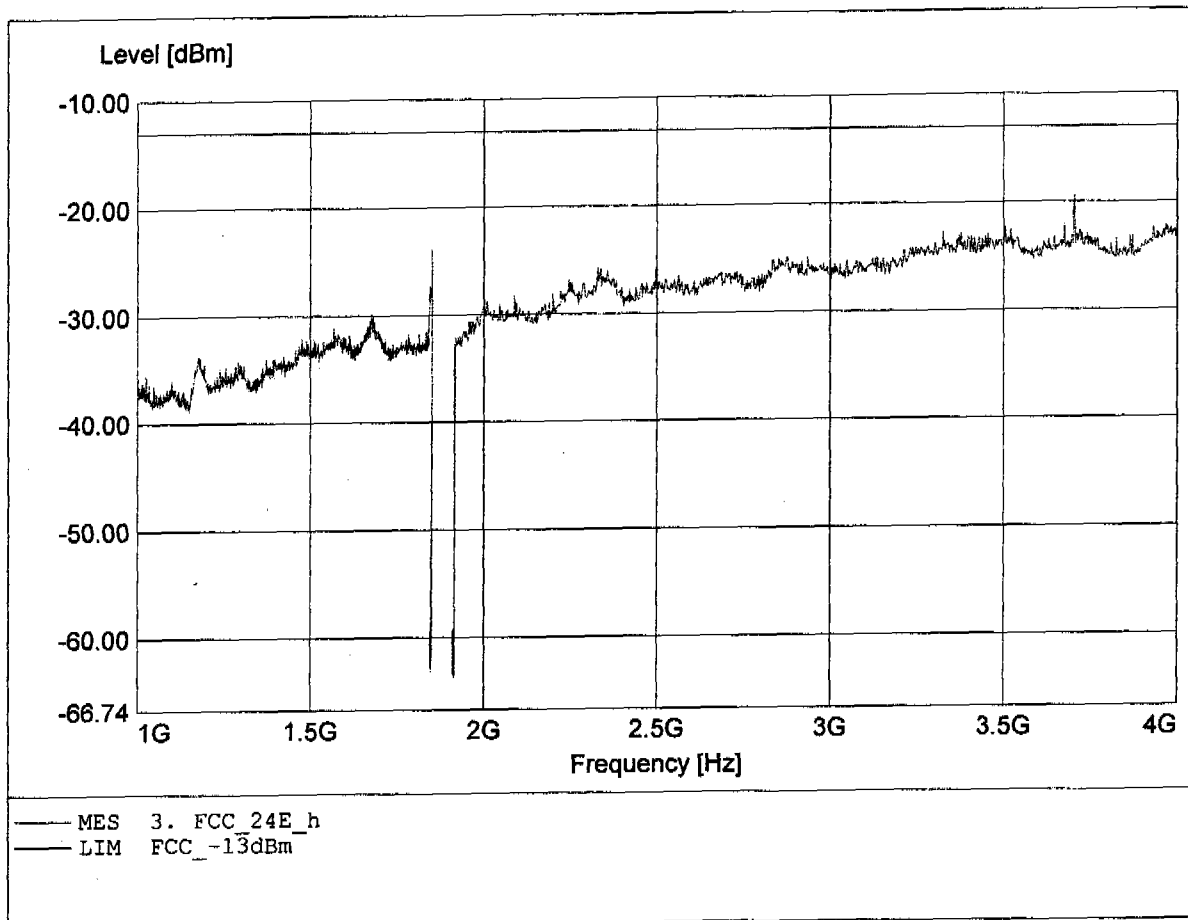


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.556GHz, Pmax: -28.14dBm, RBW: 1MHz

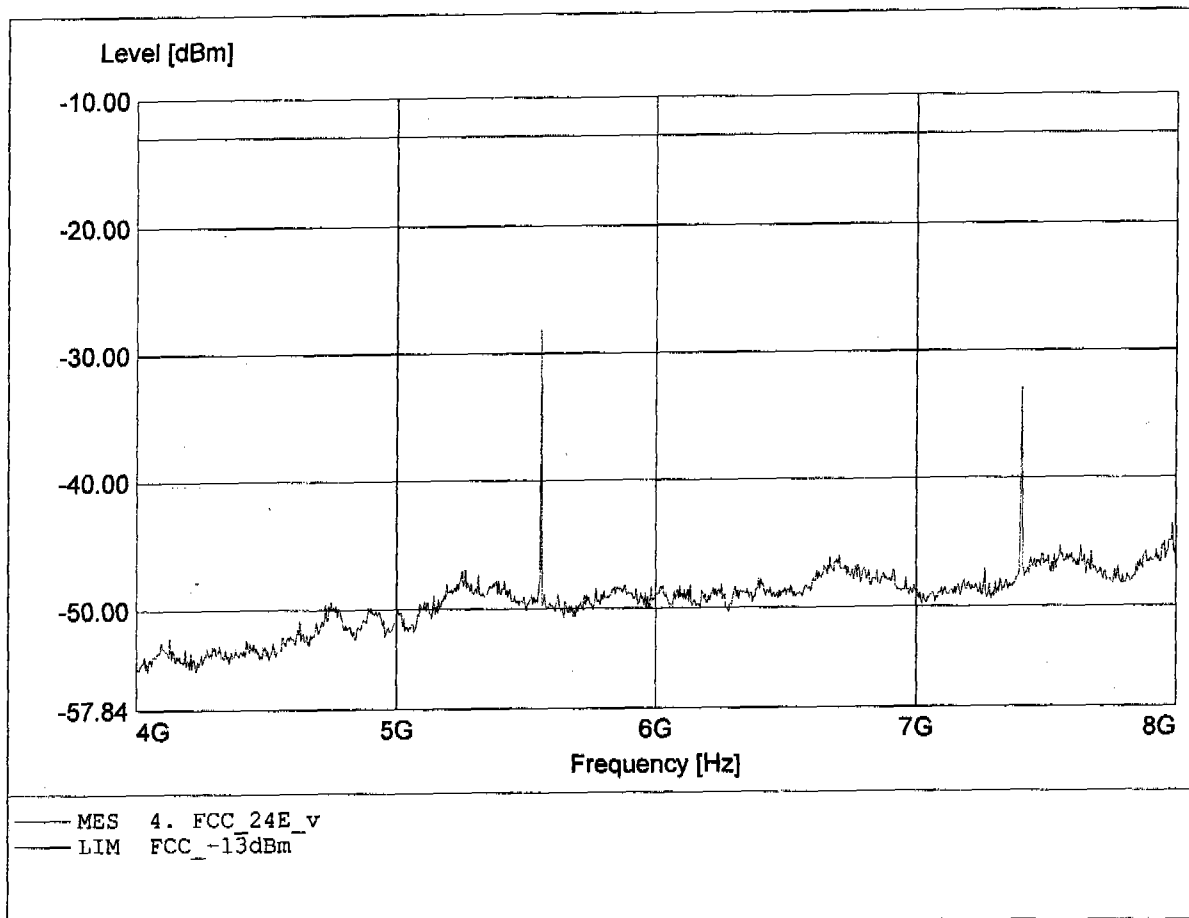


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.556GHz, Pmax: -24.30dBm, RBW: 1MHz

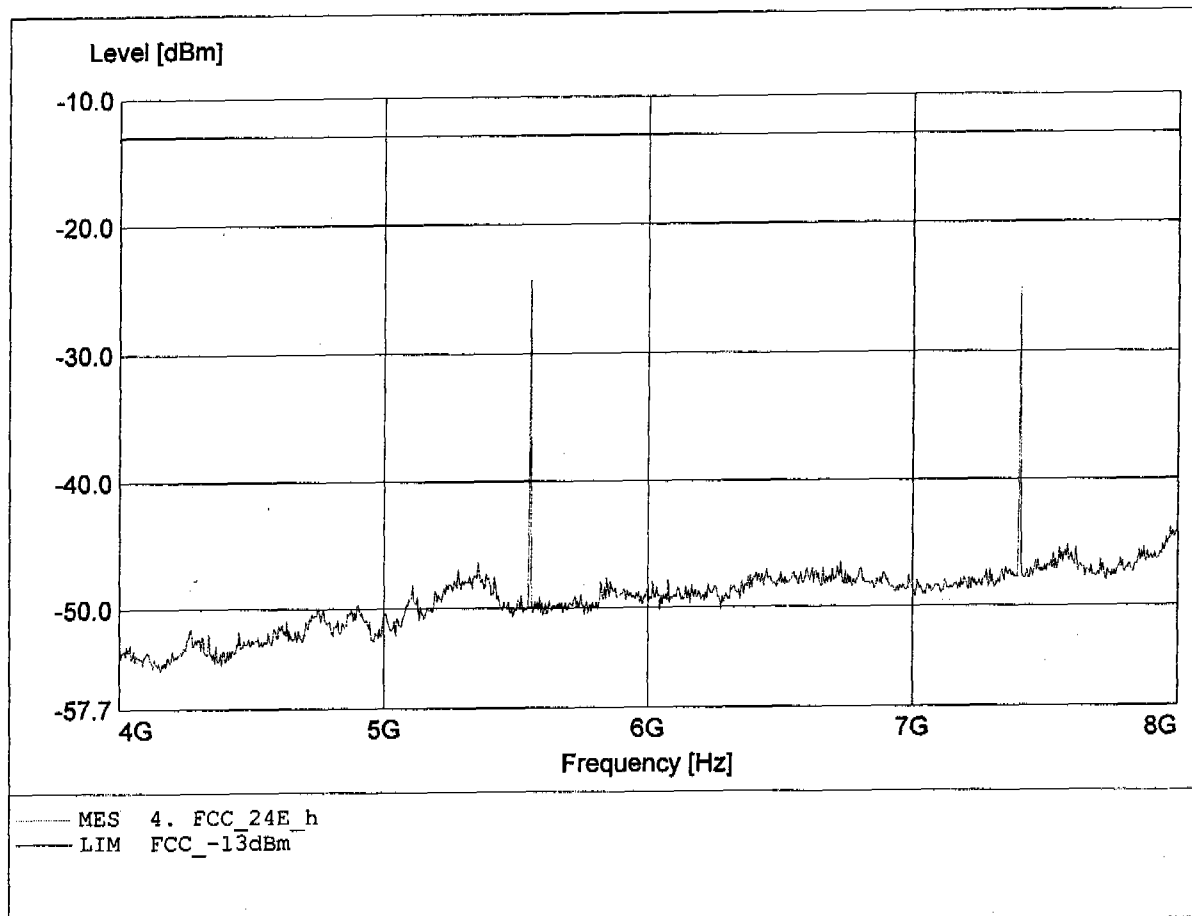


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.253GHz, Pmax: -40.98dBm, RBW: 1MHz

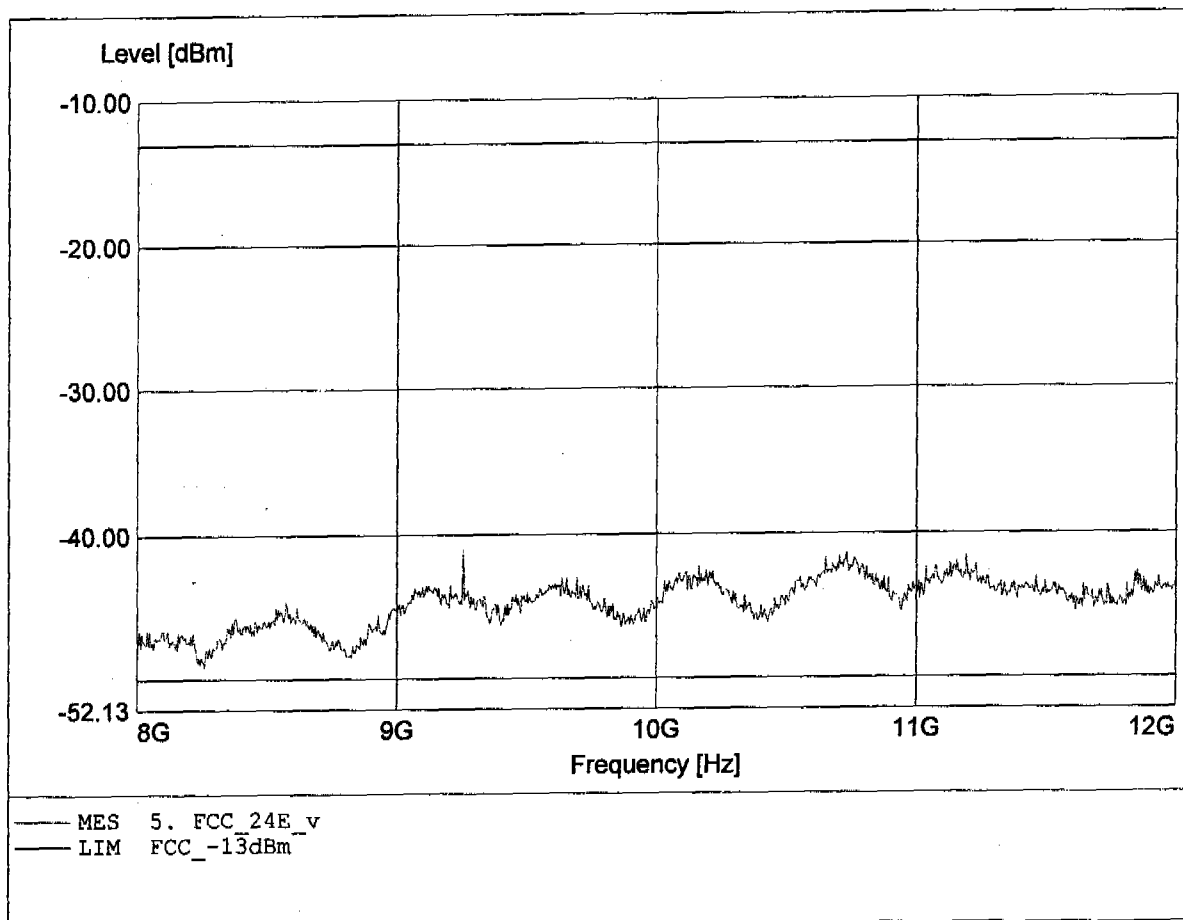


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.253GHz, Pmax: -40.28dBm, RBW: 1MHz

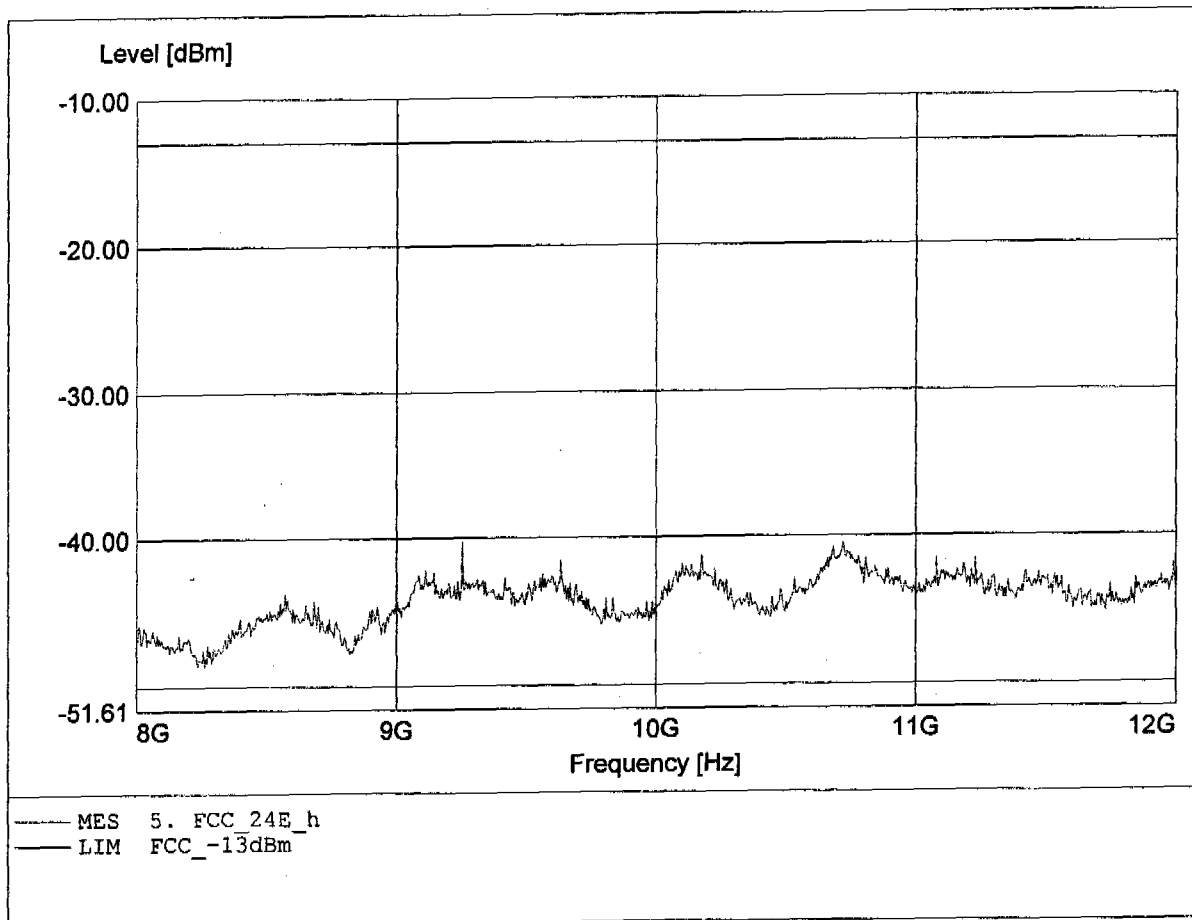


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.653GHz, Pmax: -31.56dBm, RBW: 1MHz

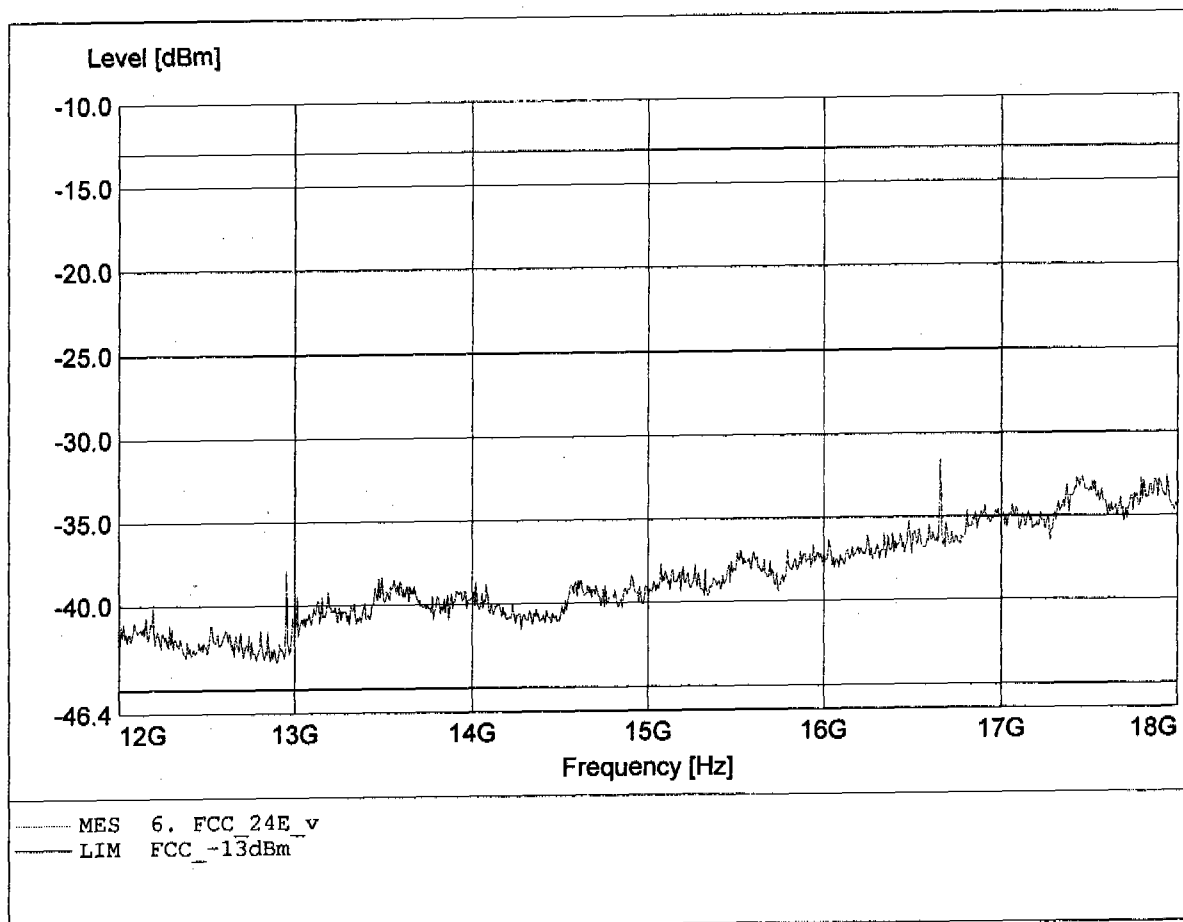


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.473GHz, Pmax: -31.72dBm, RBW: 1MHz

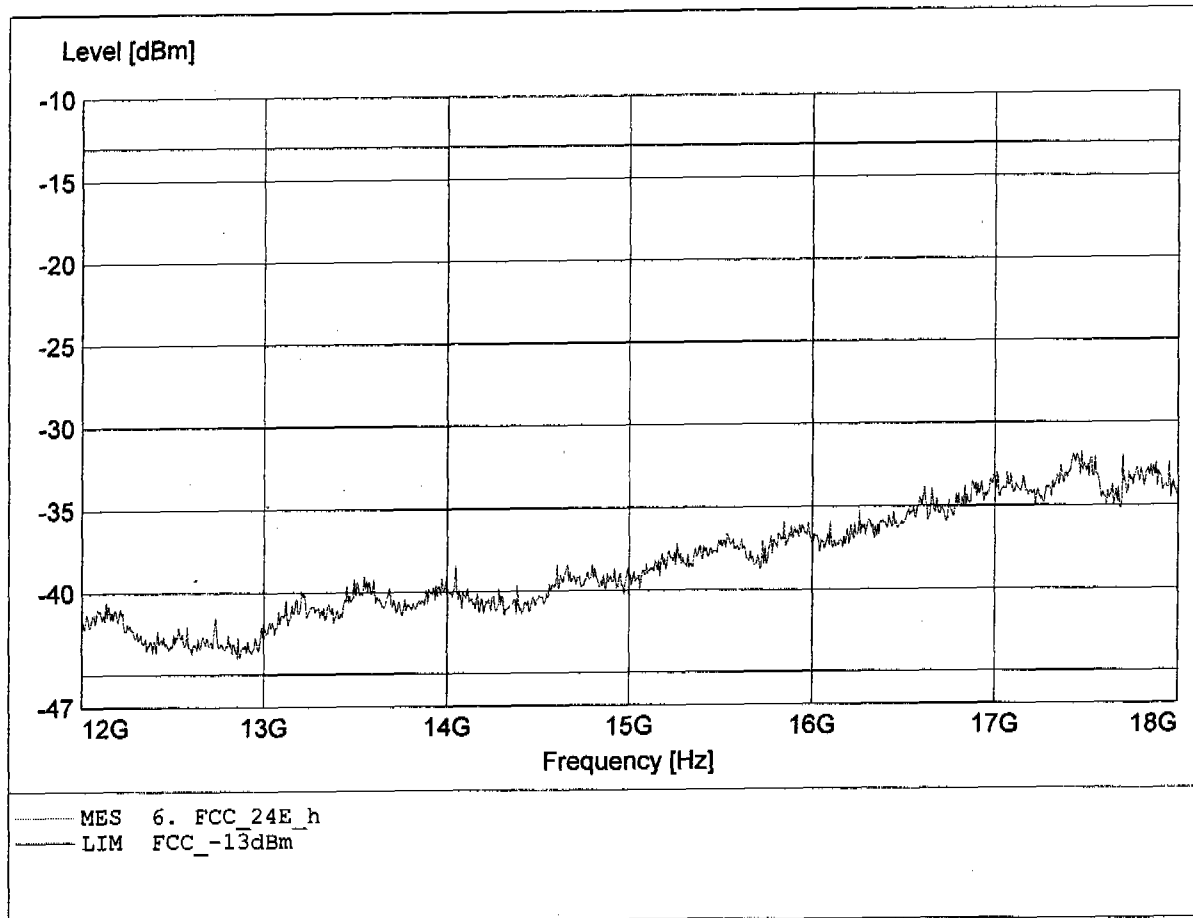


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.406GHz, Pmax: -25.49dBm, RBW: 1MHz

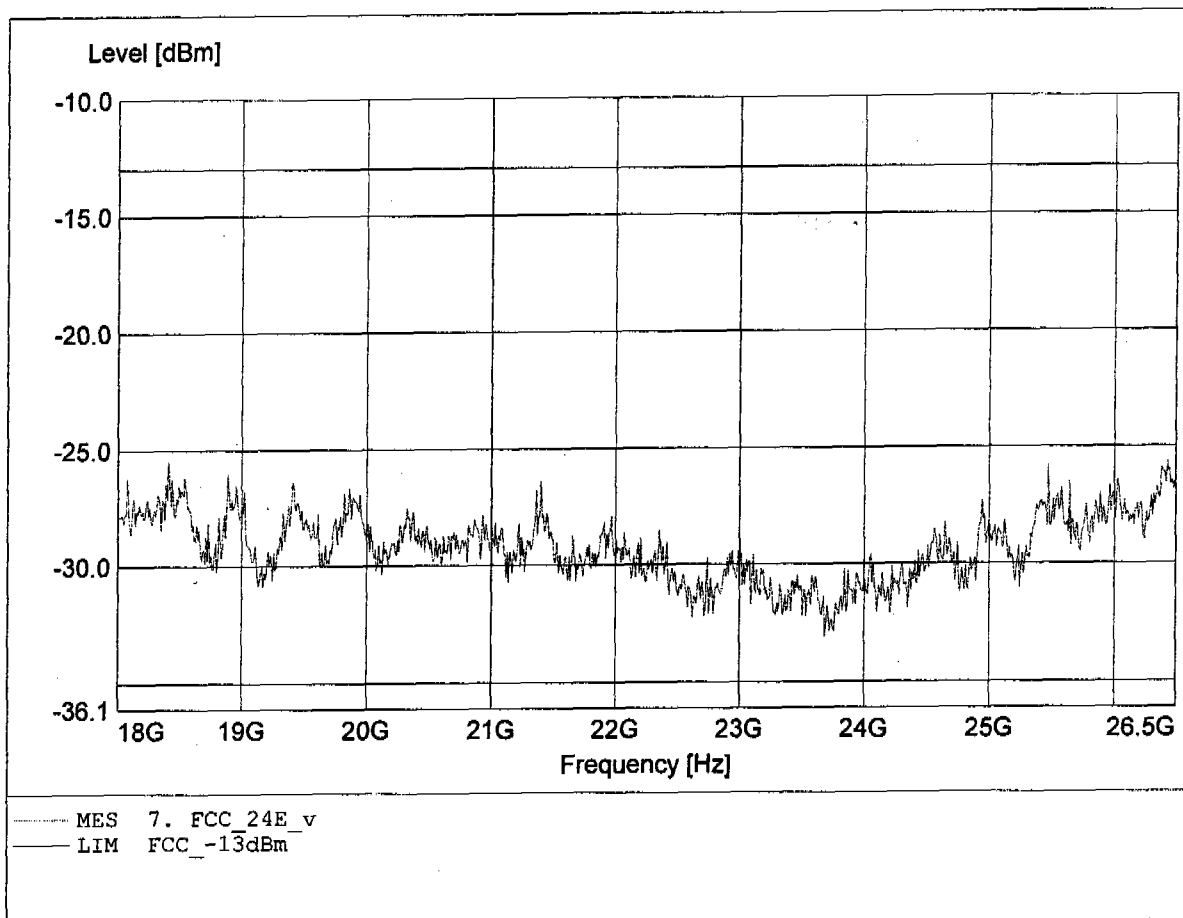


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 512
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.424GHz, Pmax: -24.48dBm, RBW: 1MHz

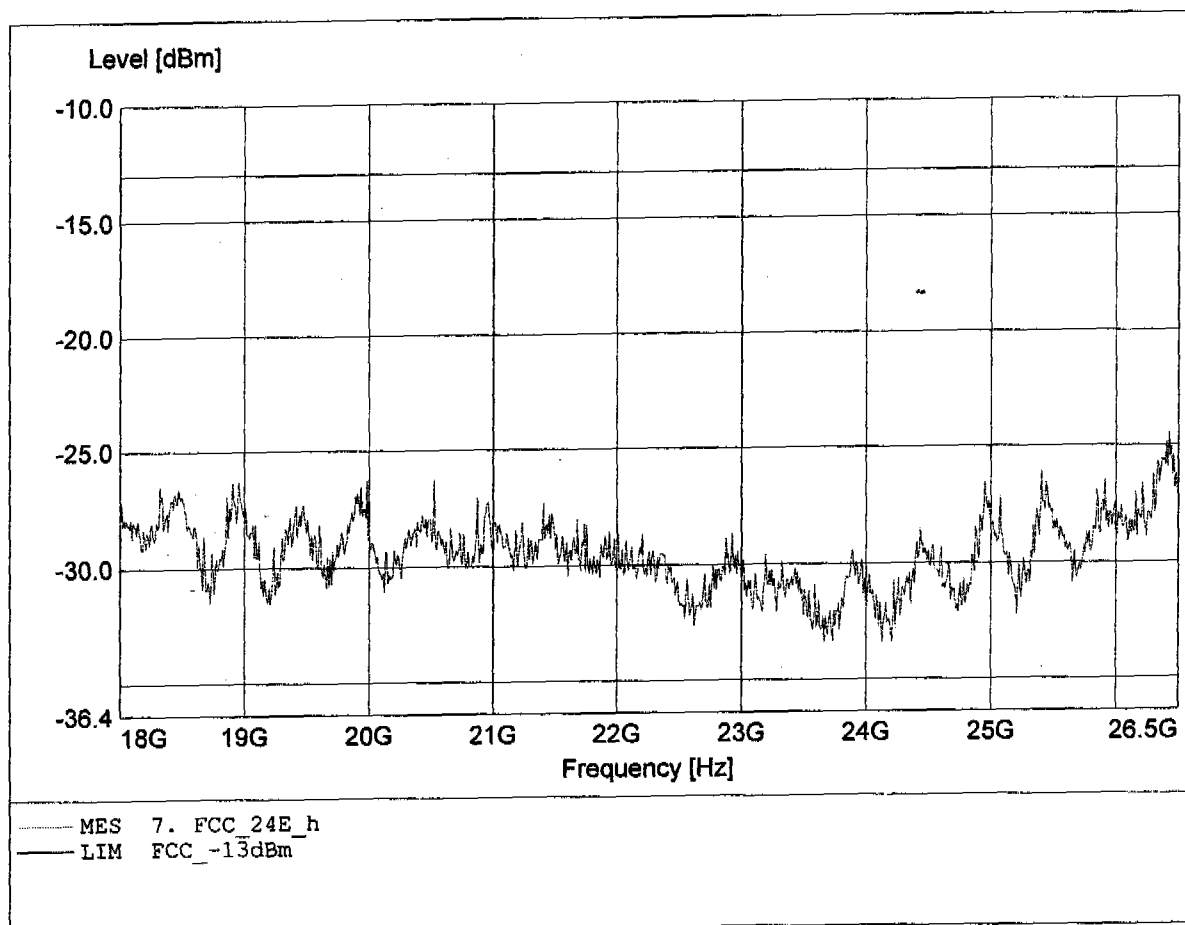


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.244MHz, Pmax: -52.57dBm, RBW: 1MHz

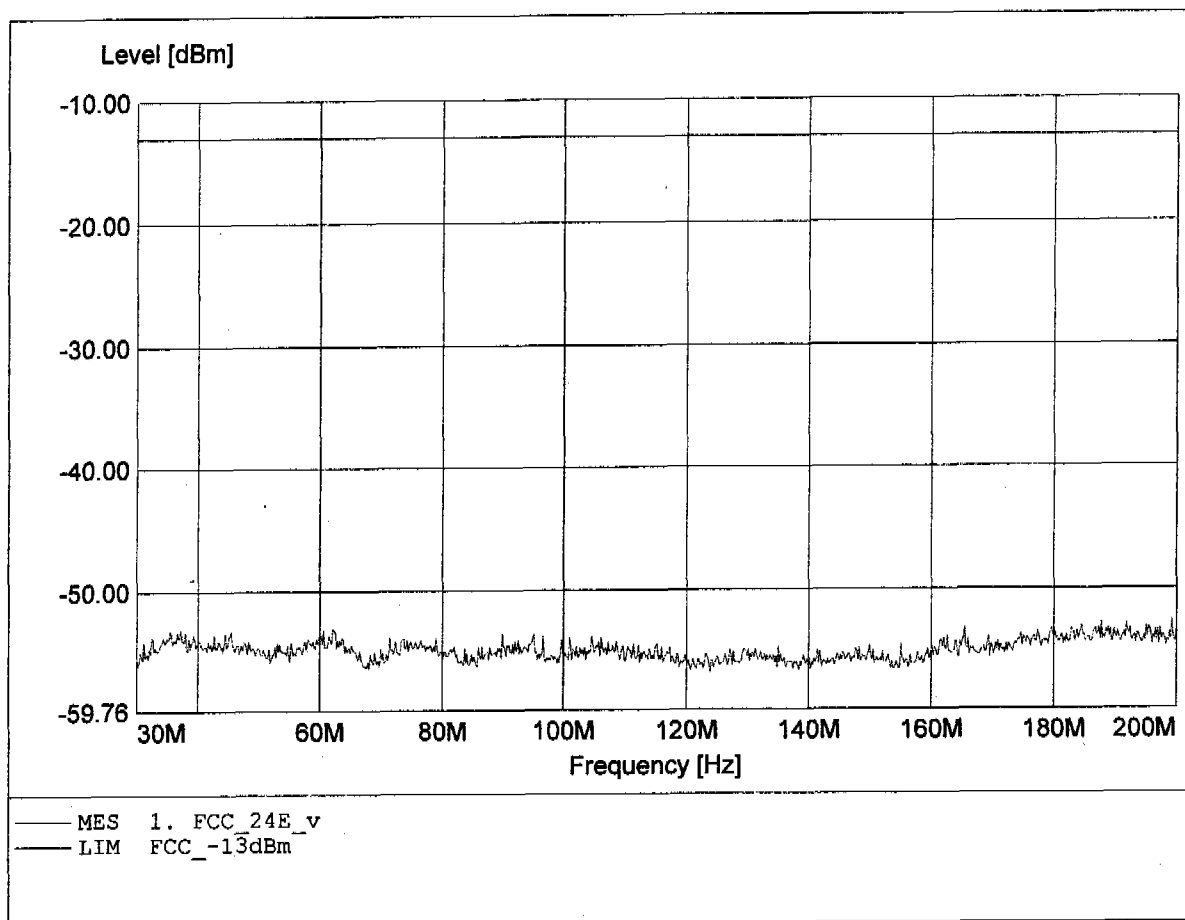


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 46.056MHz, Pmax: -51.40dBm, RBW: 1MHz

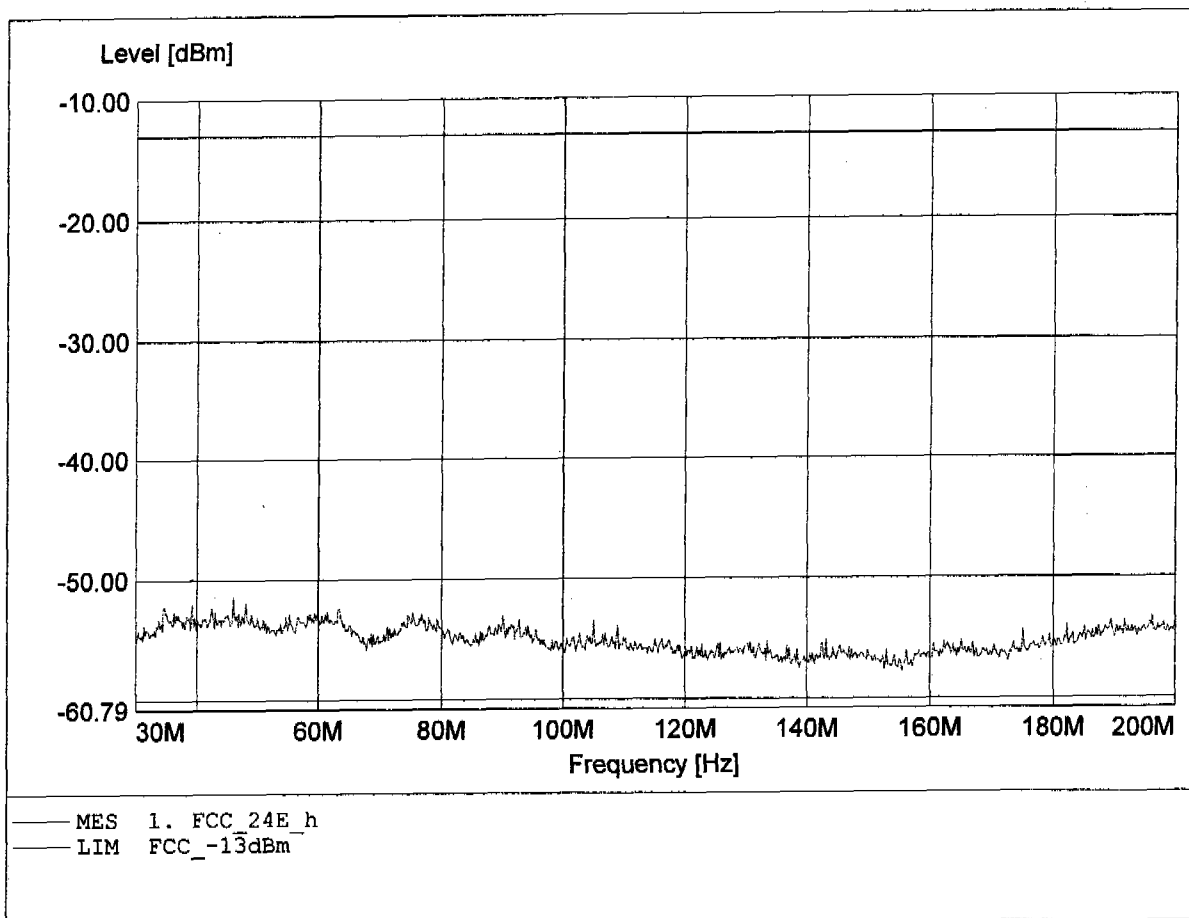


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 984.000MHz, Pmax: -39.25dBm, RBW: 1MHz

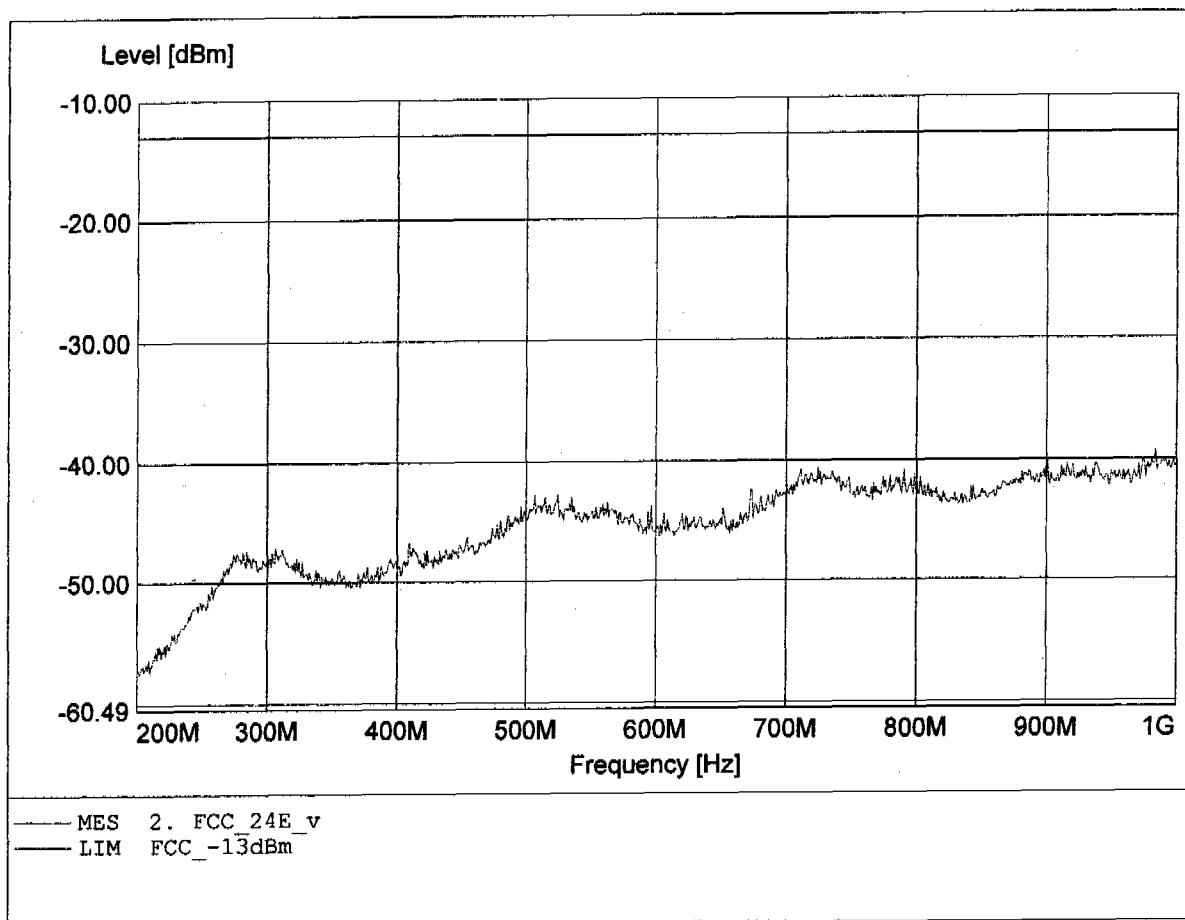


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 868.444MHz, Pmax: -73.67dBm, RBW: 1MHz

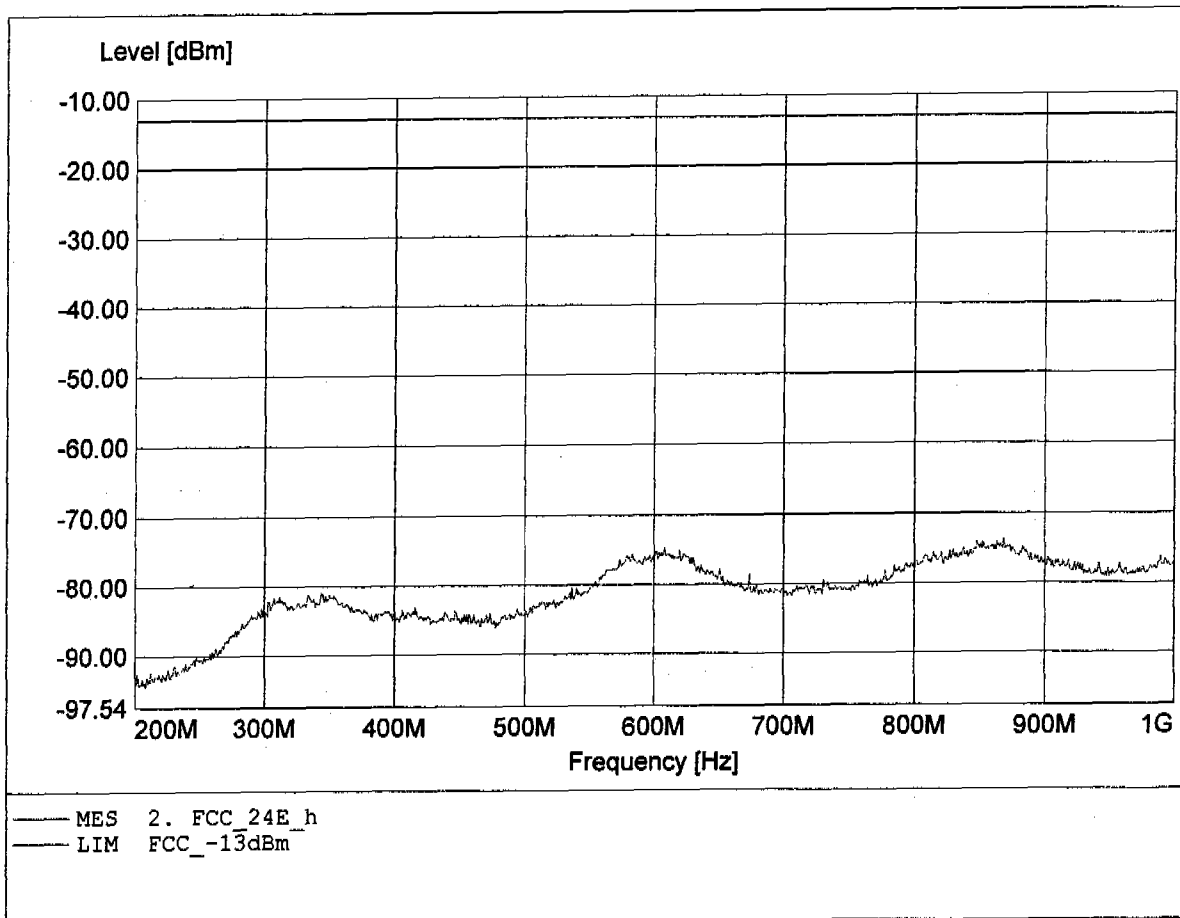


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.761GHz, Pmax: -21.64dBm, RBW: 1MHz/3kHz

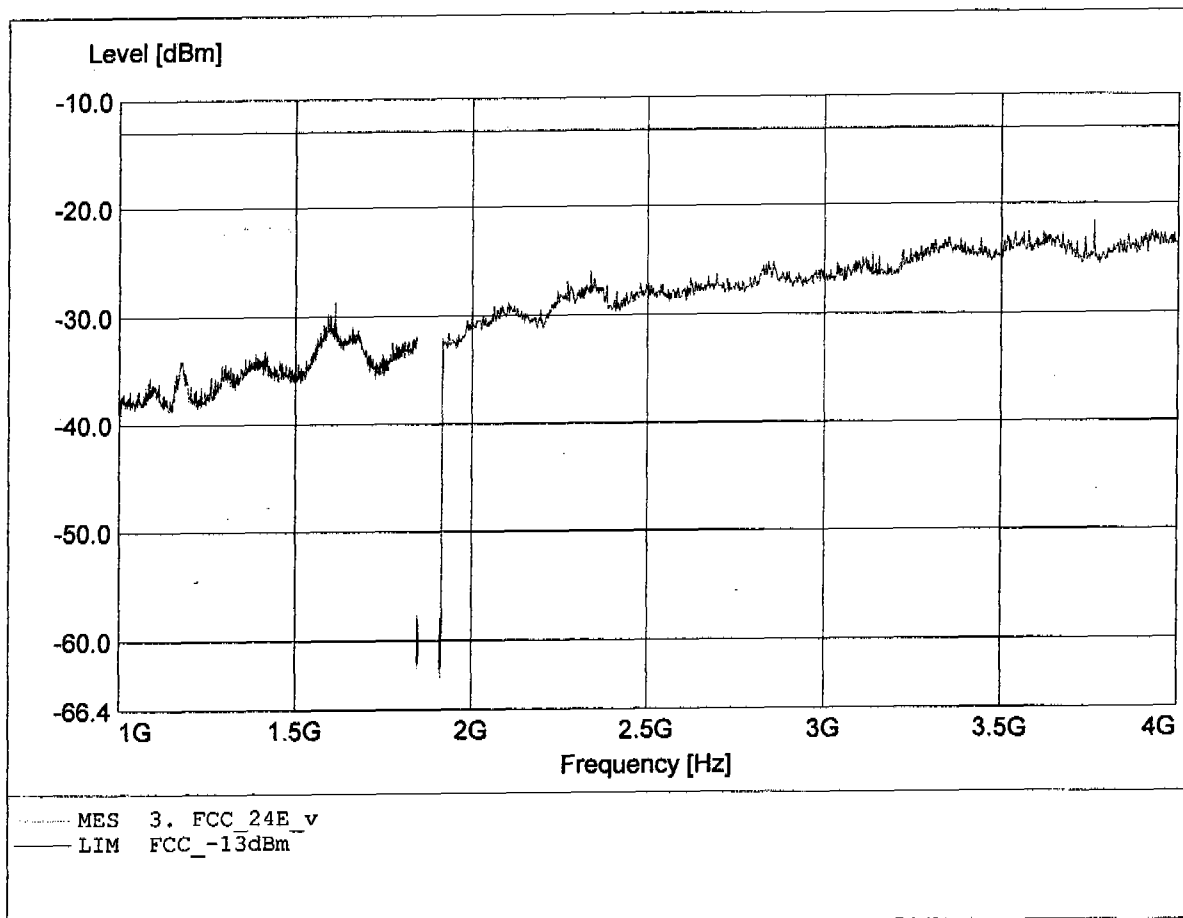


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.984GHz, Pmax: -21.88dBm, RBW: 1MHz/3kHz

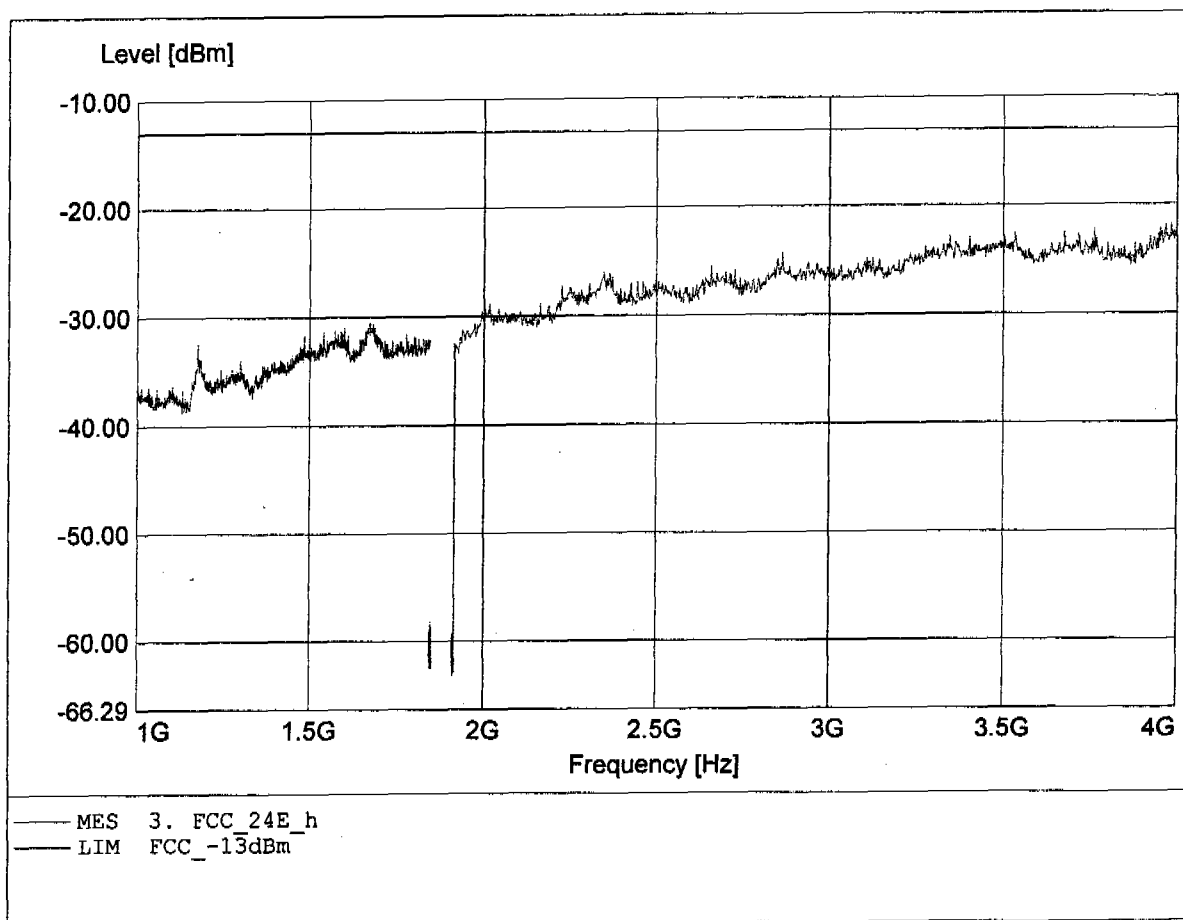


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.644GHz, Pmax: -27.99dBm, RBW: 1MHz

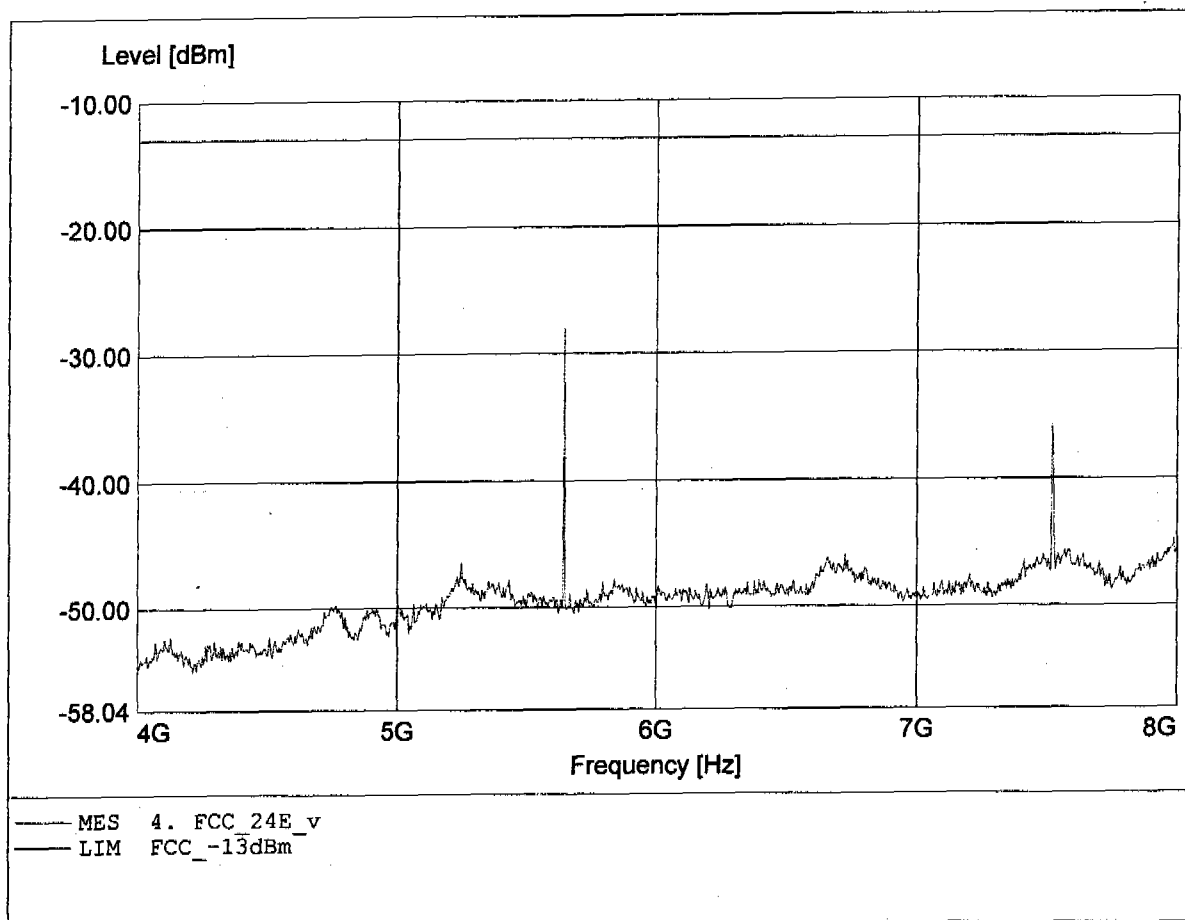


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.644GHz, Pmax: -24.53dBm, RBW: 1MHz

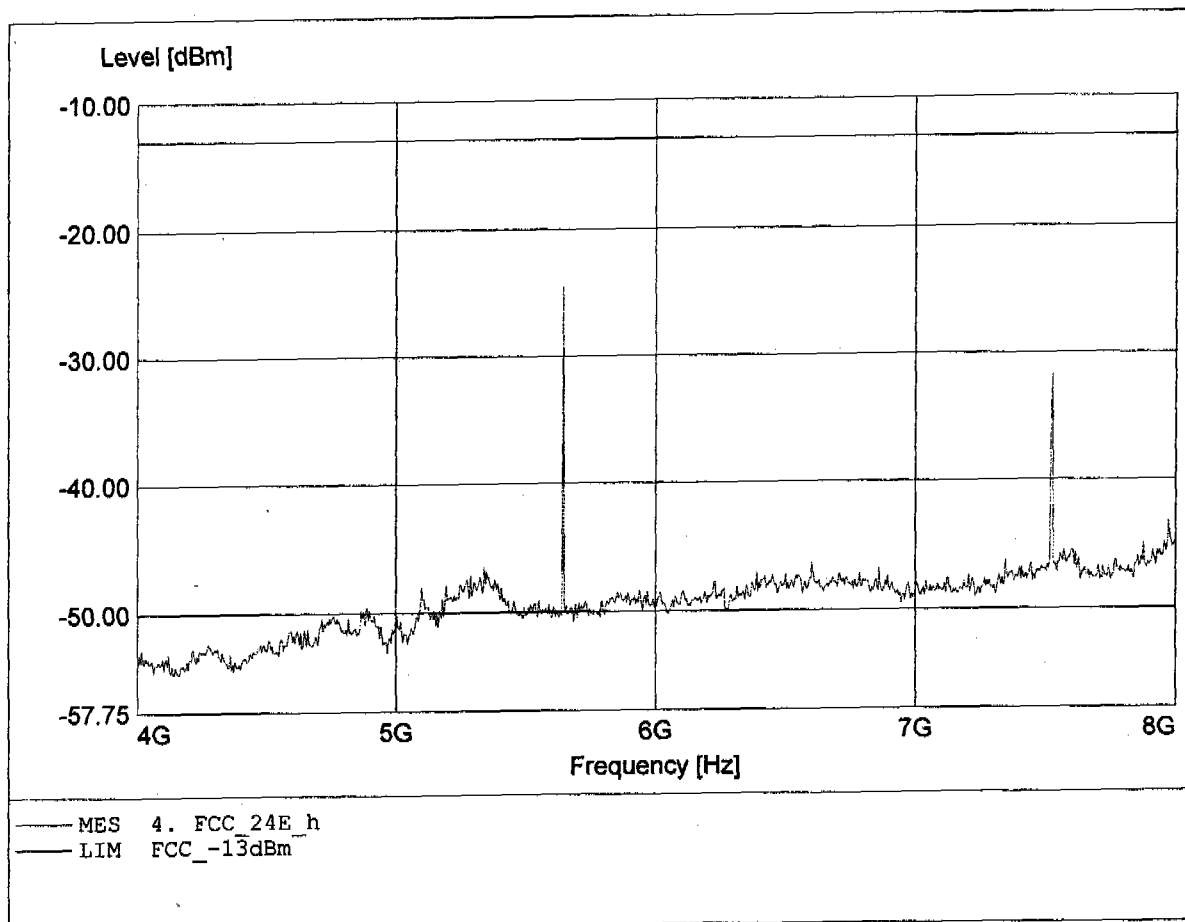


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.404GHz, Pmax: -40.44dBm, RBW: 1MHz

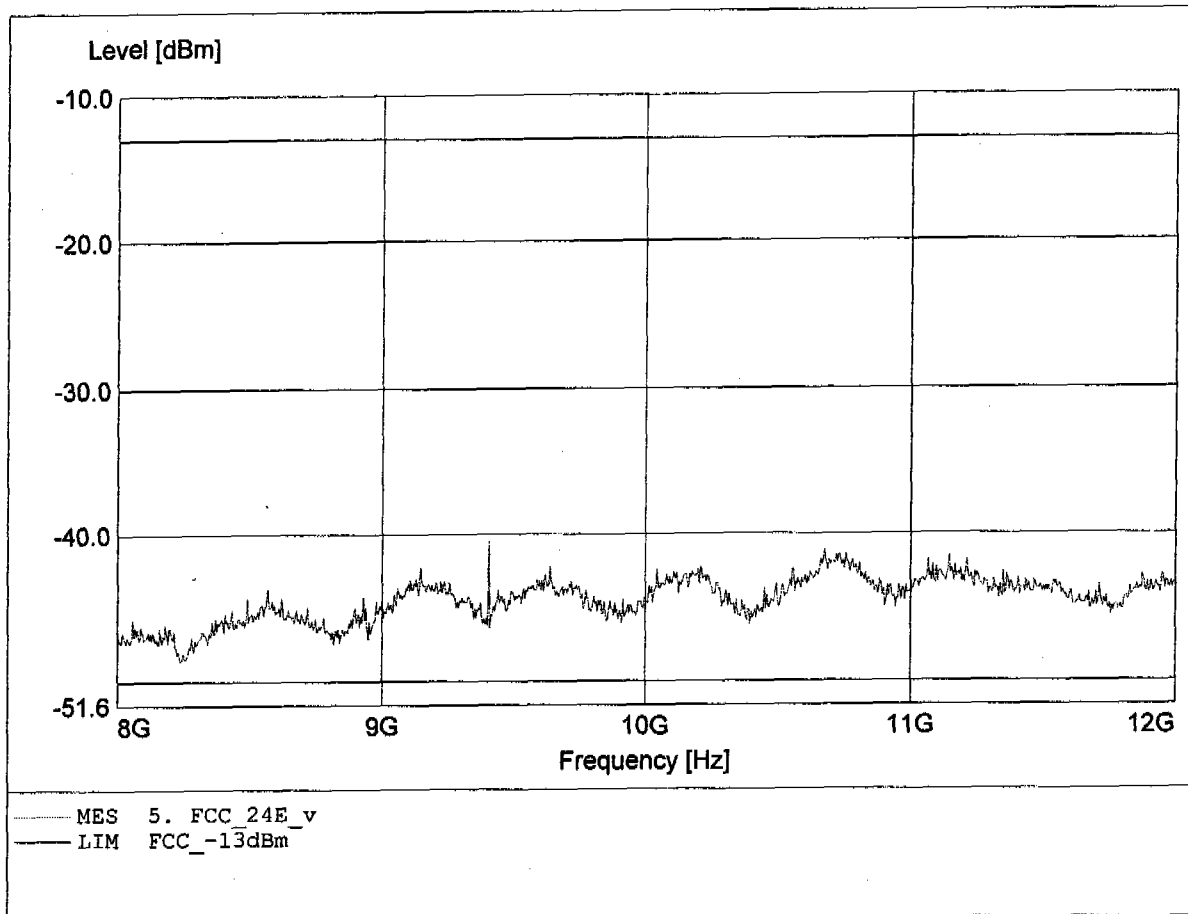


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.751GHz, Pmax: -40.56dBm, RBW: 1MHz

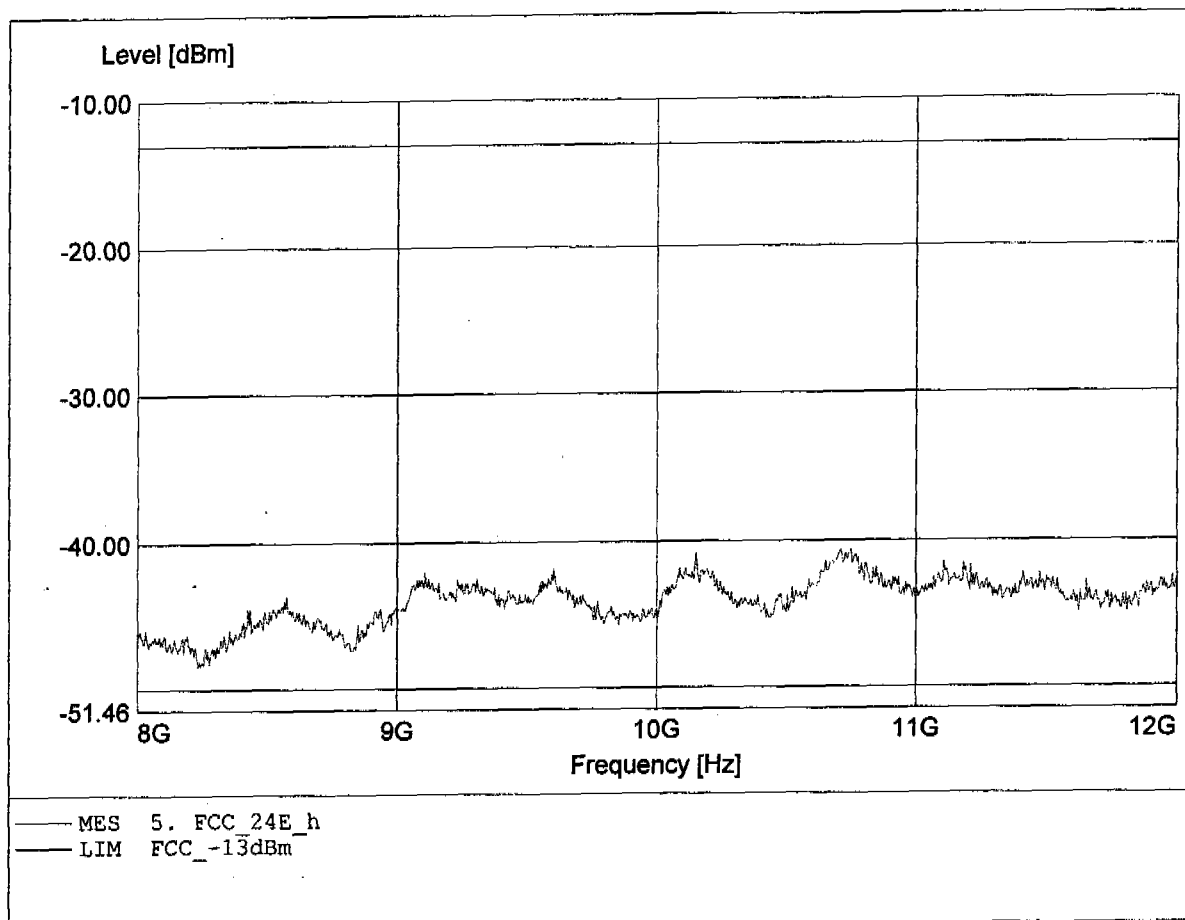


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.420GHz, Pmax: -31.80dBm, RBW: 1MHz

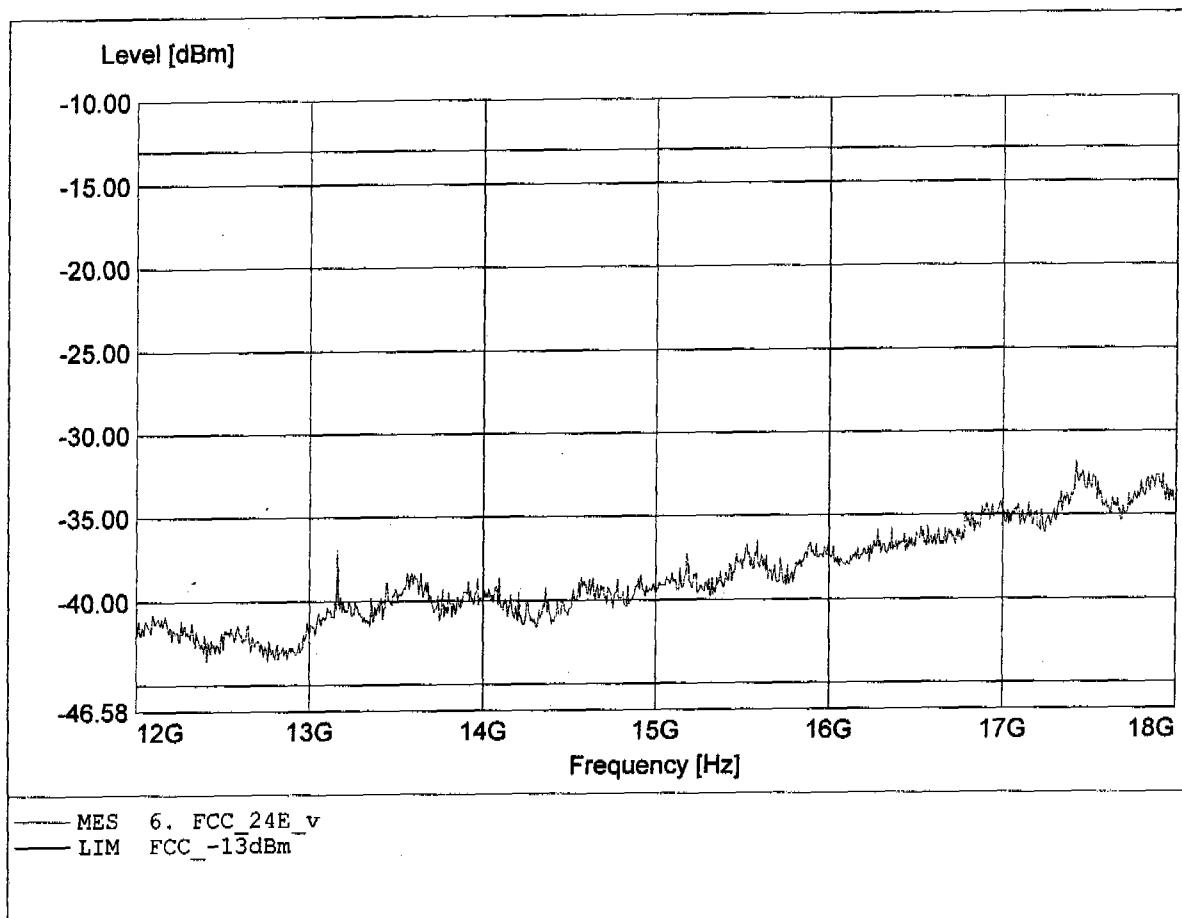


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.407GHz, Pmax: -31.62dBm, RBW: 1MHz

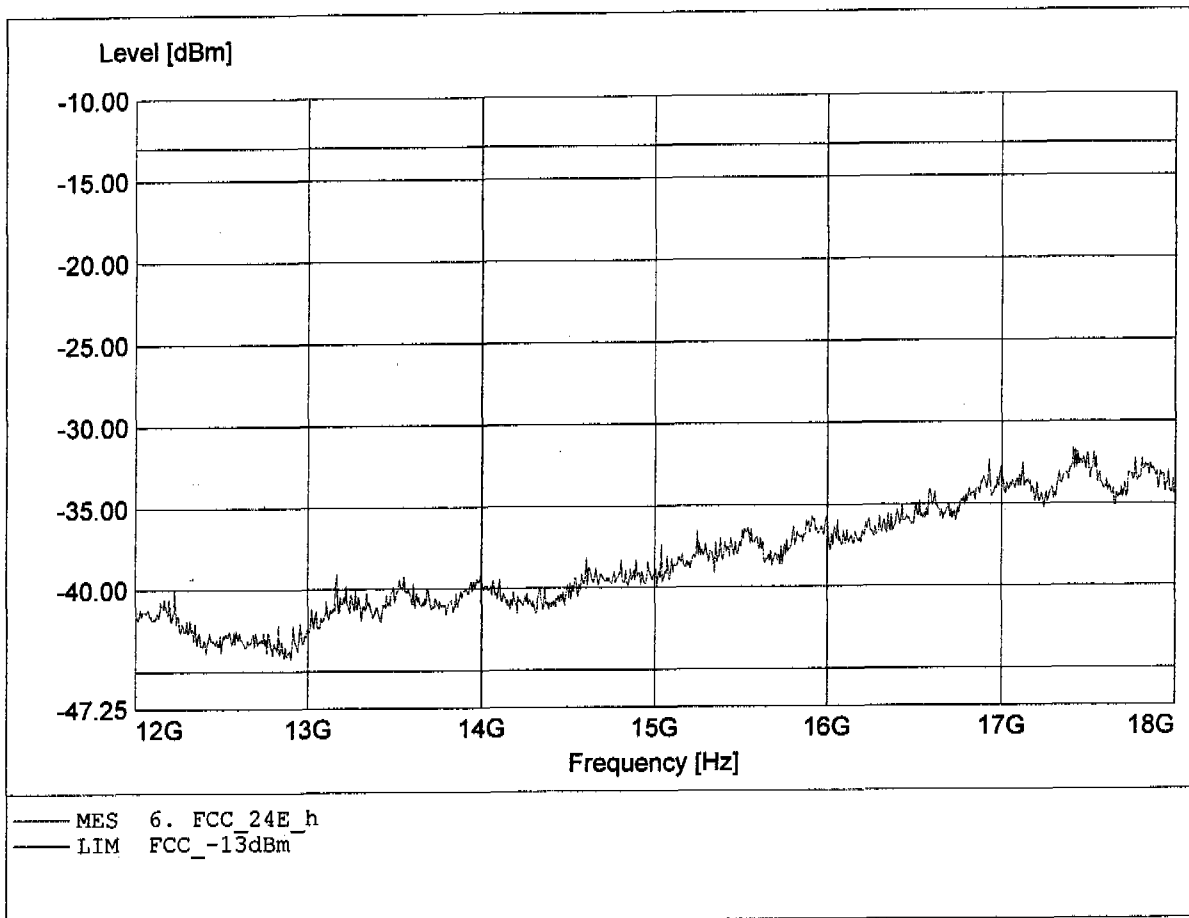


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.443GHz, Pmax: -25.90dBm, RBW: 1MHz

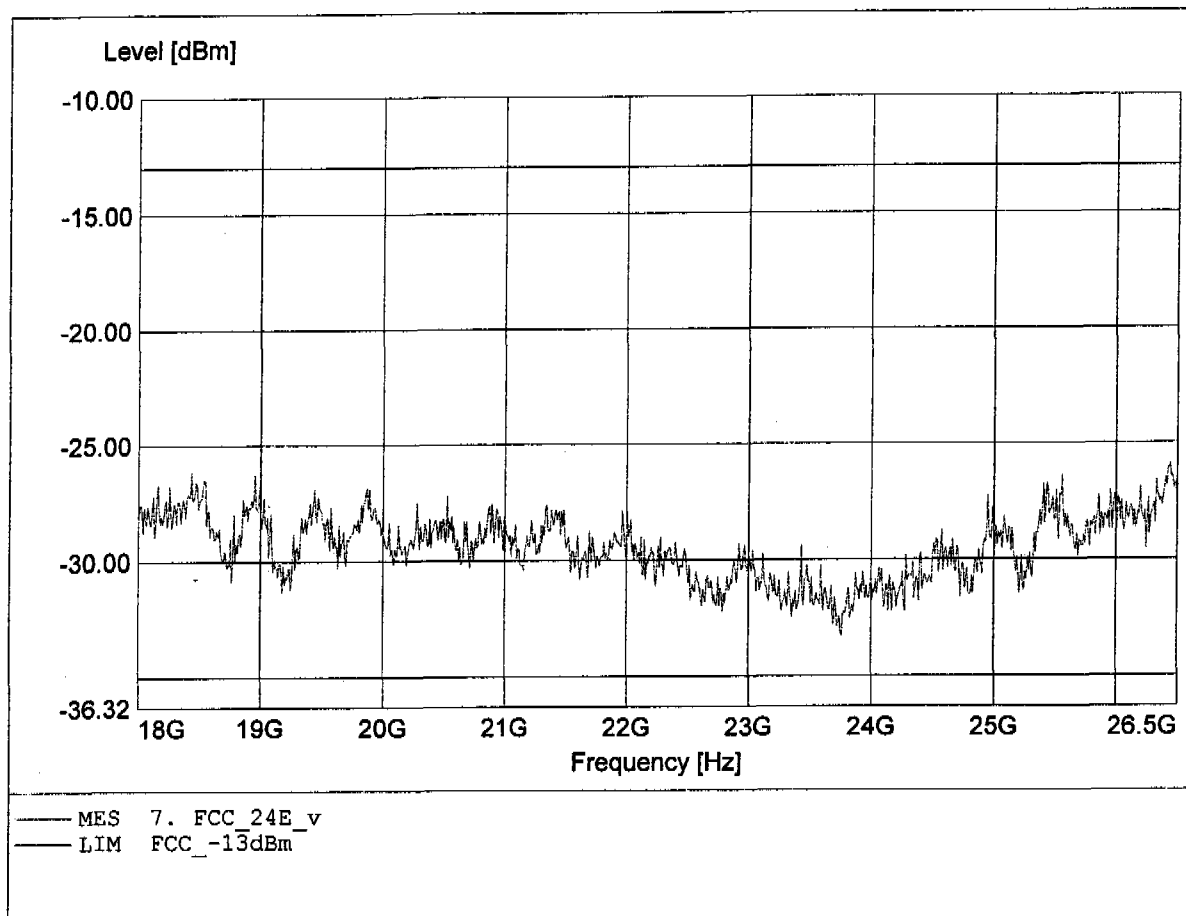


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 661
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.434GHz, Pmax: -24.53dBm, RBW: 1MHz

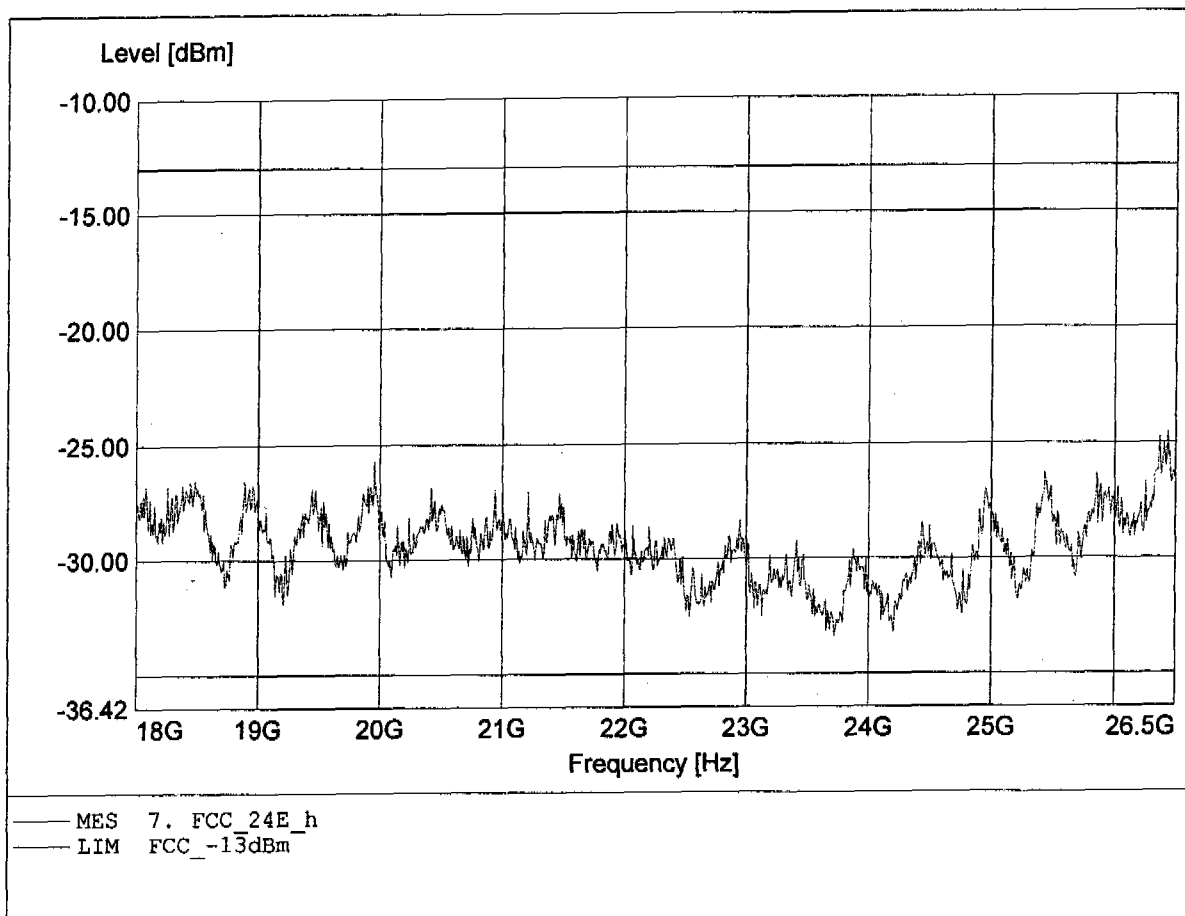


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 34.911MHz, Pmax: -52.51dBm, RBW: 1MHz

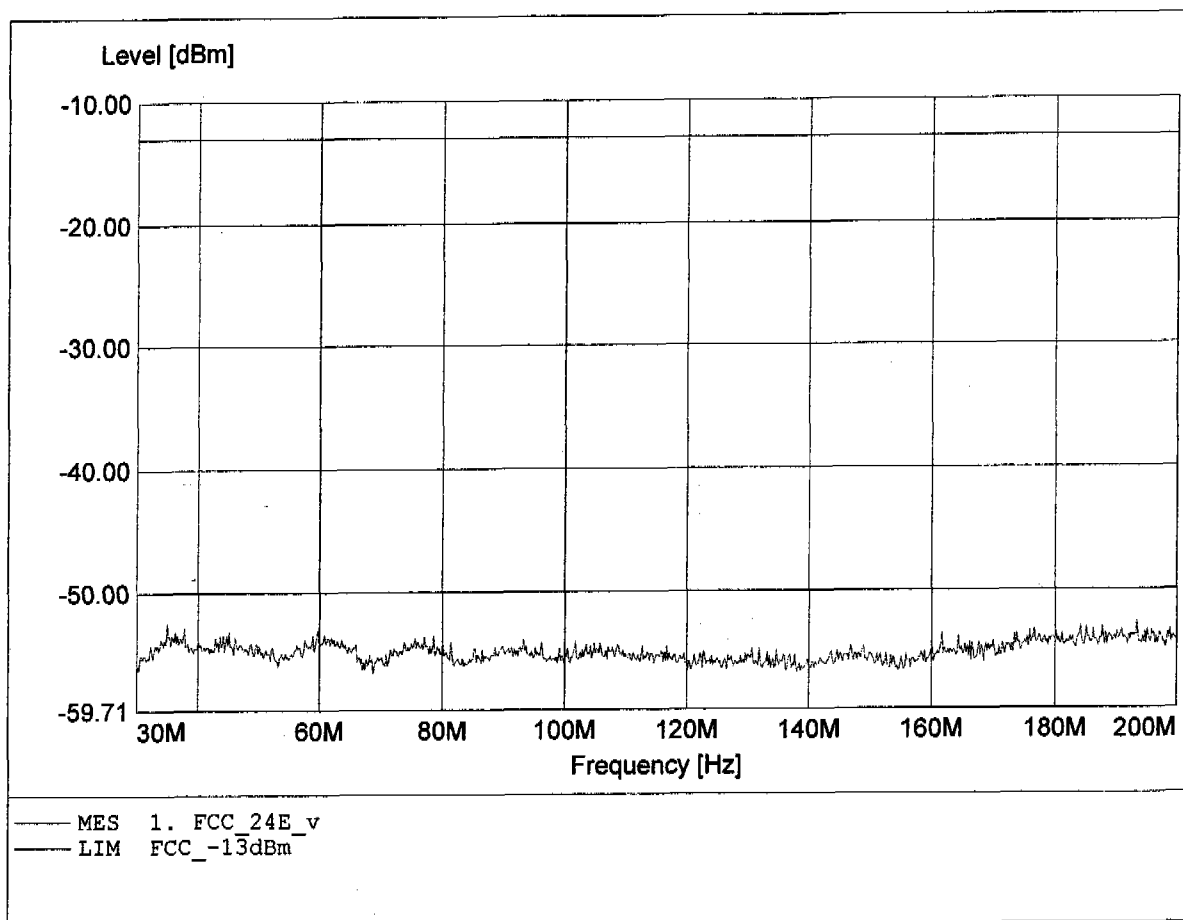


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 41.711MHz, Pmax: -51.71dBm, RBW: 1MHz

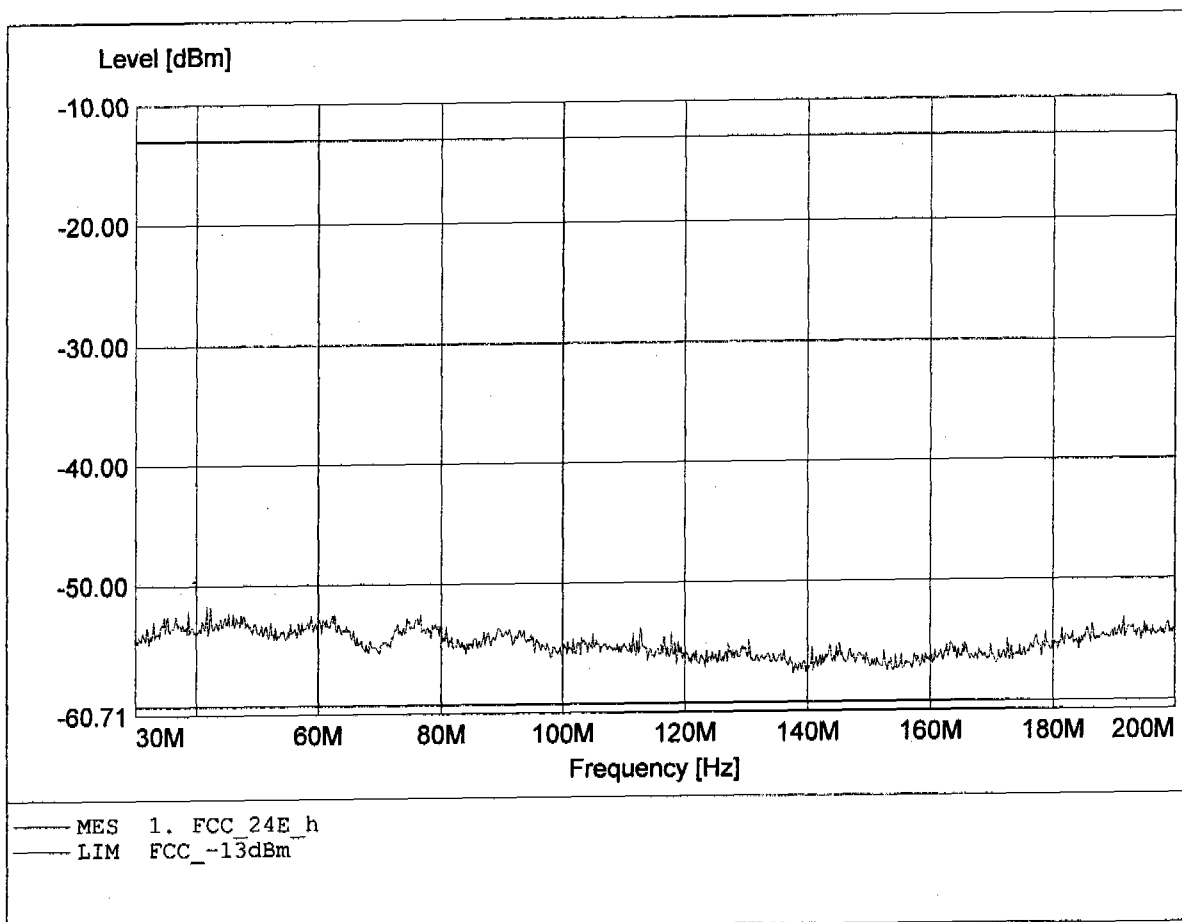


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 984.000MHz, Pmax: -39.41dBm, RBW: 1MHz

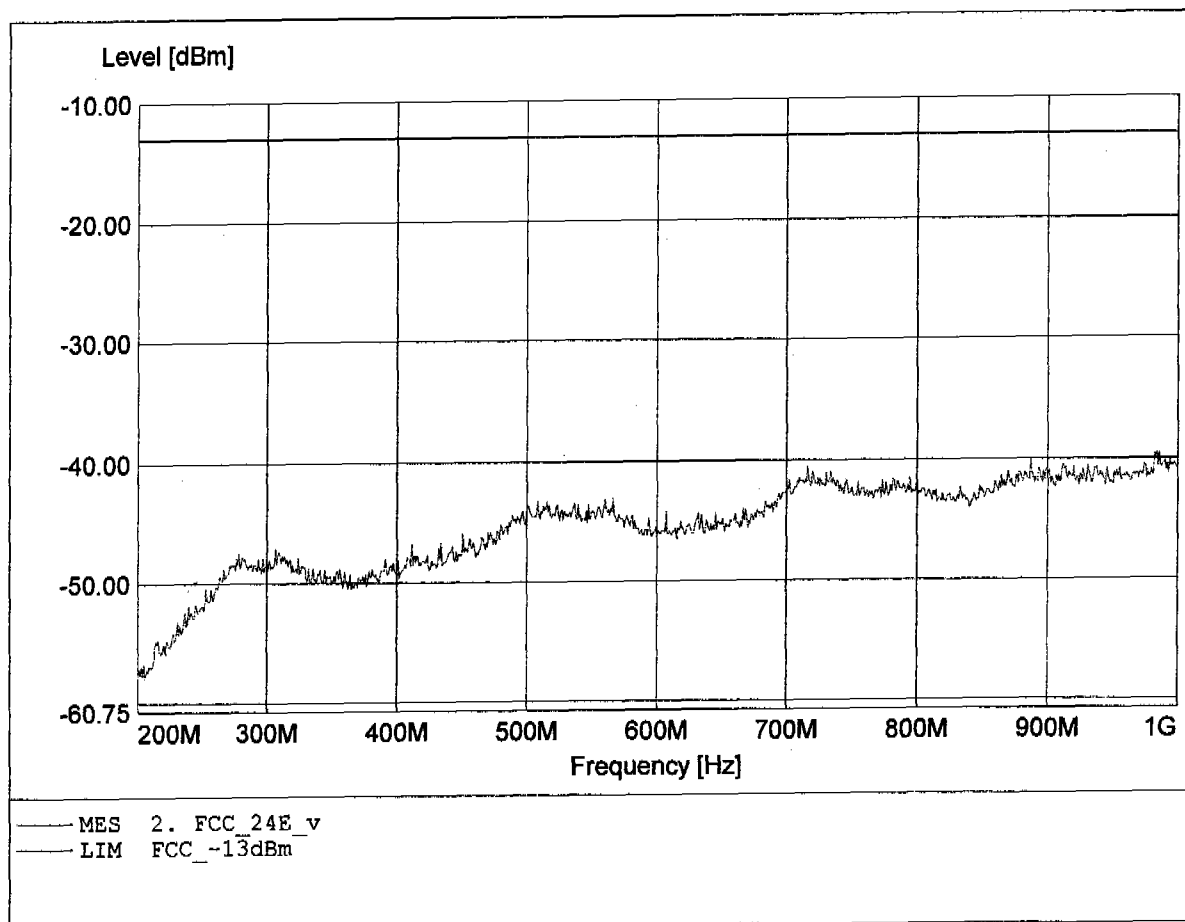


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 872.000MHz, Pmax: -74.05dBm, RBW: 1MHz

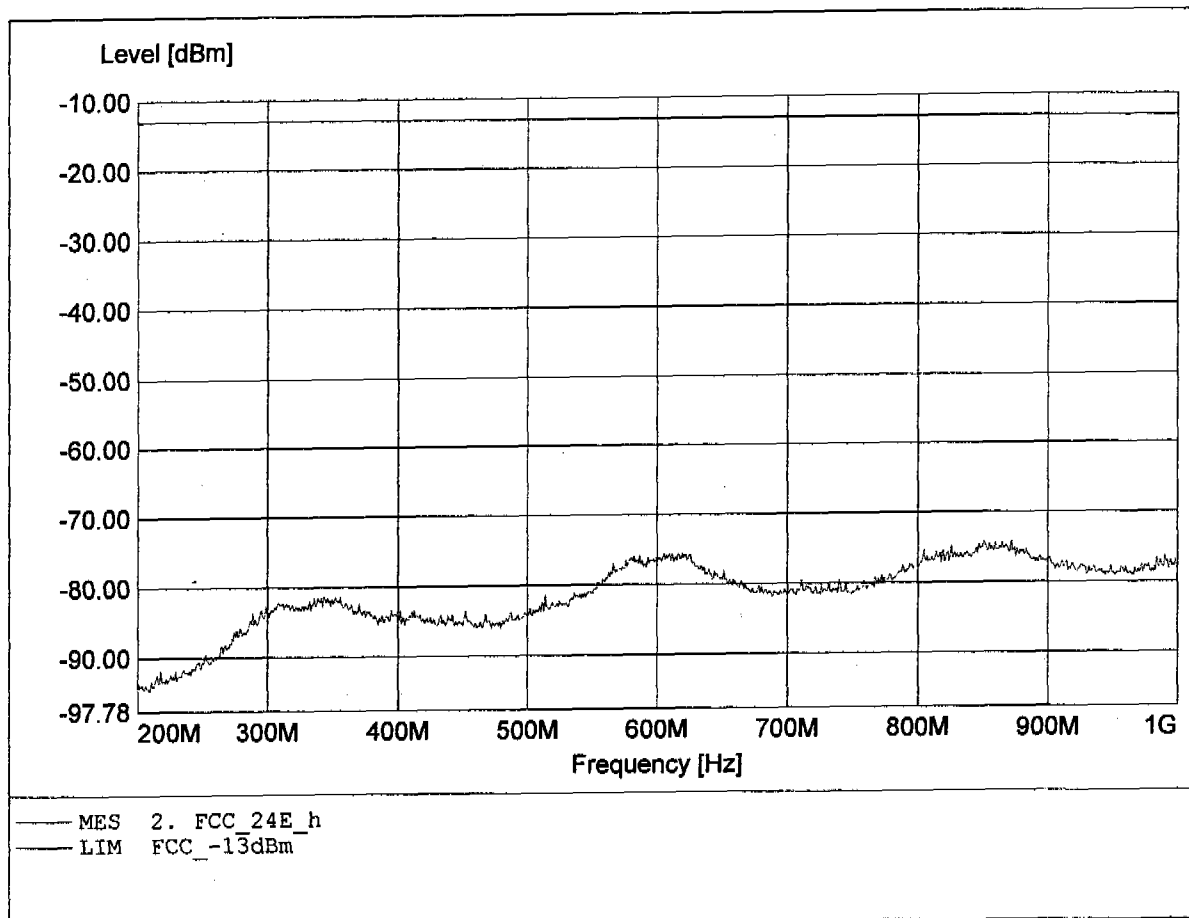


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.910GHz, Pmax: -17.02dBm, RBW: 1MHz/3kHz

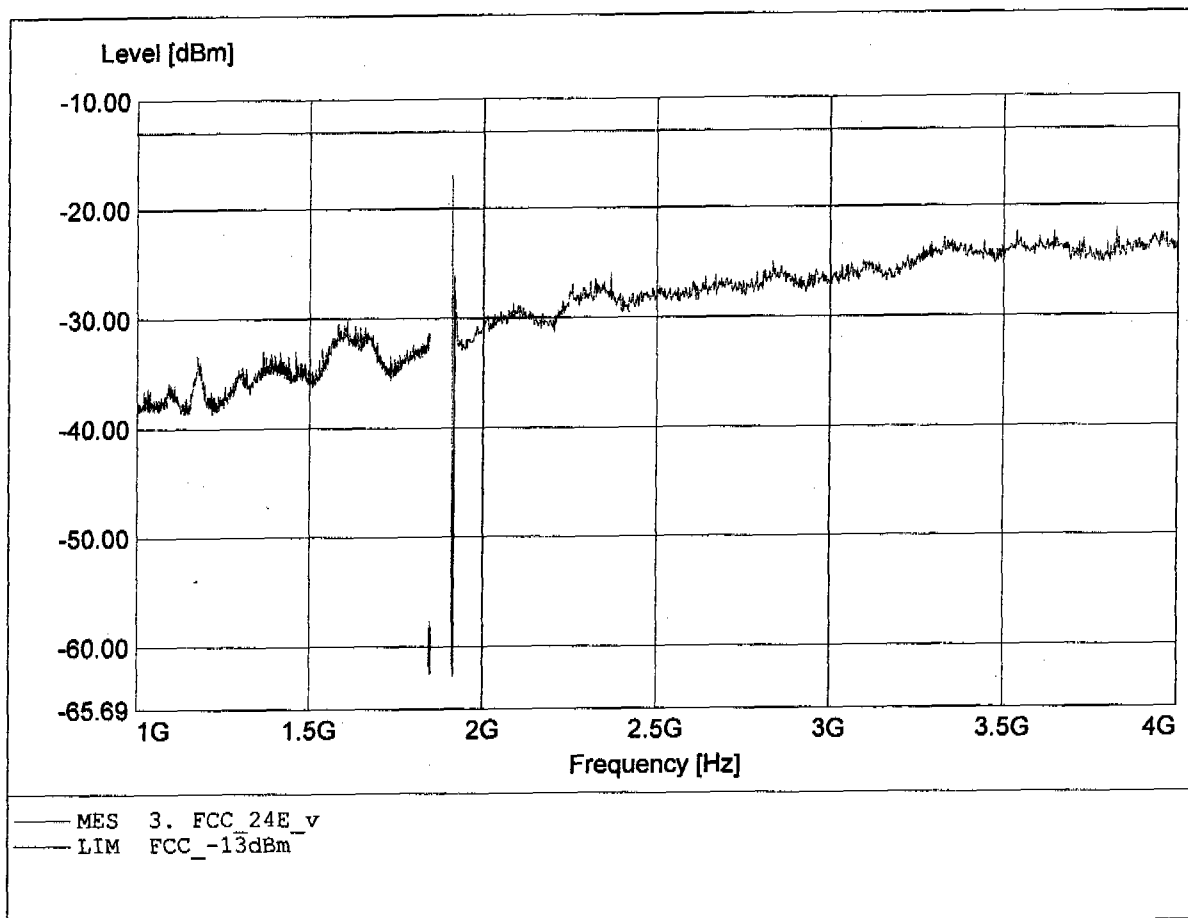


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.722GHz, Pmax: -21.75dBm, RBW: 1MHz/3kHz

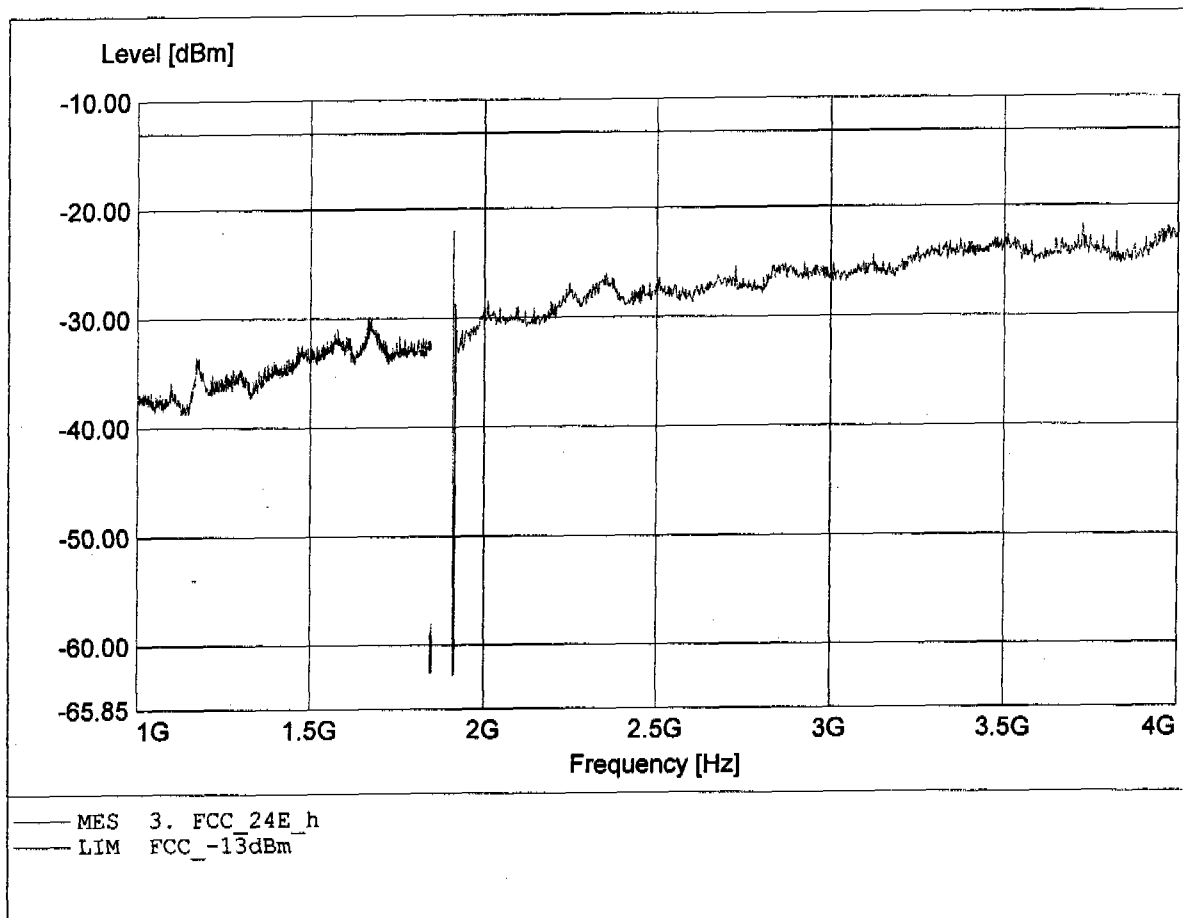


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.733GHz, Pmax: -23.31dBm, RBW: 1MHz

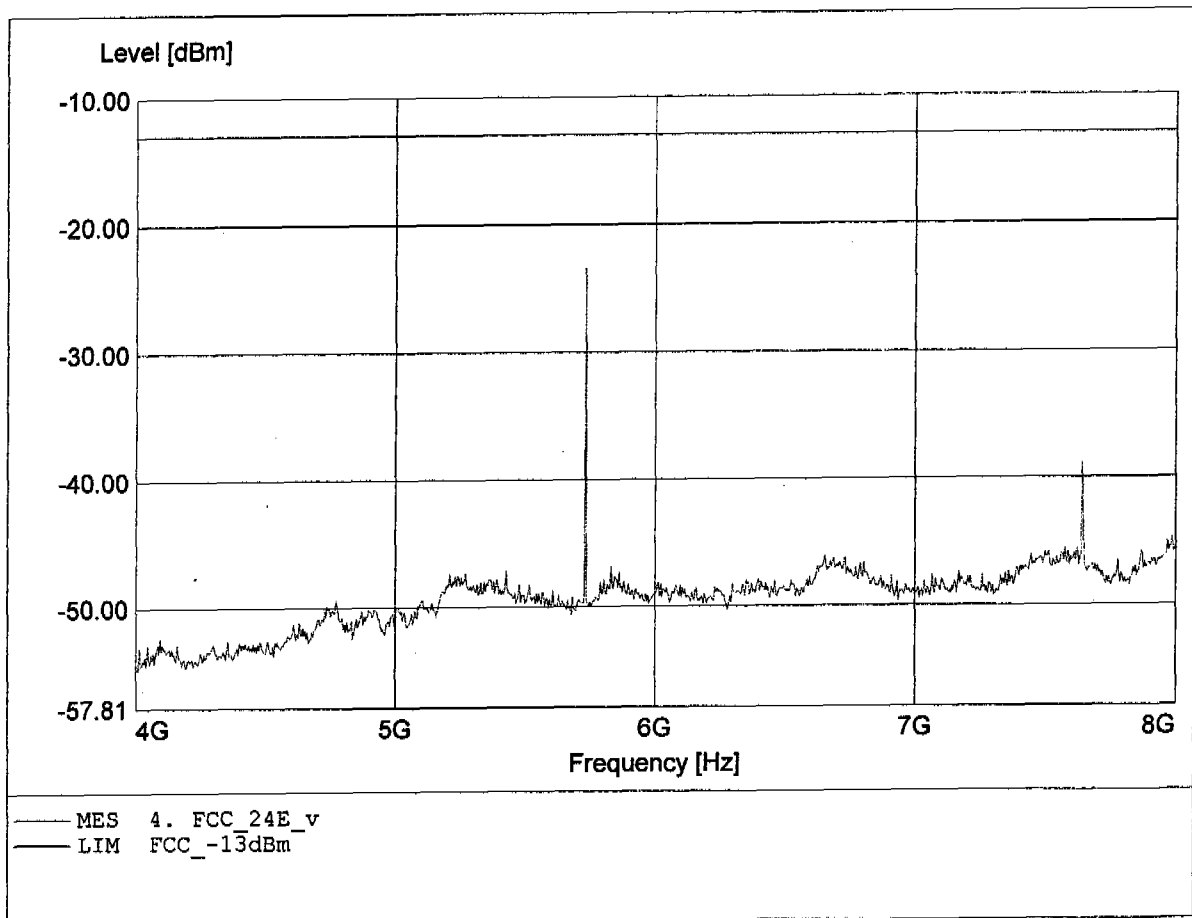


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.729GHz, Pmax: -25.80dBm, RBW: 1MHz

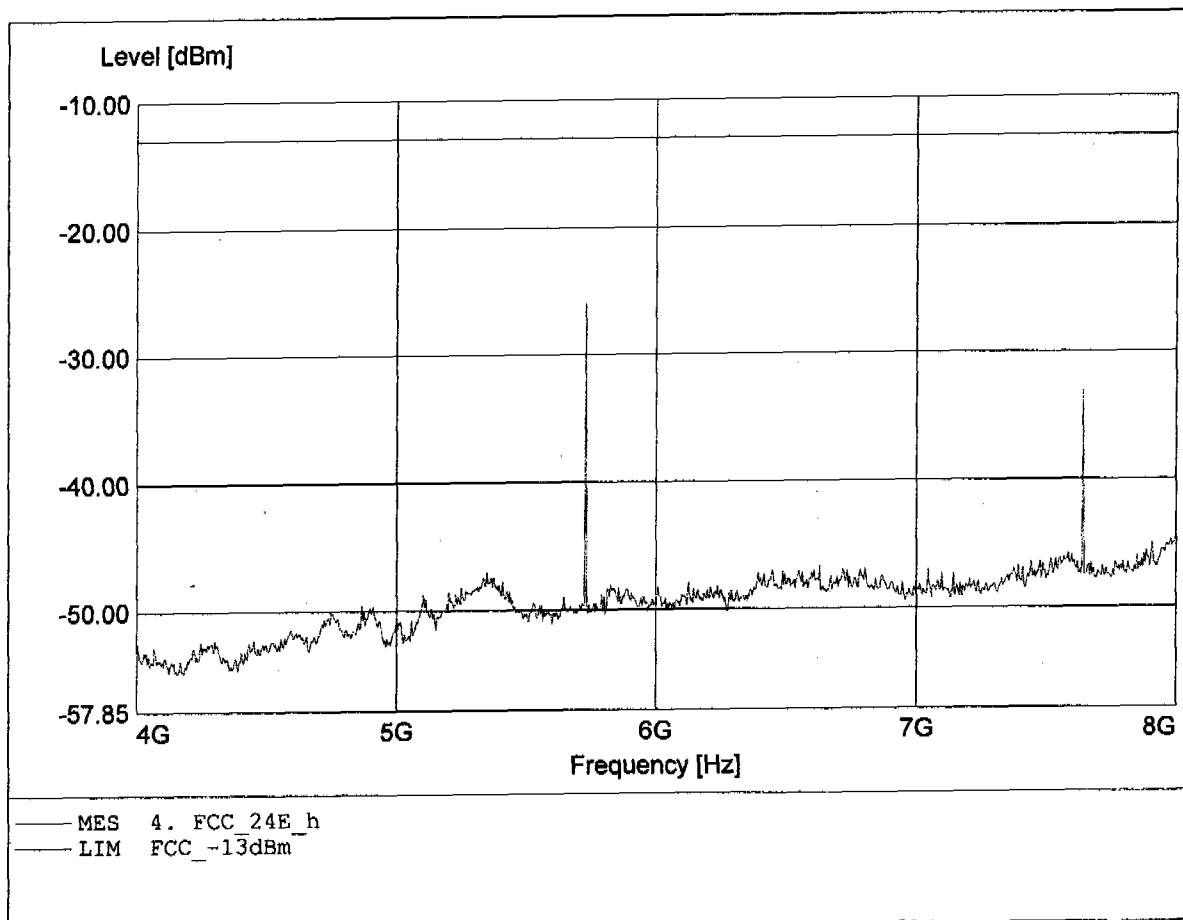


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.729GHz, Pmax: -40.57dBm, RBW: 1MHz

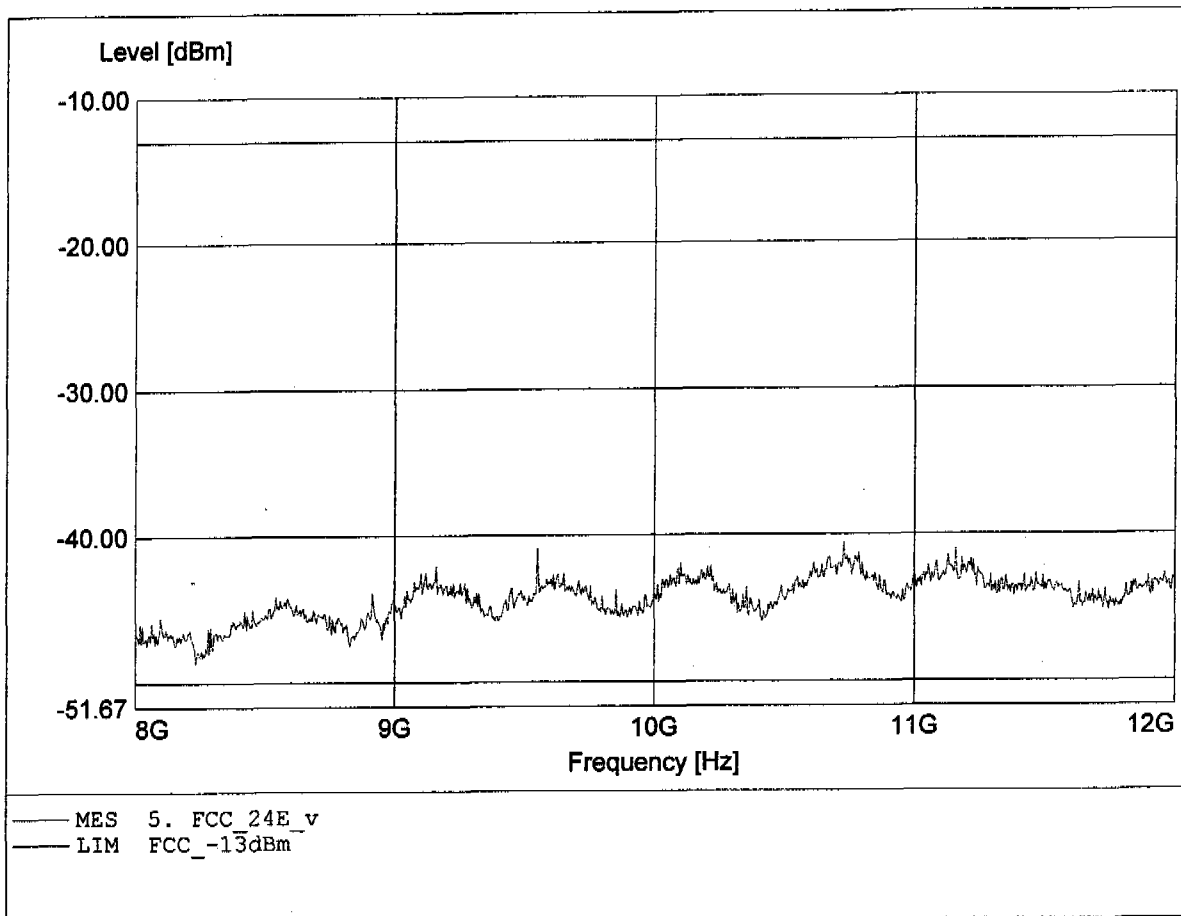


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.711GHz, Pmax: -40.29dBm, RBW: 1MHz

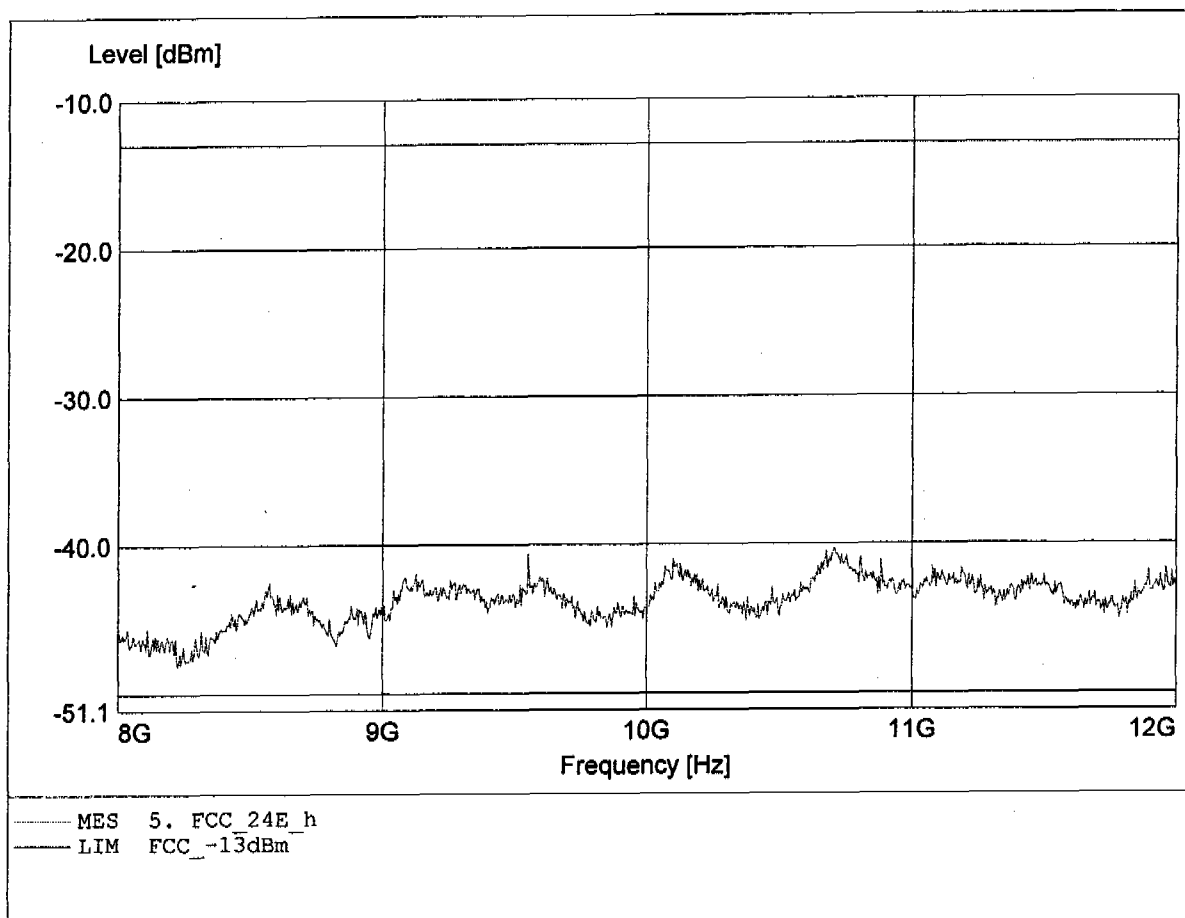


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.520GHz, Pmax: -32.22dBm, RBW: 1MHz

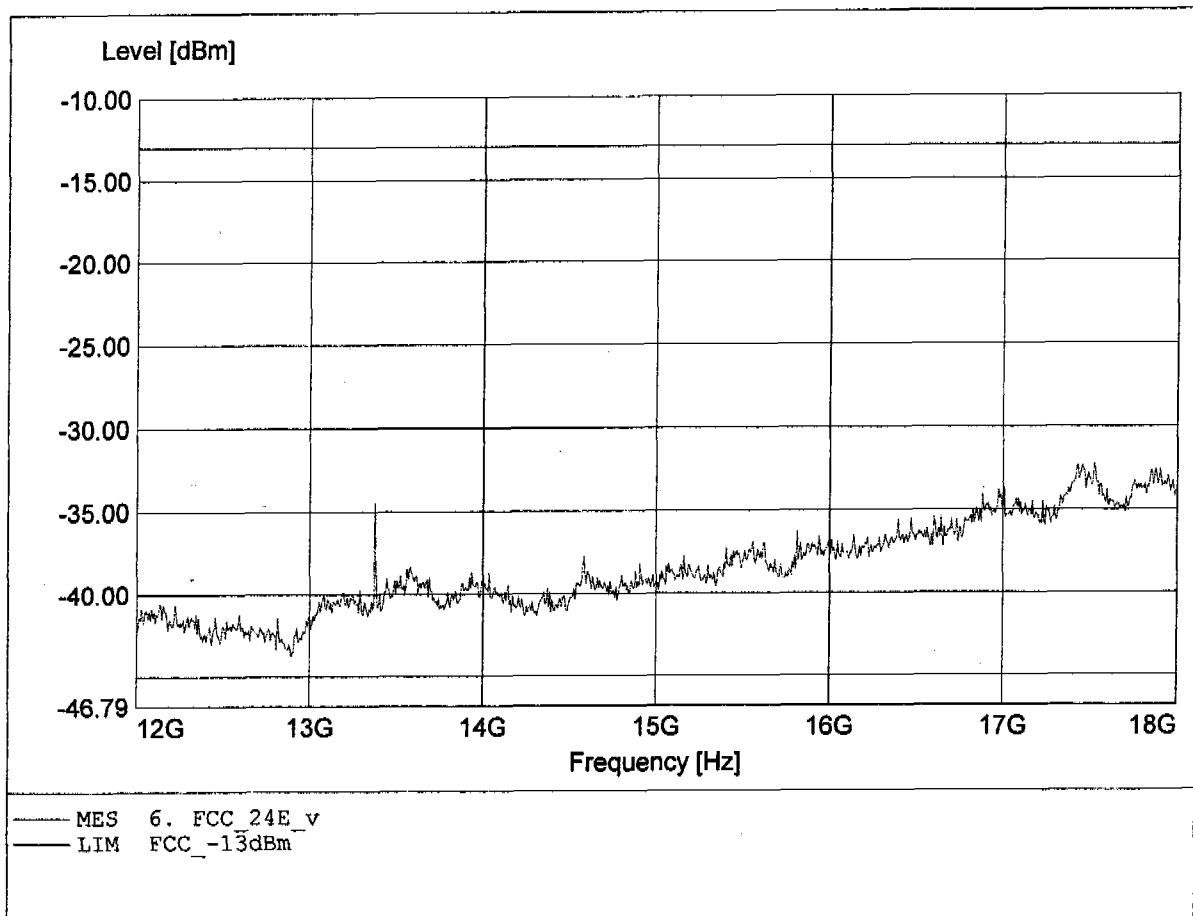


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.440GHz, Pmax: -31.48dBm, RBW: 1MHz

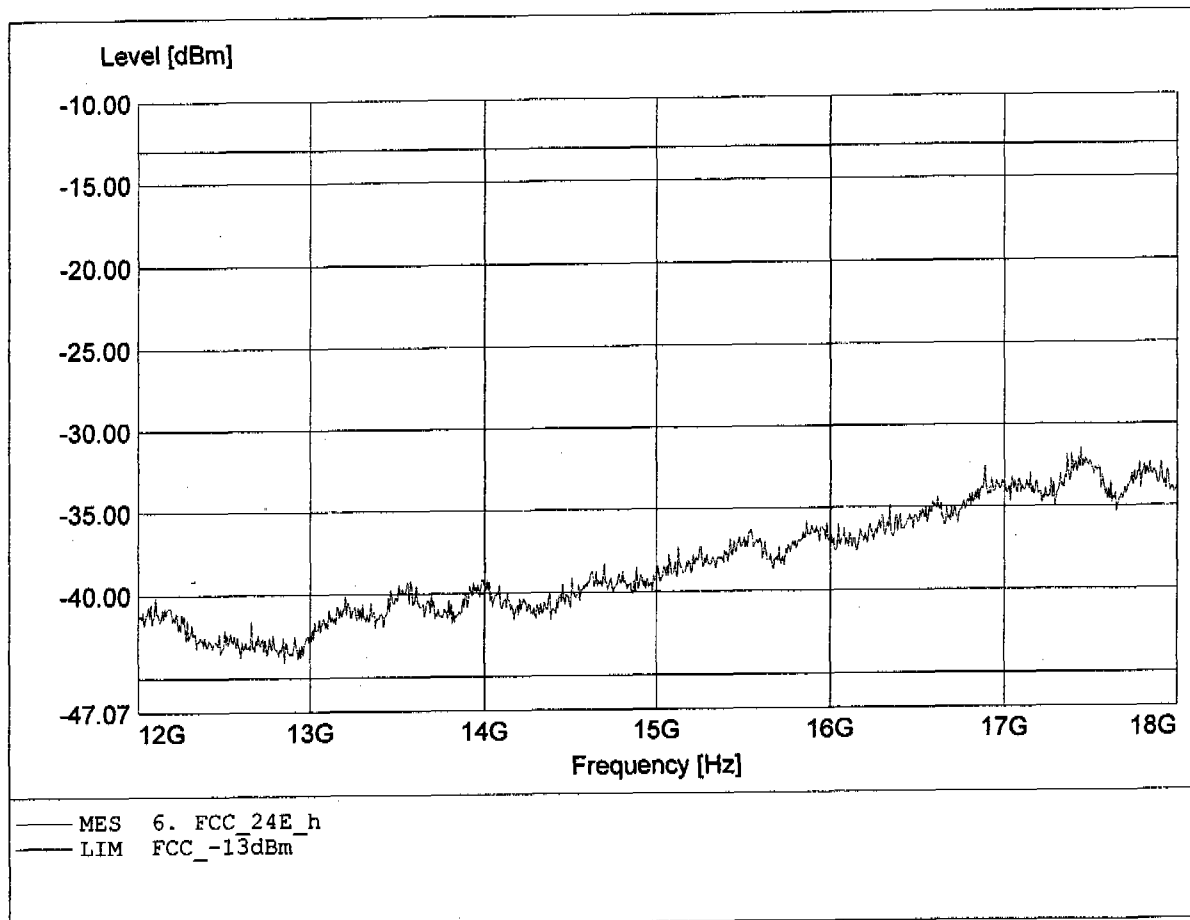


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.963GHz, Pmax: -25.32dBm, RBW: 1MHz

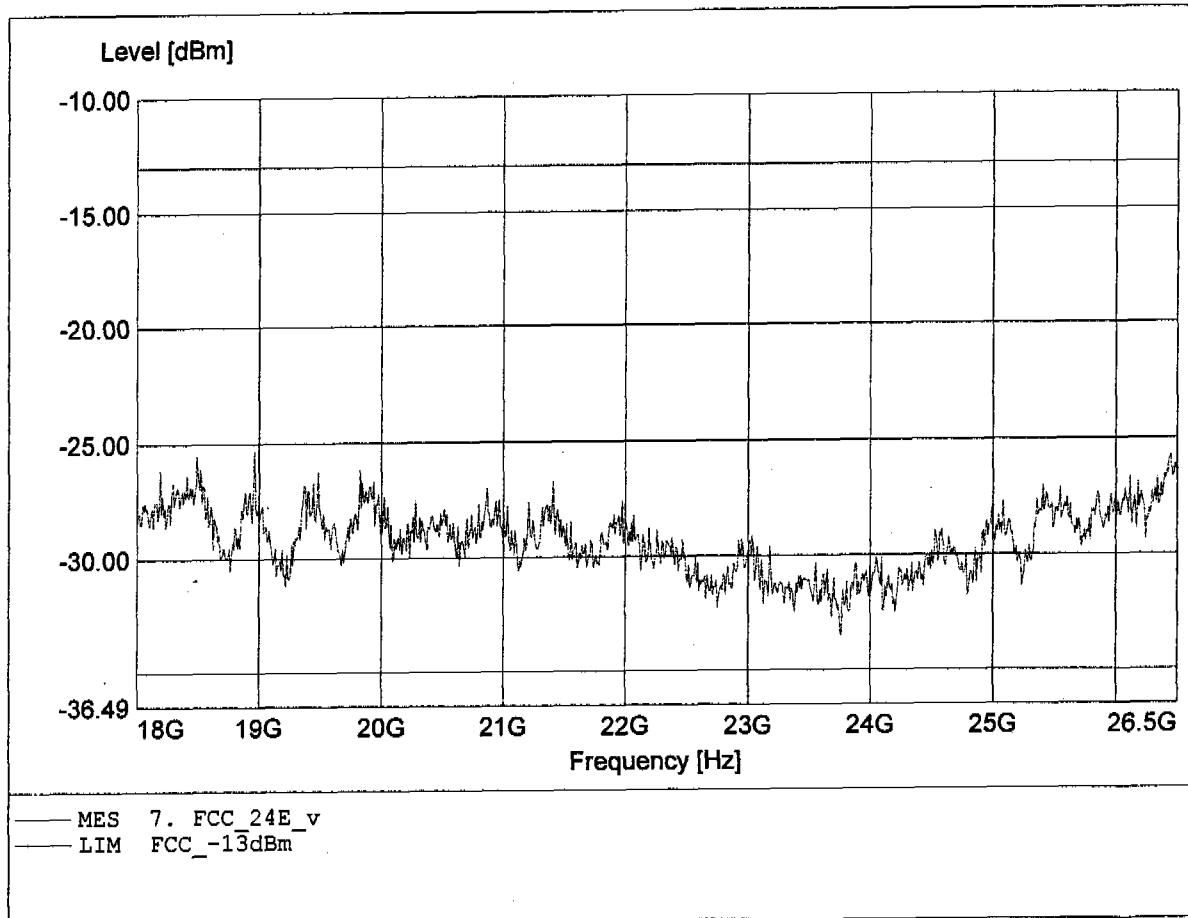

Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

EUT: E-GSM900/GSM1800/GSM1900 Tiple Band GPRS Terminal Equipment
Model / Channel: I-2000 / 810
Approval Holder: Innostream Inc.
Test Site / Operator: ETS / Mr. Pfeufer
Temperature/ Voltage: 23°C / Unom : 3,7 VDC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.462GHz, Pmax: -25.29dBm, RBW: 1MHz

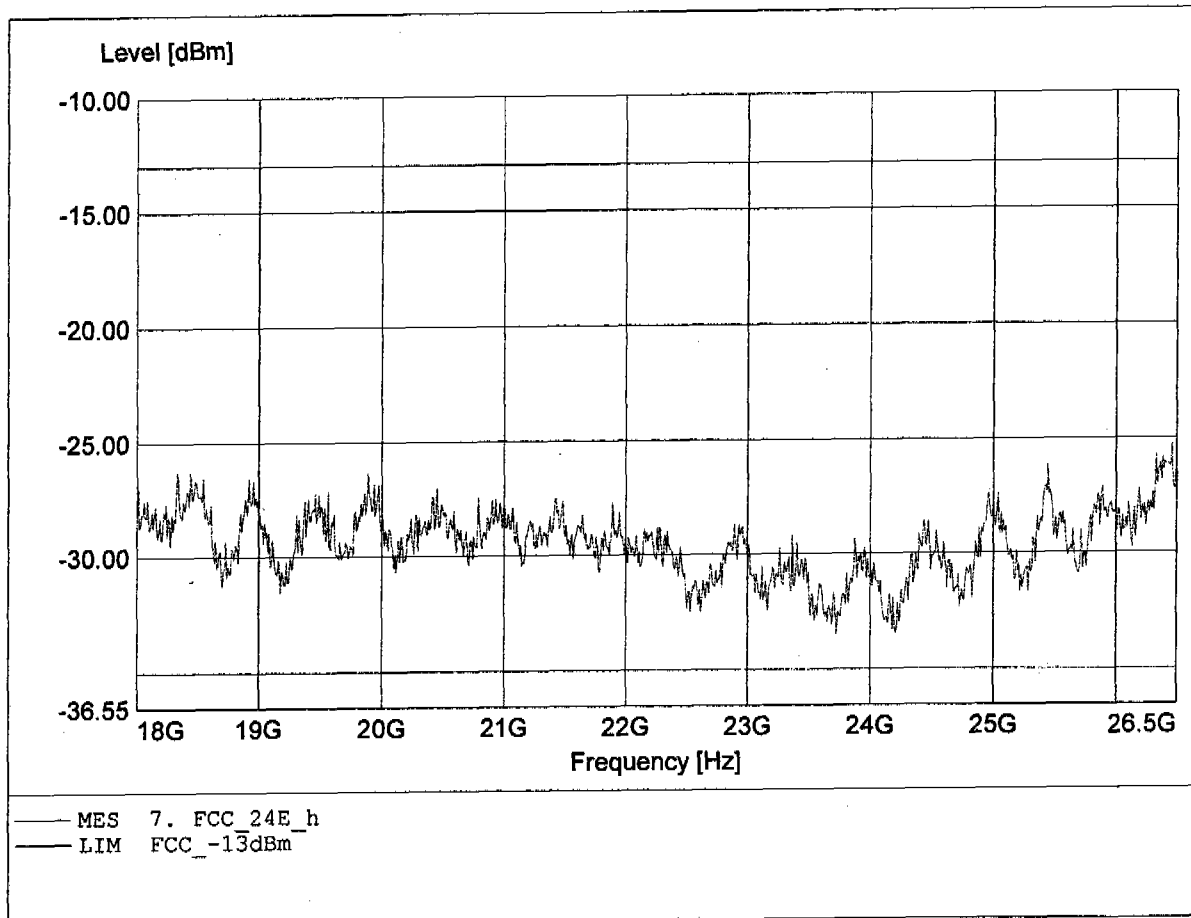


Appendix F

Line Conducted Emissions


EMI voltage test in the ac-mains according to FCC part 15

EUT: E-GSM900/GSM1800/GSM1900 Triple Band GPRS Charger
Manufacturer: INNOSTROM INC.
Operating Condition: Unom: 120VAC(AC/DC-adaptor), Thom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: CHARGER (i-2000) mode: charging

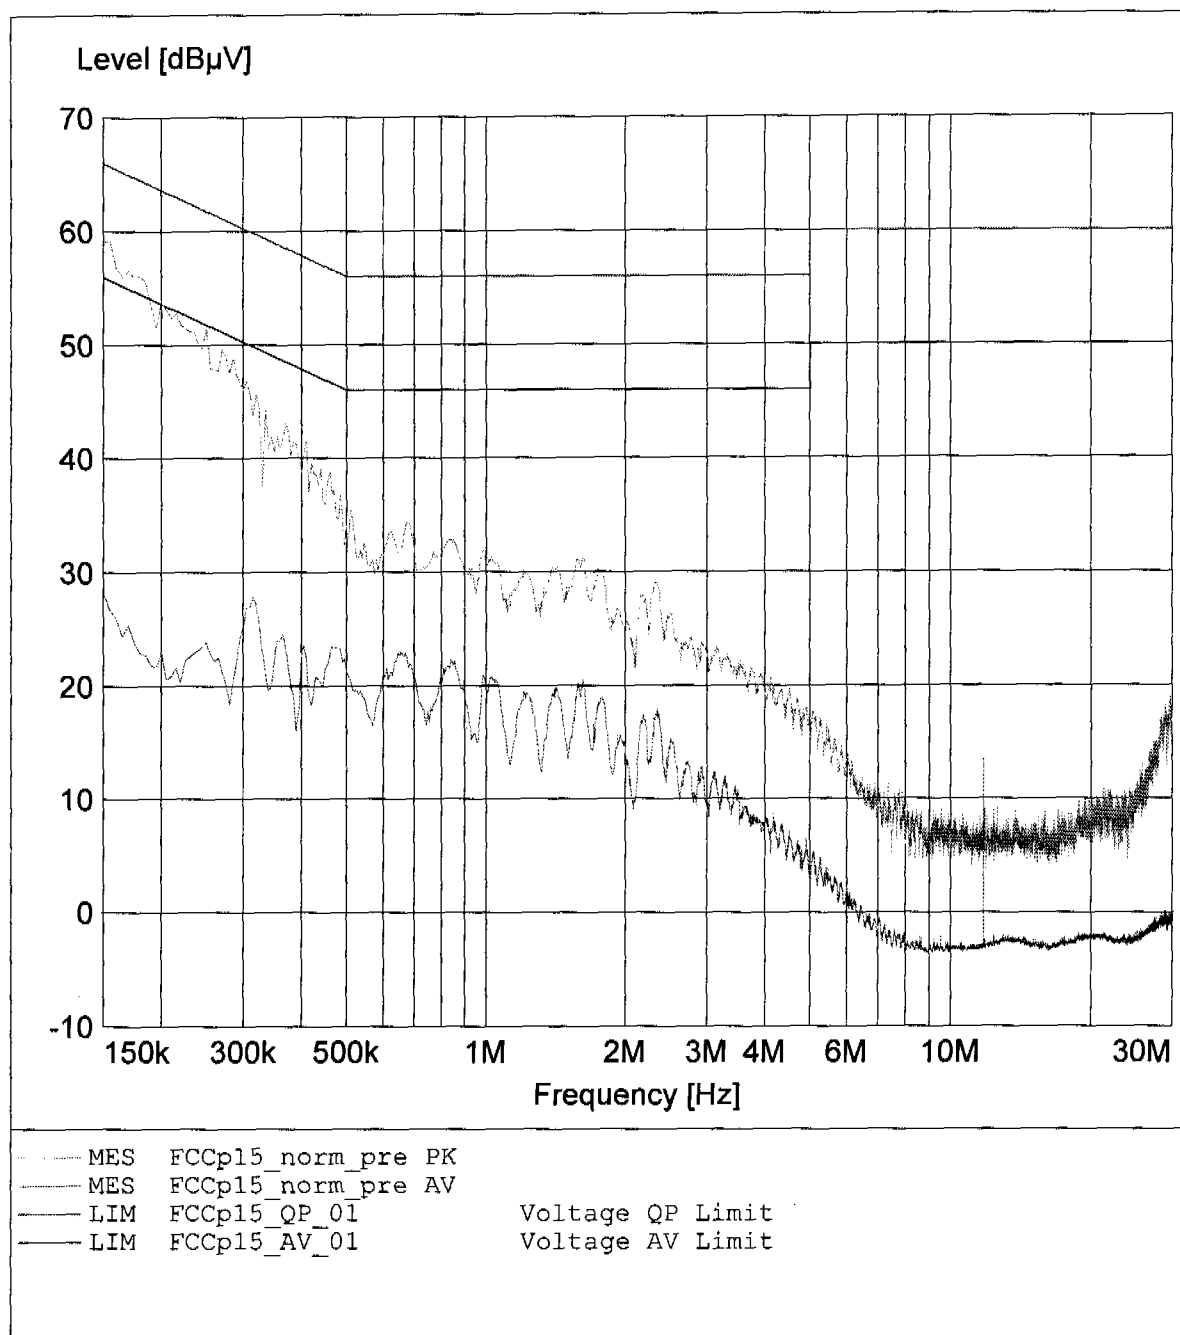

EMI voltage test in the ac-mains according to FCC part 15

EUT: E-GSM900/GSM1800/GSM1900 Triple Band GPRS
Manufacturer: INNOSTROM INC.
Operating Condition: Unom: 120VAC(AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: i-2000 mode: charging

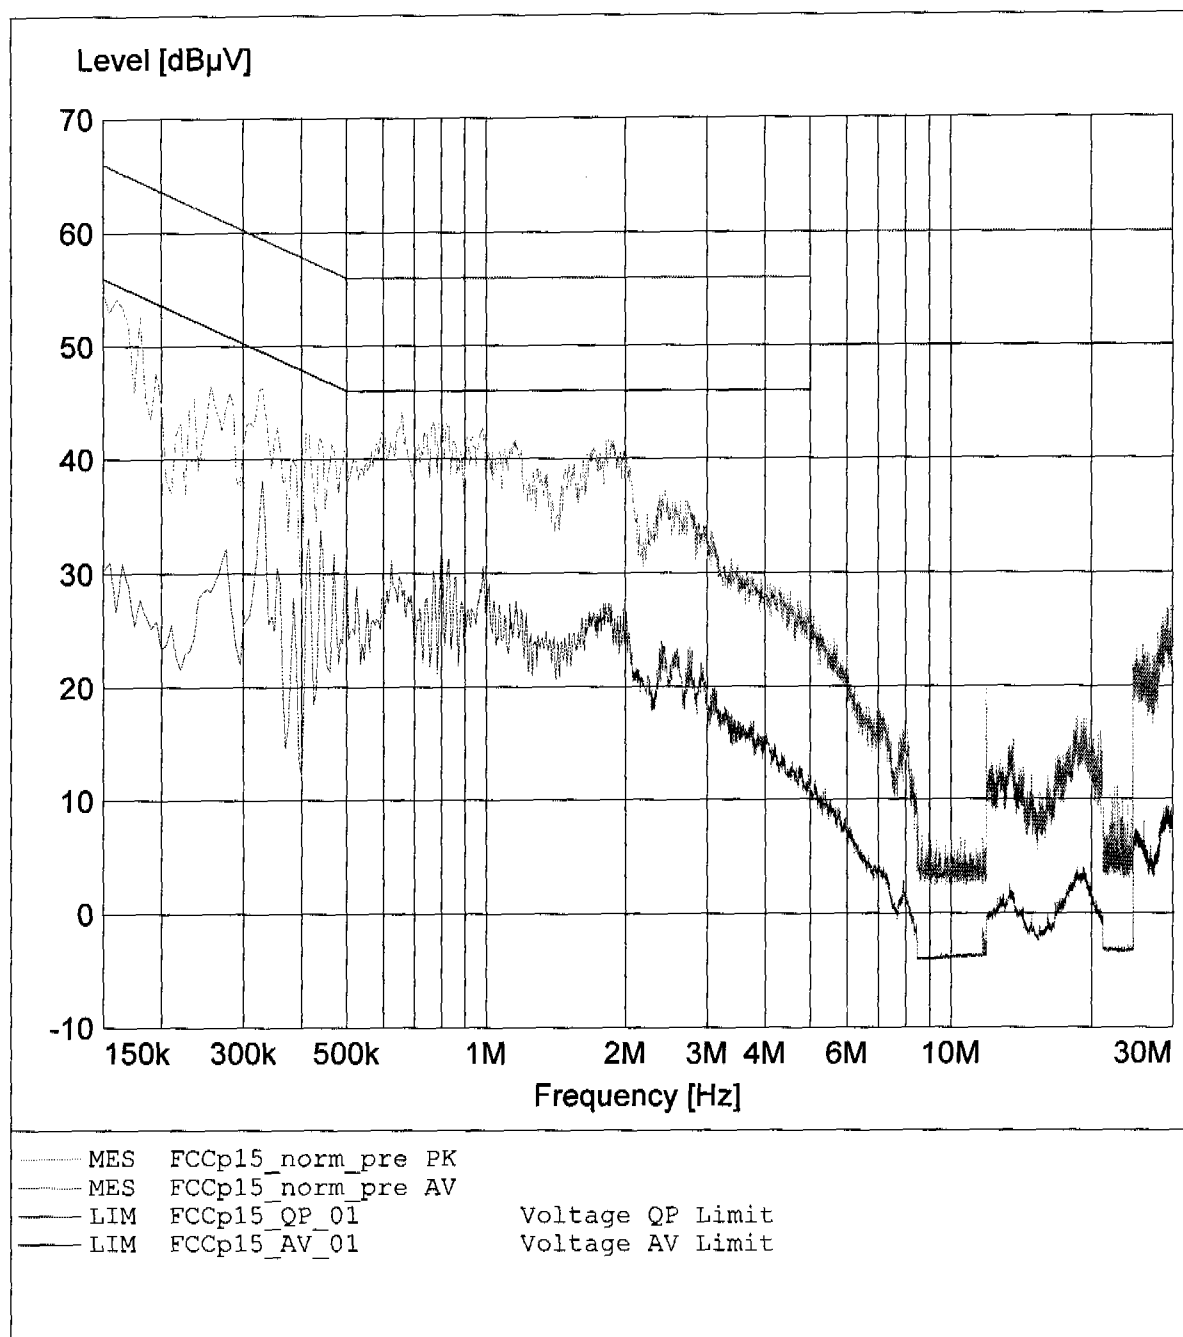

Appendix G

Frequency Stability vs. Temperature

No diagrams

Refer to point 9.2

Appendix H

Frequency Stability vs. Voltage

No diagrams
Refer to point 10.2