ATTACHMENT O – SAR TEST PLOTS (1 of 2)

INNO-P10 (Slide Up)
SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e, = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.0302 mW/g, SAR (10g): 0.0176 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.30 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Left Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 512
Liquid Temperature: 21.3°c
Date Tested : March 2, 2005

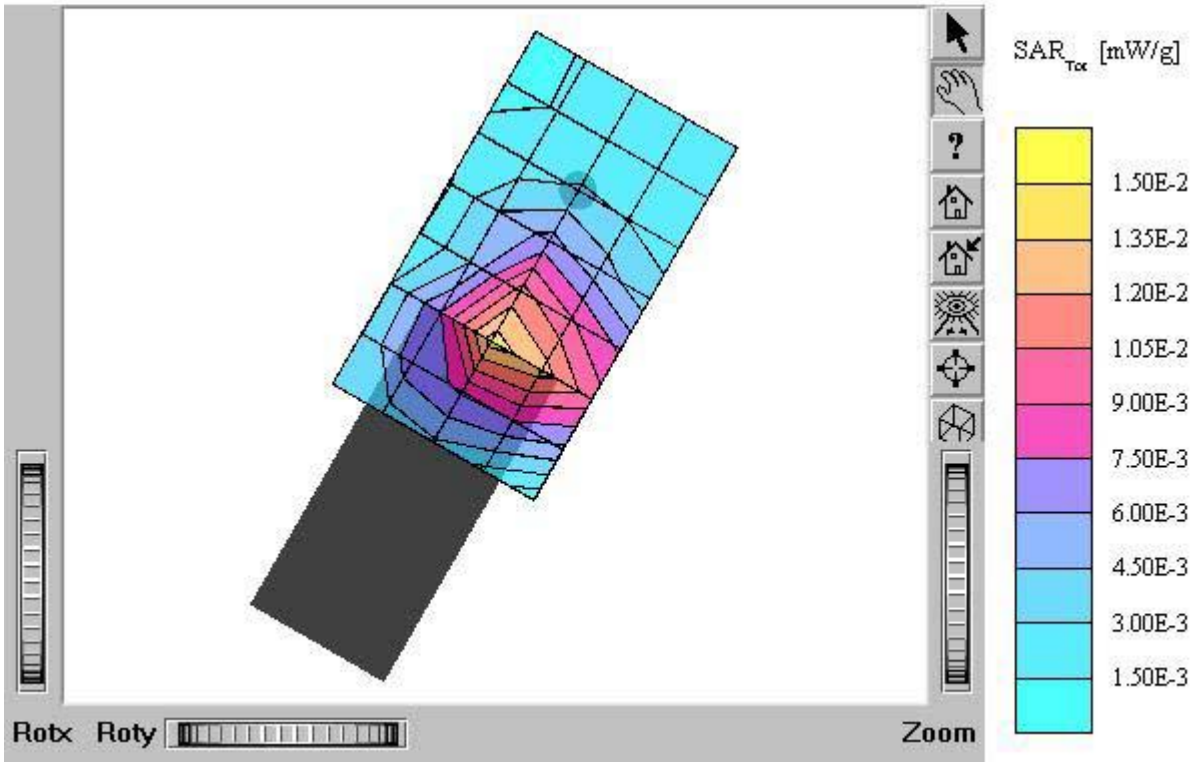

INNO-P10 (Slide Up)
SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e, = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.0541 mW/g, SAR (10g): 0.0291 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.18 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Left Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

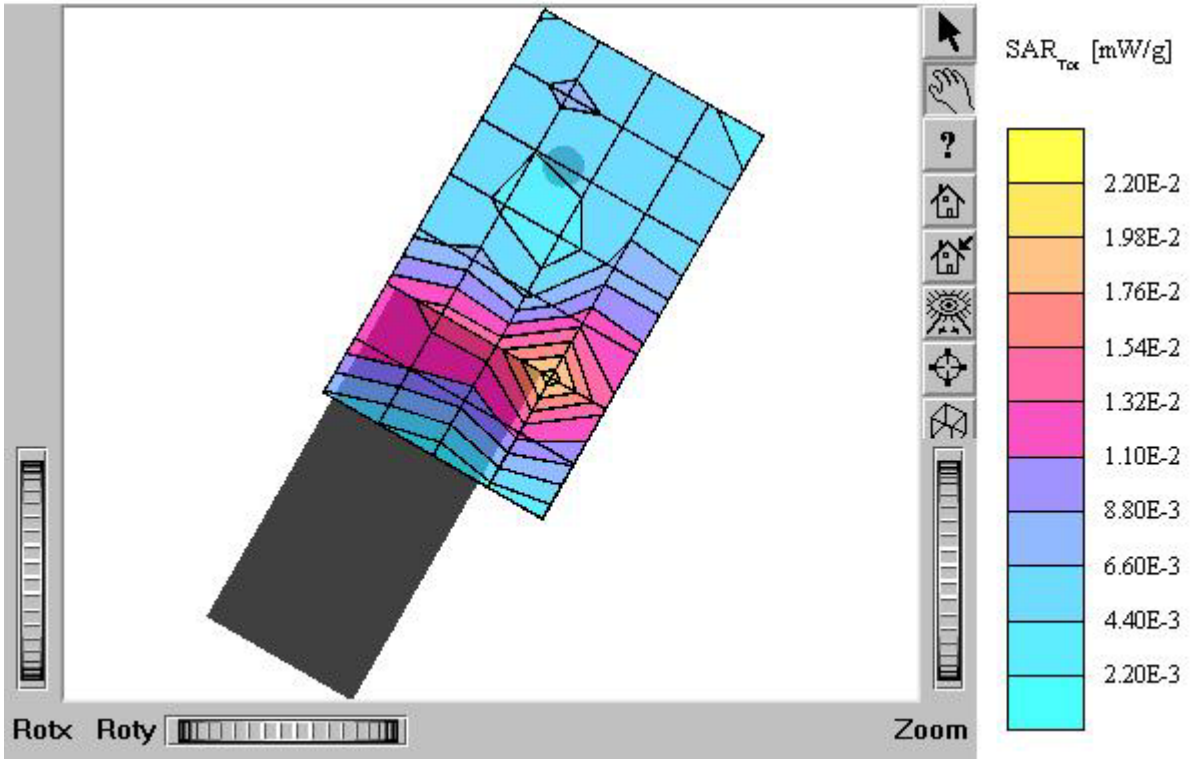

INNO-P10 (Slide Up)
SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e, = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.0856 mW/g, SAR (10g): 0.0465 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.12 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Left Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 810
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

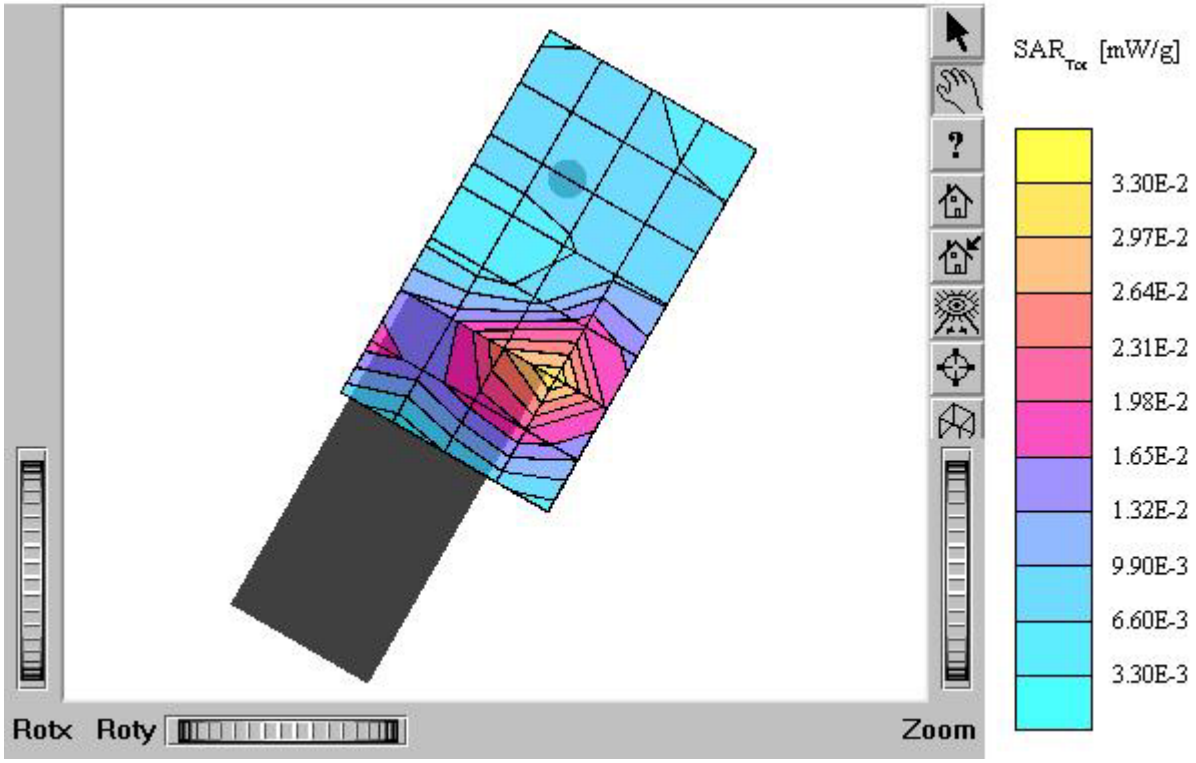

INNO-P10 (Slide Up)
SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e, = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.0317 mW/g, SAR (10g): 0.0189 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.23 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 512
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

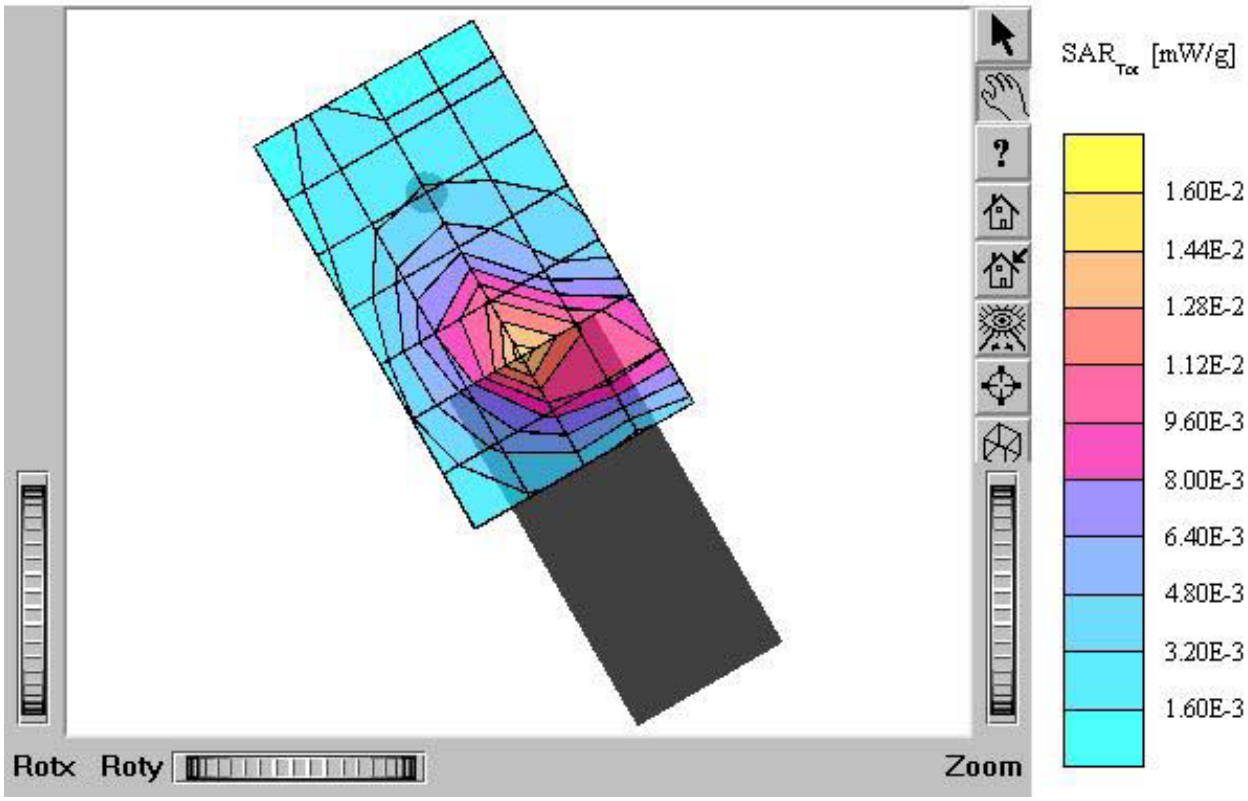

INNO-P10 (Slide Up)
SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e, = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.0608 mW/g, SAR (10g): 0.0320 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.12 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

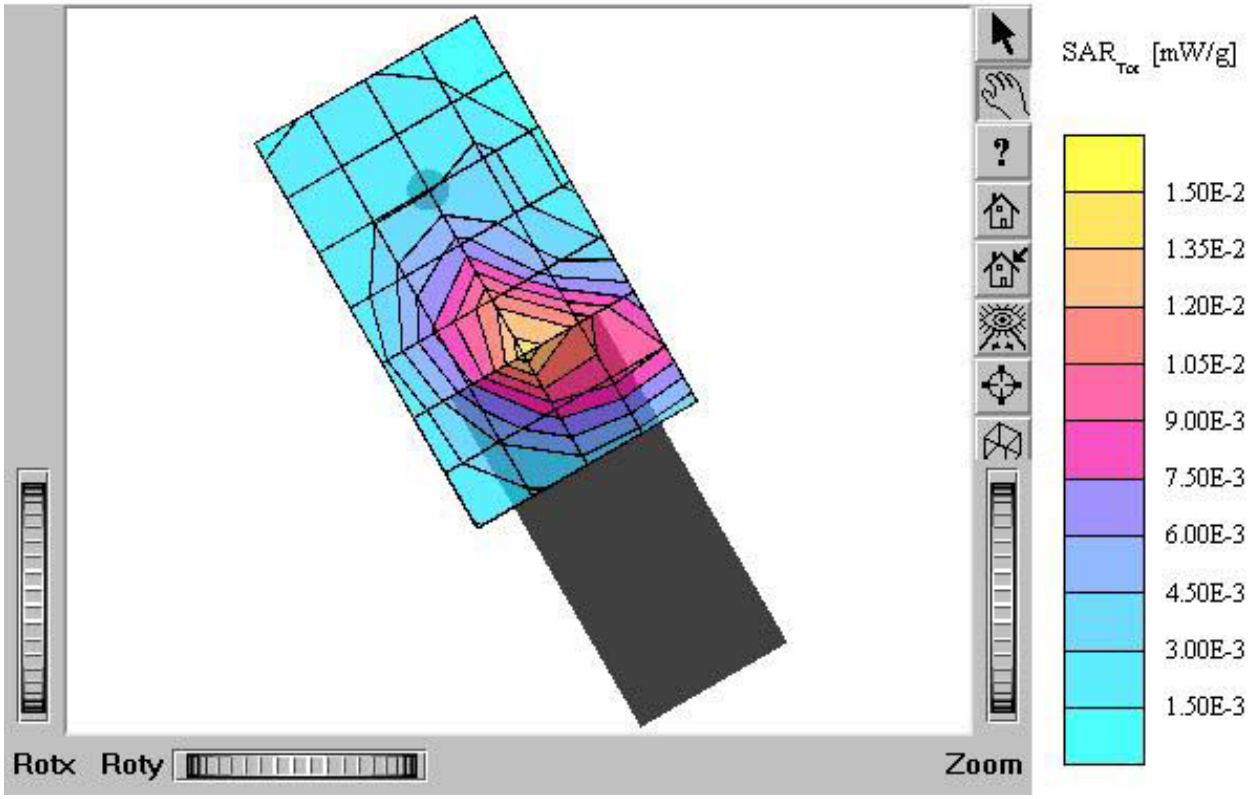

INNO-P10 (Slide Up)
SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e, = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.0798 mW/g, SAR (10g): 0.0415 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.09 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 810
Liquid Temperature: 21.3°c
Date Tested : March 2, 2005

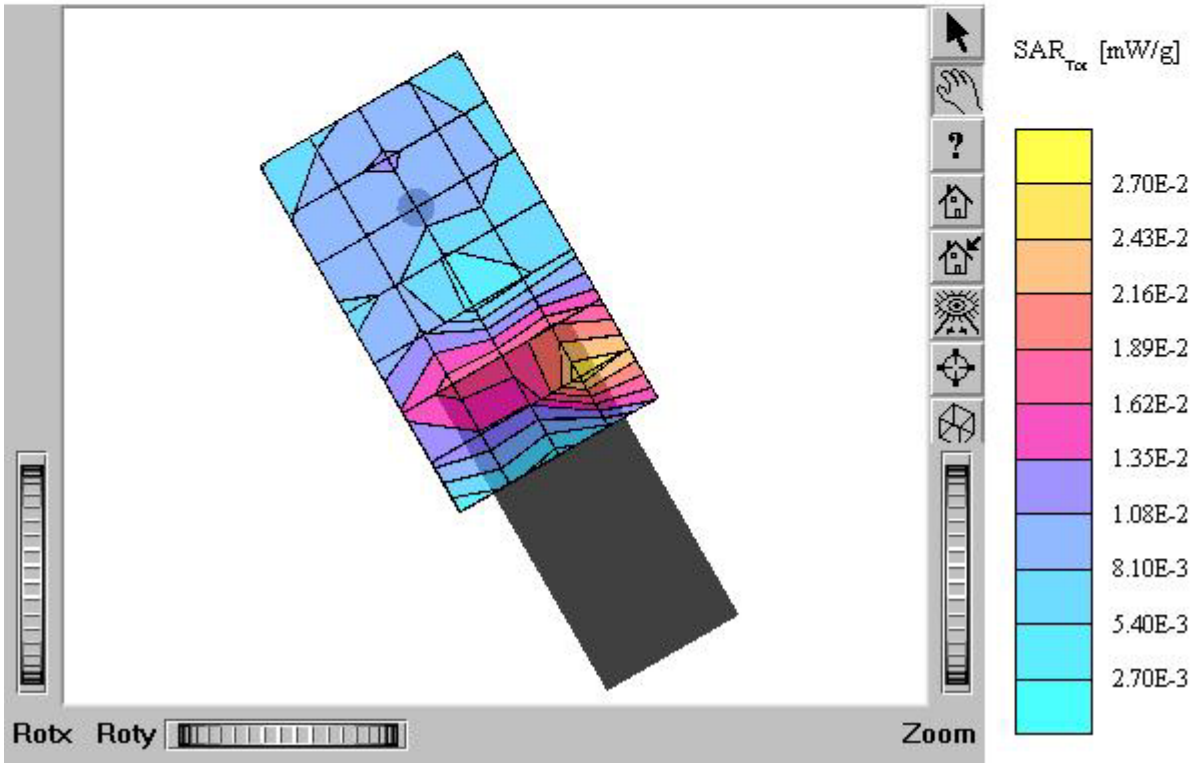

INNO-P10 (Slide Up)
SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e_r = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.0317 mW/g, SAR (10g): 0.0187 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.05 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Left Tilt / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

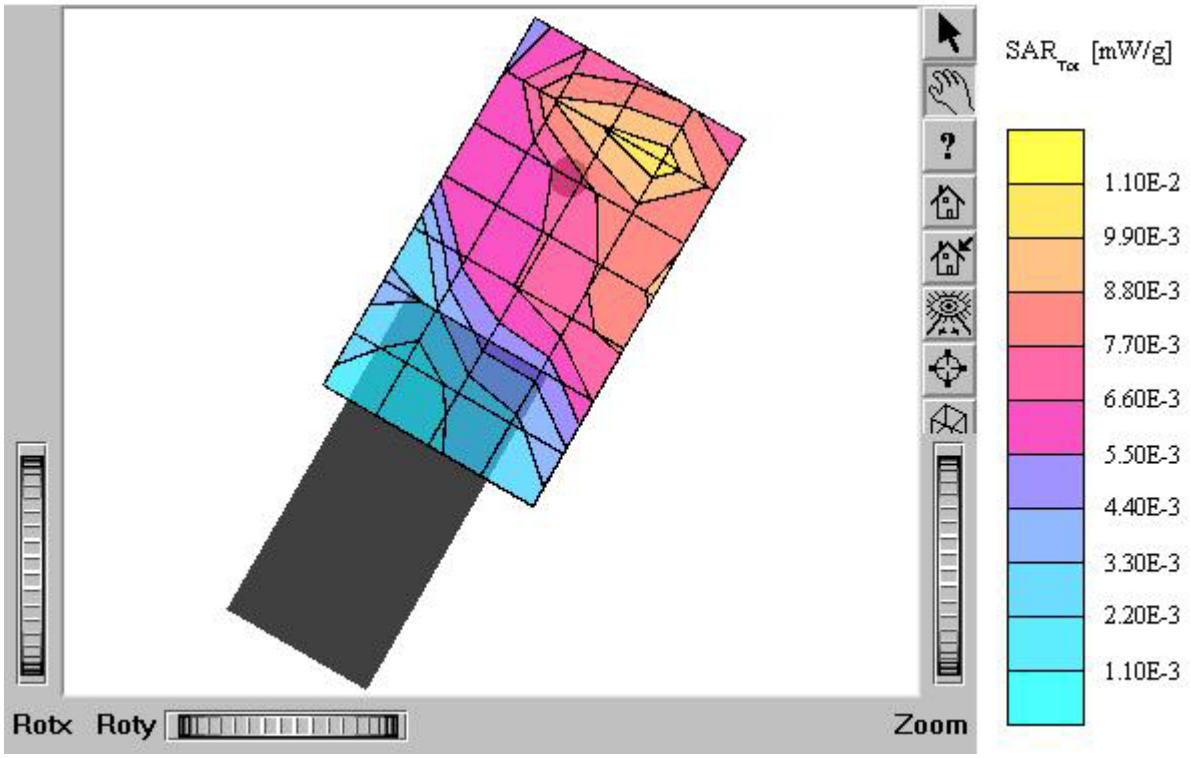

INNO-P10 (Slide Up)
SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e_r = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.0257 mW/g, SAR (10g): 0.0157 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.10 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Right Tilt / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

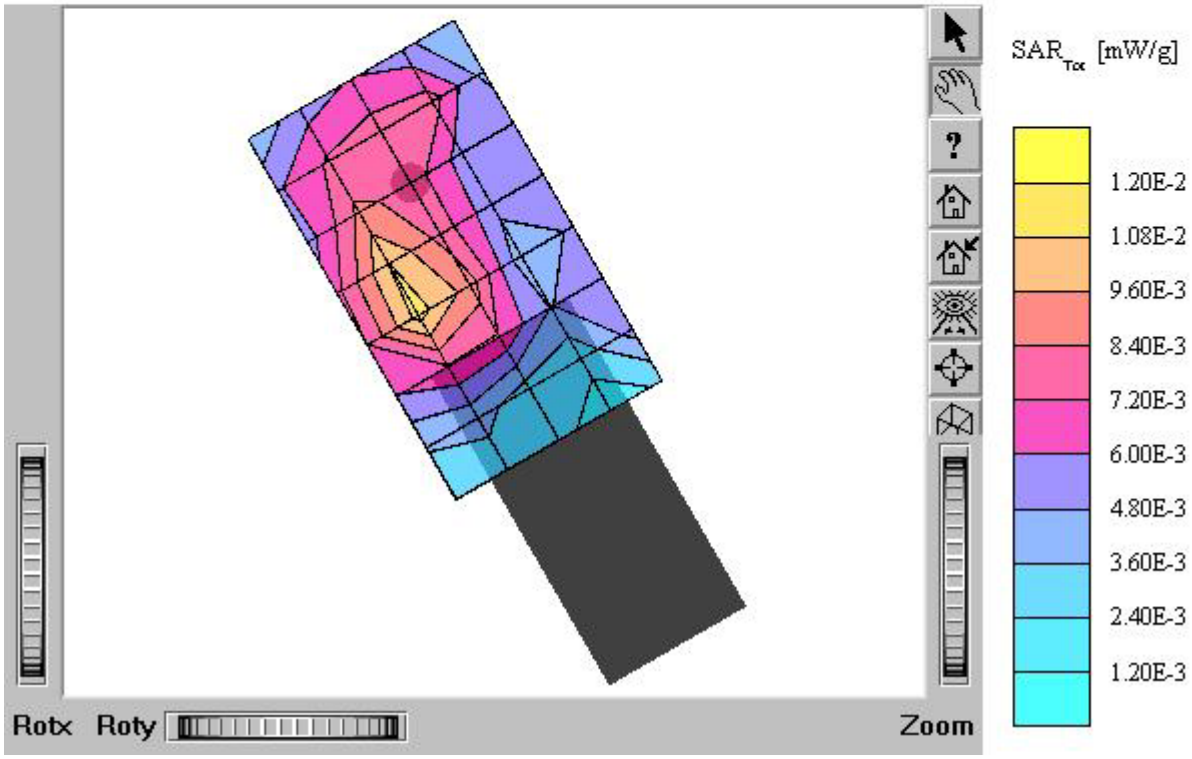

INNO-P10 (Slide Down)
SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e_r = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.0515 mW/g, SAR (10g): 0.0309 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.02 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Left Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 512
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

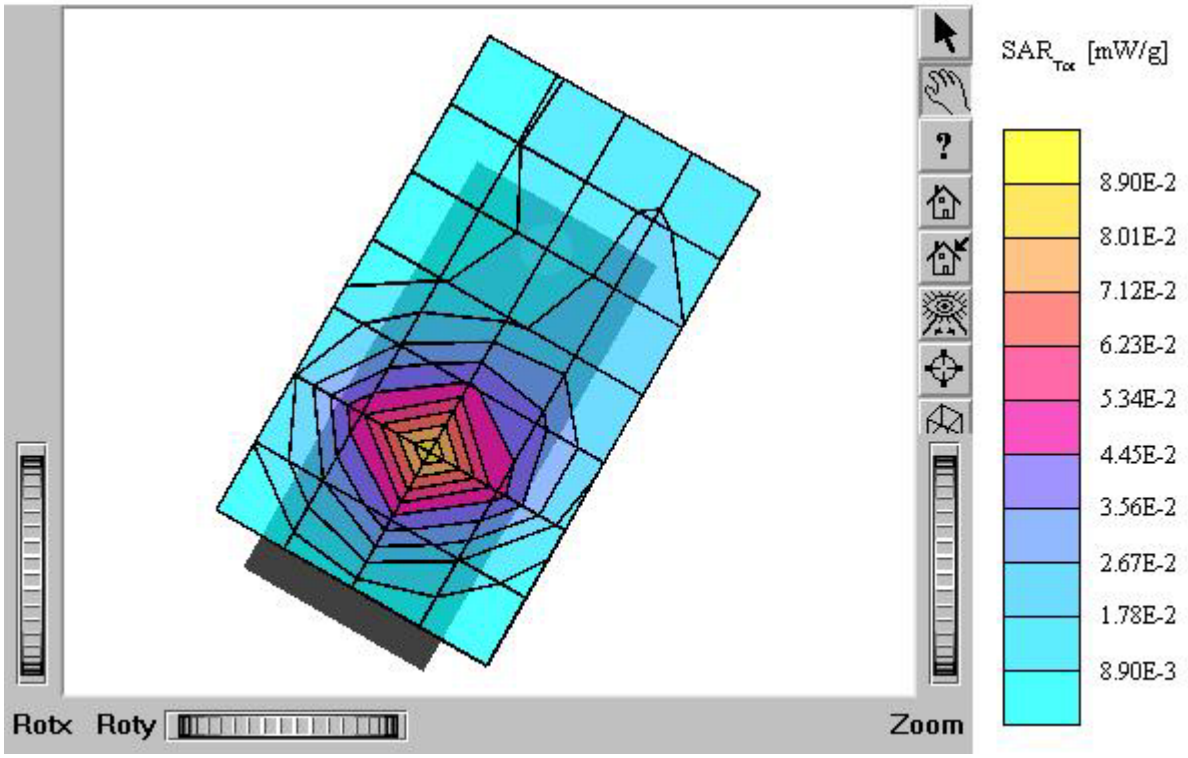

INNO-P10 (Slide Down)
SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e_r = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.140 mW/g, SAR (10g): 0.0835 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.10 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Left Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

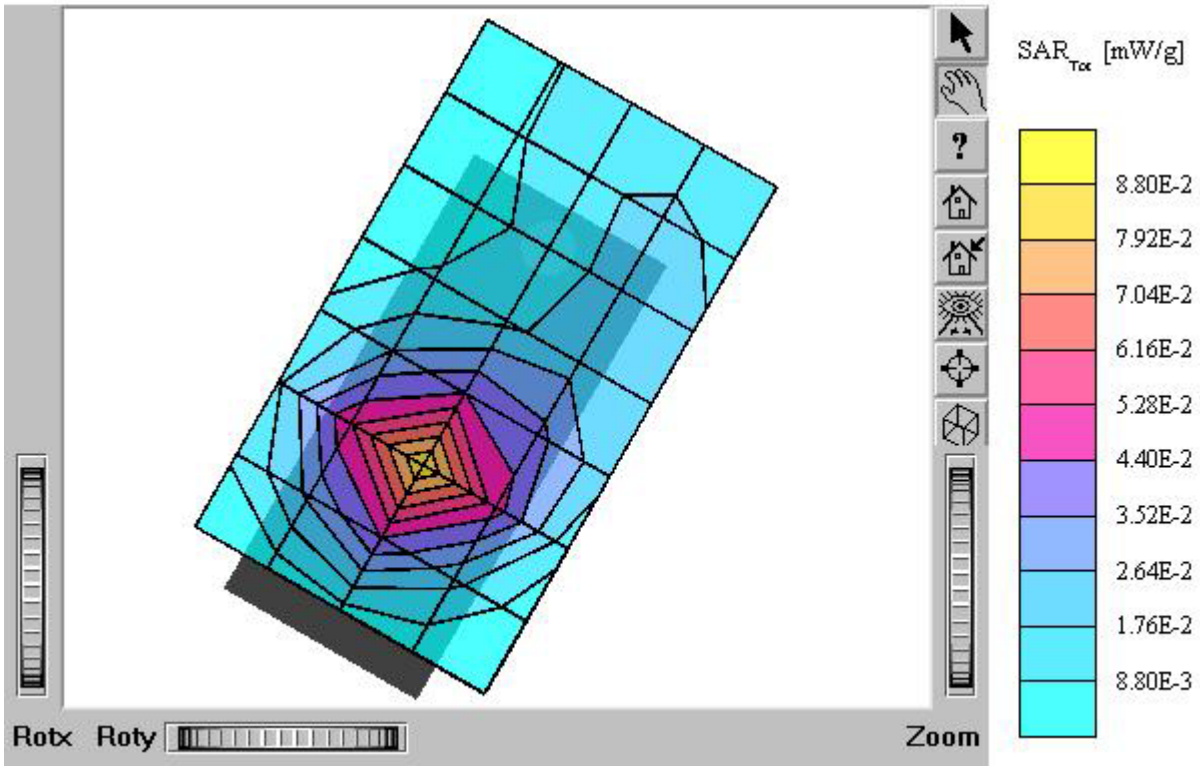

INNO-P10 (Slide Down)
SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e_r = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.180 mW/g, SAR (10g): 0.111 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.05 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Left Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 810
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

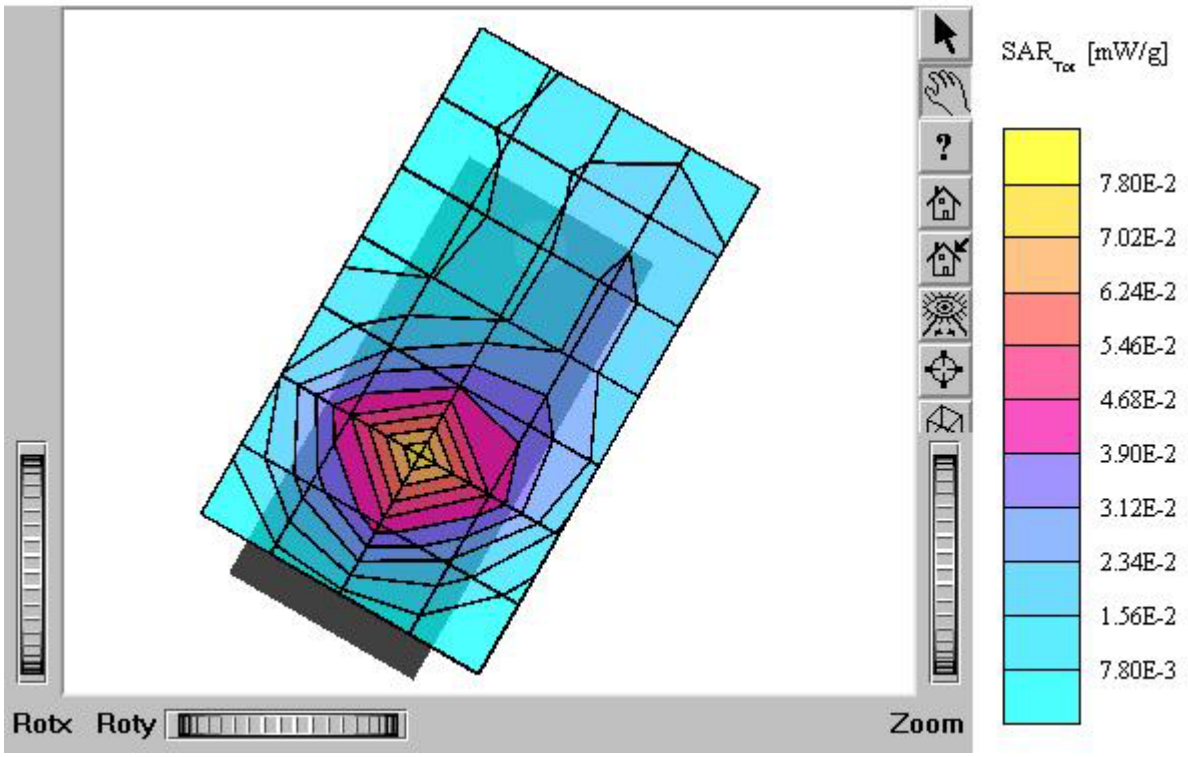

INNO-P10 (Slide Down)
SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e_r = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.0459 mW/g, SAR (10g): 0.0280 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.02 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 512
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

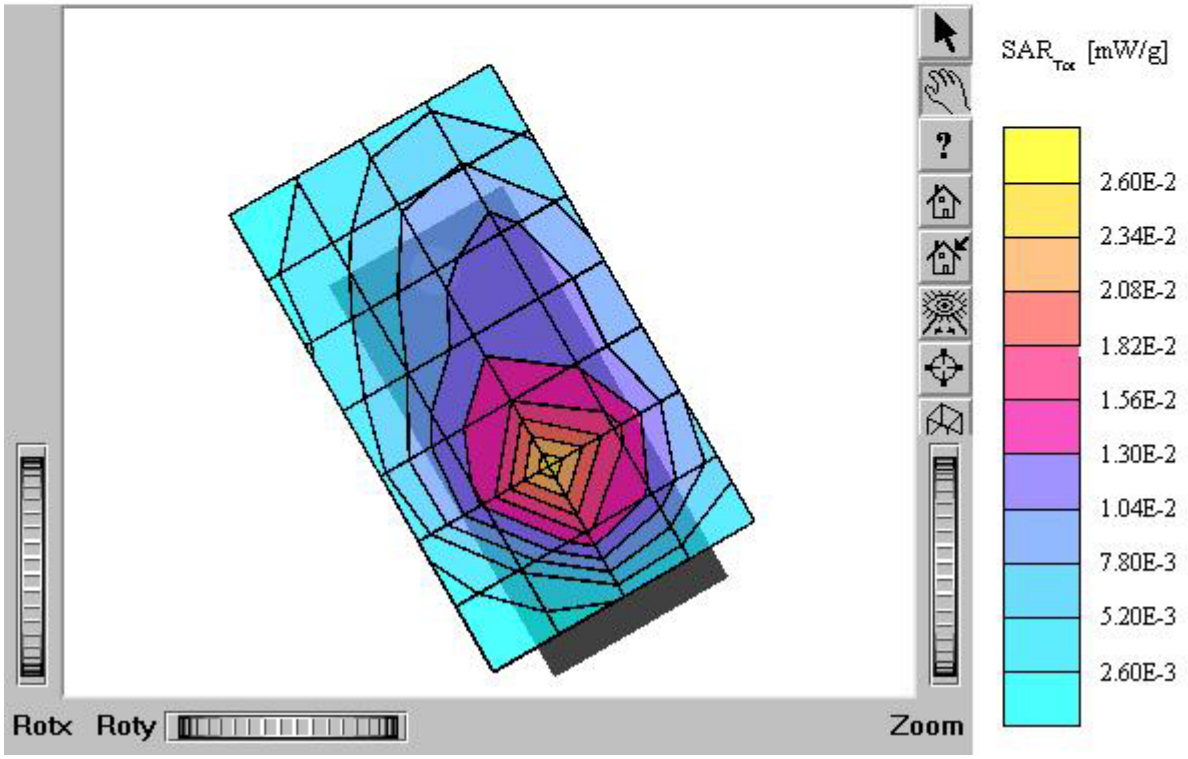

INNO-P10 (Slide Down)
SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e_r = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.112 mW/g, SAR (10g): 0.0674 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.04 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

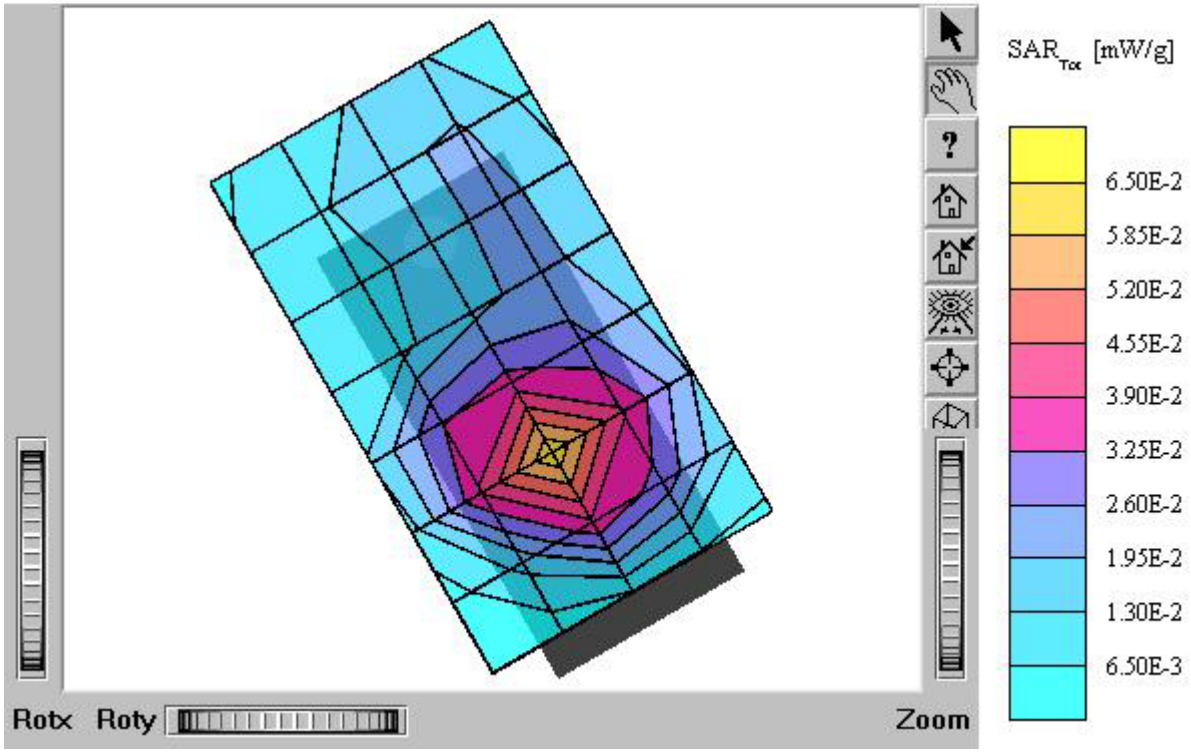

INNO-P10 (Slide Down)
SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e_r = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.181 mW/g, SAR (10g): 0.109 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.02 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Right Touch / Antenna: Fixed
Mode: GSM1900 / Channel : 810
Liquid Temperature: 21.3°c
Date Tested : March 2, 2005

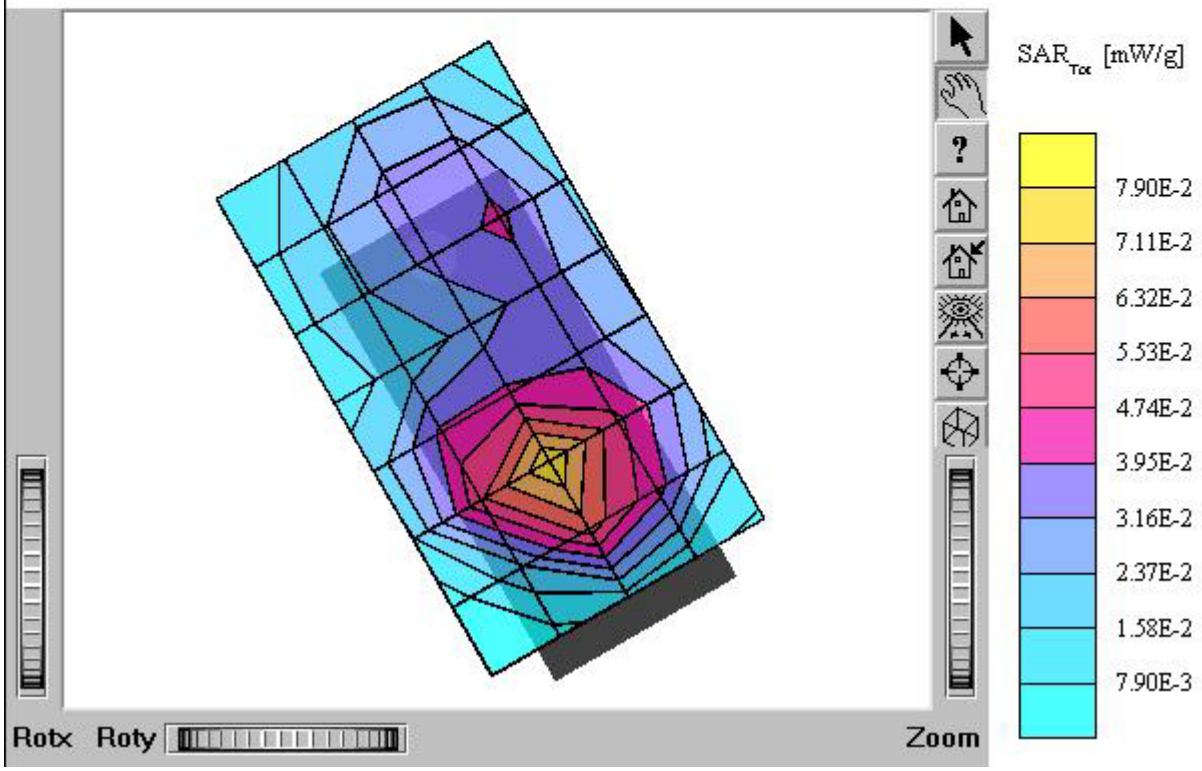

INNO-P10 (Slide Down)
SAM II Phantom; Left Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e_r = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.155 mW/g, SAR (10g): 0.0826 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.10 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Left Tilt / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005

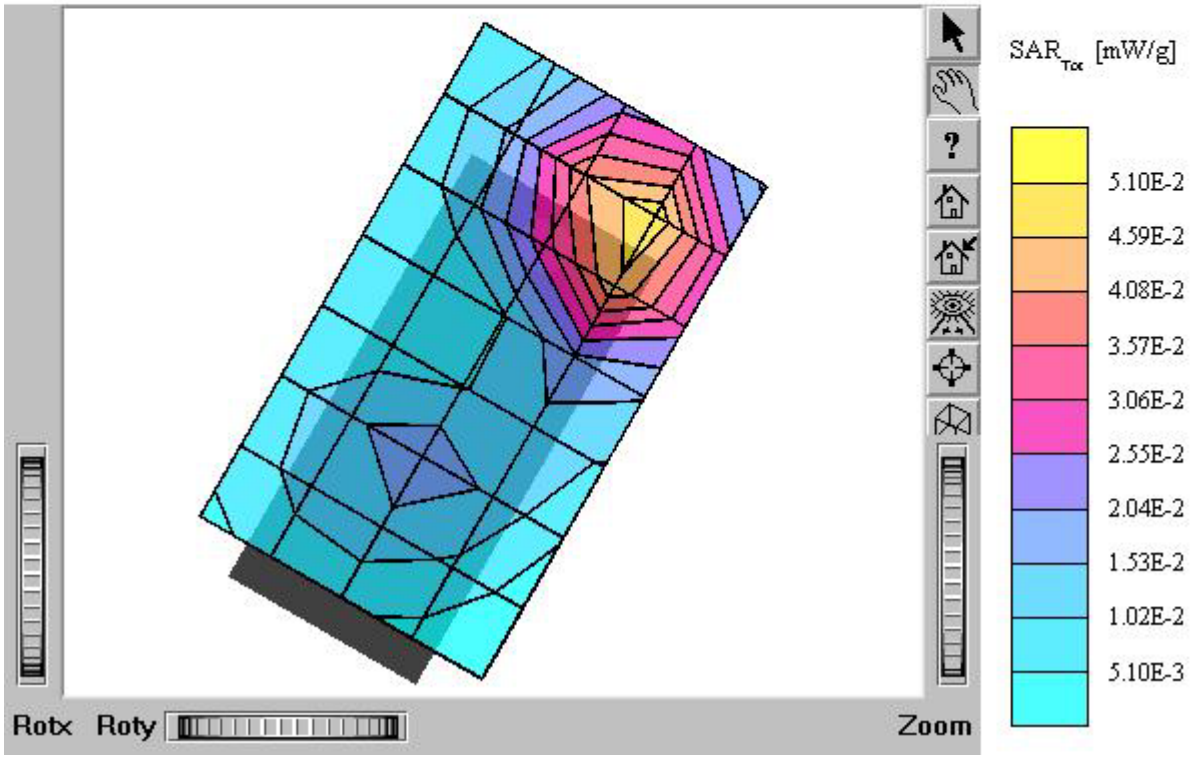

INNO-P10 (Slide Down)
SAM II Phantom; Right Hand [CRP] Section; Position: (90°,180°); Frequency: 1900 MHz
Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 8.0; Brain 1900 MHz: s = 1.39 mho/m e_r = 40.4 r = 1.00 g/cm³
Cube 5x5x7: SAR (1g): 0.119 mW/g, SAR (10g): 0.0649 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.01 dB
Comment:
MODEL : INNO-P10
Company : Innostream Inc.
Test Position: Right Tilt / Antenna: Fixed
Mode: GSM1900 / Channel : 661
Liquid Temperature: 21.3℃
Date Tested : March 2, 2005