



## TEST REPORT

**Application No. :** SHEM120200011202

**Applicant:** Monster, LLC

**Equipment Under Test (EUT):**

**NOTE:** The following sample(s) submitted was/were identified on behalf of the client as

**EUT Name:** StreamCast HD Transmitter

**Brand Name:** Monster Products

**Model No.:** MSP STRC USB XMT WW

**Fundamental Frequency :** 2412-2464 MHz, 5736-5814MHz and 5180-5240MHz\*

**Test Frequency:** 5180-5240MHz

**FCC ID:** RJE-178461

**IC:** 5153A-178461

**Standards:** FCC PART 15 SUBPART E, Section 15.407

RSS-210 Issue 8 (December 2010)

RSS-Gen Issue 3 (December 2010)

**Date of Receipt:** Feb. 13, 2012

**Date of Test:** Feb. 15, 2012 to May. 10, 2012

**Date of Issue:** May. 12, 2012

**Test Result :** **PASS \***

In the configuration tested, the EUT complied with the standards specified above.

For 2412-2464MHz and 5736-5814MHz bands please reference report SHEM120200011201.

E&E Section Head  
SGS-CSTC(Shanghai) Co., Ltd.

E&E EMC Engineer  
SGS-CSTC(Shanghai) Co., Ltd.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Test Summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	Test Procedure	RESULT
Peak Transmit Power	15.407(a)(1)	RSS-210 Issue 8 Annex 9	ANSI C63.10,2009 Clause 6.10.2	Pass
Peak Power Spectral Density	15.407(a)(1)	RSS-210 Issue 8 Annex 9	ANSI C63.10,2009 Clause 6.11	Pass
Peak Power Excursion	15.407(a)(6)	RSS-210 Issue 8 Annex 9	ANSI C63.10,2009 Clause 6.10.2	Pass
Electric Field Strength Spurious Emissions	15.407(b)(1)(6)(7) 15.205 15.209	RSS-210 Issue 8 Annex 9	ANSI C63.10,2009 Clause 6.3, 6.5 and 6.6	Pass
Radiated Emission BandEdge	15.407(b)(5)(7) 15.205	---	ANSI C63.10,2009 Clause 6.9	Pass
Undesirable emission	FCC Part15 407 (b)(1)	RSS-210 Issue 8 Annex 9	ANSI C63.4,2003 Clause 6.12	Pass
Frequency stability	FCC Part15 407 (g)	---	----	Pass
Power line conducted emission	15.407(b)(6) 15.207	RSS-Gen Issue 8 Clause 7.2.4	ANSI C63.10,2009 Clause 6.2	Pass
Occupied bandwidth	---	RSS-Gen Issue 3 Clause 4.6.1	RSS-Gen Issue 3 Clause 4.6.1	Tested

### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>4</b>
4.1 CLIENT INFORMATION .....	4
4.2 DETAILS OF E.U.T.....	4
4.3 DESCRIPTION OF SUPPORT UNITS.....	4
4.4 TEST LOCATION.....	5
4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	5
4.6 TEST FACILITY.....	5
<b>5 TEST INSTRUMENTS.....</b>	<b>6</b>
<b>6 TEST PROCEDURE &amp; MEASUREMENT DATA.....</b>	<b>8</b>
6.1 E.U.T. OPERATION .....	8
6.2 PEAK OUTPUT POWER MEASUREMENT .....	8
6.3 PEAK POWER SPECTRAL DENSITY .....	12
6.4 PEAK POWER EXCURSION.....	15
6.5 ELECTRIC FIELD STRENGTH SPURIOUS EMISSIONS .....	18
6.6 RADIATED EMISSION BAND EDGE .....	24
6.7 UNDESIRABLE EMISSION TEST .....	29
6.8 FREQUENCY STABILITY .....	32
6.9 CONDUCTED EMISSION TEST.....	34
6.10 OCCUPIED BANDWIDTH TEST .....	37

## 4 General Information

### 4.1 Client Information

<b>Applicant :</b>	Monster, LLC
<b>Applicant Address:</b>	7251 West Lake Mead Blvd Suite 342 Las Vegas, NV 89128
<b>Manufacturer:</b>	Hansong(Nanjing) Technology Ltd.
<b>Manufacturer Address:</b>	8 <sup>th</sup> Kangping Road, Jiangning Economy and Technology Development Zone,Nanjing,201106,China

### 4.2 Details of E.U.T.

<b>EUT Name:</b>	StreamCast HD Transmitter	
<b>Brand Name:</b>	Monster Products	
<b>Model No:</b>	MSP STRC USB XMT WW	
<b>Power Supply:</b>	Monster usb: 5V, 100mA(Power supply by PC)	
<b>Frequency Band Channels :</b>	5180-5240 MHz Channel Description: Channel of Transmitter Frequency(MHz)	
	Low	5180
	Mid	5210
	High	5240
<b>Modulation Type:</b>	QPSK	
<b>Antenna Type:</b>	Integral antenna(Antenna Gain 2.0dB)	

### 4.3 Description of Support Units

Name	Model No.	Remark
Laptop	ThinkPad X100e	N/A
AC Adapter	Lenovo 65W 20V	N/A
Mouse	Lenovo M-UAE119	N/A

#### **4.4 Test Location**

Tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.  
No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5655

#### **4.5 Other Information Requested by the Customer**

None.

#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2014-07-26.

- FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

- Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

## 5 Test Instruments

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2011-06-03	2012-06-01
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2011-06-03	2012-06-01
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2012-03-10	2013-03-09
4	Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 373	2012-03-15	2013-03-14
5	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2011-06-03	2012-06-01
6	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2011-10-09	2012-10-08
7	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY-2009P	--	2011-10-15	2012-10-14
8	CLAMP METER	FLUKE	316	86080010	2012-04-20	2013-04-19
9	Thermo-Hygrometer	ZHICHEN	ZC1-2	01050033	2011-10-14	2012-10-13
11	High-low temperature cabinet	Shanghai YuanZhen	GW2050	--	2011-06-17	2012-06-16
12	Tunable Notch Filter	Wainwright instruments GmbH	WRCT1800.0/2000.0-0.2/40-5SSK	11	2011-06-26	2012-06-25
13	Tunable Notch Filter	Wainwright instruments GmbH	WRCT800.0/880.0-0.2/40-5SSK	9	2011-06-26	2012-06-25
14	High pass Filter	FSCW	HP 12/2800-5AA2	19A45-02	2012-04-07	2013-04-06
15	Low nosie amplifier	TESEQ	LNA6900	70133	2011-07-05	2012-07-04

16	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2011-06-04	2012-06-03
17	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127-490	2011-05-07	2012-05-06

## 6 Test Procedure & Measurement Data

### 6.1 E.U.T. Operation

Input voltage: 5.0V (by PC output)  
Operating Environment:  
Temperature: 25.0 °C  
Humidity: 45 % RH  
Atmospheric Pressure: 1013 mbar  
EUT Operation: The EUT has been tested under operating condition.  
Test program was used to control the EUT for staying in continuous transmitting mode is programmed.  
For 5180-5240MHz Band Channel low (5180MHz) mid(5210MHz) high(5240MHz)

### 6.2 Peak Output Power Measurement

**Test Requirement:** FCC Part 15 407 (a) (1)  
RSS-210 Issue 8 Annex 9

**Test date** May. 02, 2012

**Standard Applicable:** According to section 15.407(a)  
(1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $4 \text{ dBm} + 10\log B$ , where B is the 26- dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Measuremet Procedure:**

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF calbe from the antenna port to the spectrum.
3. Set the occur band to the entire emission bandwidht of the signal.
4. Record the max.channel power reading

Repeat above procedures until all the frequency measured were complete.



**Limit:** For 5.15-5.25GHz band  
The lesser of 50mW (17dBm) or  $4\text{dBm} + 10\log B$



**Measurement Result:**



For 5180-5240MHz Band:

CH	Frequency (MHz)	Reading Peak Power (dBm)	Cable Loss (dB)	Output Peak Power (dBm)	PEAK POWER LIMIT (dBm)	26dB Occupied Bandwidth (MHz)	Result
LOW	5180	10.84	0.5	11.34	17	18.70	PASS
MID	5210	10.90	0.5	11.40	17	18.60	PASS
HIGH	5240	11.02	0.5	11.52	17	18.75	PASS

CH Low 5180MHz

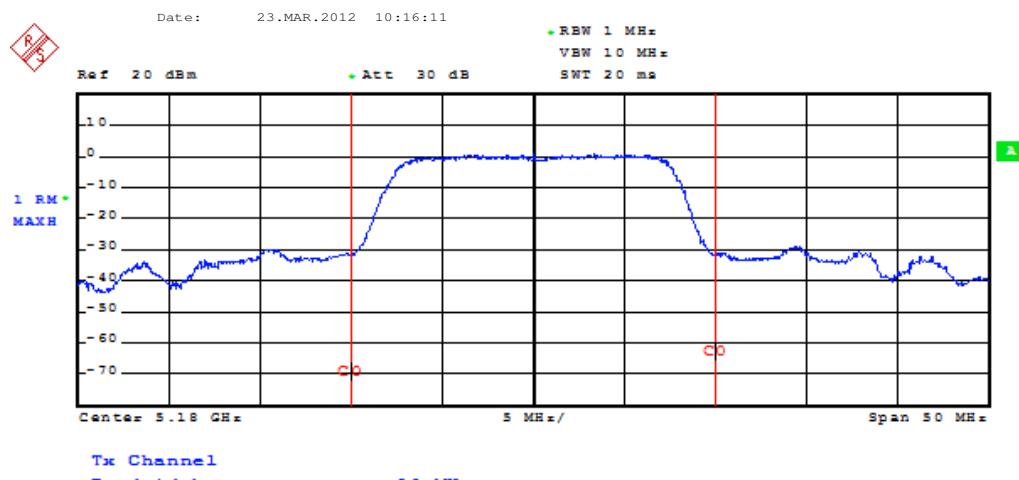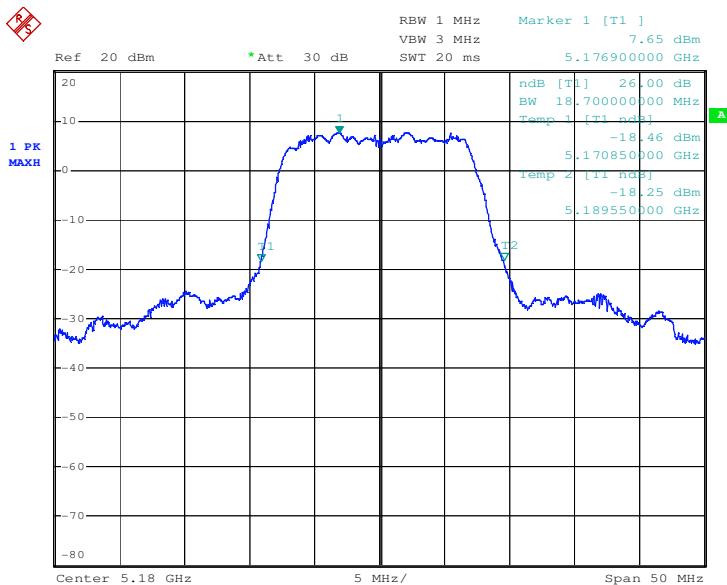

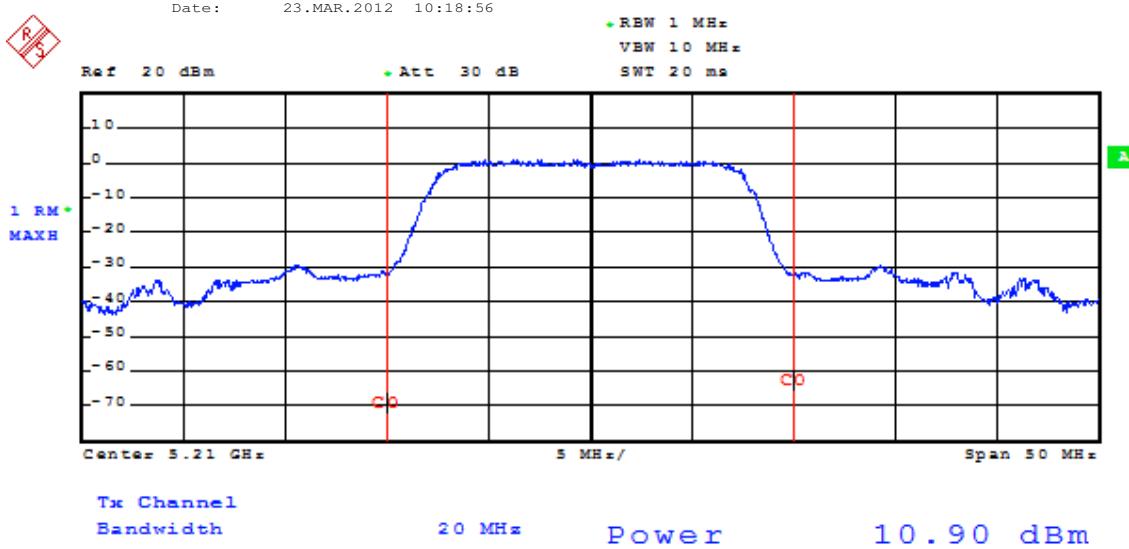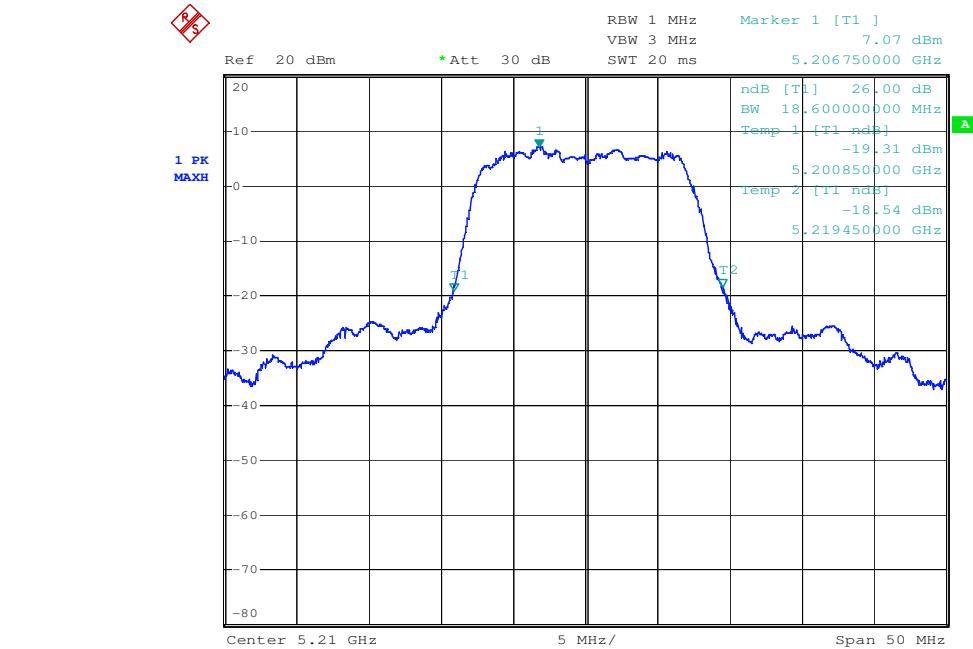**CH Mid 5210MHz**

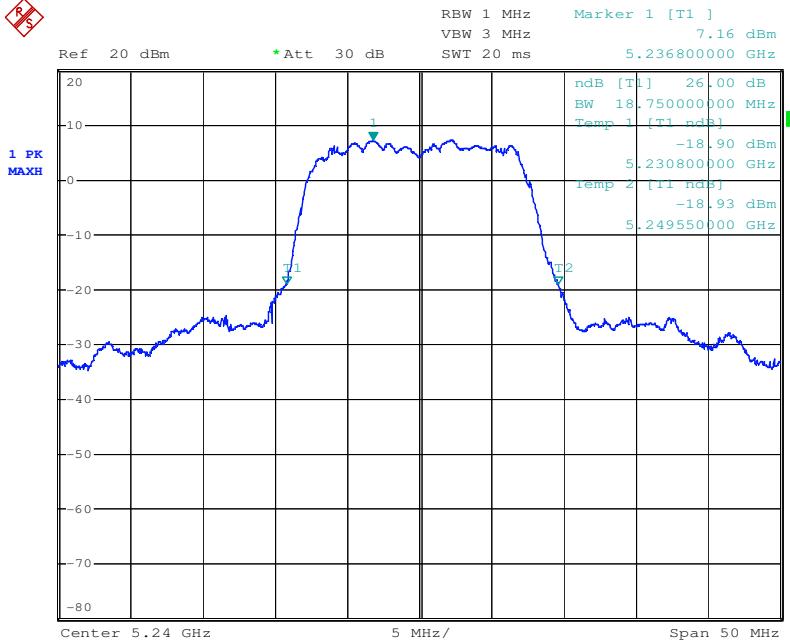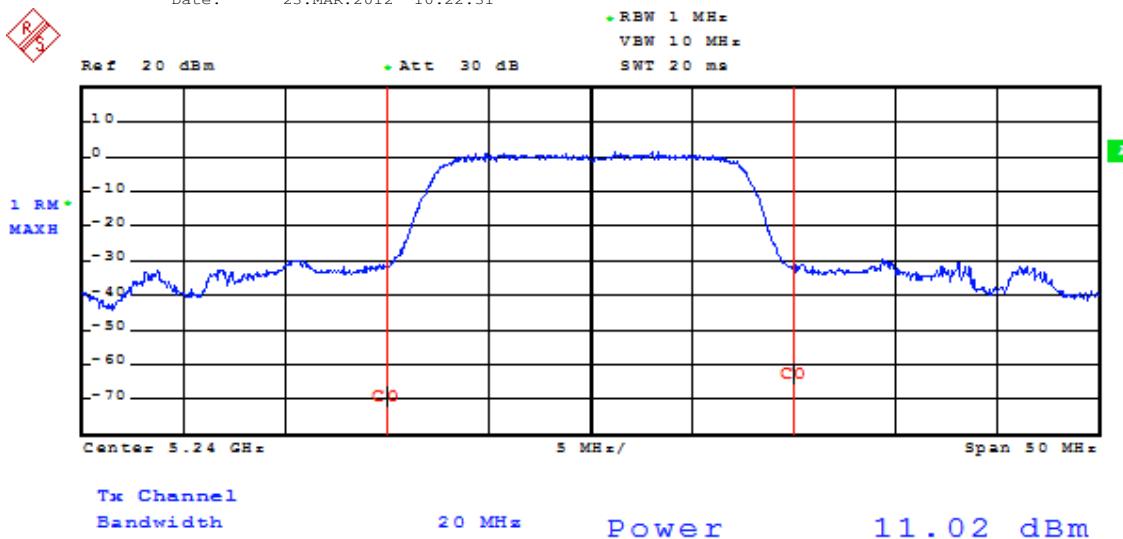
**CH High 5240MHz**

**A**

**A**

### 6.3 Peak Power Spectral Density

**Test Requirement:** FCC Part15 407(a)(1)  
RSS-210 Issue 8 Annex 9

**Test date:** Mar. 28, 2012

**Standard Applicable:** According to section 15.407(a),


(1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10log B, where B is the 26- dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Measurement Procedure:** The EUT was tested according to UNII test procedure of KDB 789033 for compliance to FCC 47CFR 15.407 requiremnts.  
Set RBW=1MHz,Set VBW=3MHz,Span=50MHz,Sweep time=Auto,Set detector=Peak detector.

**Measurement Result:**  
For 5180-5240MHz Band


CH	Frequency (MHz)	Reading (dBm)	Cable Loss (dB)	RF Power Density (dBm)	Limit (dBm)	Result
LOW	5180	1.37	0.5	1.87	4	PASS
MID	5210	1.22	0.5	1.72	4	PASS
HIGH	5240	0.50	0.5	1.00	4	PASS

Power Spectral Density Test Plot(CH 5180MHz)

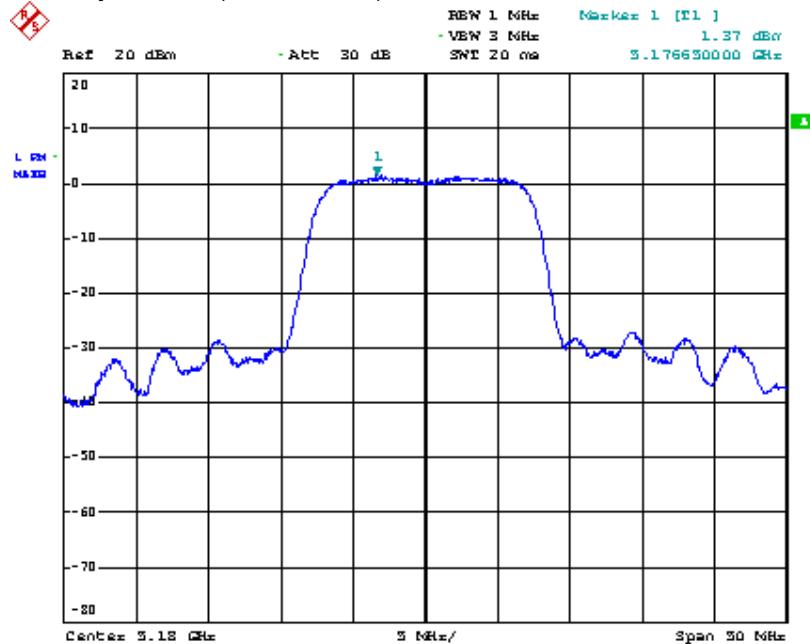


Date: 1.JAN.2000 06:04:43

Power Spectral Density Test Plot(CH 5210MHz)

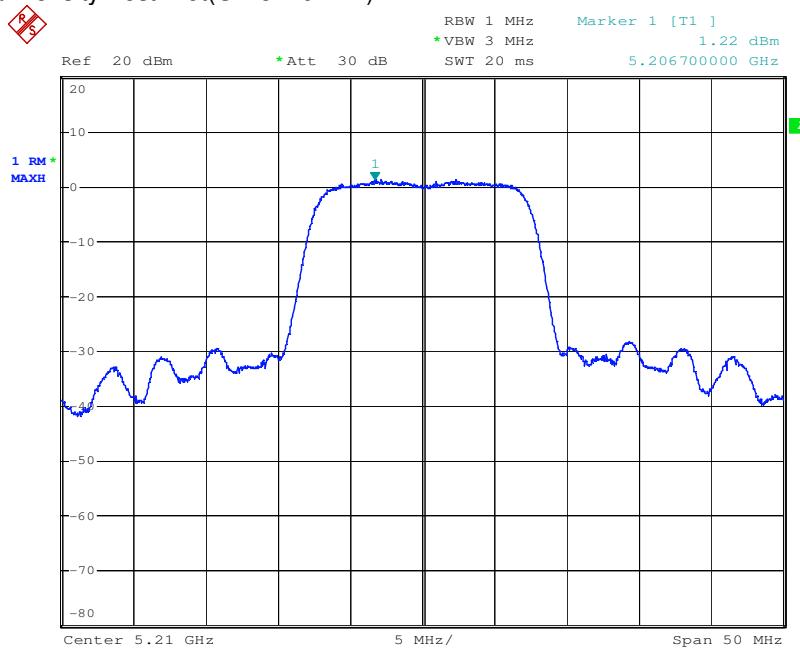

Date: 1.JAN.2000 06:06:35

Power Spectral Density Test Plot(CH 5240MHz)

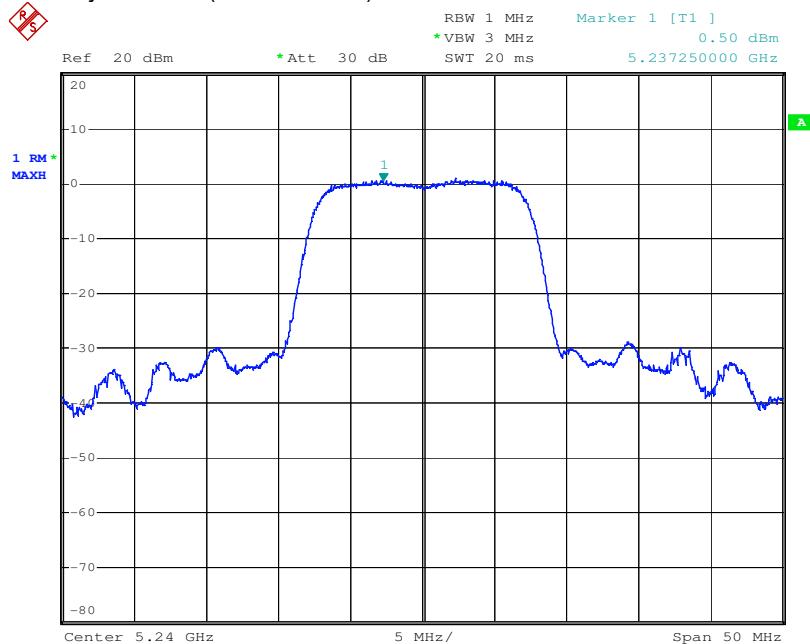

Date: 1.JAN.2000 06:07:51

## 6.4 Peak Power Excursion

**Test Requirement:** FCC Part15 407(a)(6)  
RSS-210 Issue 8 Annex 9

**Test date:** May. 07, 2012

**Standard Applicable:** According to section 15.407(a) and KDB 789033

(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

**Measurement Procedure:**

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emission bandwidth.
3. Find the maximum of the peak-max-hold spectrum.  
set RBW=1MHz,VBW  $\geq$  3MHz, Detector=peak, Trace mode=max-hold
4. Allow the sweeps to continue until the trace stabilizes.
5. Use the peak search function to find the peak of the spectrum.
6. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD

Note: PPSD reference section 6.3



**Limit:**

	Frequency Band	Limit
	5.15 – 5.25 GHz	13dB

**Measurement Result:**


For 5180-5240MHz Band

CH	Frequency (MHz)	Measure Value (dBm)	PPSD (dBm)	Peak power excursion (dB)	Limit (dBm)	Result
LOW	5180	7.35	1.37	5.98	13	PASS
MID	5210	6.68	1.22	5.46	13	PASS
HIGH	5240	7.39	0.50	6.89	13	PASS

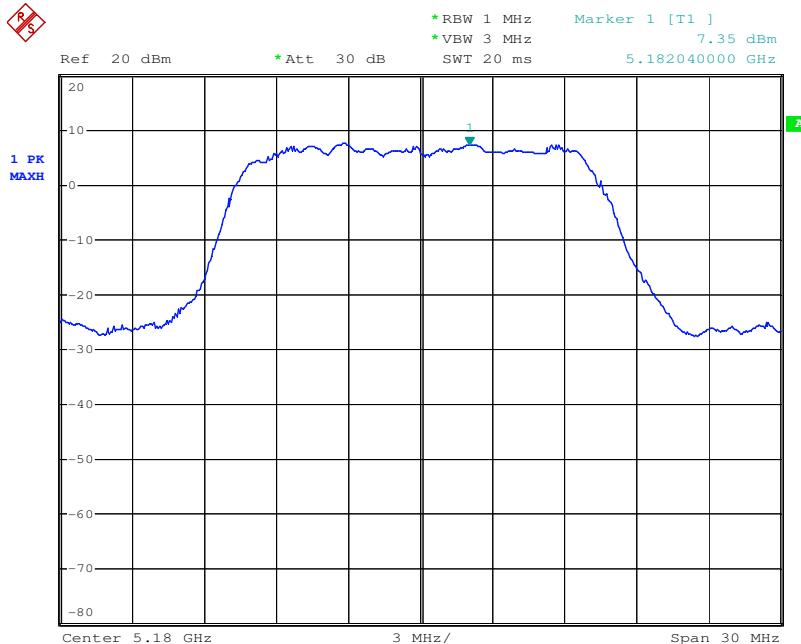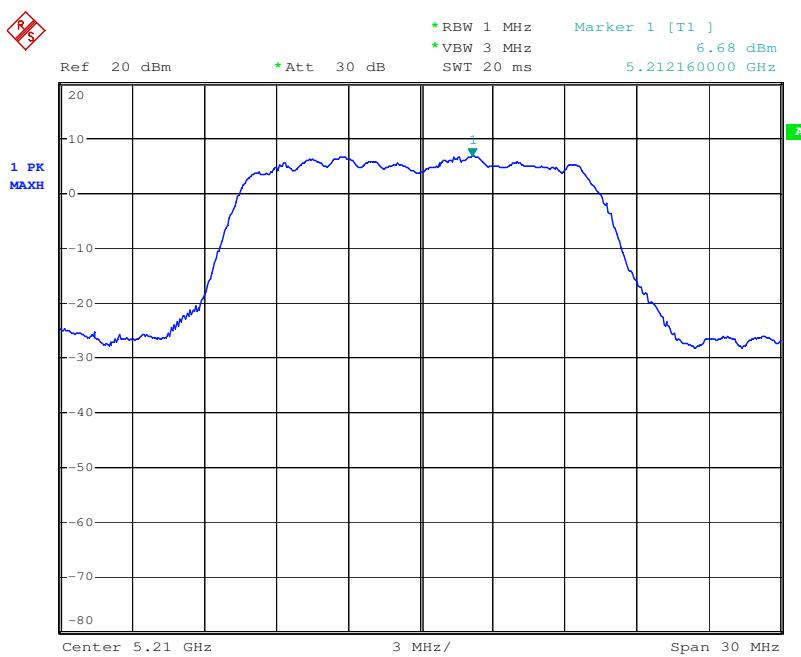**CH 5180MHz****CH 5210MHz**

Date: 21.MAR.2012 14:30:31

CH 5240MHz

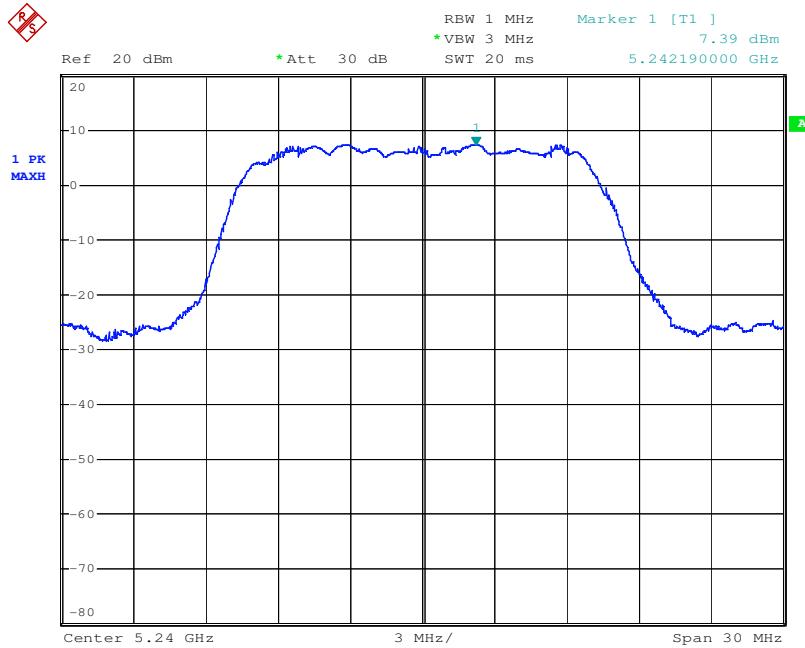

Date: 1.JAN.2000 06:50:48

## 6.5 Electric Field Strength Spurious Emissions

**Test Requirement:** FCC Part15 407(b)(1)(6)(7) and FCC Part 15.209

**Test date:** Mar. 12, 2012 to Mar. 19, 2012

**Standard Applicable:** According to section 15.407(b)

(1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

**Measurement Procedure:**

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Pre-test with the Horizontal, Vertical and other status towards to the test antenna. To find the worst status.
3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.

Test instrumentation resolution bandwidth 120 kHz and Quasi-Peak detector applies (30 MHz - 1000 MHz). 1MHz resolution bandwidth and Peak detector apply (1000 MHz – 25GHz )

Above 1GHz

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO.

5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

**Limit:**

**According to the general radiated limits in 15.209 as following**



Frequency (MHz)	Field strength (microvolts/meter)	Field strength (dBuV/m)	Measurement distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### **Limits of unwanted emission out of the restricted bands in 15.407**

Operation Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dB $\mu$ V/m) *
5150-5250	-27	68.3

Note: 1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength


$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

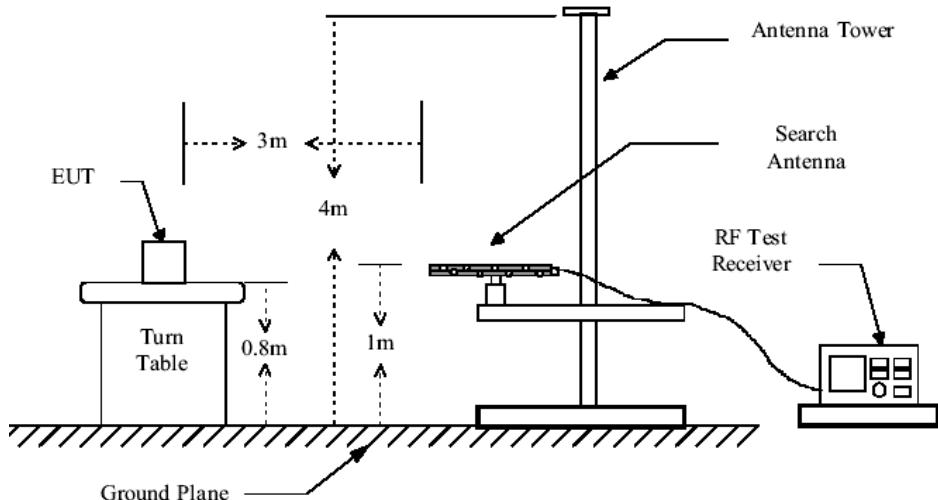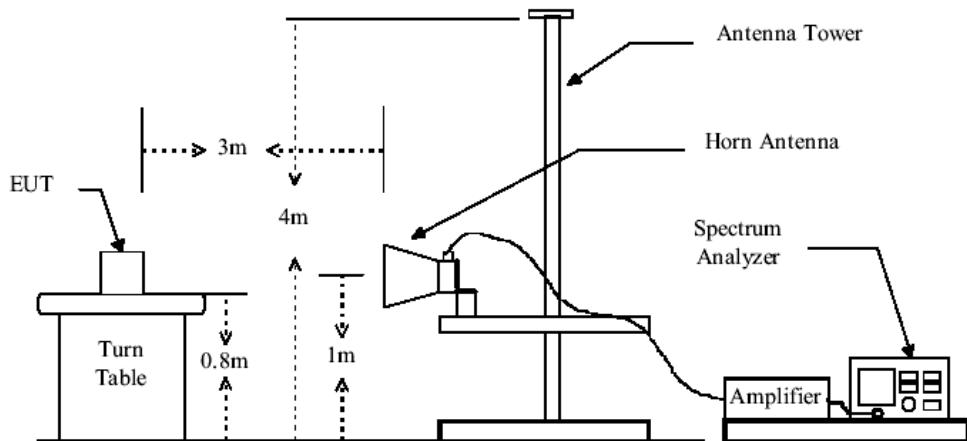
**Radiated Test Set-up:  
Radiated Emission Test Set-up, Frequency Below 1000MHz****Radiated Emission Test Set-up Frequency Over 1GHz**

Low noise amplifier was used below 1GHz, High pass Filter was used above 1GHz.

**Tests results:**

From the pre-test the worst status is the EUT Horizontal towards to the antenna. Below is the worst test results.

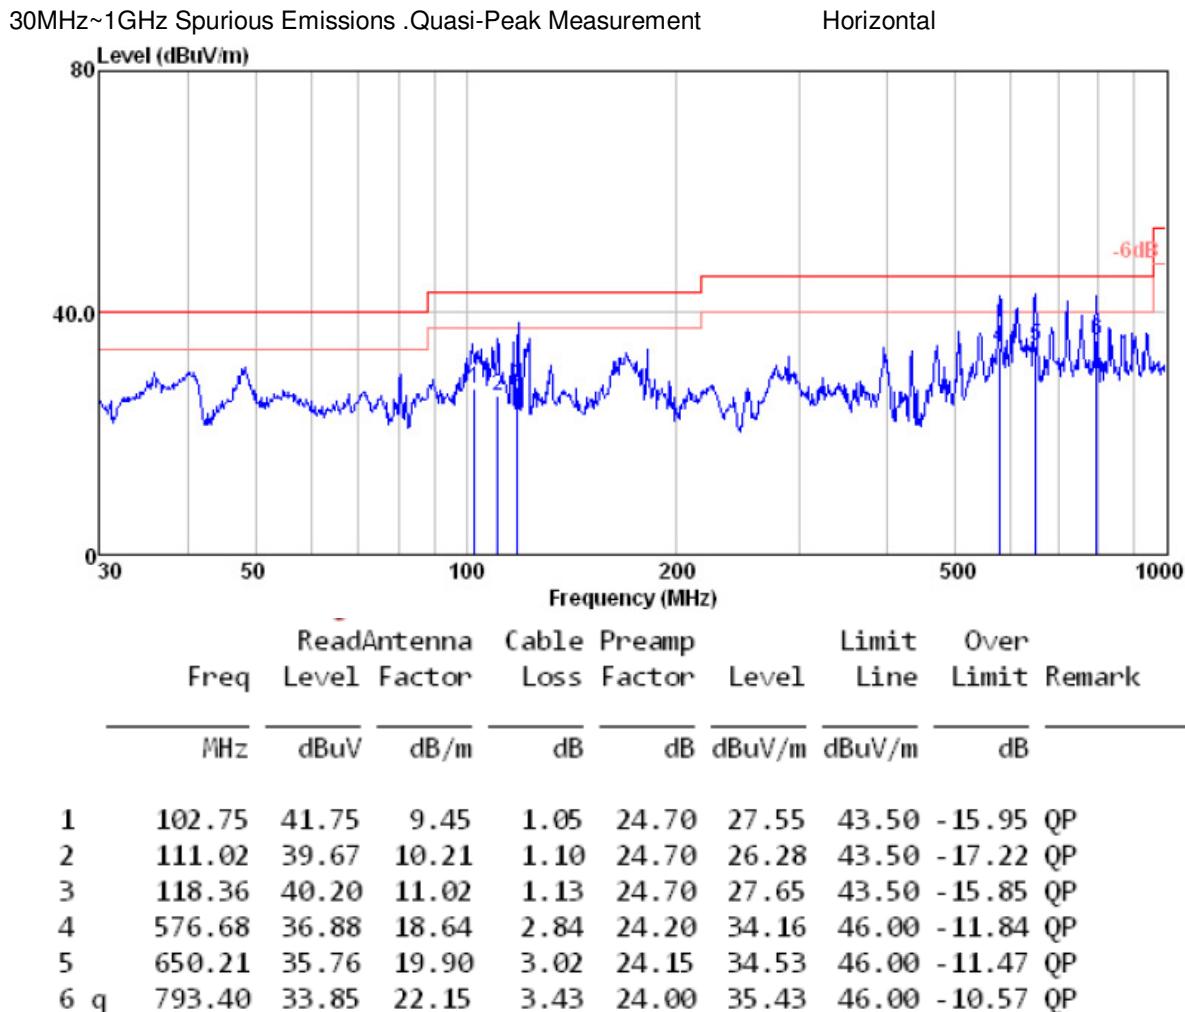**Operation Mode:5.2GHz Band**

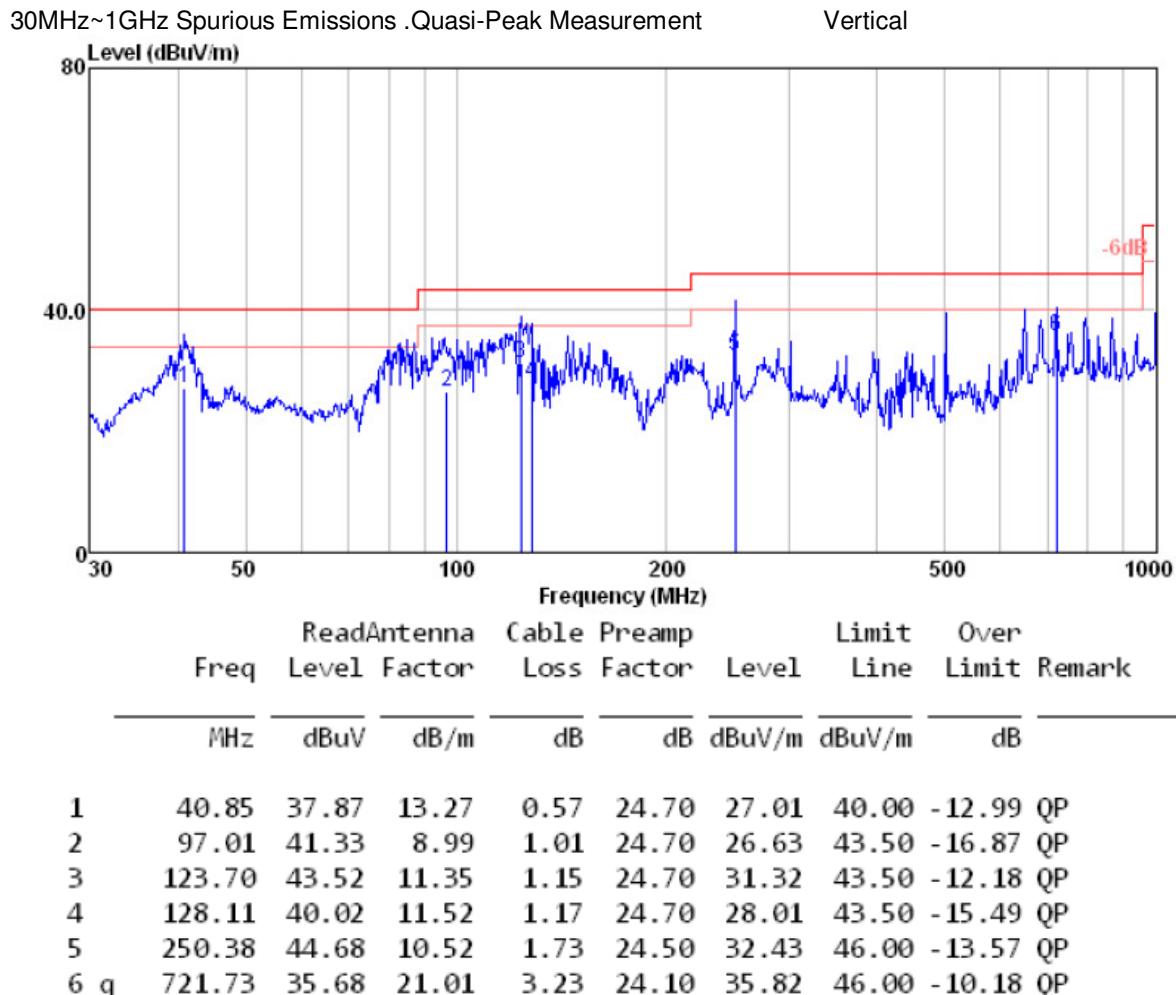

**Operation Mode: TX Low Mid CH 5180MHz**

1~40 GHz Harmonics &amp; Spurious Emissions.

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	AV Limit (dB $\mu$ V/m)	Antenna polarization
1474.39	25.1	3.5	0.5	42.2	48.35	35.25	54	Vertical
2780.41	27.6	4.8	0.6	42.5	46.22	36.72	54	Vertical
10364.73	38.1	9.8	1.2	42.3	37.48	44.28	54	Vertical
15546.68	40.2	12.2	1.6	45.0	36.82	45.82	54	Vertical
1359.82	25.1	3.5	0.5	42.2	52.83	39.73	54	Horizontal
2473.36	27.6	4.8	0.6	42.5	49.66	40.16	54	Horizontal
10366.38	38.1	9.8	1.2	42.3	38.58	45.38	54	Horizontal
15547.84	40.2	12.2	1.6	45.0	36.82	45.82	54	Horizontal

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Filter-Preamplifier Factor

**Operation Mode: TX Mid CH 5210MHz**

1~25 GHz Harmonics &amp; Spurious Emissions.

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	AV Limit (dB $\mu$ V/m)	Antenna polarization
1639.42	25.1	3.5	0.5	42.2	47.44	34.34	54	Vertical
3362.65	27.6	4.8	0.6	42.5	44.91	35.41	54	Vertical
10428.29	38.1	9.8	1.2	42.3	36.99	43.79	54	Vertical
15635.17	40.2	12.2	1.6	45.0	37.16	46.16	54	Vertical
1579.41	25.1	3.5	0.5	42.2	46.92	33.82	54	Horizontal
2338.74	27.6	4.8	0.6	42.5	44.20	34.70	54	Horizontal
10424.69	38.1	9.8	1.2	42.3	35.09	41.89	54	Horizontal
15633.15	40.2	12.2	1.6	45.0	35.97	44.97	54	Horizontal

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Filter-Preamplifier Factor

**Operation Mode:TX High CH 5240MHz**

1~25 GHz Harmonics &amp; Spurious Emissions.

**Peak Measurement:**

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	AV Limit (dB $\mu$ V/m)	Antenna polarization
1728.47	25.1	3.5	0.5	42.2	46.52	33.42	54	Vertical
2365.34	27.6	4.8	0.6	42.5	43.26	33.76	54	Vertical
10486.44	38.1	9.8	1.2	42.3	37.49	44.29	54	Vertical
15727.39	40.2	12.2	1.6	45	36.89	45.89	54	Vertical
1396.53	25.1	3.5	0.5	42.2	45.18	32.08	54	Horizontal
2472.94	27.6	4.8	0.6	42.5	43.65	34.15	54	Horizontal
10484.28	38.1	9.8	1.2	42.3	34.57	41.37	54	Horizontal
15725.97	40.2	12.2	1.6	45	34.62	43.62	54	Horizontal


The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Filter - Preamplifier Factor

## 6.6 Radiated Emission Band Edge

<b>Test Requirement:</b>	FCC Part15 407(b)(5)(7) and FCC Part 15.205
<b>Test date:</b>	May. 04.2012
<b>Standard Applicable:</b>	According to section 15.407(b)  (5) The above emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
<b>Measurement Distance:</b>	3m (Semi-Anechoic Chamber)
<b>Limit:</b>	40.0 dB $\mu$ V/m between 30MHz & 88MHz; 43.5 dB $\mu$ V/m between 88MHz & 216MHz; 46.0 dB $\mu$ V/m between 216MHz & 960MHz; AV 54.0 dB $\mu$ V/m PK 74.0dB $\mu$ V/m above 960MHz.
<b>Measurement Procedure:</b>	The EUT was setup according to ANSI 63.10,2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47 CFR 15.407 requirements. The EUT is placed on a turn table which is 0.8 m above ground. The turn table is rotated 360 degrees to determine to the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level  This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI 63.10:2009 on radiated measurement. Spectrum analyzer parameters setting as shown below: (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

### Radiated Emission Test Set-up Frequency Over 1GHz

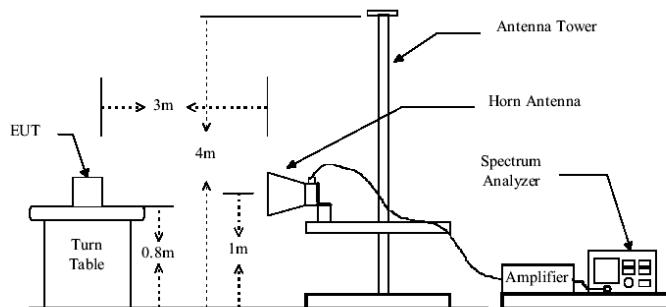


The field strength is calculated by adding the Antenna Factor, Preamplifier Factor & Cable Factor. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

**Radiated Bandedge Measurement Result:  
CH Low 5180MHz Radiated Bandedge(Horizontal)  
Horizontal, Peak Detector:**


CISPR22 RE 1GHz-6GHz PK

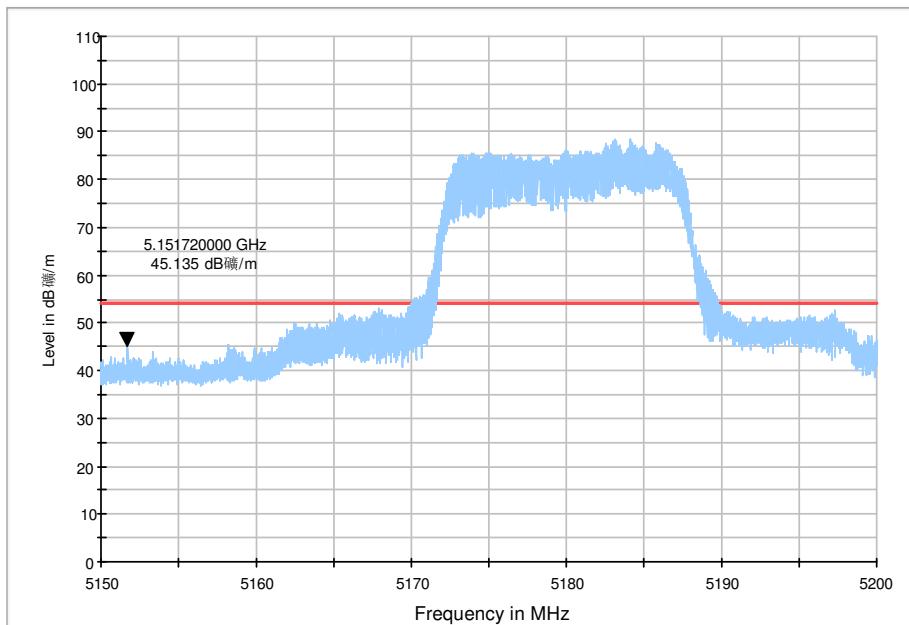

Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
5151.72	50.54	31.60	43.90	6.90	45.14	54.00	8.86

**CH Low 5180MHz Radiated Bandedge(Vertical)****Vertical, Peak Detector:**


CISPR22 RE 1GHz-6GHz PK

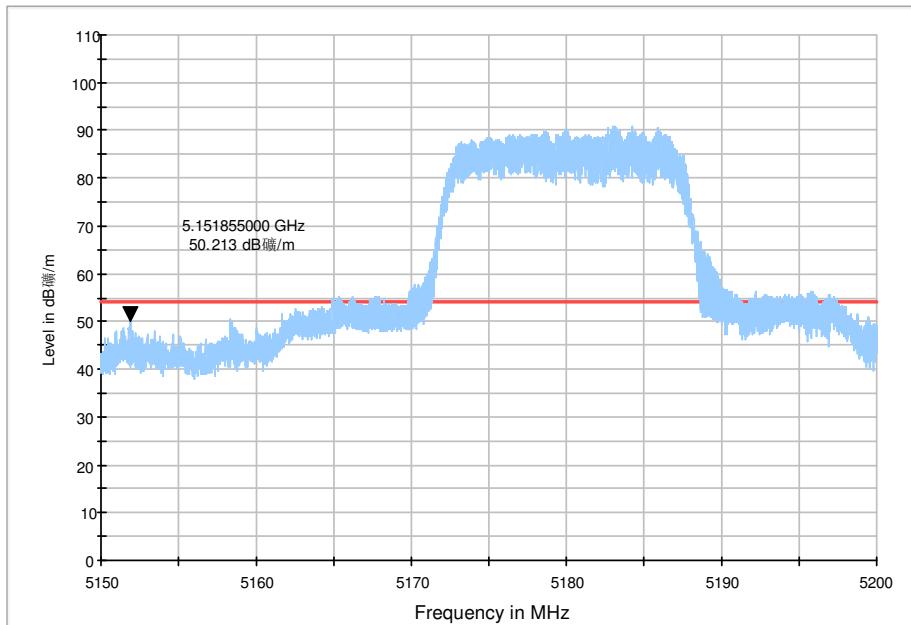

Frequency (MHz)	Peak Reading (dB <sub>uV</sub> )	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dB <sub>uV</sub> /m)	AV Limit (dB <sub>uV</sub> /m)	Margin (dB)
5151.86	55.61	31.60	43.90	6.90	50.21	54.00	3.79

**CH High 5240MHz Radiated Bandedge(Horizontal)****Horizontal, Peak Detector:**


CISPR22 RE 1GHz-6GHz PK

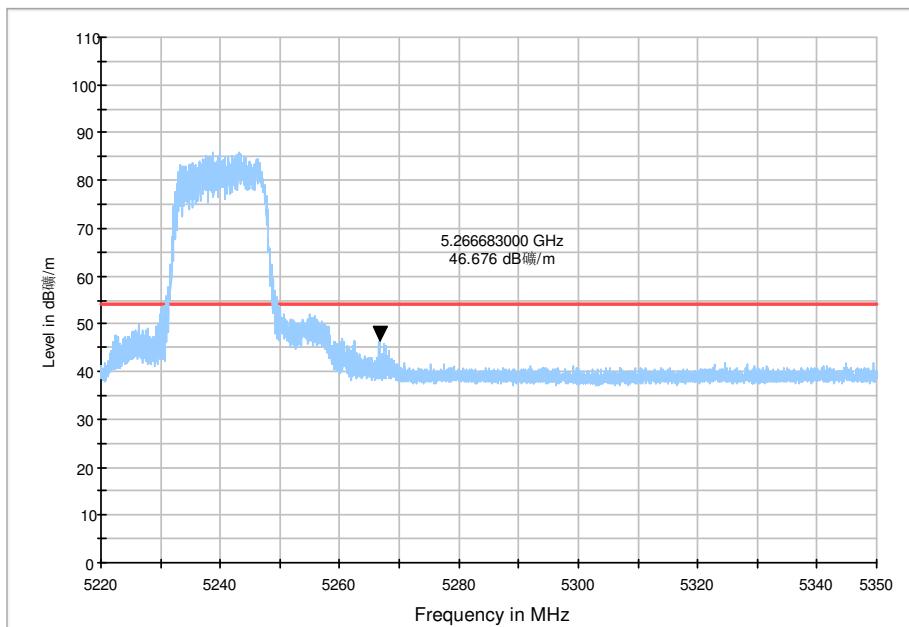

Frequency (MHz)	Peak Reading (dB $\mu$ V)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dB $\mu$ V/m)	AV Limit (dB $\mu$ V/m)	Margin (dB)
5266.68	52.08	31.60	43.90	6.90	46.68	54.00	7.32

**CH High 5240MHz Radiated Bandedge(Vertical)****Vertical, Peak Detector:**

CISPR22 RE 1GHz-6GHz PK

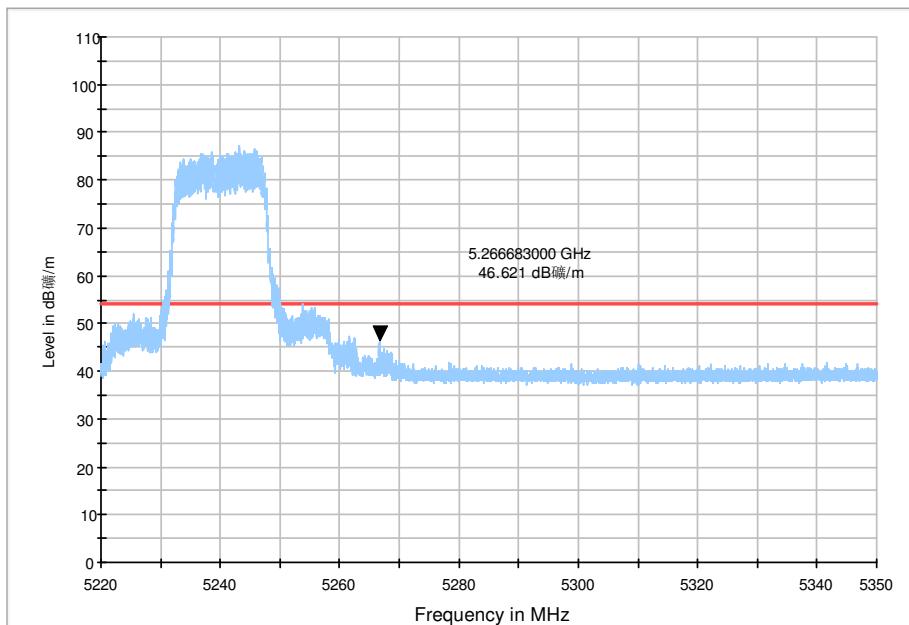

Frequency (MHz)	Peak Reading (dB <sub>μV</sub> )	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dB <sub>μV/m</sub> )	Peak Limit (dB <sub>μV/m</sub> )	Margin (dB)
5266.68	52.02	31.60	43.90	6.90	46.62	54.00	7.38

Remark: 1. The Peak Level less than the AV limit, so the AV level is no greater than the AV limit.

2. No any other emission which fall in restricted bands can be detected and be reported.

All frequencies within the "Restricted bands" have been evaluated to compliance. Section 15.205 Restricted bands of operation.

## 6.7 Undesirable emission Test

**Test Requirement:** FCC Part15 407 (b)(1)

**Test date:** May. 03, 2012

**Standard Applicable:** According to section 15.407(b)(1), the peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

Remark: the test using connected mode. And the antenna gain is 2dBi, so the limit should reduce 2dB. Thus the limited is -29dBm

**Measurement Procedure:**


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW=100KHz VBW=300KHz, Sweep = auto
6. Repeat above procedures until all frequency measured were complete.

Remark: the test using connected mode. And the antenna gain is 2dBi, so the limit should reduce 2dB. Thus the limited is -29dBm

## Measurement Result:


### Measurement Result For 5180-5240MHz Band

CH Low 30MHz-40GHz

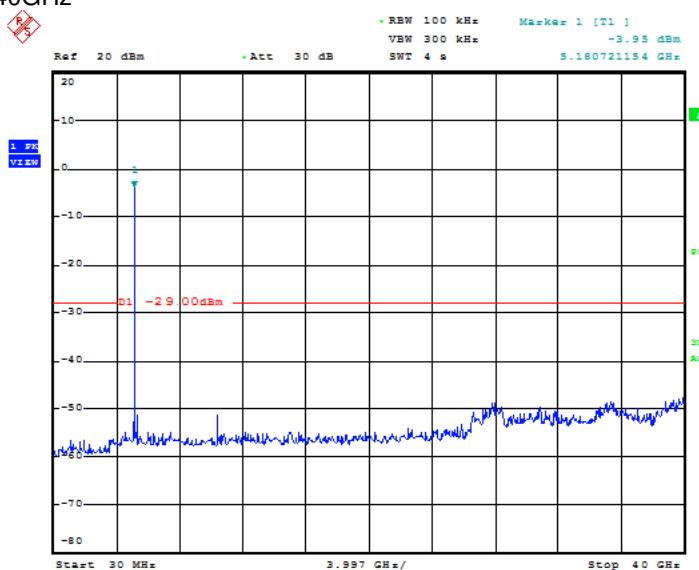


Date: 8.MAY.2012 14:26:22


### Band Edge (Conducted Mode)

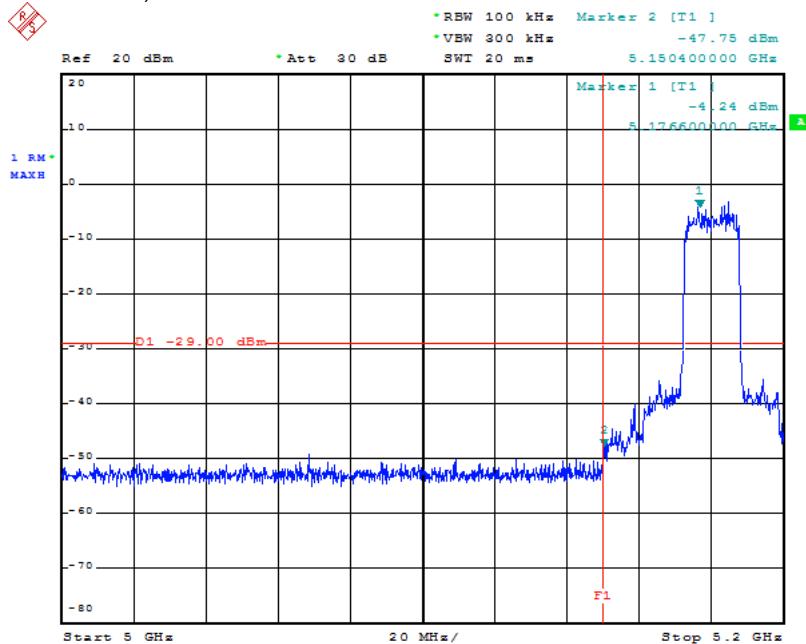


### Ch Mid 30MHz-40GHz

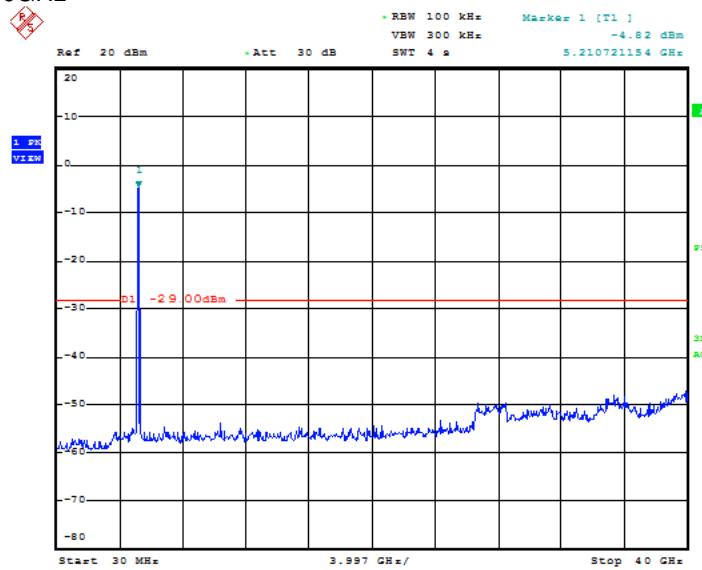

Date: 8.MAY.2012 14:27:40

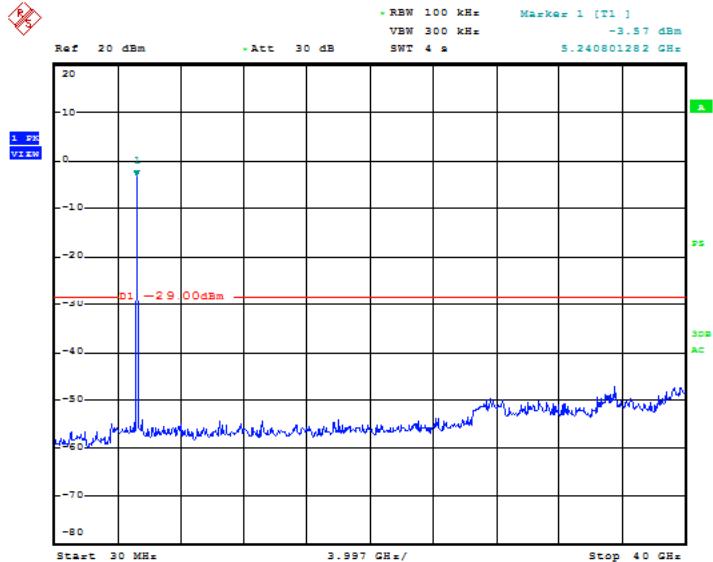**Ch High 30MHz-40GHz**


Date: 8.MAY.2012 14:29:10

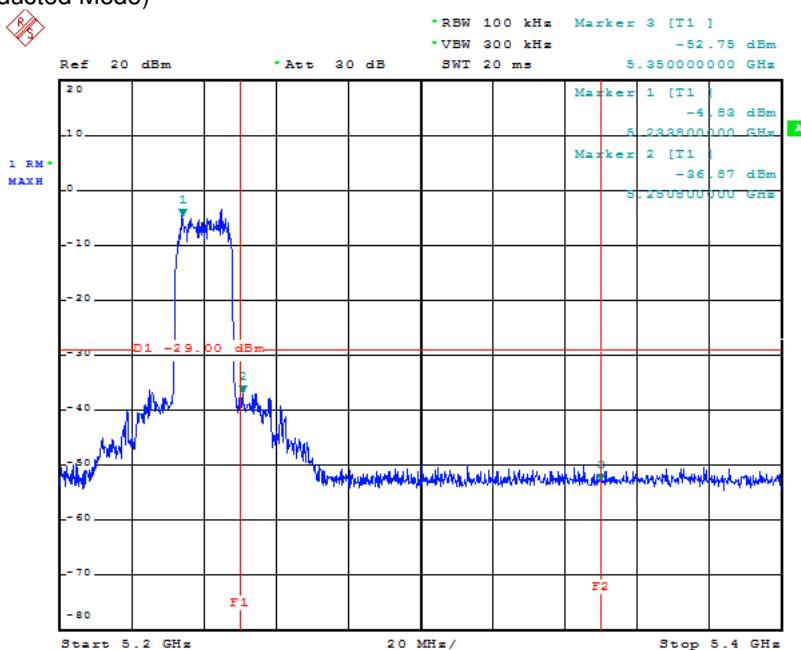**Band Edge (Conducted Mode)**


Date: 1.JAN.2000 23:17:04

## 6.8 Frequency stability

**Test requirement:** FCC Part15 407 (g)


**Test method:** July. 08, 2012

**Standard Applicable:** According to section 15.407(g), the manufacturers of UNII devices are responsible for ensuing frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user manual.

**Test Procedure:**

- 1) Set up the EUT on lowest channel and the highest channel
- 2) Test the EUT in the lowest channel and the Highest channel ,
- 3) Select the lowest operating frequency of the equipment under test.
- 4) Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
- 5) Adjust the centre frequency of spectrum analyzer on any frequency be measured.
- 6) Measure the frequency range by spectrum analyzer Marker function. set the Spectrum Analyzer as below:
  - Span: Wide enough to capture the complete power envelope, including all side bands
  - RBW: 100KHz
  - VBW: 100KHz
  - Detector function: RMS average
  - Trace mode: Max Hold
  - Sweep time: 1minute
- 7) Using the marker of the spectrum analyzer, find the the lowest frequency of the spectrum envelope This frequency shall be recorded as FL.
- 8) Select the highest operating frequency of the equipment under test.
- 9) Using the same set as step 6), find the highest frequency of the spectrum envelope. This frequency shall be recorded as FH.
- 10) Pretest the EUT at different transmission rate and worst case data in the report.

**Test setup:**

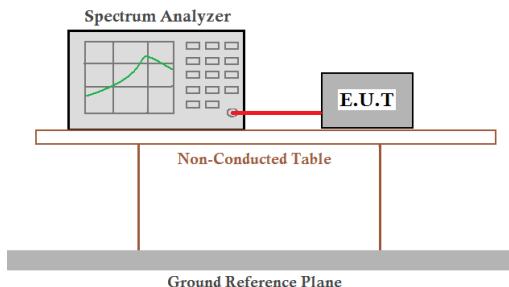

**Test Data:**

Test Conditions		Nominal Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Result
Temp (°C)	Volt (V DC)				
$T_{\text{nom}}$ (25)	$V_{\text{nom}}$ (5.0)	5180	5174.06	$F_L > 5150$	Pass
		5240	5248.95	$F_H < 5250$	Pass
$T_{\text{min}}$ (-20)	$V_{\text{min}}$ (5.0)	5180	5175.03	$F_L > 5150$	Pass
		5240	5249.02	$F_H < 5250$	Pass
	$V_{\text{max}}$ (4.25)	5180	5174.83	$F_L > 5150$	Pass
		5240	5248.74	$F_H < 5250$	Pass
$T_{\text{max}}$ (55)	$V_{\text{min}}$ (5.0)	5180	5174.94	$F_L > 5150$	Pass
		5240	5248.67	$F_H < 5250$	Pass
	$V_{\text{max}}$ (4.25)	5180	5174.88	$F_L > 5150$	Pass
		5240	5248.77	$F_H < 5250$	Pass

## 6.9 Conducted Emission Test

**Test Requirement:** FCC Part15.407 and FCC Part 15.207

**Test date:** Feb. 21, 2012

**Standard Applicable** According to section 15.207,frequency 150KHz to 30MHz shall not not exceed the limit table as blew.


Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

### EUT Setup

- 1.The conducted emission tests were performed in the test site,using the setup in accordance with the ANSI C63.10-2009.
- 2.EUT is charged with PC.The AC Power adaptor of PC was plug-in LISN.The rear of the EUT and periphearals were placed flushed with the rear of the tabletop.
- 3.The LISN was connected with 120V AC/60Hz power source.

### Measurement Result

Operation mode: Transmitter conducted to Receiver by wireless.  
Note:All test modes have been tested, below show the worst plots.

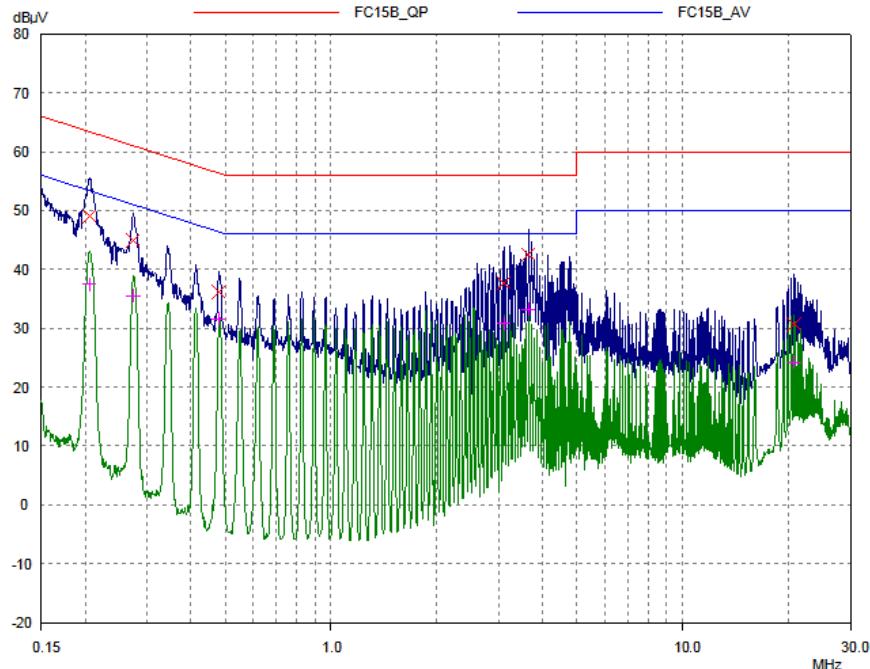
**L line:****Final Measurement Results**

Frequency MHz	QP Level dB $\mu$ V	QP Limit dB $\mu$ V	QP Delta dB
------------------	------------------------	------------------------	----------------

0.20561	49.03	63.38	14.35
0.27408	44.93	60.99	16.06
0.47929	36.10	56.35	20.25
3.09204	37.73	56.00	18.27
3.64189	42.51	56.00	13.49
20.75996	30.63	60.00	29.37

Frequency MHz	AV Level dB $\mu$ V	AV Limit dB $\mu$ V	AV Delta dB
------------------	------------------------	------------------------	----------------

0.20561	37.46	53.38	15.92
0.27408	35.58	50.99	15.41
0.47929	31.58	46.35	14.77
3.09204	30.80	46.00	15.20
3.64189	33.22	46.00	12.78
20.75996	24.26	50.00	25.74

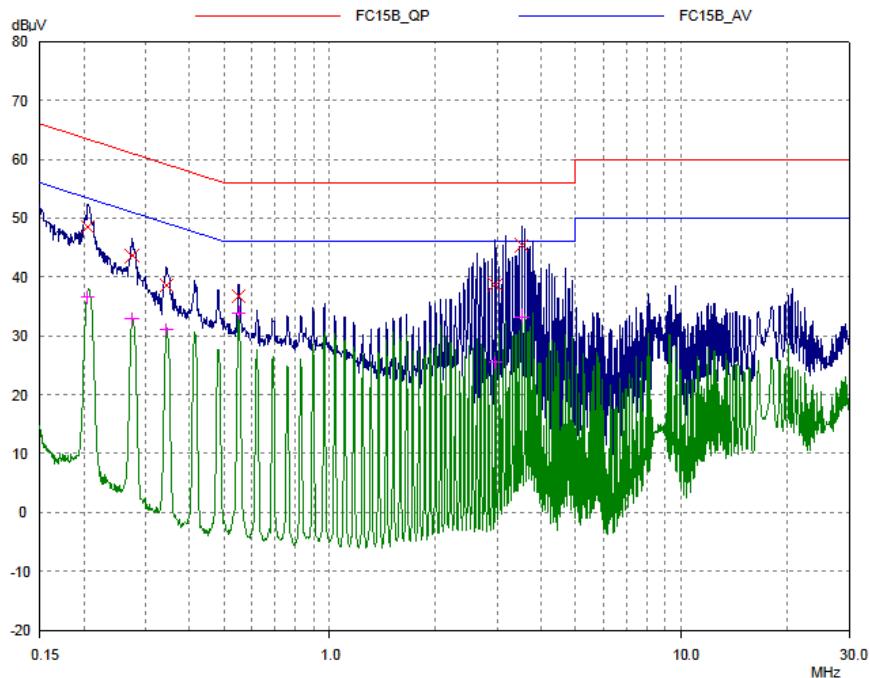**N Line:****Final Measurement Results**

Frequency MHz	QP Level dB $\mu$ V	QP Limit dB $\mu$ V	QP Delta dB
------------------	------------------------	------------------------	----------------

0.20479	48.51	63.41	14.90
0.27408	43.63	60.99	17.36
0.34274	38.59	59.14	20.55
0.55116	36.65	56.00	19.35
2.9592	38.68	56.00	17.32
3.51337	45.32	56.00	10.68

Frequency MHz	AV Level dB $\mu$ V	AV Limit dB $\mu$ V	AV Delta dB
------------------	------------------------	------------------------	----------------

0.20479	36.50	53.41	16.91
0.27408	32.79	50.99	18.20
0.34274	31.07	49.14	18.07
0.55116	33.92	46.00	12.08
2.9592	25.49	46.00	20.51
3.51337	33.29	46.00	12.71


## 6.10 Occupied Bandwidth Test

<b>Test Requirement:</b>	RSS-Gen Issue 3 Clause 4.6.1
<b>Test date:</b>	Jun. 13, 2012
<b>Standard Applicable</b>	According to the section RSS-Gen Issue 3 Clause 4.6.1
<b>EUT Setup</b>	The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the resolutions set at 100kHz, the video bandwidth set at 300kHz.


**Measurement Result:****For 5180-5240MHz Band**

Channel	Frequency (MHz)	Bandwidth (MHz)
LOW	5180	15.03
MID	5210	15.00
HIGH	5240	14.97


## Channel 5180MHz

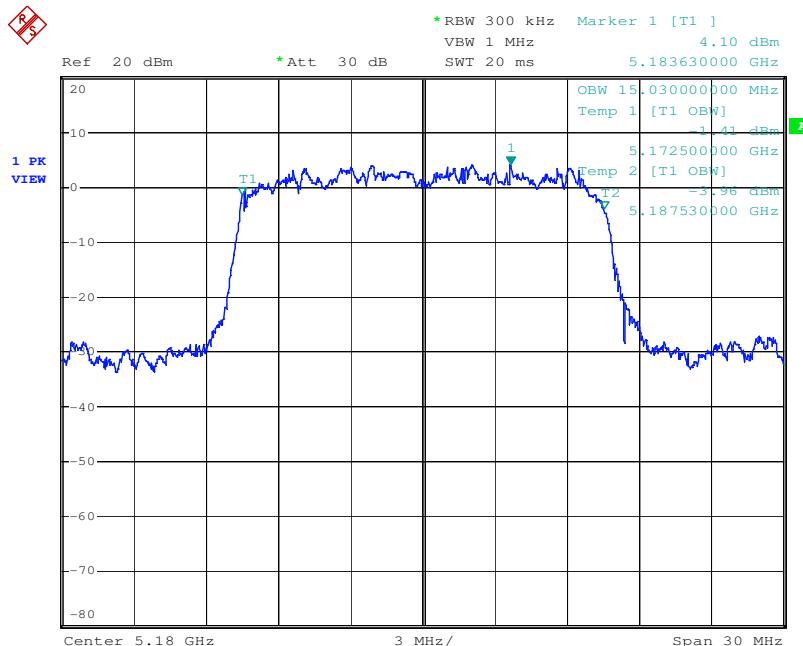

Date: 1.JAN.2000 02:29:25

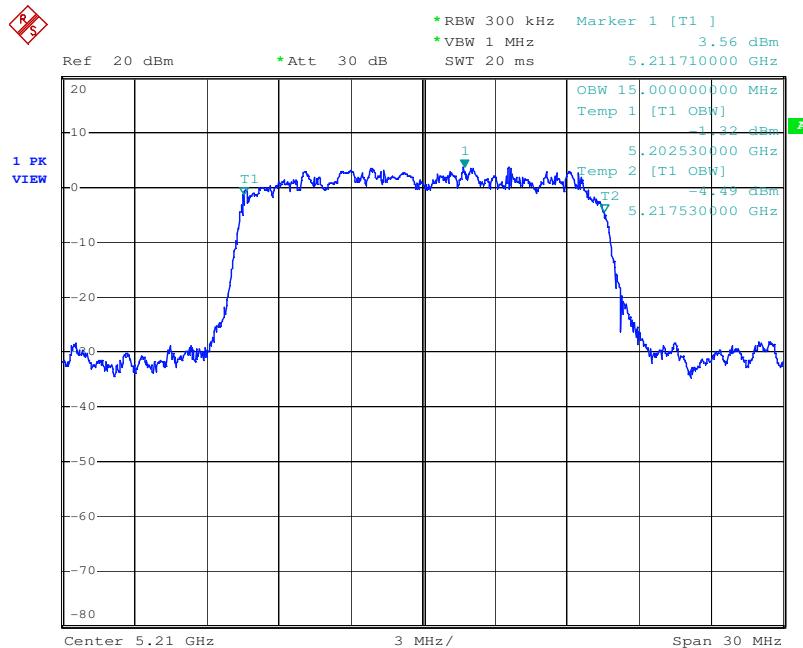**Channel 5210MHz**


Date: 1.JAN.2000 02:32:23

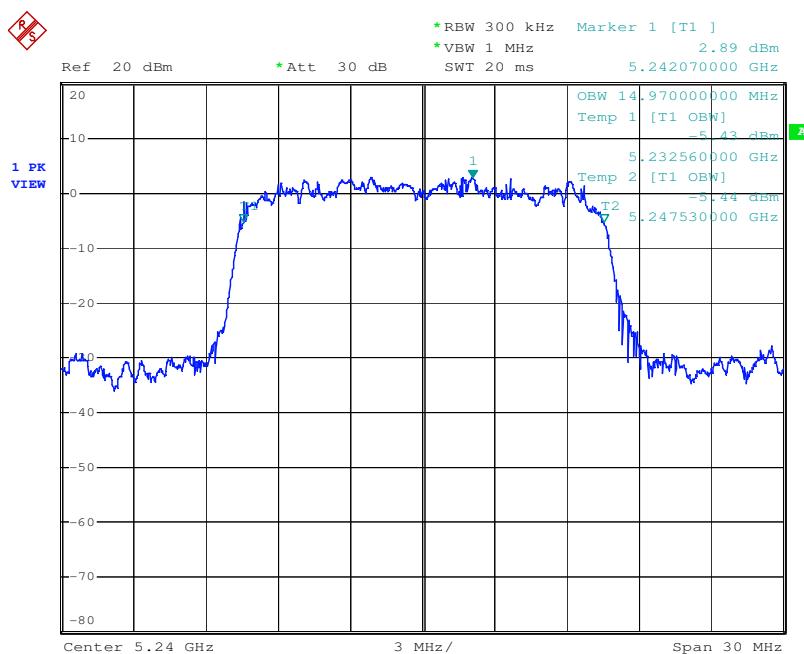**Channel 5240MHz**


Date: 1.JAN.2000 02:33:10

***End of Report***