



## FCC/IC - TEST REPORT

Report Number	:	<b>60.790.16.701.01R03</b>	Date of Issue:	<u>March 15, 2016</u>
Model	:	<u>190677</u>		
Product Type	:	<u>MONSTER ON EAR BLUETOOTH HEADPHONES</u>		
Applicant	:	<u>Monster, LLC</u>		
Address	:	<u>3837 Bay Lake Trail Suite 103 North Las Vegas, NV 89030</u>		
		<u>United States</u>		
Production Facility	:	<u>Charter Media (Dongguan) Co., Ltd.</u>		
Address	:	<u>Dabandi Industrial Zone, Daning District, Humen Town,</u>		
		<u>Dongguan City, Guangdong Province 523930, P. R. China</u>		
Test Result	:	<input checked="" type="checkbox"/> <b>Positive</b>	<input type="checkbox"/> <b>Negative</b>	
Total pages including Appendices	:	<u>43</u>		

TÜV SÜD HONG KONG LTD. is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025. TÜV SÜD HONG KONG LTD. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations TÜV SÜD HONG KONG LTD. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD HONG KONG LTD. issued reports. This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

## 1 Table of Contents

1	Table of Contents .....	2
2	Details about the Test Laboratory .....	3
3	Description of the Equipment Under Test .....	4
4	Summary of Test Standards .....	5
5	Summary of Test Results .....	6
6	General Remarks .....	7
7	Test Setups .....	8
8	Systems test configuration .....	9
9	Technical Requirement .....	10
9.1	Conducted Emission .....	10
9.2	Conducted peak output power .....	13
9.3	20 dB bandwidth and 99% Occupied Bandwidth .....	15
9.4	Carrier Frequency Separation .....	22
9.5	Number of hopping frequencies .....	25
9.6	Dwell Time .....	27
9.7	Spurious RF conducted emissions .....	30
9.8	Band edge testing .....	34
9.9	Spurious radiated emissions for transmitter .....	37
10	Test Equipment List .....	40
11	System Measurement Uncertainty .....	41
12	Setup Photographs of EUT .....	42

## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Hong Kong Ltd.  
3/F, West Wing, Lakeside 2,  
10 Science Park West Avenue,  
Science Park, Shatin, Hong Kong

#### Test Site 2

Company name: Hong Kong Productivity Council  
LG1, HKPC Building,  
78 Tat Chee Avenue,  
Kowloon, Hong Kong

FCC Registration Number: 90656

IC Registration Number : 4780A-1

### 3 Description of the Equipment Under Test

Product: MONSTER ON EAR BLUETOOTH HEADPHONES

Model no.: 190677

Options and accessories: Nil

Rating: DC3.7V Supplied by Li-ion Rechargeable Battery  
DC5.0V Charged by the mini-USB port

RF Transmission Frequency: 2402MHz-2480MHz

No. of Operated Channel: 79

Modulation: GFSK,  $\pi/4$ -DQPSK, 8-DPSK

Antenna Type: PIF antenna

Antenna Gain: 2dBi

Description of the EUT: The Equipment Under Test (EUT) is a Bluetooth headset operated at 2.4GHz

## 4 Summary of Test Standards

<b>Test Standards</b>	
FCC Part 15 Subpart C 10-1-2015 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-247 Issue 1 2015	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices

## 5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C					
Test Condition			Pages	Test Result	Test site
§15.207	RSS-GEN 8.8	Conducted emission AC power port	10	Pass	Site 2
§15.247(b)(1)	RSS-247 Clause 5.4(2)	Conducted peak output power	13	Pass	Site 2
§15.247(e)	RSS-247 Clause 5.2(2)	Power spectral density*	--	N/A	
§15.247(a)(2)	RSS-247 Clause 5.2(1)	6dB bandwidth	--	N/A	
§15.247(a)(1)	RSS-247 Clause 5.1(1)	20dB bandwidth and 99% Occupied Bandwidth	15	Pass	Site 2
§15.247(a)(1)	RSS-247 Clause 5.1(2)	Carrier frequency separation	22	Pass	Site 2
§15.247(a)(1)(iii)	RSS-247 Clause 5.1(4)	Number of hopping frequencies	25	Pass	Site 2
§15.247(a)(1)(iii)	RSS-247 Clause 5.1(4)	Dwell Time	27	Pass	Site 2
§15.247(d)	RSS-247 Clause 5.5	Spurious RF conducted emissions	30	Pass	Site 2
§15.247(d)	RSS-247 Clause 5.5	Band edge	34	Pass	Site 2
§15.247(d) & §15.209 &	RSS-247 Clause 5.5 & RSS-GEN 6.13	Spurious radiated emissions for transmitter	37	Pass	Site 2
§15.203	RSS-GEN 8.3	Antenna requirement	See note 1	Pass	Site 2

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a PIFA antenna, which gain is 2dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: RJE190677, IC: 5153A-190677 complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C, RSS 247 and RSS-Gen rules.

This report is for the BT3.0 part.

### SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment Under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.


Sample Received Date: January 4, 2016

Testing Start Date: February 17, 2016

Testing End Date: February 23, 2016

- TÜV SÜD HONG KONG LTD. -

Reviewed by:



Phoebe Hu  
EMC Project Manager


Prepared by:




Felix Li  
EMC Project Engineer

## 7 Test Setups


### 7.1 AC Power Line Conducted Emission test setups

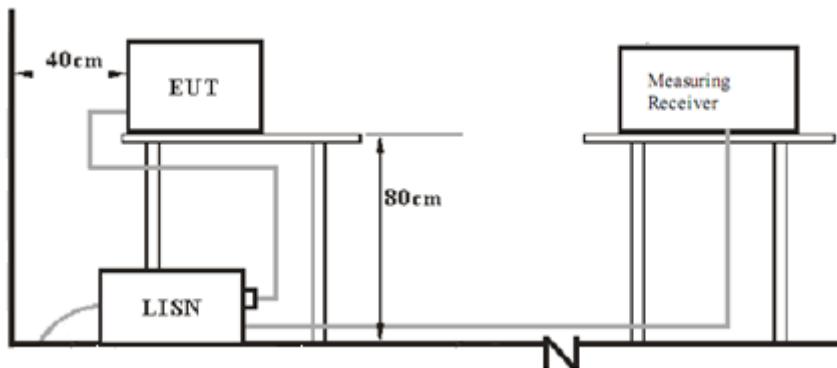

### 7.2 Radiated test setups

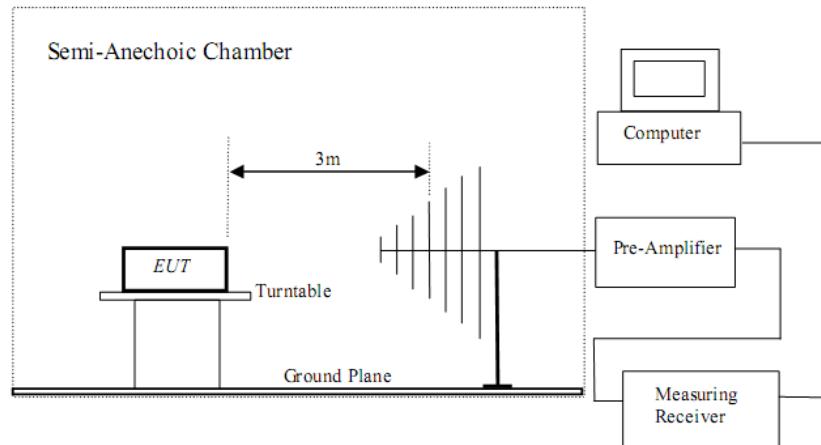

### 7.3 Conducted RF test setups



## 8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
PC	lenovo	X220	---

Test software: Blue test 3.0, which used to control the EUT in continues transmitting mode

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power

## 9 Technical Requirement

### 9.1 Conducted Emission

#### Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line


#### Limit

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

## Conducted Emission


Product Type : MONSTER ON EAR BLUETOOTH HEADPHONES  
 M/N : 190677  
 Operating Condition : Charging & BT  
 Test Specification : Live  
 Comment : AC 120V/60Hz

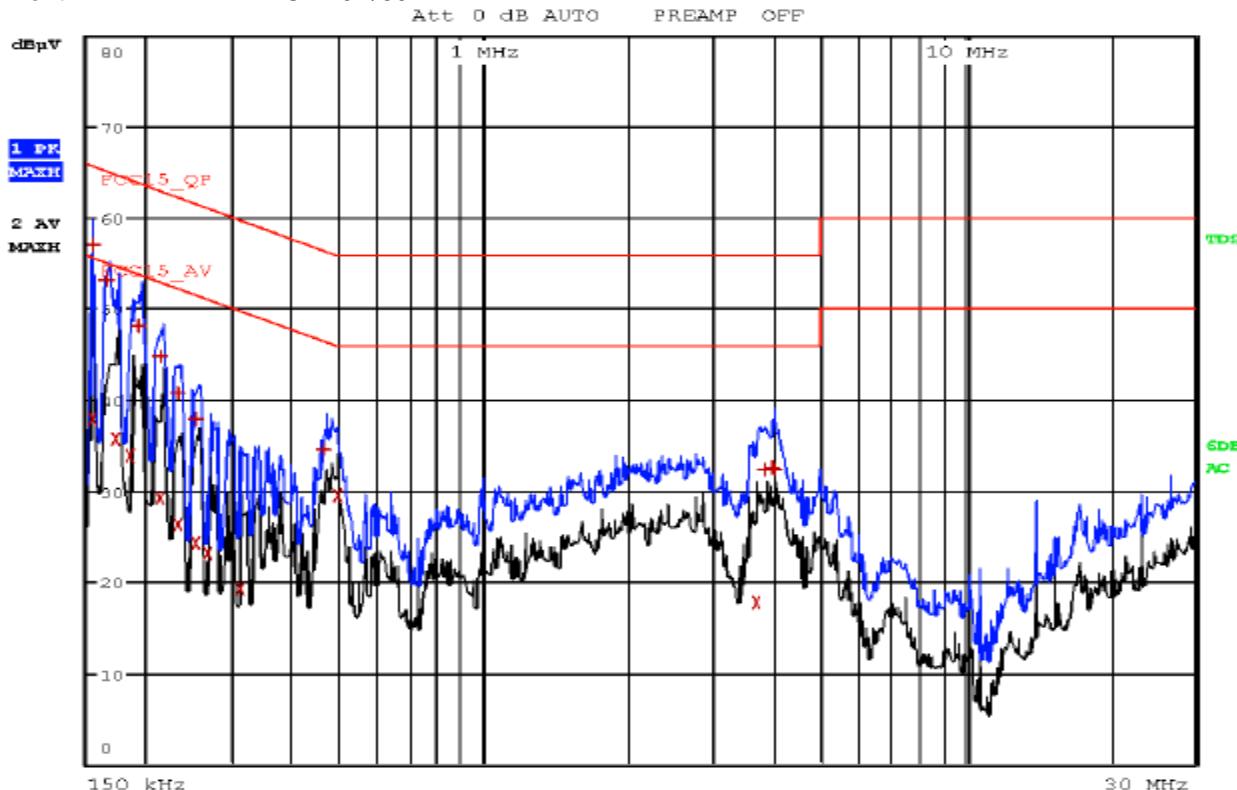

Trace	Frequency	Level (dBμV)	Detector	Delta Limit/dB
1	154.0000000000 kHz	57.05	Quasi Peak	-8.73
2	154.0000000000 kHz	37.85	Average	-17.93
1	166.0000000000 kHz	53.22	Quasi Peak	-11.94
2	174.0000000000 kHz	35.68	Average	-19.09
2	186.0000000000 kHz	33.87	Average	-20.34
1	194.0000000000 kHz	48.17	Quasi Peak	-15.70
1	214.0000000000 kHz	44.76	Quasi Peak	-18.29
2	214.0000000000 kHz	29.16	Average	-23.89
1	234.0000000000 kHz	40.78	Quasi Peak	-21.53
2	234.0000000000 kHz	26.36	Average	-25.94
1	254.0000000000 kHz	37.94	Quasi Peak	-23.69
2	254.0000000000 kHz	24.35	Average	-27.27
2	270.0000000000 kHz	23.03	Average	-28.09
2	310.0000000000 kHz	19.24	Average	-30.73
1	466.0000000000 kHz	34.47	Quasi Peak	-22.11
2	494.0000000000 kHz	29.44	Average	-16.66
2	3.6900000000 MHz	17.73	Average	-28.27
1	3.8300000000 MHz	32.32	Quasi Peak	-23.68
1	3.9700000000 MHz	32.56	Quasi Peak	-23.44
1	3.9900000000 MHz	32.32	Quasi Peak	-23.68

## Conducted Emission

Product Type : MONSTER ON EAR BLUETOOTH HEADPHONES  
 M/N : 190677  
 Operating Condition : Charging & BT  
 Test Specification : Neutral  
 Comment : AC 120V/60Hz

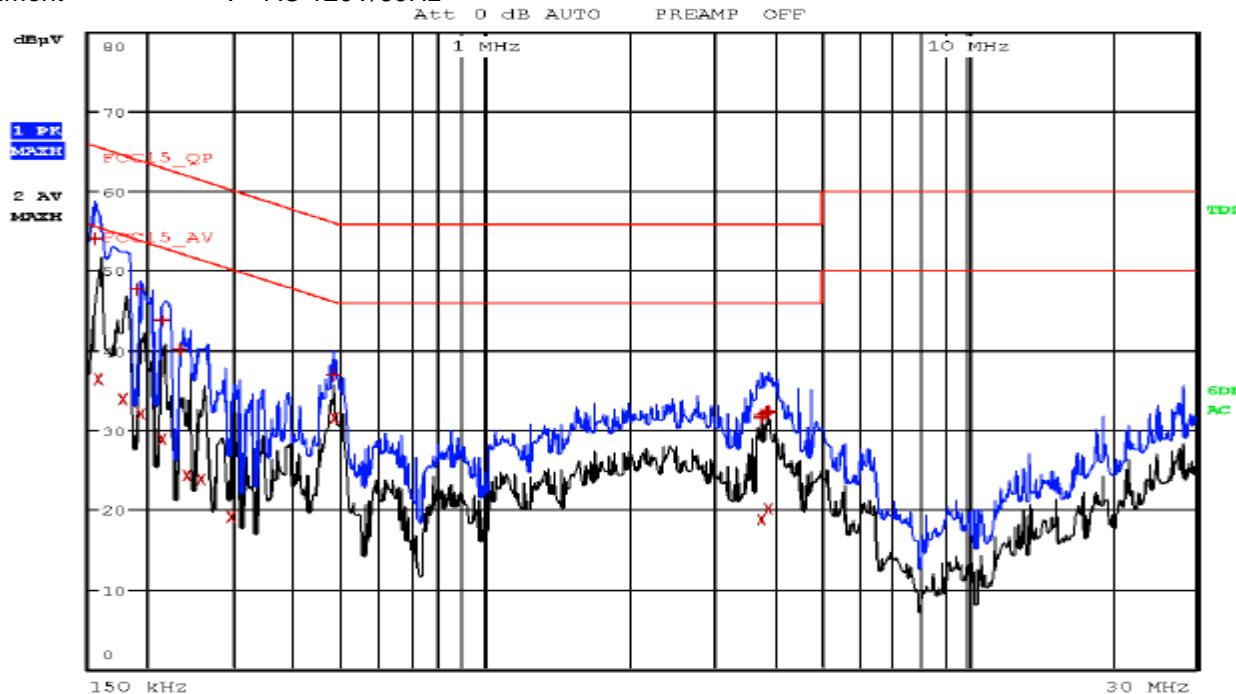

Trace	Frequency	Level (dB $\mu$ V)	Detector	Delta Limit/dB
1	154.000000000 kHz	53.97	Quasi Peak	-11.81
2	158.000000000 kHz	36.36	Average	-19.21
2	178.000000000 kHz	33.80	Average	-20.78
1	190.000000000 kHz	47.67	Quasi Peak	-16.37
2	194.000000000 kHz	32.03	Average	-21.84
1	214.000000000 kHz	43.70	Quasi Peak	-19.35
2	214.000000000 kHz	28.90	Average	-24.15
1	234.000000000 kHz	40.08	Quasi Peak	-22.22
2	242.000000000 kHz	24.28	Average	-27.74
2	258.000000000 kHz	23.81	Average	-27.68
2	298.000000000 kHz	19.11	Average	-31.18
1	482.000000000 kHz	36.93	Quasi Peak	-19.38
2	482.000000000 kHz	31.45	Average	-14.85
1	3.738000000 MHz	31.77	Quasi Peak	-24.23
2	3.738000000 MHz	18.81	Average	-27.19
1	3.758000000 MHz	31.56	Quasi Peak	-24.44
1	3.814000000 MHz	32.08	Quasi Peak	-23.92
1	3.830000000 MHz	32.16	Quasi Peak	-23.84
1	3.862000000 MHz	32.42	Quasi Peak	-23.58
2	3.862000000 MHz	20.05	Average	-25.95

## 9.2 Conducted peak output power

### Test Method

1. Use the following spectrum analyzer settings:  
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
RBW > the 20 dB bandwidth of the emission being measured,  $VBW \geq RBW$ ,  
Sweep = auto, Detector function = peak, Trace = max hold
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power

### Limits

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	$\leq 1$	$\leq 30$

## Conducted peak output power

### Bluetooth Mode GFSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	1.65	Pass
Middle channel 2441MHz	4.38	Pass
High channel 2480MHz	4.35	Pass

### Bluetooth Mode π/4-DQPSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	1.74	Pass
Middle channel 2441MHz	3.83	Pass
High channel 2480MHz	3.89	Pass

### Bluetooth Mode 8DPSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	2.15	Pass
Middle channel 2441MHz	4.34	Pass
High channel 2480MHz	4.39	Pass

## 9.3 20 dB bandwidth and 99% Occupied Bandwidth

### Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Limit

#### Limit [kHz]

---


N/A

## 20 dB bandwidth and 99% Occupied Bandwidth

Bluetooth Mode GFSK Modulation test result


Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	924.7	850.94	--	Pass
2441	924.7	842.26	--	Pass
2480	929.1	842.26	--	Pass

2402MHz

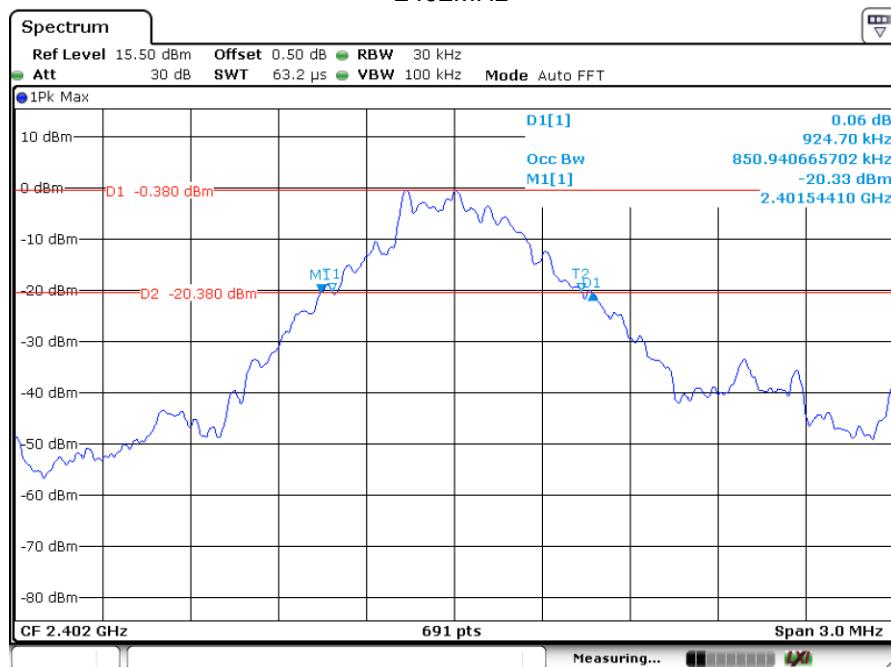


Date: 19.FEB.2016 10:29:47

## 2441MHz

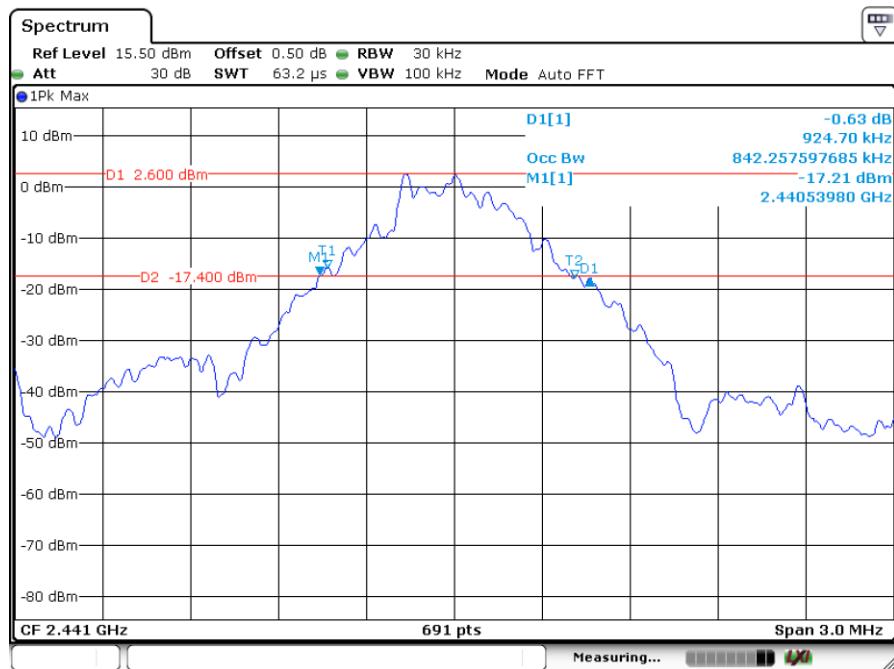

Date: 19.FEB.2016 10:30:32

## 2480MHz

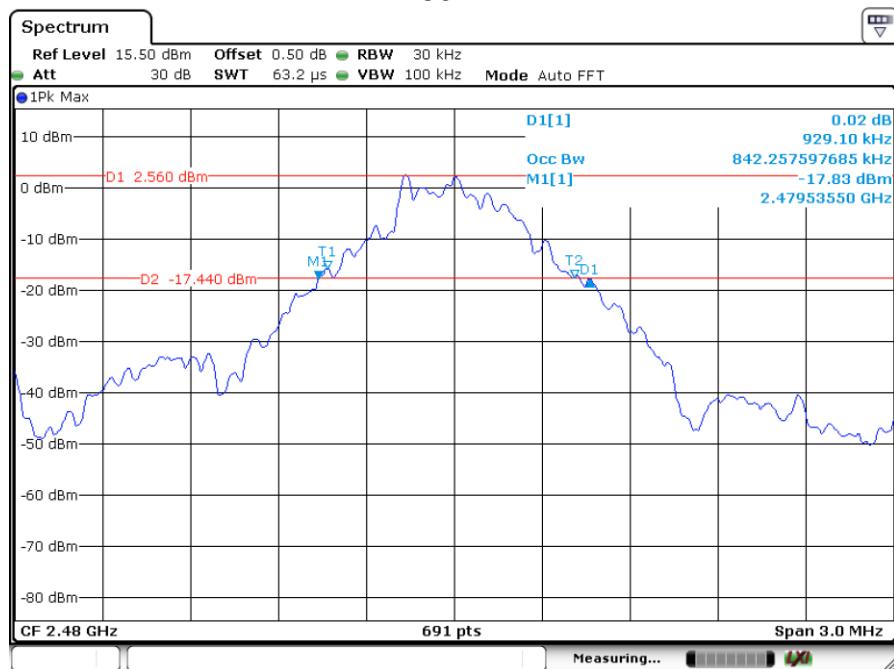


Date: 19.FEB.2016 10:31:11

## 20 dB bandwidth and 99% Occupied Bandwidth

Bluetooth Mode  $\pi/4$ -DQPSK Modulation test result


Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1220.0	1159.19	--	Pass
2441	1215.6	1163.53	--	Pass
2480	1220.0	1159.19	--	Pass

2402MHz

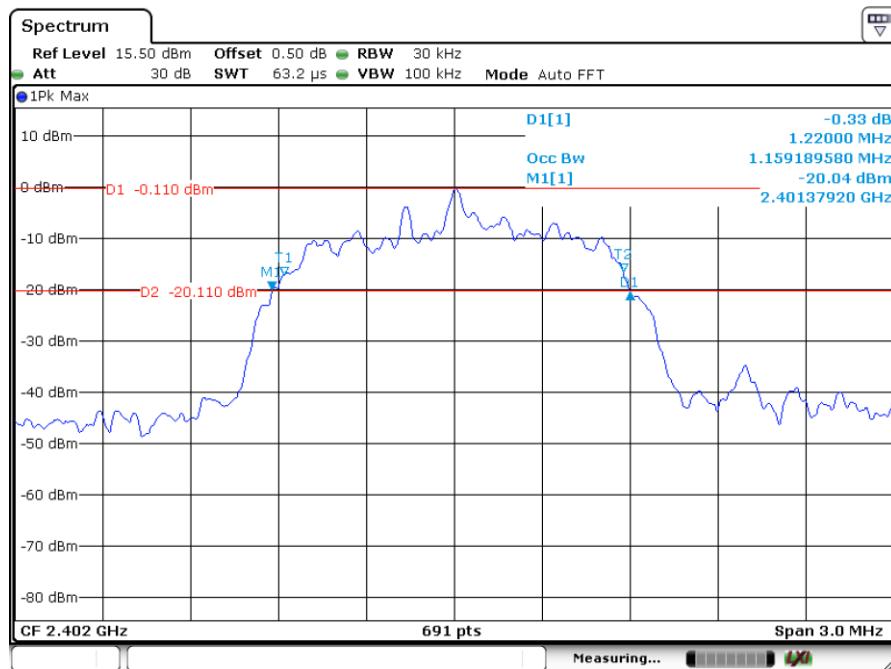


Date: 19.FEB.2016 10:28:38

## 2441MHz

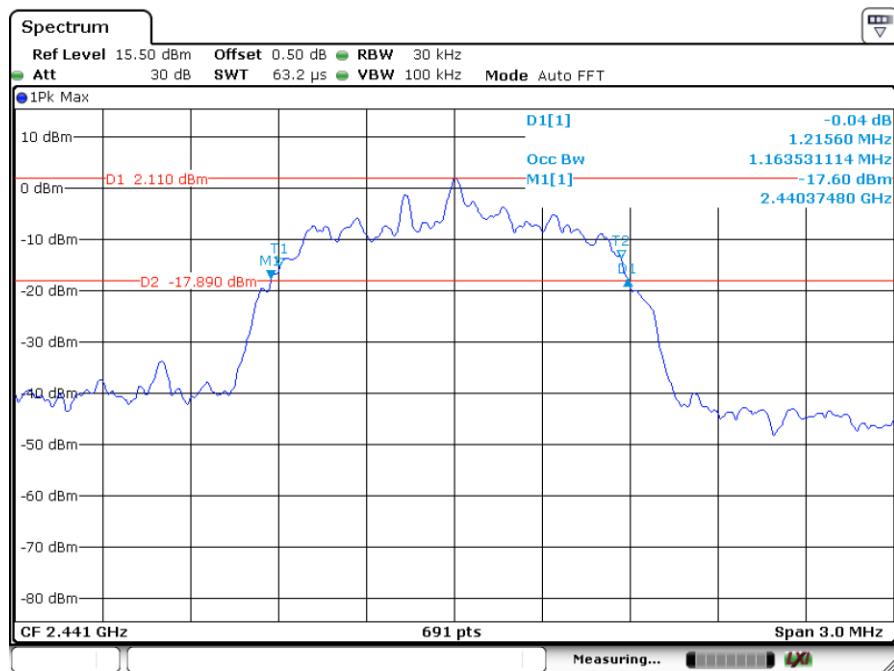

Date: 19.FEB.2016 10:27:05

## 2480MHz

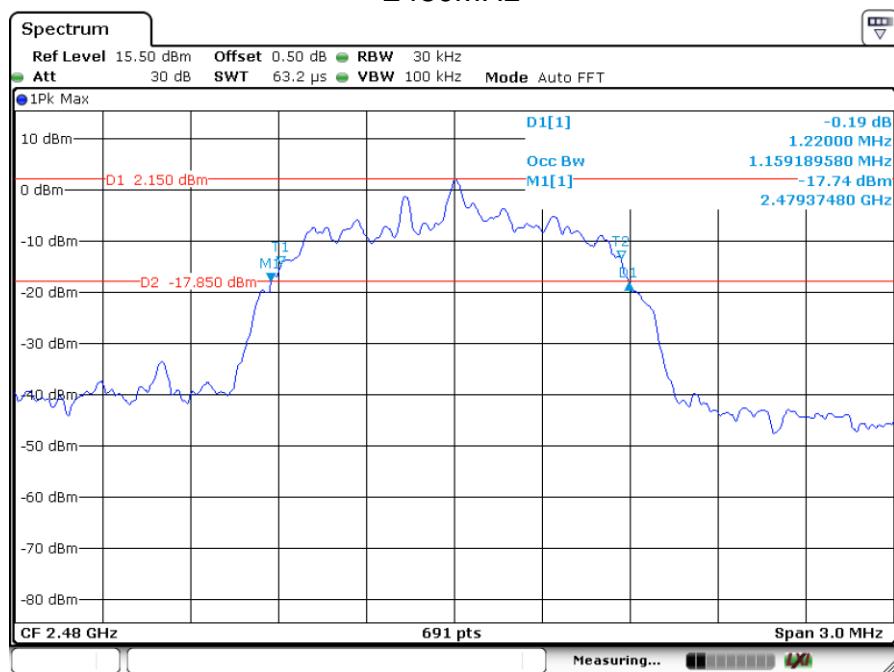


Date: 19.FEB.2016 10:26:21

## 20 dB bandwidth and 99% Occupied Bandwidth

Bluetooth Mode 8DPSK Modulation test result


Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1206.90	1150.51	--	Pass
2441	1206.90	1141.82	--	Pass
2480	1206.90	1141.82	--	Pass

2402MHz

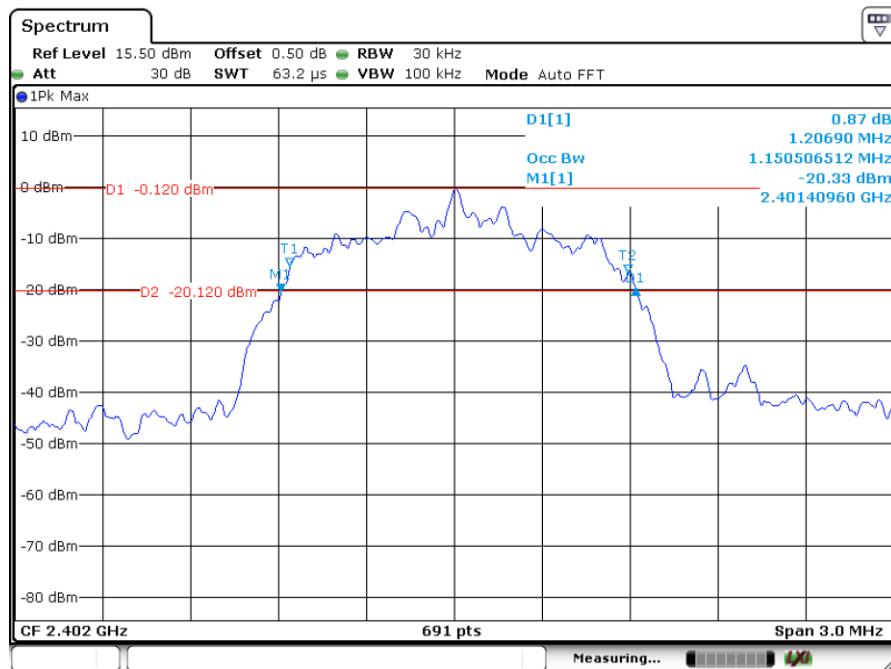


Date: 19.FEB.2016 10:17:45

## 2441MHz

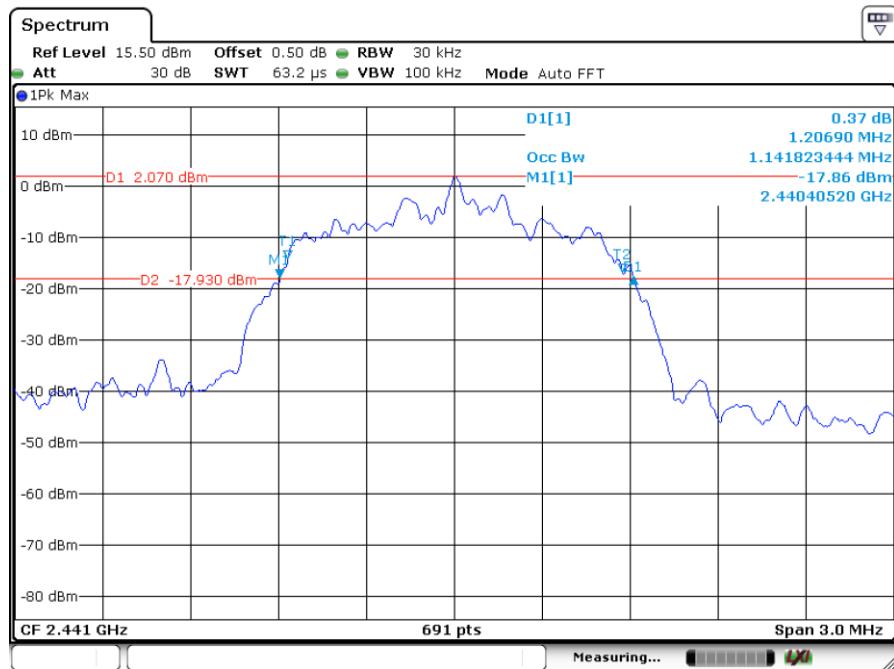

Date: 19.FEB.2016 10:18:34

## 2480MHz

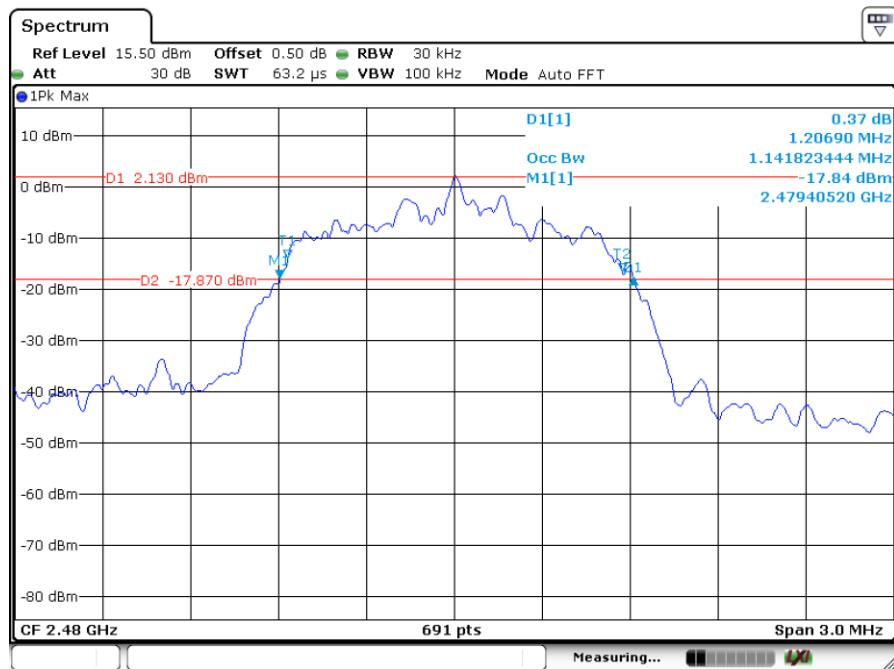

Date: 19.FEB.2016 10:19:18

## 9.4 Carrier Frequency Separation

### Test Method

1. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels, RBW  $\geq$  1% of the span, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak
2. By using the Max-Hold function record the separation of two adjacent channels.
3. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function.
4. Repeat above procedures until all frequencies measured were complete.

### Limit

Limit kHz
$\geq 25\text{kHz}$ or $2/3$ of the 20 dB bandwidth which is greater

### GFSK Modulation Limit

Frequency MHz	2/3 of 20 dB Bandwidth kHz
2402	616.47
2441	616.47
2480	619.40


## Carrier Frequency Separation

Test result: The measurement was performed with the typical configuration (normal hopping status), here GFSK modulation mode was used to show compliance.

GFSK Modulation test result


Frequency MHz	Carrier Frequency Separation kHz	Result
2402	1000.0	Pass
2441	1000.0	Pass
2480	1000.0	Pass

Low Channel

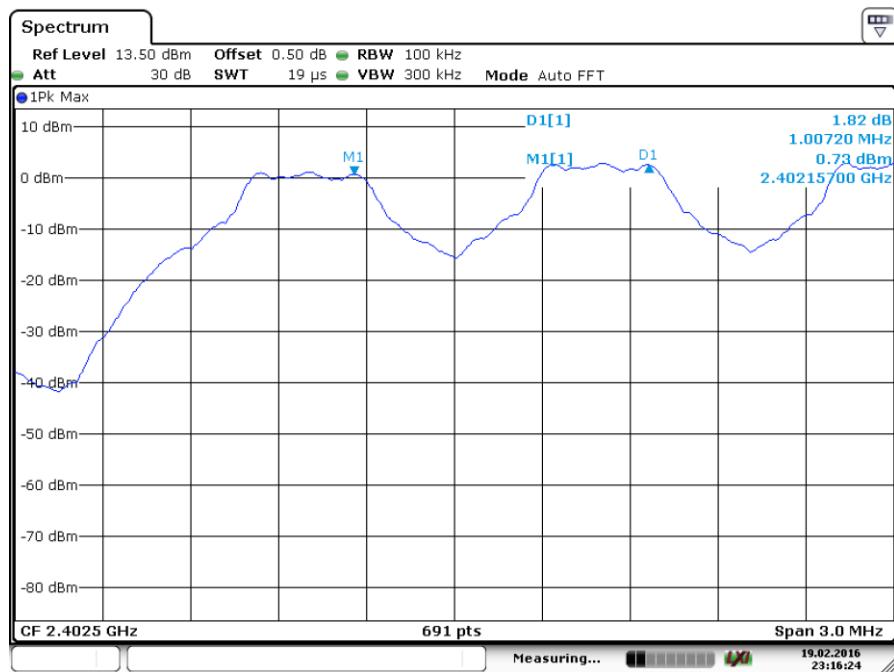


Date: 19.FEB.2016 23:16:24

## Middle channel

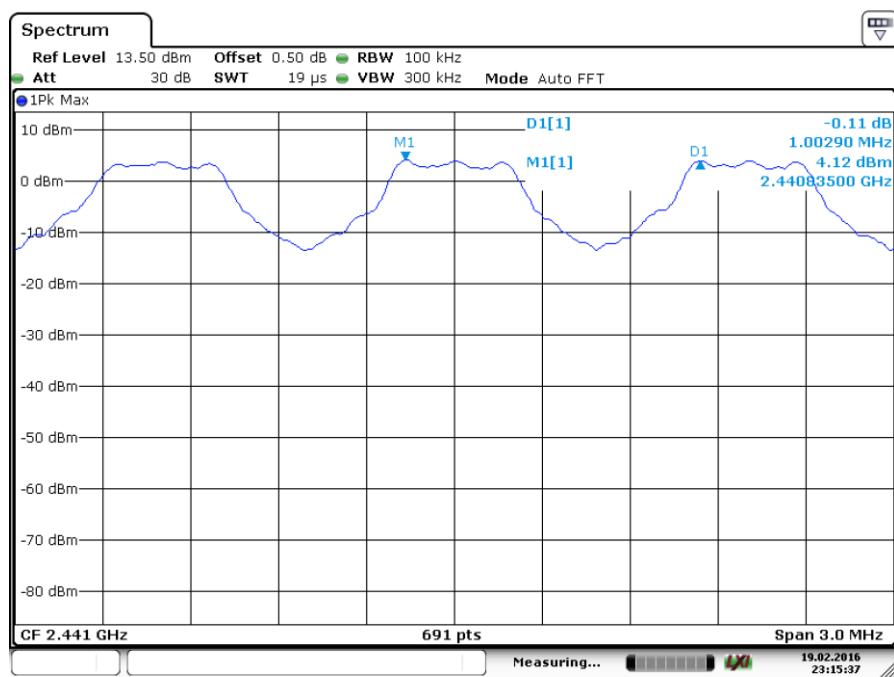

Date: 19.FEB.2016 23:15:37

## High Channel

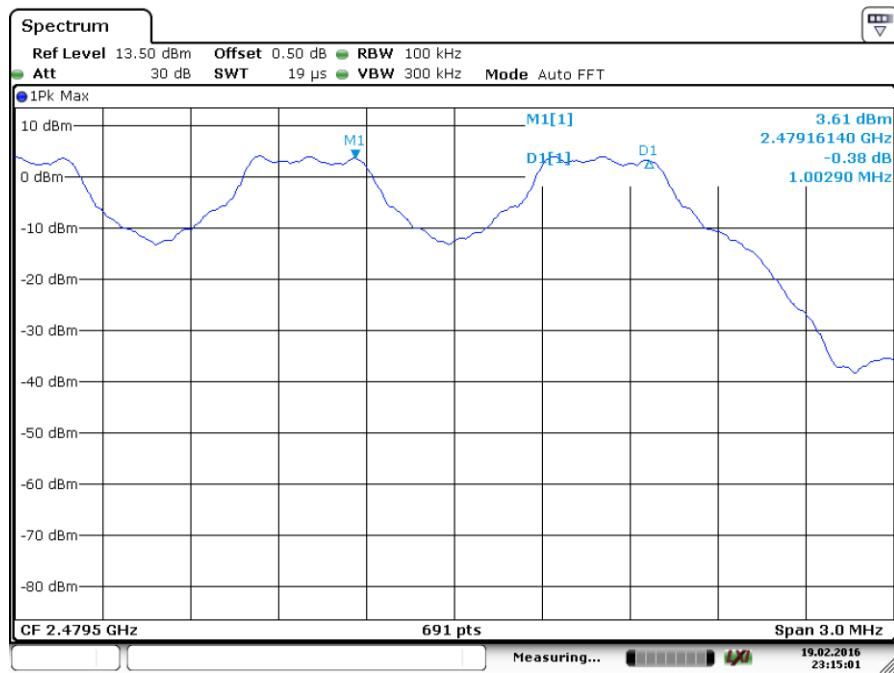

Date: 19.FEB.2016 23:15:02

## 9.5 Number of hopping frequencies

### Test Method

1. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels, RBW  $\geq 1\%$  of the span, VBW)  $\geq$  RBW, Sweep = auto, Detector function = peak
2. Set the spectrum analyzer on Max-Hold Mode, and then keep the EUT in hopping mode.
3. Record all the signals from each channel until each one has been recorded.
4. Repeat above procedures until all frequencies measured were complete.


### Limit

Limit number
$\geq 15$

## Number of hopping frequencies

Test result: The measurement was performed with the typical configuration (normal hopping status), and the total hopping channels is constant for the all modulation mode according with the Bluetooth Core Specification. Here GFSK modulation mode was used to show compliance.

Number of hopping frequencies	Result
79	Pass

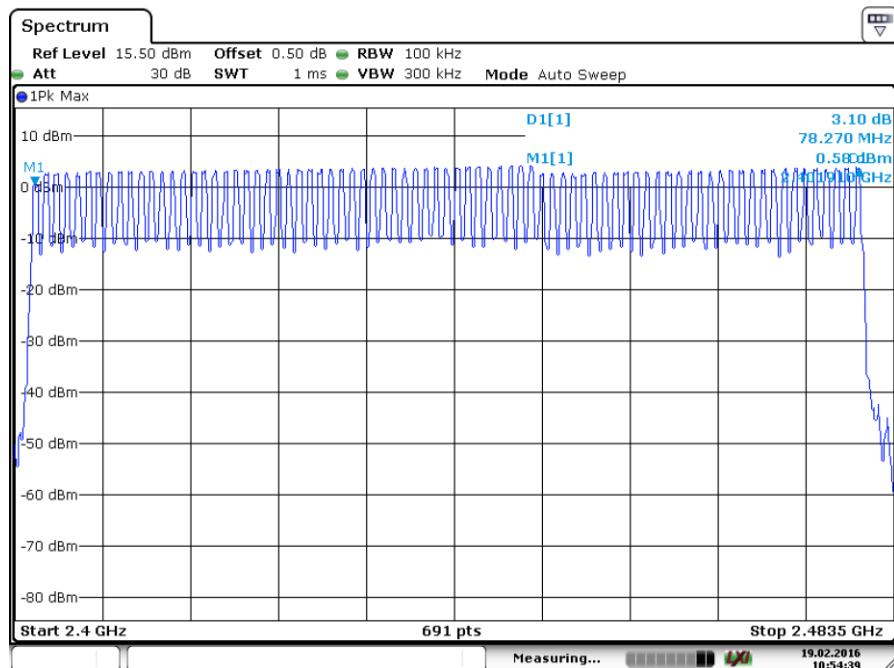

## 9.6 Dwell Time

### Test Method

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.  
Equipment mode: Spectrum analyzer
2. RBW: 1MHz; VBW: 1MHz; SPAN: Zero Span
3. Adjust the center frequency of spectrum analyzer on any frequency to be measured.
4. Measure the Dwell Time by spectrum analyzer Marker function.
5. Repeat above procedures until all frequencies measured were complete.

### Limit

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

## Dwell Time

### Dwell time

The maximum dwell time shall be 0.4 s.

According to the Bluetooth Core Specification, the worse result (DH5 mode) was reported to show compliance.

The Dwell Time = Burst Width \* Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 79 \text{ [ch]} = 31.6 \text{ [s*ch]}$ ;


The burst width, which is directly measured, refers to the duration on one channel hop.

The maximum number of hopping channels in 31.6s for DH5=1600 / 6 / 79 \*31.6=106.67

### Test Result

Modulation	Mode	Reading (ms)	Total Hops	Test Result (ms)	Limit (ms)	Result
GFSK	DH5	2985.5	106.67	318.46	< 400	Pass
$\pi/4$ -DQPSK	2DH5	2971.0	106.67	316.92	< 400	Pass
8-DPSK	3DH5	2985.5	106.67	318.46	< 400	Pass

### GFSK Modulation

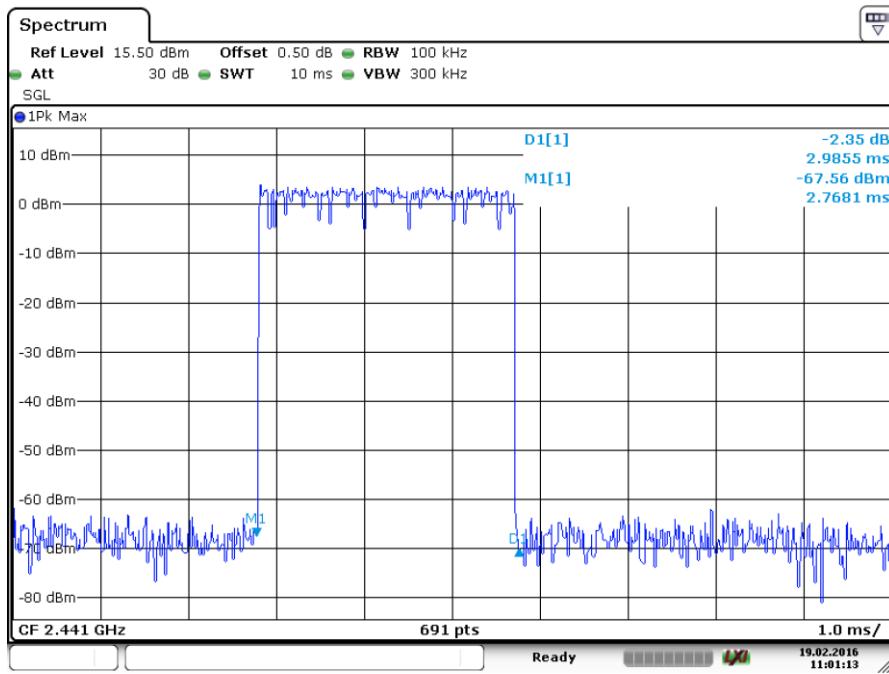


Date: 19.FEB.2016 11:01:13

DH5




### π/4-DQPSK Modulation

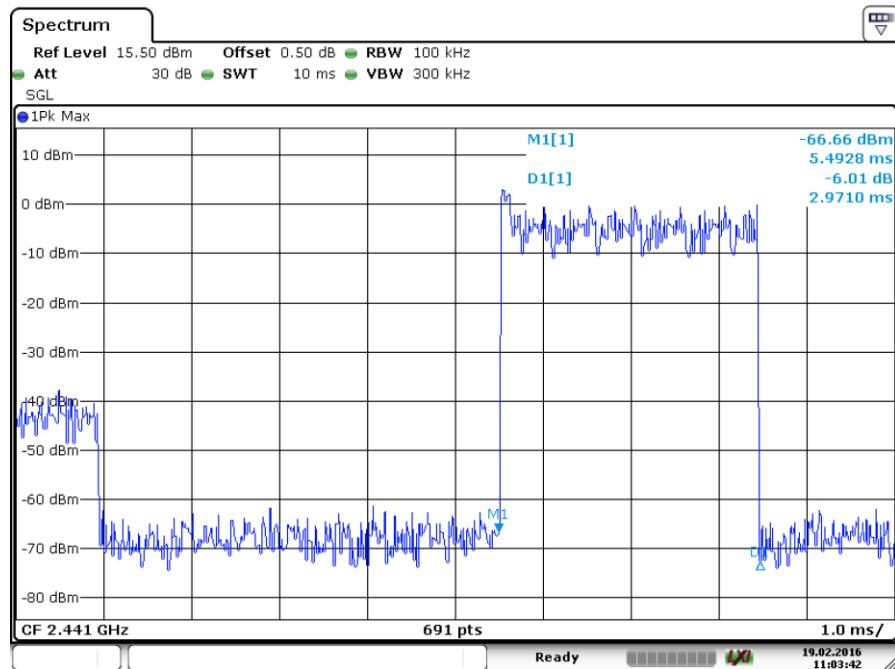

Date: 19.FEB.2016 11:03:42

2DH5

### 8-DPSK Modulation

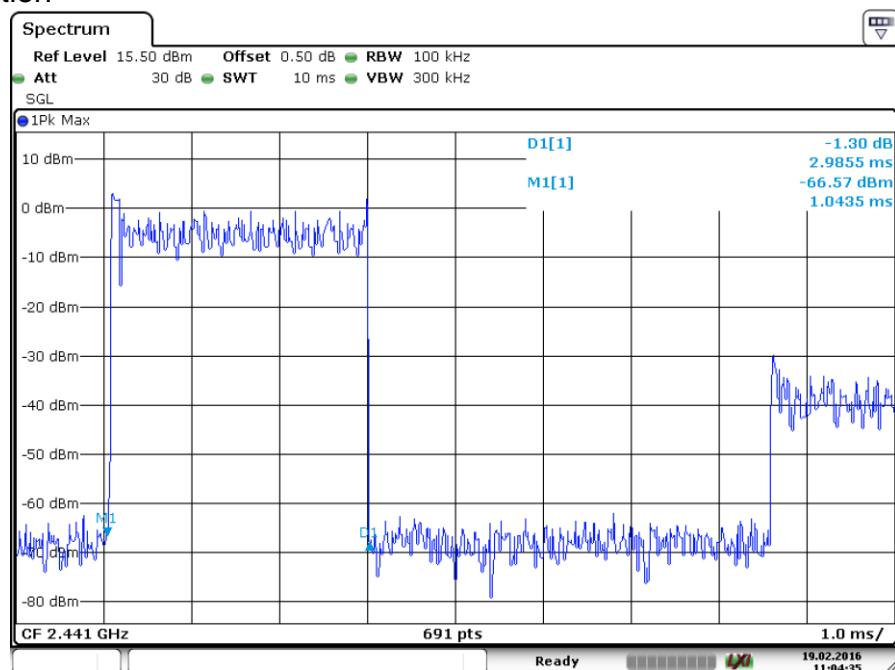

Date: 19.FEB.2016 11:04:35

3DH5

## 9.7 Spurious RF conducted emissions

### Test Method

1. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span.  
RBW = 100 kHz, VBW≥RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
3. The level displayed must comply with the limit specified in this Section. Submit these plots.
4. Repeat above procedures until all frequencies measured were complete.


### Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


## Spurious RF conducted emissions

Only the worse case (which is subject to the maximum EIRP, GFSK mode) test result is listed in the report.

BT3.0 GFSK Modulation:  
2402MHz

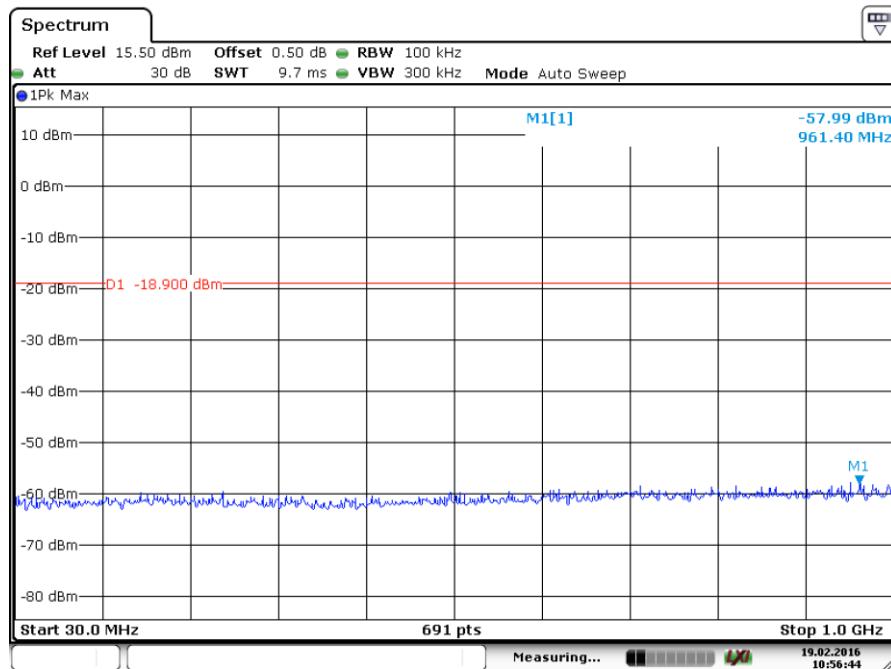


Date: 19.FEB.2016 10:56:45

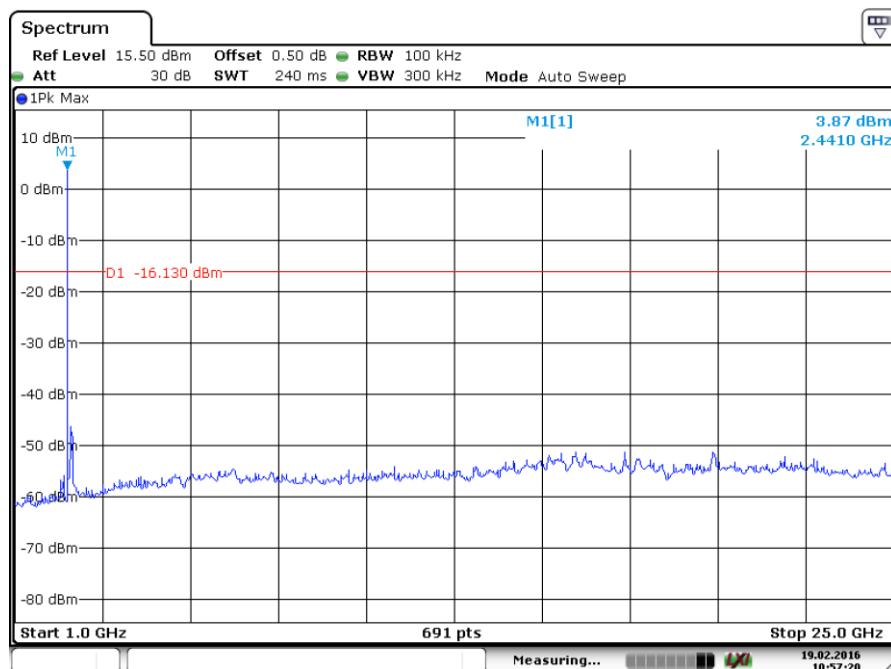


Date: 19.FEB.2016 10:57:20



2441MHz

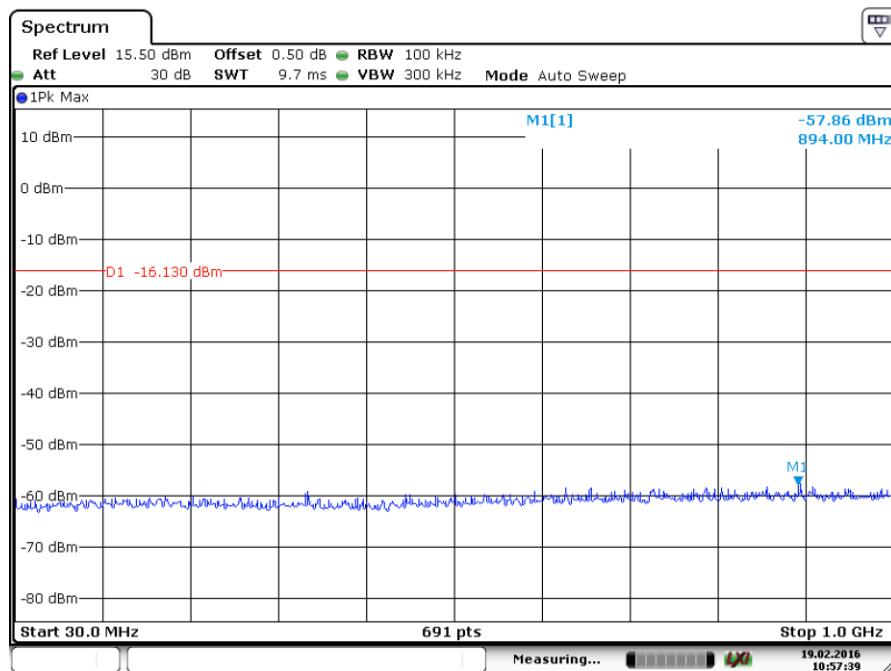


Date: 19.FEB.2016 10:57:40

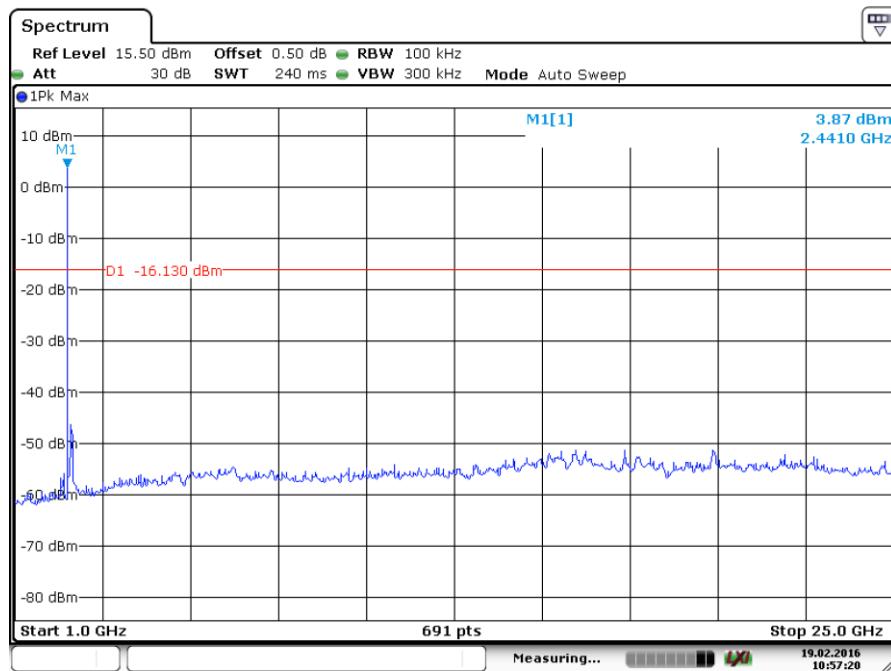


Date: 19.FEB.2016 10:57:20



2480MHz

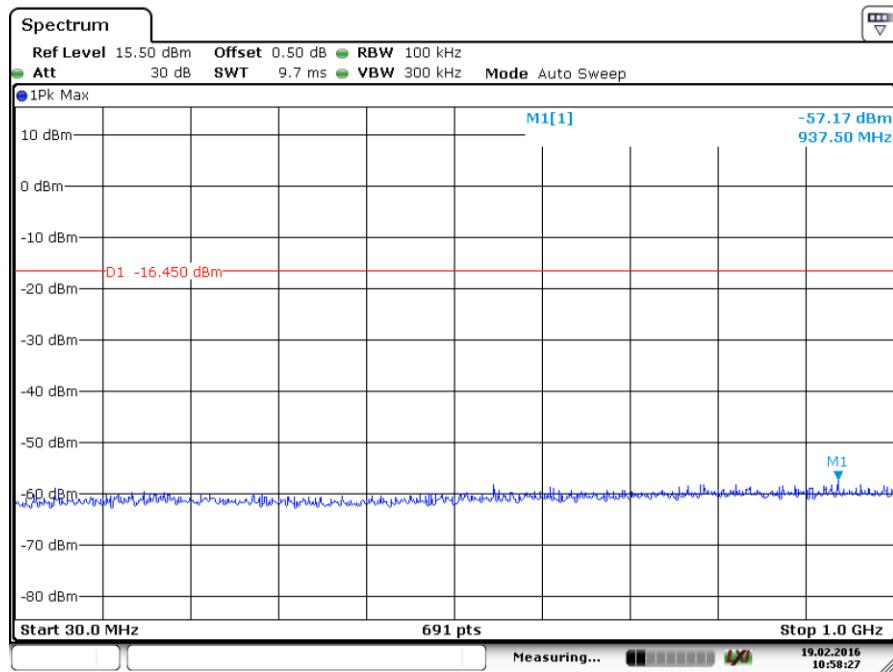

Date: 19.FEB.2016 10:58:27

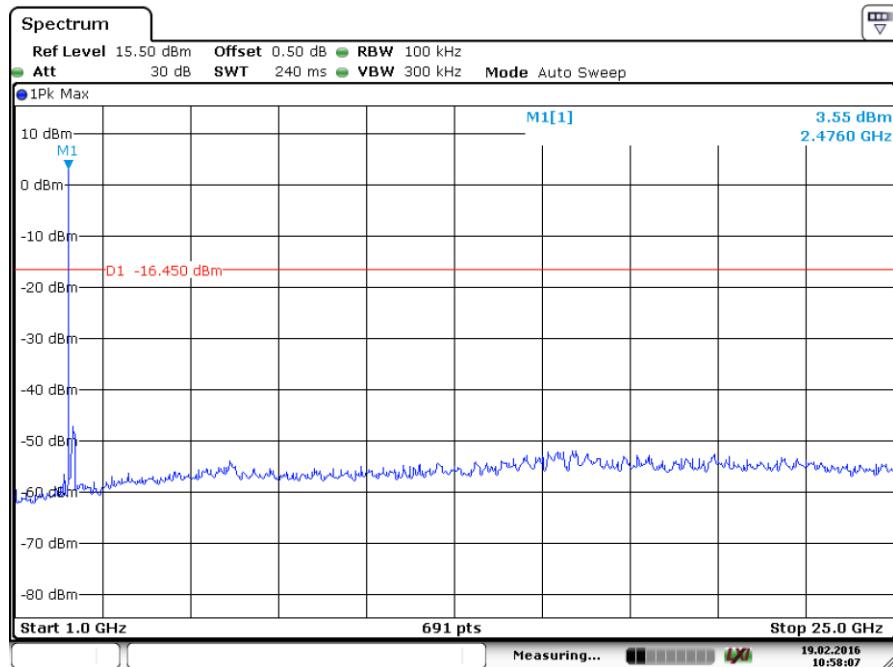

Date: 19.FEB.2016 10:58:06

## 9.8 Band edge testing

### Test Method

- 1 Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max  
hold
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section. .
- 4 Repeat the test at the hopping off and hopping on mode, submit all the plots.


### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


## Band edge testing

### BT3.0 GFSK Modulation Test Result:

Hopping on mode:

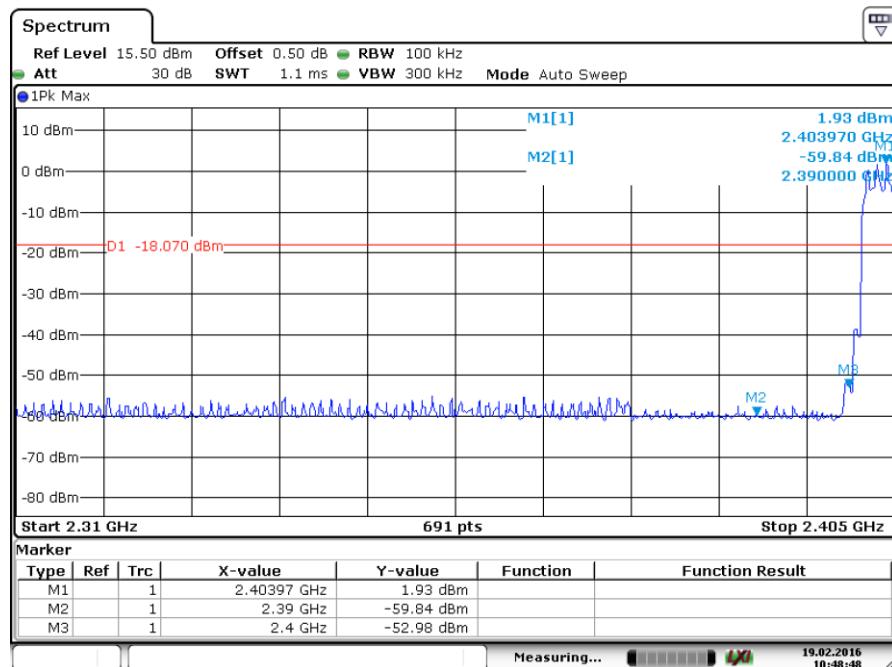


Date: 19.FEB.2016 10:48:48

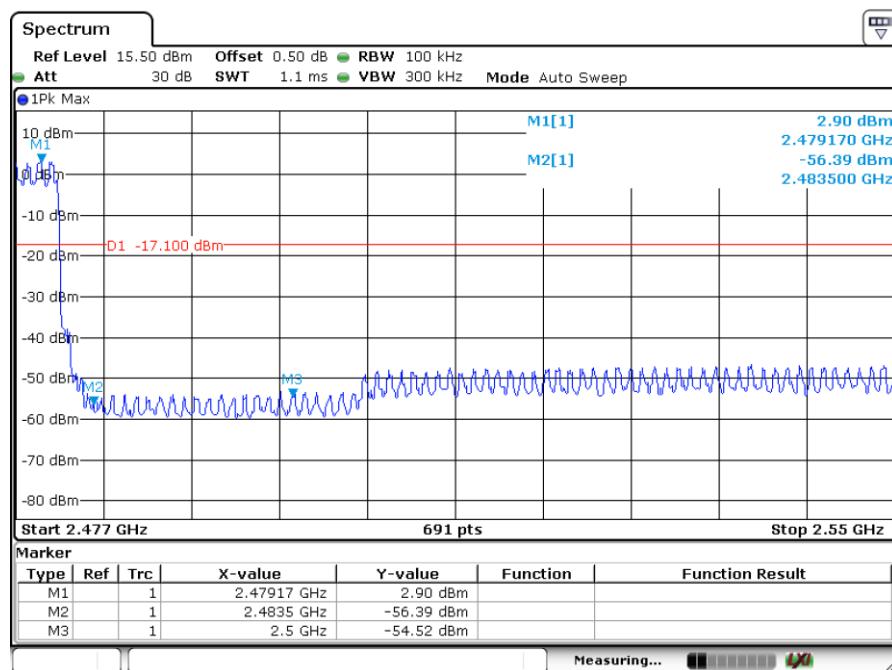


Date: 19.FEB.2016 10:43:08

Hopping off mode:

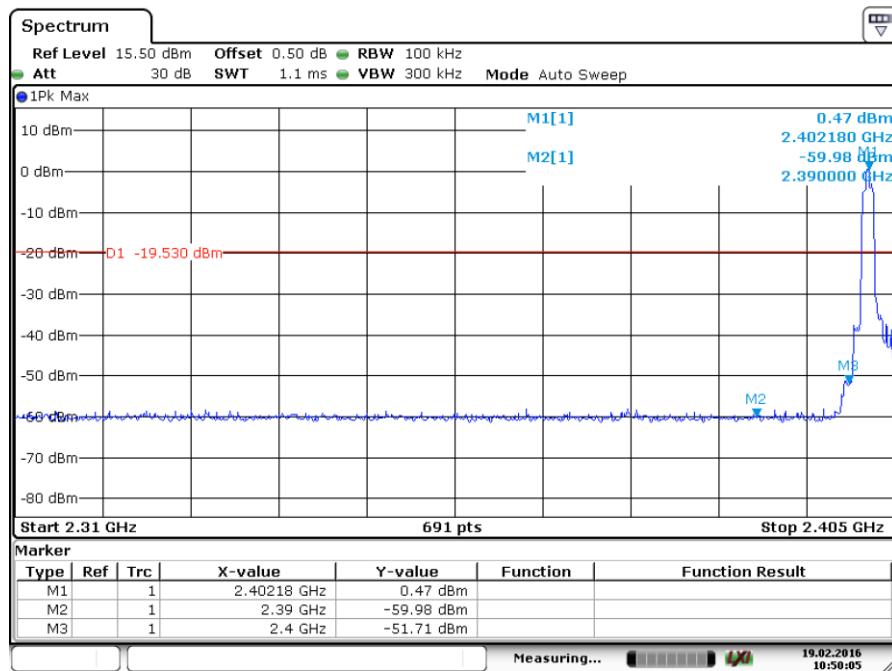

Date: 19.FEB.2016 10:50:05

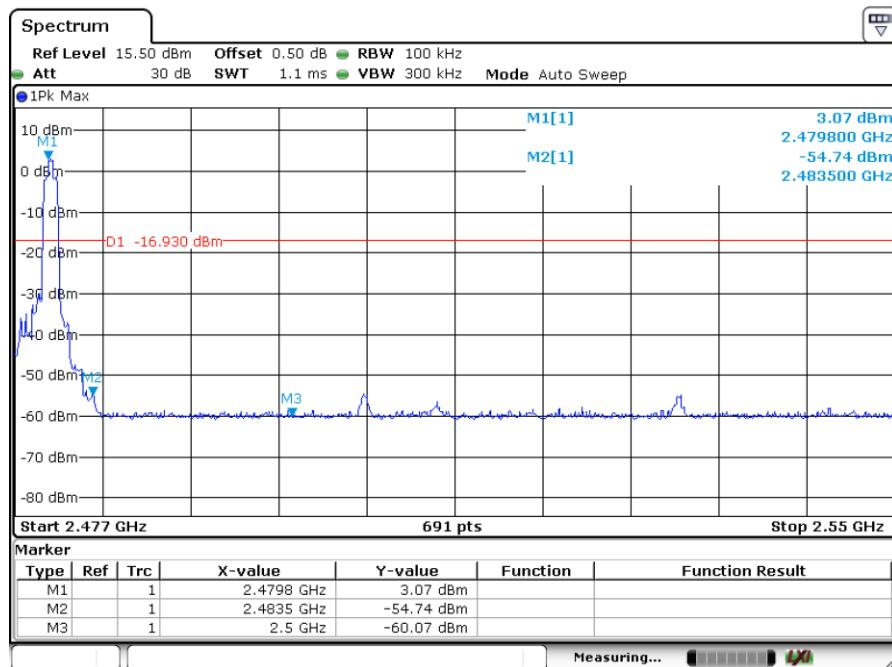

## 9.9 Spurious radiated emissions for transmitter

### Test Method

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
3. Use the following spectrum analyzer settings:  
Span = wide enough to fully capture the emission being measured, RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 kHz for  $f < 1\text{ GHz}$ , VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Follow the guidelines in ANSI C63.4-2009 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from  $20\log(\text{duty cycle}/100\text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

### Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dB $\mu$ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

## Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

The only worse case (which is subject to the maximum EIRP, GFSK mode) test result is listed in the report.

### Transmitting spurious emission test result as below:

#### BT3.0 GFSK Modulation 2402MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dB $\mu$ V/m		dB $\mu$ V/m		dB $\mu$ V/m	
1000-25000MHz	4804	39.54	H	74	PK	34.46	Pass
	7205.5	36.91	H	74	PK	37.09	Pass
	4803.5	44.91	V	74	PK	29.09	Pass
	7212	37.24	V	74	PK	36.76	Pass

#### BT3.0 GFSK Modulation 2441MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dB $\mu$ V/m		dB $\mu$ V/m		dB $\mu$ V/m	
30-1000MHz	--	--	H	46	QP	--	Pass
	--	--	H	46	QP	--	Pass
1000-25000MHz	4882	42.36	H	74	PK	31.64	Pass
	7330	37.59	H	74	PK	36.41	Pass
	4882	45.58	V	74	PK	28.42	Pass
	7336	38.22	V	74	PK	35.78	Pass

## BT3.0 GFSK Modulation 2480MHz Test Result

Frequency Band	Frequency	Emission Level	Polarization	Limit	Detector	Margin	Result
	MHz	dBuV/m		dB $\mu$ V/m		dBuV/m	
1000-25000MHz	4959.5	42.55	H	74	PK	31.45	Pass
	7438	38.32	H	74	PK	35.68	Pass
	4959.5	49.5	V	74	PK	24.5	Pass
	7444	38.33	V	74	PK	35.67	Pass

## Remark:

- (1) AV Emission Level= PK Emission Level+20log(dutycycle)
- (2) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (3) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.

## 10 Test Equipment List

### Site 2:

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Test Receiver	R & S	ESU26	100050	12-Feb-2017
Bi-conical Antenna	R & S	HK116	100242	07-Dec-2016
Log Periodic Antenna	R & S	HL223	841516/020	01-Sep-2017
Coaxial cable (50ohm)	Rosenberger	RTK081-05S-05S-10m	LA2-001-10M / 001	01-Sep-2017
Microwave amplifier (0.5-26.5GHz, 25dB gain)	HP	83017A	3123A00437	10-Jun-2016
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	9829213	17-Jul-2016
Horn Antenna	EMCO	3115	9002-3351	28-Oct-2017
Active Loop Antenna	EMCO	6502	9107-2651	26-Aug-2017
RF Voltage Probe	Schwarzbeck	TK9416	None	10-Feb-2017
LISN	R&S	ESH3-Z5	849876/027	15-Jun-2016
Double Shield Cable	Radiall	RG142	Nil	14-Sep-2017
Pulse Limiter	R&S	ESH3-Z2	Nil	04-Jun-2016

## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Items	Extended Uncertainty
Radiated Emissions	Level accuracy 30 to 200 MHz $\pm 4.68$ dB 200 to 1000 MHz $\pm 5.73$ dB 1000 to 25000 MHz $\pm 5.57$ dB
Conducted Emissions	Level accuracy 9 kHz to 30 MHz $\pm 3.16$ dB
Conducted RF Test	$\leq 1$ dB


## 12 Setup Photographs of EUT



Conducted Emission



Radiated Emission (30MHz-200MHz)

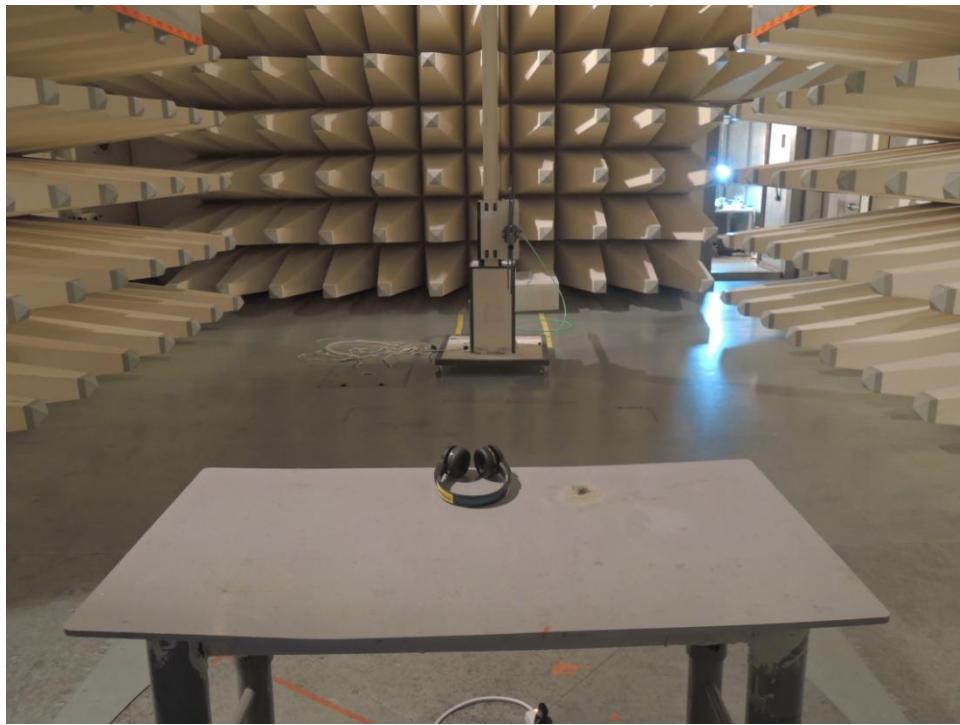

Radiated Emission (200MHz-1000MHz)



Radiated Emission (1000MHz-260000MHz)