

## TEST REPORT

**Product** : Monster Bluetooth Headphones  
**Trade mark** : Monster  
**Model/Type reference** : 190693  
**Serial Number** : N/A  
**Report Number** : EED32J00013901  
**FCC ID** : RJE190693  
**Date of Issue** : Feb. 21, 2017  
**Test Standards** : 47 CFR Part 15 Subpart C (2015)  
**Test result** : PASS

Prepared for:

**Monster LLC**

**3837 Bay Lake Trail, Suite 103, North Las Vegas, NV 89030 USA**

Prepared by:

**Centre Testing International Group Co., Ltd.**

**Hongwei Industrial Zone, Bao'an 70 District,**

**Shenzhen, Guangdong, China**

**TEL: +86-755-3368 3668**

**FAX: +86-755-3368 3385**

Tested By:

*Tom-chen*

Tom chen (Test Project)

Compiled by:

*Kevin Ian*

Kevin Ian (Project Engineer)

Reviewed by:

*Kevin Yang*

Kevin yang (Reviewer)

Approved by:

*Sheek Luo*

Sheek Luo (Lab supervisor)

Date:

Feb. 21, 2017

Check No.: 2496567469



**2 Version**

Version No.	Date	Description
00	Feb. 21, 2017	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.


## 4 Content

<b>1 COVER PAGE</b> .....	1
<b>2 VERSION</b> .....	2
<b>3 TEST SUMMARY</b> .....	3
<b>4 CONTENT</b> .....	4
<b>5 TEST REQUIREMENT</b> .....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
<b>6 GENERAL INFORMATION</b> .....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 TEST FACILITY.....	8
6.7 DEVIATION FROM STANDARDS.....	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	10
<b>7 EQUIPMENT LIST</b> .....	11
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	13
Appendix A): 20dB Occupied Bandwidth.....	14
Appendix B): Carrier Frequency Separation.....	18
Appendix C): Dwell Time.....	22
Appendix D): Hopping Channel Number.....	26
Appendix E): Conducted Peak Output Power.....	28
Appendix F): Band-edge for RF Conducted Emissions.....	32
Appendix G): RF Conducted Spurious Emissions.....	37
Appendix H): Pseudorandom Frequency Hopping Sequence.....	44
Appendix I): Antenna Requirement.....	45
Appendix J): AC Power Line Conducted Emission.....	46
Appendix K): Restricted bands around fundamental frequency (Radiated).....	49
Appendix L): Radiated Spurious Emissions.....	57
<b>PHOTOGRAPHS OF TEST SETUP</b> .....	65
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> .....	67

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

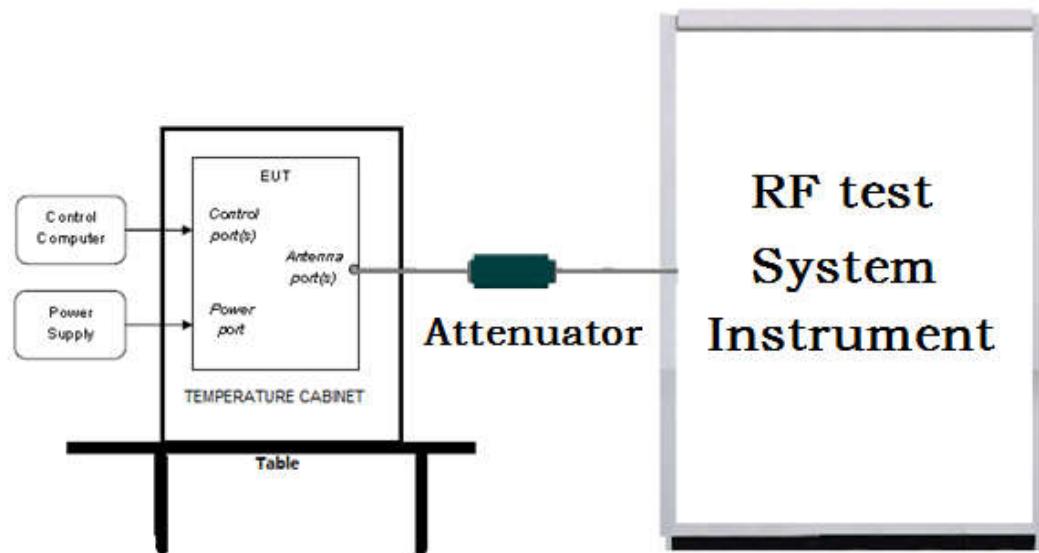

#### 5.1.2 For Radiated Emissions test setup

##### Radiated Emissions setup:

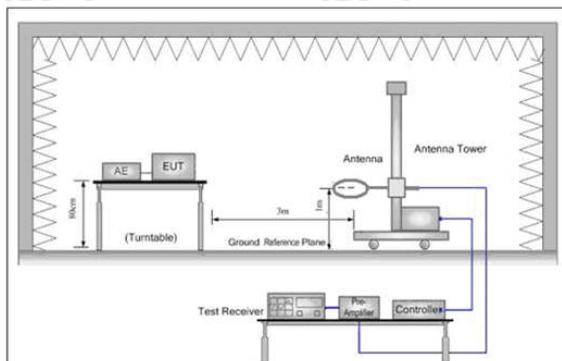


Figure 1. Below 30MHz

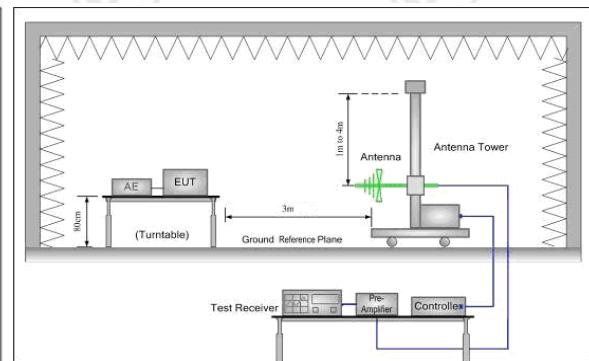


Figure 2. 30MHz to 1GHz


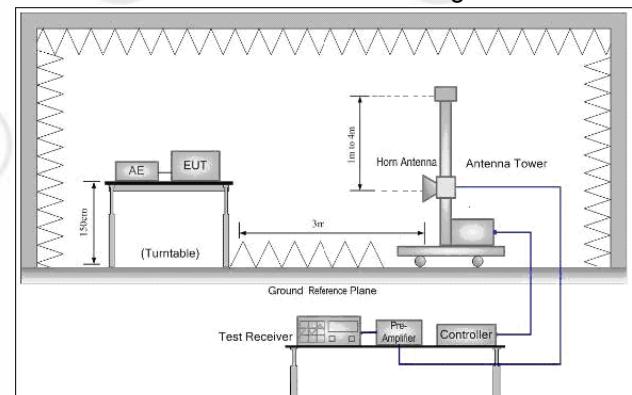


Figure 3. Above 1GHz

### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

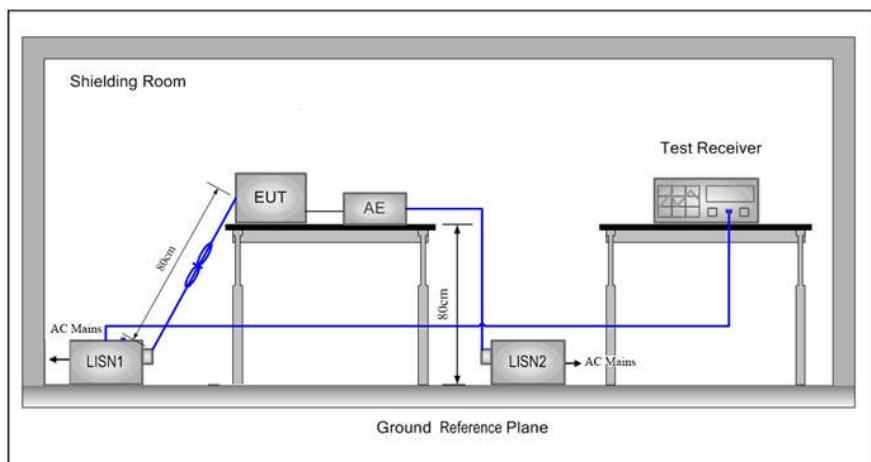

## 5.2 Test Environment

### Operating Environment:

Temperature:	24°C
Humidity:	51% RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ $\pi/4$ DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel 79
		2402MHz	2441MHz	2480MHz

TX mode: The EUT transmitted the continuous modulation test signal at the specific channel(s).

Test mode:

Pre-scan under all rate at Highest channel 79

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	1.137	1.148	1.153

Mode	$\pi/4$ DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	-0.361	-0.350	-0.347
Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	-0.061	-0.055	-0.052

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of  $\pi/4$ DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

## 6 General Information

### 6.1 Client Information

Applicant:	Monster LLC
Address of Applicant:	3837 Bay Lake Trail, Suite 103, North Las Vegas, NV 89030 USA
Manufacturer:	Monster LLC
Address of Manufacturer:	3837 Bay Lake Trail, Suite 103, North Las Vegas, NV 89030 USA
Factory:	CRESYN ELECTRONICS (DONGGUAN) CO., LTD
Address of Factory:	Lin-Cun Industry Zone, Tangxia, Dongguan, Guangdong, China

### 6.2 General Description of EUT

Product Name:	Monster Bluetooth Headphones
Model No.(EUT):	190693
Trade mark:	Monster
EUT Supports Radios application:	BT4.1 Dual mode
Power Supply:	3.7V/560mAh(Lithium Battery)
USB cable:	60cm(Unshielded)
Sample Received Date:	Feb. 07, 2017
Sample tested Date:	Feb. 07, 2017 to Feb. 21, 2017

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Test Power Grade:	Power(Ext, Int): 50, 50(manufacturer declare)
Test Software of EUT:	CSR Blue Test3 2.5.8 (manufacturer declare)
Antenna Type:	Monopole Antenna
Antenna Gain:	0dBi
Test Voltage:	AC 120V, 60Hz

#### Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz

10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

## 6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name	Manufacture	model	Serial number	Supplied by
AE1	Mouse	L.Selectron	OP-308	F0729003225KOSG
AE2	Laptop	Lenovo	E46L	EB22995690
AE3	Keyboard	L.Selectron	KB-101A	C0503005704BTZJ

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

## 6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

### A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### FCC-Registration No.: 886427

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

**IC-Registration No.: 7408A-2**

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2 .

**IC-Registration No.: 7408B-1**

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

**NEMKO-Aut. No.: ELA503**

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

**VCCI**

The Radiation 3 & 10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

## **6.7 Deviation from Standards**

None.

## **6.8 Abnormalities from Standard Conditions**

None.

## **6.9 Other Information Requested by the Customer**

None.

**6.10 Measurement Uncertainty (95% confidence levels, k=2)**

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2016	03-31-2017
Signal Generator	Keysight	N5182B	MY53051549	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	TTF20120439	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	003	01-11-2017	01-10-2018
DC Power	Keysight	E3642A	MY54436035	04-01-2016	03-31-2017
BT&WI-FI Automatic control	R&S	OSP120	101374	04-01-2016	03-31-2017
RF control unit	JS Tonscend	JS0806-2	158060006	04-01-2016	03-31-2017

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-16-2016	06-15-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
LISN	R&S	ENV216	100098	06-16-2016	06-15-2017
LISN	schwarzbeck	NNLK8121	8121-529	06-16-2016	06-15-2017
Current Probe	R&S	EZ17	100106	06-16-2016	06-15-2017
ISN	TESEQ GmbH	ISN T800	30297	01-27-2017	01-25-2018

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	TTE20130797	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBEC K	VULB9163	9163-484	05-23-2016	05-22-2017
Microwave Preamplifier	Agilent	8449B	3008A02425	02-16-2017	02-15-2018
Horn Antenna	ETS-LINDGREN	3117	00057407	07-20-2015	07-18-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Microwave Preamplifier	A.H.SYSTEMS	PAP-1840-60	6041.6042	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574 374	374	06-30-2015	06-28-2018
Spectrum Analyzer	R&S	FSP40	100416	06-16-2016	06-15-2017
Receiver	R&S	ESCI	100435	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251547	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251548	06-16-2016	06-15-2017
Signal Generator	Agilent	E4438C	MY45095744	04-01-2016	03-31-2017
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Cable line	Fulai(7M)	SF106	5219/6A	01-11-2017	01-10-2018
Cable line	Fulai(6M)	SF106	5220/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5216/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5217/6A	01-11-2017	01-10-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	TTF20120439	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	003	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	TTF20120434	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	TTF20120435	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	TTF20120436	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	TTF20120437	01-11-2017	01-10-2018

## 8 Radio Technical Requirements Specification

### Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

## Appendix A): 20dB Occupied Bandwidth


### Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	0.9440	0.95547	PASS	Peak detector
GFSK	MCH	0.9413	0.95019	PASS	
GFSK	HCH	0.9424	0.95462	PASS	
$\pi/4$ DQPSK	LCH	1.261	1.1717	PASS	
$\pi/4$ DQPSK	MCH	1.230	1.1693	PASS	
$\pi/4$ DQPSK	HCH	1.230	1.1688	PASS	
8DPSK	LCH	1.284	1.1647	PASS	
8DPSK	MCH	1.260	1.1630	PASS	
8DPSK	HCH	1.262	1.1638	PASS	

## Test Graph





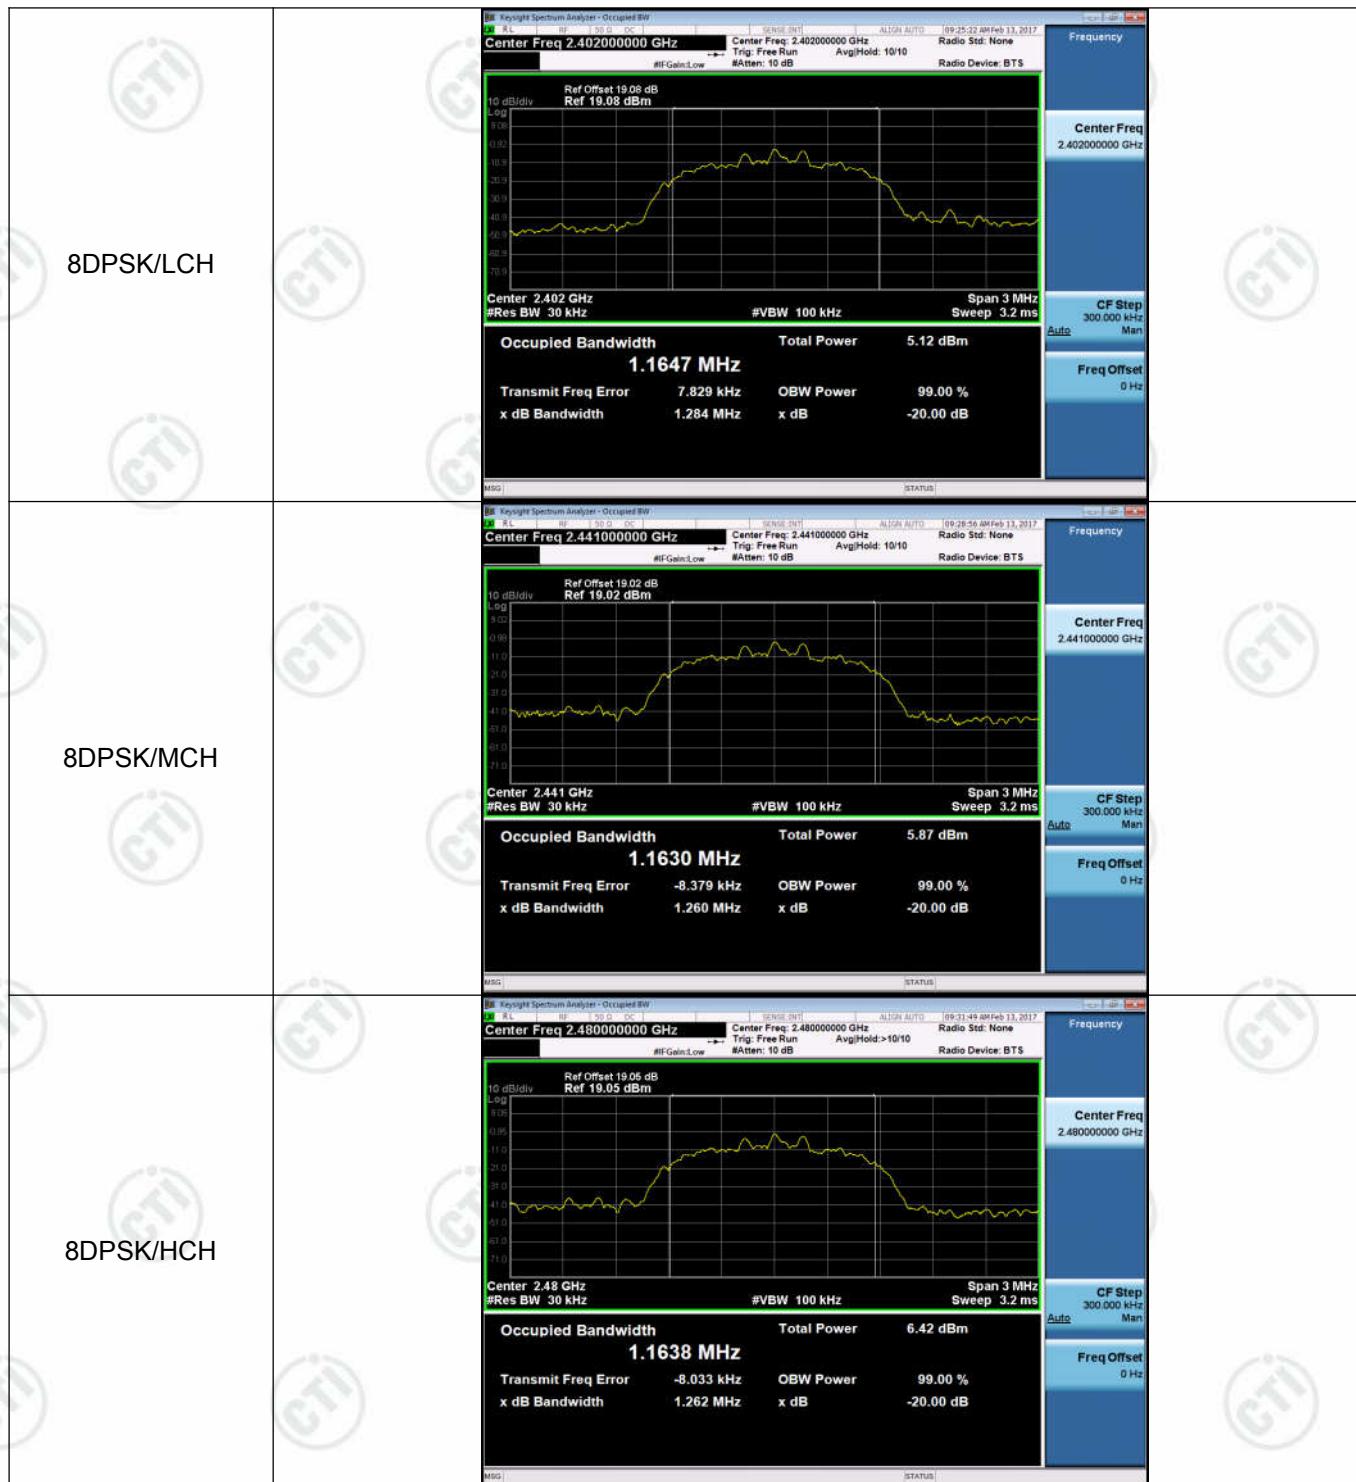



**Appendix B): Carrier Frequency Separation****Result Table**

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.852	PASS
GFSK	MCH	1.000	PASS
GFSK	HCH	0.994	PASS
$\pi/4$ DQPSK	LCH	0.996	PASS
$\pi/4$ DQPSK	MCH	1.158	PASS
$\pi/4$ DQPSK	HCH	1.006	PASS
8DPSK	LCH	1.010	PASS
8DPSK	MCH	1.016	PASS
8DPSK	HCH	1.016	PASS

## Test Graph



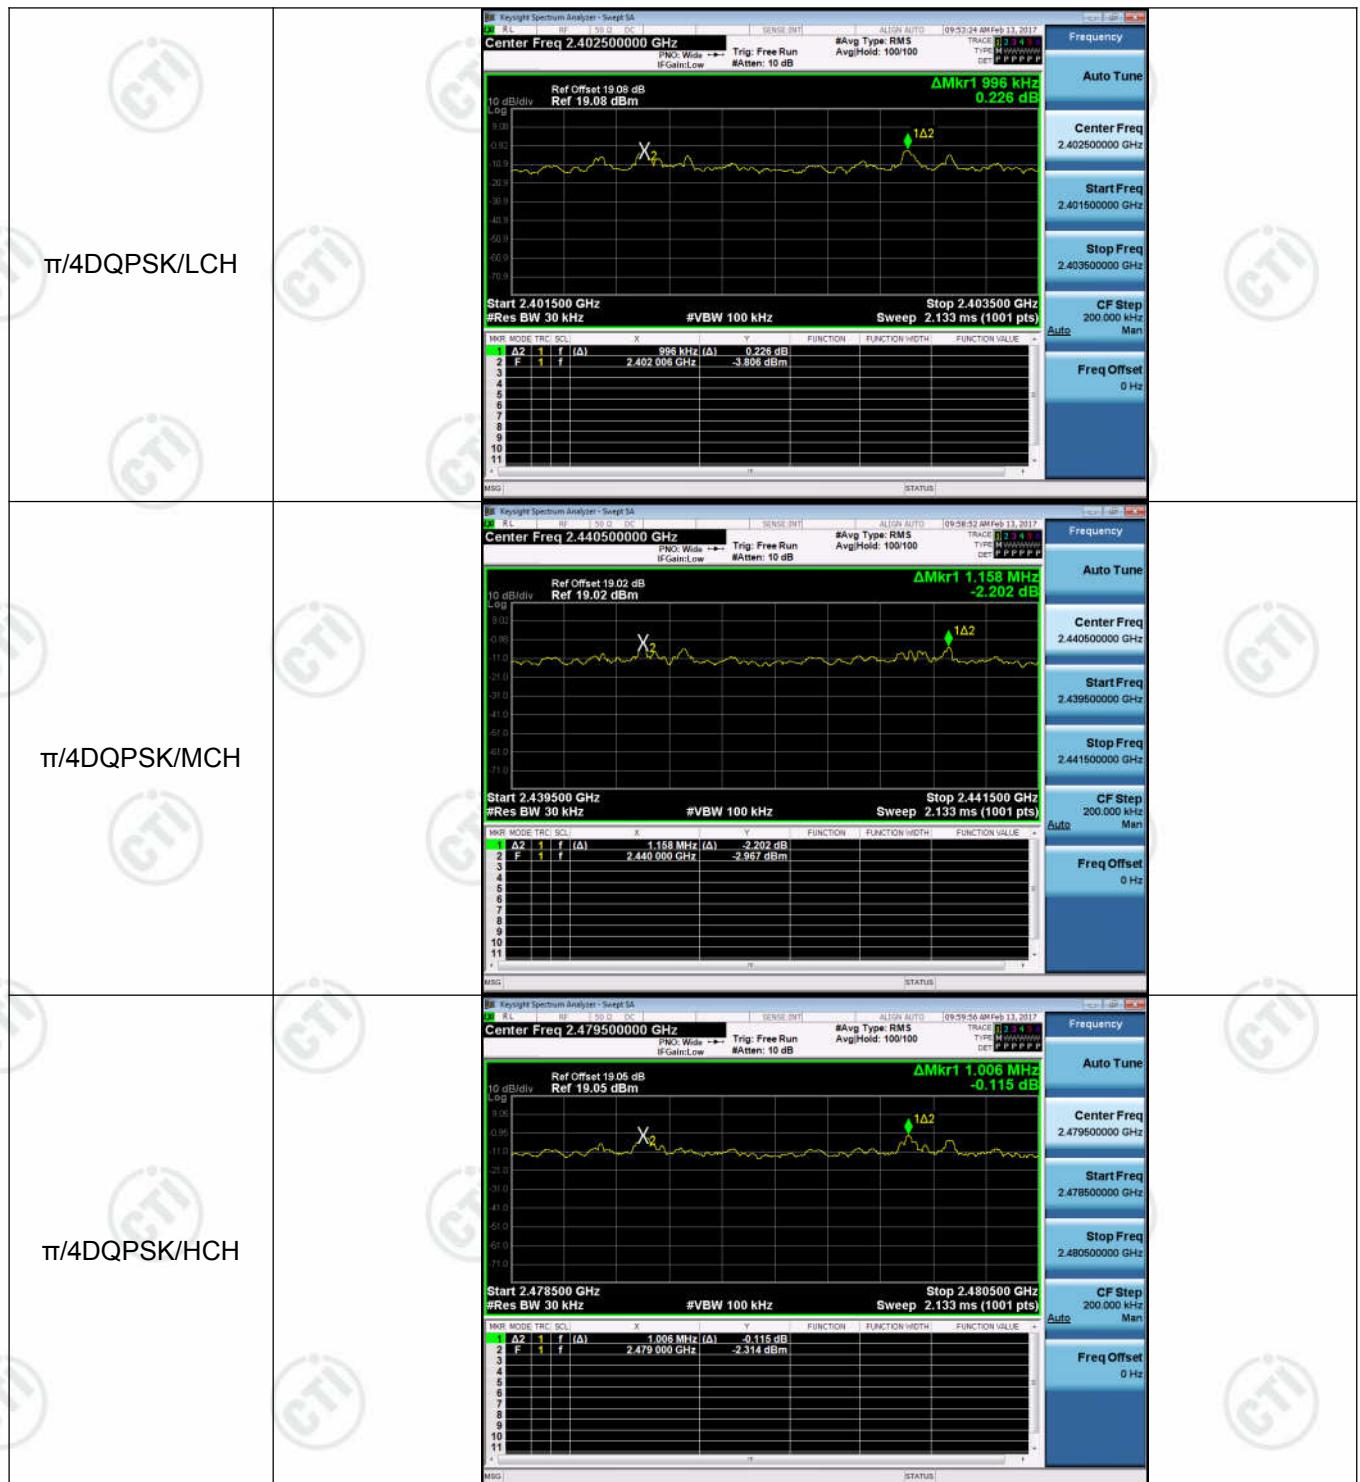

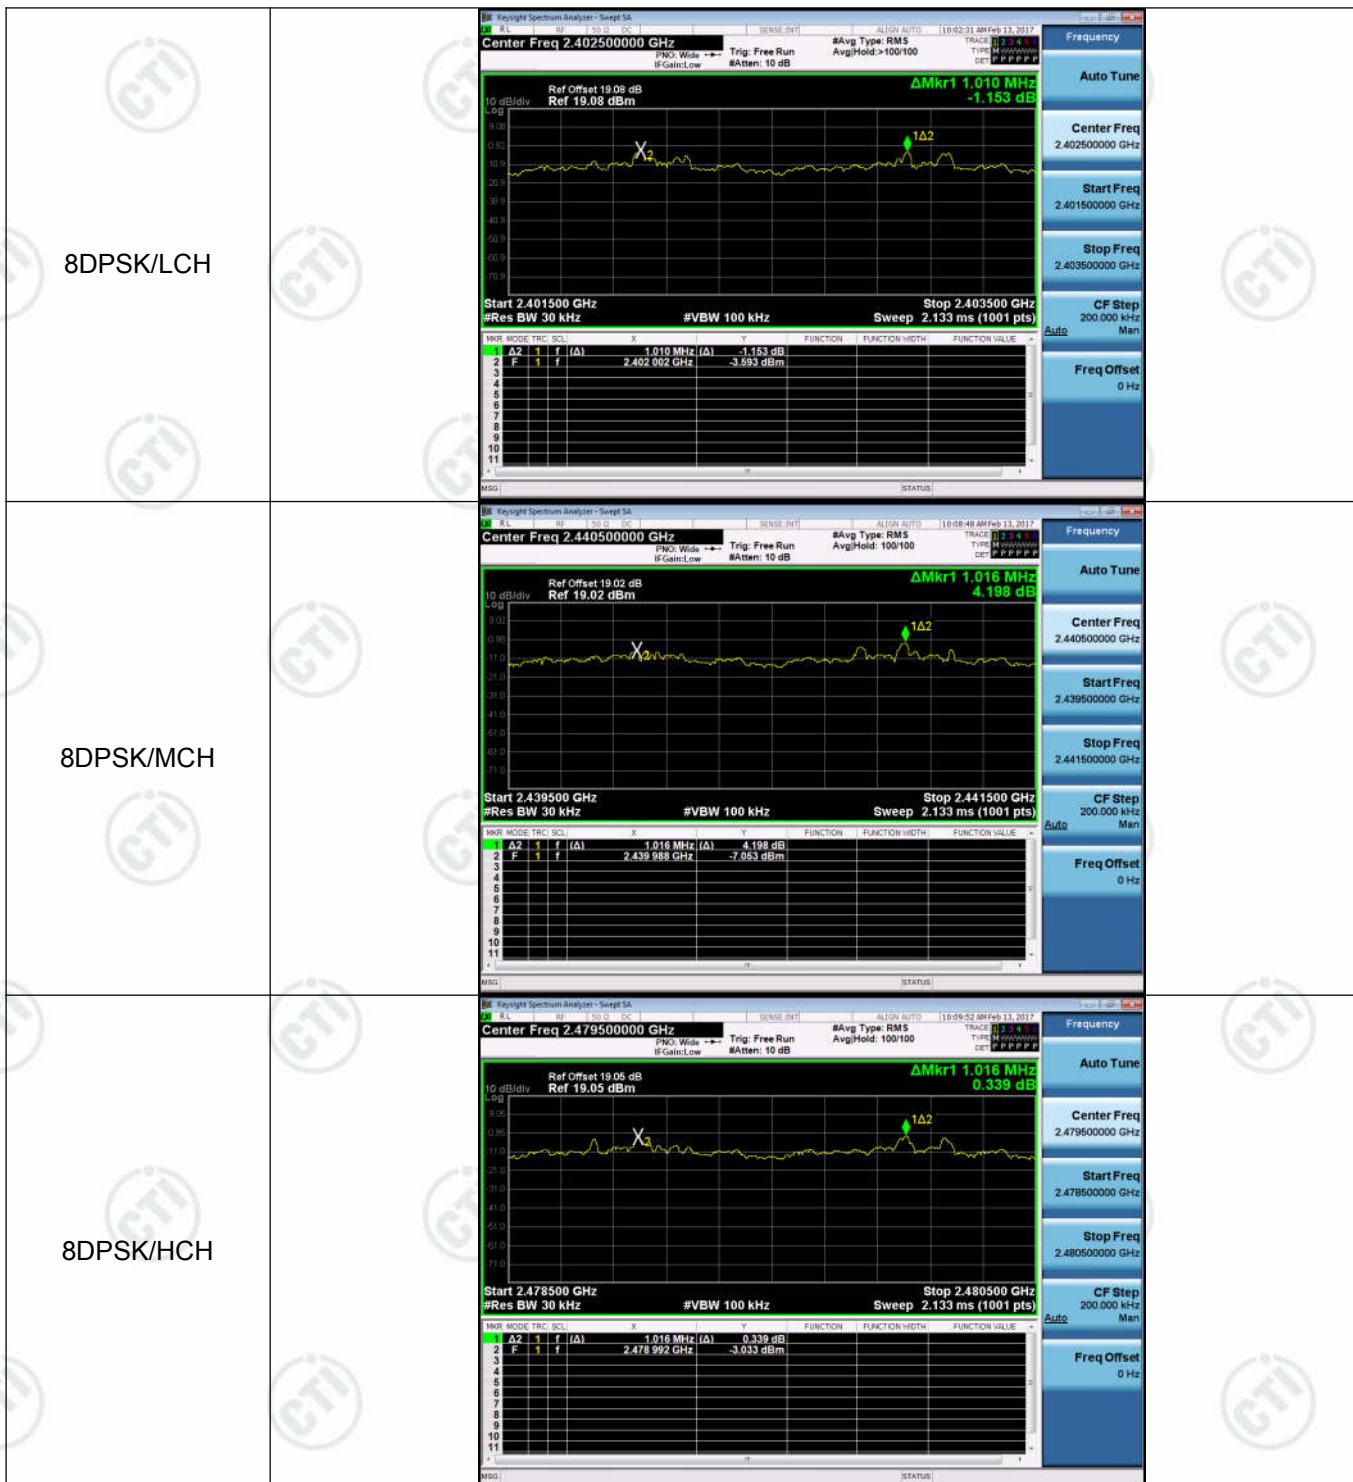


## Appendix C): Dwell Time


**Result Table**

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.405337	320	0.13	0.32	PASS
GFSK	DH1	MCH	0.407867	320	0.131	0.33	PASS
GFSK	DH1	HCH	0.409133	320	0.131	0.33	PASS
GFSK	DH3	LCH	0.86514	160	0.138	0.69	PASS
GFSK	DH3	MCH	0.86387	160	0.138	0.69	PASS
GFSK	DH3	HCH	0.865137	160	0.138	0.69	PASS
GFSK	DH5	LCH	2.91207	106.7	0.311	0.78	PASS
GFSK	DH5	MCH	2.91207	106.7	0.311	0.78	PASS
GFSK	DH5	HCH	2.91334	106.7	0.311	0.78	PASS

Remark : All modes are tested, only the worst mode GFSK is reported.

### Test Graph

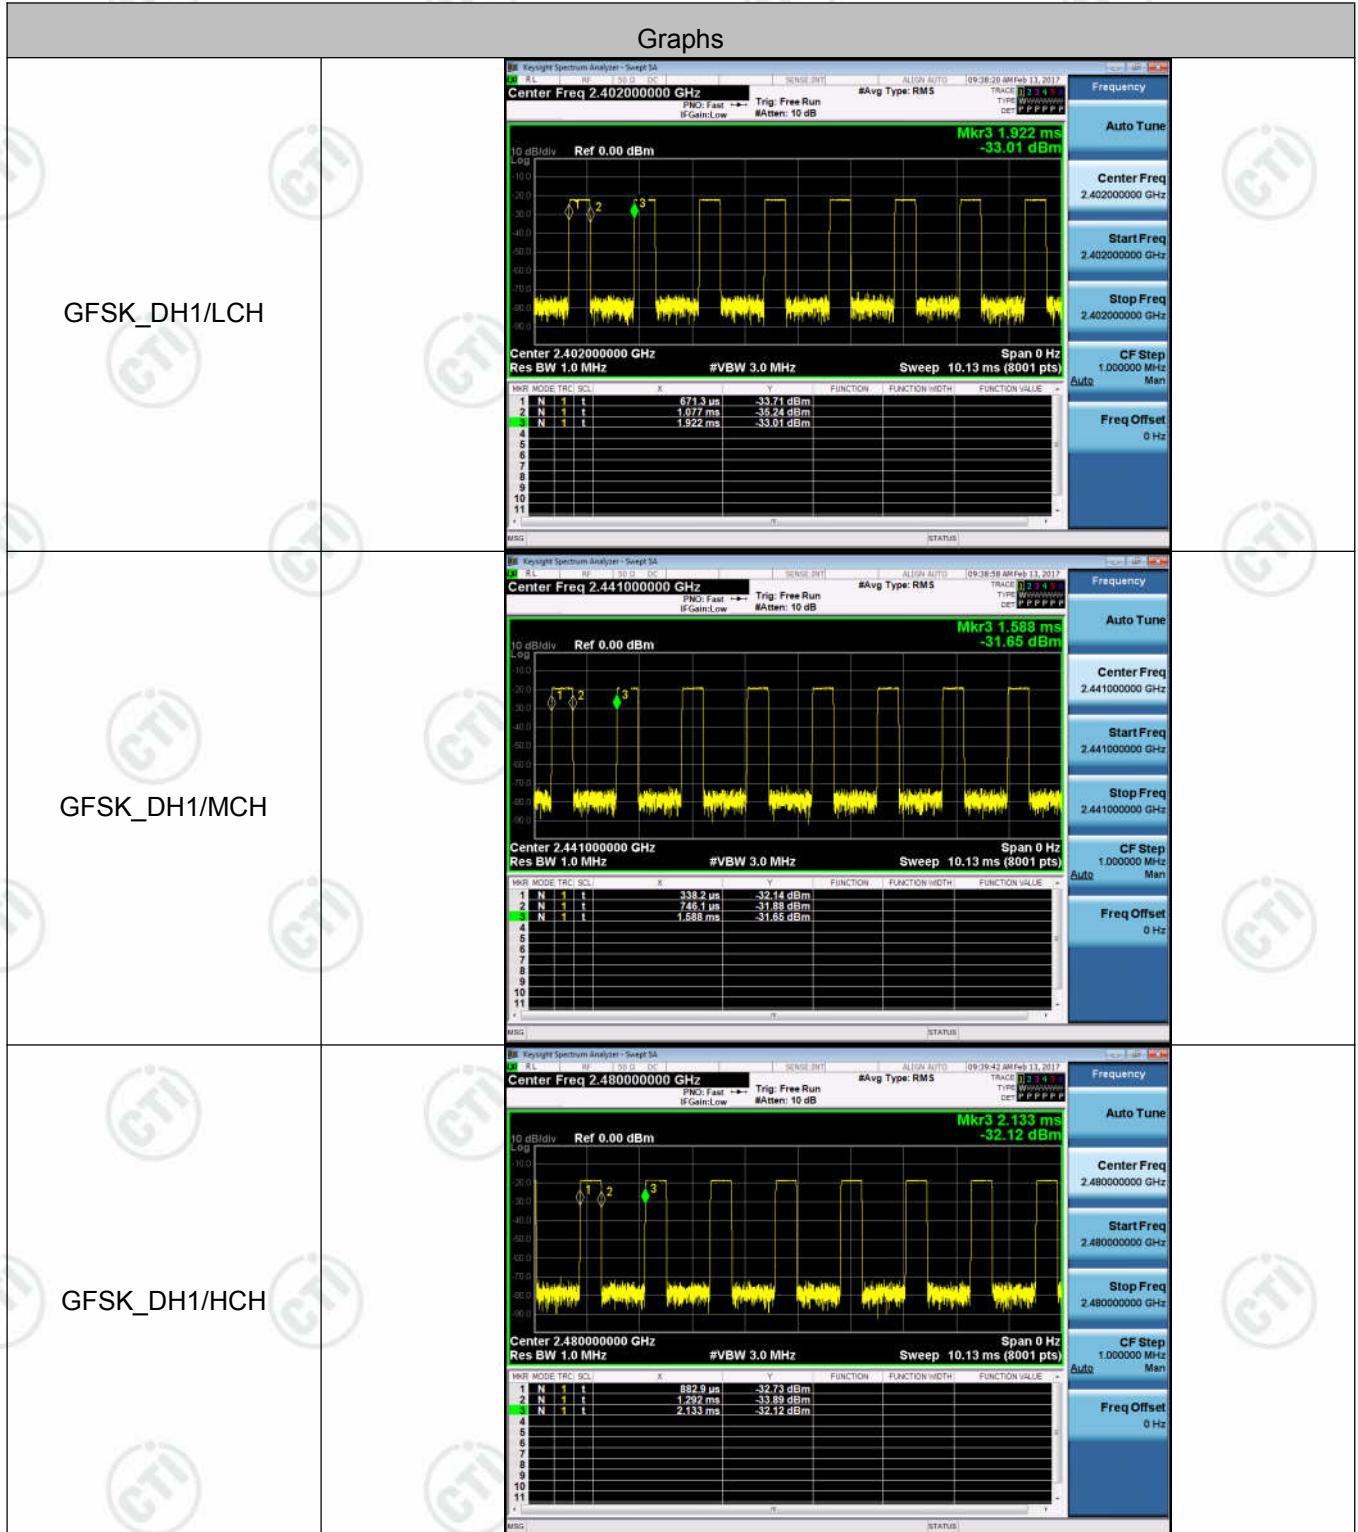

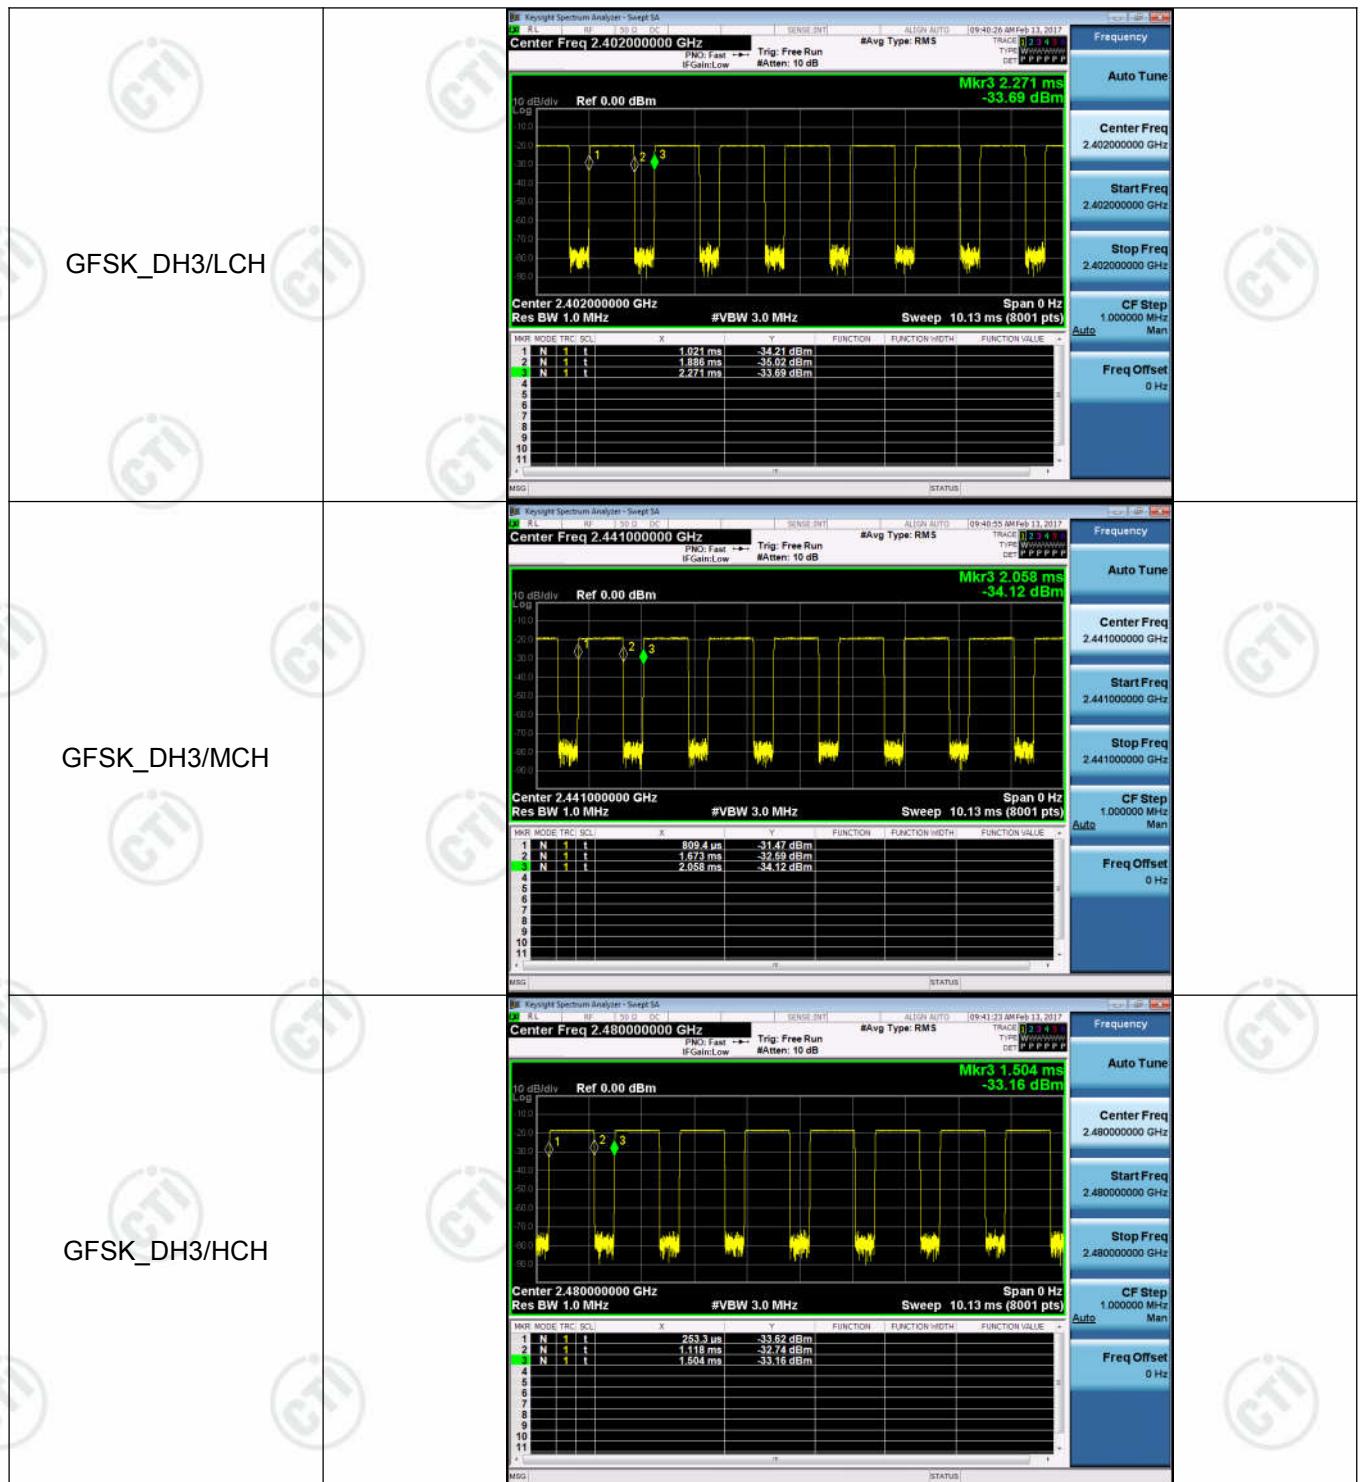





## Appendix D): Hopping Channel Number

### Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

### Test Graph

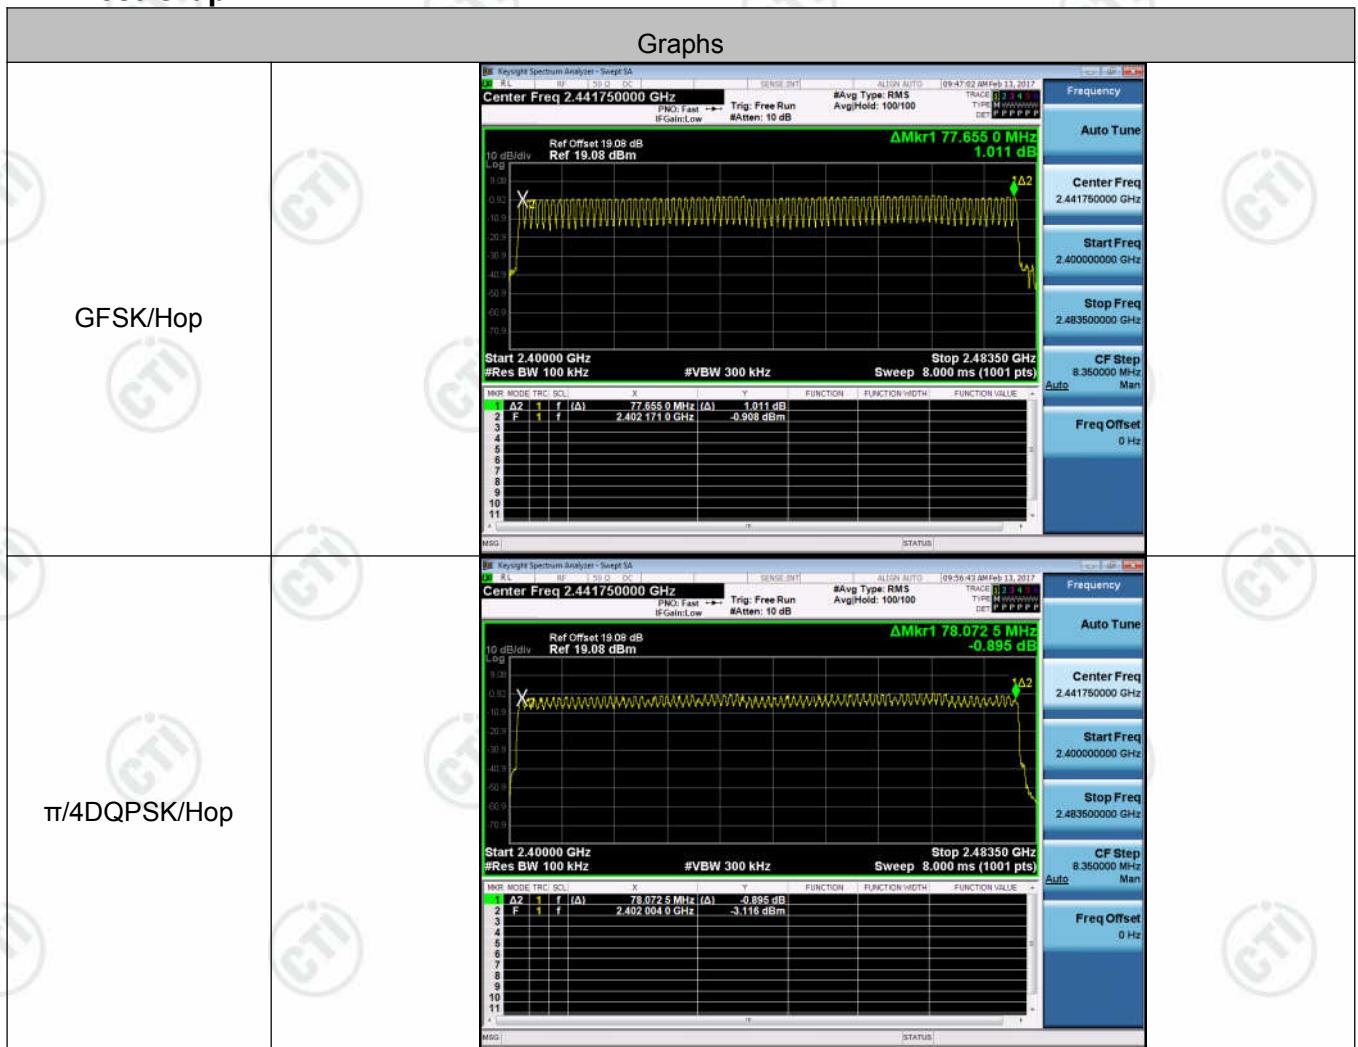


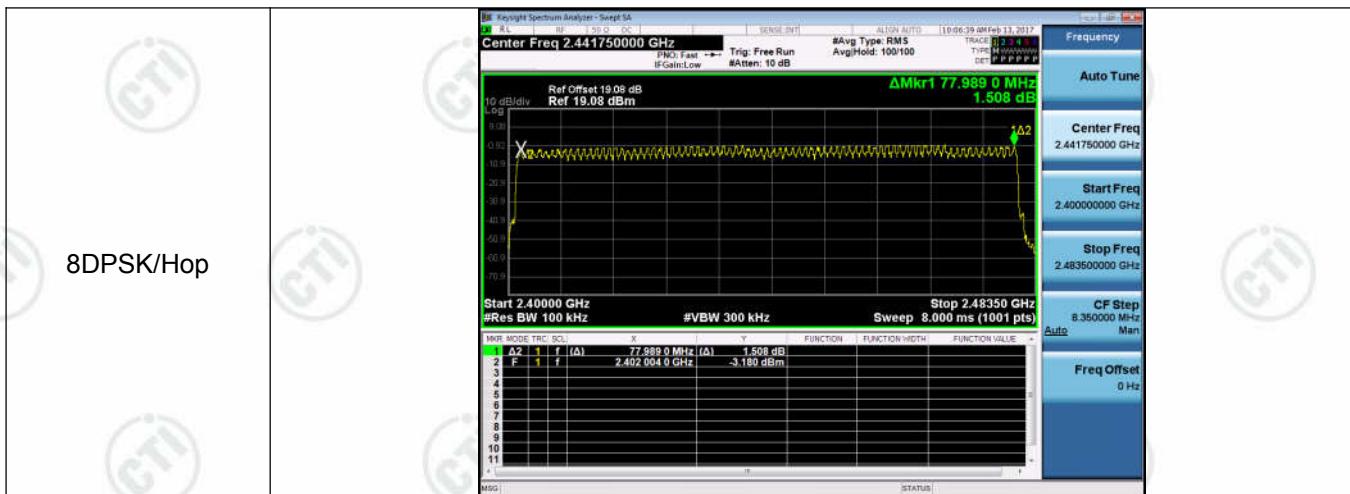



**Appendix E): Conducted Peak Output Power****Result Table**

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	-0.090	PASS
GFSK	MCH	0.671	PASS
GFSK	HCH	1.153	PASS
$\pi/4$ DQPSK	LCH	-1.684	PASS
$\pi/4$ DQPSK	MCH	-0.815	PASS
$\pi/4$ DQPSK	HCH	-0.347	PASS
8DPSK	LCH	-1.536	PASS
8DPSK	MCH	-0.642	PASS
8DPSK	HCH	-0.052	PASS

## Test Graph

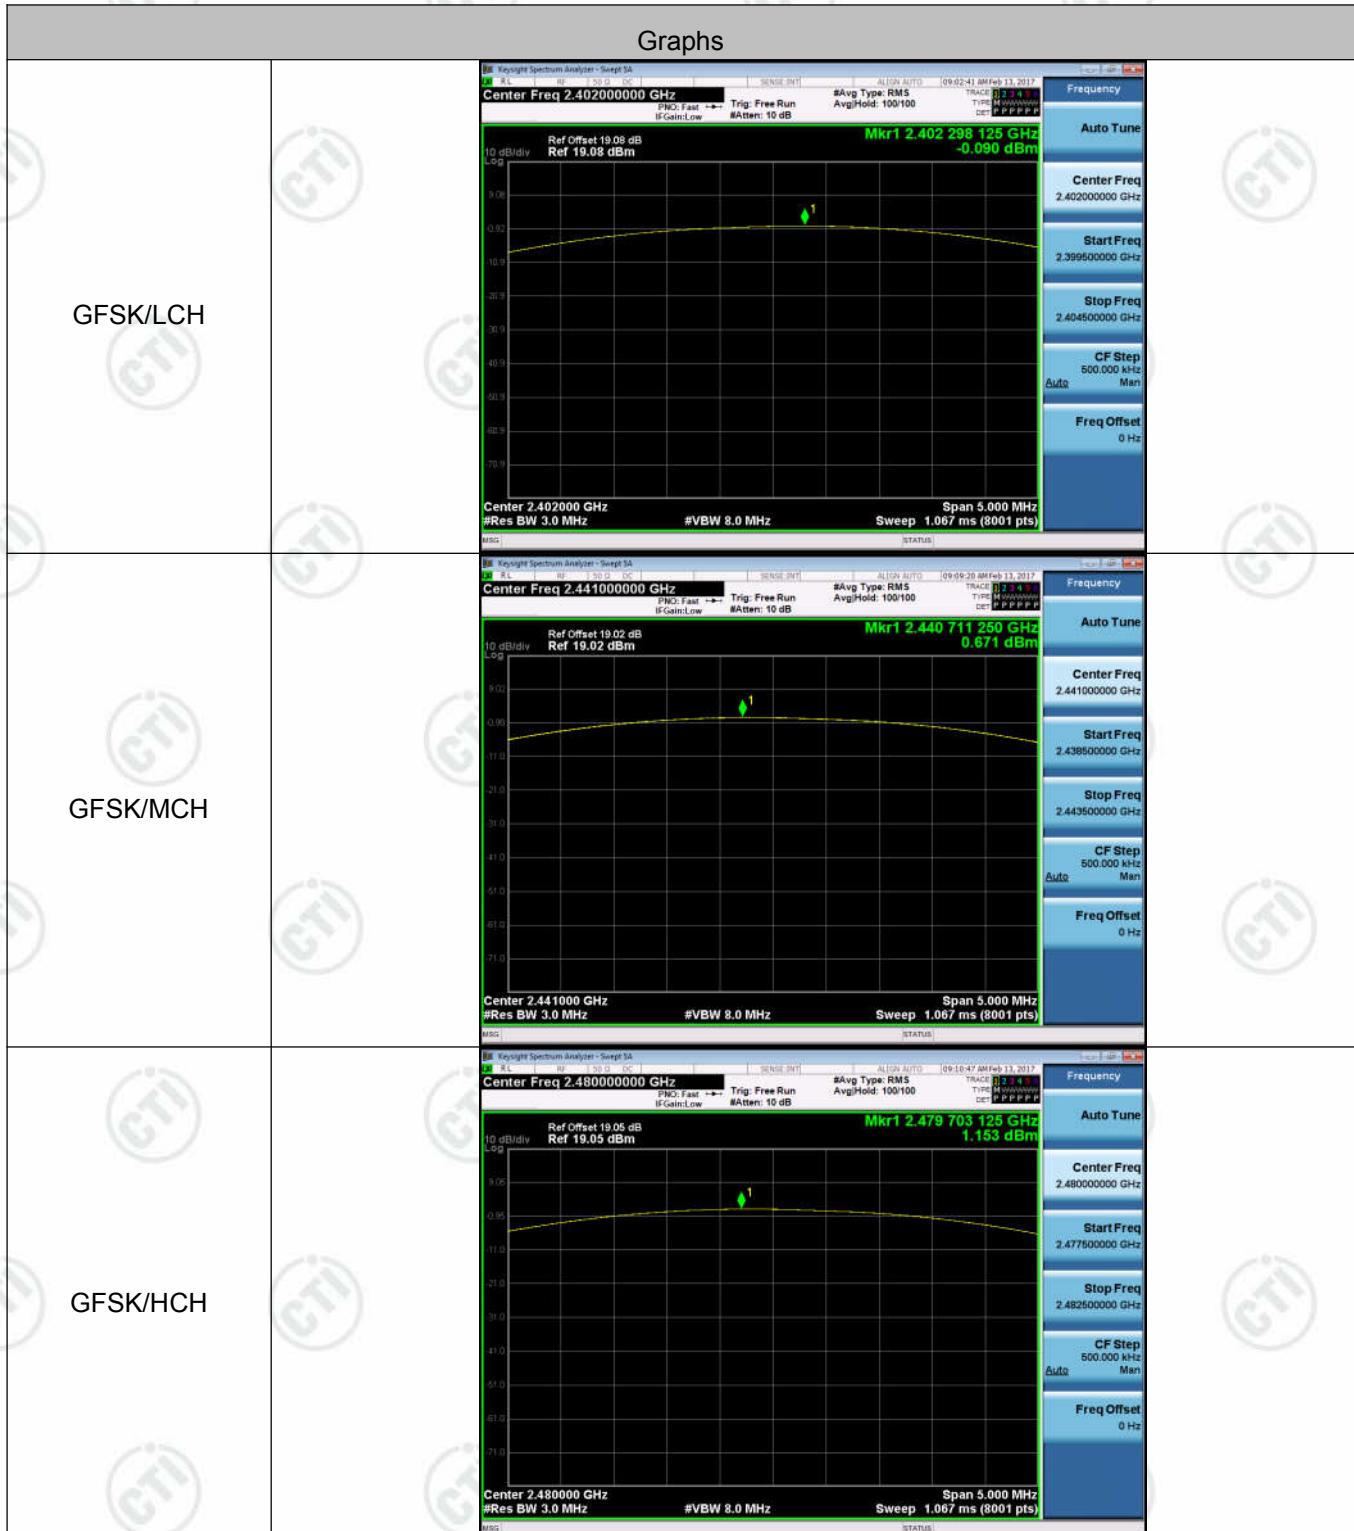

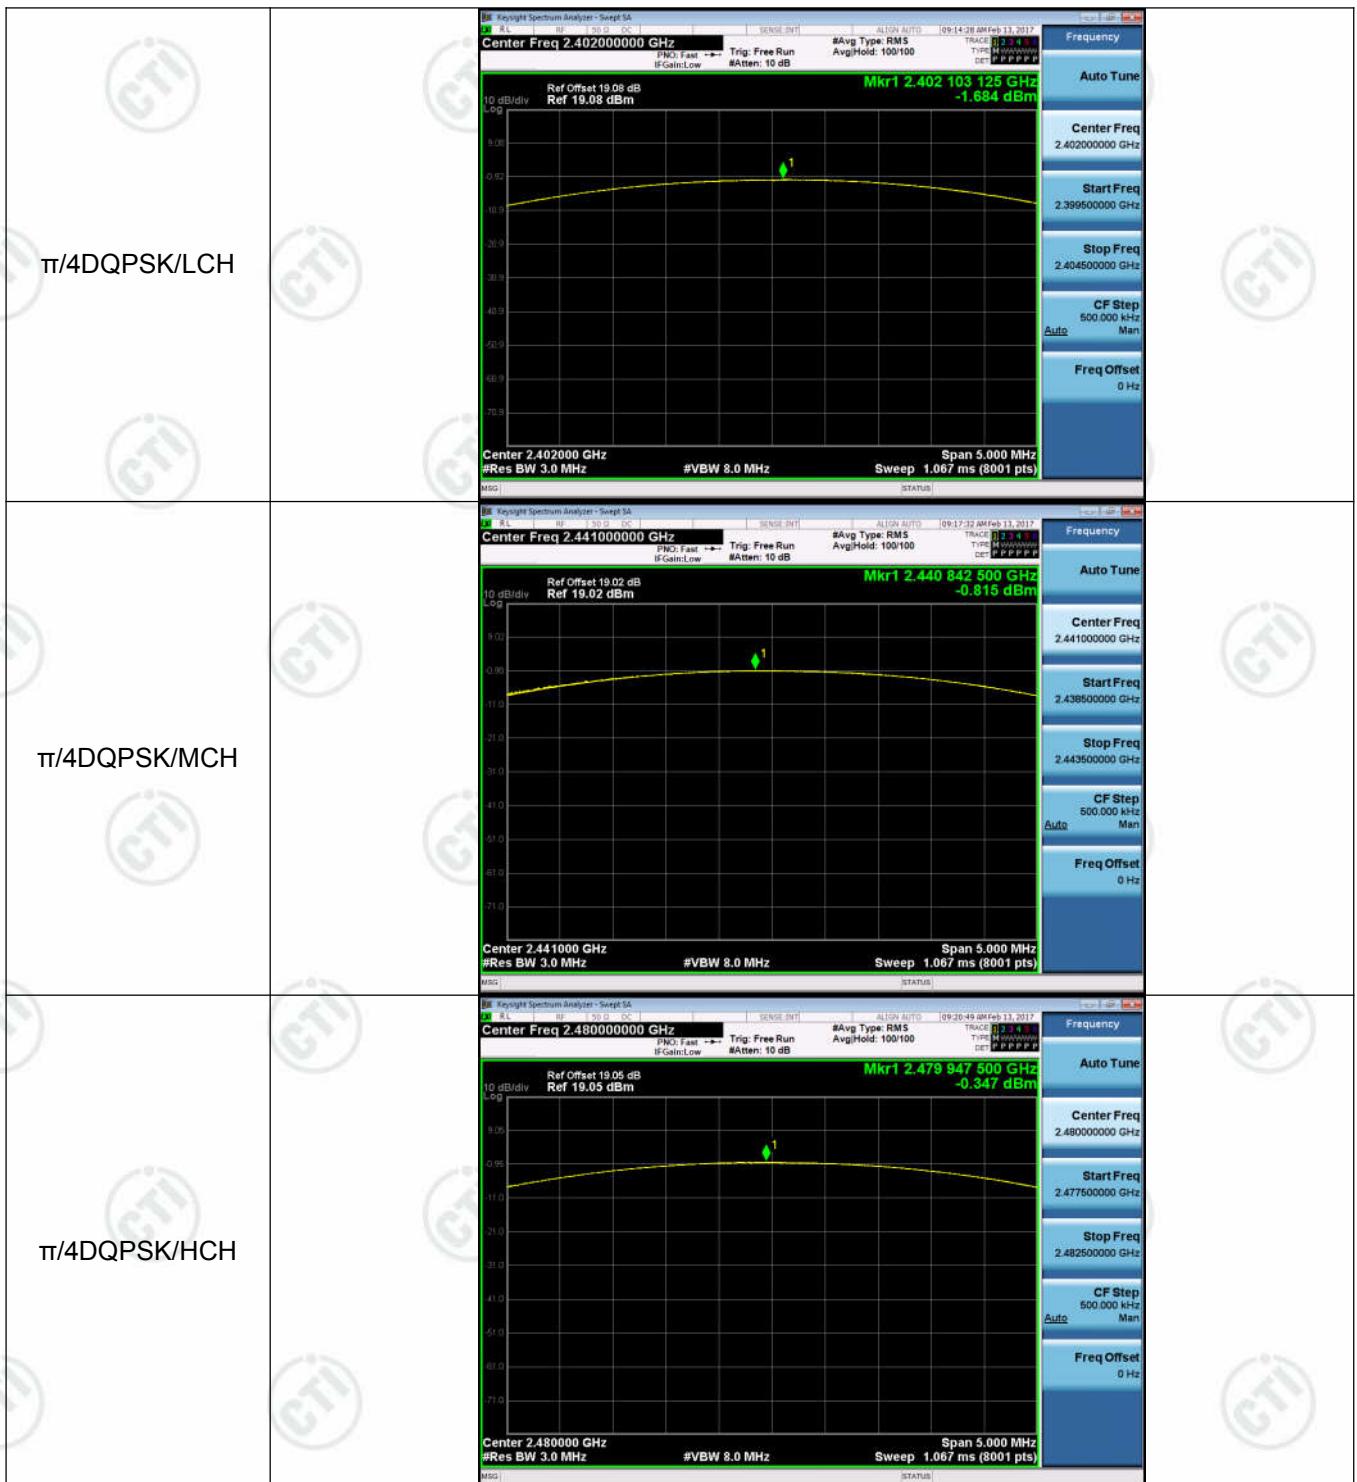

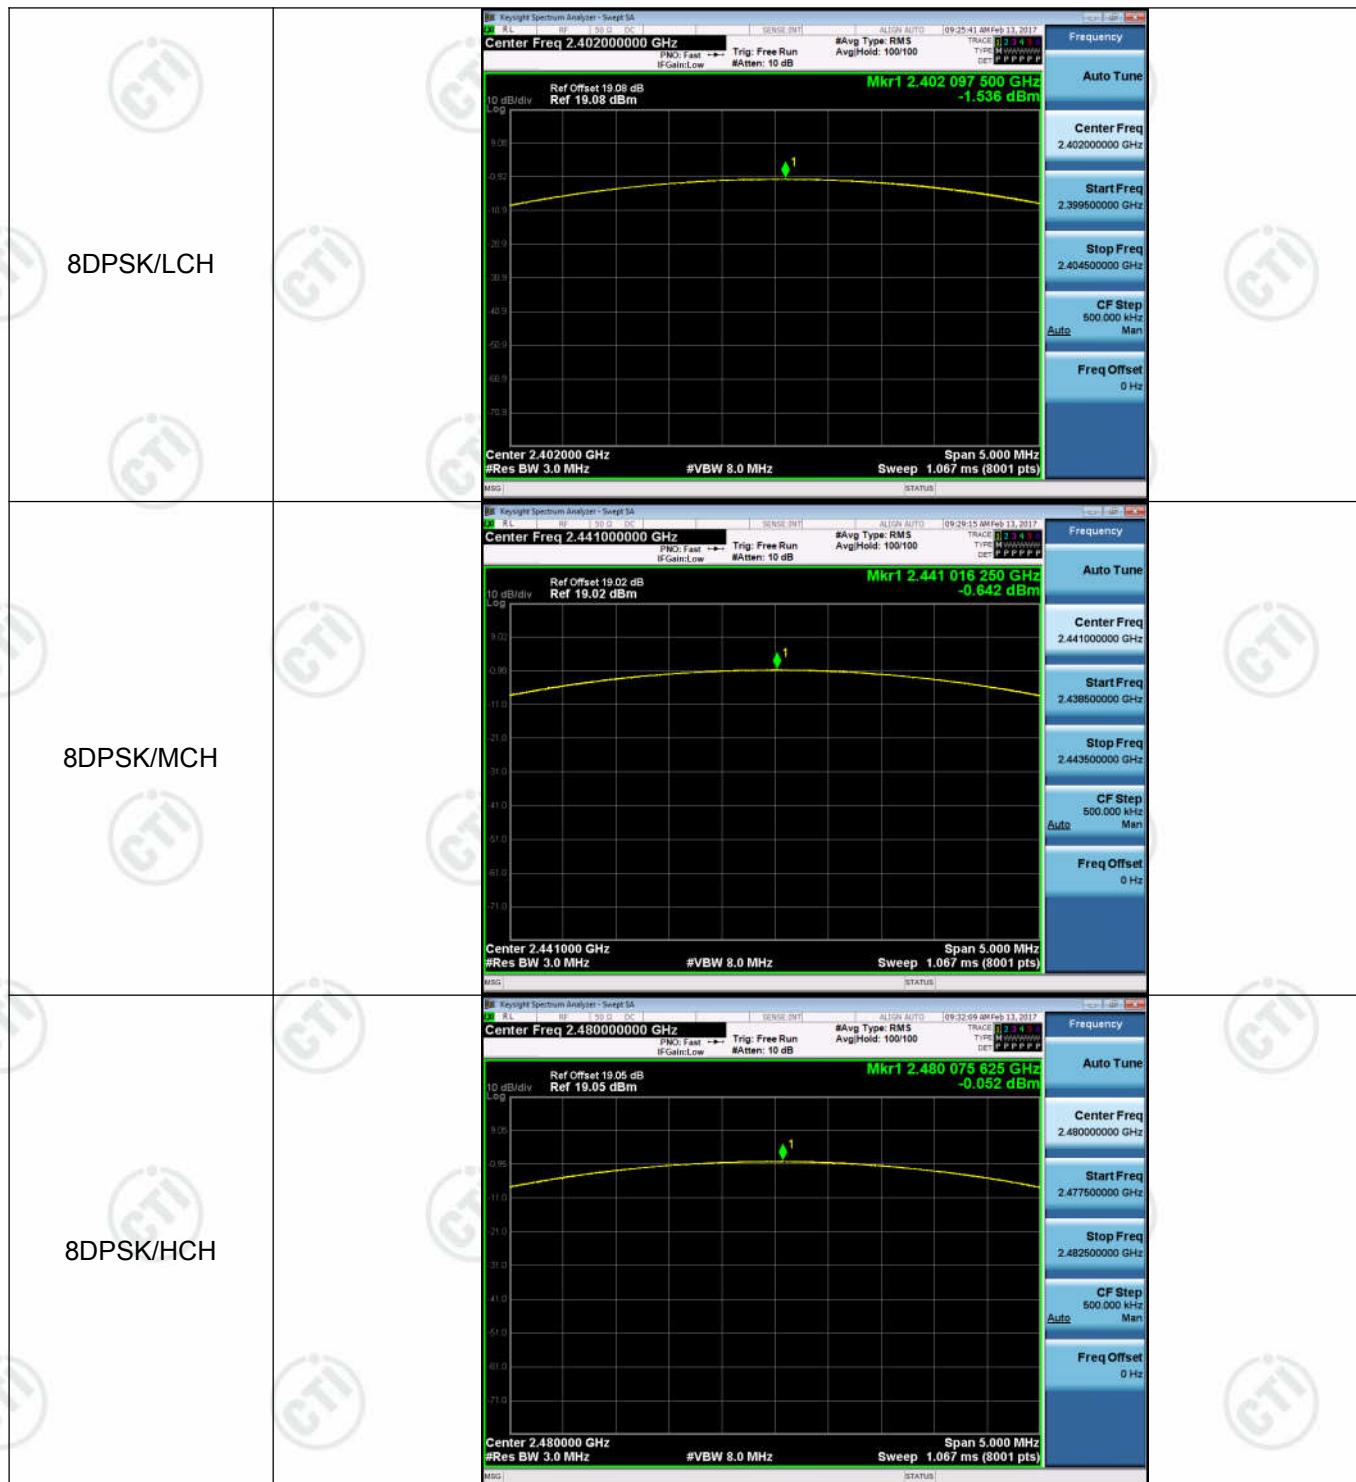



## Appendix F): Band-edge for RF Conducted Emissions


### Result Table


Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	-0.874	Off	-61.054	-20.87	PASS
			-1.076	On	-59.890	-21.08	PASS
GFSK	HCH	2480	0.451	Off	-45.263	-19.55	PASS
			0.003	On	-46.227	-20	PASS
$\pi/4$ DQPSK	LCH	2402	-3.170	Off	-61.102	-23.17	PASS
			-3.123	On	-60.158	-23.12	PASS
$\pi/4$ DQPSK	HCH	2480	-2.004	Off	-57.703	-22	PASS
			-1.794	On	-58.437	-21.79	PASS
8DPSK	LCH	2402	-3.034	Off	-61.297	-23.03	PASS
			-3.074	On	-60.346	-23.07	PASS
8DPSK	HCH	2480	-1.692	Off	-57.382	-21.69	PASS
			-1.868	On	-58.803	-21.87	PASS

### Test Graph

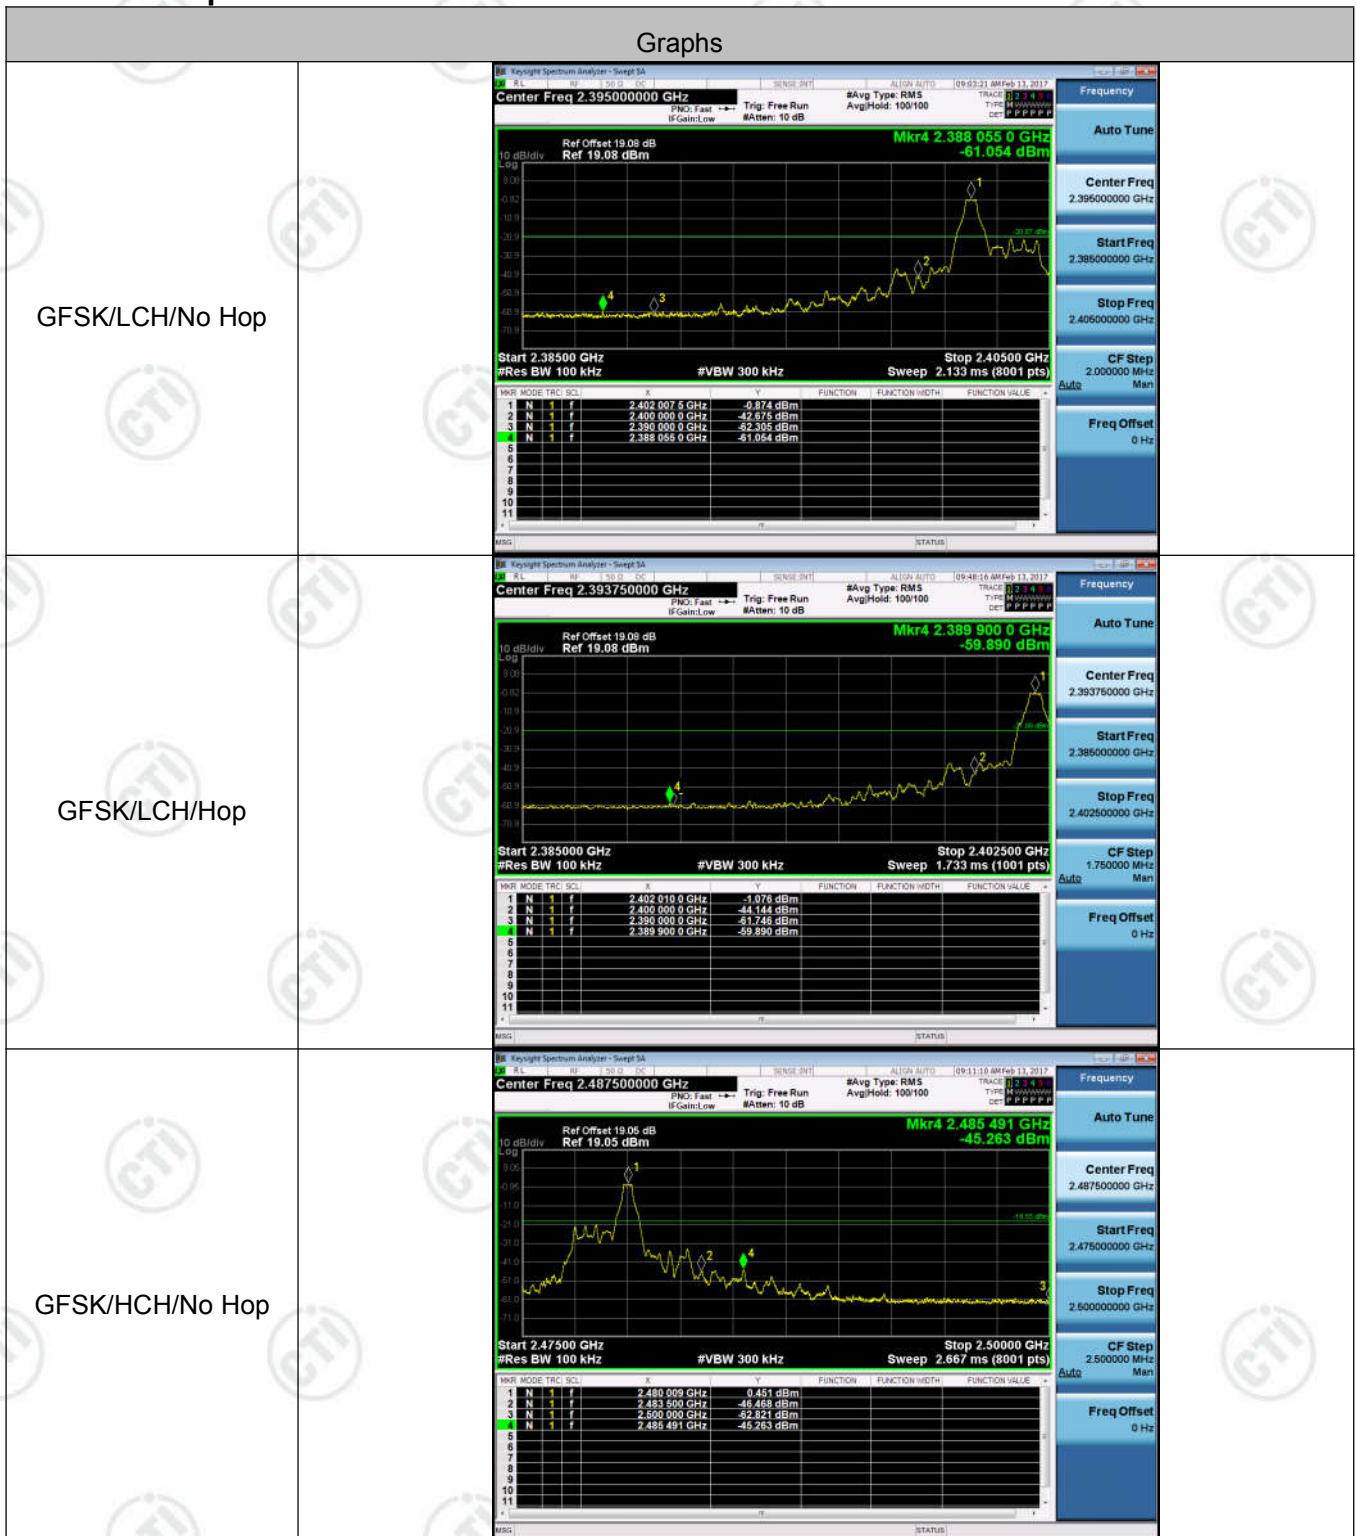

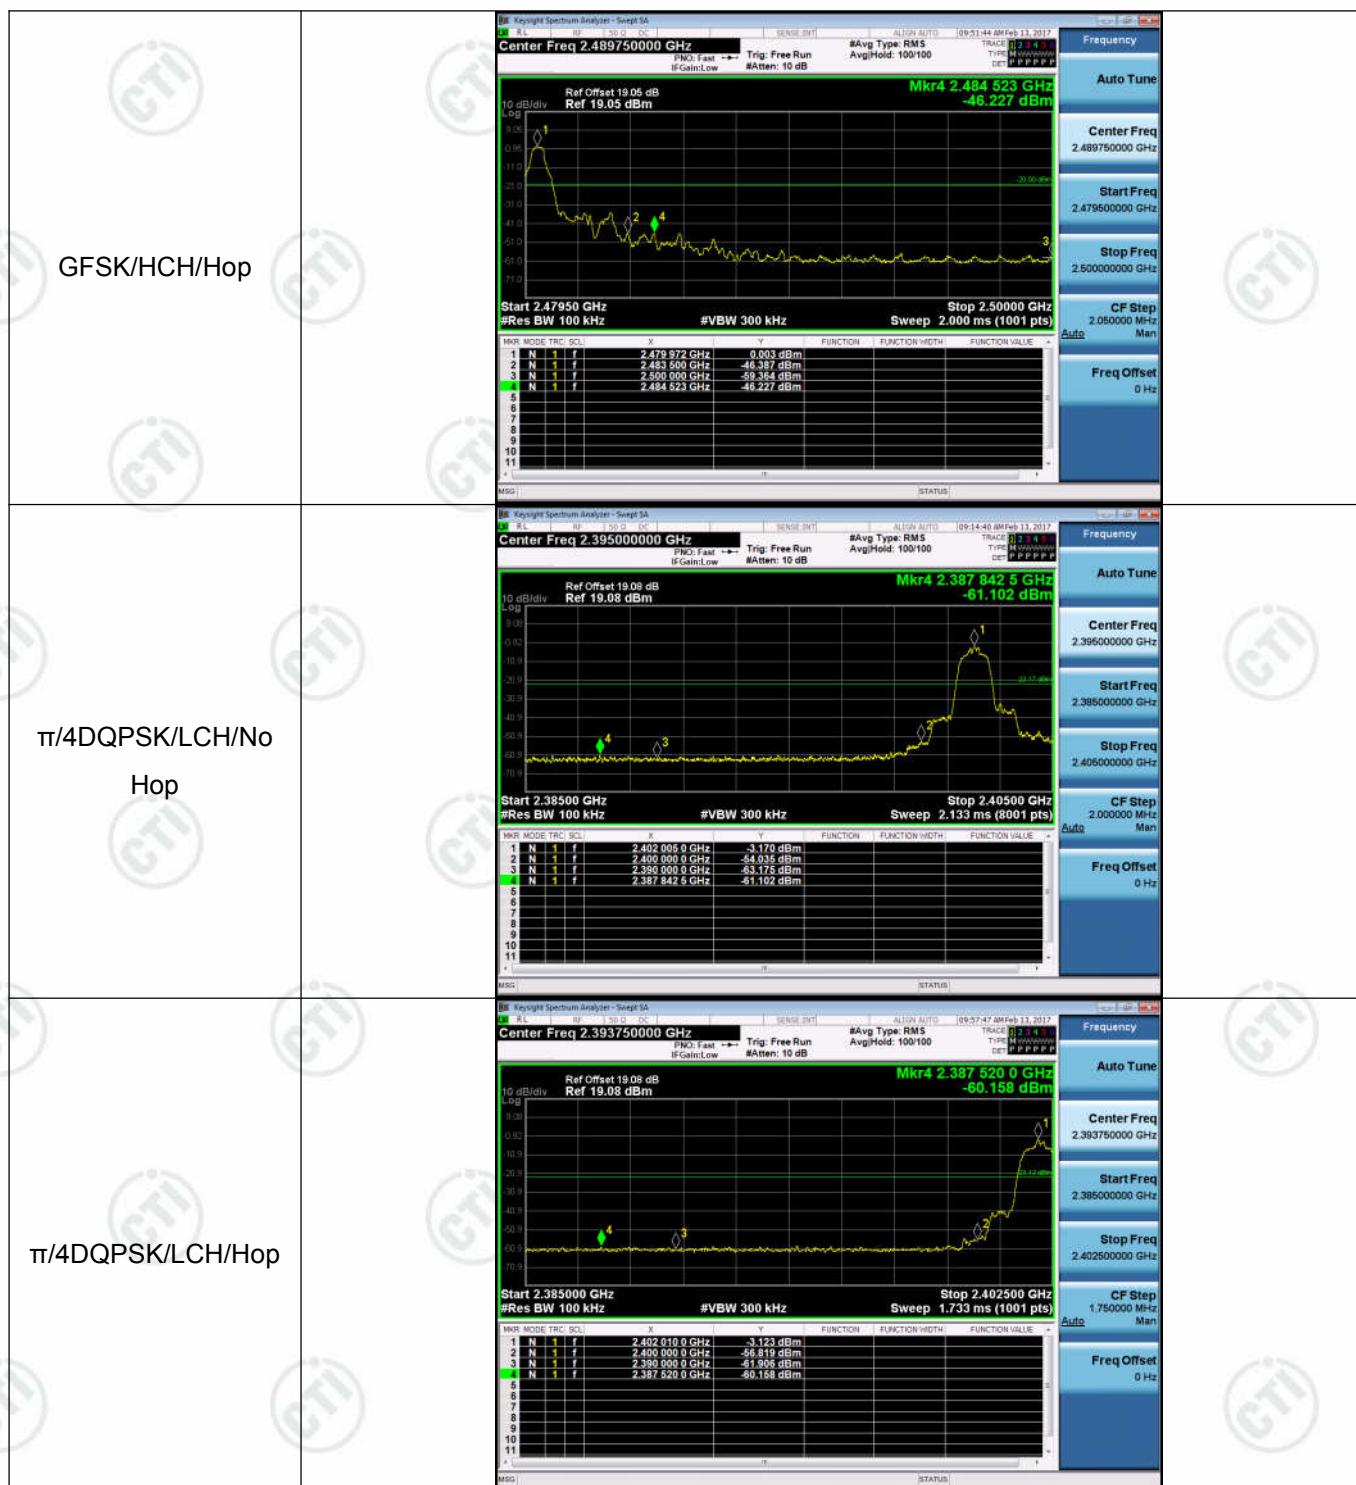

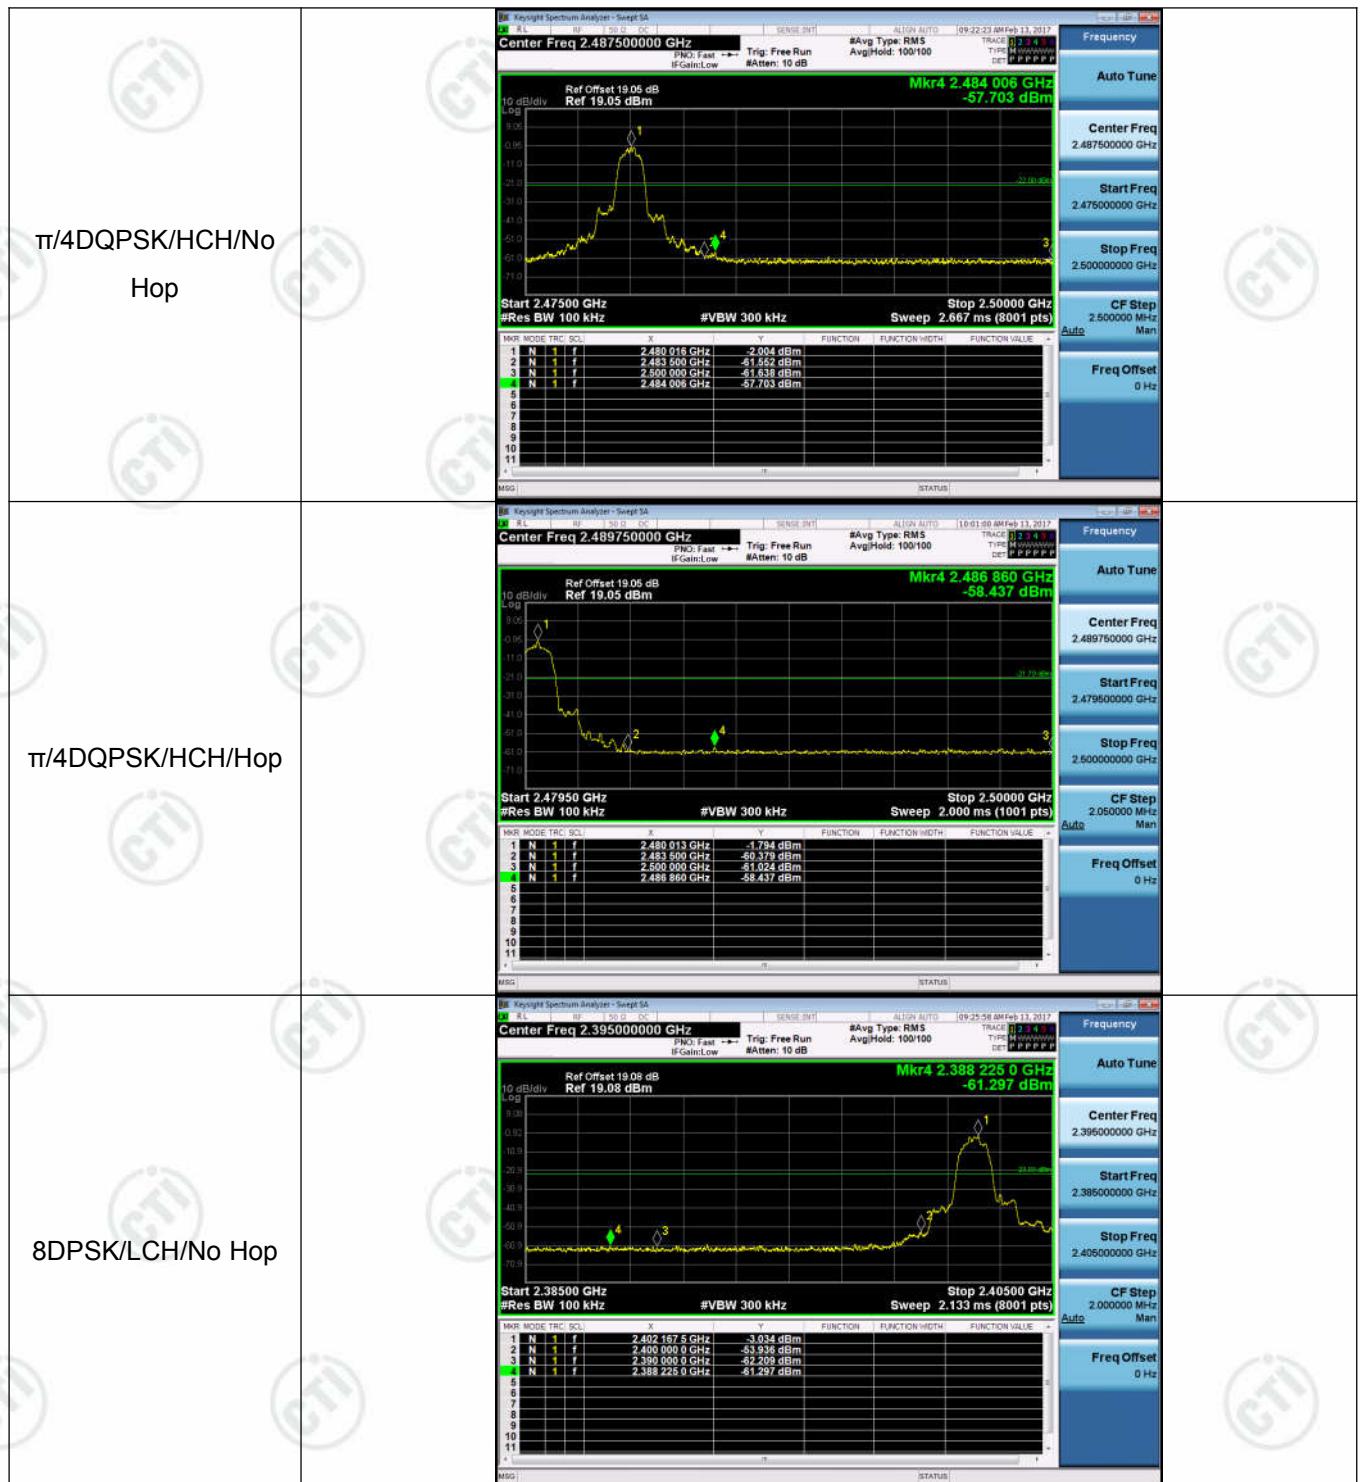


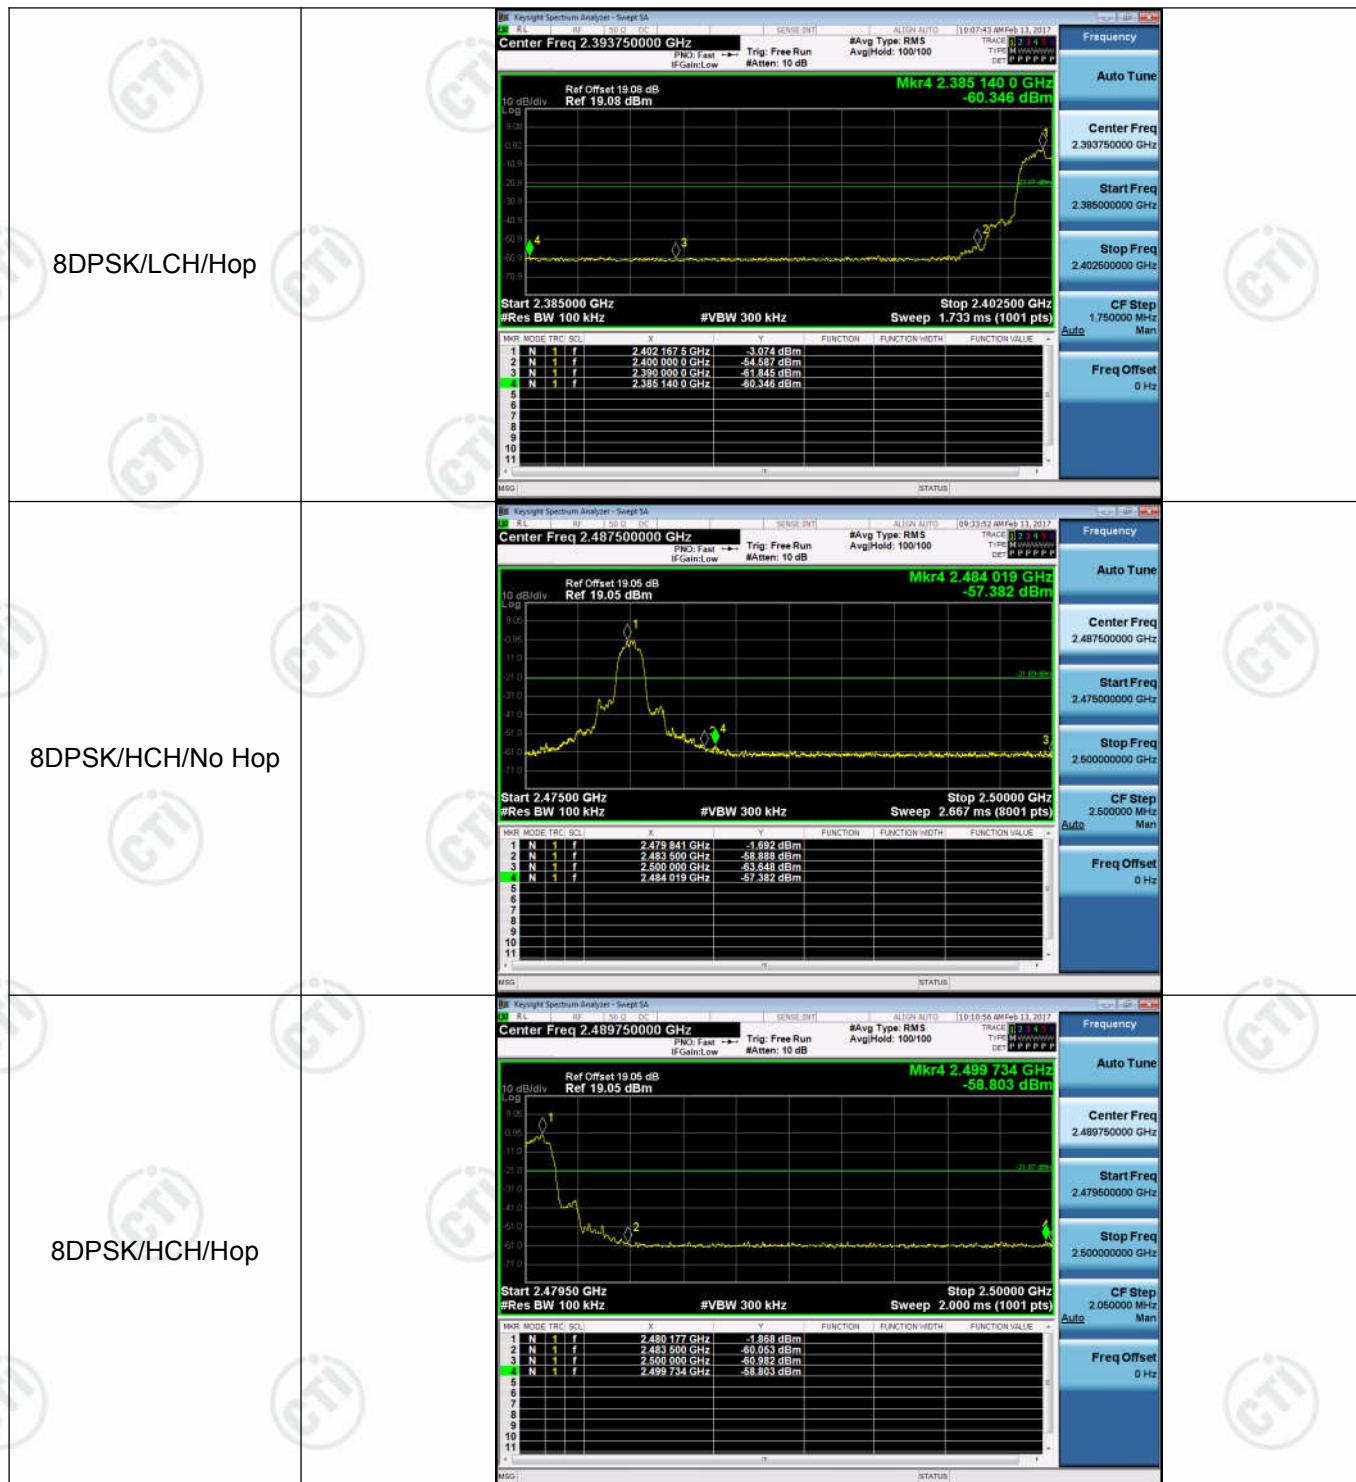




## Appendix G): RF Conducted Spurious Emissions Result Table



Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	-0.933	<Limit	PASS
GFSK	MCH	-0.247	<Limit	PASS
GFSK	HCH	0.294	<Limit	PASS
$\pi/4$ DQPSK	LCH	-3.152	<Limit	PASS
$\pi/4$ DQPSK	MCH	-2.559	<Limit	PASS
$\pi/4$ DQPSK	HCH	-1.764	<Limit	PASS
8DPSK	LCH	-3.038	<Limit	PASS
8DPSK	MCH	-2.283	<Limit	PASS
8DPSK	HCH	-1.706	<Limit	PASS


### Test Graph





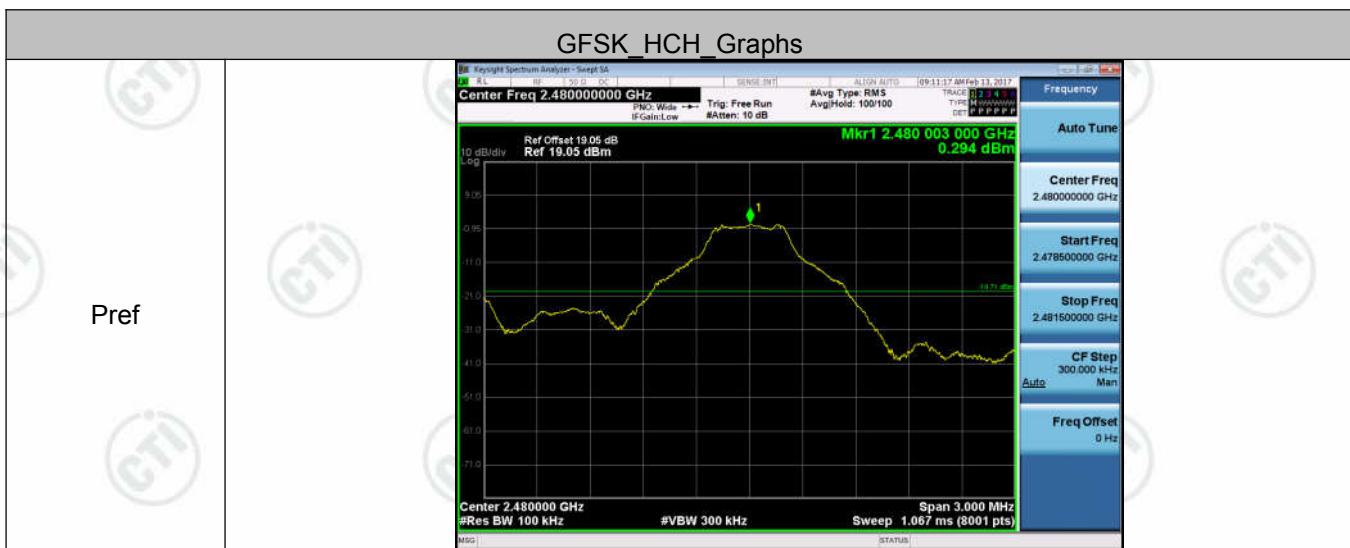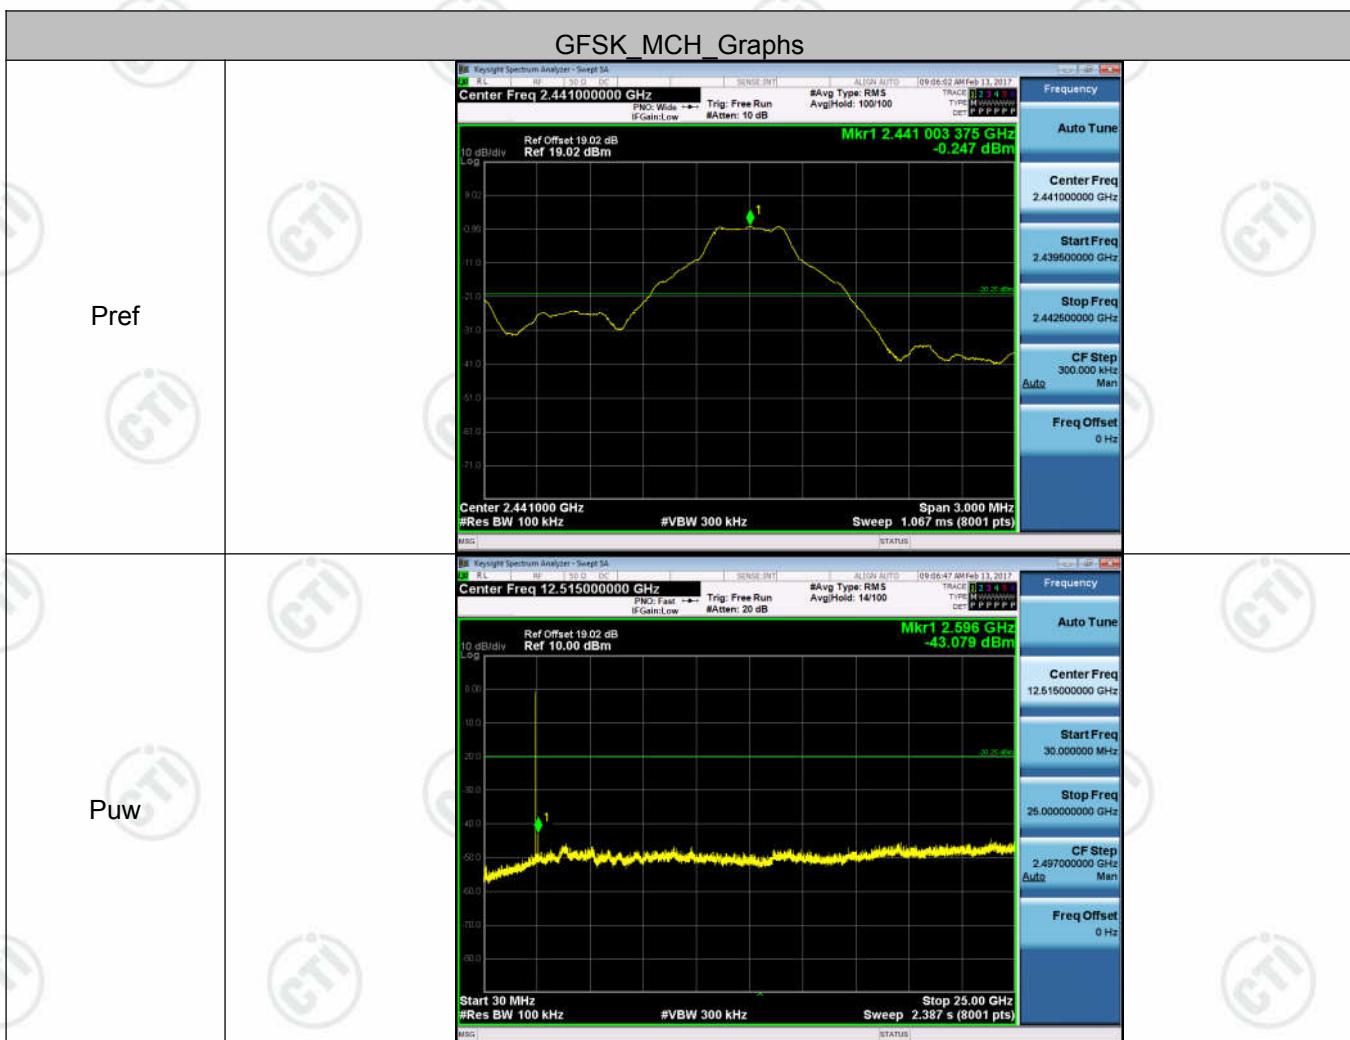


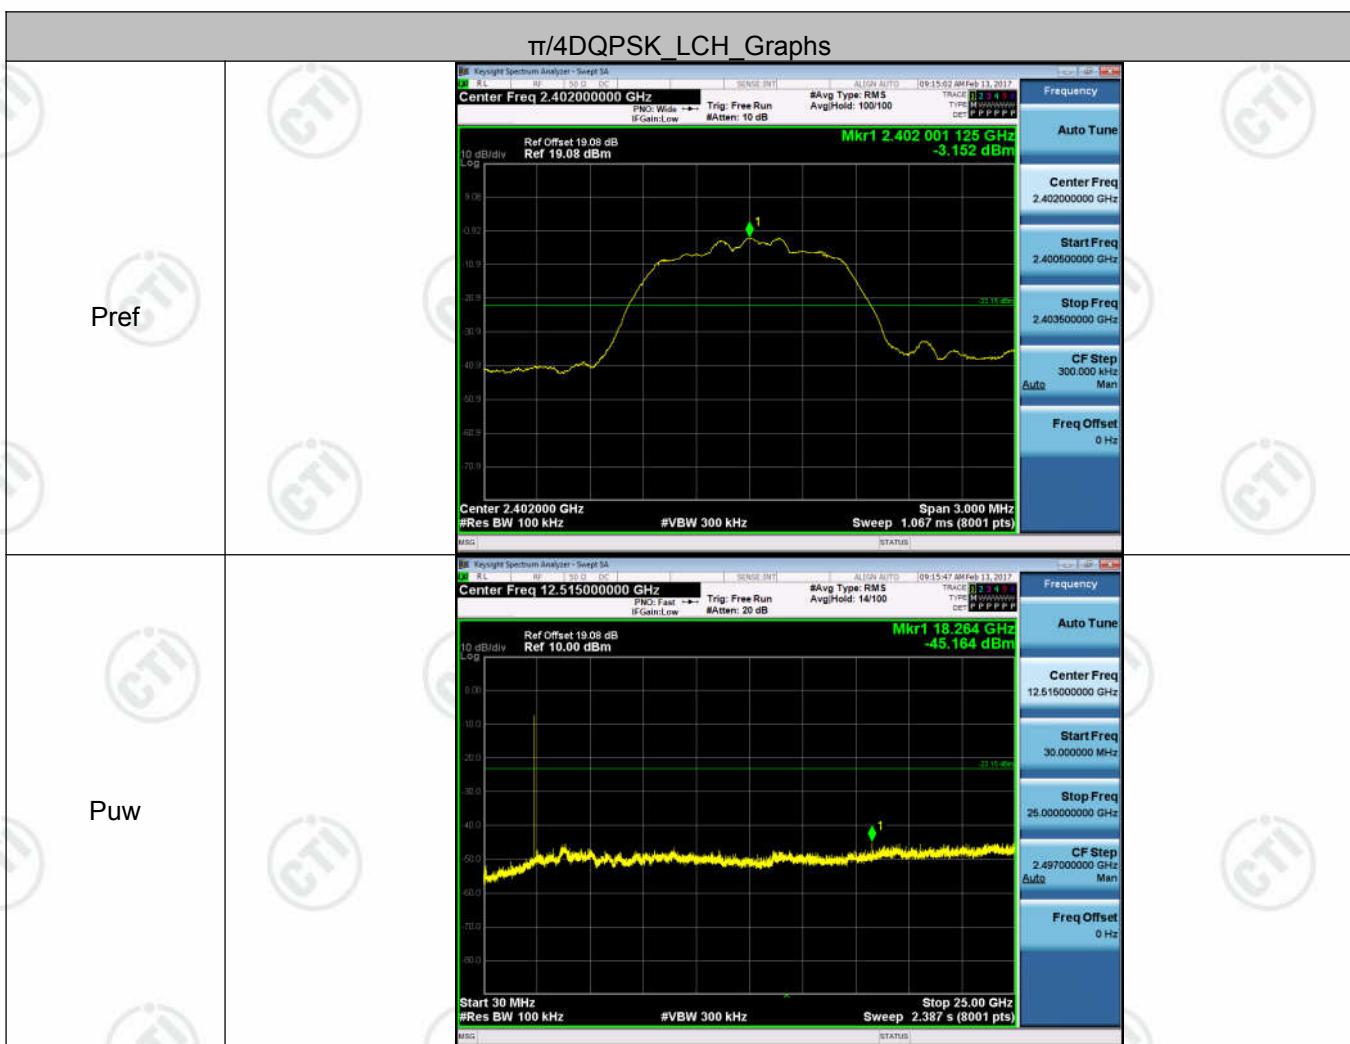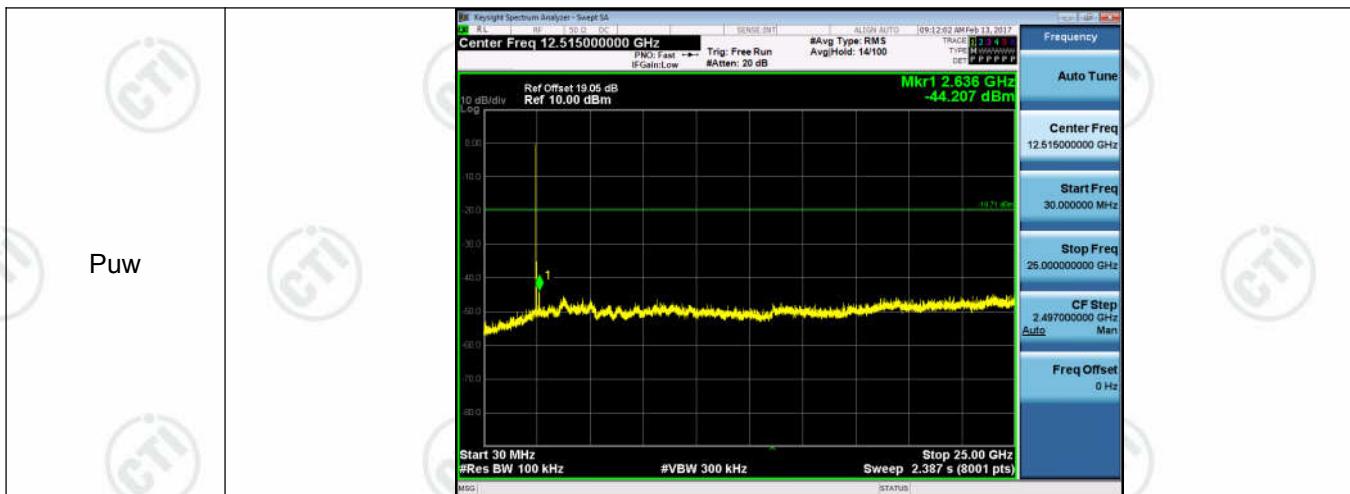

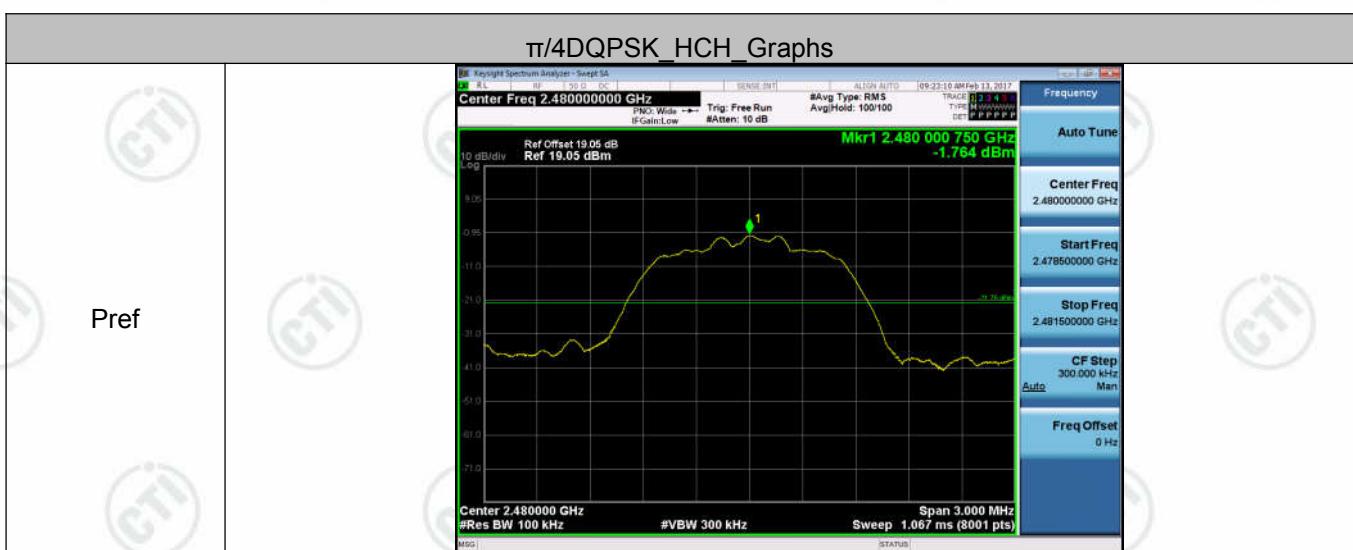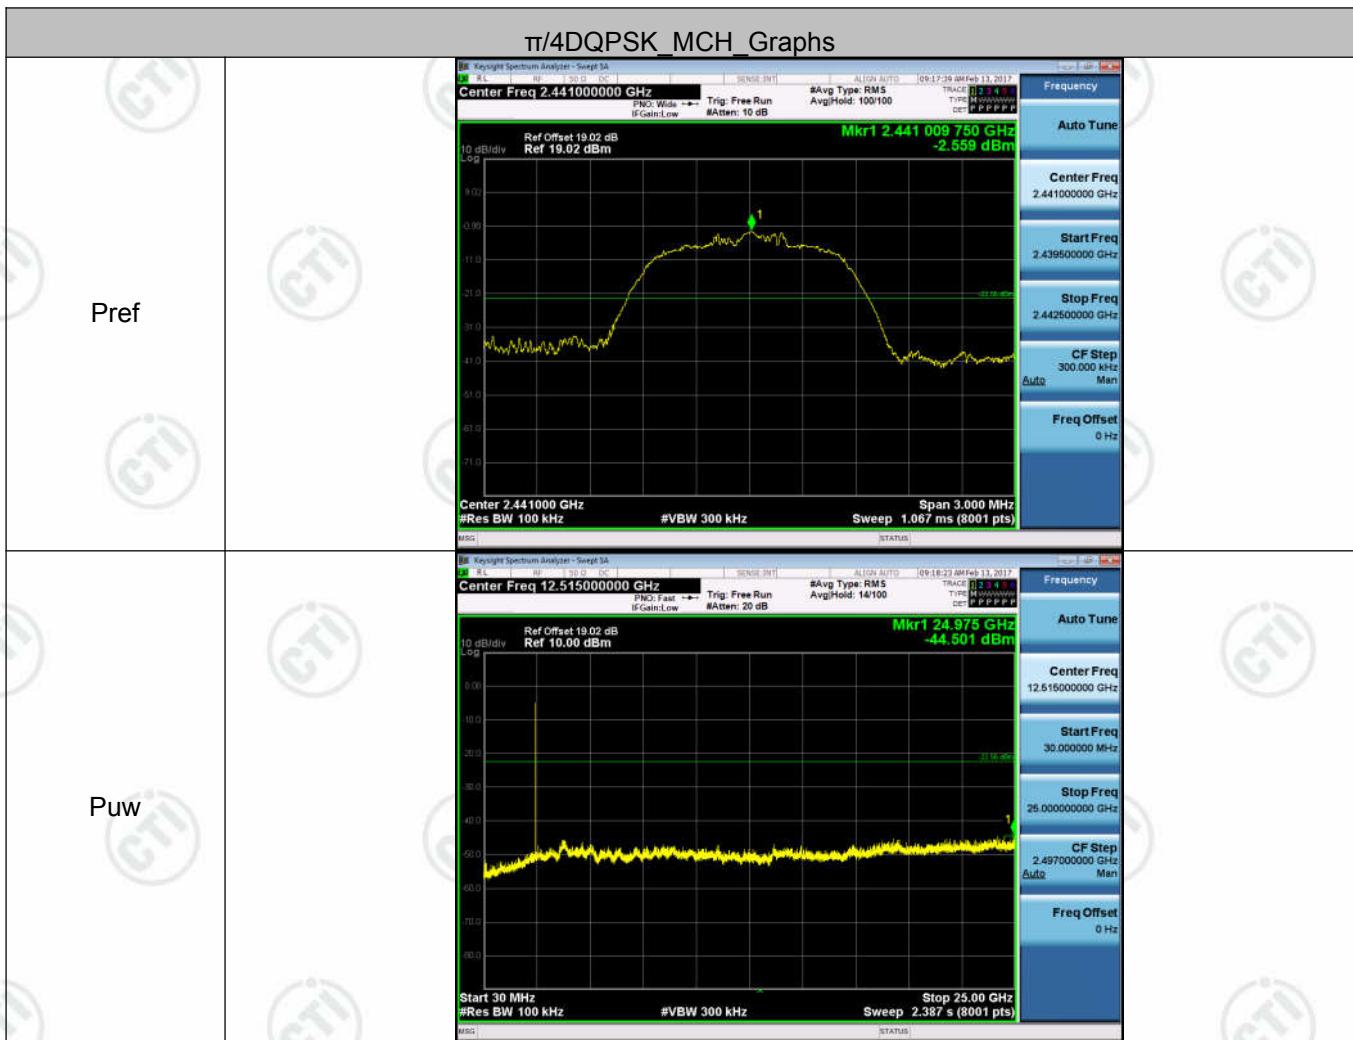

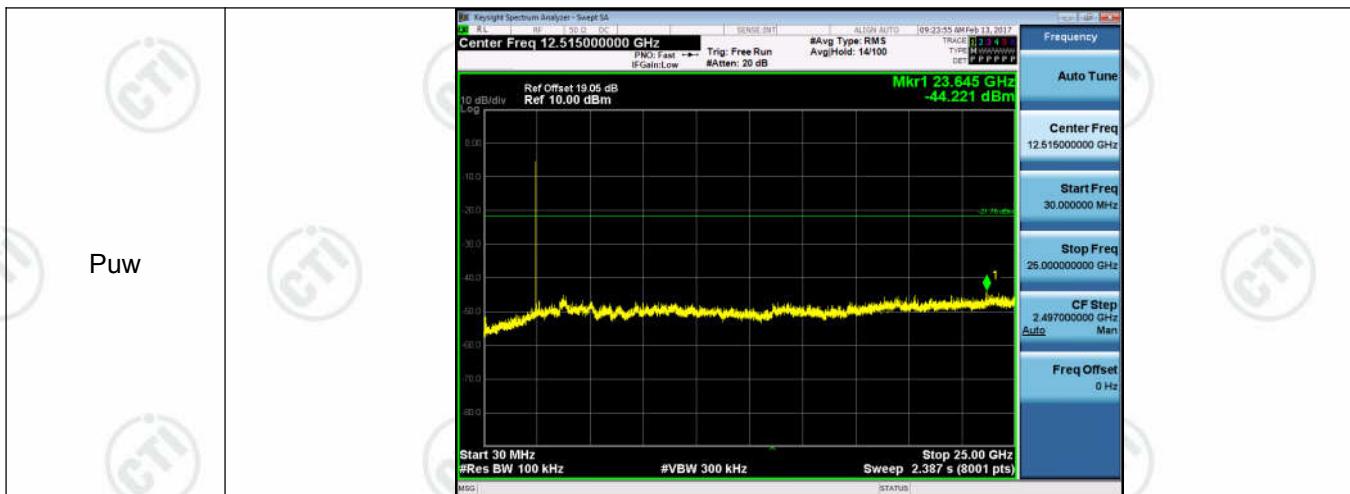

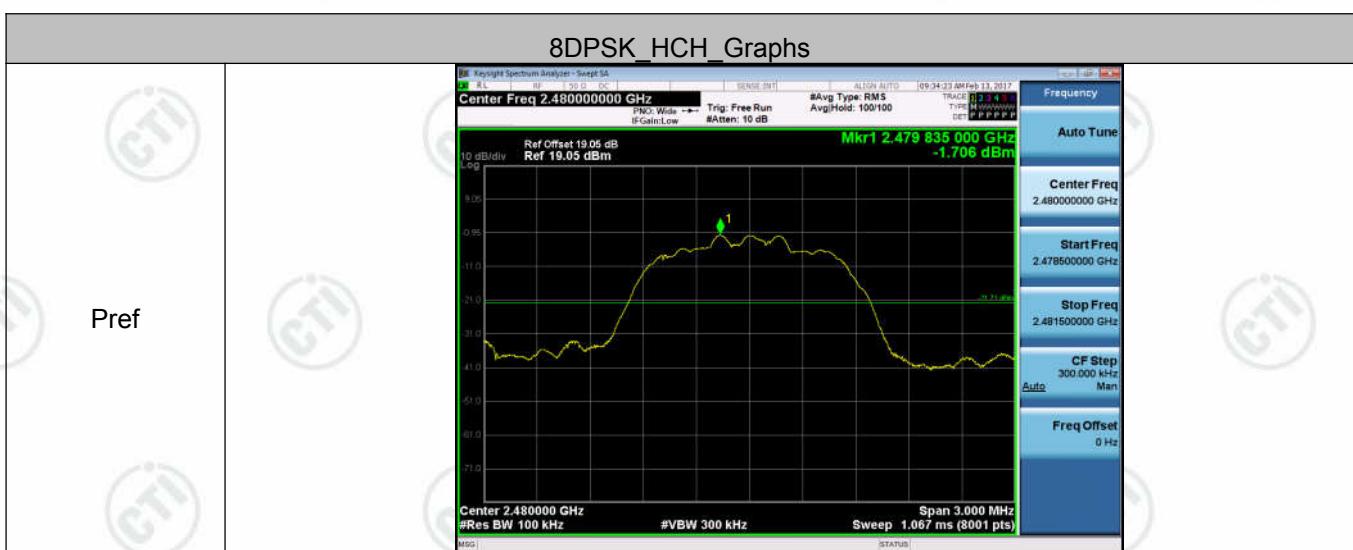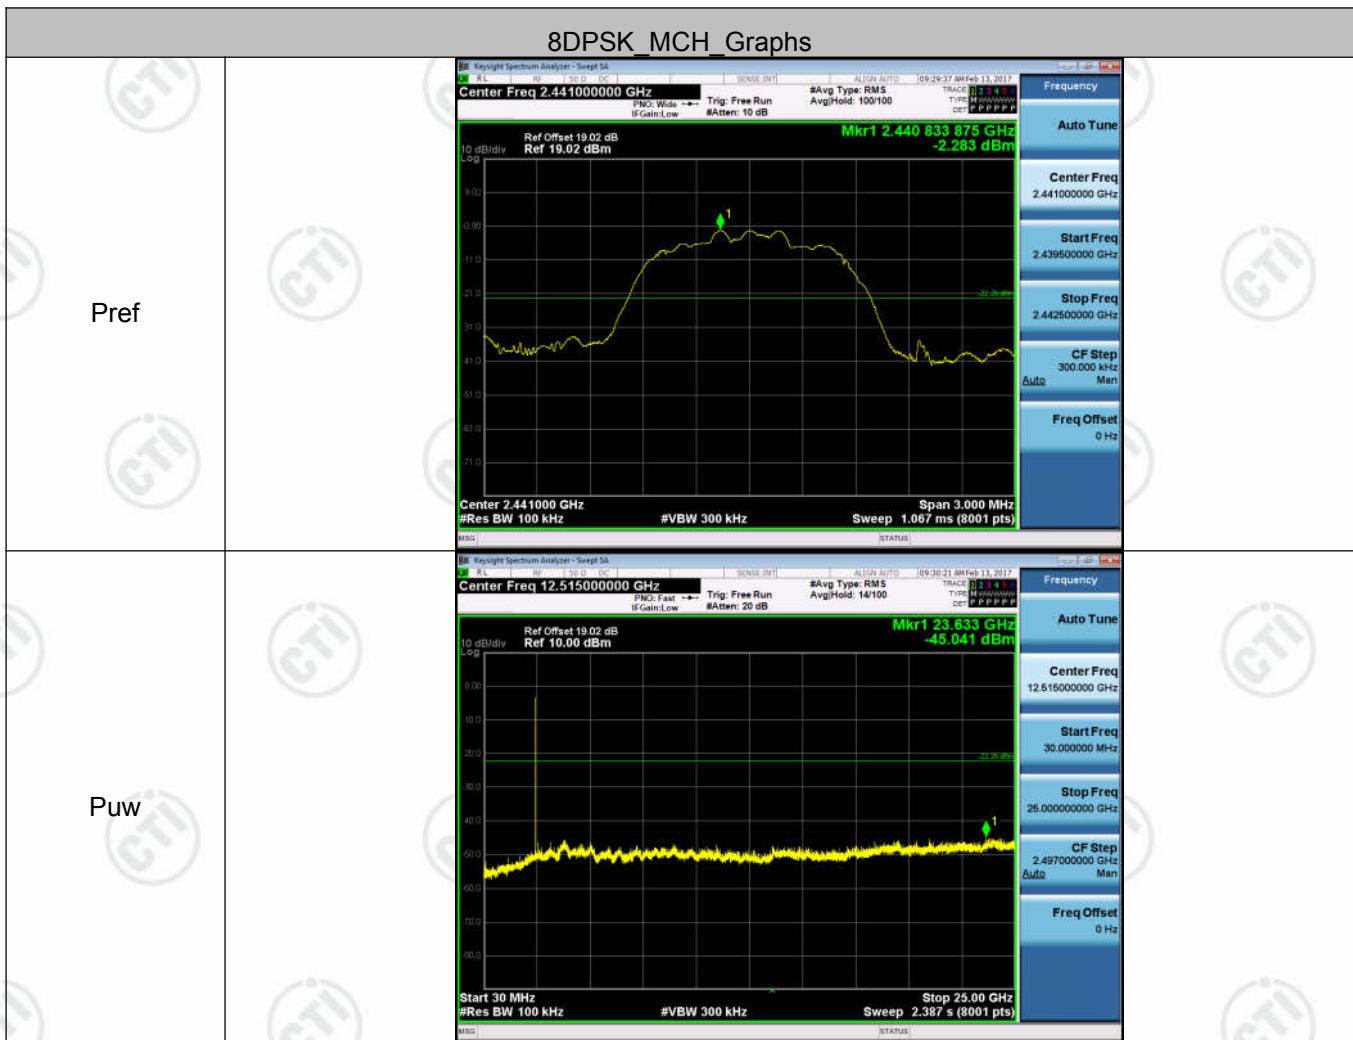

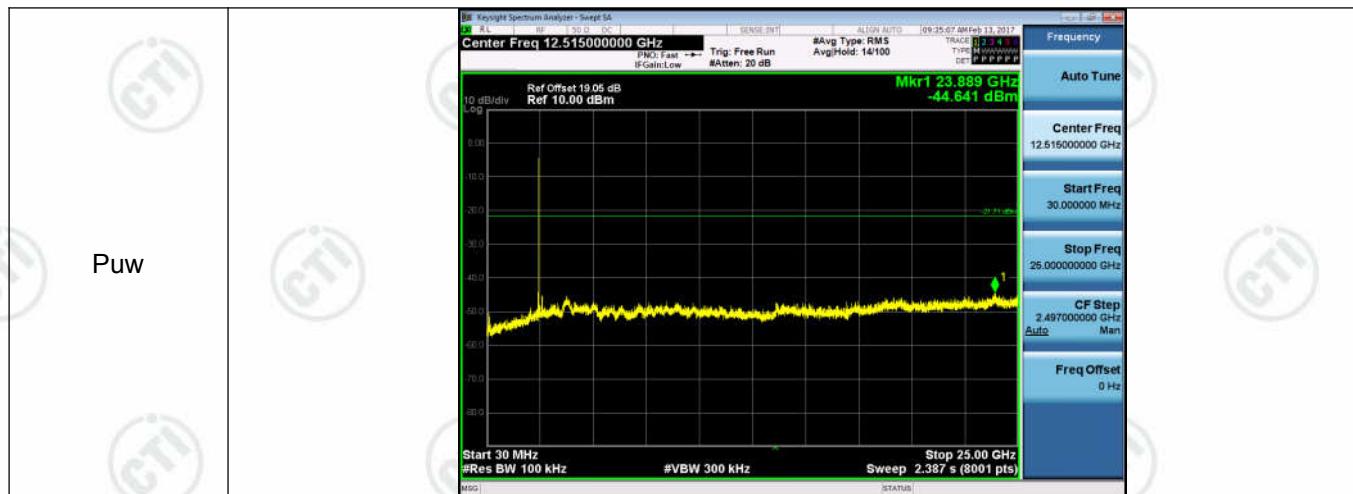

Puw



## Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>
<b>Frequency Hopping System</b>	
<p>This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.</p> <p>This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.</p> <p>Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.</p>	
<b>EUT Pseudorandom Frequency Hopping Sequence</b>	
<p>Pseudorandom Frequency Hopping Sequence Table as below:</p> <p>Channel: 01, 33, 41, 65, 09, 33, 41, 40, 56, 72, 09, 78, 73, 22, 04, 20, , 11, 05, 13, 37, 45, 36, 52, 38, 46, 70, 08 24, 40, 56, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 53, 69, 06, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40 48, 72, 01, 72, 01, 76, 13, 37, 25, 33, 03, 11, 35, 43, 12, 28, 44, 60, 42, 58, 74 etc.</p> <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

## Appendix I): Antenna Requirement

### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The antenna is Monopole Antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

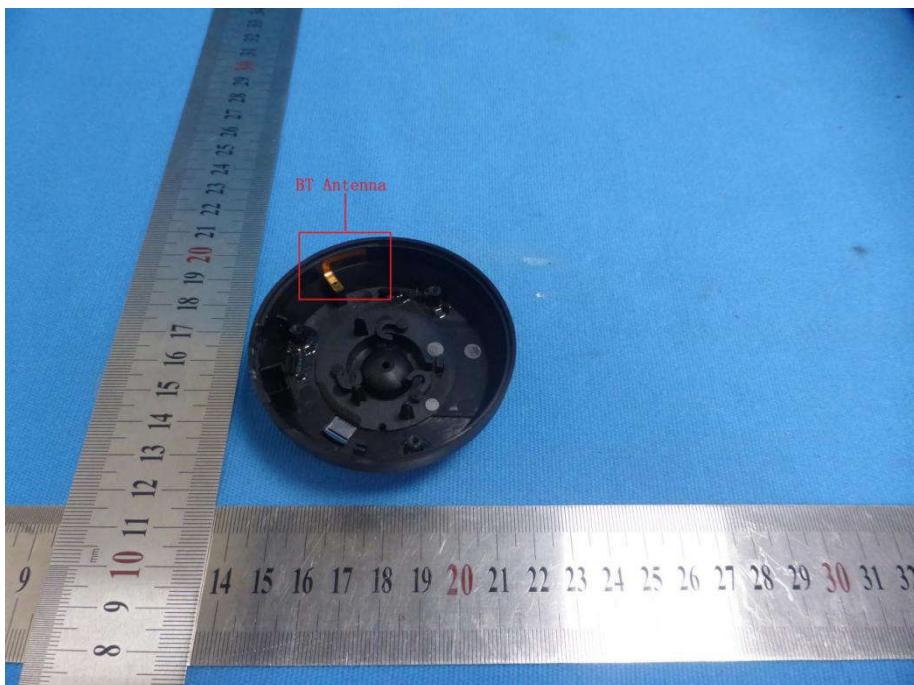

## Appendix J): AC Power Line Conducted Emission


Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>																
Limit:	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>			Frequency range (MHz)	Limit (dB $\mu$ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB $\mu$ V)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

### Live line:

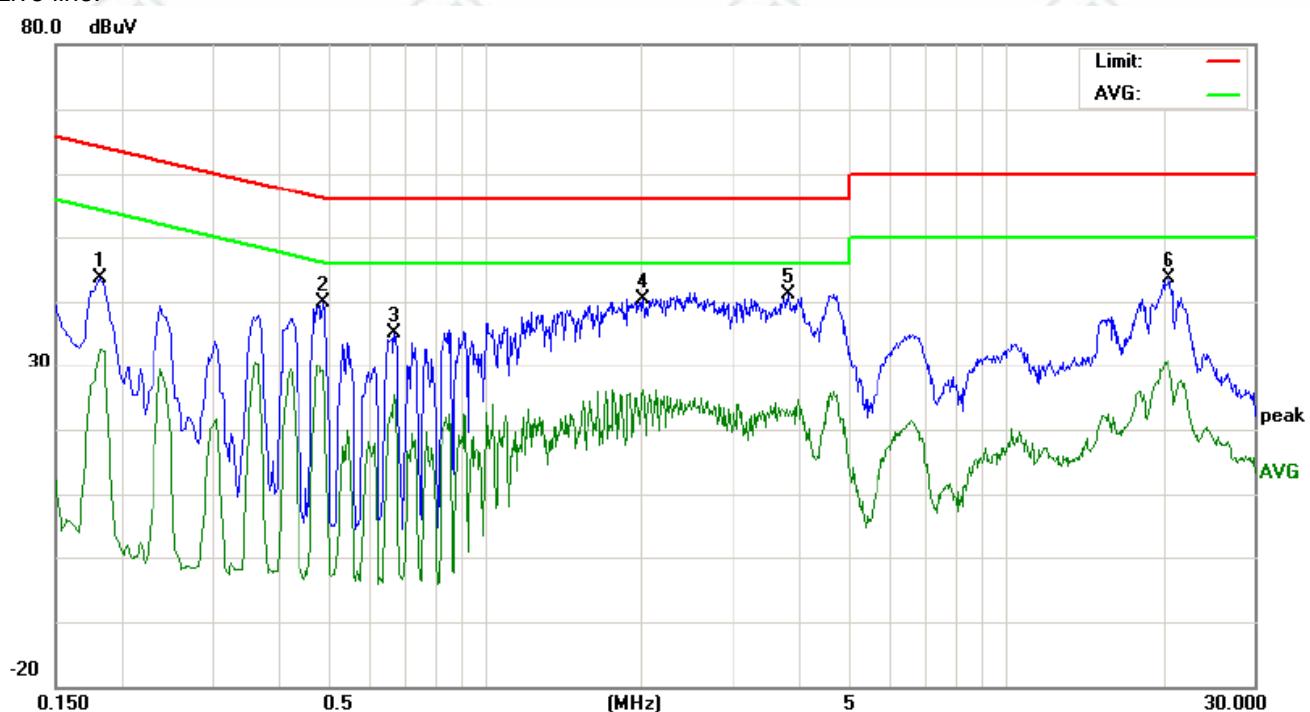

No.	Freq.	Reading_Level		Correct_Factor		Measurement			Limit		Margin				
		(dBuV)	(dBuV)	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG	P/F
1	0.1819	33.90		22.75	9.80	43.70		32.55	64.39	54.39	-20.69	-21.84	P		
2	0.4900	29.96		19.23	9.90	39.86		29.13	56.17	46.17	-16.31	-17.04	P		
3	0.6700	25.13		15.57	9.90	35.03		25.47	56.00	46.00	-20.97	-20.53	P		
4	2.0140	30.27		16.20	10.00	40.27		26.20	56.00	46.00	-15.73	-19.80	P		
5	3.8260	31.17		12.15	10.00	41.17		22.15	56.00	46.00	-14.83	-23.85	P		
6	20.6259	33.84		19.88	9.80	43.64		29.68	60.00	50.00	-16.36	-20.32	P		

Neutral line:

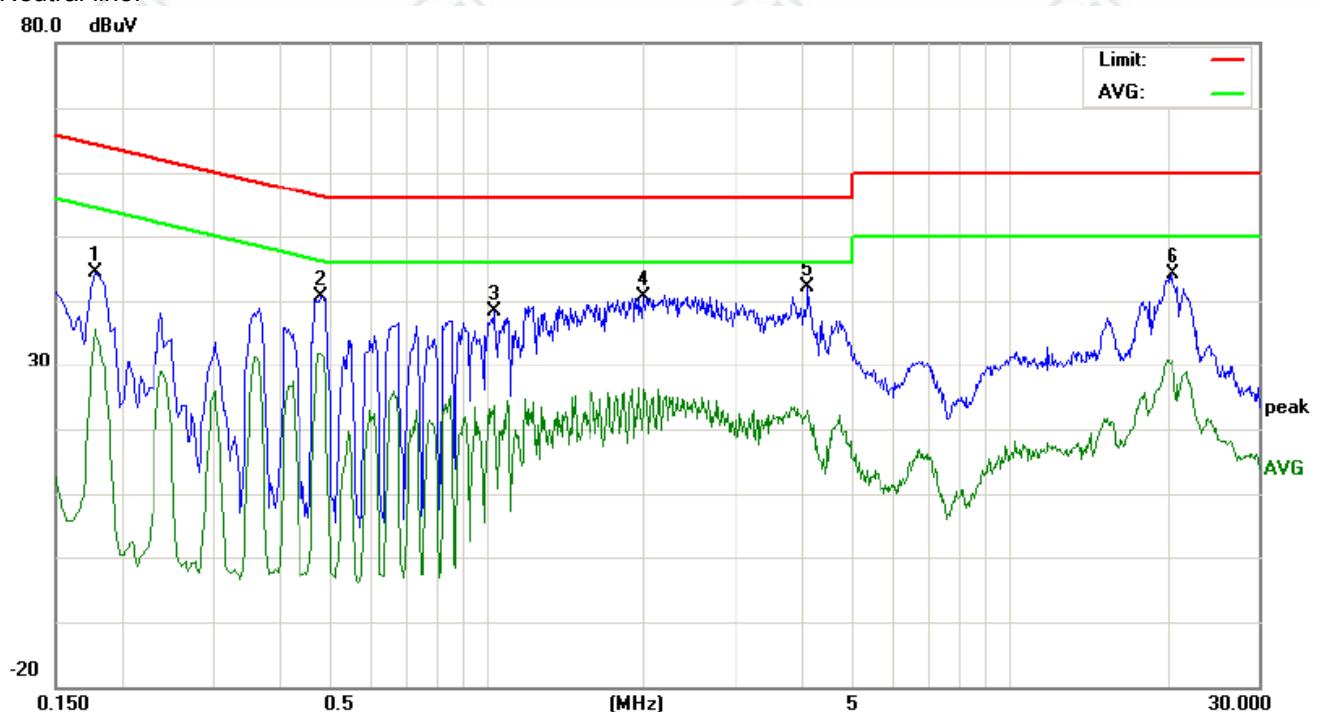

No.	Freq.	Reading_Level (dBuV)			Correct Factor		Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		MHz	Peak	QP	Avg	dB	peak	QP	Avg	QP	Avg	QP	Avg		
1	0.1780	34.55		25.79	9.80	44.35		35.59	64.57	54.57	-20.22	-18.98	P		
2	0.4860	30.73		22.04	9.90	40.63		31.94	56.24	46.24	-15.61	-14.30	P		
3	1.0339	28.54		13.84	9.71	38.25		23.55	56.00	46.00	-17.75	-22.45	P		
4	1.9980	30.70		13.71	10.00	40.70		23.71	56.00	46.00	-15.30	-22.29	P		
5	4.1340	32.17		12.92	10.00	42.17		22.92	56.00	46.00	-13.83	-23.08	P		
6	20.4900	34.30		20.71	9.80	44.10		30.51	60.00	50.00	-15.90	-19.49	P		

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

## Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<b>Below 1GHz test procedure as below:</b>				
	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol>				
	<b>Above 1GHz test procedure as below:</b>				
	<ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dB $\mu$ V/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		


**Test plot as follows:**

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

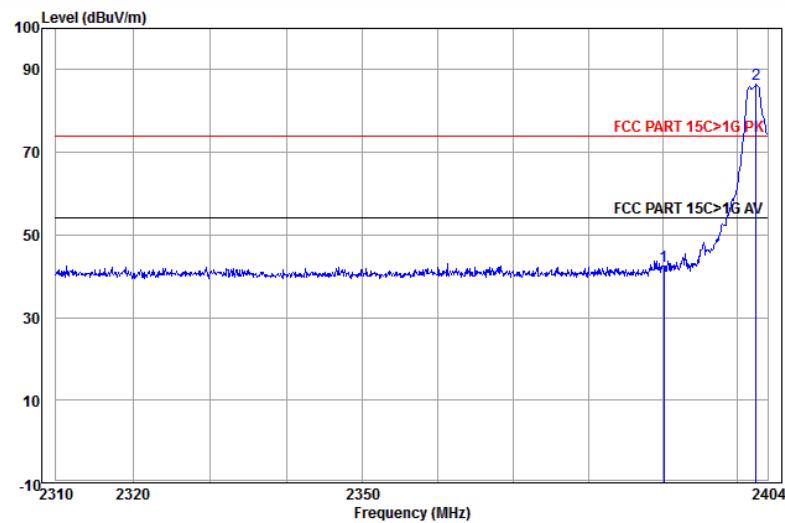

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Limit Line	Over Limit	Over Line	Over Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	2390.041	32.53	4.28	0.00	5.74	42.55	74.00	74.00	-31.45	Horizontal
2 pp	2402.466	32.56	4.31	0.00	49.49	86.36	74.00	74.00	12.36	Horizontal

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

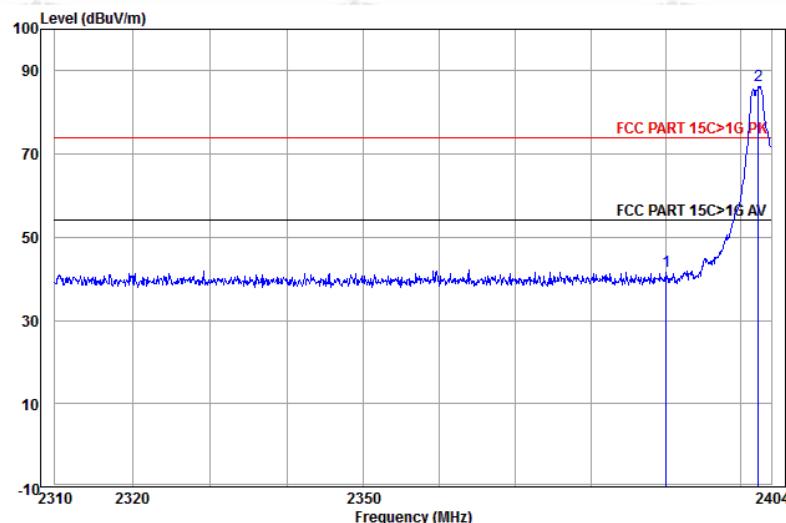

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Limit Line	Over Limit	Over Line	Over Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	44.03	48.95	41.73	74.00	74.00	-32.27	Vertical
2 pp	2402.275	32.56	4.31	44.04	93.55	86.38	74.00	74.00	12.38	Vertical