



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	HOLUX Technology, Inc
Applicant Address	No. 1-1, Innovation Road 1, Science-Based Industrial Park, Hsinchu Taiwan(ROC)
FCC ID	RJI-GR260XX
Manufacturer's company	HOLUX Technology, Inc
Manufacturer Address	No. 1-1, Innovation Road 1, Science-Based Industrial Park, Hsinchu Taiwan(ROC)

Product Name	GPSport260
Brand Name	HOLUX
Model Name	GR-260
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.249
Test Freq. Range	2403~2480MHz
Received Date	Feb. 11, 2010
Final Test Date	Mar. 04, 2010
Submission Type	Original Equipment



Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory
1190

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	5
3.6. Table for Testing Locations.....	5
3.7. Table for Supporting Units	6
3.8. Test Configurations	7
4. TEST RESULT	10
4.1. AC Power Line Conducted Emissions Measurement.....	10
4.2. Field Strength of Fundamental Emissions Measurement	16
4.3. 20dB Spectrum Bandwidth Measurement	21
4.4. Radiated Emissions Measurement	24
4.5. Band Edge Emissions Measurement	35
4.6. Antenna Requirements	37
5. LIST OF MEASURING EQUIPMENTS	38
6. TEST LOCATION.....	39
7. TAF CERTIFICATE OF ACCREDITATION	40
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A16
APPENDIX B. TEST PHOTOS.....	B1 ~ B5

History of This Test Report

Original Issue Date: Mar. 16, 2010

Report No.: FR021124

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : GPSport260
Brand Name : HOLUX
Model Name : GR-260
Applicant : HOLUX Technology, Inc
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.249

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 11, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Jordan Hsiao 2010.3.17

Reviewed By:

Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	14.04 dB
4.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	21.46 dB
4.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
4.4	15.249(a)/(d)	Radiated Emissions	Complies	2.65 dB
4.5	15.249(d)	Band Edge Emissions	Complies	7.85 dB
4.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From Power Adapter and Battery
Modulation	GFSK
Frequency Range	2403~2480MHz
Channel Number	78
Channel Band Width (99%)	1.17 MHz
Max. Field Strength	72.54 dBuV/m at 3m (Average)
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	BI	BI07-050100-AdU	Input: 100-240VAC, 50/60Hz, 0.5A Output: 5VDC, 1A
Battery	WANGLORY	NK3650	3.7V, 1050mAh
Others			
USB Cable, Non-shielded, 1.45m			

3.3. Table for Filed Antenna


Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	CHANT SINCERE CO.,LTD.	920D07E15XX5013	Chip Antenna	NA	2.00	WLAN
2	ONSHINE	ANT-I005	GPS ACTIVE ANTENNA	I-PEX	0.00	GPS

Note: The EUT has two antennas.

One for WLAN function, another for GPS function.

Ant. 1 can be used as transmitting/receiving antenna.

Ant. 2 only can be used as receiving antenna.

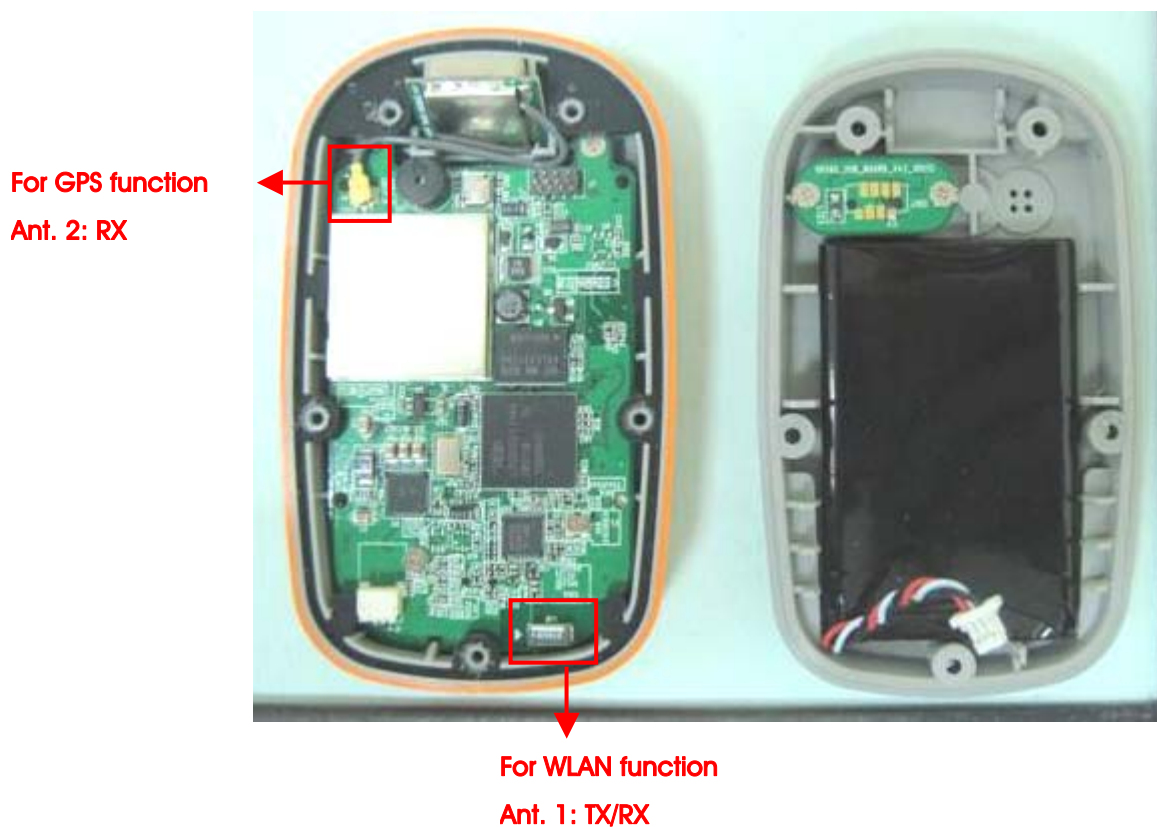

3.4. Table for Carrier Frequencies

Frequency Band	Frequency
2403-2480MHz	2403 MHz
	2404 MHz
	:
	2440 MHz
	2441 MHz
	2442 MHz
	:
	2479 MHz
	2480 MHz

3.5. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Frequency	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	2403 MHz / 2441 MHz / 2480 MHz	1
Radiated Emissions 9kHz~1GHz	Normal Link	-	1/2
Radiated Emissions 1GHz~10 th Harmonic	CTX	2403 MHz / 2441 MHz / 2480 MHz	1
Band Edge Emissions	CTX	2403 MHz / 2441 MHz / 2480 MHz	1

Note 1: CTX=continuously transmitting

Note 2: The following test modes were performed for Conducted Emission and Radiated Emission below 1GHz tests:

Mode 1. WLAN Mode

Mode 2. GPS Mode

All the test results were tested and recorded in the report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	480872	IC 4086	-
CO04-HY	Conduction	Hwa Ya	480872	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units


Support Unit	Brand	Model	FCC ID
GPS GENERATOR	WELNAVIGATE	GS119	DoC
GPS	HOLUX	GPSport260	N/A

3.8. Test Configurations


3.8.1. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz


Test Mode: Mode 1

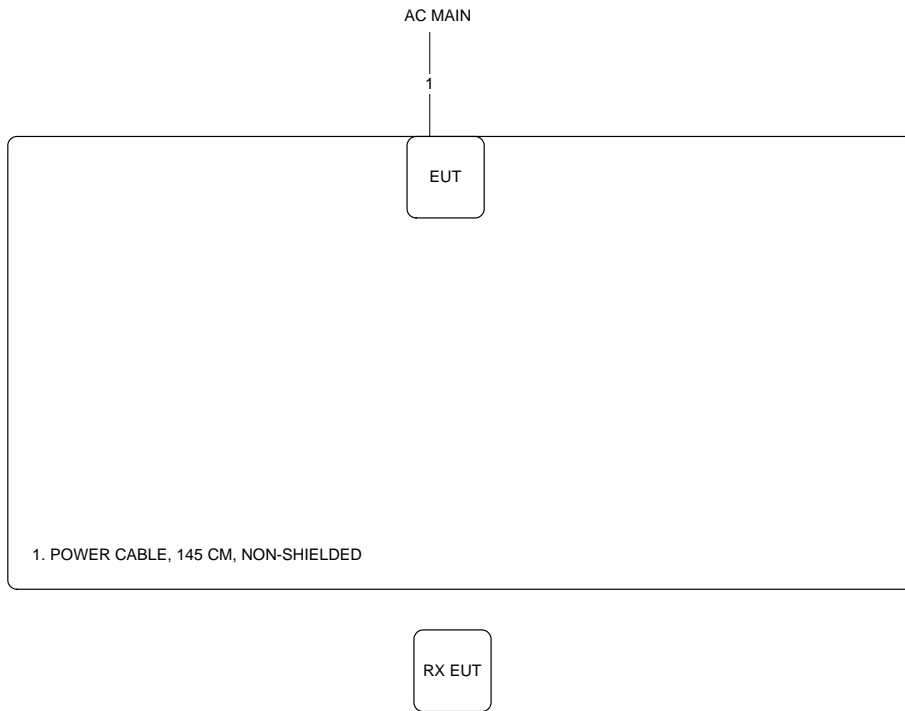

Test Mode: Mode 2

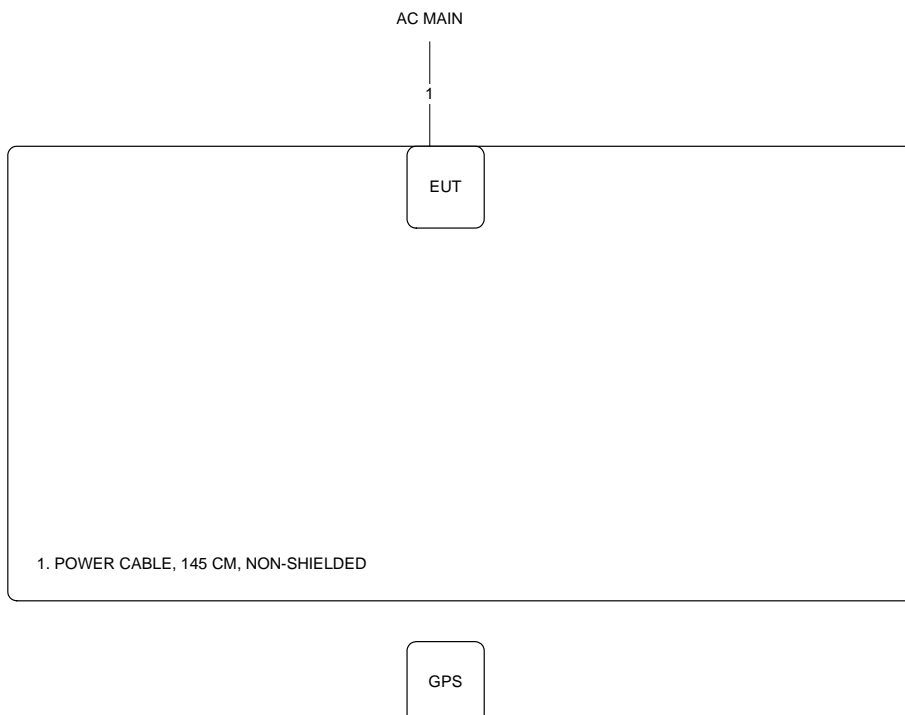

Test Configuration: Above 1GHz

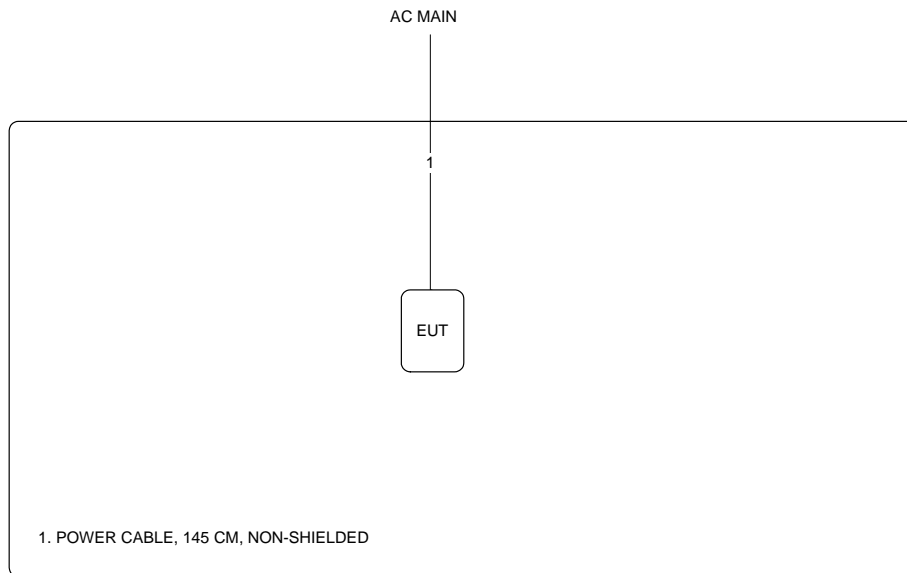

3.8.2. AC Power Line Conduction Emissions Test Configuration

Test Mode: Mode 1



Test Mode: Mode 2



4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

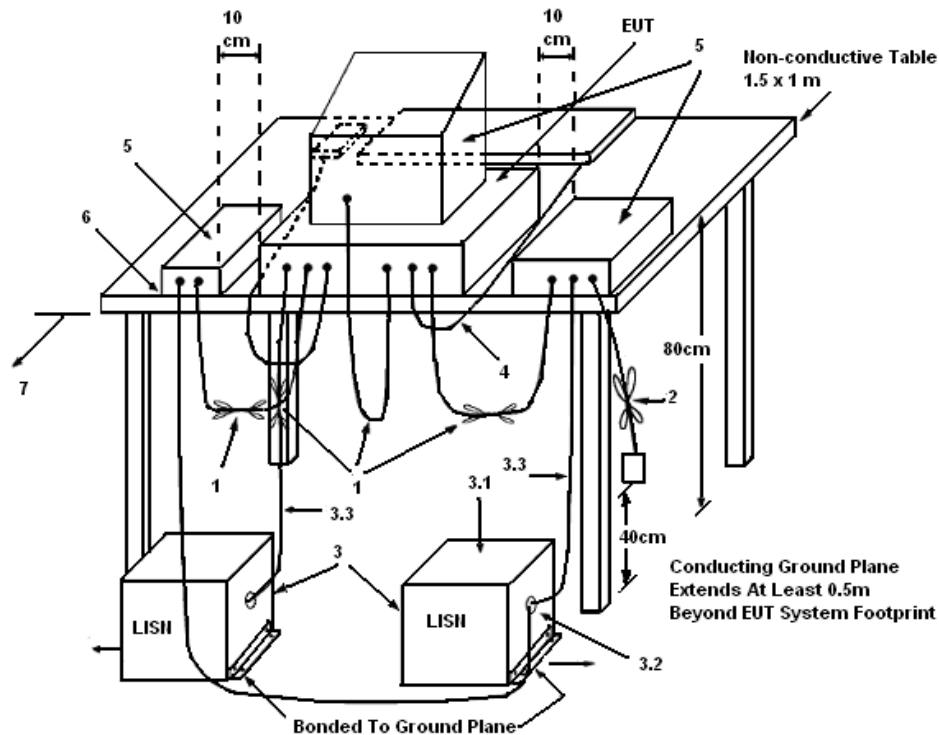

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22.5°C	Humidity	42.3%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link / Mode 1		

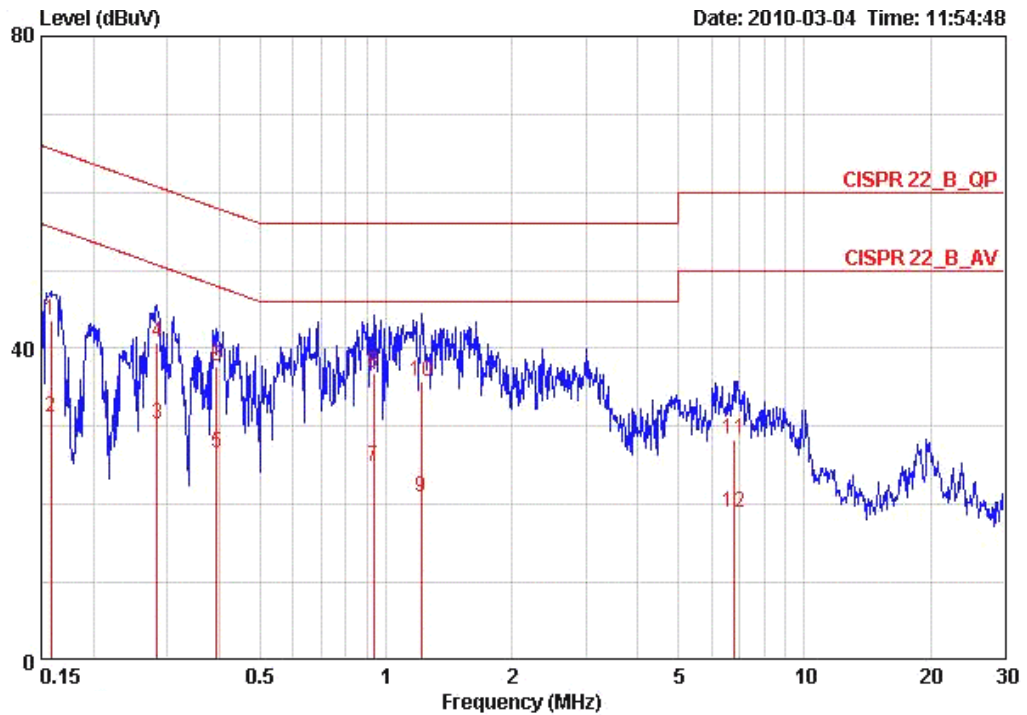

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15816	43.61	-21.95	65.56	43.34	0.07	0.20	QP
2	0.15816	31.20	-24.36	55.56	30.93	0.07	0.20	AVERAGE
3	0.28328	30.25	-20.47	50.72	30.01	0.04	0.20	AVERAGE
4	0.28328	40.72	-20.00	60.72	40.48	0.04	0.20	QP
5	0.39344	26.61	-21.38	47.99	26.38	0.03	0.20	AVERAGE
6	0.39344	37.66	-20.33	57.99	37.43	0.03	0.20	QP
7	0.93314	24.92	-21.08	46.00	24.69	0.03	0.20	AVERAGE
8	0.93314	36.83	-19.17	56.00	36.60	0.03	0.20	QP
9	1.216	20.94	-25.06	46.00	20.75	0.04	0.15	AVERAGE
10	1.216	35.67	-20.33	56.00	35.48	0.04	0.15	QP
11	6.805	28.32	-31.68	60.00	27.74	0.25	0.34	QP
12	6.805	19.05	-30.95	50.00	18.47	0.25	0.34	AVERAGE


Temperature	22.5°C	Humidity	42.3%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link / Mode 1		

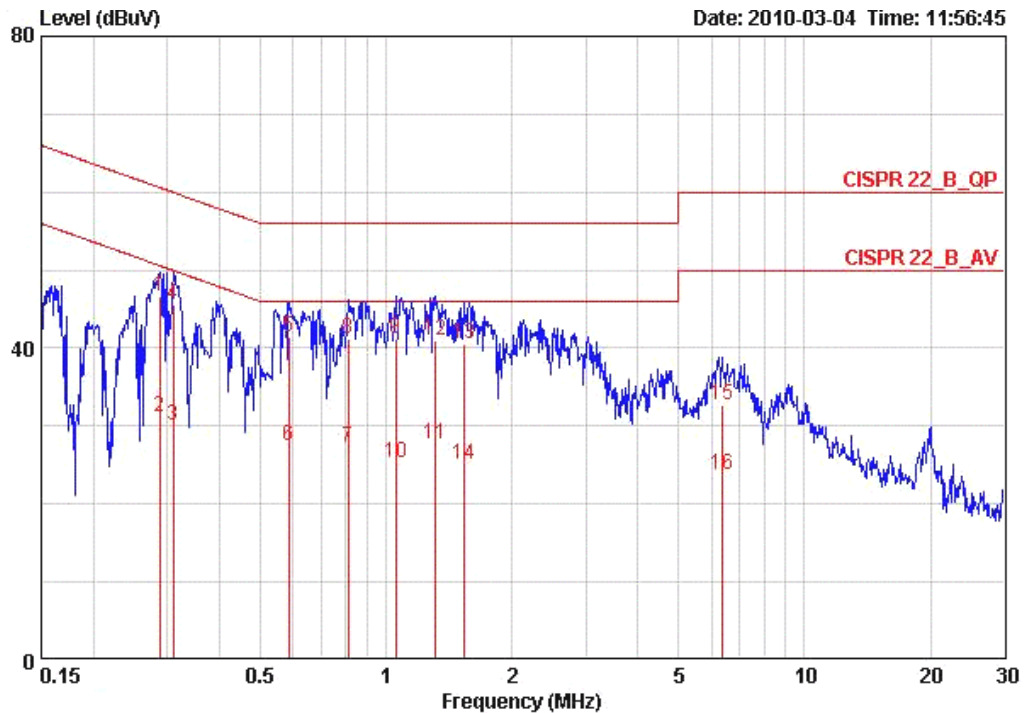

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.28782	46.54	-14.04	60.59	46.27	0.07	0.20	QP
2	0.28782	31.21	-19.37	50.59	30.94	0.07	0.20	AVERAGE
3	0.30998	30.14	-19.83	49.97	29.87	0.07	0.20	AVERAGE
4	0.30998	45.46	-14.51	59.97	45.19	0.07	0.20	QP
5	0.58540	41.44	-14.56	56.00	41.17	0.07	0.20	QP
6	0.58540	27.40	-18.60	46.00	27.13	0.07	0.20	AVERAGE
7	0.81306	27.19	-18.81	46.00	26.92	0.07	0.20	AVERAGE
8	0.81306	41.21	-14.79	56.00	40.94	0.07	0.20	QP
9	1.054	41.28	-14.72	56.00	41.02	0.07	0.19	QP
10	1.054	25.38	-20.62	46.00	25.12	0.07	0.19	AVERAGE
11	1.310	27.65	-18.35	46.00	27.44	0.08	0.13	AVERAGE
12	1.310	40.90	-15.10	56.00	40.69	0.08	0.13	QP
13	1.535	40.62	-15.38	56.00	40.43	0.08	0.11	QP
14	1.535	24.97	-21.03	46.00	24.78	0.08	0.11	AVERAGE
15	6.352	32.70	-27.30	60.00	32.06	0.27	0.37	QP
16	6.352	23.81	-26.19	50.00	23.17	0.27	0.37	AVERAGE


Note: Level = Read Level + LISN Factor + Cable Loss

Temperature	22.5°C	Humidity	42.3%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link / Mode 2		

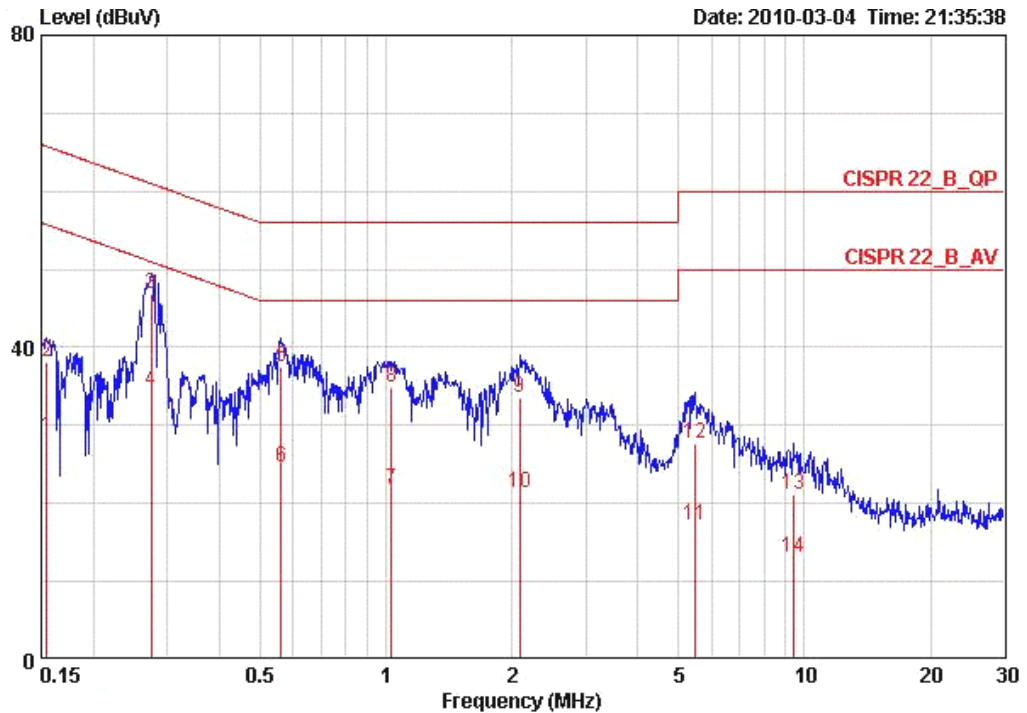

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15485	28.48	-27.25	55.74	28.21	0.07	0.20	AVERAGE
2	0.15485	38.21	-27.52	65.74	37.94	0.07	0.20	QP
3	0.27442	46.85	-14.13	60.98	46.61	0.04	0.20	QP
4	0.27442	34.45	-16.53	50.98	34.21	0.04	0.20	AVERAGE
5	0.56111	37.42	-18.58	56.00	37.19	0.03	0.20	QP
6	0.56111	24.58	-21.42	46.00	24.35	0.03	0.20	AVERAGE
7	1.032	21.79	-24.21	46.00	21.57	0.03	0.19	AVERAGE
8	1.032	34.96	-21.04	56.00	34.74	0.03	0.19	QP
9	2.088	33.56	-22.44	56.00	33.31	0.05	0.20	QP
10	2.088	21.46	-24.54	46.00	21.21	0.05	0.20	AVERAGE
11	5.476	17.17	-32.83	50.00	16.68	0.19	0.30	AVERAGE
12	5.476	27.78	-32.22	60.00	27.29	0.19	0.30	QP
13	9.401	21.22	-38.78	60.00	20.59	0.33	0.30	QP
14	9.401	13.02	-36.98	50.00	12.39	0.33	0.30	AVERAGE

Temperature	22.5°C	Humidity	42.3%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link / Mode 2		

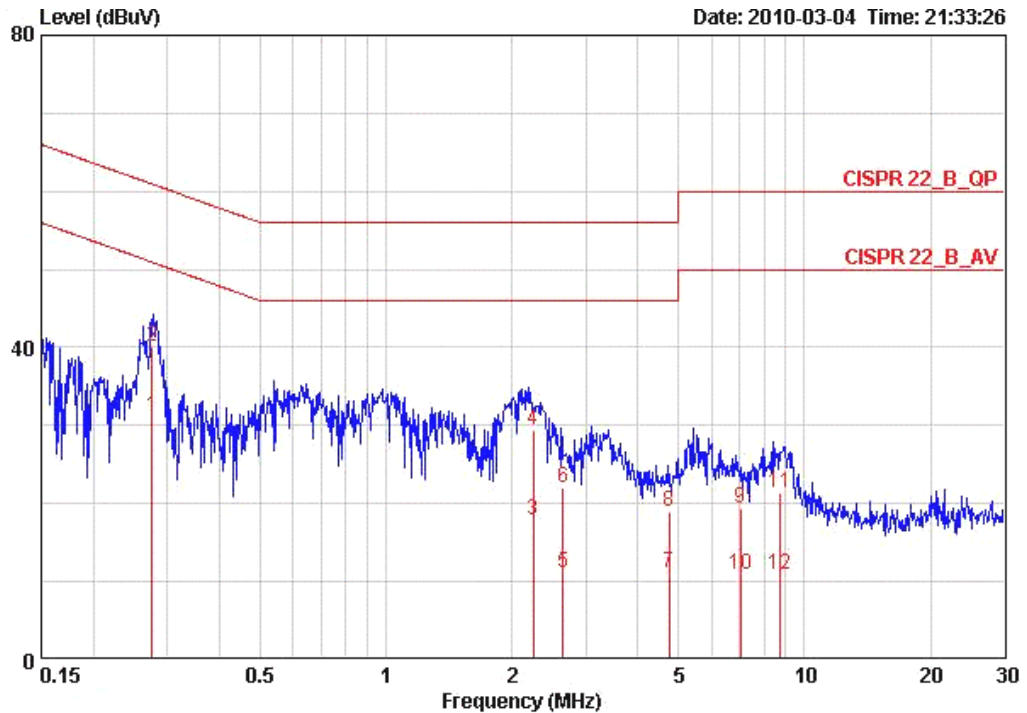

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.27587	31.16	-19.78	50.94	30.88	0.08	0.20	AVERAGE
2	0.27587	40.18	-20.76	60.94	39.90	0.08	0.20	QP
3	2.249	17.85	-28.15	46.00	17.55	0.10	0.20	AVERAGE
4	2.249	29.35	-26.65	56.00	29.05	0.10	0.20	QP
5	2.650	11.08	-34.92	46.00	10.77	0.11	0.20	AVERAGE
6	2.650	22.04	-33.96	56.00	21.73	0.11	0.20	QP
7	4.746	11.10	-34.90	46.00	10.61	0.19	0.30	AVERAGE
8	4.746	19.02	-36.98	56.00	18.53	0.19	0.30	QP
9	7.025	19.34	-40.66	60.00	18.74	0.29	0.31	QP
10	7.025	10.94	-39.06	50.00	10.34	0.29	0.31	AVERAGE
11	8.729	21.26	-38.74	60.00	20.61	0.35	0.30	QP
12	8.729	10.96	-39.04	50.00	10.31	0.35	0.30	AVERAGE

Note: Level = Read Level + LISN Factor + Cable Loss

4.2. Field Strength of Fundamental Emissions Measurement

4.2.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RB	1 MHz Peak / 1MHz Average
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

4.2.4. Test Setup Layout

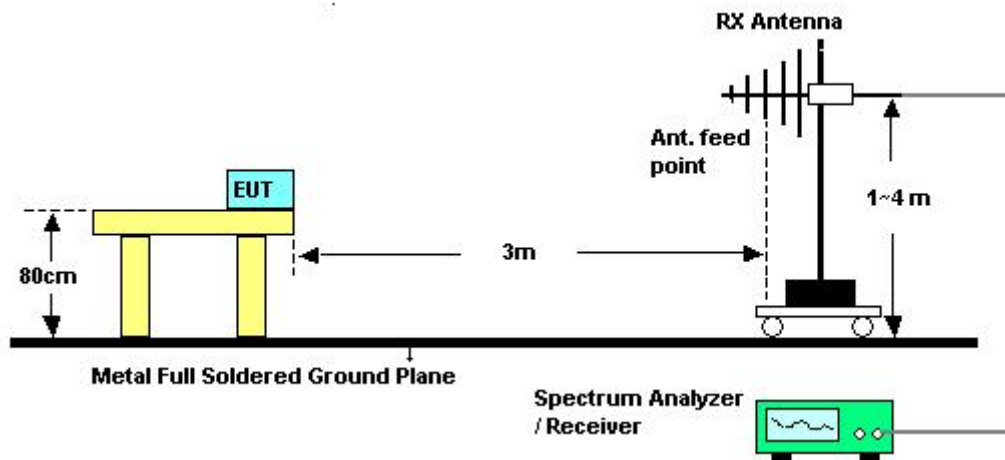

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Field Strength of Fundamental Emissions

Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2403 MHz
Test Date	Mar. 02, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
3	2403.00	69.37	94.00	-24.63	38.40	2.76	28.21	0.00	290	100	Average	HORIZONTAL
4	2403.00	70.75	114.00	-43.25	39.78	2.76	28.21	0.00	290	100	Peak	HORIZONTAL

Item 1, 2 are fundamental frequency at 2403 MHz.

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
3	2403.00	71.96	94.00	-22.04	40.99	2.76	28.21	0.00	319	101	Average	VERTICAL
4	2403.00	73.14	114.00	-40.86	42.17	2.76	28.21	0.00	319	101	Peak	VERTICAL

Item 1, 2 are fundamental frequency at 2403 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2441 MHz
Test Date	Mar. 02, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	2441.00	68.32	94.00	-25.68	37.25	2.78	28.29	0.00	292	100	Average	HORIZONTAL
2 p	2441.20	70.14	114.00	-43.86	39.07	2.78	28.29	0.00	292	100	Peak	HORIZONTAL

Item 1, 2 are fundamental frequency at 2441 MHz.

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	2441.00	72.16	94.00	-21.84	41.09	2.78	28.29	0.00	319	100	Average	VERTICAL
2 p	2441.00	73.27	114.00	-40.73	42.20	2.78	28.29	0.00	319	100	Peak	VERTICAL

Item 1, 2 are fundamental frequency at 2441 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2480 MHz
Test Date	Mar. 02, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2479.80	69.77	114.00	-44.23	38.58	2.81	28.38	0.00	98	100	Peak	HORIZONTAL
2	2480.00	68.25	94.00	-25.75	37.06	2.81	28.38	0.00	98	100	Average	HORIZONTAL

Item 1, 2 are fundamental frequency at 2480 MHz.

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2480.00	72.54	94.00	-21.46	41.36	2.81	28.37	0.00	311	124	Average	VERTICAL
2	2480.00	73.37	114.00	-40.63	42.19	2.81	28.37	0.00	311	124	Peak	VERTICAL

Item 1, 2 are fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.3. 20dB Spectrum Bandwidth Measurement

4.3.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2403~2480MHz).

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

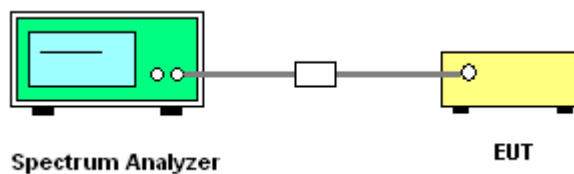

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 20dB Spectrum Bandwidth

Temperature	23°C	Humidity	58%
Test Engineer	Jacky Ho	Configurations	2403 MHz / 2441 MHz / 2480 MHz


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483.5\text{MHz}$	Test Result
2403 MHz	1.28	1.17	2402.3500	-	Complies
2441 MHz	1.25	1.16	-	-	Complies
2480 MHz	1.24	1.15	-	2480.6100	Complies

20 dB/99% Bandwidth Plot on 2403 MHz

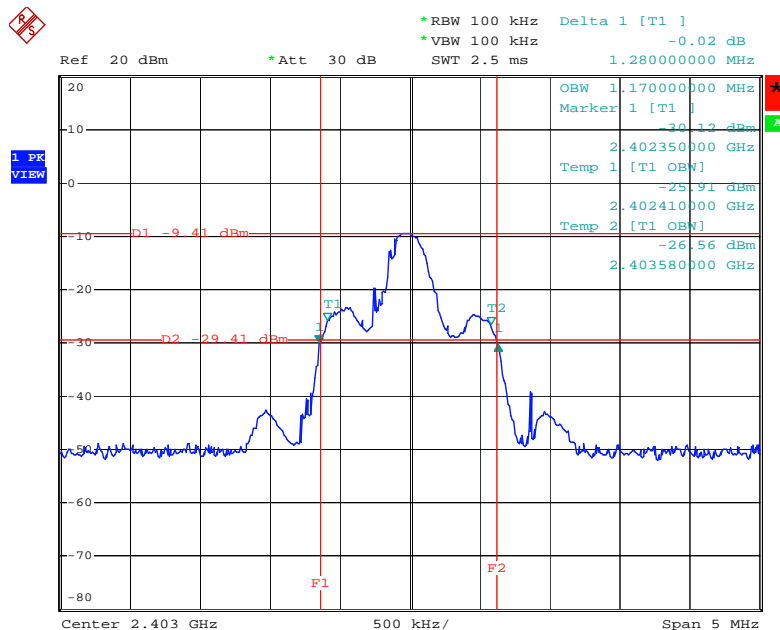


Date: 2.MAR.2010 16:43:35

20 dB/99% Bandwidth Plot on 2441 MHz

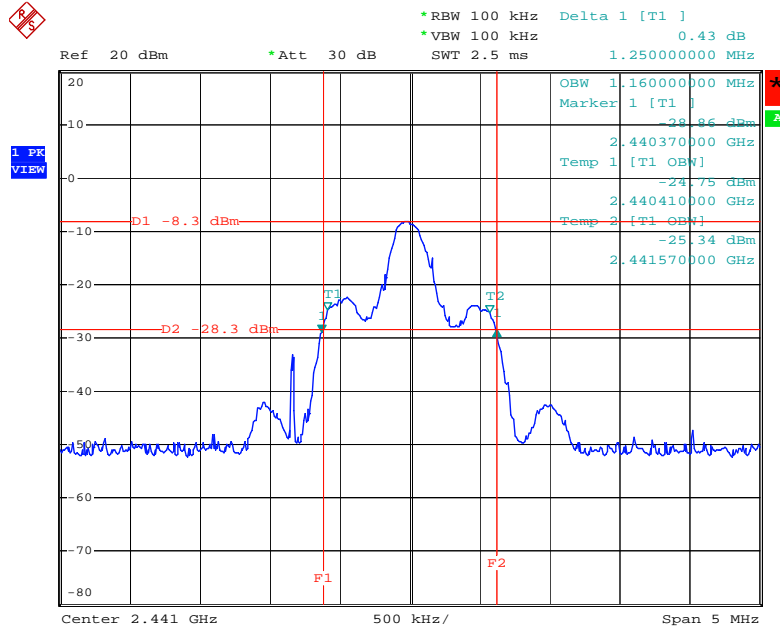

Date: 2.MAR.2010 16:45:10

20 dB/99% Bandwidth Plot on 2480 MHz

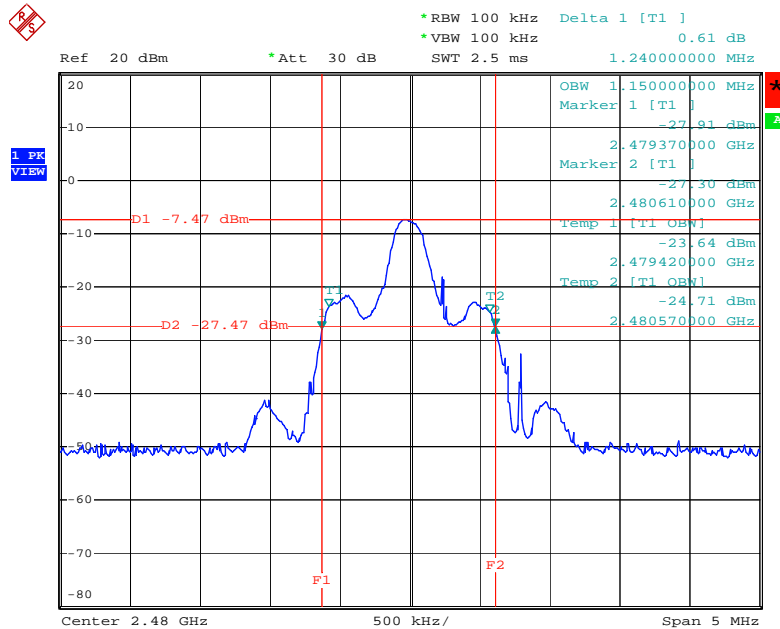

Date: 2.MAR.2010 16:46:42

4.4. Radiated Emissions Measurement

4.4.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.4.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.4.4. Test Setup Layout

For radiated emissions below 30MHz

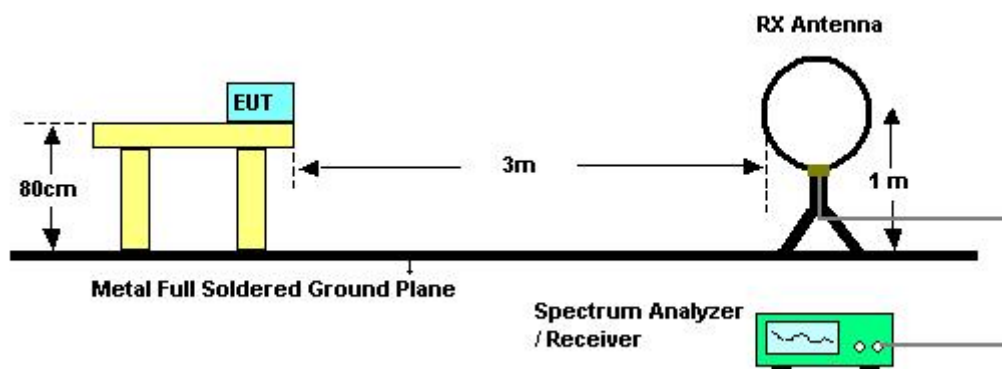

For radiated emissions above 30MHz

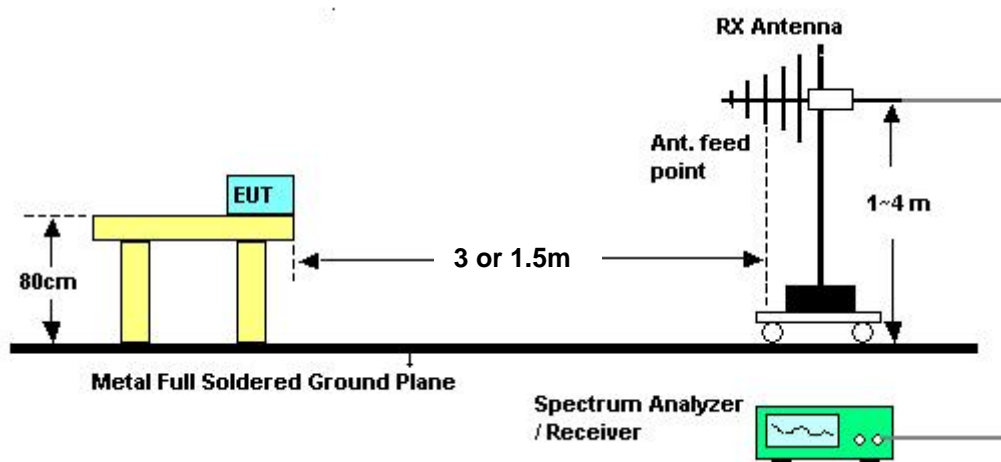

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.4.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link / Mode 1

Horizontal

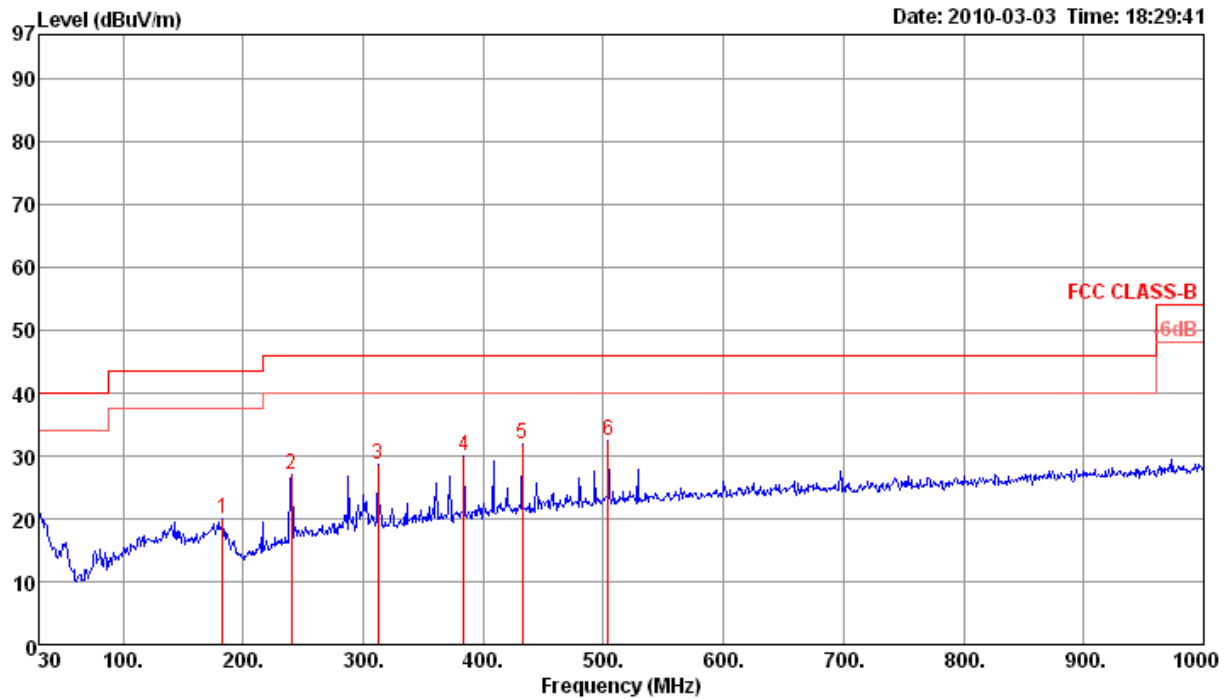

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	183.26	19.99	43.50	-23.51	33.02	1.62	27.18	12.53	0	100	Peak	HORIZONTAL
2	240.49	26.91	46.00	-19.09	40.02	1.86	27.02	12.05	0	100	Peak	HORIZONTAL
3	312.27	28.52	46.00	-17.48	39.67	2.13	26.98	13.70	0	100	Peak	HORIZONTAL
4	384.05	30.10	46.00	-15.90	39.68	2.27	27.49	15.64	0	100	Peak	HORIZONTAL
5	432.55	31.78	46.00	-14.22	40.47	2.50	27.76	16.57	0	100	Peak	HORIZONTAL
6 p	504.33	32.46	46.00	-13.54	40.18	2.71	28.10	17.67	0	100	Peak	HORIZONTAL

Vertical

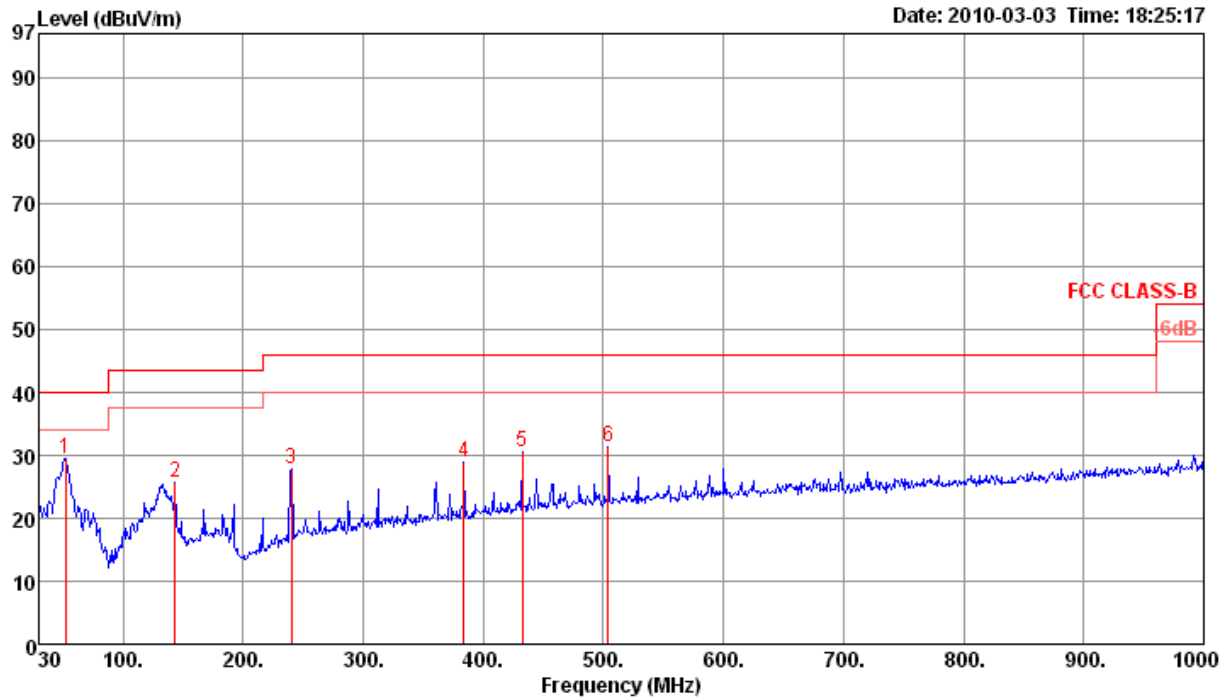

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	52.31	29.48	40.00	-10.52	48.35	0.74	27.79	8.18	0	400	Peak	VERTICAL
2	143.49	25.54	43.50	-17.96	39.33	1.42	27.38	12.17	0	400	Peak	VERTICAL
3	240.49	27.87	46.00	-18.13	40.98	1.86	27.02	12.05	0	400	Peak	VERTICAL
4	384.05	28.80	46.00	-17.20	38.38	2.27	27.49	15.64	0	400	Peak	VERTICAL
5	432.55	30.41	46.00	-15.59	39.10	2.50	27.76	16.57	0	400	Peak	VERTICAL
6	504.33	31.40	46.00	-14.60	39.12	2.71	28.10	17.67	0	400	Peak	VERTICAL

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link / Mode 2

Horizontal

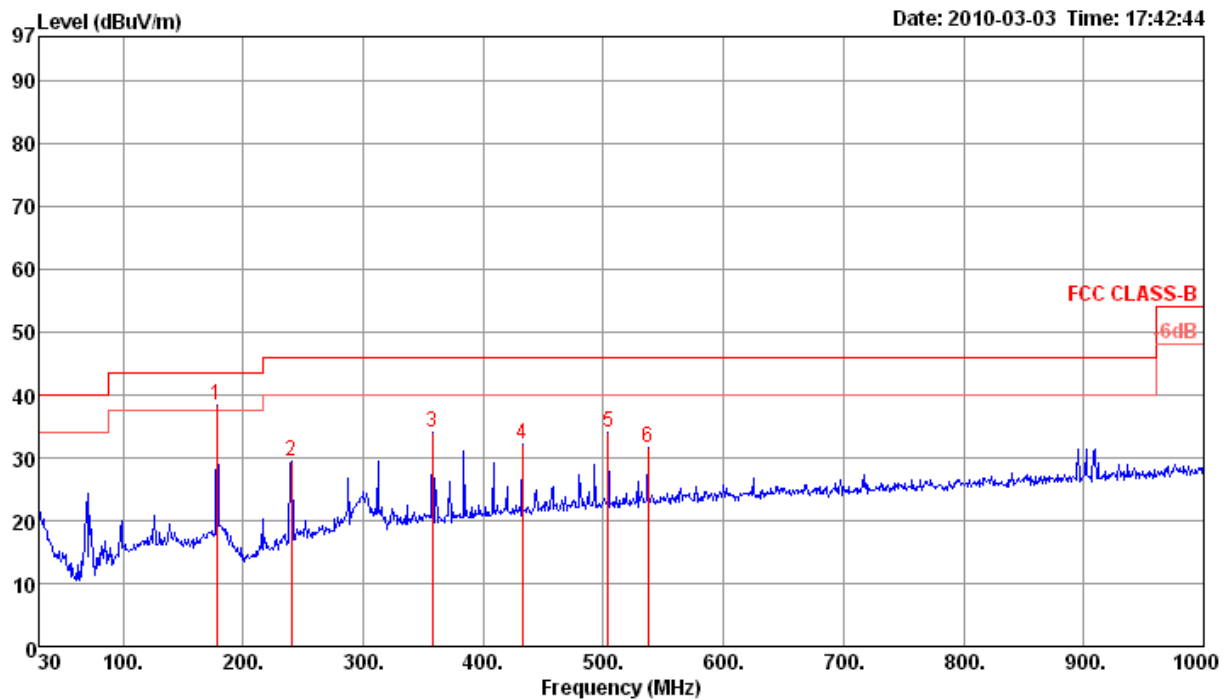

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	178.41	38.40	43.50	-5.10	50.89	1.59	27.21	13.13	0	100	Peak	HORIZONTAL
2	240.49	29.54	46.00	-16.46	42.65	1.86	27.02	12.05	0	100	Peak	HORIZONTAL
3	357.86	34.11	46.00	-11.89	44.26	2.22	27.30	14.93	0	100	Peak	HORIZONTAL
4	432.55	32.18	46.00	-13.82	40.87	2.50	27.76	16.57	0	100	Peak	HORIZONTAL
5	504.33	33.92	46.00	-12.08	41.64	2.71	28.10	17.67	0	100	Peak	HORIZONTAL
6	537.31	31.63	46.00	-14.37	38.91	2.77	28.10	18.05	0	100	Peak	HORIZONTAL

Vertical

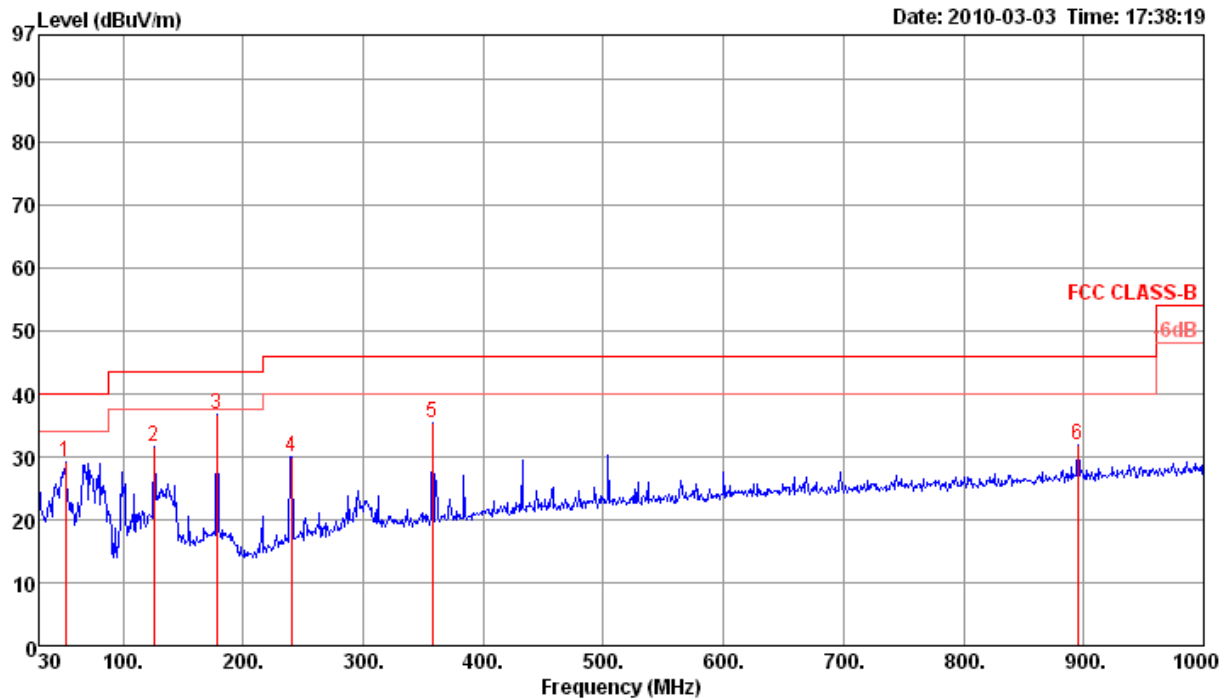

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	52.31	29.09	40.00	-10.91	47.96	0.74	27.79	8.18	0	400	Peak	VERTICAL
2	126.03	31.69	43.50	-11.81	45.68	1.26	27.47	12.22	0	400	Peak	VERTICAL
3 p	178.41	36.78	43.50	-6.72	49.27	1.59	27.21	13.13	0	400	Peak	VERTICAL
4	240.49	29.96	46.00	-16.04	43.07	1.86	27.02	12.05	0	400	Peak	VERTICAL
5	357.86	35.30	46.00	-10.70	45.45	2.22	27.30	14.93	0	400	Peak	VERTICAL
6	895.24	31.92	46.00	-14.08	35.26	3.58	27.41	20.49	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.4.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2403 MHz
Test Date	Mar. 02, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4805.95	51.34	54.00	-2.66	49.40	3.96	33.02	35.04	181	138	Average	HORIZONTAL
2 p	4806.04	54.45	74.00	-19.55	52.51	3.96	33.02	35.04	181	138	Peak	HORIZONTAL

Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2403 MHz
Test Date	Mar. 01, 2010		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4805.67	53.47	74.00	-20.53	53.37	3.00	35.32	32.42	196	110	Peak	VERTICAL
2 a	4805.96	51.35	54.00	-2.65	51.25	3.00	35.32	32.42	196	110	Average	VERTICAL



Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2441 MHz
Test Date	Mar. 02, 2010		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4881.95	50.04	54.00	-3.96	47.94	3.97	33.16	35.03	192	158	Average	HORIZONTAL
2 p	4881.99	53.63	74.00	-20.37	51.53	3.97	33.16	35.03	192	158	Peak	HORIZONTAL

Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2441 MHz
Test Date	Mar. 01, 2010		

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4881.94	47.45	54.00	-6.55	47.03	3.01	35.15	32.56	219	109	Average	VERTICAL
2 p	4881.99	50.65	74.00	-23.35	50.23	3.01	35.15	32.56	219	109	Peak	VERTICAL

Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2480 MHz
Test Date	Mar. 02, 2010		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4959.95	48.84	54.00	-5.16	46.53	3.99	33.33	35.01	185	150	Average	HORIZONTAL
2 p	4960.04	53.23	74.00	-20.77	50.92	3.99	33.33	35.01	185	150	Peak	HORIZONTAL

Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2480 MHz
Test Date	Mar. 01, 2010		

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4959.84	52.44	74.00	-21.56	51.65	3.03	34.97	32.73	147	118	Peak	VERTICAL
2 a	4959.95	49.89	54.00	-4.11	49.10	3.03	34.97	32.73	147	118	Average	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5. Band Edge Emissions Measurement

4.5.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

4.5.3. Test Procedures

1. The test procedure is the same as section 4.2.3, only the frequency range investigated is limited to 2MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.2.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2403 MHz / 2480 MHz
Test Date	Mar. 02, 2010		

2403 MHz

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	2388.56	55.69	74.00	-18.31	24.76	2.76	28.17	0.00	319	101	Peak	VERTICAL
2 a	2390.00	46.15	54.00	-7.85	15.22	2.76	28.17	0.00	319	101	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2403 MHz.

2480 MHz

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
3 a	2483.50	44.43	54.00	-9.57	13.25	2.81	28.37	0.00	311	124	Average	VERTICAL
4 p	2484.50	54.39	74.00	-19.61	23.21	2.81	28.37	0.00	311	124	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Antenna Requirements

4.6.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.6.2. Antenna Connector Construction

Please refer to section 3.1 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 11, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 24, 2010	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100305	9 kHz - 40 GHz	Feb. 03, 2010	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.11, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2010	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-san Chen

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

Pl, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix