

# FCC Test Report

Product Name : Tracker005  
Model No. : GR530XX  
FCC ID. : RJI-Tracker005

Applicant : HOLUX Technology, Inc  
Address : No,1-1,Innovation Road I, Science-Based Industrial Park,  
Hsinchu 300, Taiwan, R.O.C  
Manufacturer : HOLUX Technology, Inc  
Address : No,1-1,Innovation Road I, Science-Based Industrial Park,  
Hsinchu 300, Taiwan, R.O.C

Date of Receipt : Sept. 18, 2008  
Date of Test : Sept.22, 2008-Sept.25,2008  
Report No. : 200810-3-09020F

The test results relate only to the samples tested.  
The test report shall not be reproduced except in full without the written approval of SIMT EMC Lab.

# Test Report Certification

Test Date: Sept.22, 2008-Sept.25,2008

Report No: 200810-3-09020F

**SIMT EMC Lab**


Product Name : Tracker005  
Applicant : HOLUX Technology, Inc  
Address : No,1-1,Innovation Road I, Science-Based Industrial Park,  
Hsinchu 300, Taiwan, R.O.C  
Manufacturer : HOLUX Technology, Inc  
Address : No,1-1,Innovation Road I, Science-Based Industrial Park,  
Hsinchu 300, Taiwan, R.O.C  
Model No. : GR530XX  
Rated Voltage : DC 3.7V By battery, DC 5V by adaptor  
Test Voltage : 120V/60Hz  
Trade Name : /  
Measurement Standard : EIA/TIA 603C  
Date of Receipt: : Sept. 18, 2008  
Date of Test : Sept.22, 2008-Sept.25,2008  
Date of Issue : Sept.28, 2008  
Test Result : Complied

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of SIMT EMC Lab.

Documented By


:

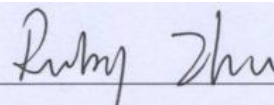

(Ruby Zhu)

Tested By


:



(Liu Qi)

Approved By

:



(Gong Zeng)

---

**TABLE OF CONTENTS**

Description	Page
<b>1. GENERAL INFORMATION.....</b>	<b>5</b>
1.1. EUT Description.....	5
1.2. Operational Description .....	5
1.3. Configuration of Tested System .....	6
1.4. Ancillary Equipment List.....	6
1.5. General Information of Test Site.....	7
<b>2. TEST SUMMARY.....</b>	<b>8</b>
<b>3. RF OUTPUT POWER .....</b>	<b>9</b>
3.1. Test Equipment.....	9
3.2. Test Setup .....	9
3.3. Limits .....	9
3.4. Test Procedure.....	9
3.5. Test Specification.....	9
3.6. EUT Operation.....	10
3.7. Test Result .....	10
<b>4. ERP / EIRP .....</b>	<b>14</b>
4.1. Test Equipment.....	14
4.2. Test Setup .....	14
4.3. Limits .....	15
4.4. Test Procedure.....	15
4.5. Test Specification.....	15
4.6. EUT Operation.....	15
4.7. Test Result .....	16
<b>5. OCCUPIED BANDWIDTH &amp; BAND EDGE MEASUREMENT .....</b>	<b>17</b>
5.1. Test Equipment.....	17
5.2. Test Setup .....	17
5.3. Limits .....	17
5.4. Test Procedure.....	17
5.5. EUT Operation.....	18
5.6. Test Specification.....	18
5.7. Test Result .....	18
<b>6. CONDUCTED SPURIOUS EMISSION.....</b>	<b>24</b>
6.1. Test Equipment.....	24
6.2. Test Setup .....	24
6.3. Limits .....	24
6.4. Test Procedure.....	24
6.5. Test Specification.....	24
6.6. EUT Operation.....	24
6.7. Test Result .....	24
<b>7. FIELD STRENGTH OF SPURIOUS RADIATION.....</b>	<b>43</b>
7.1. Test Equipment.....	43
7.2. Test Setup .....	43
7.3. Limits .....	44
7.4. Test Procedure.....	44
7.5. Test Specification.....	44
7.6. EUT Operation.....	44
7.7. Test Result .....	45
<b>8. FREQUENCY STABILITY VS. TEMPERATURE AND VOLTAGE VARIATIONS .....</b>	<b>48</b>
8.1. Test Equipment.....	48
8.2. Test Setup .....	48
8.3. Limits .....	48
8.4. Test Procedure.....	48

---

8.5.	EUT Operation .....	49
8.6.	Test Specification .....	49
8.7.	Test Result .....	49
<b>9.</b>	<b>TEST SETUP PHOTO .....</b>	<b>51</b>
<b>9.1</b>	<b>ERP/EIRP &amp; SPURIOUS RADIATION TEST SETUP PHOTO .....</b>	<b>51</b>
<b>9.2</b>	<b>EUT AXIS OF SETUP PHOTO .....</b>	<b>52</b>
<b>10</b>	<b>EXTERNAL PHOTO .....</b>	<b>54</b>
<b>11</b>	<b>INTERNAL PHOTO .....</b>	<b>55</b>

## 1. General Information

### 1.1. EUT Description

Product Name	: Tracker005
Trade Name	: /
Model No.	: GR530XX
Type of modulation	GMSK
Antenna type	Soldered on PCB
TX Frequency	824.2MHz~848.8MHz(GSM 850) 1850.2MHz ~ 1909.8MHz(PCS 1900)
Rx Frequency	869.2MHz~893.8MHz(GSM 850) 1930.2MHz ~ 1989.8MHz(PCS 1900)
Hardware version	/
GPRS version	/
Type of equipment	Whist worn watch-like phone

### 1.2. Operational Description

The information contained within this report is intended to show verification of compliance of the 850/1900MHz Mobile Phone to the requirements of 47CFR PART 2, PART 15 Subpart B, PART 22H and PART 24E.


SIMT EMC has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

TEST Mode GSM 850 (keeping the EUT communication with CMU200 at 850MHz)


PCS 1900 (keeping the EUT communication with CMU200 at 1900MHz)

**1.3. Configuration of Tested System**

(a) Configuration of Radiated measurement

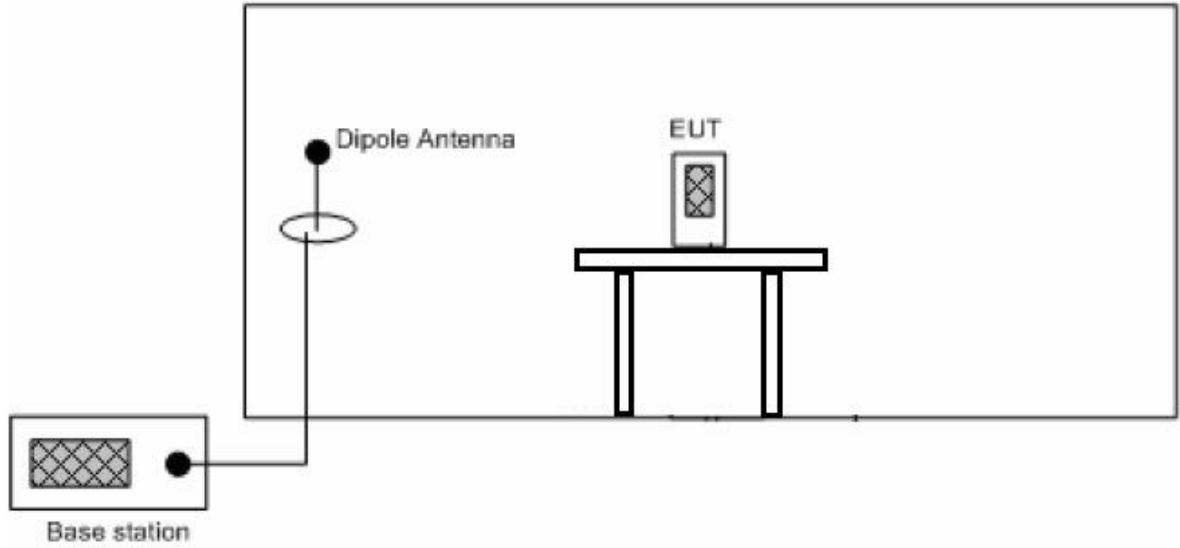

(b) Configuration of Conducted measurement

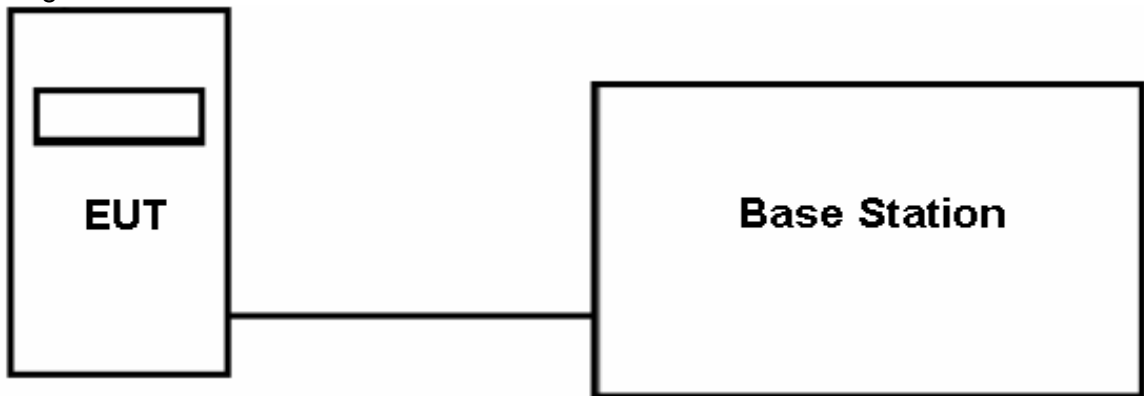

**1.4. Ancillary Equipment List**

Item	Equipment	Trade Name	Model No.	FCC ID	Serial No.
1.	Base Station	R & S	CMU 200	N/A	108591

**1.5. General Information of Test Site**

Site Description: June 22, 2001 File on  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046

Site Name: SIMT EMC Lab.

Site Address: 716 Yi Shan Road. Shanghai. China  
TEL: 8621-6470-1390 / FAX : 8621-6451-4252  
E-Mail: [jcxn@SIMT.com.cn](mailto:jcxn@SIMT.com.cn)

## 2. Test Summary

FCC Rule	DESCRIPTION OF TEST	Result	Section
§2.1046	RF Output Power	Passed	3
§ 22.913 §24.232	ERP / EIRP	Passed	4
§2.1049, §22.917,	Occupied Bandwidth & Band Edge Measurement	Passed	5
§2.1051	Conducted Spurious Emission	Passed	6
§2.1053	Field Strength of Spurious Radiation	Passed	7
§2.1055, § 22.355,	Frequency Stability vs. Temperature and voltage variations	Passed	8




**3. RF Output Power**

**3.1. Test Equipment**

Item	Instrument	Manufacturer	Type No/Serial No.	Last Calibration
1	Spectrum Analyzer	R & S	FSU 26/200172	June, 2008
2	Universal Radio Communication Tester	R & S	CMU 200/108591	June, 2008
3	Power Splitter	Agilent	11667A/54400	June, 2008

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

**3.2. Test Setup**

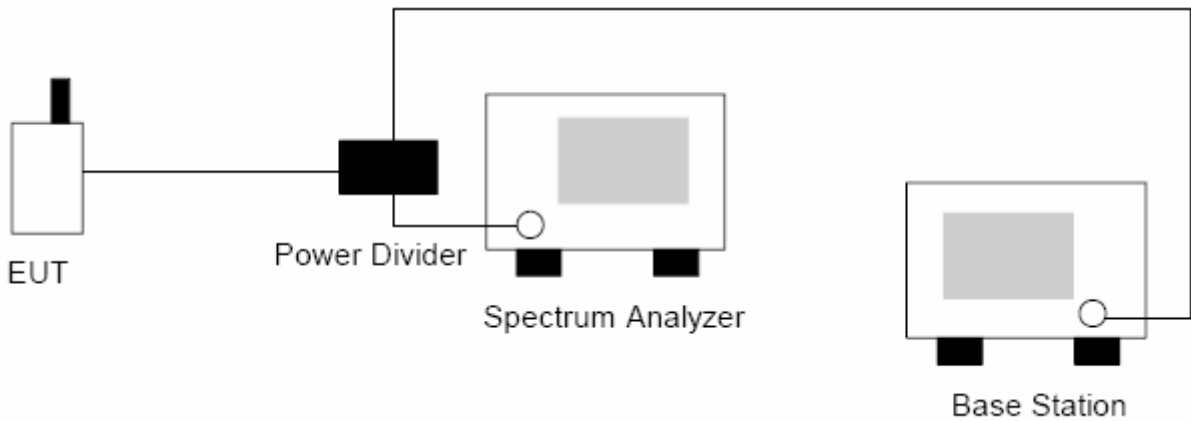

**3.3. Limits**

Limits	<33dBm
--------	--------

**3.4. Test Procedure**

After a radio link has been established between EUT and Base station, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels Bottom, middle and top channels.

**3.5. Test Specification**

CF 47 FCC Part 2.1046, 22.913, 24.232

**3.6. EUT Operation**

See chapter 1.2 of this test report.

**3.7. Test Result**


**3.7.1 GSM 850**

Test channel	Fundamental Frequency (MHz)	Reading Power (dBm)	Cable Loss (dB)	Output Power	Limit (dBm)	Pass/Fail
128	824.2	11.71	20.3	32.01	33	Pass
189	836.4	11.55	20.2	31.75		Pass
251	848.8	10.47	20.3	30.77		Pass


**3.7.2 PCS 1900**

Test channel	Fundamental Frequency (MHz)	Reading Power (dBm)	Cable Loss (dB)	Output Power	Limit (dBm)	Pass/Fail
512	1850.2	7.70	20.3	28.00	33	Pass
661	1880	6.86	20.2	27.06		Pass
810	1909.8	6.88	20.3	27.18		Pass


**GSM 850 CH 128**

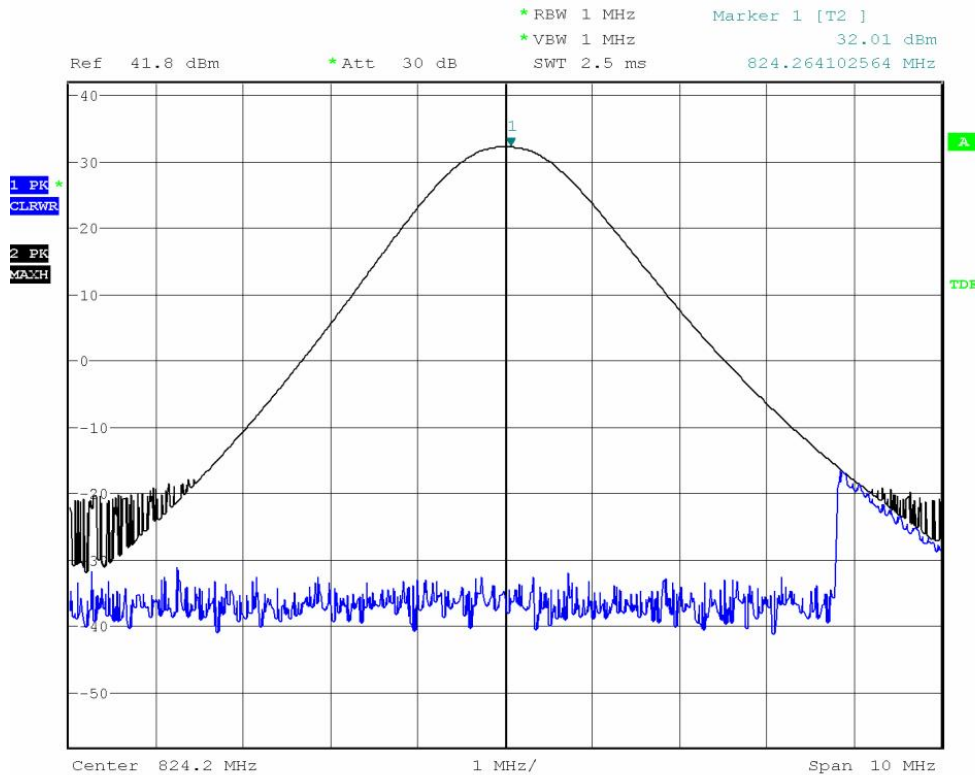

GSM 850 CH 189

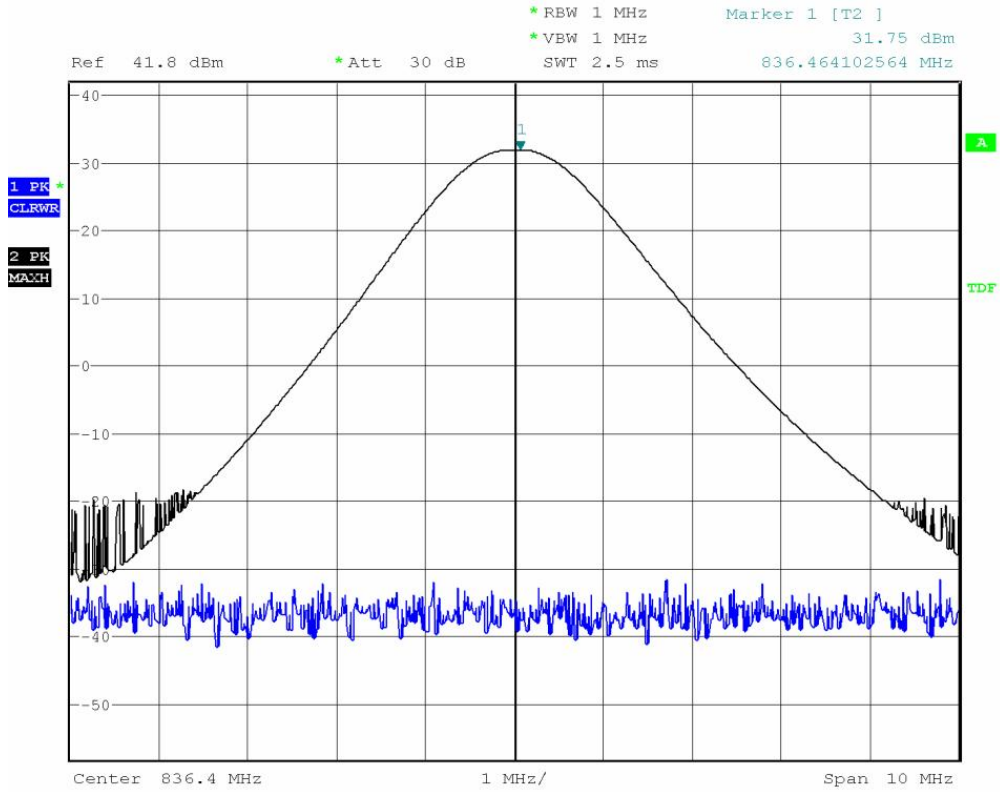


GSM 850 CH 251

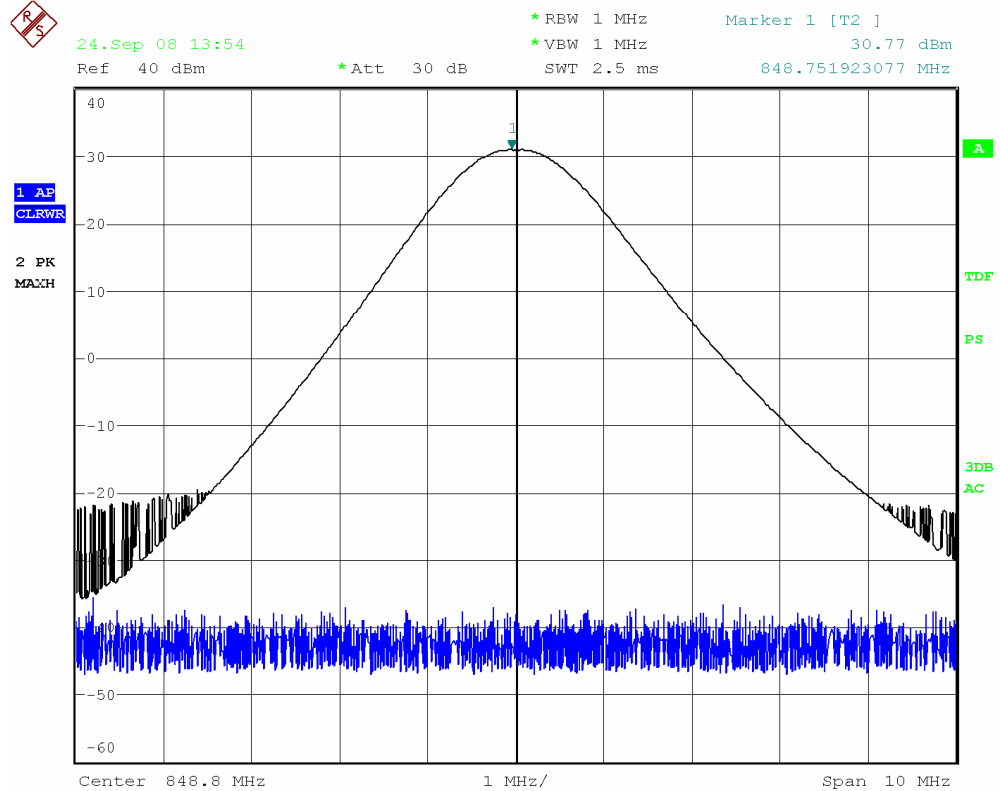


Date: 24.SEP.2008 13:54:30

### PCS 1900 CH512

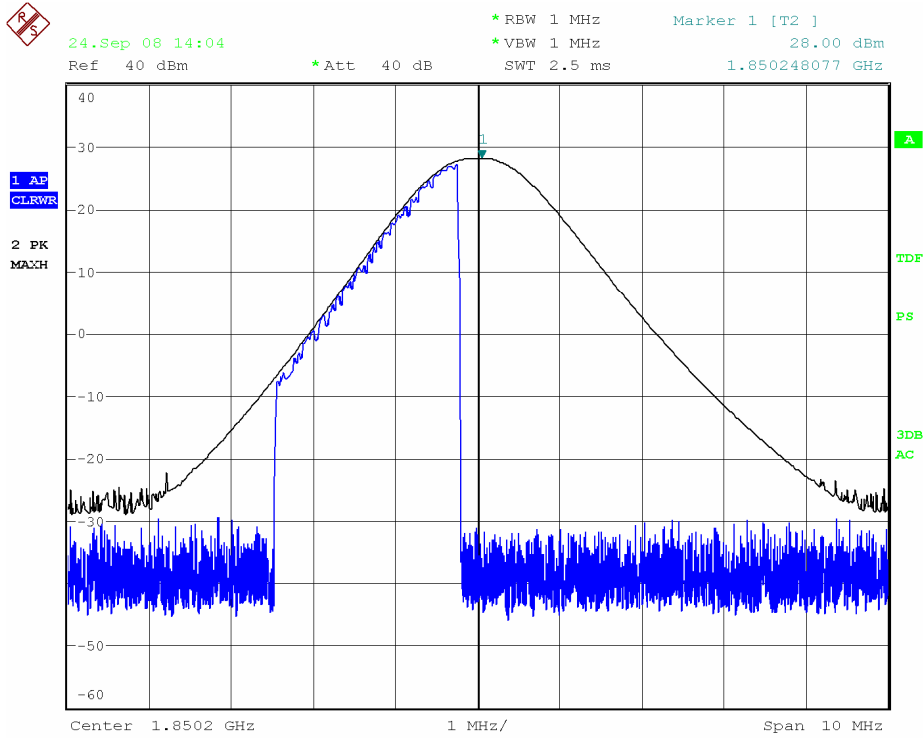


Date: 24.SEP.2008 14:04:12

### PCS 1900 CH661

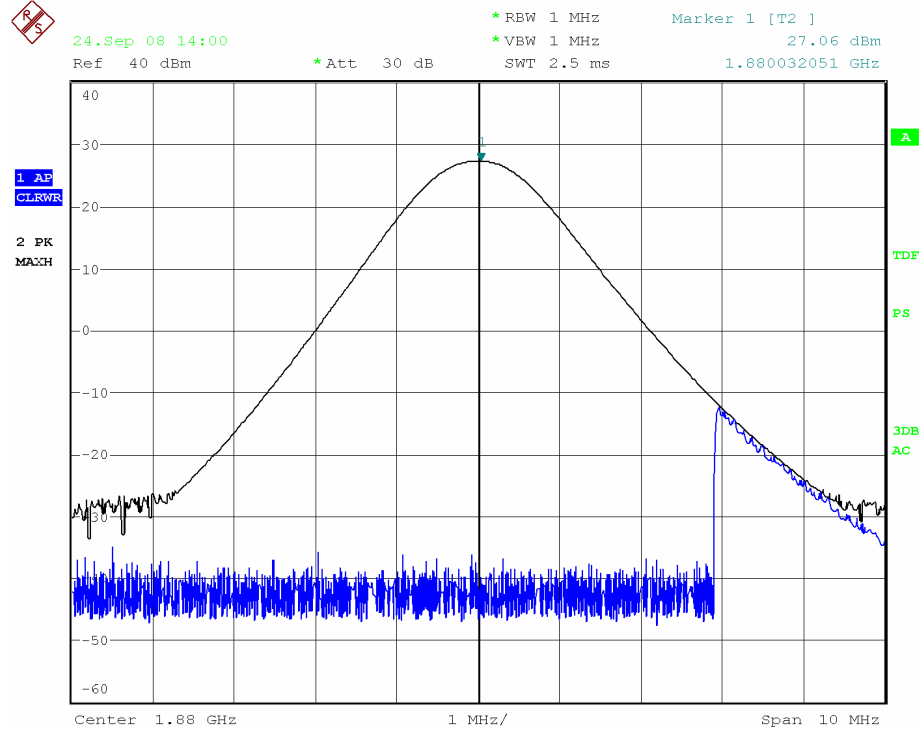

Date: 24.SEP.2008 14:00:20

PCS 1900 CH810

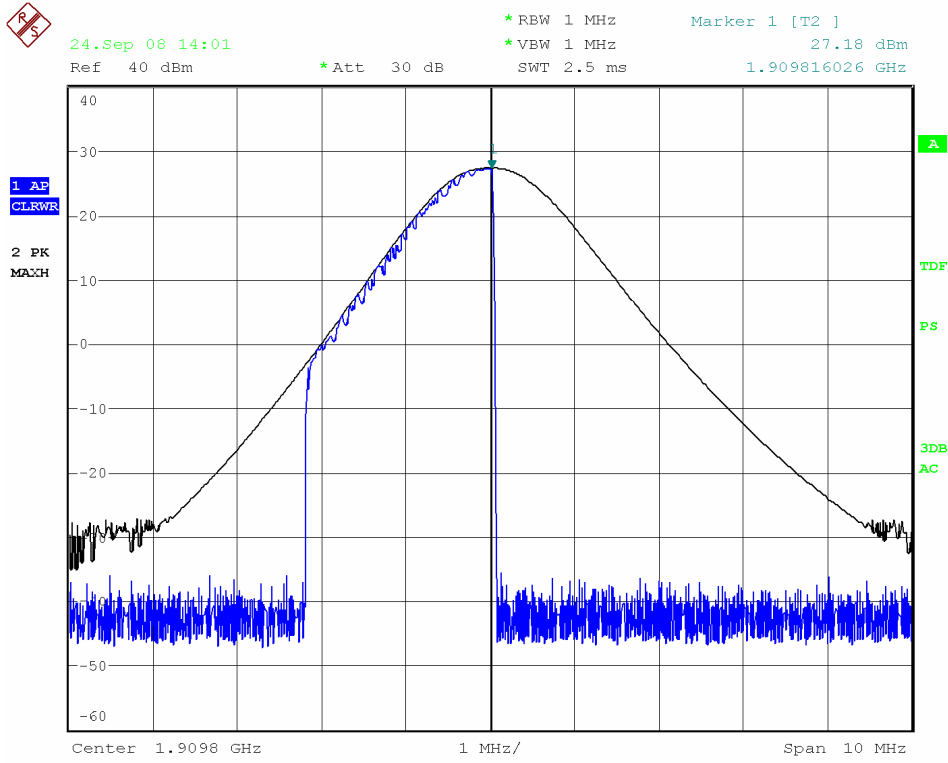

Date: 24.SEP.2008 14:01:27


## 4. ERP / EIRP

### 4.1. Test Equipment

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.
1	Spectrum Analyzer	R & S	FSU 26/200172	June, 2008
2	Ultra Broadband Antenna	R & S	HL 562/100019	May, 2008
3	VHA 9103 without telescopic rods for use with biconical broad-band elements BBA 9106	SCHWARZBEC K	BBA 9106 + VHA 9103/2358	May, 2008
4	Logarithmic Periodic Broadband Antenna	SCHWARZBEC K	UHALP 9108 A/ 696	May, 2008
5	Double-Ridged Waveguide Horn Antenna	R & S	HF 906/100023	May, 2008
6	Broad-band Horn Antenna	SCHWARZBEC K	BBHA 9120D/ 249	May, 2008
7	Universal Radio Communication Tester	R & S	CMU 200/108591	June, 2008

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

### 4.2. Test Setup

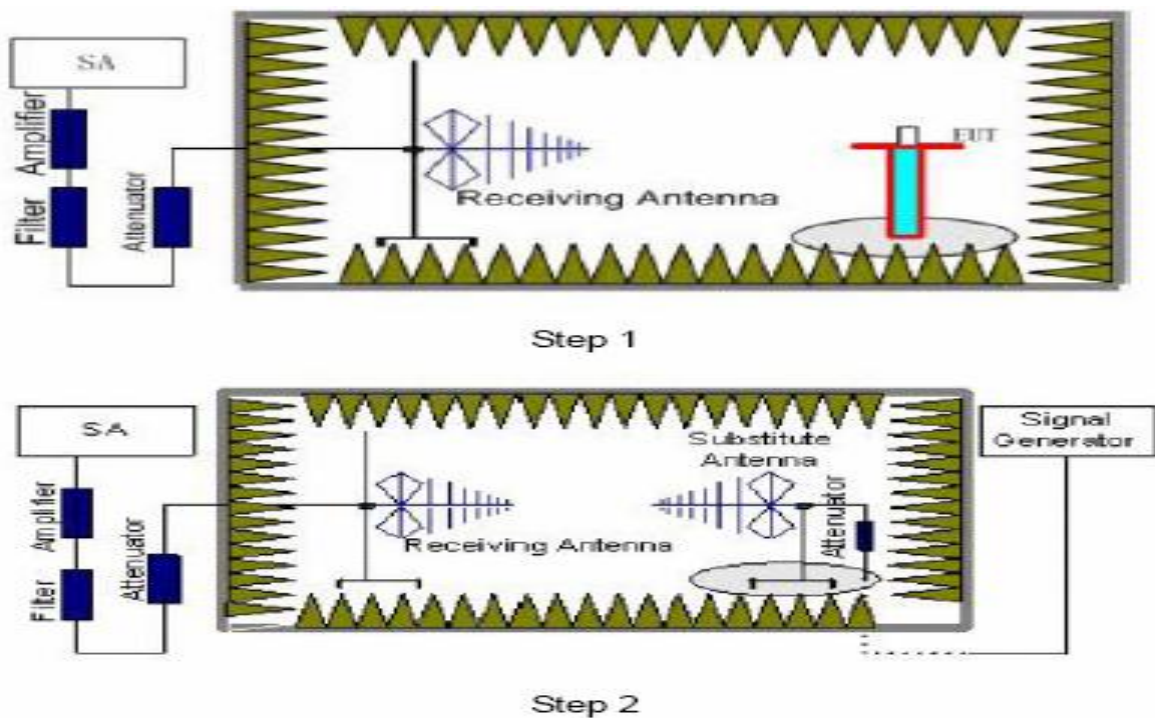

### 4.3. Limits

Limits	<38.5dBm
--------	----------

### 4.4. Test Procedure

Step 1:

EUT was placed on a 1.5 meters high non-conductive table in a fully anechoic chamber. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 1.5m. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A Peak detector is used and RBW is set to 1MHz. Then turn table rotation is adjusted from 0 degree to 360 degree until the maximum power value is founded on spectrum analyzer or receiver.

Step 2: A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The EIRP or ERP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading value of the spectrum analyzer or receiver.

Step 3: Calculaton

$$\text{ERP/EIRP} = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$$

$P_s$  (dBm): Input power to substitution antenna.

$$P_s = P_G - L_c$$

$P_G$  (dBm): output level of Signal generator

$L_c$  (dB) : Loss of the cable from Signal generator to substitution antenna

$G_s$  (dBi or dBd): Substitution antenna Gain.

$$E_t = R_t + AF$$

$$E_s = R_s + AF$$

AF (dB/m): Receive antenna factor

$R_t$ : The highest received signal in Spectrum Analyzer for EUT.

$R_s$ : The highest received signal in spectrum analyzer for substitution antenna. According to the Step 1 and Step 2,  $R_t = R_s$  ERP/EIRP =  $P_G - L_c + G_s$

### 4.5. Test Specification

CF 47 FCC Part 22.913, 24.232

### 4.6. EUT Operation

See chapter 1.2 of this test report.

## 4.7. Test Result

### 4.7.1 GSM 850

Test channel	Fundamental Frequency (MHz)	Ps		Gs (dBd)	E.R.P (dBm)	Pass/Fail
		P <sub>G</sub> (dBm)	Lc (dB)			
128	824.2	23.86	1.23	4.88	27.51	Pass
189	836.4	24.30	1.33	4.86	27.83	Pass
251	848.8	24.42	1.54	4.84	27.72	Pass

### 4.7.2 PCS 1900

Test channel	Fundamental Frequency (MHz)	Ps		Gs (dBi)	E.I.R.P (dBm)	Pass/Fail
		P <sub>G</sub> (dBm)	Lc (dB)			
512	1850.2	18.72	2.34	10.13	26.51	Pass
661	1880.0	18.50	2.56	10.08	26.02	Pass
810	1909.8	18.94	2.77	10.04	26.21	Pass




## 5. Occupied Bandwidth & Band Edge Measurement

### 5.1. Test Equipment

Item	Instrument	Manufacturer	Type No/Serial No.	Last Calibration
1	Spectrum Analyzer	R & S	FSU 26/200172	June, 2008
2	Universal Radio Communication Tester	R & S	CMU 200/108591	June, 2008
3	Power Splitter	Agilent	11667A/54400	June, 2008

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

### 5.2. Test Setup

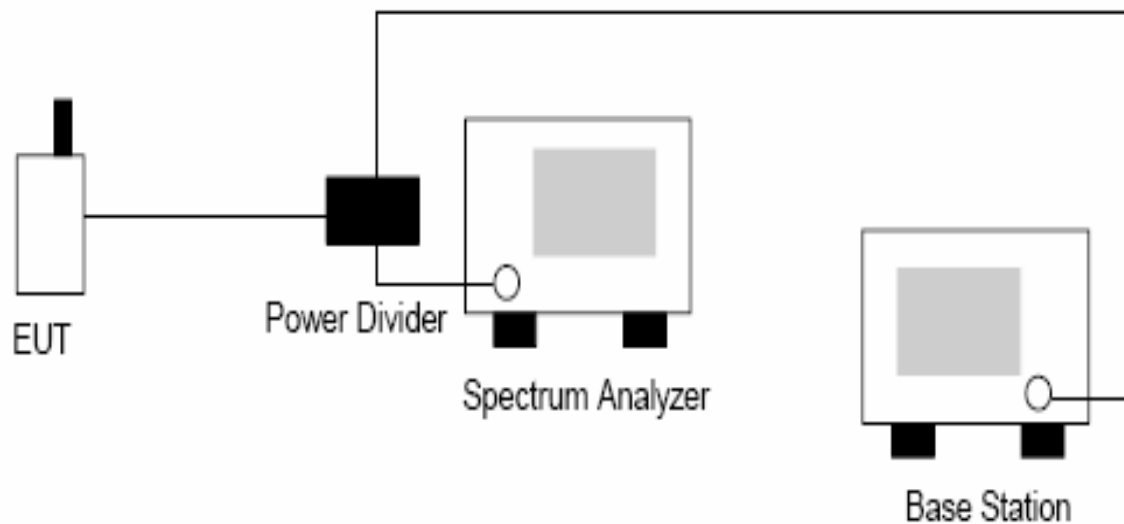

### 5.3. Limits

No specific occupied bandwidth requirements in part 2.1049

### 5.4. Test Procedure

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3 kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer. The measurement will be conducted at Bottom, middle and top three channels

5.5. EUT Operation

See chapter 1.2 of this test report.

5.6. Test Specification

CF 47 FCC Part 2.1049, 22.917, 24.238

5.7. Test Result


5.7.1 GSM 850

Test channel	Fundamental Frequency (MHz)	Bandwidth of 99% Power (kHz)
128	824.2	245.2
189	836.4	243.6
251	848.8	248.4

5.7.2 GSM 1900

Test channel	Fundamental Frequency (MHz)	Bandwidth of 99% Power (kHz)
512	1850.2	245.2
661	1880.0	243.6
810	1909.8	245.2

GSM 850 99% Bandwidth for CH 128

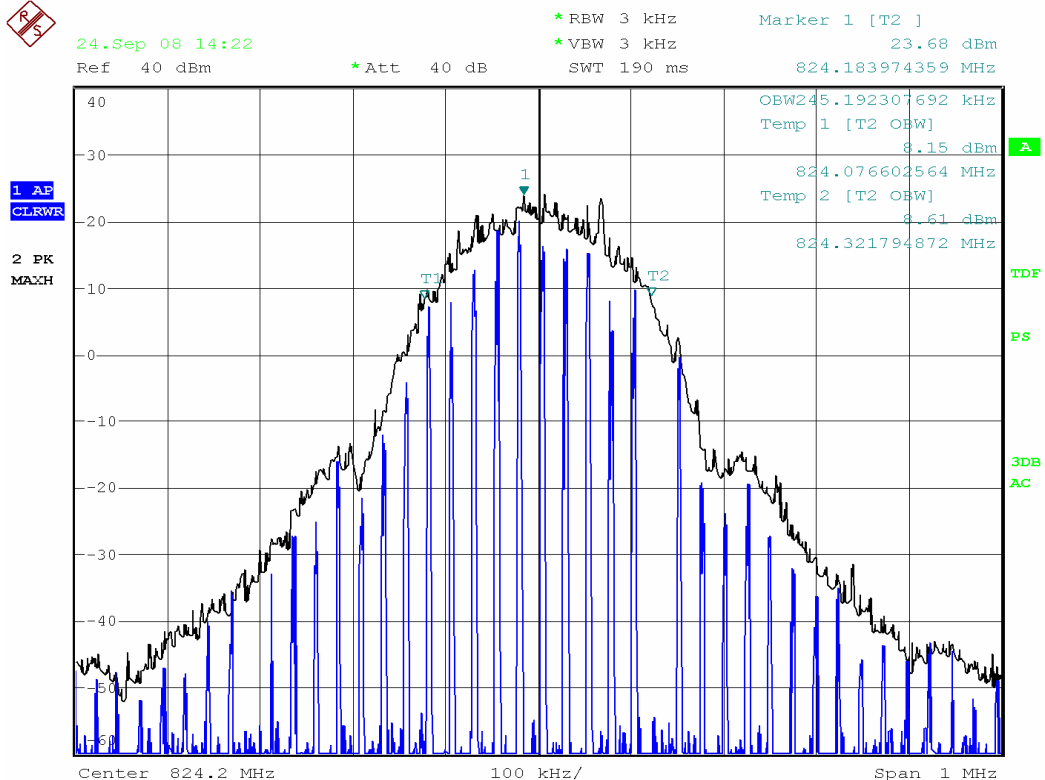

GSM 850 99% Bandwidth for CH 189




24.Sep 08 14:26

Ref 40 dBm

\*Att 40 dB

\*RBW 3 kHz  
\*VBW 3 kHz  
SWT 190 ms

Marker 1 [T2 ]  
23.78 dBm  
836.382371795 MHz

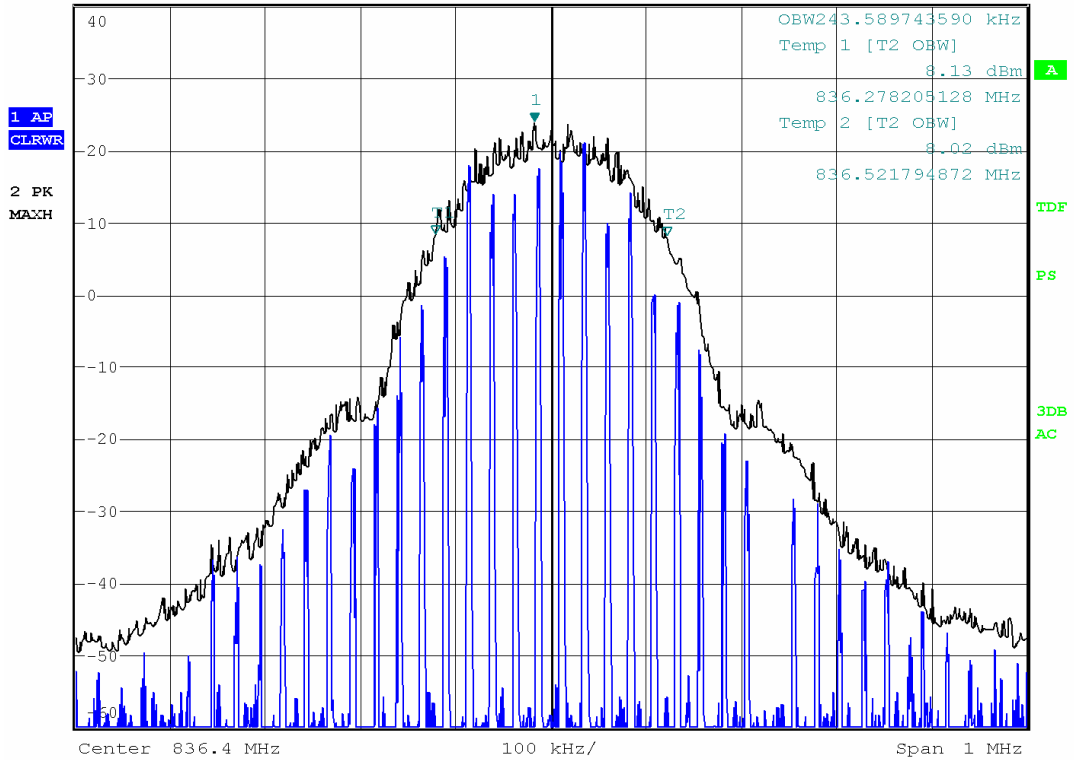

GSM 850 99% Bandwidth for CH 251




24.Sep 08 14:27

Ref 40 dBm

\*Att 40 dB

\*RBW 3 kHz  
\*VBW 3 kHz  
SWT 190 ms


Marker 1 [T2 ]  
22.08 dBm  
848.763141026 MHz

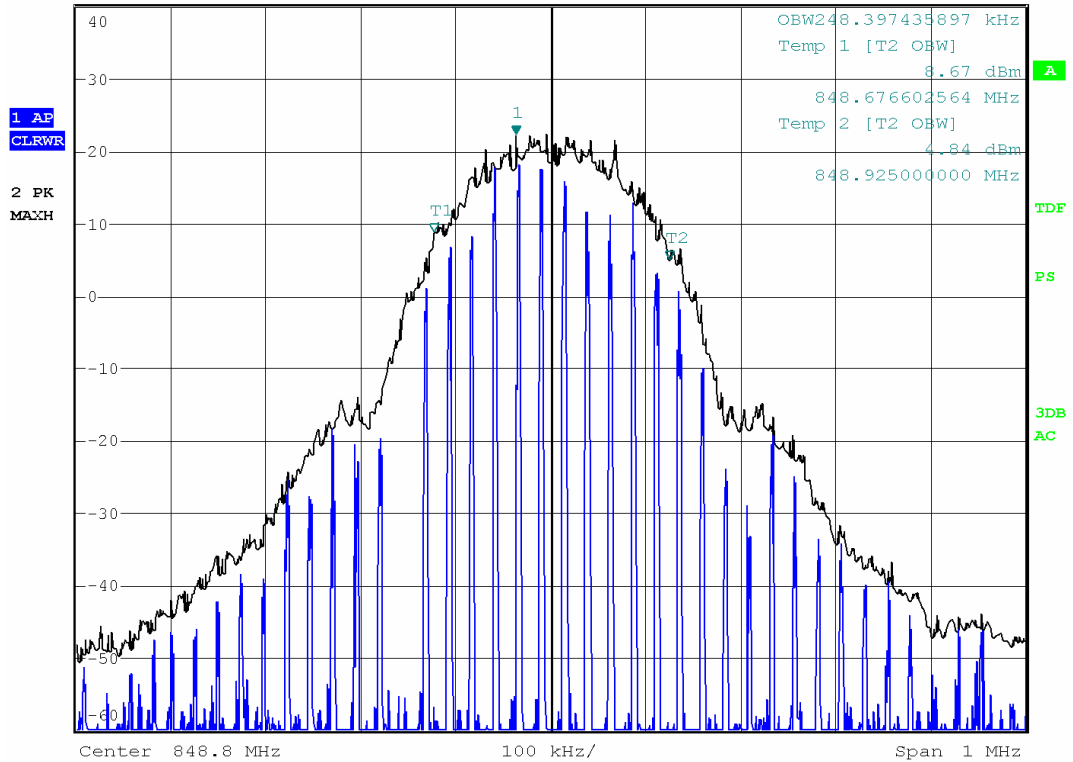

GSM 850 Band Edge for CH 128




24.Sep 08 15:04  
 Ref 40 dBm \*Att 40 dB \*RBW 3 kHz \*VBW 3 kHz SWT 190 ms  
 Marker 2 [T2] -15.37 dBm 823.979307692 MHz

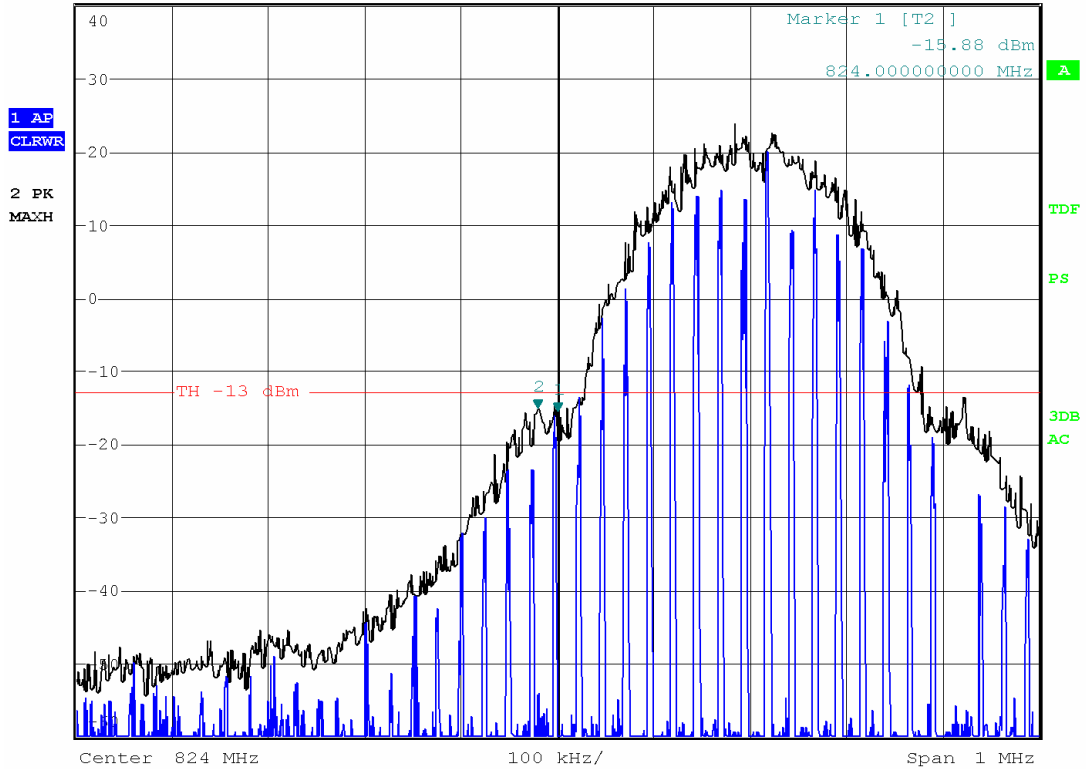

GSM 850 Band Edge for CH 251




24.Sep 08 15:07  
 Ref 40 dBm \*Att 40 dB \*RBW 3 kHz \*VBW 3 kHz SWT 190 ms  
 Marker 2 [T2] -14.61 dBm 849.022435897 MHz

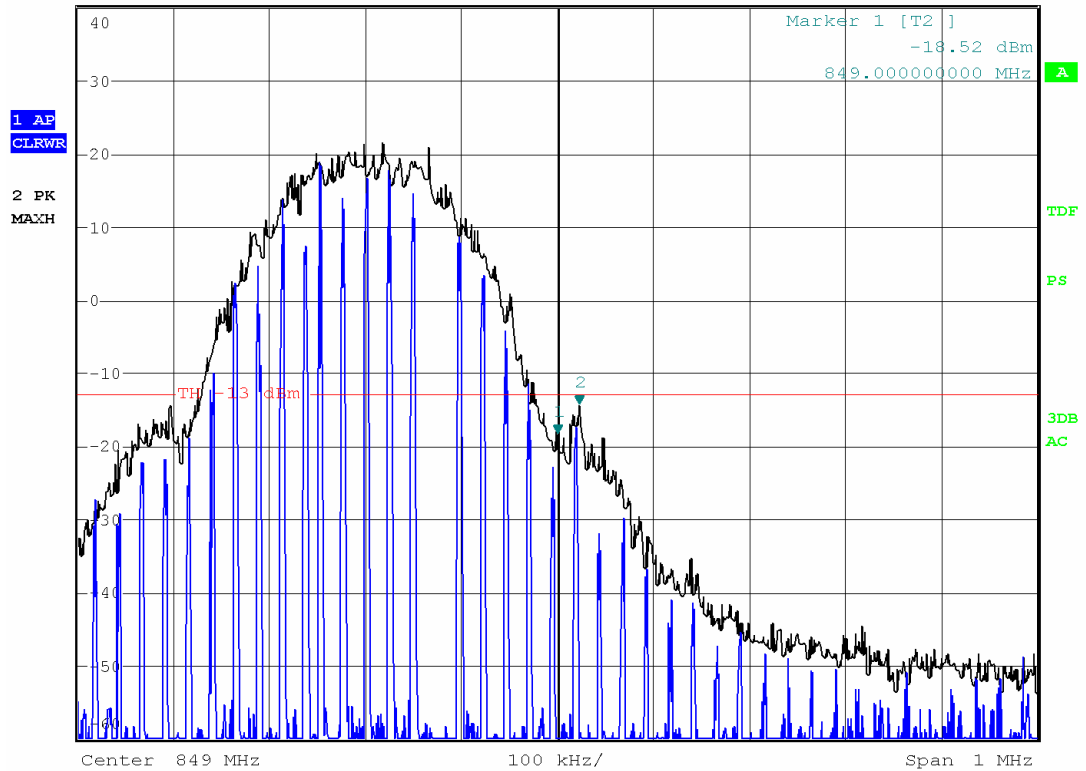

PCS 1900 99% Bandwidth for CH 512




24.Sep 08 14:13  
 Ref 40 dBm \*Att 40 dB \*RBW 3 kHz \*VBW 3 kHz SWT 190 ms  
 Marker 1 [T2 ] 19.59 dBm 1.850185577 GHz

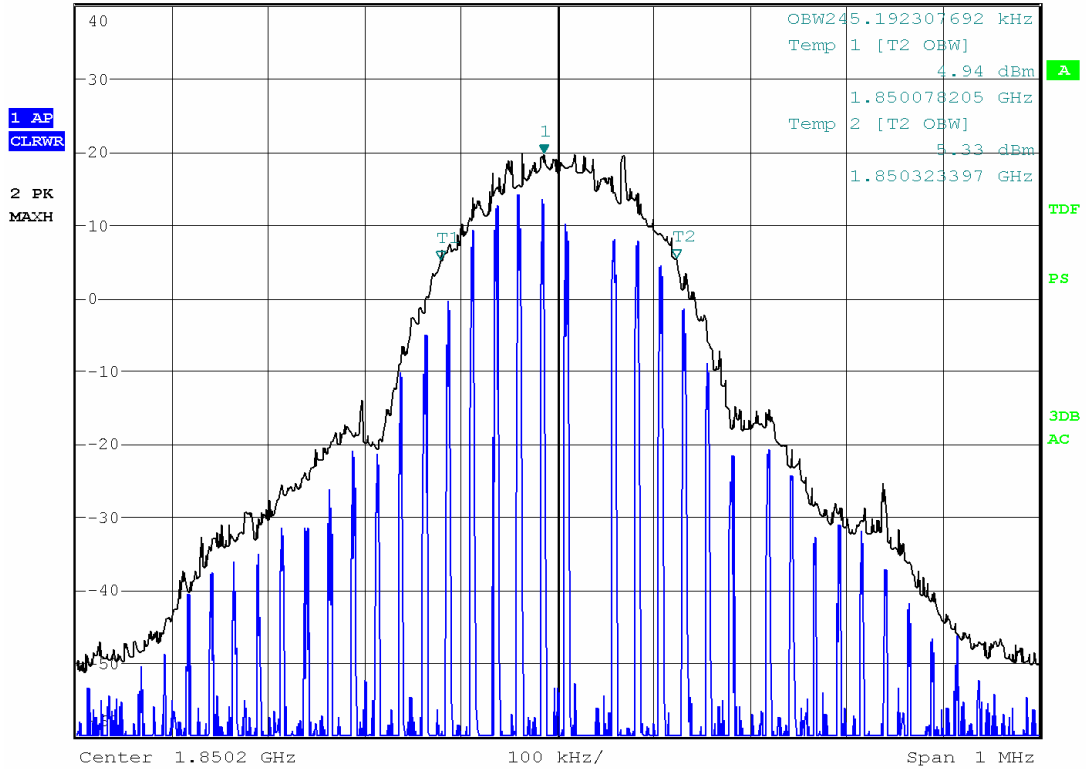

PCS 1900 99% Bandwidth for CH 661




24.Sep 08 14:15  
 Ref 40 dBm \*Att 40 dB \*RBW 3 kHz \*VBW 3 kHz SWT 190 ms  
 Marker 1 [T2 ] 20.13 dBm 1.879987179 GHz

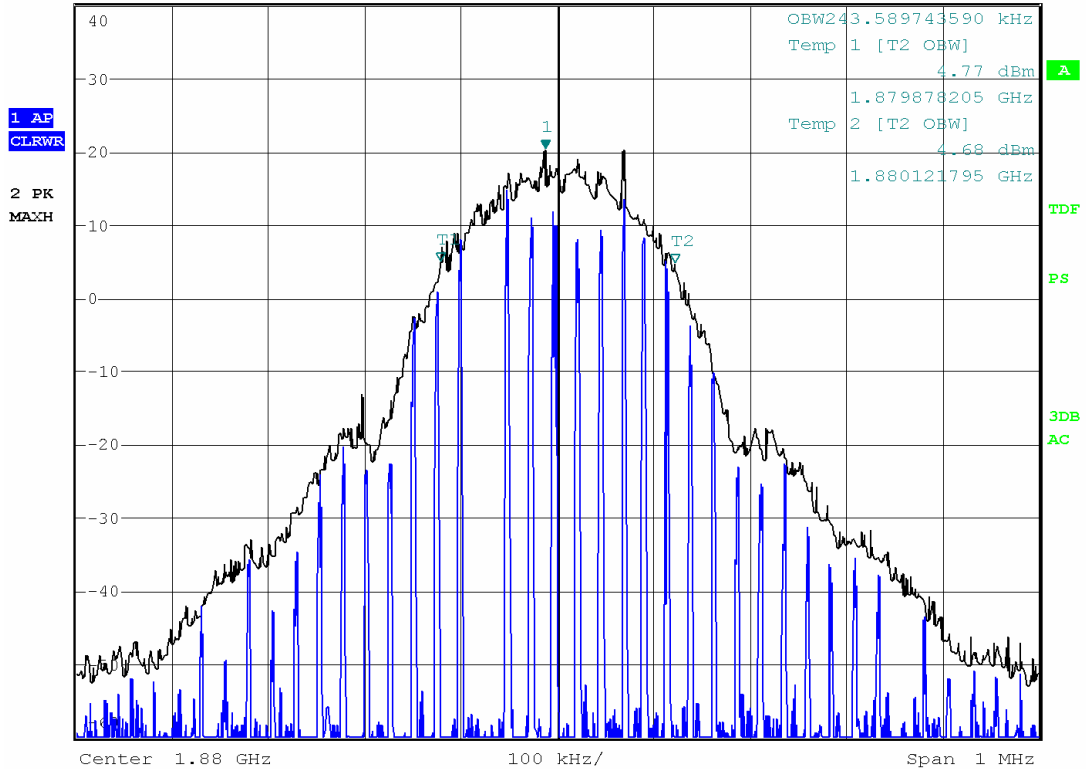

PCS 1900 99% Bandwidth for CH 810




24.Sep 08 14:18  
 Ref 40 dBm \*Att 40 dB \*RBW 3 kHz \*VBW 3 kHz SWT 190 ms  
 Marker 1 [T2 ] 18.87 dBm 1.909817628 GHz

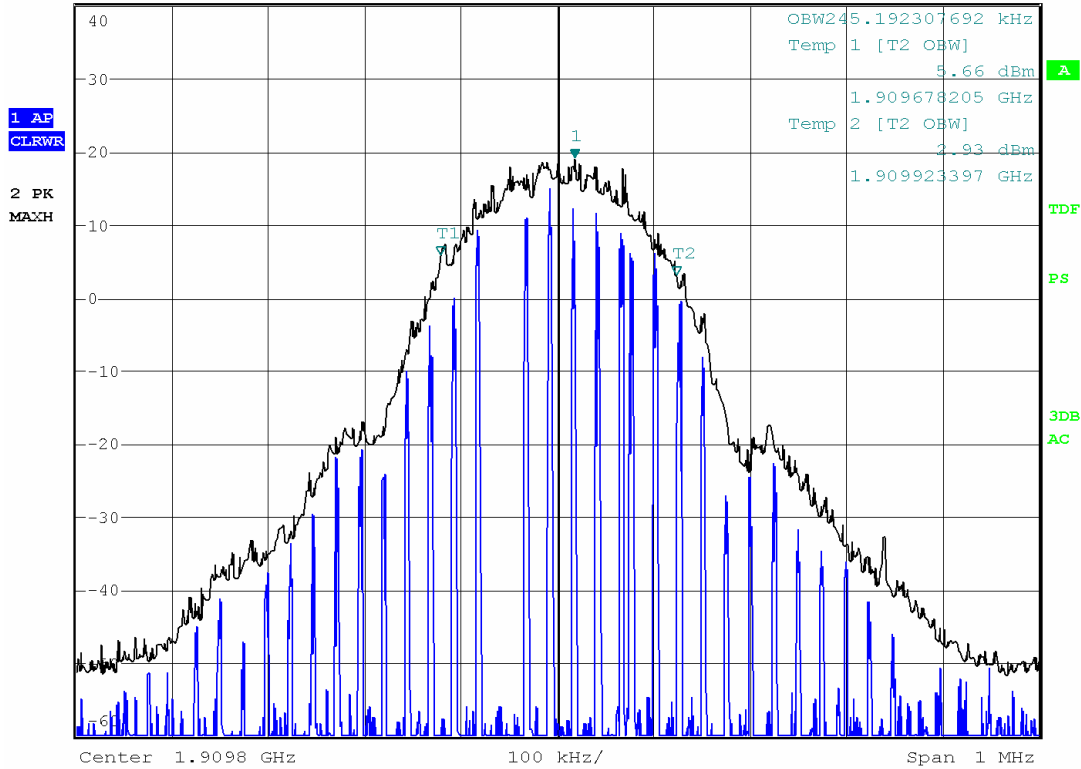

PCS 1900 Band Edge for CH 512



24.Sep 08 15:09  
 Ref 40 dBm \*Att 40 dB \*RBW 3 kHz \*VBW 3 kHz SWT 190 ms  
 Marker 2 [T2 ] -17.49 dBm 1.849995192 GHz

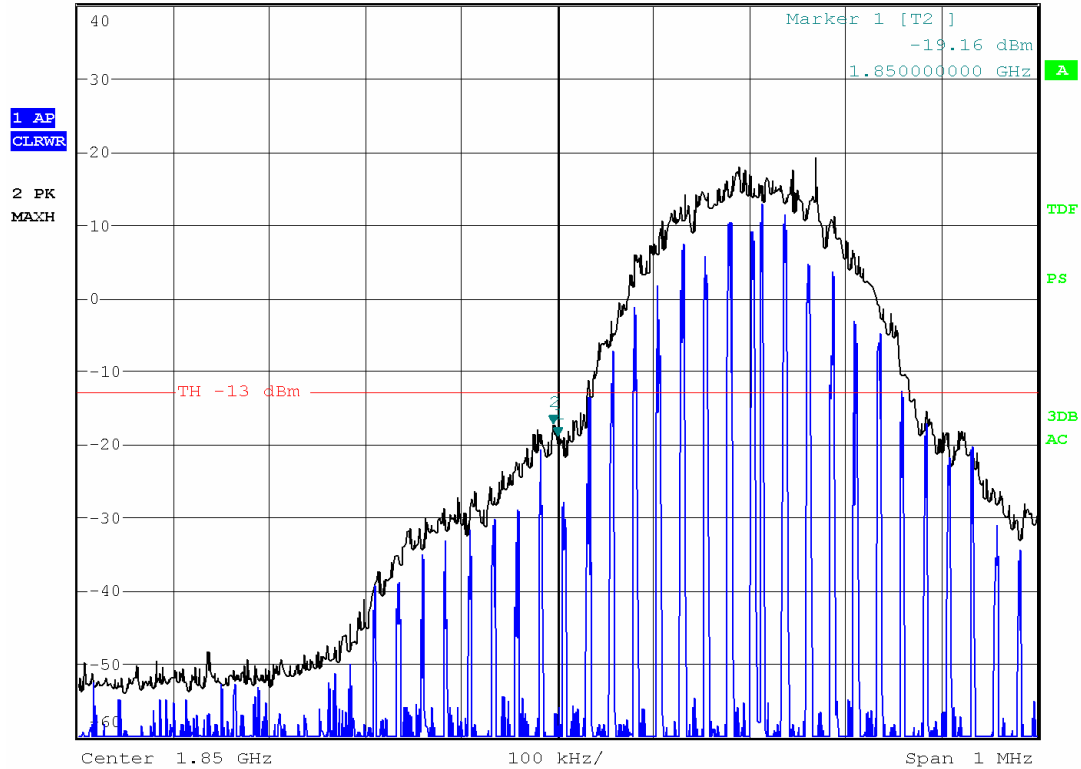

PCS 1900 Band Edge for CH 810



24.Sep 08 15:09

Ref 40 dBm

\*Att 40 dB

\*RBW 3 kHz


\*VBW 3 kHz

SWT 190 ms

Marker 2 [T2 ]

-19.27 dBm

1.910022436 GHz

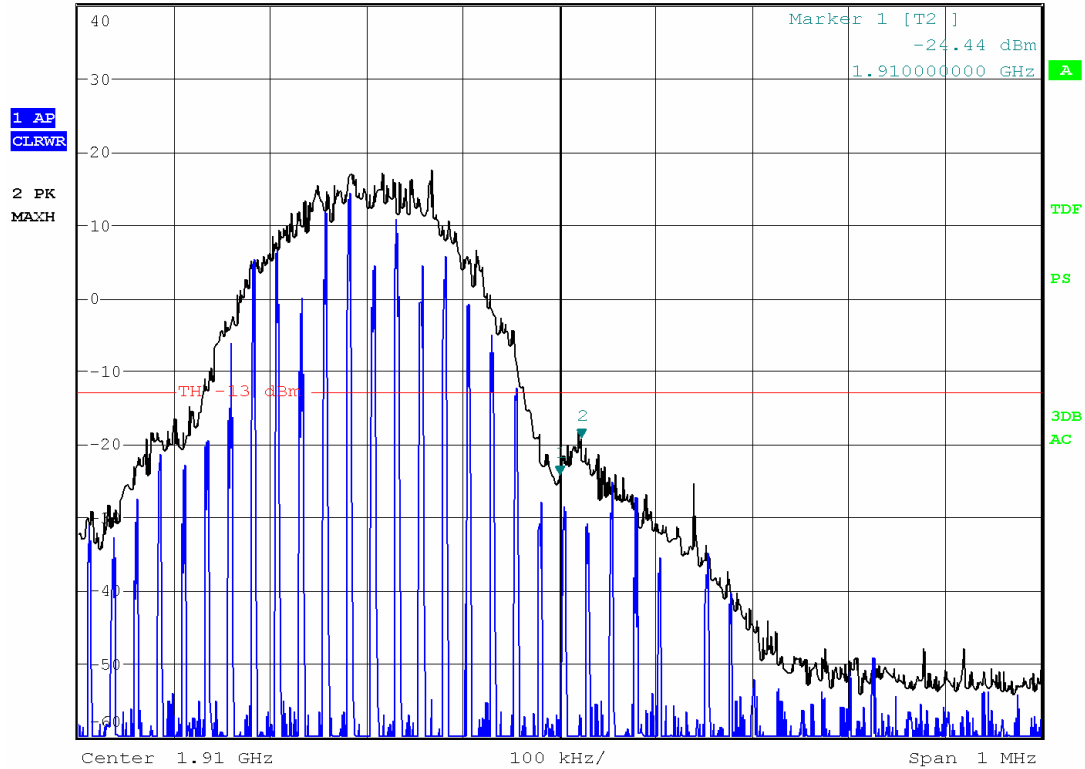


## 6. Conducted Spurious Emission

### 6.1. Test Equipment

Item	Instrument	Manufacturer	Type No/Serial No.	Last Calibration
1	Spectrum Analyzer	R & S	FSU 26/200172	June, 2008
2	Universal Radio Communication Tester	R & S	CMU 200/108591	June, 2008
3	Power Splitter	Agilent	11667A/54400	June, 2008

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

### 6.2. Test Setup

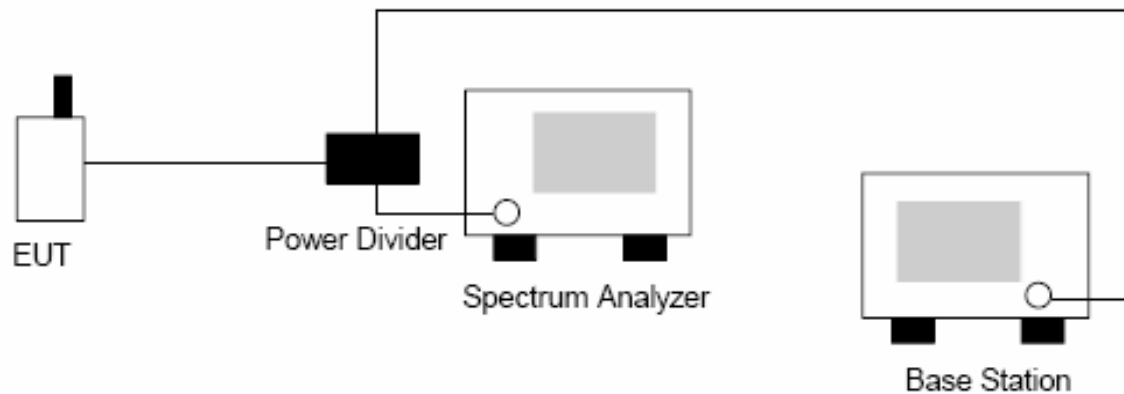

### 6.3. Limits

Limits	<-13dBm
--------	---------

### 6.4. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

### 6.5. Test Specification

CF 47 FCC Part 2.1051, Part 22.917, Part 24.238

### 6.6. EUT Operation

See chapter 1.2 of this test report

### 6.7. Test Result




Test Mode: GSM 850 CH 128 Frequency Range: 30M-1G



Ref 30 dBm      \* Att 40 dB      \* RBW 10 kHz      Marker 1 [T1]      -61.42 dBm  
\* VBW 30 kHz      634.695512821 MHz  
SWT 9.8 s


1 AP  
CLRWR  
2 PK  
MAXH

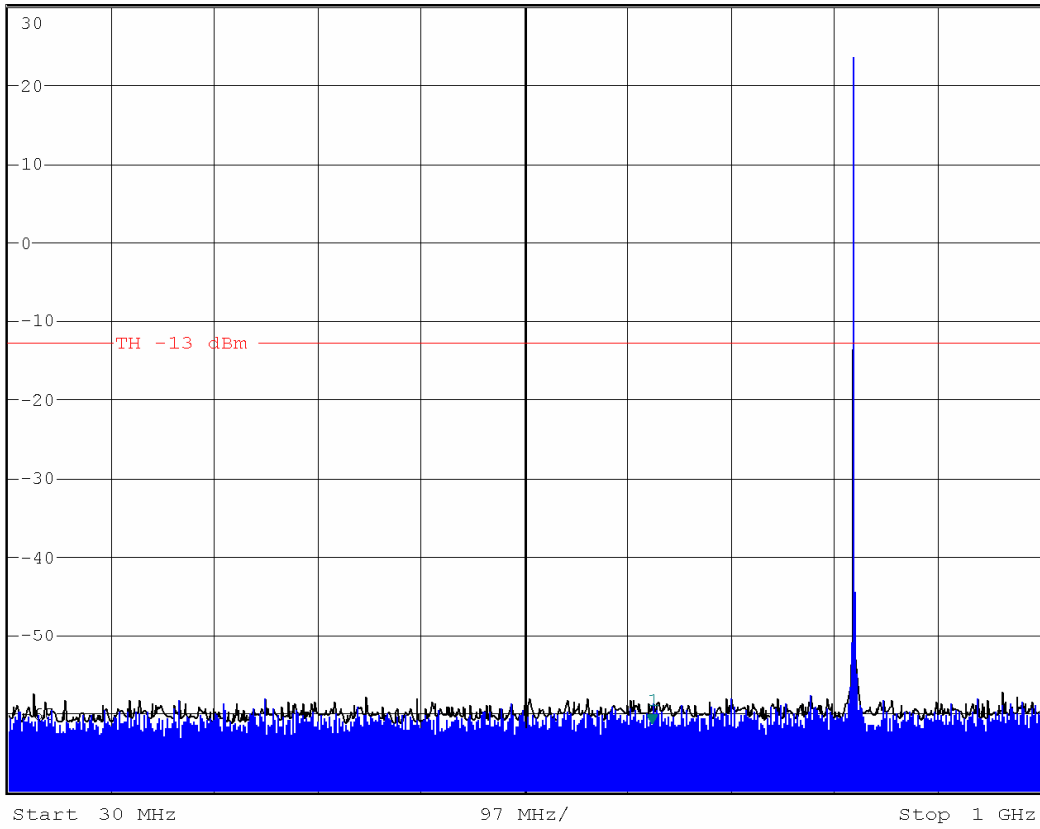

Date: 25.SEP.2008 14:37:09

Note: The signal beyond the limit is carrier

Test Mode: GSM 850 CH 128 Frequency Range: 1G-6G

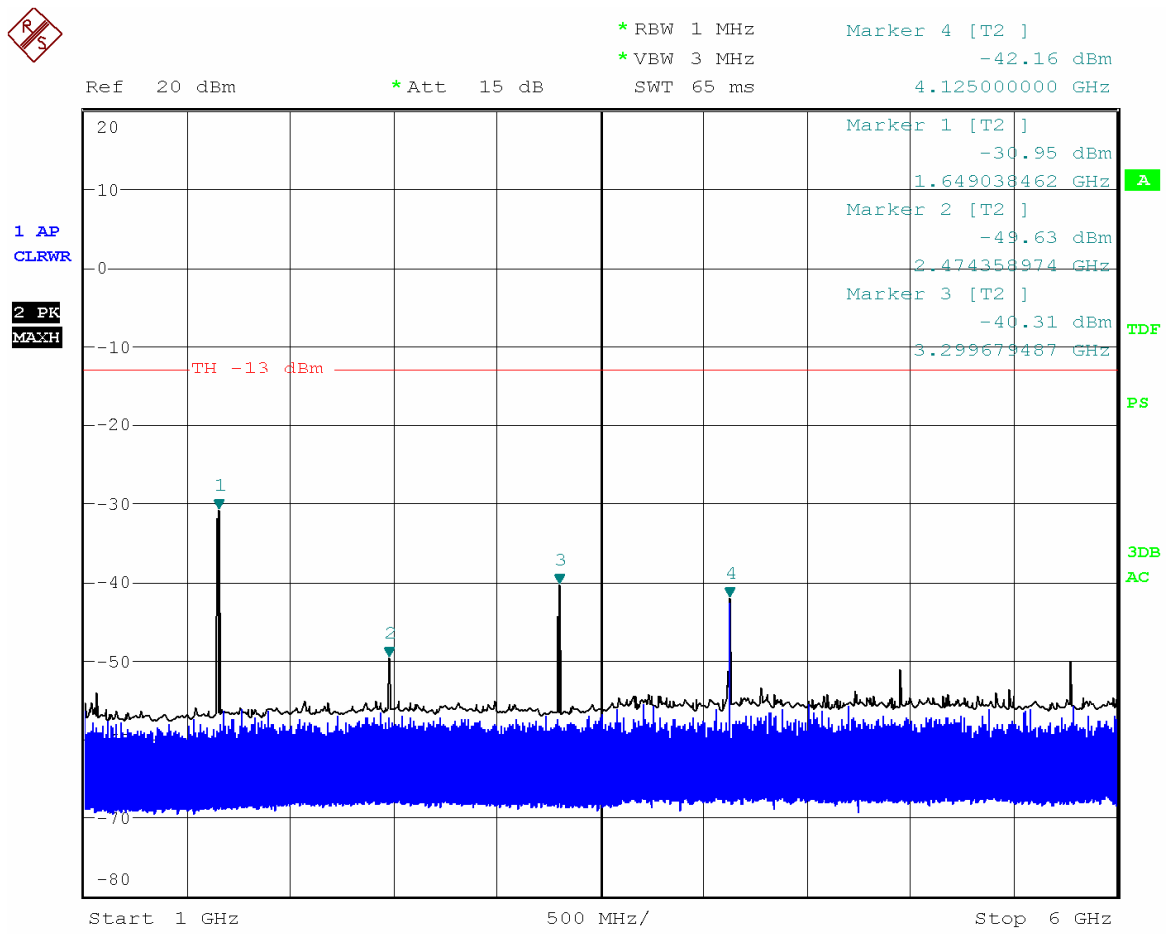

Date: 25.SEP.2008 14:41:09

Test Mode: GSM 850 CH 128 Frequency Range: 6G-20G



25.Sep 08 09:37

\*RBW 1 MHz

Marker 4 [T2]

\*VBW 3 MHz

-56.18 dBm

Ref 13 dBm


\*Att 10 dB

SWT 85 ms

10.711538462 GHz

1 AP  
CLRWR

2 PK  
MAXH

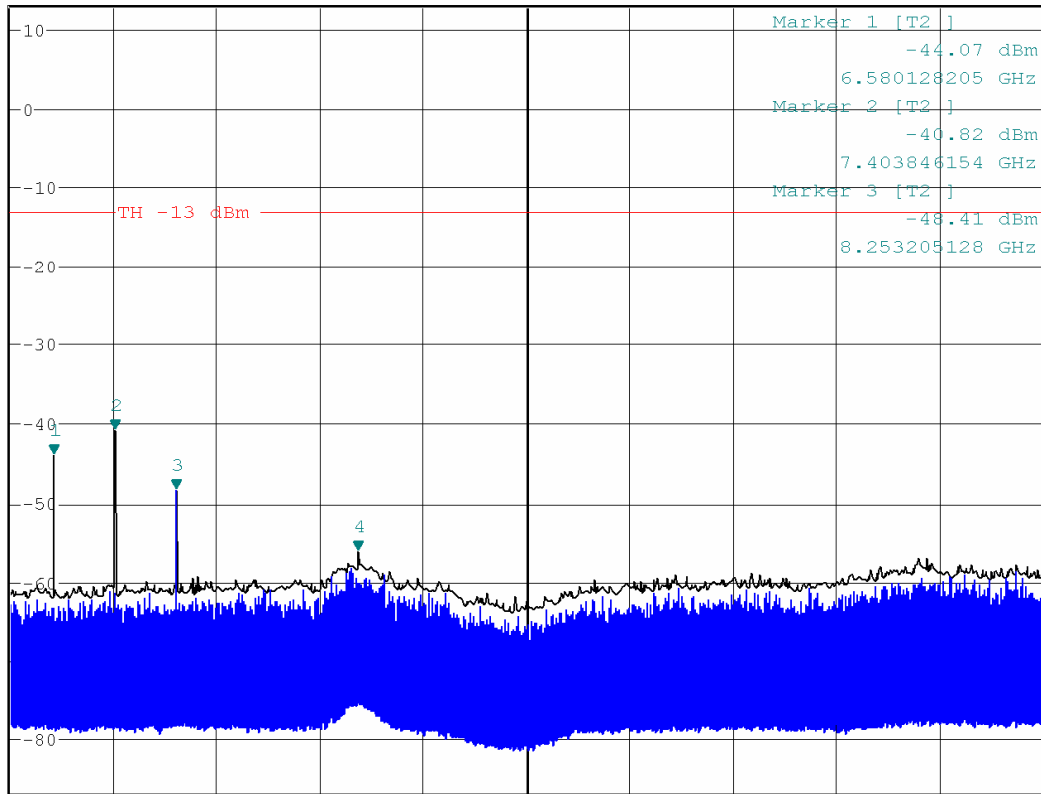

Start 6 GHz

1.4 GHz/

Stop 20 GHz


Date: 25.SEP.2008 09:37:12

Test Mode: GSM 850 CH 189 Frequency Range: 30M-1G



\*RBW 10 kHz  
\*VBW 30 kHz  
Marker 1 [T2 ]  
24.84 dBm  
836.778846154 MHz


Ref 29 dBm \*Att 55 dB SWT 9.8 s

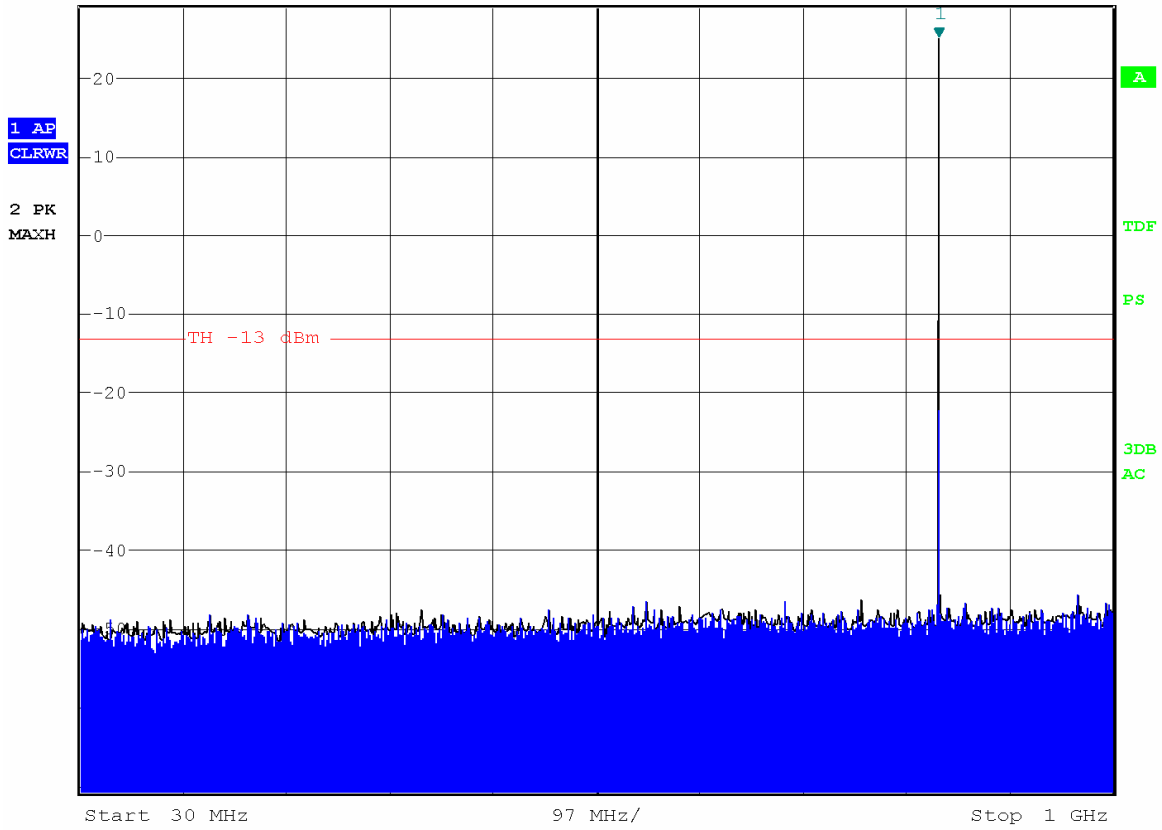

Date: 25.SEP.2008 14:53:59

Note: The signal beyond the limit is carrier

Test Mode: GSM 850 CH 189 Frequency Range: 1G-6G

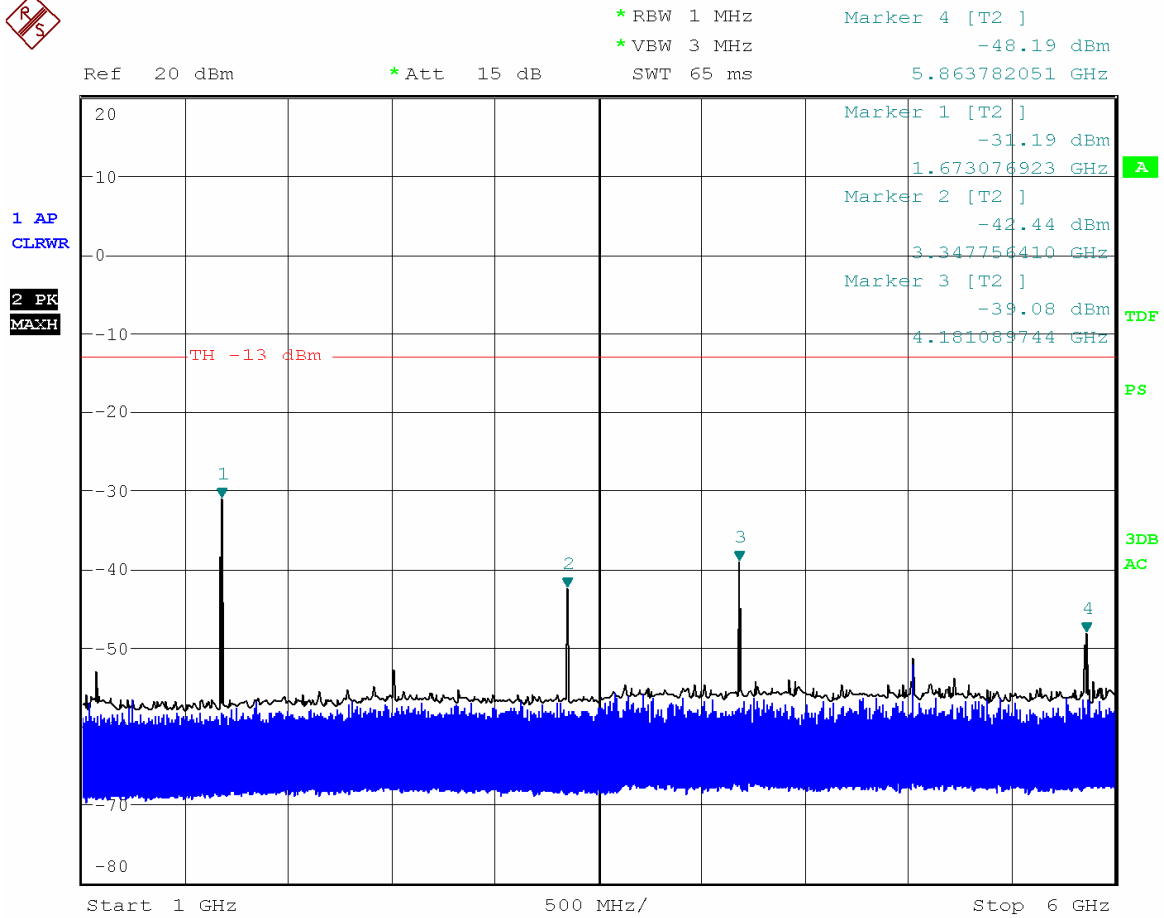

Date: 25.SEP.2008 14:42:54


Test Mode: GSM 850 CH 189 Frequency Range: 6G-20G



25.Sep 08 09:36  
 Ref 13 dBm \*Att 10 dB SWT 85 ms  
 \*RBW 1 MHz Marker 4 [T2] -56.57 dBm  
 \*VBW 3 MHz 10.868589744 GHz

1 AP  
 CLRWR

2 PK  
 MAXH

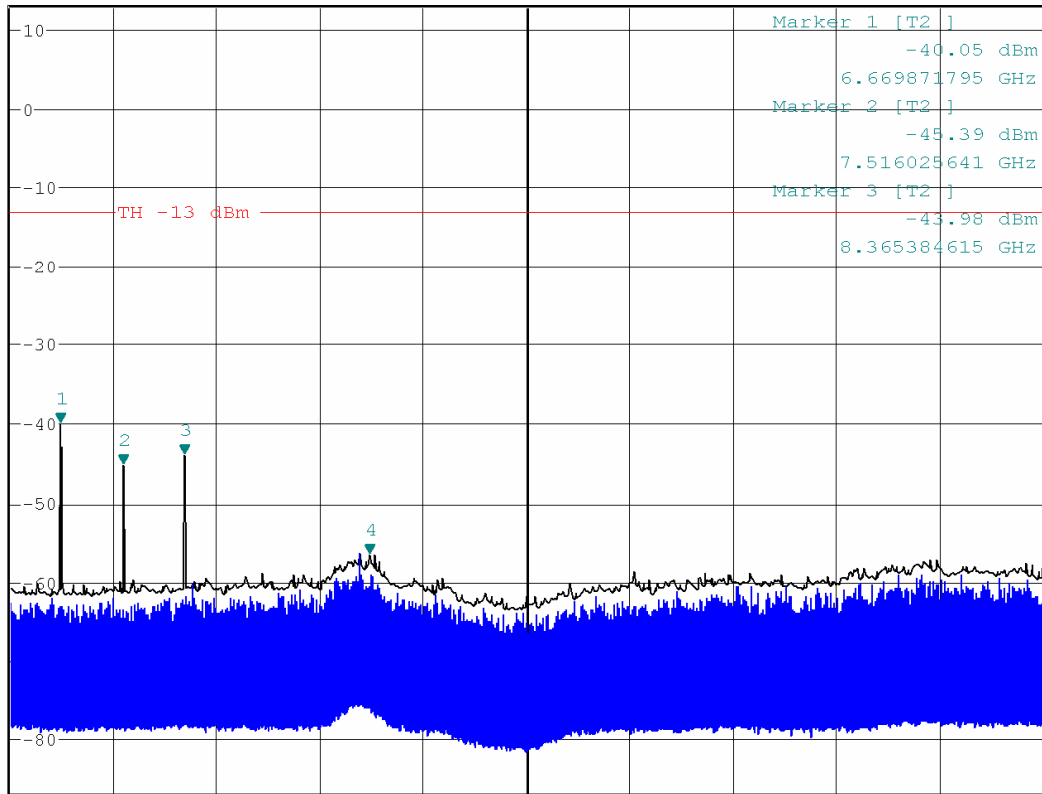


Start 6 GHz 1.4 GHz/ Stop 20 GHz

Date: 25.SEP.2008 09:36:29

Test Mode: GSM 850 CH 251 Frequency Range: 30M-1G



Ref 29 dBm      \* Att 55 dB      SWT 9.8 s      Marker 1 [T2 ]      18.34 dBm  
 \* RBW 10 kHz      \* VBW 30 kHz      849.214743590 MHz

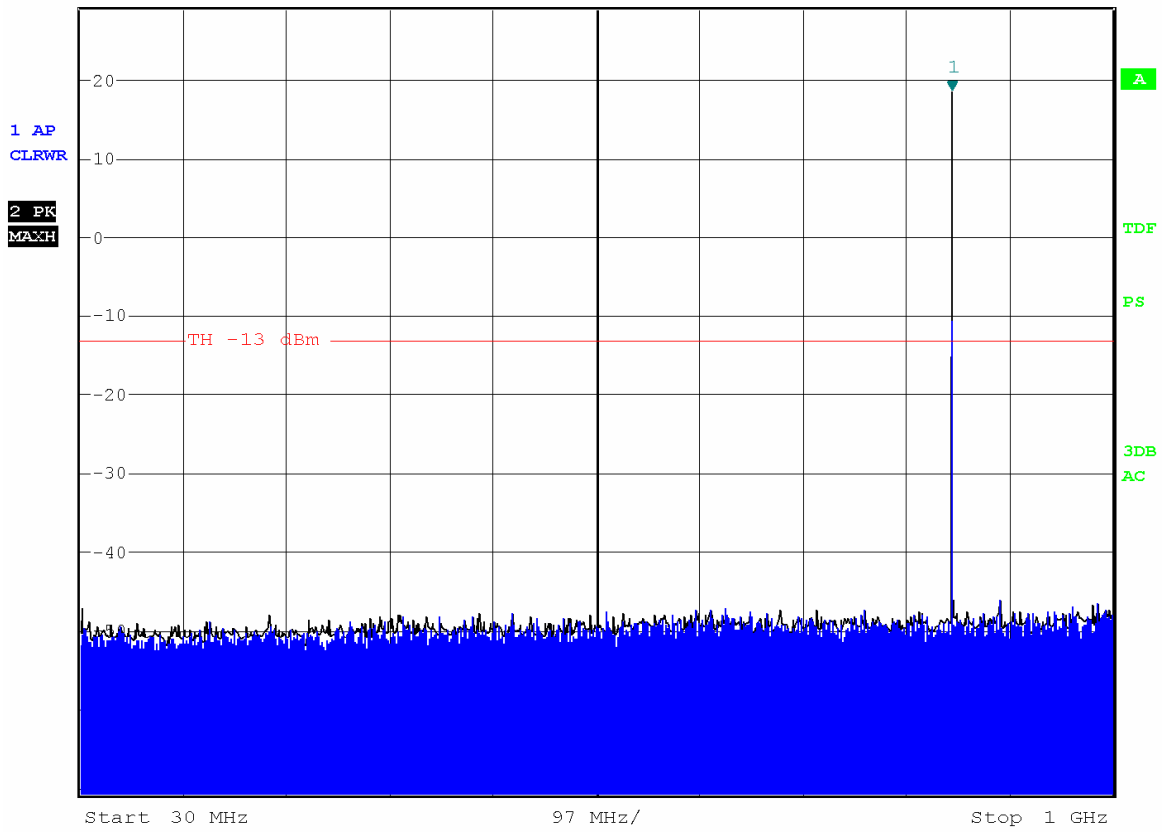

Date: 25.SEP.2008 14:55:58


Note: The signal beyond the limit is carrier

Test Mode: GSM 850 CH 251 Frequency Range: 1G-6G



\*RBW 1 MHz  
 \*VBW 3 MHz  
 Ref 20 dBm \*Att 15 dB SWT 65 ms

1 AP  
 CLRWR  
 2 PK  
 MAXH

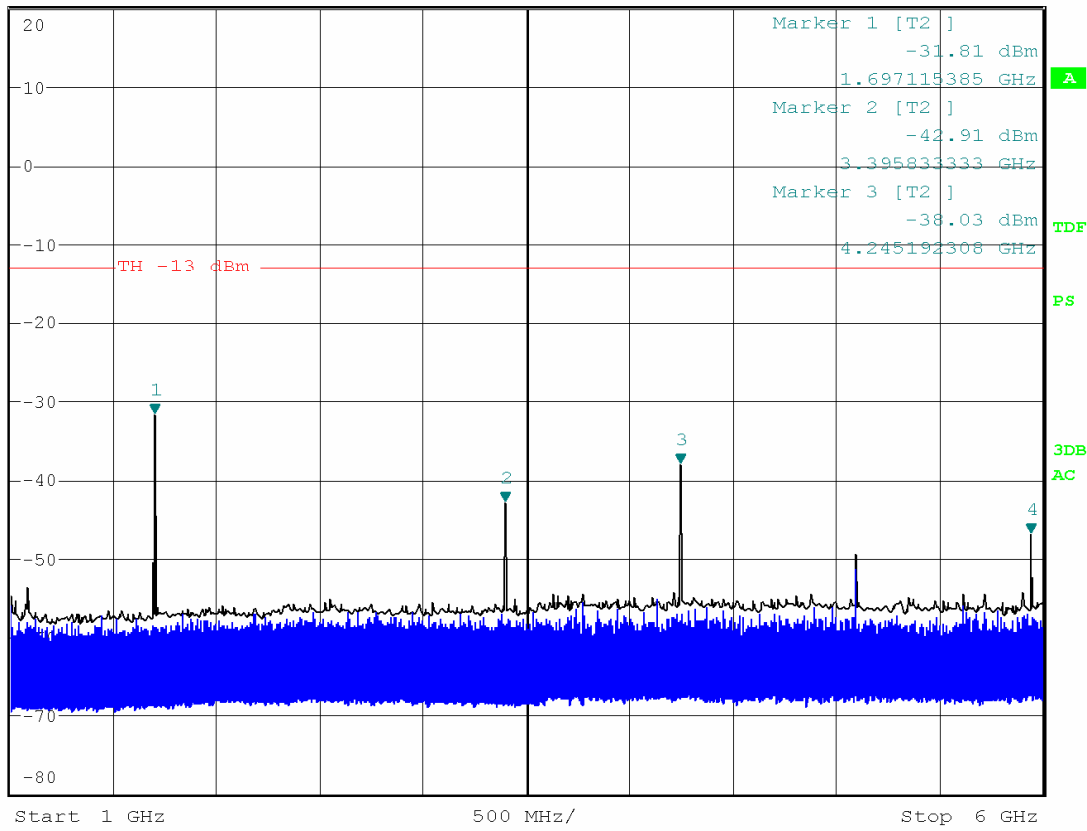

Date: 25.SEP.2008 14:43:54



Test Mode: GSM 850 CH 251 Frequency Range: 6G-20G



25.Sep 08 09:37

\*RBW 1 MHz

Marker 4 [T2 ]

\*VBW 3 MHz

-57.64 dBm

Ref 13 dBm


\*Att 10 dB

SWT 85 ms

10.733974359 GHz

1 AP  
CLRWR

2 PK  
MAXH

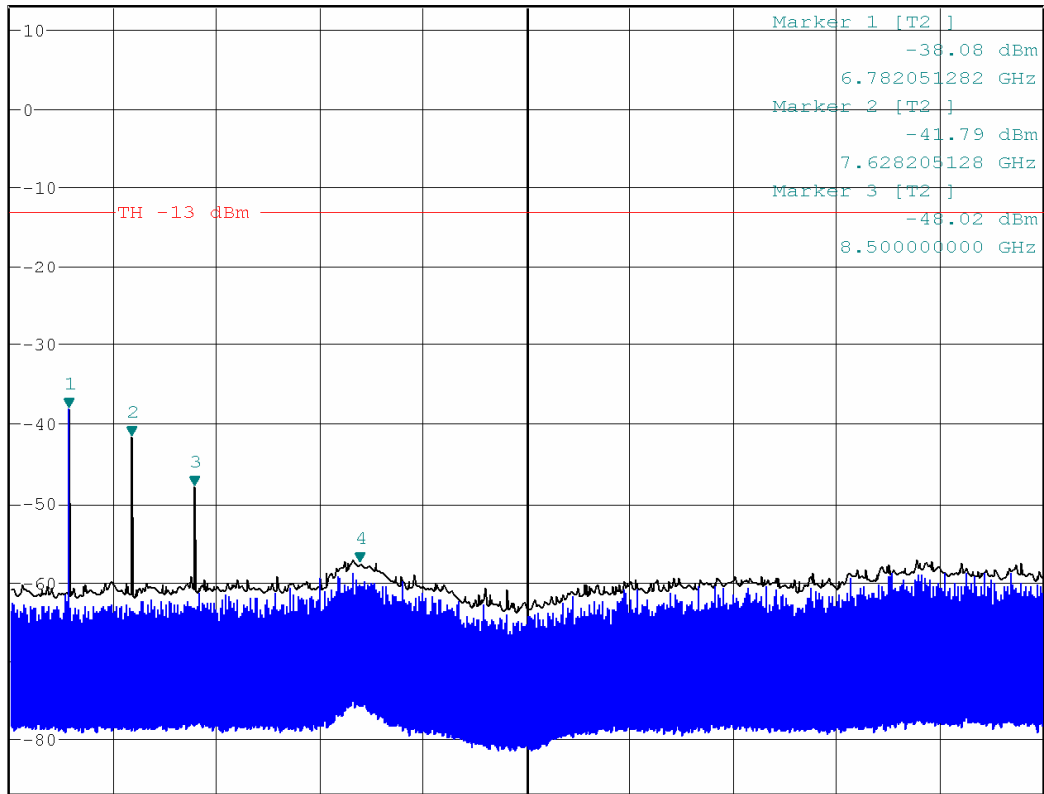

Start 6 GHz

1.4 GHz/

Stop 20 GHz

Date: 25.SEP.2008 09:37:56

Test Mode: PCS 1900 CH 512 Frequency Range: 30M-1G



25.Sep 08 14:59

\*RBW 10 kHz

Marker 2 [T2 ]

\*VBW 30 kHz

-47.70 dBm

Ref 29 dBm


\*Att 55 dB

SWT 9.8 s

459.038461538 MHz

1 AP  
CLRWR

2 PK  
MAXH

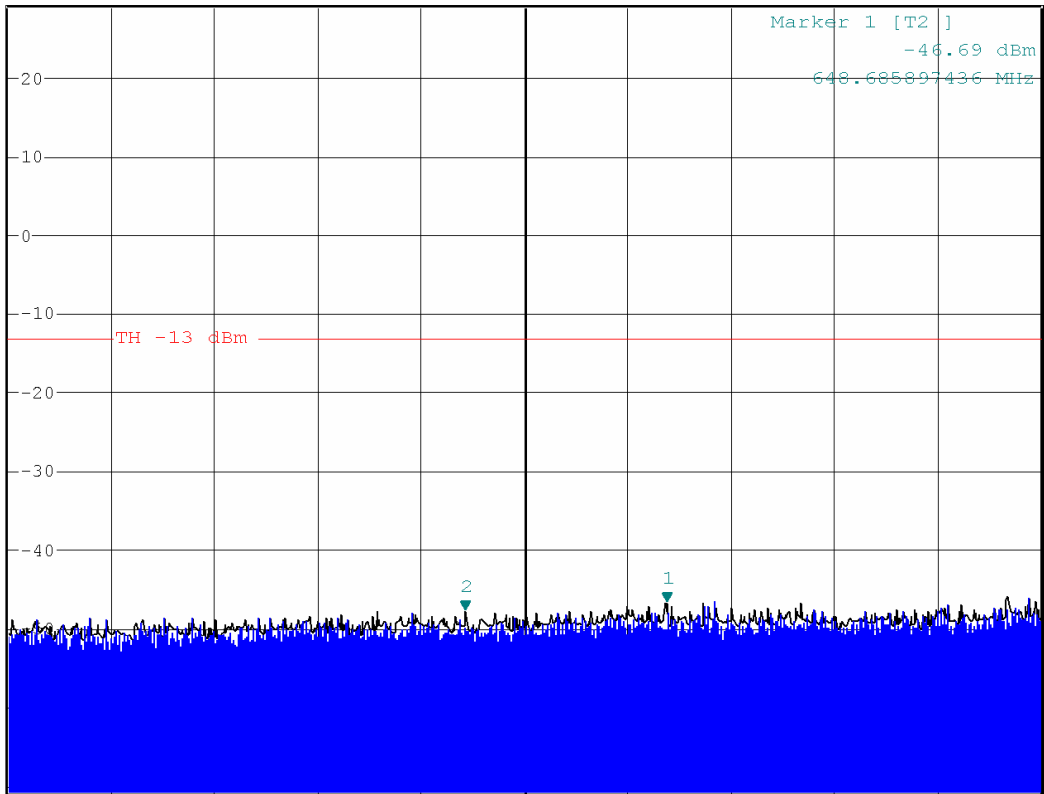

Start 30 MHz

97 MHz/

Stop 1 GHz

Date: 25.SEP.2008 14:59:47


Test Mode: PCS 1900 CH 512 Frequency Range: 1G-6G



25.Sep 08 15:08  
 Ref 30 dBm \*Att 25 dB \*RBW 1 MHz \*VBW 3 MHz SWT 65 ms  
 Marker 2 [T2] -28.65 dBm  
 3.702443910 GHz

1 AP  
 CLRWR

2 PK  
 MAXH

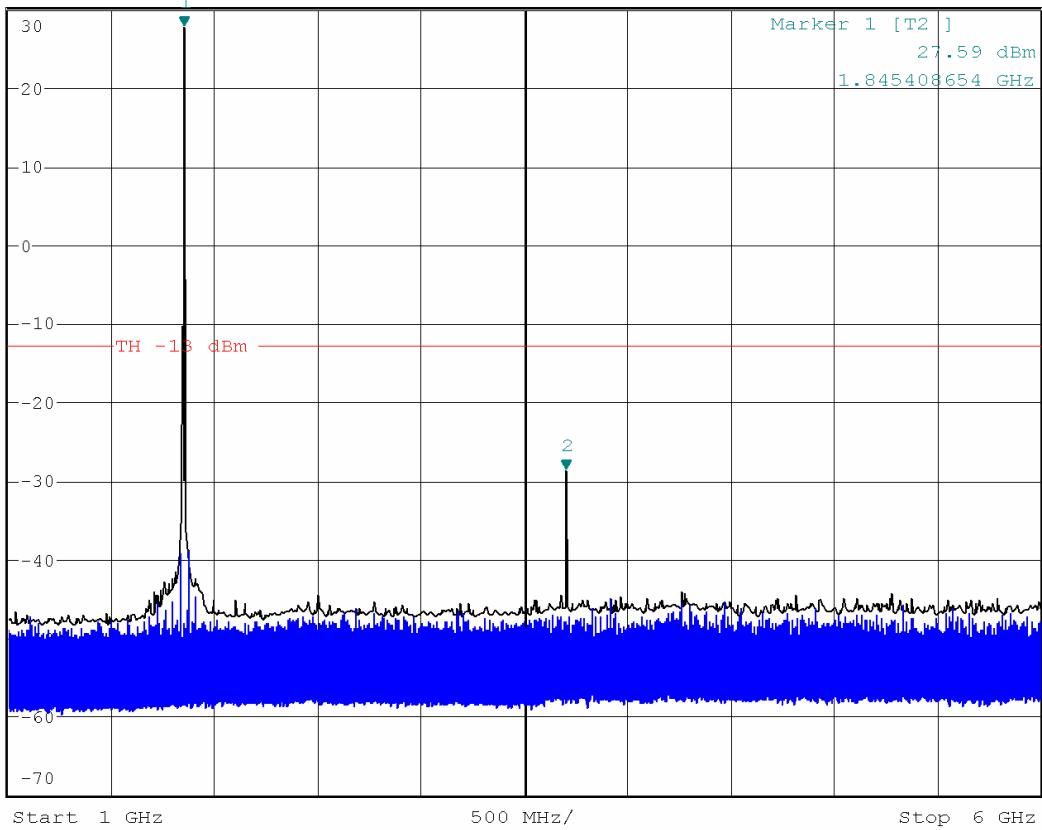

Date: 25.SEP.2008 15:08:08

Note: The signal beyond the limit is carrier

Test Mode: PCS 1900 CH 512 Frequency Range: 6G-20G



25.Sep 08 09:39

Ref 13 dBm

\* Att 10 dB

\* RBW 1 MHz

\* VBW 3 MHz

SWT 85 ms


Marker 3 [T2 ]

-57.55 dBm

10.698717949 GHz

1 AP  
CLRWR

2 PK  
MAXH

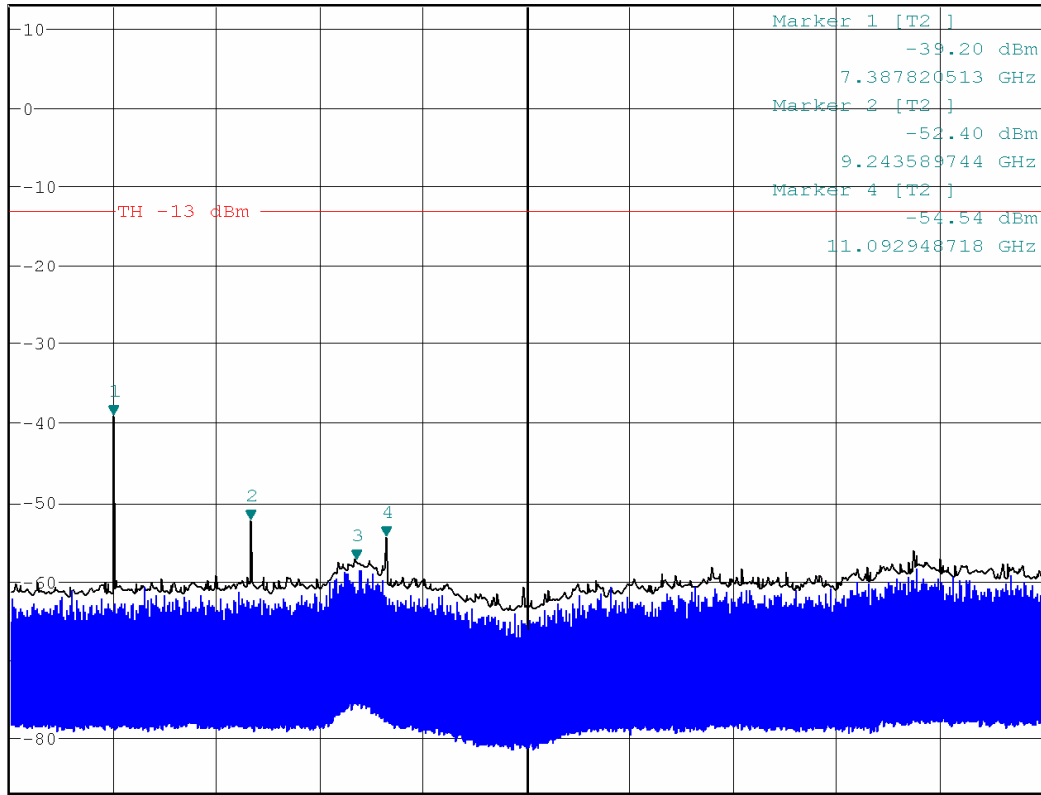

Start 6 GHz

1.4 GHz/

Stop 20 GHz

Date: 25.SEP.2008 09:39:27

Test Mode: PCS 1900 CH 661 Frequency Range: 30M-1G



25.Sep 08 15:01

\*RBW 10 kHz

Marker 1 [T2 ]

\*VBW 30 kHz

-46.28 dBm

Ref 29 dBm


\*Att 55 dB

SWT 9.8 s

634.695512821 MHz

1 AP  
CLRWR

2 PK  
MAXH

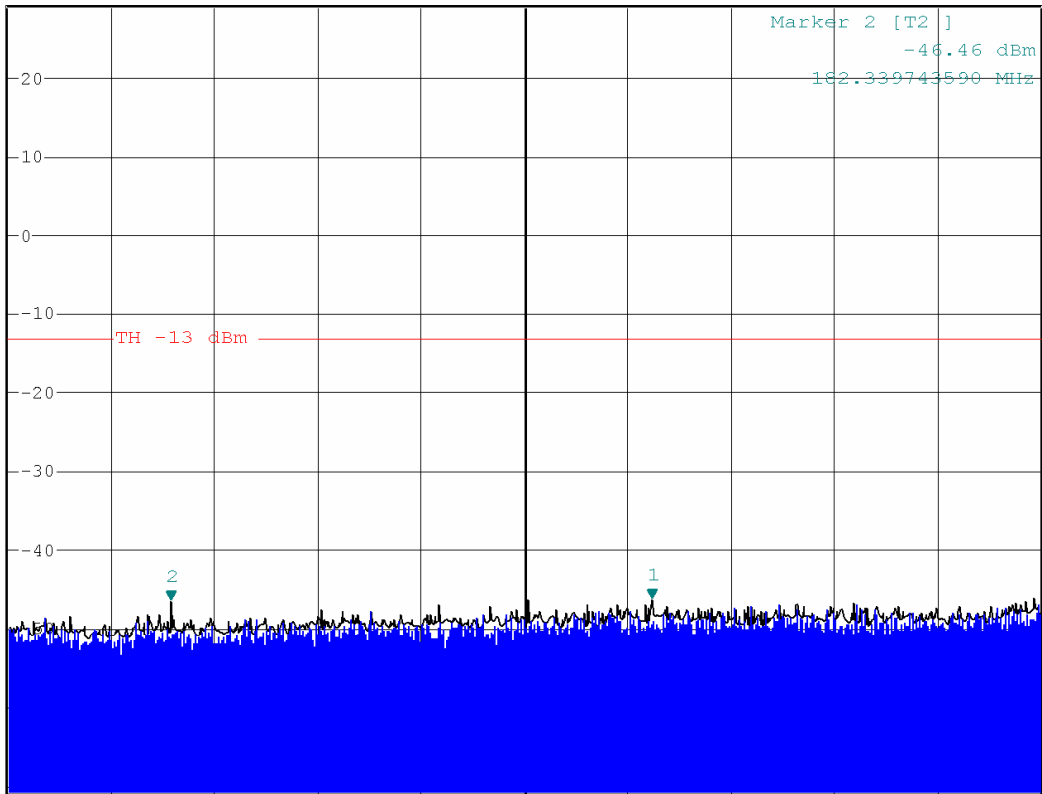

Start 30 MHz

97 MHz/

Stop 1 GHz

Date: 25.SEP.2008 15:01:32


Test Mode: PCS 1900 CH 661 Frequency Range: 1G-6G



25.Sep 08 15:09  
 Ref 30 dBm \*Att 25 dB \*RBW 1 MHz \*VBW 3 MHz SWT 65 ms  
 Marker 2 [T2] -30.61 dBm  
 3.766546474 GHz

1 AP  
 CLRWR

2 PK  
 MAXH

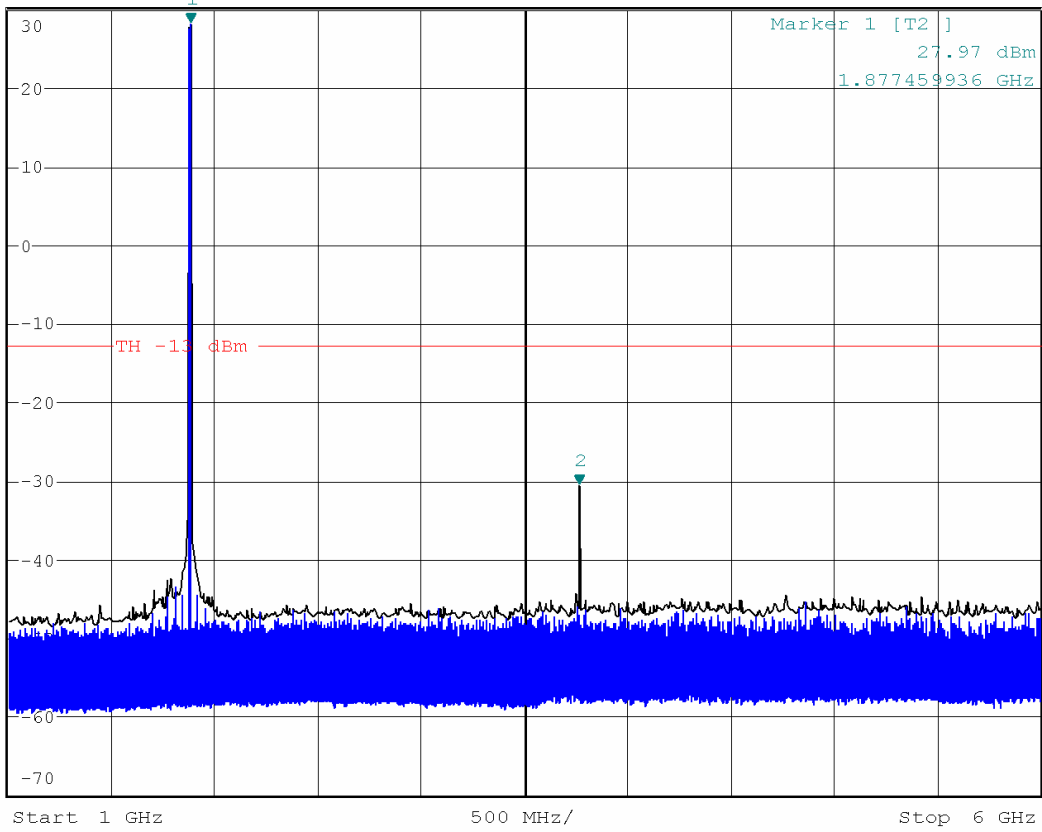

Date: 25.SEP.2008 15:09:19

Note: The signal beyond the limit is carrier

Test Mode: PCS 1900 CH 661 Frequency Range: 6G-20G



25.Sep 08 09:40

Ref 13 dBm

\* Att 10 dB

\* RBW 1 MHz

\* VBW 3 MHz

SWT 85 ms


Marker 4 [T2 ]

-53.65 dBm

11.272435897 GHz

1 AP  
CLRWR

2 PK  
MAXH

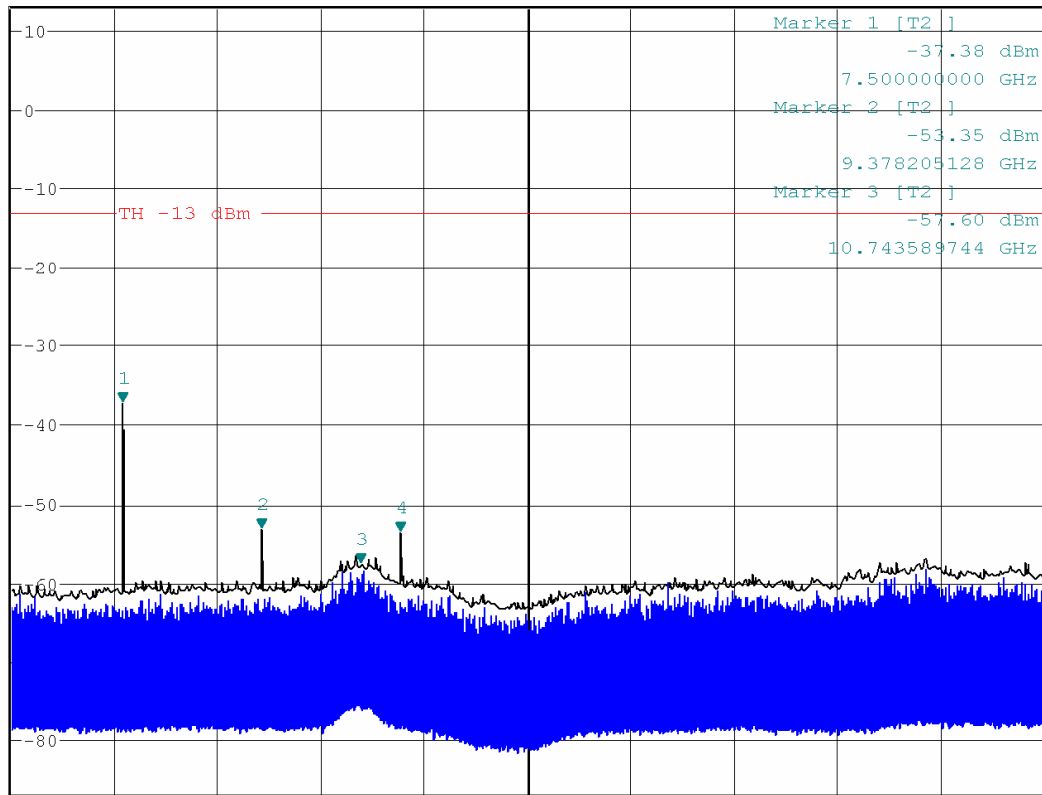

Start 6 GHz

1.4 GHz/

Stop 20 GHz

Date: 25.SEP.2008 09:40:31

Test Mode: PCS 1900 CH 810 Frequency Range: 30M-1G



25.Sep 08 15:03

\*RBW 10 kHz

Marker 2 [T2 ]

\*VBW 30 kHz

-47.70 dBm

Ref 30 dBm


\*Att 55 dB

SWT 9.8 s

403.076923077 MHz

1 AP  
CLRWR

2 PK  
MAXH

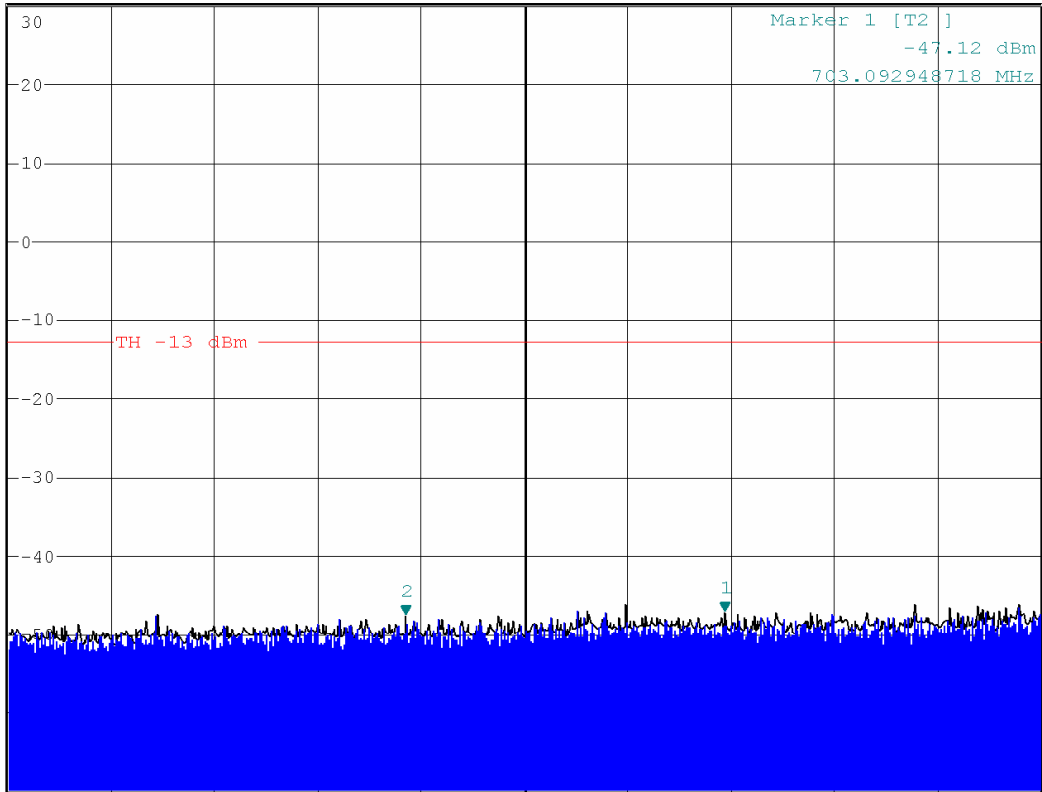

Start 30 MHz

97 MHz/

Stop 1 GHz

A

TDF

PS

3DB  
AC

Date: 25.SEP.2008 15:03:46




Test Mode: PCS 1900 CH 810 Frequency Range: 1G-6G



25.Sep 08 15:10  
 Ref 30 dBm \*Att 25 dB \*RBW 1 MHz \*VBW 3 MHz SWT 65 ms  
 Marker 2 [T2] -34.07 dBm  
 3.820512821 GHz

1 AP  
 CLRWR

2 PK  
 MAXH

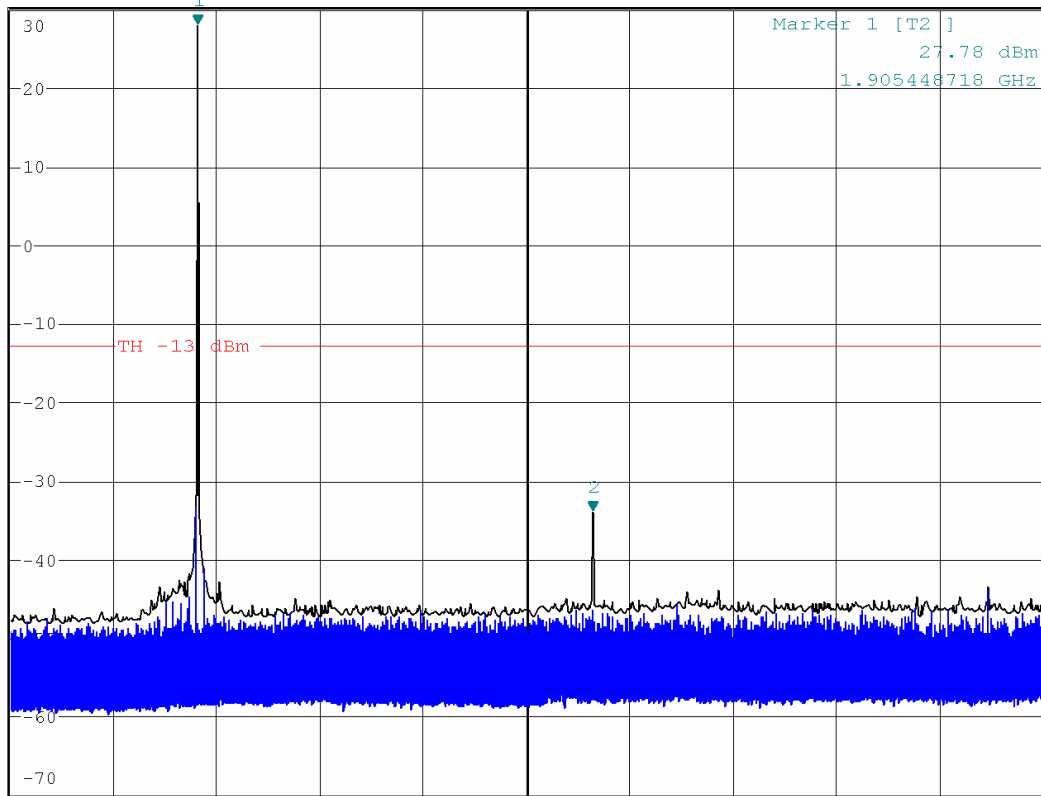

Start 1 GHz 500 MHz/ Stop 6 GHz

Date: 25.SEP.2008 15:10:39

Note: The signal beyond the limit is carrier

Test Mode: PCS 1900 CH 810 Frequency Range: 6G-20G



25.Sep 08 09:41

Ref 15 dBm

\* Att 10 dB

\* RBW 1 MHz

\* VBW 3 MHz

SWT 85 ms


Marker 3 [T2 ]

-56.87 dBm

10.689102564 GHz

1 AP  
CLRWR

2 PK  
MAXH

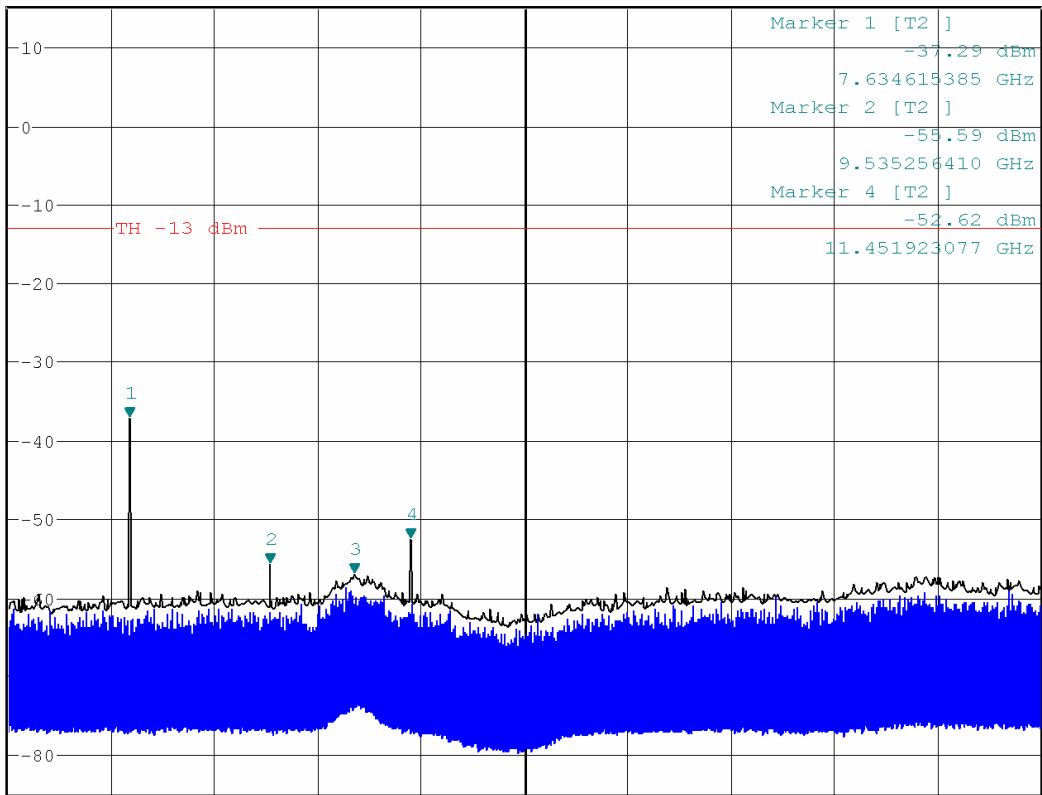

Start 6 GHz

1.4 GHz/

Stop 20 GHz

Date: 25.SEP.2008 09:41:55


## 7. Field Strength of Spurious Radiation

### 7.1. Test Equipment

Item	Instrument	Manufacturer	Type No/Serial No.	Last Calibration
1	Spectrum Analyzer	R & S	FSU 26/200172	June, 2008
2	Ultra Broadband Antenna	R & S	HL 562/100019	May, 2008
3	VHA 9103 without telescopic rods for use with biconical broad-band elements BBA 9106	SCHWARZBECK	BBA 9106 + VHA 9103/2358	May, 2008
4	Logarithmic Periodic Broadband Antenna	SCHWARZBECK	UHALP 9108 A/ 696	May, 2008
5	Double-Ridged Waveguide Horn Antenna	R & S	HF 906/100023	May, 2008
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D/ 249	May, 2008
7	Universal Radio Communication Tester	R & S	CMU 200/108591	June, 2008

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

### 7.2. Test Setup

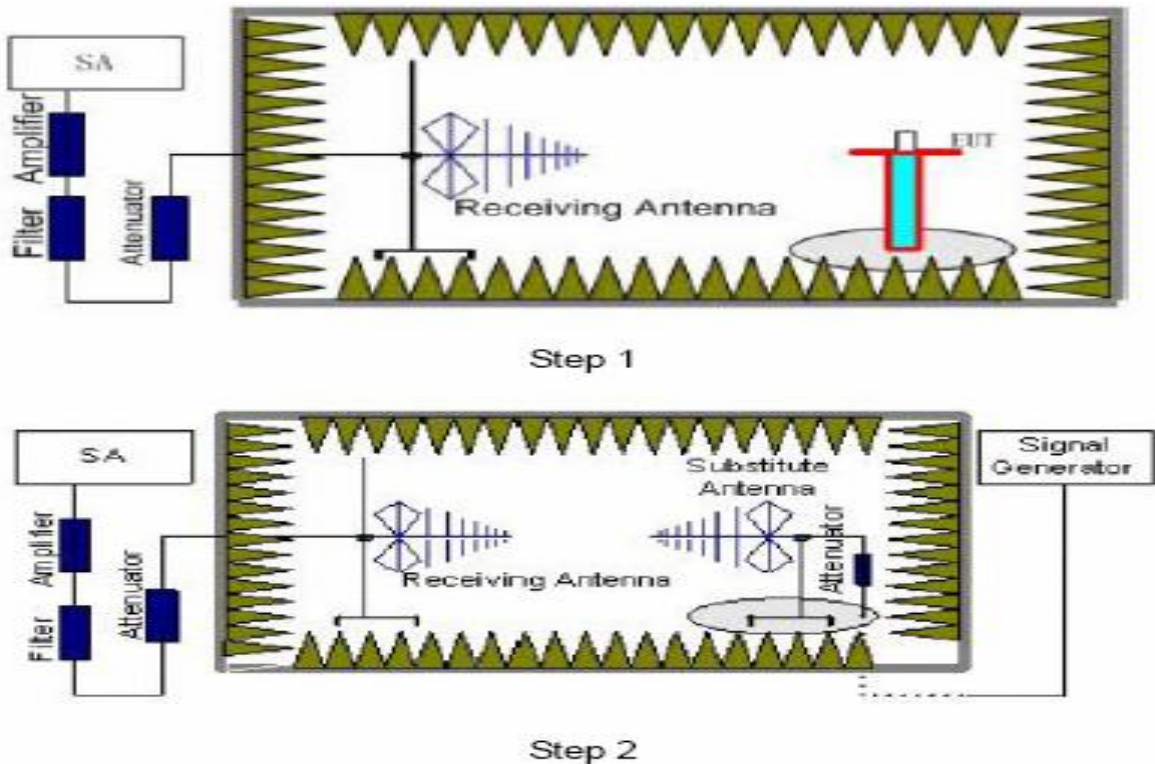

### 7.3. Limits

Limits	<-13dBm
--------	---------

### 7.4. Test Procedure

Test procedure: Step 1:

EUT was placed on a 1.5 meter high non-conductive table at a 3 meter test distance from the test receive antenna. The height of receiving antenna is 1.5m. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reaching a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz for more than 1GHz and 10KHz for less than 1GHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted until the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

Step 3:

Repeat step 1 and step 2 for receiving antenna the other polarization.

Step 4:

Repeat step 1, step 2 and step 3 for EUT the other two orientations.

### 7.5. Test Specification

CF 47 FCC Part 2.1051, Part 2.1053, Part 22.917, Part 24.238

### 7.6. EUT Operation

See chapter 1.2 of this test report.

## 7.7. Test Result

### 7.7.1 GSM 850

Axis	polarization	Frequency (GHz)	SG level (dBm)	Cable loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Result
X	H	1.6728	-43.85	1.64	7.41	-38.08	-13	pass
		2.5096	-54.01	2.47	8.47	-48.01	-13	pass
		3.3480	-51.24	3.30	10.12	-44.42	-13	pass
		4.1820	-50.17	4.11	10.59	-43.69	-13	pass
		6.6900	-47.92	6.65	10.22	-44.35	-13	pass
		7.5240	-41.16	7.44	9.49	-39.11	-13	pass
		8.3640	-45.21	8.31	9.54	-43.98	-13	pass
	V	1.6728	-45.73	1.67	7.41	-39.99	-13	pass
		2.5096	-52.76	2.41	8.47	-46.70	-13	pass
		3.3480	-55.17	3.33	10.12	-48.38	-13	pass
		4.1820	-48.91	4.15	10.59	-42.47	-13	pass
		5.0160	-55.94	4.91	10.56	-50.29	-13	pass
		6.6900	-49.03	6.63	10.22	-45.44	-13	pass
		7.5240	-42.11	7.44	9.49	-40.06	-13	pass
Y	H	1.6732	-43.96	1.61	7.42	-38.15	-13	pass
		3.3480	-53.13	3.31	10.12	-46.32	-13	pass
		4.1820	-52.15	4.14	10.59	-45.70	-13	pass
		5.0160	-57.09	4.92	10.56	-51.45	-13	pass
		6.6900	-49.13	6.63	10.22	-45.54	-13	pass
		7.5240	-39.75	7.44	9.49	-37.70	-13	pass
		9.7200	-45.32	9.63	9.98	-44.97	-13	pass
		11.1660	-43.72	11.12	9.52	-45.32	-13	pass
	V	1.6728	-45.66	1.62	7.41	-39.87	-13	pass
		2.5092	-54.61	2.47	8.47	-48.61	-13	pass
		3.3480	-53.13	3.31	10.12	-46.32	-13	pass
		4.1820	-52.16	4.13	10.59	-45.70	-13	pass
		5.0160	-57.02	4.99	10.56	-51.45	-13	pass
		6.6900	-49.10	6.66	10.22	-45.54	-13	pass
		7.5240	-39.70	7.49	9.49	-37.70	-13	pass
		9.7200	-45.26	9.69	9.98	-44.97	-13	pass

## 7.7.1 GSM 850(Continued)

Z	H	1.6732	-44.60	1.62	7.42	-38.80	-13	pass
		1.7132	-49.38	1.67	7.62	-43.43	-13	pass
		3.3480	-54.53	3.33	10.12	-47.74	-13	pass
		4.1820	-52.11	4.15	10.59	-45.67	-13	pass
		5.0160	-57.73	4.97	10.56	-52.14	-13	pass
		6.6900	-46.78	6.63	10.22	-43.19	-13	pass
		7.5240	-39.01	7.47	9.49	-36.99	-13	pass
		8.3640	-46.14	8.33	9.54	-44.93	-13	pass
	V	1.6732	-43.53	1.63	7.42	-37.74	-13	pass
		2.5096	-53.16	2.46	8.47	-47.15	-13	pass
		3.3480	-53.49	3.32	10.12	-46.69	-13	pass
		4.1820	-51.70	4.15	10.59	-45.26	-13	pass
		5.0160	-54.88	4.98	10.56	-49.30	-13	pass
		5.8920	-55.20	5.85	11.17	-49.88	-13	pass
		6.6900	-49.32	6.66	10.22	-45.76	-13	pass
7.5240	-38.87	7.49	9.49	-36.87	-13	pass		

## 7.7.2 PCS 1900

Axis	polarization	Frequency (GHz)	SG level (dBm)	Cable loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Result
X	H	3.7620	-56.05	3.72	12.65	-47.12	-13	pass
		7.5180	-40.09	7.48	11.64	-35.93	-13	pass
		9.4020	-48.09	9.36	12.16	-45.29	-13	pass
		11.2860	-44.26	11.25	11.86	-43.65	-13	pass
		15.0180	-40.88	14.97	12.78	-43.07	-13	pass
	V	3.7620	-58.79	3.70	12.65	-49.84	-13	pass
		5.6400	-57.12	5.60	13.15	-49.57	-13	pass
		7.5180	-40.91	7.47	11.64	-36.74	-13	pass
		9.4020	-45.20	9.34	12.16	-42.38	-13	pass
		11.2860	-43.11	11.25	11.86	-42.50	-13	pass
Y	H	13.0140	-44.35	12.98	13.68	-43.65	-13	pass
		3.7620	-58.11	3.73	12.65	-49.19	-13	pass
		7.5180	-40.05	7.49	11.64	-35.90	-13	pass
		9.4020	-44.56	9.37	12.16	-41.77	-13	pass
		11.2860	-43.28	11.26	11.86	-42.68	-13	pass
		12.8460	-44.86	12.82	13.59	-44.09	-13	pass
	V	14.1480	-40.89	14.11	12.27	-42.73	-13	pass
		3.7620	-52.94	3.72	12.65	-44.01	-13	pass
		7.5180	-38.93	7.47	11.64	-34.76	-13	pass
		9.5460	-47.81	9.51	12.15	-45.17	-13	pass
		11.2860	-44.18	11.24	11.86	-43.56	-13	pass
Z	H	13.6200	-42.24	13.58	12.77	-43.05	-13	pass
		15.0240	-41.85	14.97	12.81	-44.01	-13	pass
		3.7620	-56.23	3.71	12.65	-47.29	-13	pass
		5.6400	-58.19	5.60	13.15	-50.64	-13	pass
		7.5180	-38.35	7.47	11.64	-34.18	-13	pass
		9.4020	-46.77	9.36	12.16	-43.97	-13	pass
	V	11.2860	-43.72	11.25	11.86	-43.11	-13	pass
		13.0140	-44.71	12.97	13.68	-44.00	-13	pass
		3.7620	-54.43	3.72	12.65	-45.50	-13	pass
		5.6400	-57.33	5.60	13.15	-49.78	-13	pass
		7.5180	-38.97	7.48	11.64	-34.81	-13	pass
		9.4020	-44.50	9.38	12.16	-41.72	-13	pass
11.2860	-42.40	11.26	11.86	-41.80	-13	pass		
13.1280	-44.19	13.10	13.51	-43.78	-13	pass		


## 8. Frequency Stability vs. Temperature and voltage variations

### 8.1. Test Equipment

Item	Instrument	Manufacturer	Type No/Serial No.	Last Calibration
1	Spectrum Analyzer	R & S	FSU 26/200172	June, 2008
2	Universal Radio Communication Tester	R & S	CMU 200/108591	June, 2008
3	Power Splitter	Agilent	11667A/54400	June, 2008
4	Climatic Chamber	WEISS	DU/20/40/5822601734 0050	June, 2008
5	DC Power Supply	SAKO	SK1730SL20A/04030 16	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

### 8.2. Test Setup

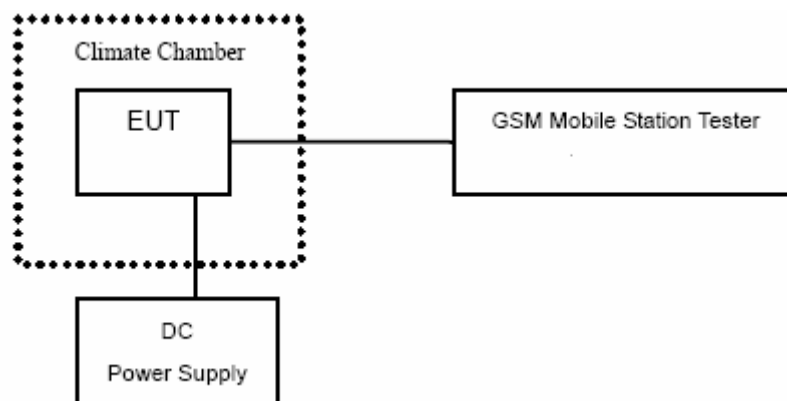

### 8.3. Limits

According to part 22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

### 8.4. Test Procedure

Step 1: Frequency Stability vs. Temperature variations

The EUT and test equipment were set up as shown on the following section. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was note within one minute. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute. The temperature tests were performed for the worst case.



Step 2: Frequency Stability vs. voltage variations

The EUT was placed in a temperature chamber at  $25\pm 5$  °C and connected as the following section. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT. The variation in frequency was measured for the worst case.

### 8.5. EUT Operation

See chapter 1.2 of this test report.

### 8.6. Test Specification

CF 47 FCC Part 2.1055, 22.355, 24.235

### 8.7. Test Result

#### GSM 850

Temperature (° C)	Test Result (ppm)		
	Channel 128	Channel 189	Channel 251
-30	0.018	0.042	0.009
-20	0.018	0.020	0.007
-10	0.012	0.018	0.012
0	-0.005	0.019	0.007
10	0.029	0.025	0.009
20	0.001	0.007	0.011
30	0.012	0.017	0.007
40	-0.001	0.019	0.016
50	0.004	0.030	0.034

Voltage (V)	Test Result (ppm)		
	Channel 128	Channel 128	Channel 128
3.3	0.024	0.033	0.022
4.2	0.002	0.011	-0.004



**PCS 1900**

Temperature (° C)	Test Result (ppm)		
	Channel 512	Channel 661	Channel 810
-30	-0.042	-0.027	-0.039
-20	-0.028	-0.048	-0.030
-10	-0.054	-0.056	-0.033
0	-0.011	-0.012	-0.017
10	-0.040	-0.024	-0.035
20	-0.016	-0.046	-0.032
30	-0.030	-0.021	-0.021
40	-0.012	-0.012	-0.024
50	-0.016	-0.015	-0.014

Voltage (V)	Test Result (ppm)		
	Channel 512	Channel 661	Channel 810
3.3	-0.036	-0.021	-0.027
4.2	-0.054	-0.036	-0.034

9. Test Setup Photo

9.1 ERP/EIRP & Spurious Radiation Test Setup Photo

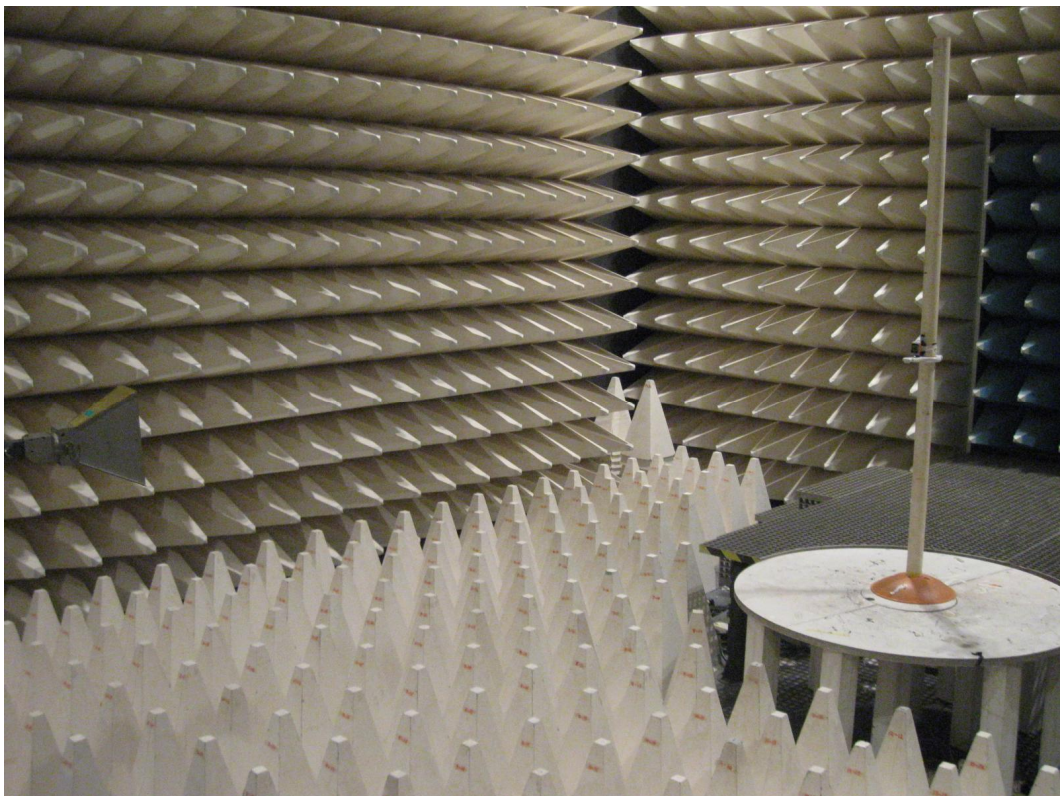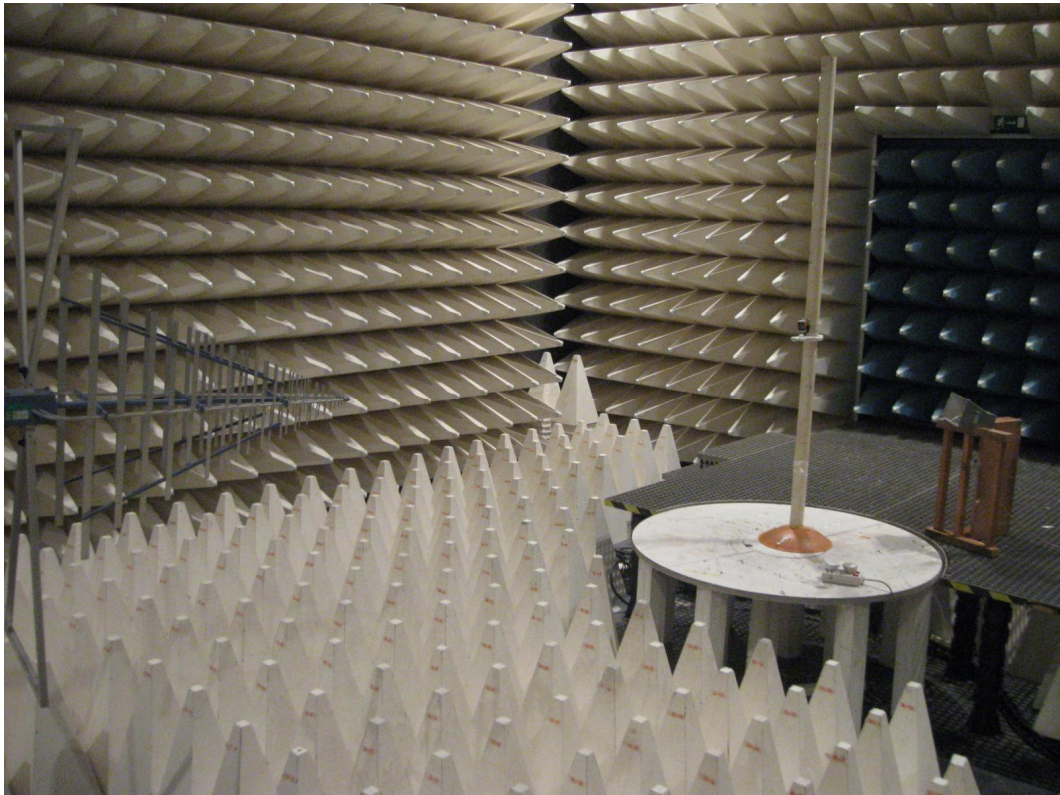



9.2 EUT Axis of Setup Photo

X Axis



Y Axis




Z Axis





### 10 External Photo

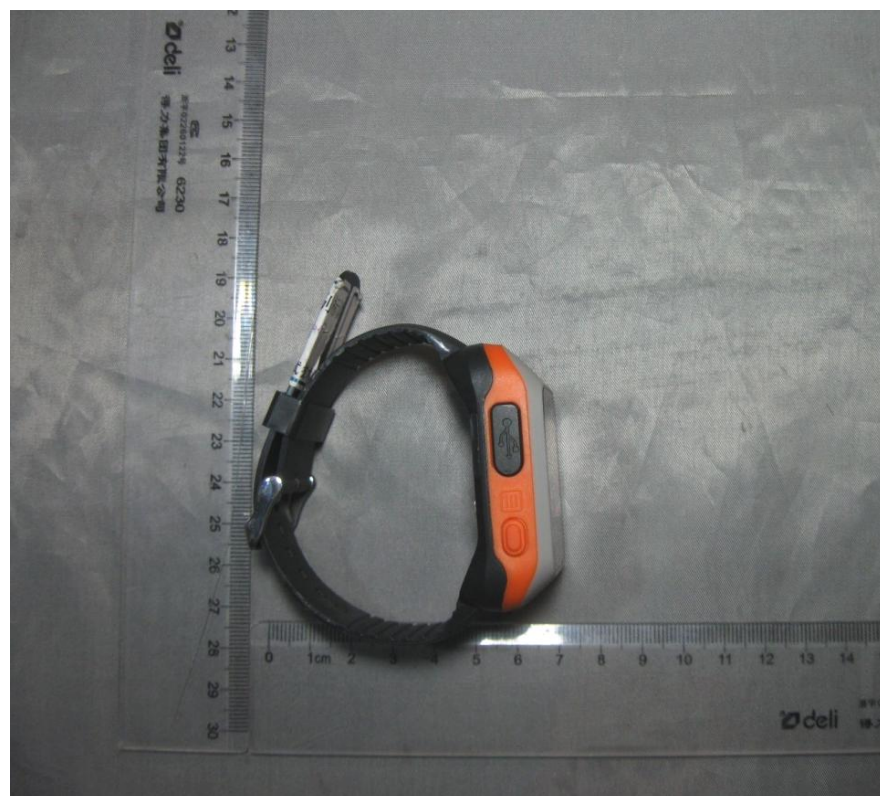

### 11 Internal Photo

