



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

**For**

**Wireless Module**

**Model: BCM43225**

**Trade Name: CastleNet**

*Issued to*

**CastleNet Technology Inc.  
No.64, Chung-Shan Rd. Tu-Cheng City,  
Taipei Hsien, Taiwan 236**

*Issued by*

**Compliance Certification Services Inc.  
No.11, Wu-Gong 6th Rd., Wugu Industrial Park,  
New Taipei City 248, Taiwan (R.O.C.)**

**<http://www.ccsrf.com>**

**[service@ccsrf.com](mailto:service@ccsrf.com)**

**Issued Date: September 21, 2011**



Testing Laboratory  
1309

---

*Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	September 21, 2011	Initial Issue	ALL	Jessica Ho



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
3.1 EUT CONFIGURATION .....	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES .....	8
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>9</b>
4.1 MEASURING INSTRUMENT CALIBRATION .....	9
4.2 MEASUREMENT EQUIPMENT USED .....	9
4.3 MEASUREMENT UNCERTAINTY .....	10
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>11</b>
5.1 FACILITIES .....	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>13</b>
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT .....	13
<b>7. FCC PART 15.247 REQUIREMENTS.....</b>	<b>14</b>
7.1 6DB BANDWIDTH.....	14
7.2 PEAK POWER.....	34
7.3 AVERAGE POWER .....	36
7.4 BAND EDGES MEASUREMENT .....	38
7.5 PEAK POWER SPECTRAL DENSITY.....	71
7.6 RADIATED EMISSIONS .....	91
7.7 POWERLINE CONDUCTED EMISSIONS.....	120
<b>APPENDIX I RADIO FREQUENCY EXPOSURE .....</b>	<b>123</b>
<b>APPENDIX II PHOTOGRAPHS OF TEST SETUP .....</b>	<b>126</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	



## 1. TEST RESULT CERTIFICATION

**Applicant:** CastleNet Technology Inc.  
No.64, Chung-Shan Rd. Tu-Cheng City,  
Taipei Hsien, Taiwan 236

**Equipment Under Test:** Wireless Module

**Trade Name:** CastleNet

**Model:** BCM43225

**Date of Test:** August 31 ~ September 16, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

*Approved by:*

---

Rex Lai  
Section Manager  
Compliance Certification Services Inc.

*Reviewed by:*

---

Gina Lo  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Wireless Module
<b>Trade Name</b>	CastleNet
<b>Model Number</b>	BCM43225
<b>Model Discrepancy</b>	N/A
<b>Received Date</b>	August 25, 2011
<b>Power Adapter</b>	Powered by host device
<b>Frequency Range</b>	2412 ~ 2462 MHz
<b>Transmit Power</b>	IEEE 802.11b mode: 21.47 dBm IEEE 802.11g mode: 25.64 dBm IEEE 802.11n HT 20 MHz mode: 27.19 dBm IEEE 802.11n HT 40 MHz mode: 25.54 dBm
<b>Modulation Technique</b>	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 13, 19.5, 26, 39, 52, 58.5, 65.0Mbps) IEEE 802.11n HT 40 MHz mode: OFDM (13.5, 27, 40.5, 54, 81, 108, 121.5, 135Mbps)
<b>Number of Channels</b>	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels IEEE 802.11n HT 40 MHz mode: 7 Channels
<b>Antenna Specification Worst Test</b>	1. PIFA Antenna / Gain: 2 dBi MIMO: $2 \text{ dBi} + 10 \log(2) = 5.01 \text{ dBi}$ (Numeric gain: 3.16) Model Name: L22-XY30201 / Manufacturer: YONGSHUN 2. Dipole Antenna / Gain: 2.39 dBi MIMO: $2.39 \text{ dBi} + 10 \log(2) = 5.4 \text{ dBi}$ (Numeric gain: 3.46) Model Name: 6602113051-090 / Manufacturer: KINSUN 3. Dipole Antenna / Gain: 2.28 dBi Model Name: 6602113033-150 / Manufacturer: KINSUN 4. Dipole Antenna / Gain: 1.76 dBi Model Name: 6602113093-290 / Manufacturer: KINSUN 5. Dipole Antenna / Gain: 1.76 dBi Model Name: 6602113053-230 / Manufacturer: KINSUN 6. Dipole Antenna / Gain: 1.97 dBi Model Name: 6602103081-000 / Manufacturer: KINSUN 7. Dipole Antenna / Gain: 1.76 dBi Model Name: 6602100053-290 / Manufacturer: KINSUN 8. Dipole Antenna / Gain: 1.76 dBi Model Name: 6602113051-230 / Manufacturer: KINSUN 9. Dipole Antenna / Gain: 1.62 dBi Model Name: 6602113053-300 / Manufacturer: KINSUN

**Remark:**

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **RK9-BCM432252T2R** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### 3.5 DESCRIPTION OF TEST MODES

The EUT (model: BCM43225) comes with two different antennas (PIFA antenna and Dipole antenna) for sale.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

Software used to control the EUT for staying in continuous transmitting mode was programmed.

The worst case data rate is determined as the data rate with highest output power.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

#### **IEEE 802.11b mode:**

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

#### **IEEE 802.11g mode:**

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

#### **IEEE 802.11n HT 20 MHz mode:**

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

#### **IEEE 802.11n HT 40 MHz mode:**

Channel Low (2422MHz), Channel Mid (2442MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.





## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.*

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/17/2012
Power Meter	Anritsu	ML2495A	1012009	04/27/2012
Power Sensor	Anritsu	MA2411B	0917072	04/27/2012

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	11/03/2011
EMI Test Receiver	R&S	ESCI	100064	02/17/2012
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/13/2012
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/19/2011
Bilog Antenna	Sunol Sciences	JB3	A030105	10/06/2011
Bilog Antenna	Sunol Sciences	JB3	A030205	10/06/2011
Horn Antenna	EMCO	3117	00055165	01/12/2012
Horn Antenna	EMCO	3117	00055167	12/06/2011
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/26/2011
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESHS10	843743/015	05/01/2012
LISN	SCHWARZBECK	NSLK 8127	8127-541	12/18/2011
LISN	SCHAFFNER	NNB 41	03/10013	N.C.R.
Test S/W	CCS-3A1-CE			



### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2159
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chungshen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wu-Gong 6th Rd., Wugu Industrial Park, New Taipei City 248, Taiwan (R.O.C.)  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.




Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	HP	dv6-1332TX	CNF9491GLJ	PD9112BNHU	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	Test Kit	N/A	N/A	N/A	N/A	N/A	AC I/P: Unshielded, 1.8m

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6DB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

#### Test Configuration

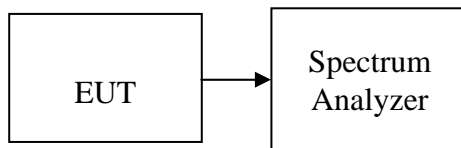

#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted*

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	8.25	>500	PASS
Mid	2442	8.25		PASS
High	2462	8.1666		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.25	>500	PASS
Mid	2442	15.25		PASS
High	2462	16.25		PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / Chain 0**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.25	>500	PASS
Mid	2442	15.25		PASS
High	2462	15.25		PASS

**Test mode: IEEE 802.11n HT 20 MHz mode / Chain 1**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.8333	>500	PASS
Mid	2442	15.8333		PASS
High	2462	16.4167		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / Chain 0**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.8333	>500	PASS
Mid	2442	35.8333		PASS
High	2452	35.8333		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / Chain 1**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.8333	>500	PASS
Mid	2442	36.4167		PASS
High	2452	35.8333		PASS

**Remark:** Total Output Power (w) = Chain 0 (10<sup>(Output Power /10)</sup>/1000)+ Chain 1 (10<sup>(Output Power /10)</sup>/1000)



IEEE 802.11b mode

6dB Bandwidth (CH Low)

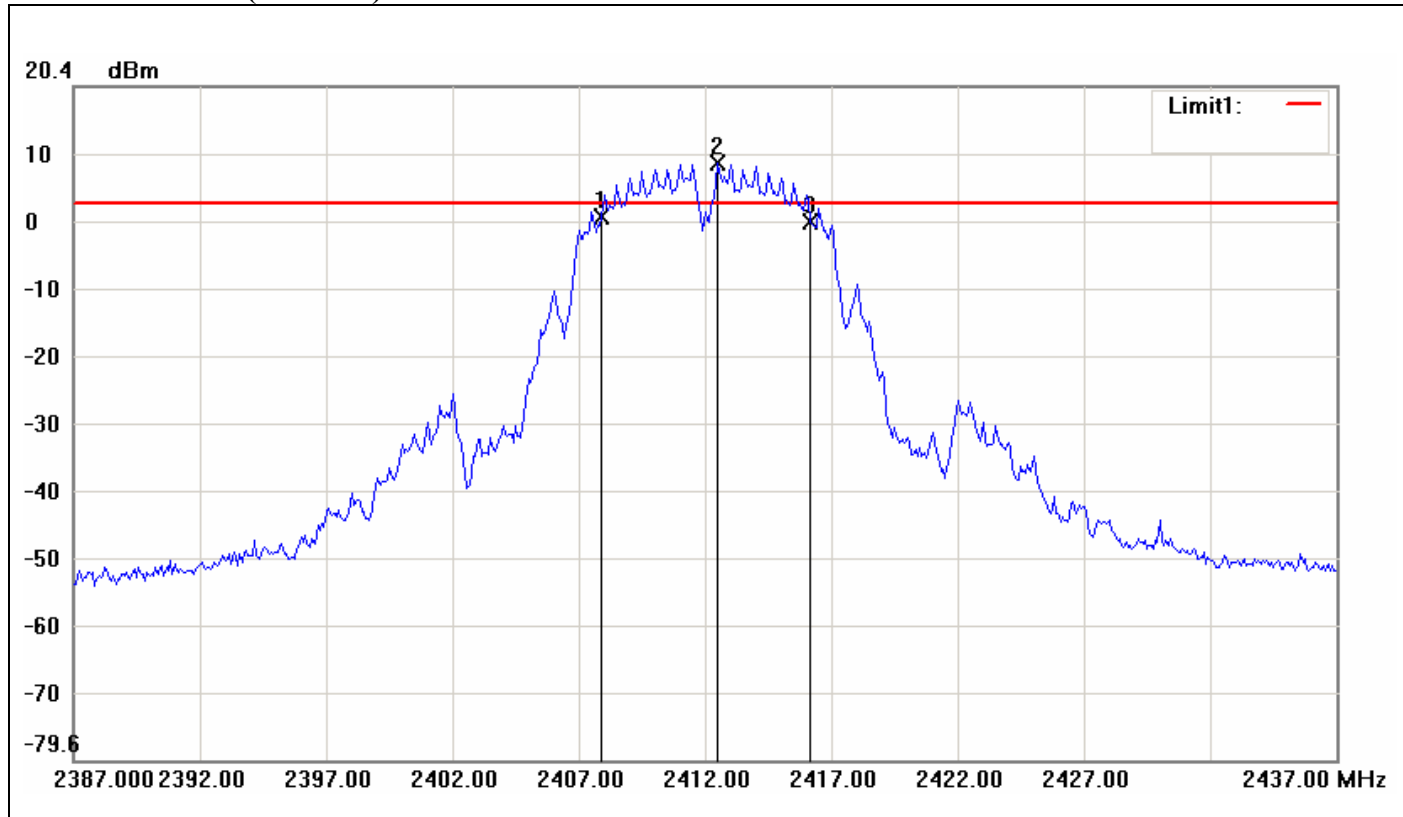


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2407.9167	0.92	2.98	-2.06
2	2412.5000	8.98	2.98	6.00
3	2416.1667	0.33	2.98	-2.65

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	8.25	-0.59





**6dB Bandwidth (CH Mid)**

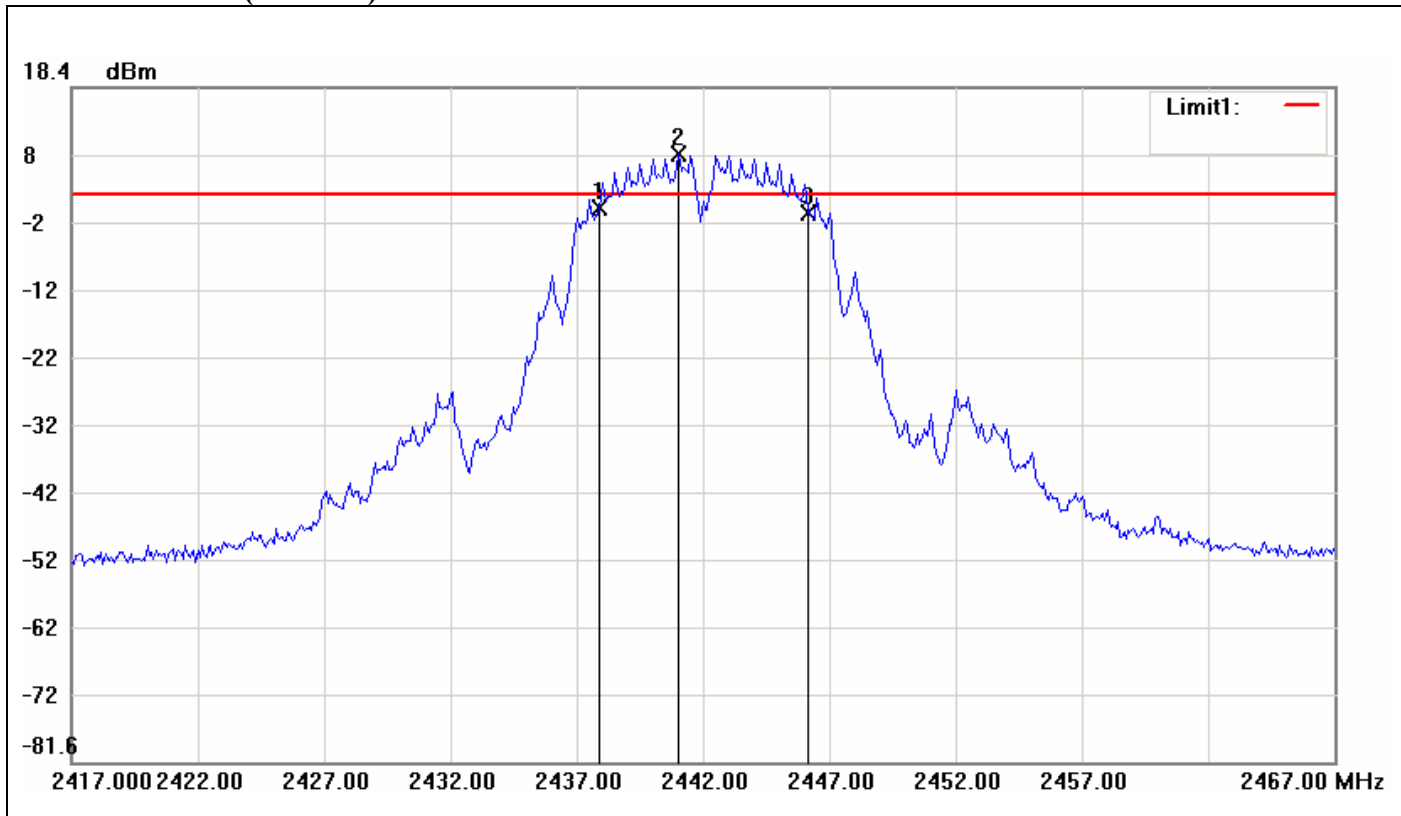


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2442.9167	0.52	2.46	-1.94
2	2441.0000	8.46	2.46	6.00
3	2446.1667	-0.16	2.46	-2.62

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	8.25	-0.68



### 6dB Bandwidth (CH High)

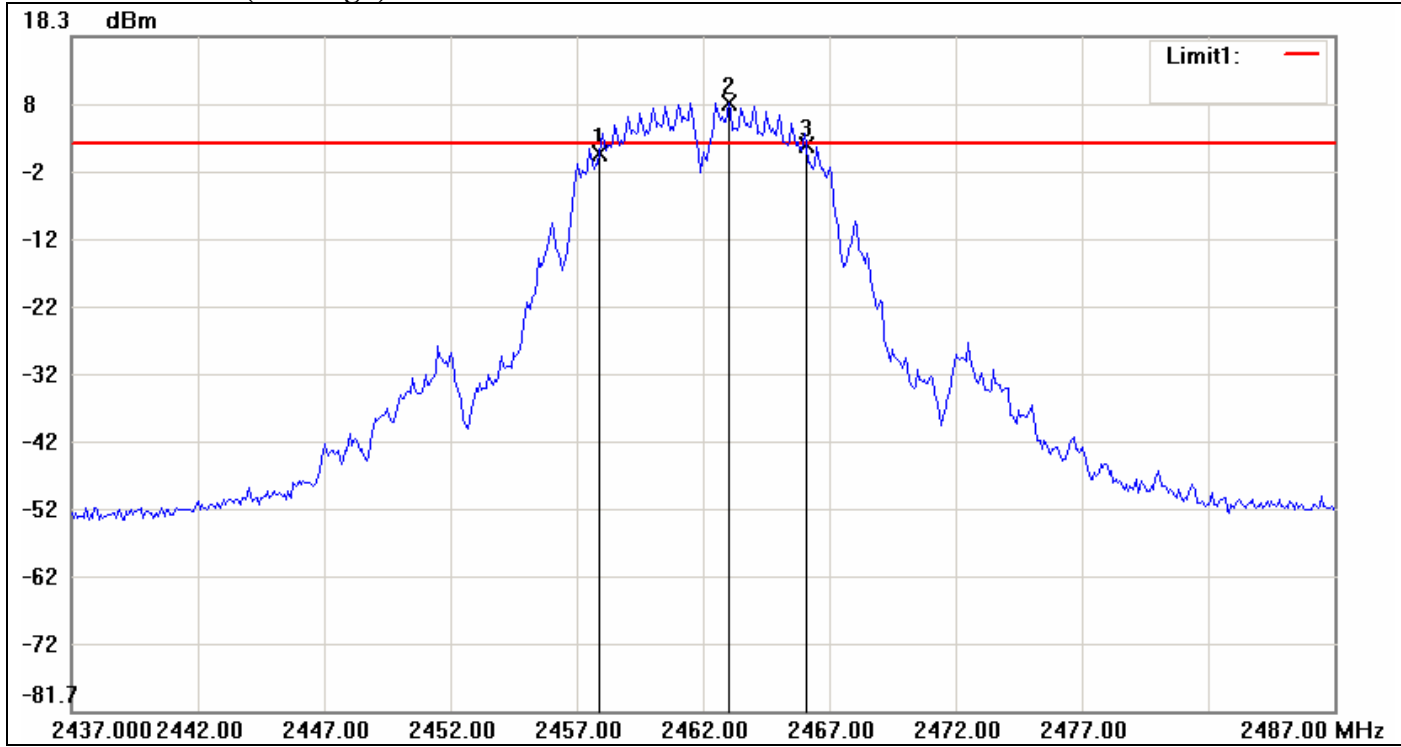


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2457.9167	0.94	2.54	-1.60
2	2463.0000	8.54	2.54	6.00
3	2466.0833	2.26	2.54	-0.28

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	8.1666	1.32



IEEE 802.11g mode

6dB Bandwidth (CH Low)

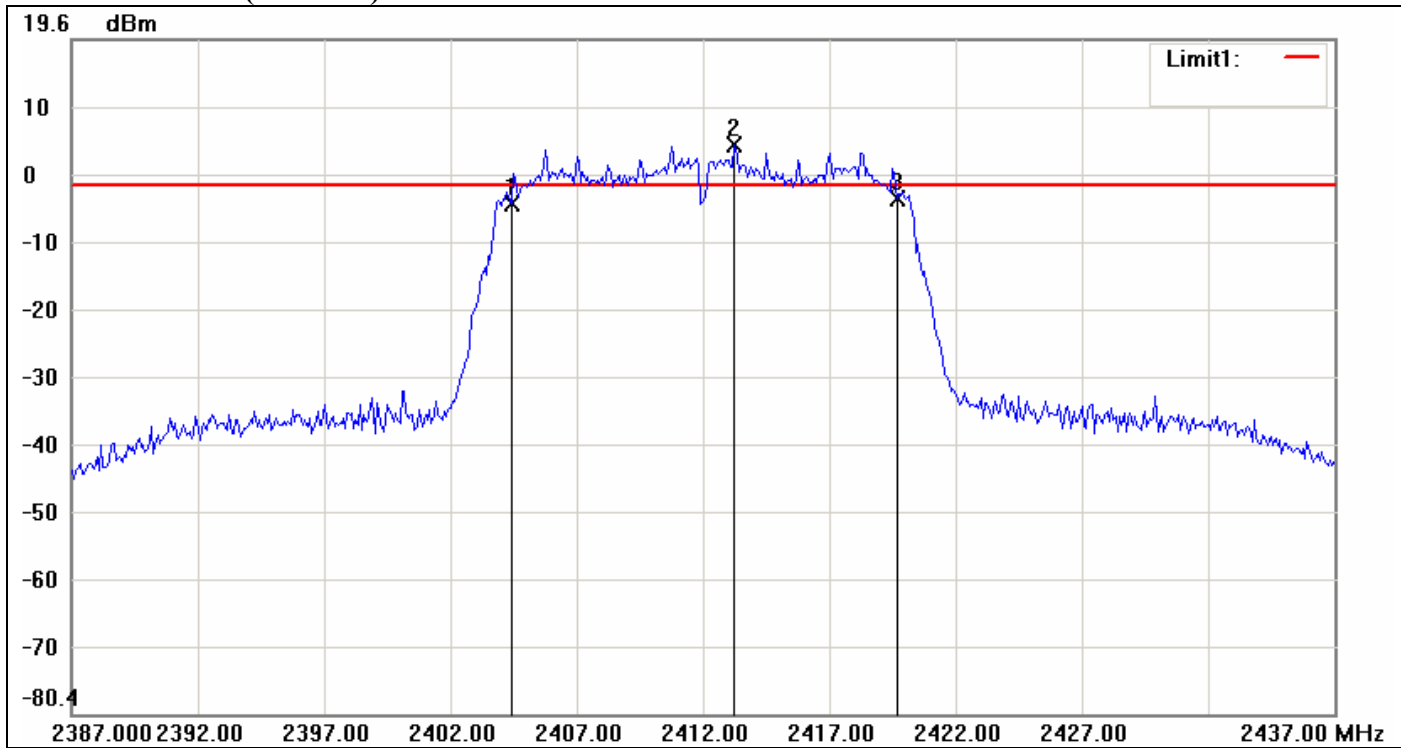


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2404.4167	-4.82	-2.05	-2.77
2	2413.2500	3.95	-2.05	6.00
3	2419.6667	-4.16	-2.05	-2.11

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	15.25	0.66



**6dB Bandwidth (CH Mid)**

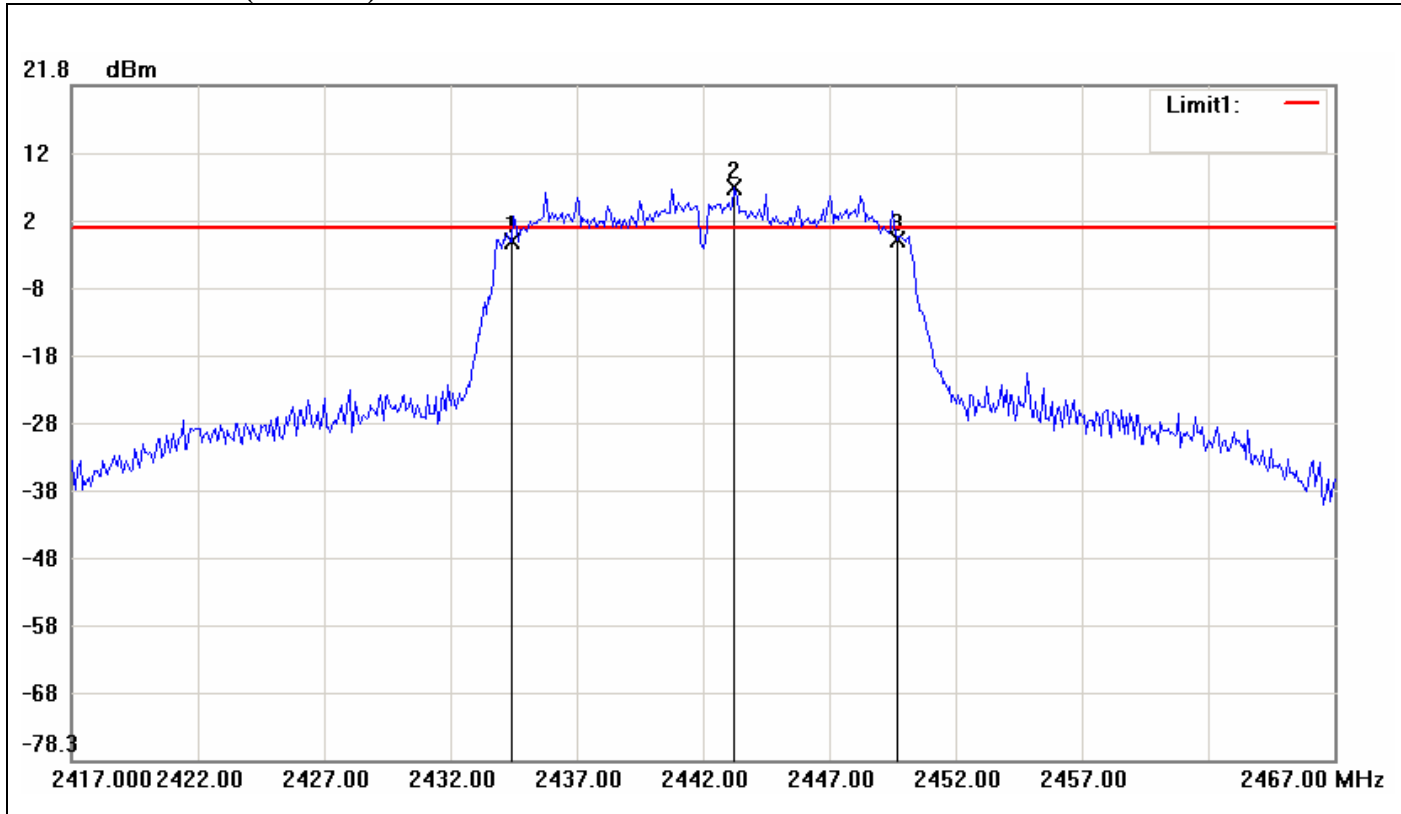


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2434.4167	-1.41	0.66	-2.07
2	2443.2500	6.66	0.66	6.00
3	2449.6667	-1.16	0.66	-1.82

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	15.25	0.25



**6dB Bandwidth (CH High)**

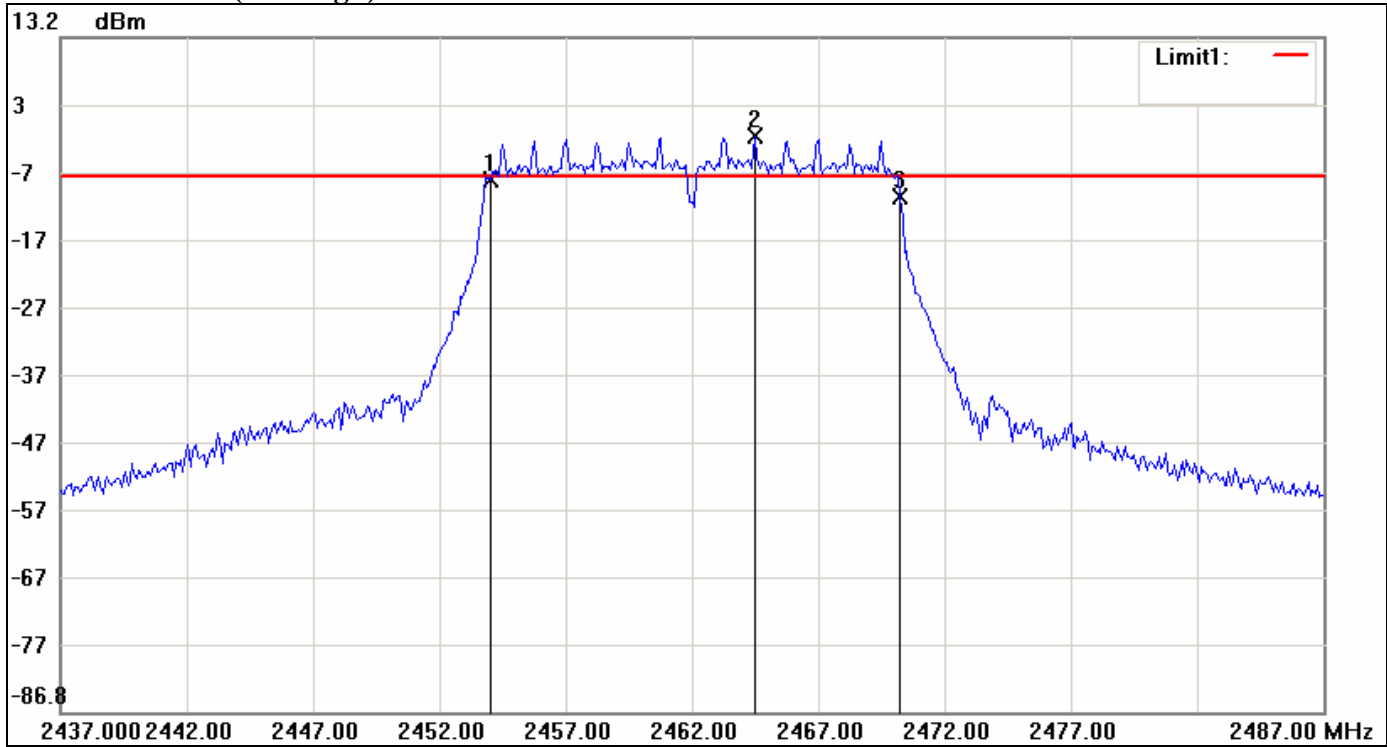


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2454.0000	-8.09	-7.54	-0.55
2	2464.5000	-1.54	-7.54	6.00
3	2470.2500	-10.43	-7.54	-2.89

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	16.25	-2.34



IEEE 802.11n HT 20 MHz mode / Chain 0

6dB Bandwidth (CH Low)

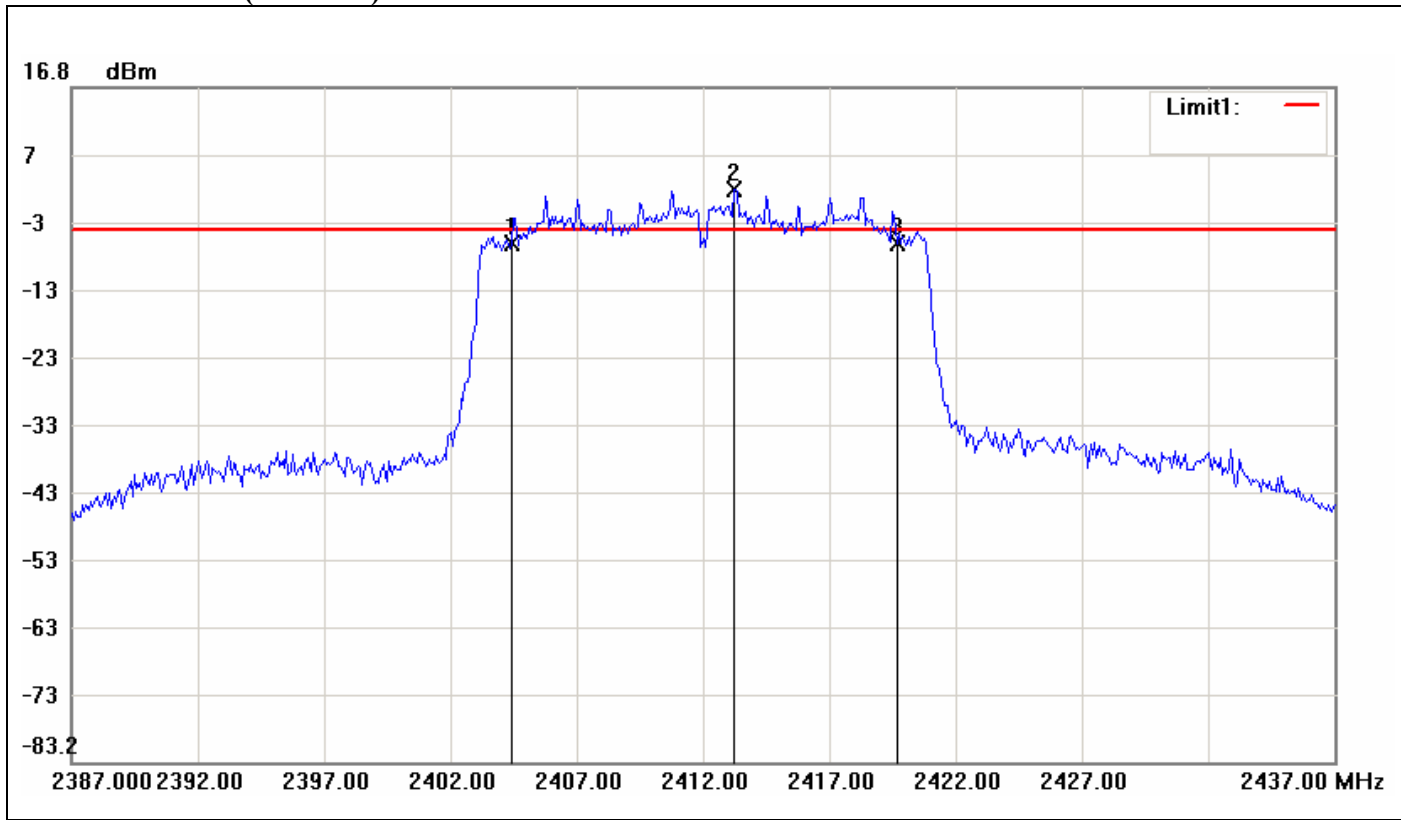


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2404.4167	-6.42	-4.36	-2.06
2	2413.2500	1.64	-4.36	6.00
3	2419.6667	-6.38	-4.36	-2.02

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	15.25	0.04



**6dB Bandwidth (CH Mid)**

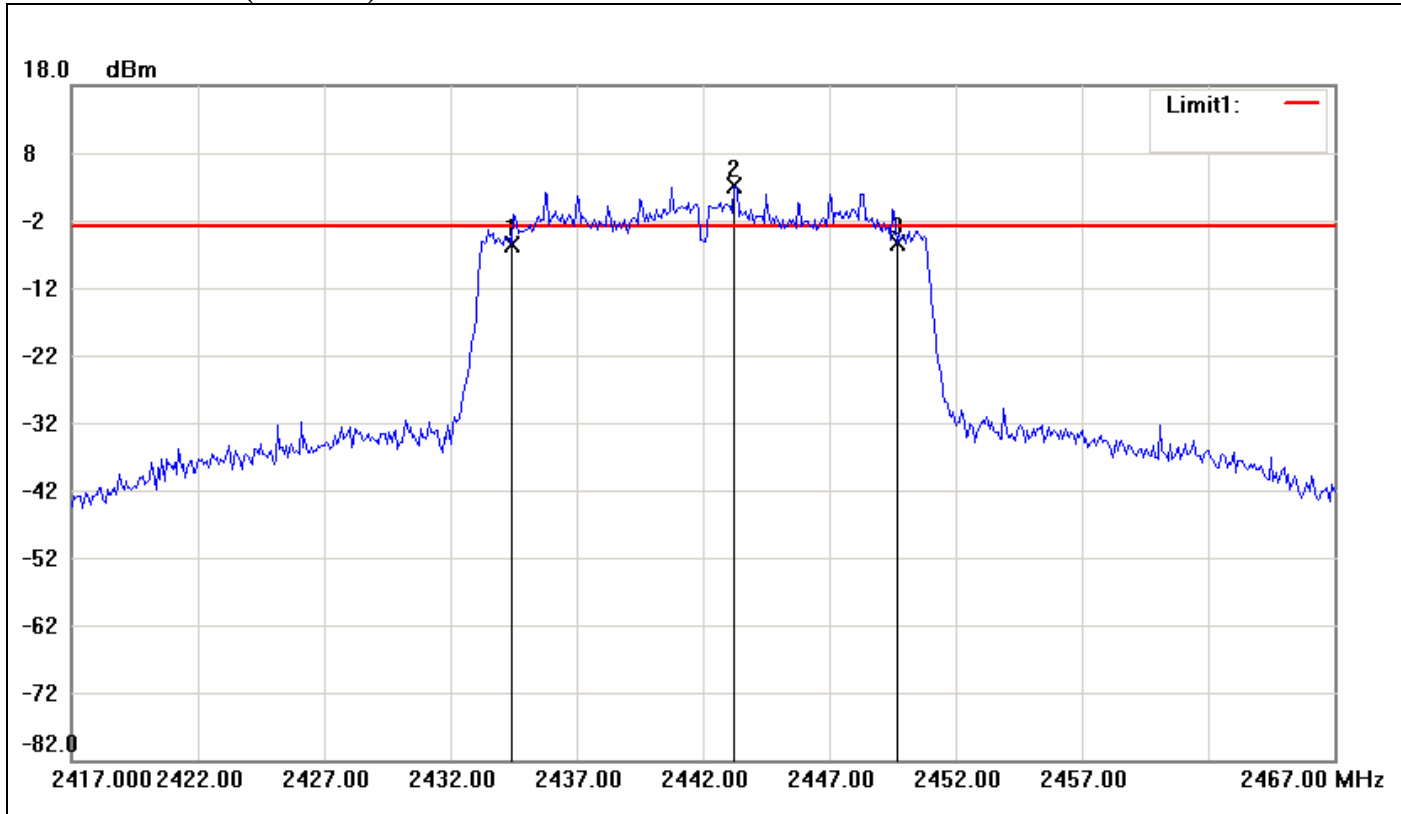


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2434.4167	-5.52	-2.97	-2.55
2	2443.2500	3.03	-2.97	6.00
3	2449.6667	-5.34	-2.97	-2.37

No.	$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	15.25
		0.18



**6dB Bandwidth (CH High)**

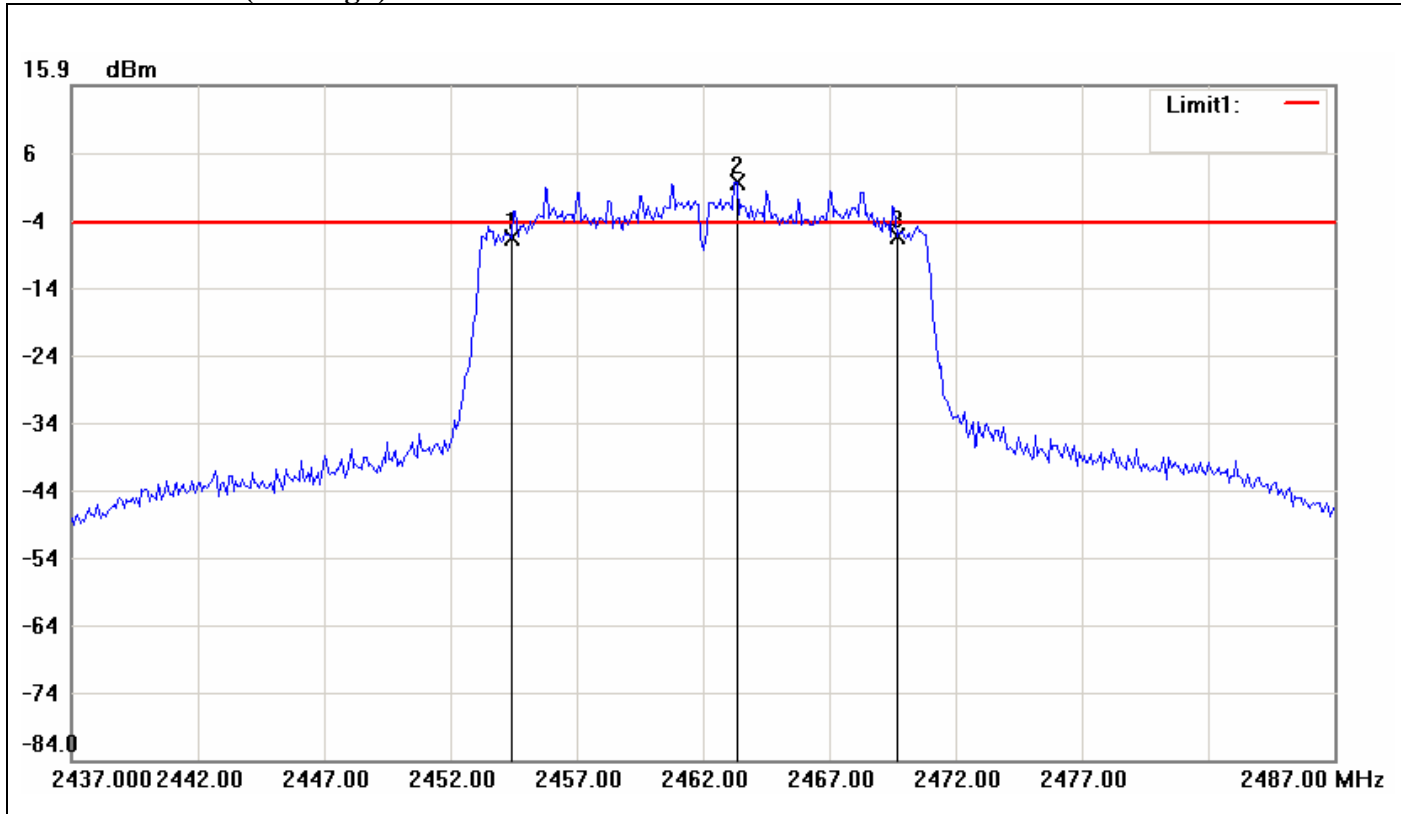

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2454.4167	-6.78	-4.37	-2.41
2	2463.3333	1.63	-4.37	6.00
3	2469.6667	-6.50	-4.37	-2.13


No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	15.25	0.28





### IEEE 802.11n HT 20 MHz mode / Chain 1

#### 6dB Bandwidth (CH Low)

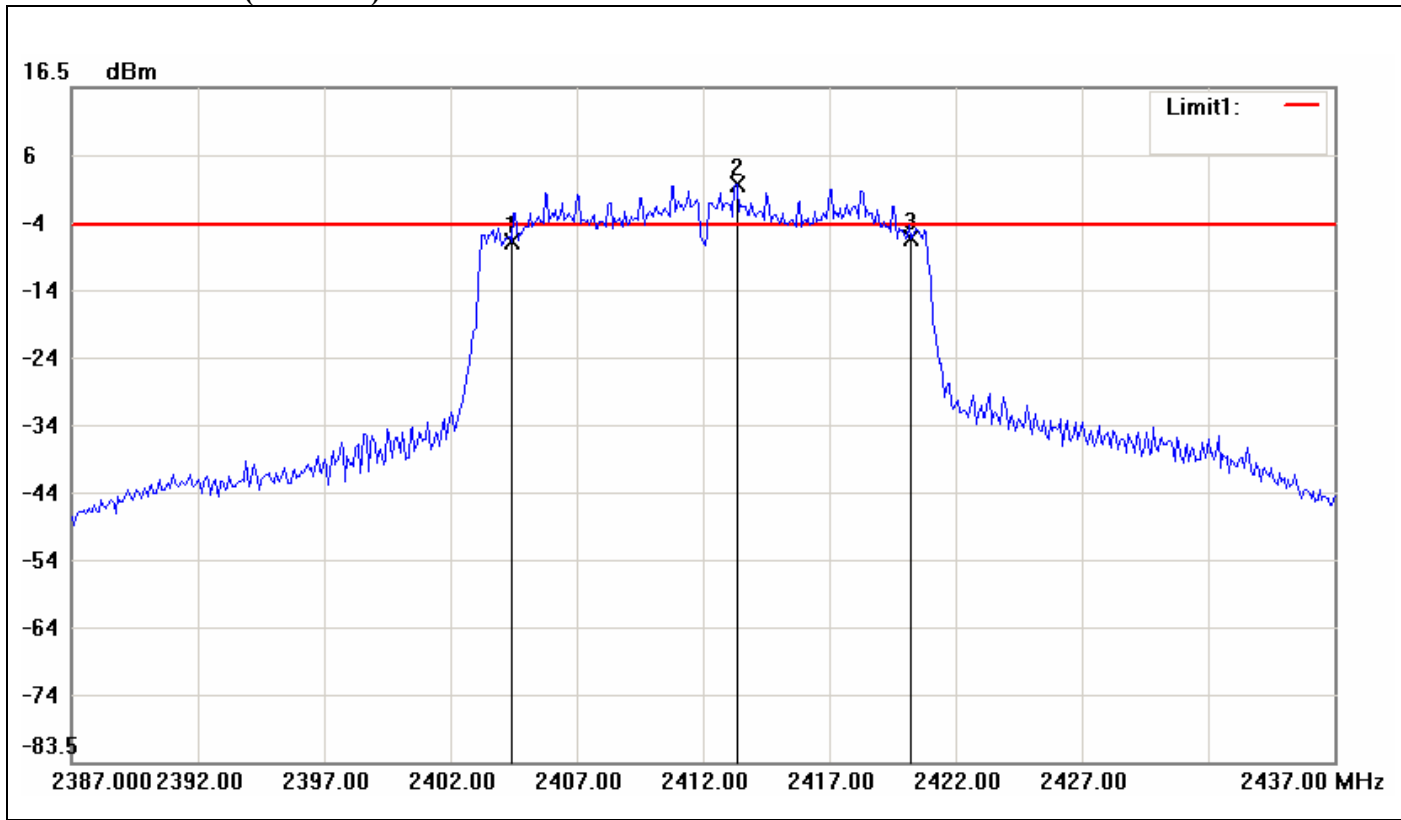


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2404.4167	-6.35	-4.00	-2.35
2	2413.3333	2.00	-4.00	6.00
3	2420.2500	-5.84	-4.00	-1.84

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	15.8333	0.51



6dB Bandwidth (CH Mid)

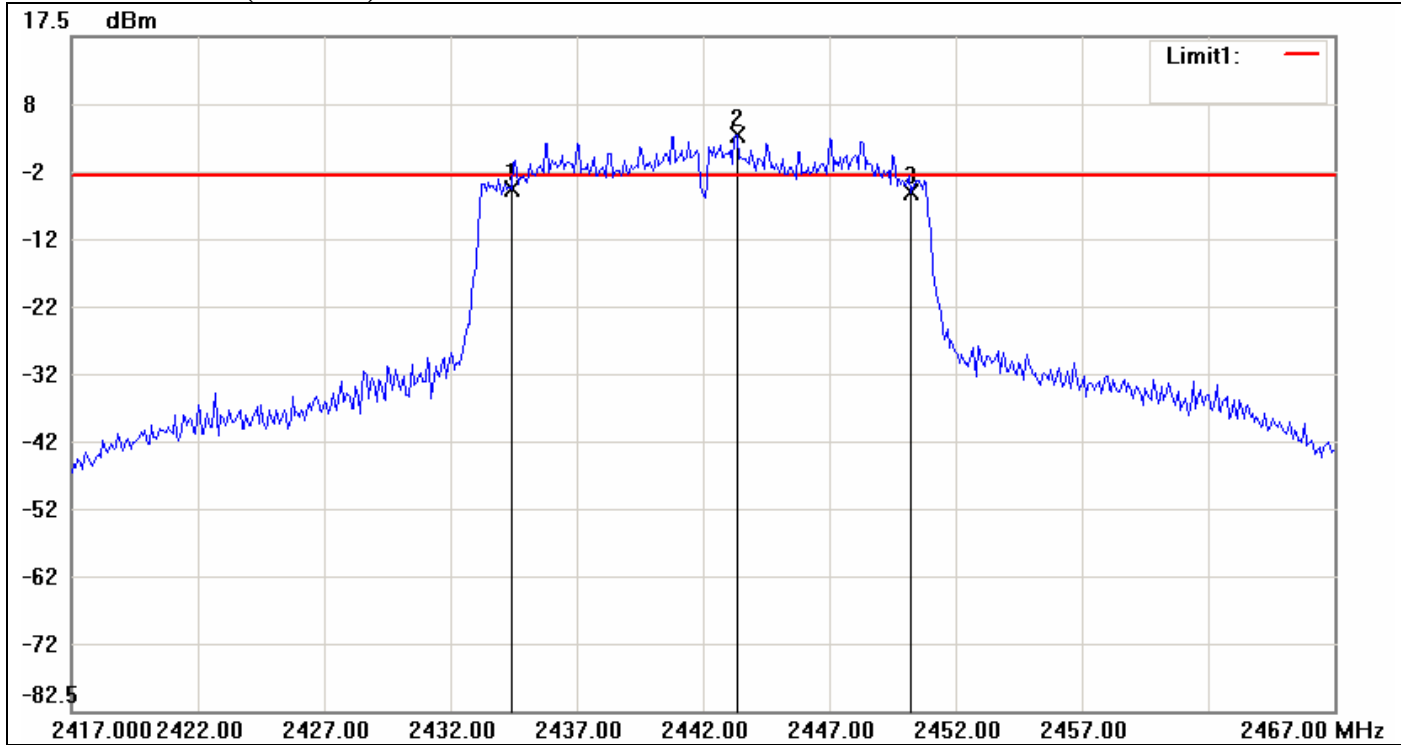


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2434.4167	-5.16	-3.19	-1.97
2	2443.3333	2.81	-3.19	6.00
3	2450.2500	-5.57	-3.19	-2.38

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	15.8333	-0.41



### 6dB Bandwidth (CH High)

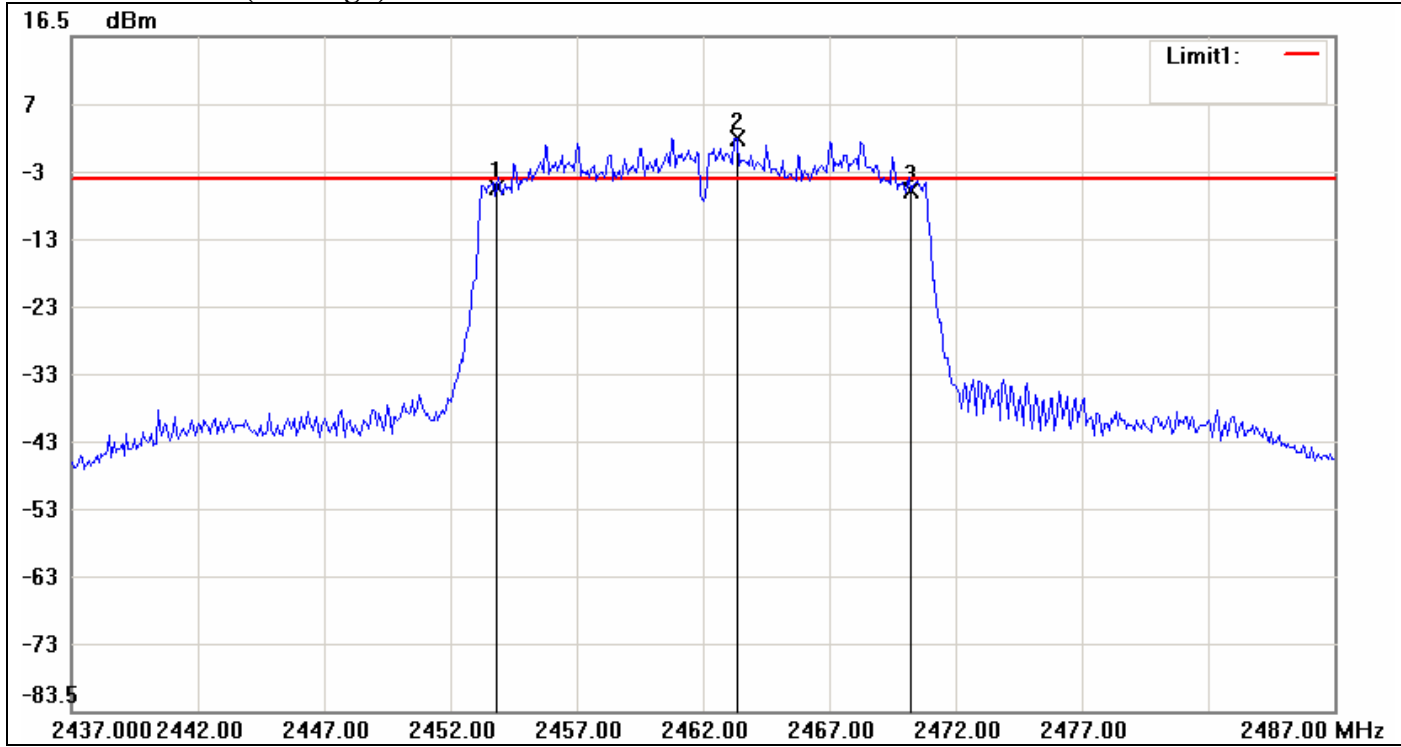


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2453.8333	-5.90	-4.50	-1.40
2	2463.3333	1.50	-4.50	6.00
3	2470.2500	-6.38	-4.50	-1.88

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	16.4167	-0.48



IEEE 802.11n HT 40 MHz mode / Chain 0

6dB Bandwidth (CH Low)

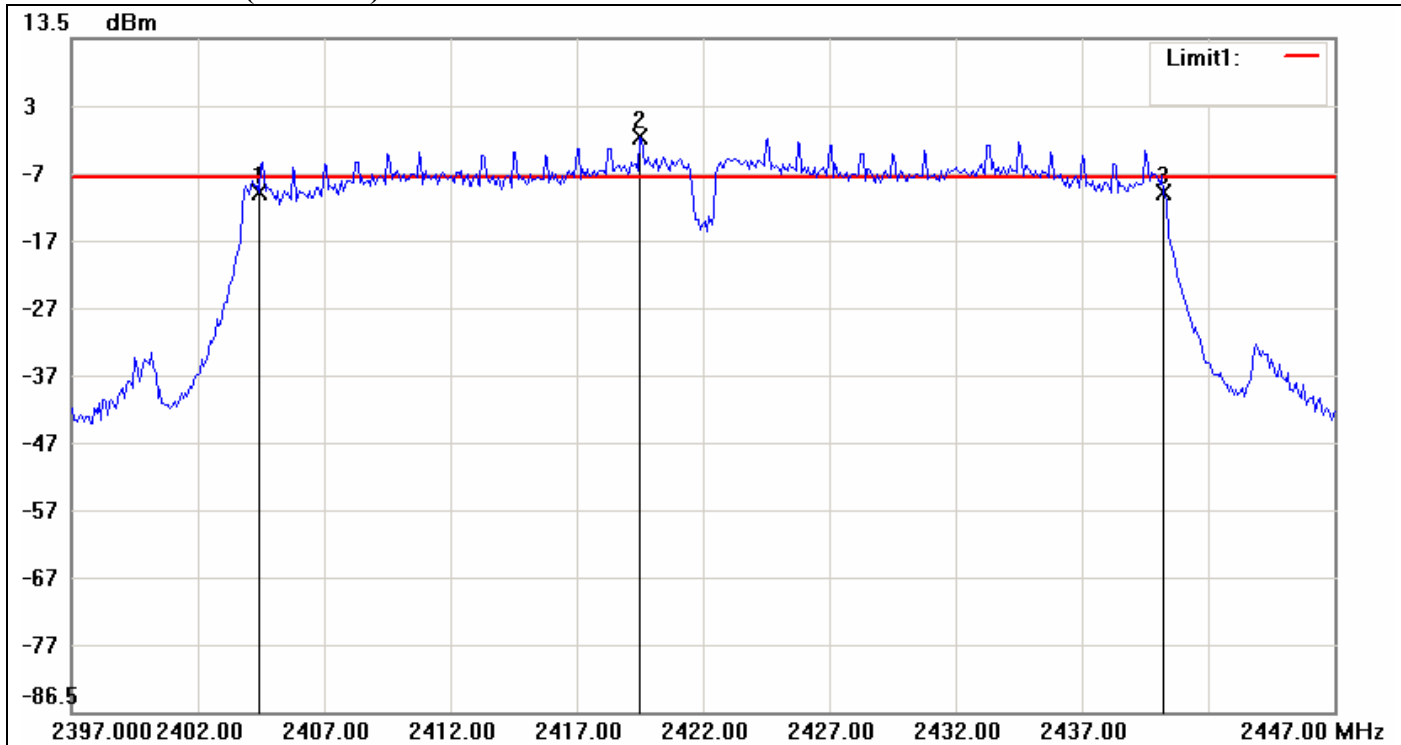


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2404.4167	-9.29	-7.21	-2.08
2	2419.5000	-1.21	-7.21	6.00
3	2440.2500	-9.31	-7.21	-2.10

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	35.8333	-0.02



6dB Bandwidth (CH Mid)

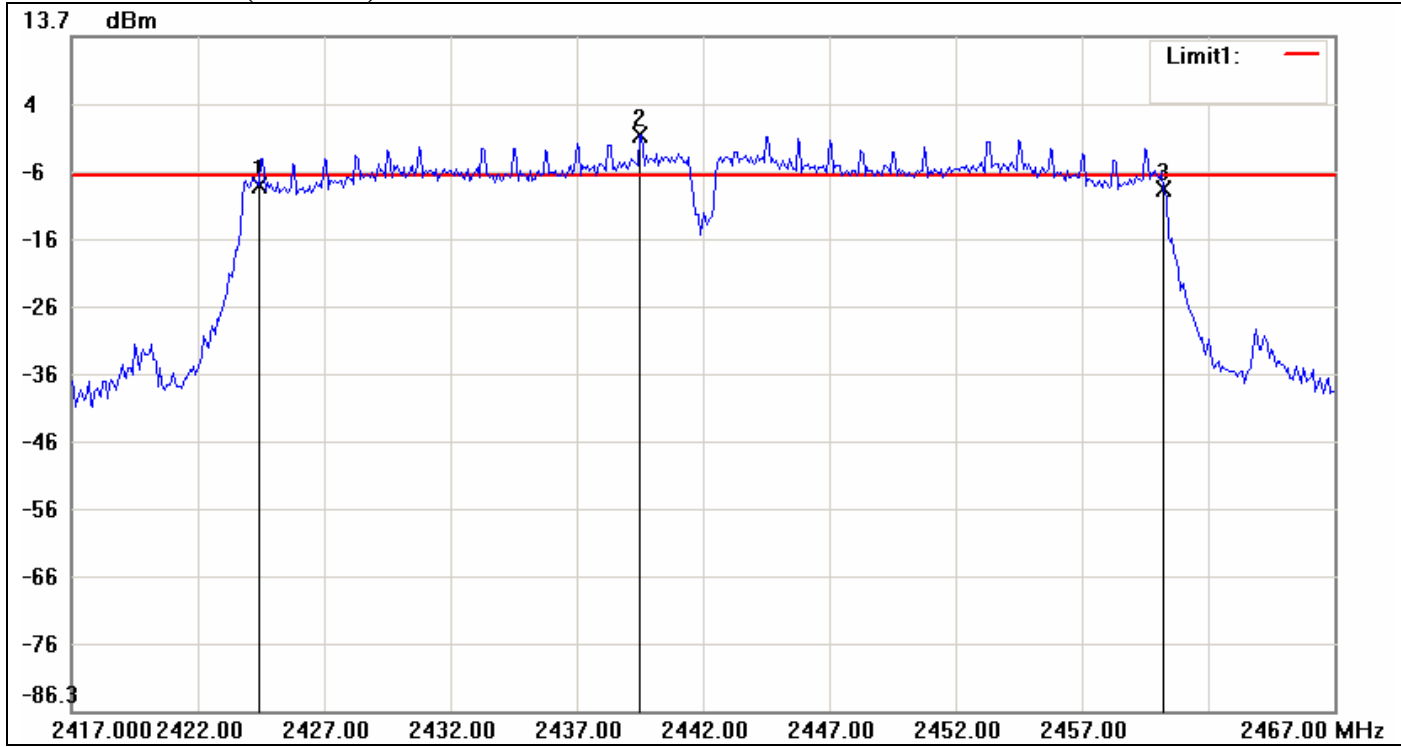


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2424.4167	-8.40	-6.88	-1.52
2	2439.5000	-0.88	-6.88	6.00
3	2460.2500	-8.85	-6.88	-1.97

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	35.8333	-0.45



**6dB Bandwidth (CH High)**

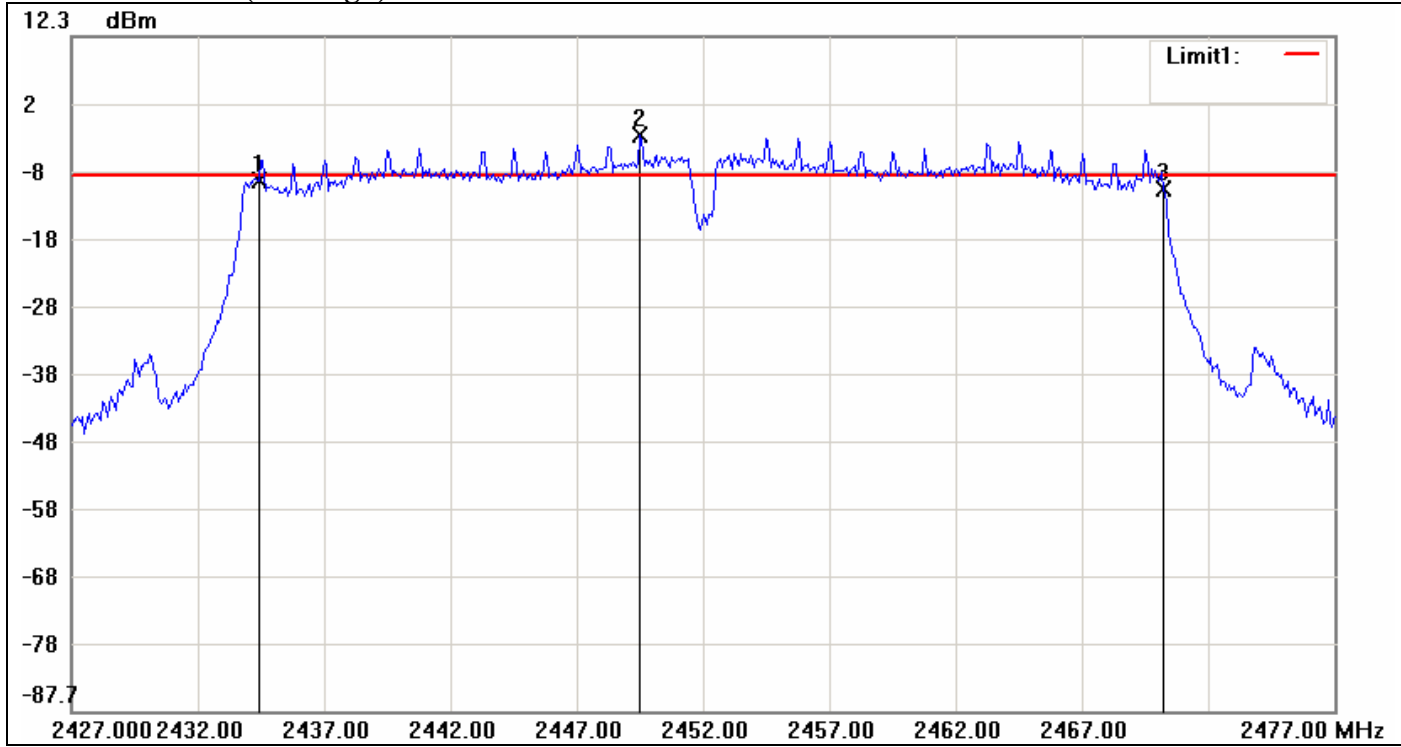


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2434.4167	-9.13	-8.35	-0.78
2	2449.5000	-2.35	-8.35	6.00
3	2470.2500	-10.39	-8.35	-2.04

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	35.8333	-1.26



IEEE 802.11n HT 40 MHz mode / Chain 1

6dB Bandwidth (CH Low)

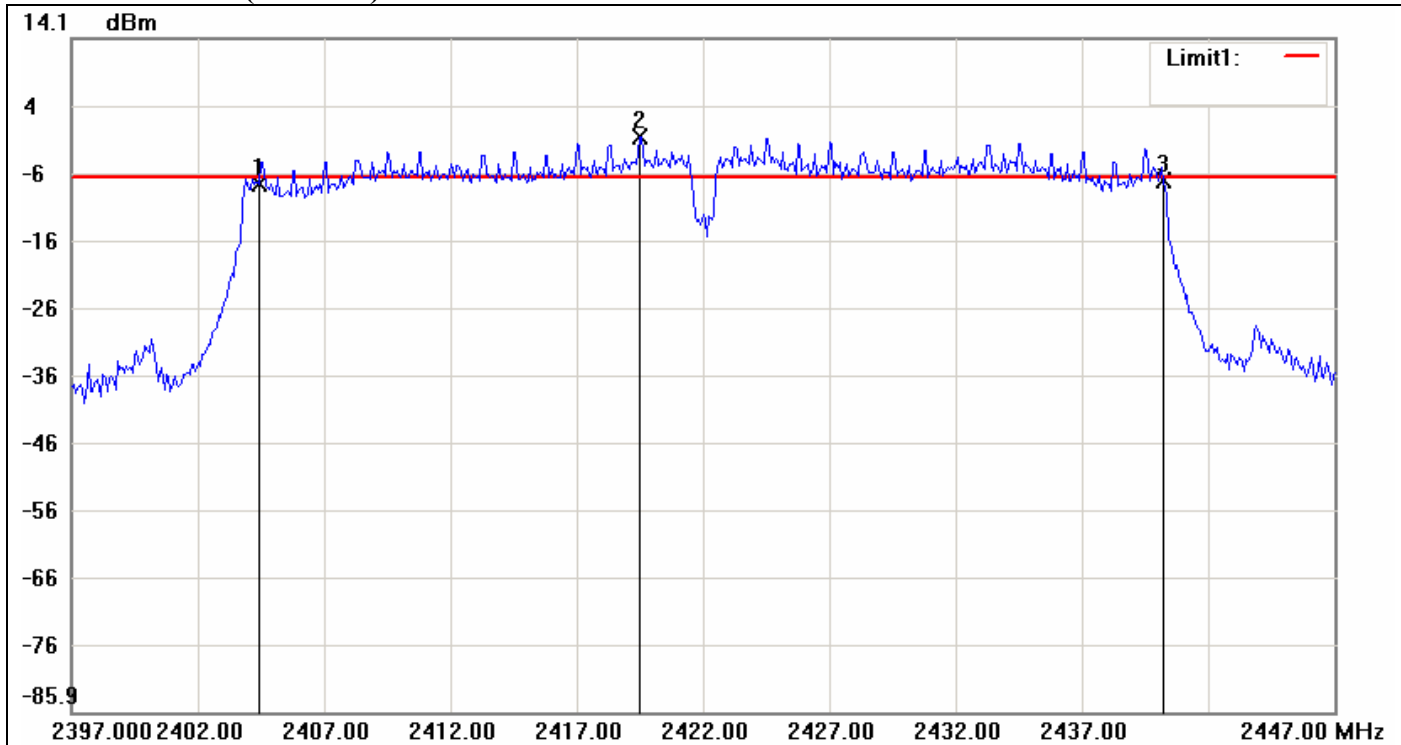


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2404.4167	-7.60	-6.42	-1.18
2	2419.5000	-0.42	-6.42	6.00
3	2440.2500	-7.08	-6.42	-0.66

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	35.8333	0.52



6dB Bandwidth (CH Mid)

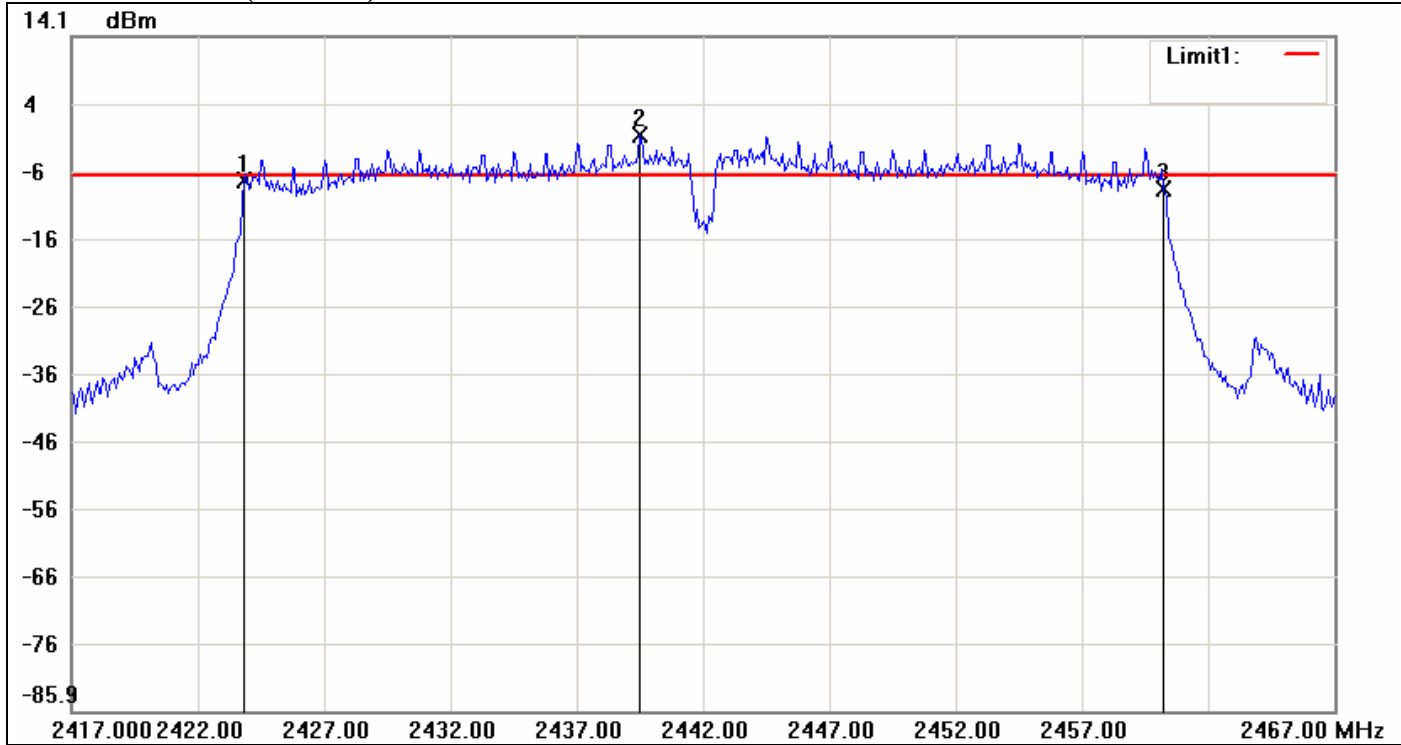


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2423.8333	-7.32	-6.56	-0.76
2	2439.5000	-0.56	-6.56	6.00
3	2460.2500	-8.45	-6.56	-1.89

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	36.4167	-1.13





**6dB Bandwidth (CH High)**

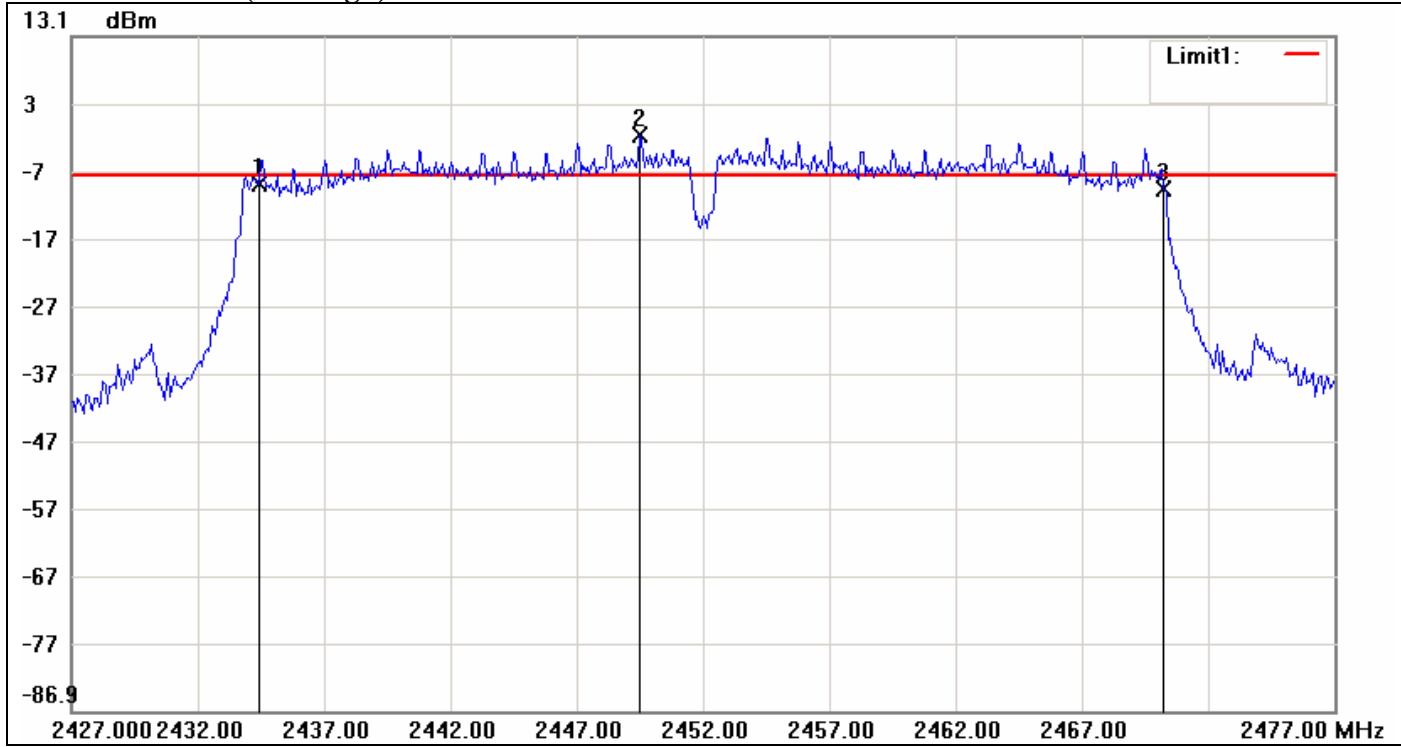

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2434.4167	-8.76	-7.50	-1.26
2	2449.5000	-1.50	-7.50	6.00
3	2470.2500	-9.52	-7.50	-2.02

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	35.8333	-0.76




## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration

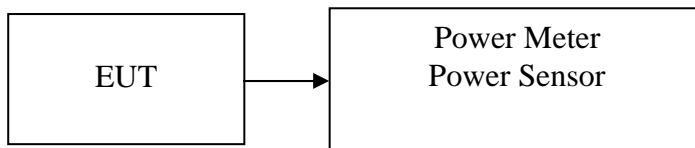

### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

### TEST RESULTS

*No non-compliance noted*

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	21.47	0.1403	1.00	PASS
Mid	2442	20.91	0.1233		PASS
High	2462	20.86	0.1219		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	24.91	0.3097	1.00	PASS
Mid	2442	25.64	0.3664		PASS
High	2462	24.71	0.2958		PASS

**Test mode: IEEE 802.11n HT 20 MHz mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	23.91	22.85	26.42	0.4388	1.00	PASS
Mid	2442	23.71	24.61	27.19	0.5240		PASS
High	2462	23.67	22.94	26.33	0.4296		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	21.17	22.61	24.96	0.3133	1.00	PASS
Mid	2442	22.38	22.67	25.54	0.3579		PASS
High	2452	20.53	21.51	24.06	0.2546		PASS

**Remark:** Total Output Power (w) = Chain 0 (10<sup>(Output Power /10)</sup>/1000)+ Chain 1 (10<sup>(Output Power /10)</sup>/1000)




### 7.3 AVERAGE POWER

#### LIMIT

None; for reporting purposes only.

#### Test Configuration

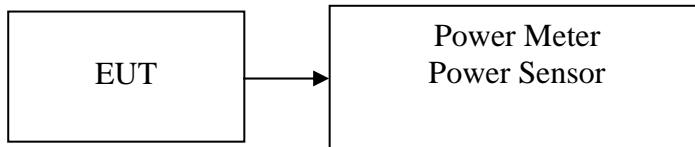

#### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.



## TEST RESULTS

No non-compliance noted

### Test Data

#### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	17.54	0.0568
Mid	2442	17.24	0.0530
High	2462	17.01	0.0502

#### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	14.47	0.0280
Mid	2442	16.97	0.0498
High	2462	13.88	0.0244

#### Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2412	12.26	11.91	15.10	0.0324
Mid	2442	13.19	13.16	16.19	0.0415
High	2462	11.82	11.68	14.76	0.0299

#### Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2422	11.67	12.6	15.17	0.0329
Mid	2442	11.96	12.94	15.49	0.0354
High	2452	10.76	11.18	13.99	0.0250

**Remark:** Total Output Power (w) = Chain 0 (10<sup>(Output Power /10)</sup>/1000)+ Chain 1 (10<sup>(Output Power /10)</sup>/1000)




## 7.4 BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

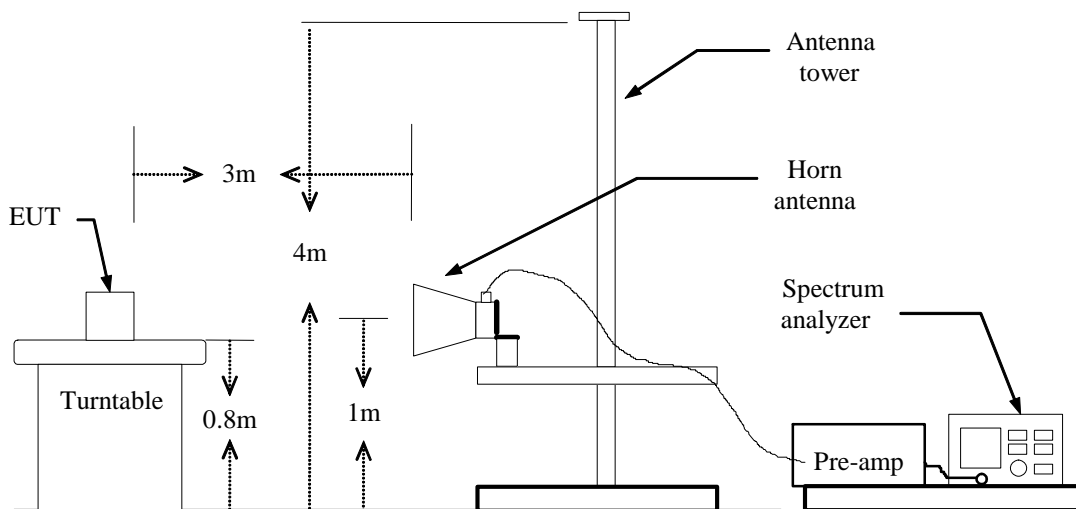

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS

Refer to attach spectrum analyzer data chart.



**For PIFA Antenna**


**Band Edges (IEEE 802.11b mode / CH Low)**

**Detector mode: Peak**

**Polarity: Vertical**

Agilent 13:43:46 2 Sep 2011

R T

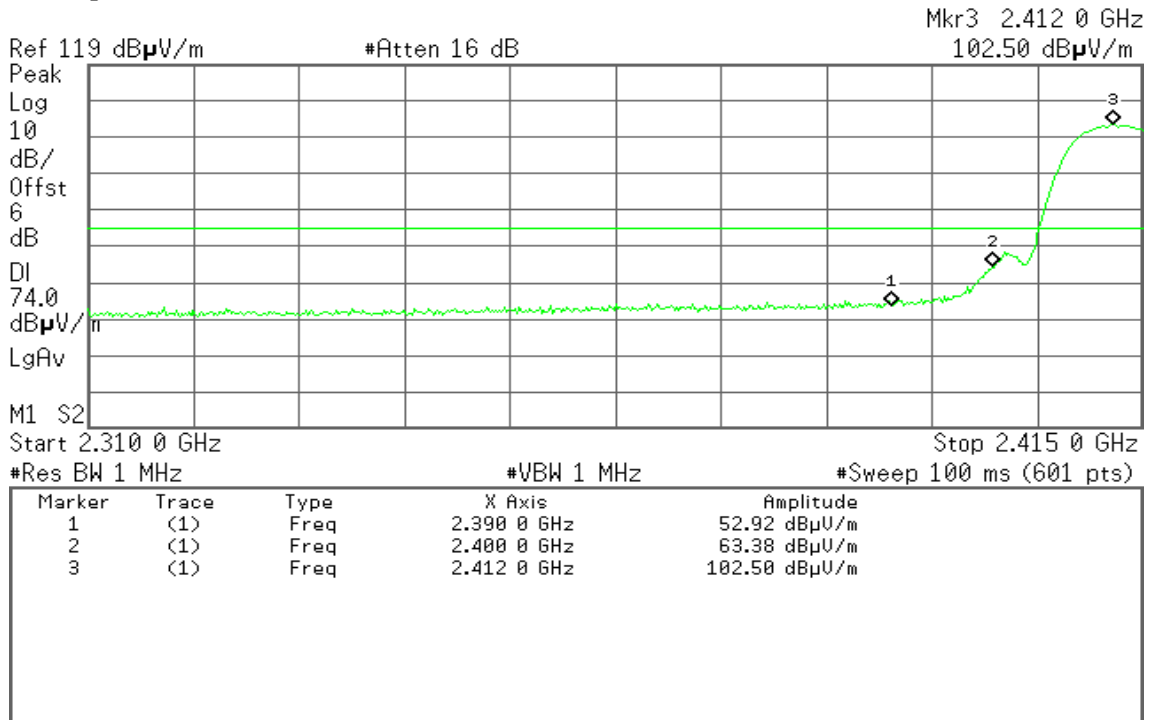


**Detector mode: Average**

**Polarity: Vertical**

Agilent 13:44:17 2 Sep 2011

R T

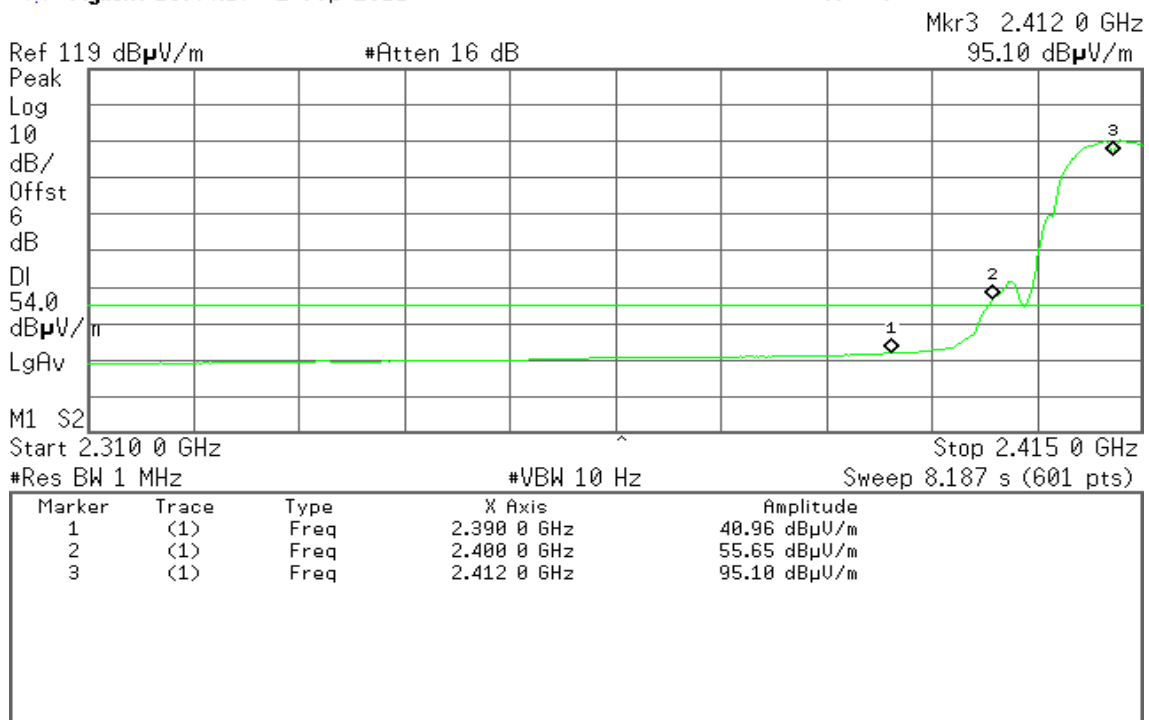



Detector mode: Peak

Polarity: Horizontal


Agilent 13:39:31 2 Sep 2011

T

Mkr3 2.411 8 GHz  
104.69 dB $\mu$ V/m

Ref 119 dB $\mu$ V/m

#Atten 16 dB

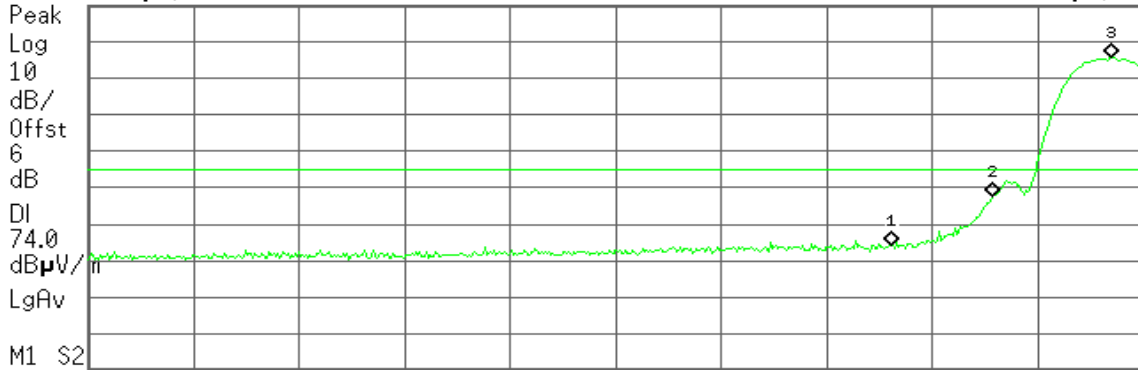

Start 2.310 0 GHz

Stop 2.415 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 1 GHz	53.15 dB $\mu$ V/m
2	(1)	Freq	2.400 0 GHz	66.44 dB $\mu$ V/m
3	(1)	Freq	2.411 8 GHz	104.69 dB $\mu$ V/m

Detector mode: Average

Polarity: Horizontal

Agilent 13:39:04 2 Sep 2011

T

Mkr3 2.411 8 GHz  
100.49 dB $\mu$ V/m

Ref 119 dB $\mu$ V/m

#Atten 16 dB



Start 2.310 0 GHz

Stop 2.415 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 8.187 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 1 GHz	41.03 dB $\mu$ V/m
2	(1)	Freq	2.400 0 GHz	59.21 dB $\mu$ V/m
3	(1)	Freq	2.411 8 GHz	100.49 dB $\mu$ V/m





### Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 14:08:36 2 Sep 2011

R T

Mkr1 2.483 50 GHz  
53.34 dB $\mu$ V/m

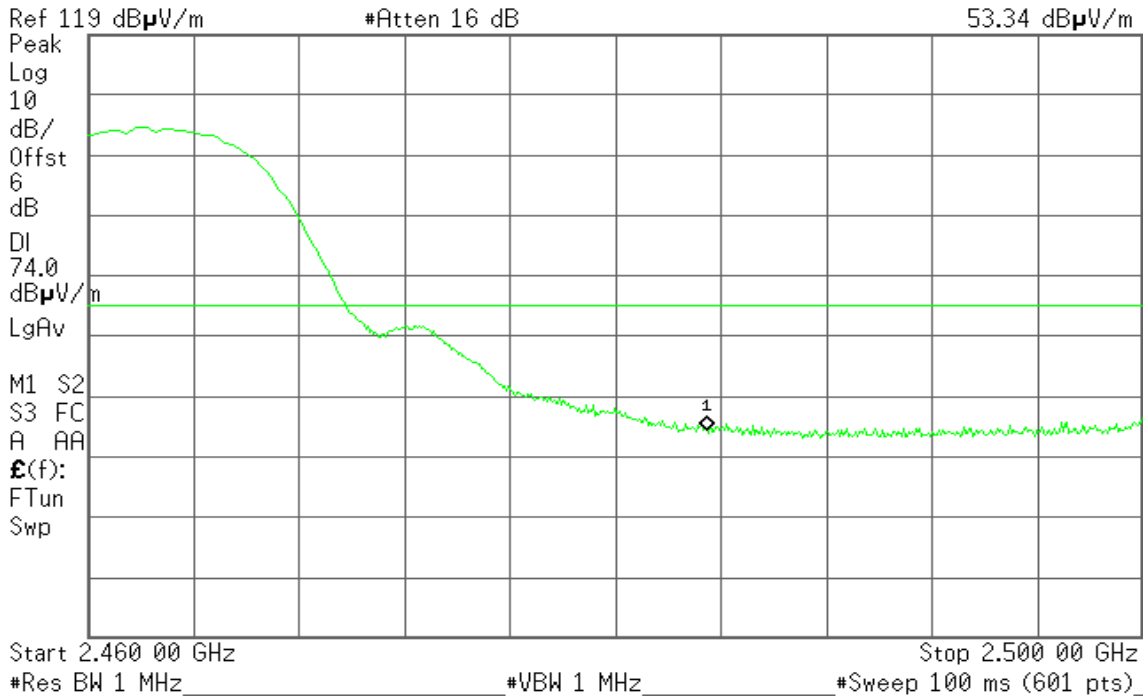


Detector mode: Average

Polarity: Vertical

Agilent 14:09:03 2 Sep 2011

R T

Mkr1 2.483 50 GHz  
41.03 dB $\mu$ V/m

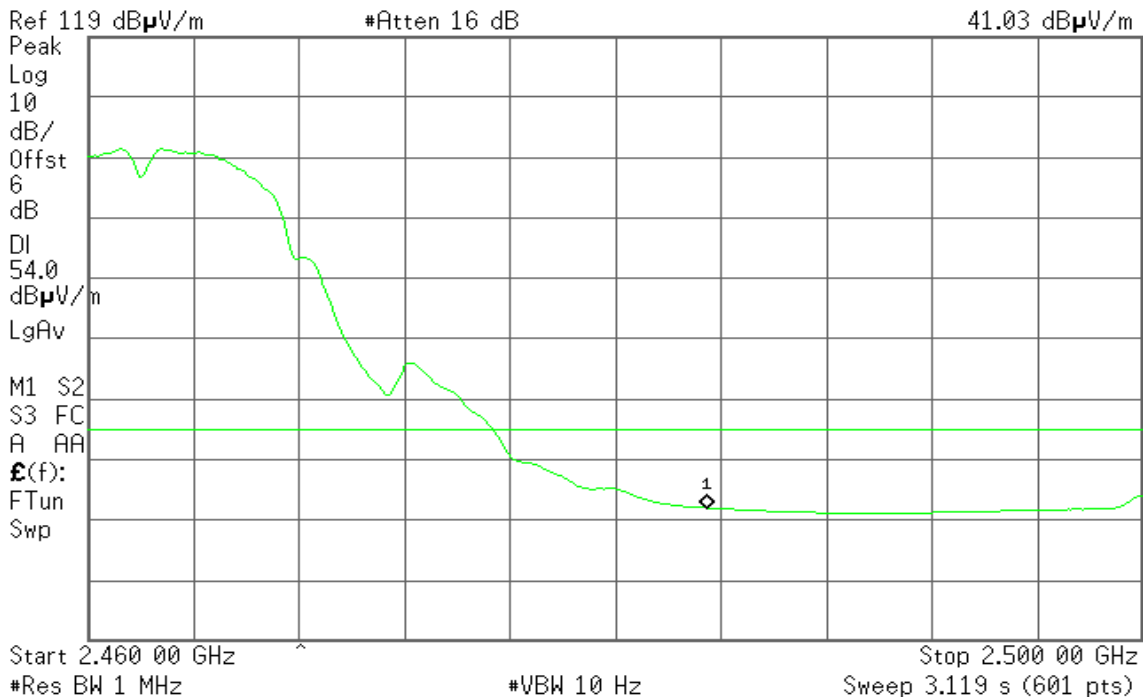




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 14:03:29 2 Sep 2011

T

Mkr1 2.483 50 GHz  
54.53 dB $\mu$ V/m

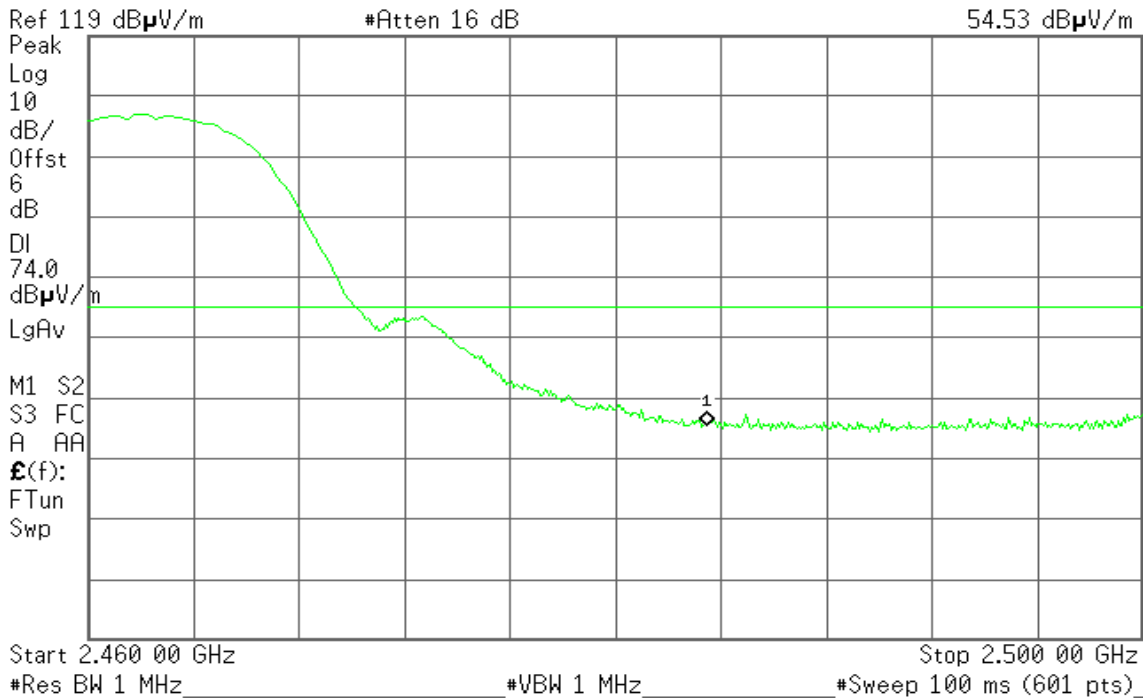


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 14:03:53 2 Sep 2011

T

Mkr1 2.483 50 GHz  
42.37 dB $\mu$ V/m

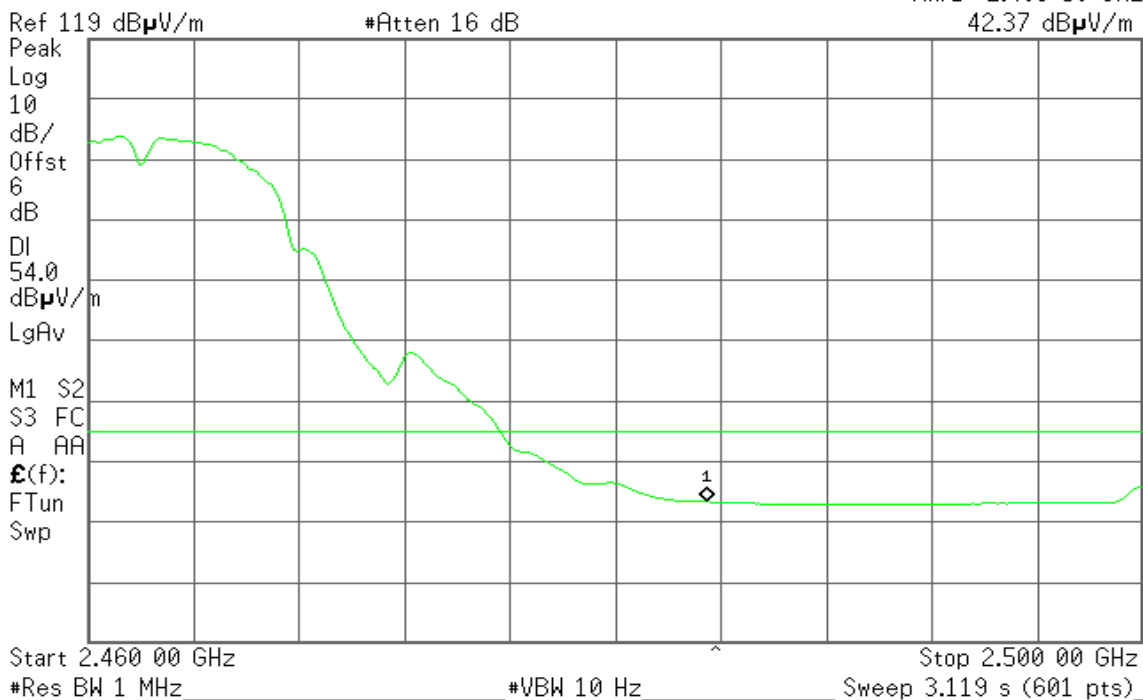




### Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 10:57:13 2 Sep 2011

R T

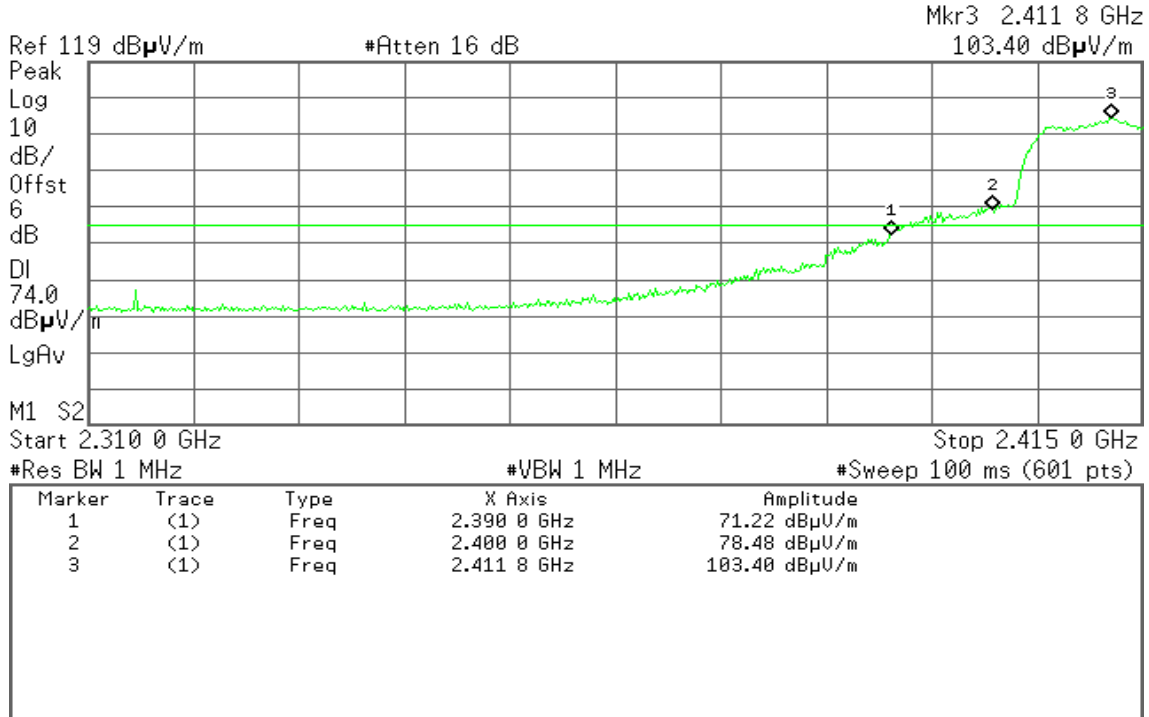


Detector mode: Average

Polarity: Vertical

Agilent 10:57:44 2 Sep 2011

R T

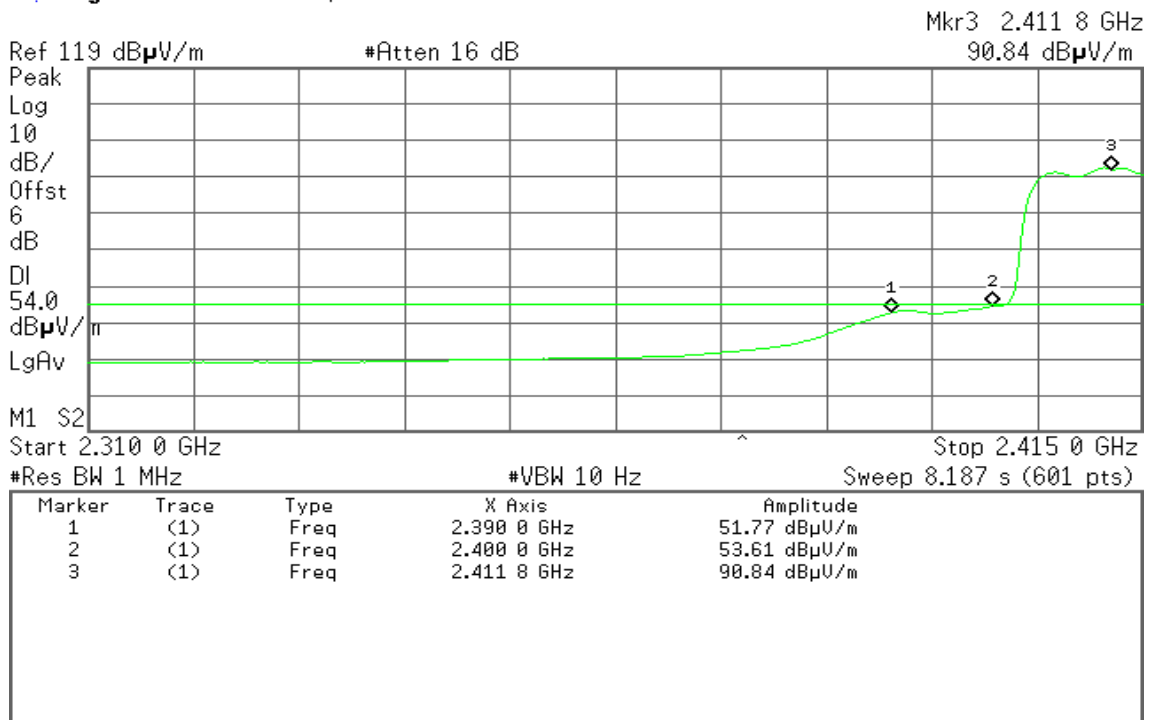




Detector mode: Peak

Polarity: Horizontal

Agilent 13:07:26 2 Sep 2011

R T

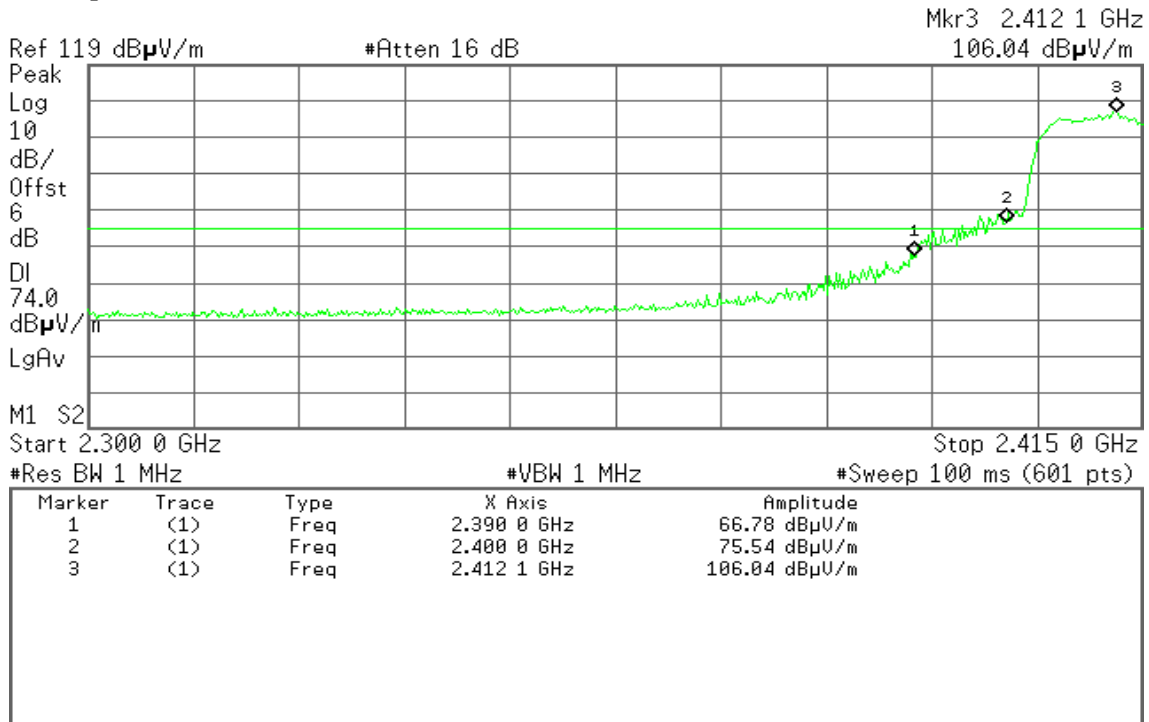


Detector mode: Average

Polarity: Horizontal

Agilent 13:06:43 2 Sep 2011

R T

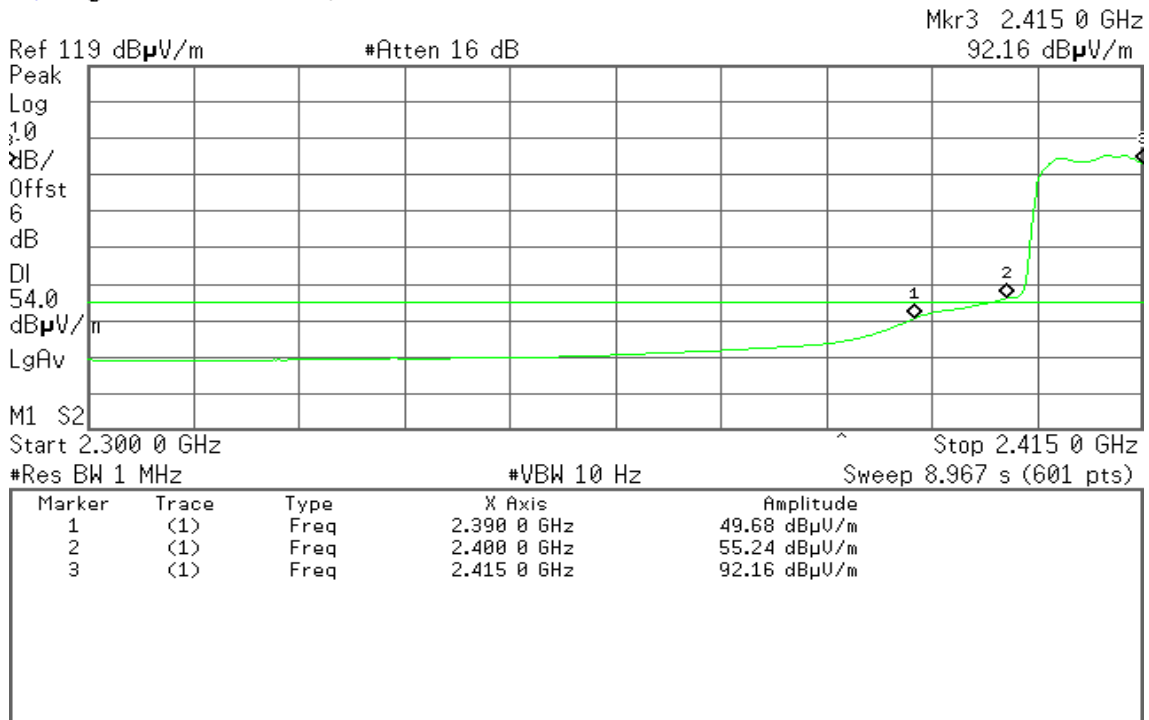



### Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 13:22:10 2 Sep 2011

T

Mkr1 2.483 50 GHz  
66.52 dB $\mu$ V/m

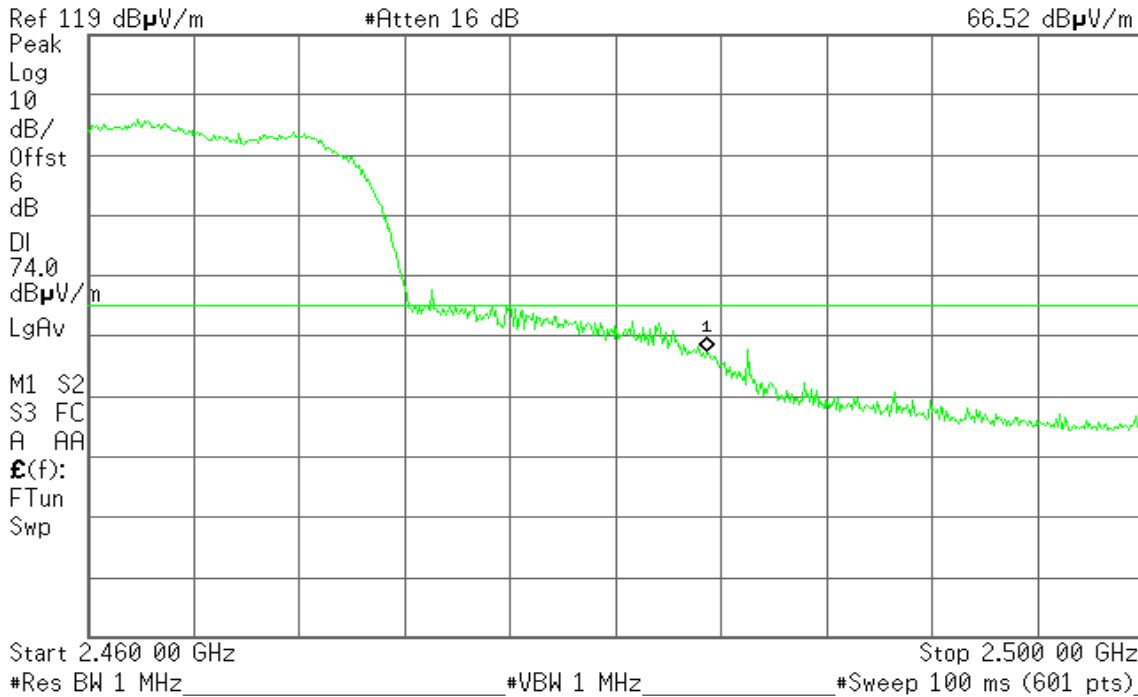


Detector mode: Average

Polarity: Vertical

Agilent 13:22:38 2 Sep 2011

T

Mkr1 2.483 50 GHz  
48.74 dB $\mu$ V/m

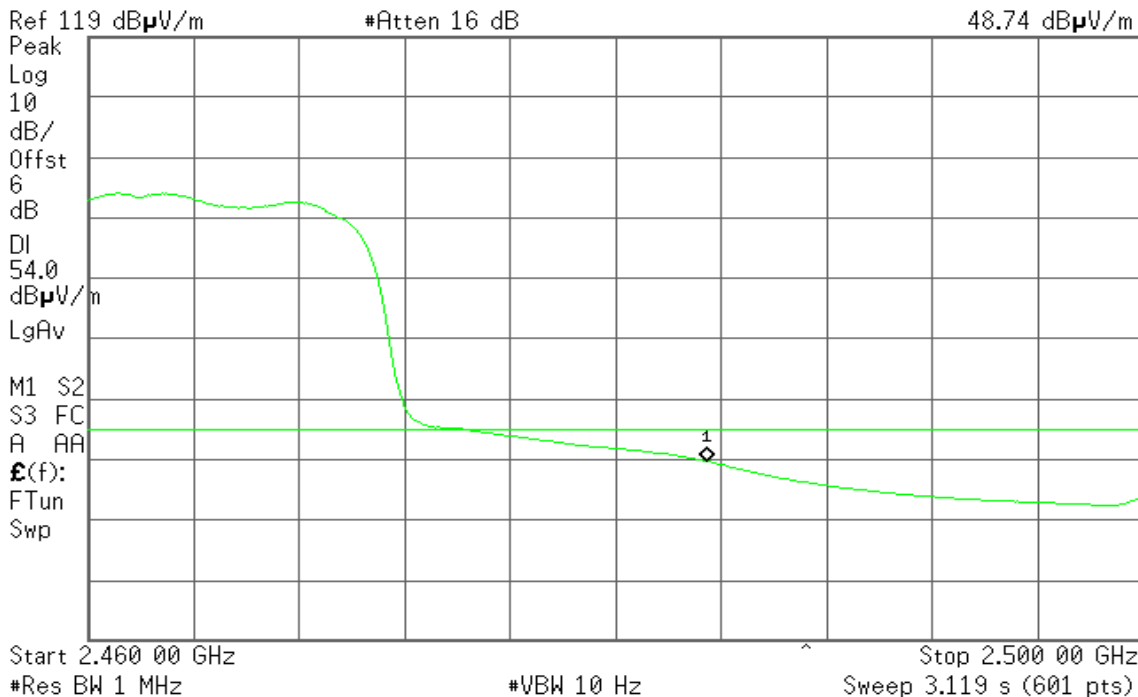




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 13:29:23 2 Sep 2011

T

Mkr1 2.483 50 GHz  
66.86 dB $\mu$ V/m

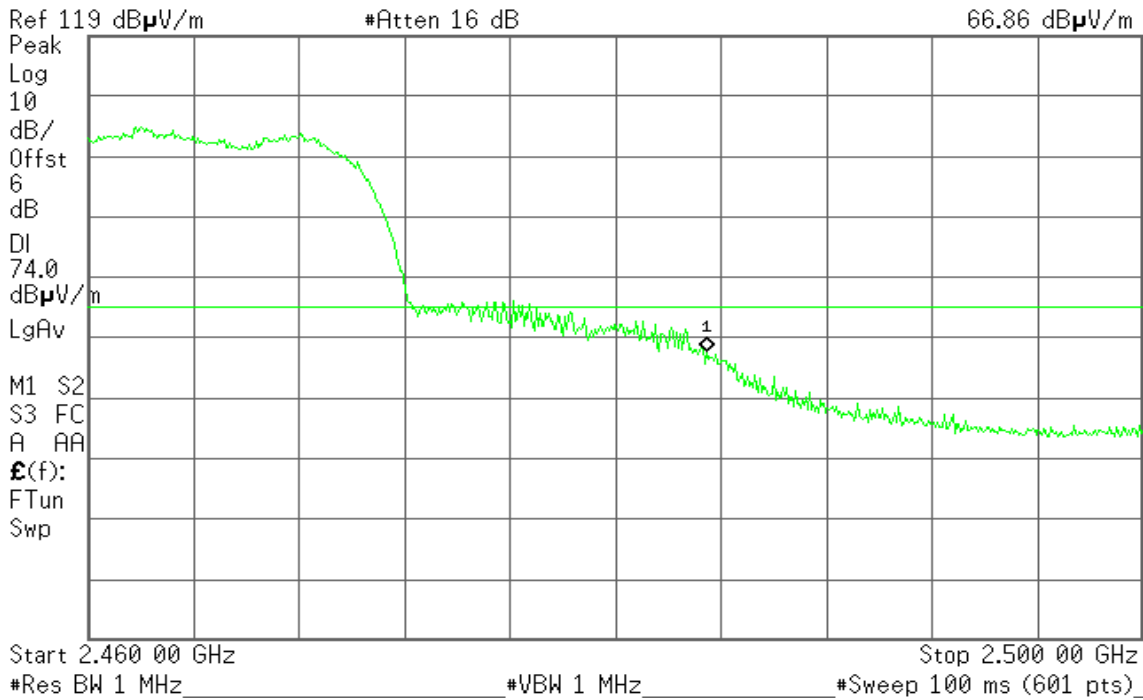


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 13:29:45 2 Sep 2011

T

Mkr1 2.483 50 GHz  
49.39 dB $\mu$ V/m

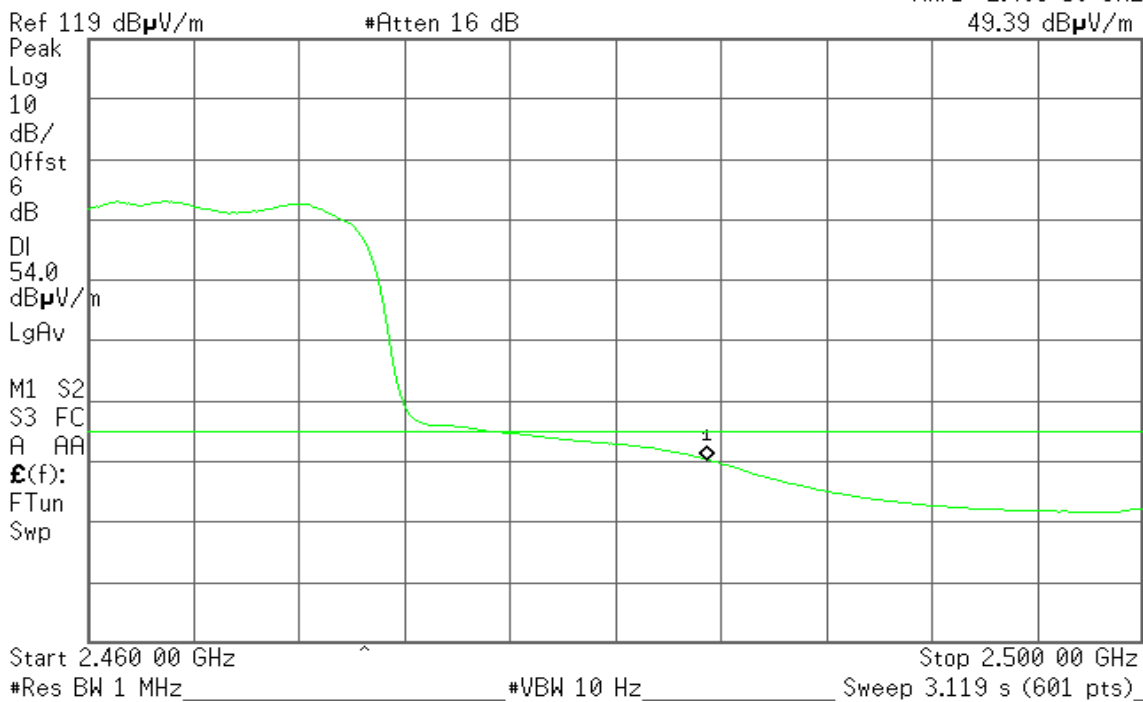




**Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)**

**Detector mode: Peak**

**Polarity: Vertical**

Agilent 10:40:54 2 Sep 2011

R T

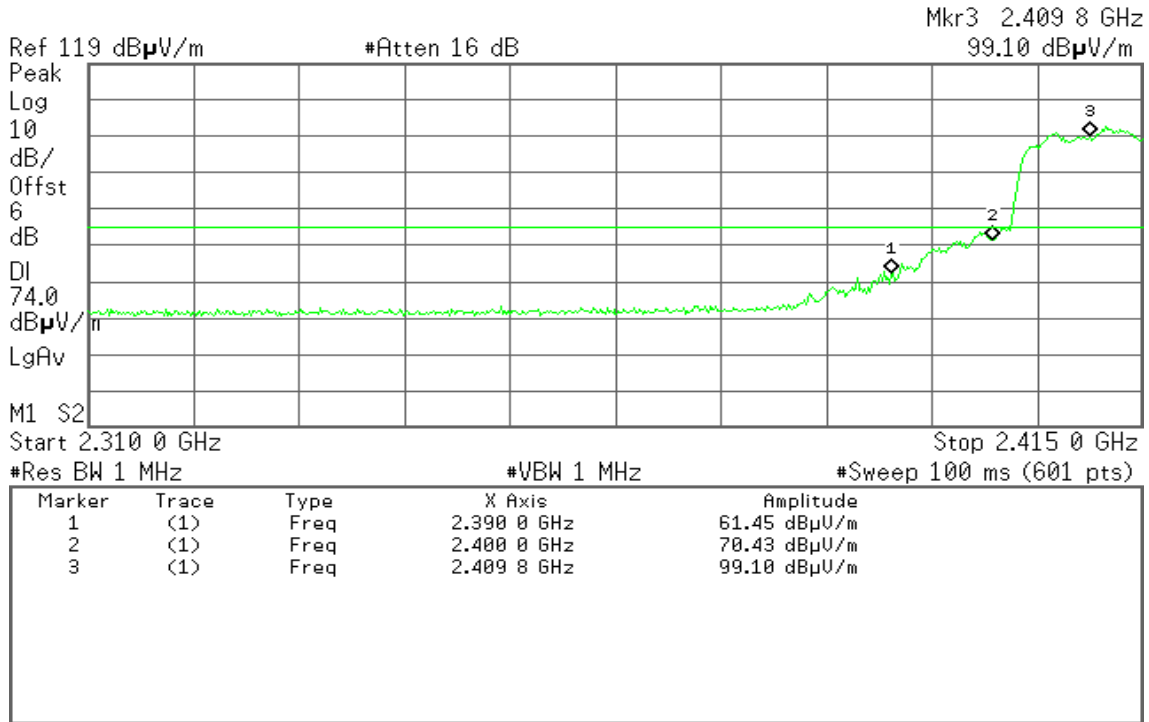


**Detector mode: Average**

**Polarity: Vertical**

Agilent 10:41:52 2 Sep 2011

R T

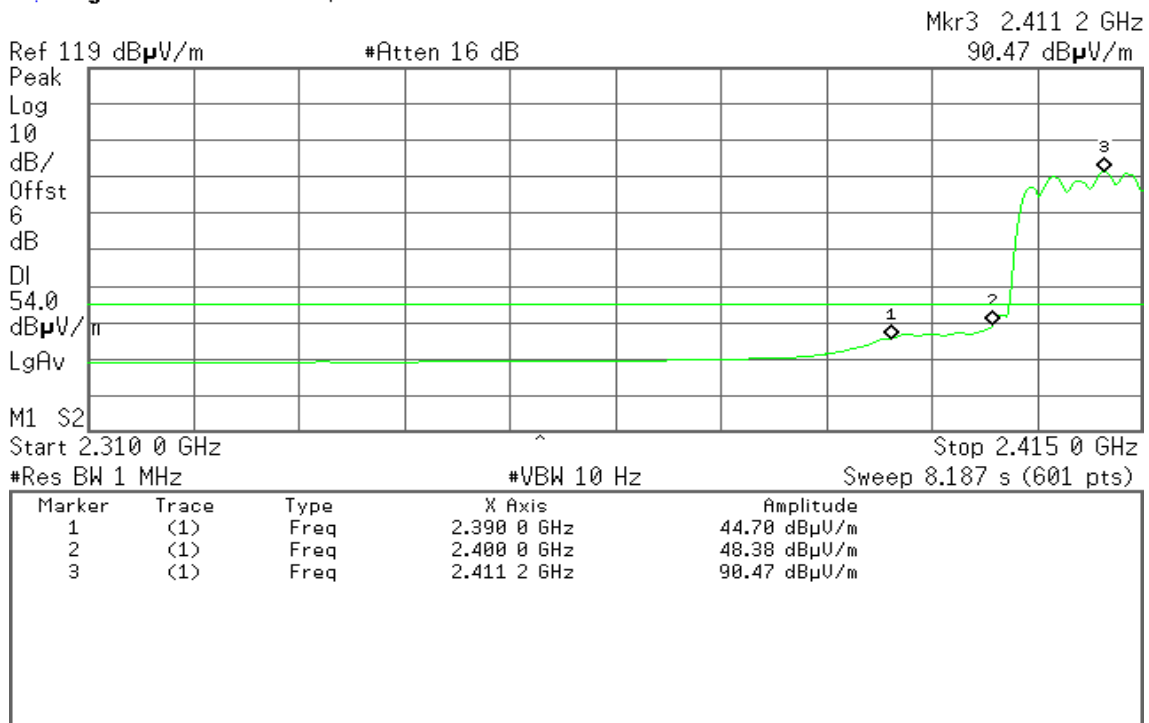




Detector mode: Peak

Polarity: Horizontal

Agilent 10:35:24 2 Sep 2011

R T

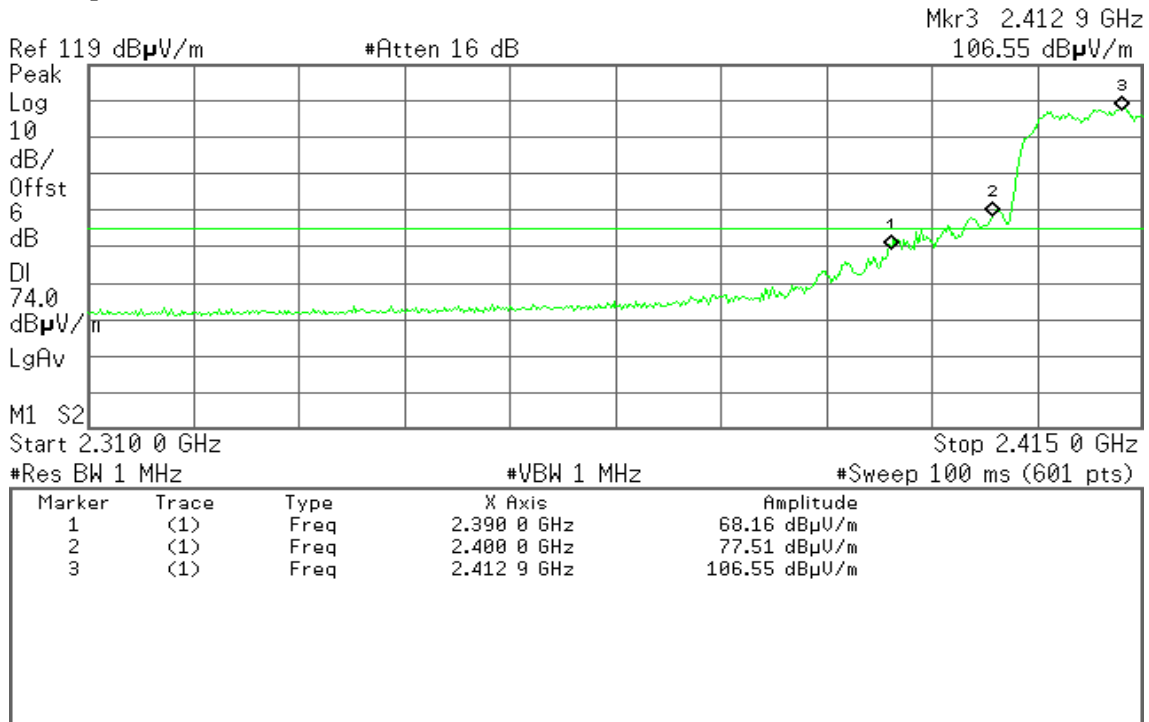


Detector mode: Average

Polarity: Horizontal

Agilent 10:35:54 2 Sep 2011

R T

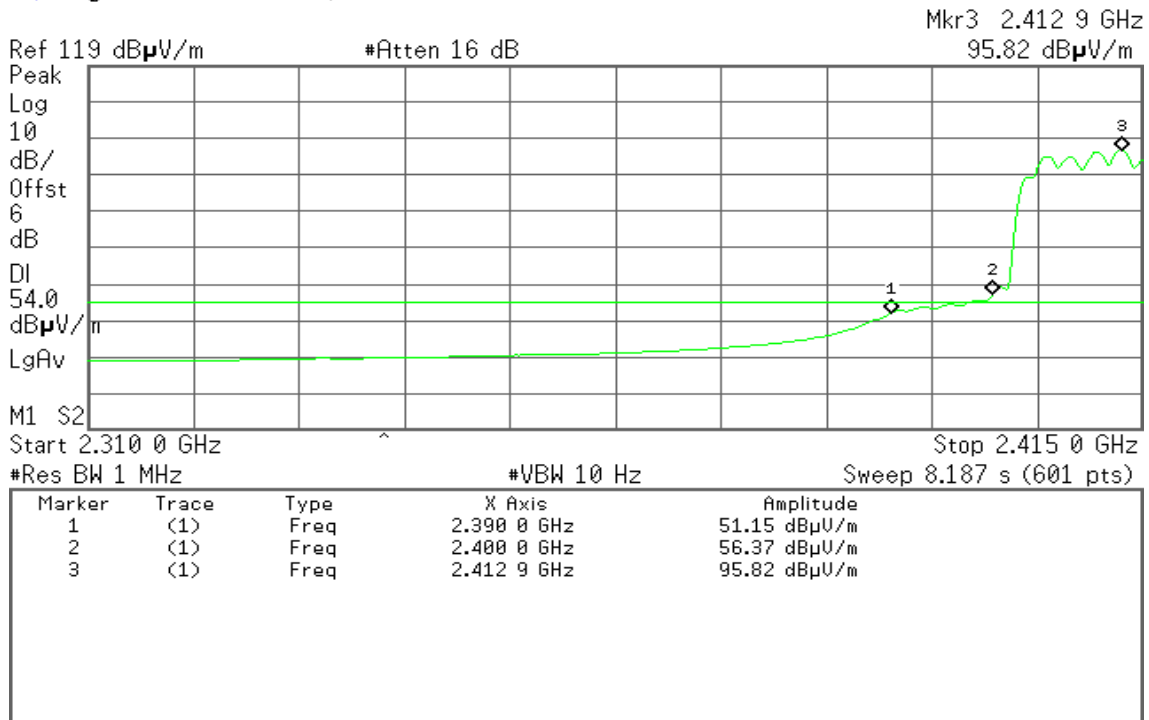





**Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)**


**Detector mode: Peak**

**Polarity: Vertical**

Agilent 09:28:05 2 Sep 2011

R T

Mkr1 2.483 55 GHz  
65.67 dB $\mu$ V/m

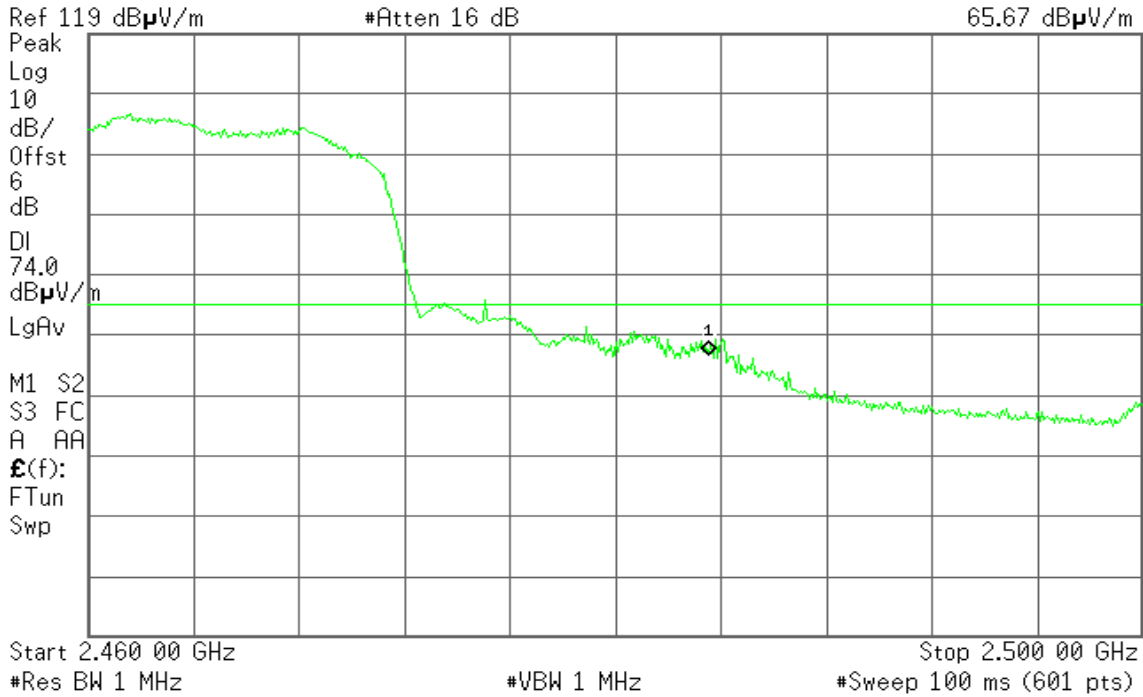


**Detector mode: Average**

**Polarity: Vertical**

Agilent 09:29:30 2 Sep 2011

R T

Mkr1 2.483 55 GHz  
50.53 dB $\mu$ V/m

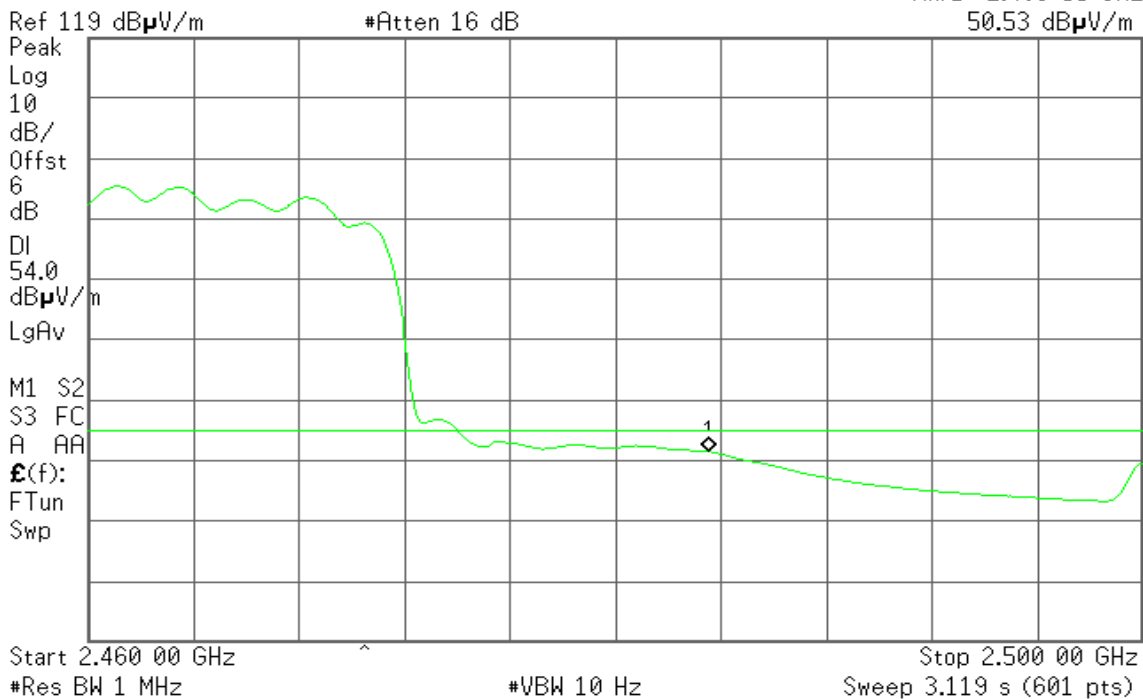




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 09:20:51 2 Sep 2011

T

Mkr1 2.483 50 GHz  
71.49 dB $\mu$ V/m

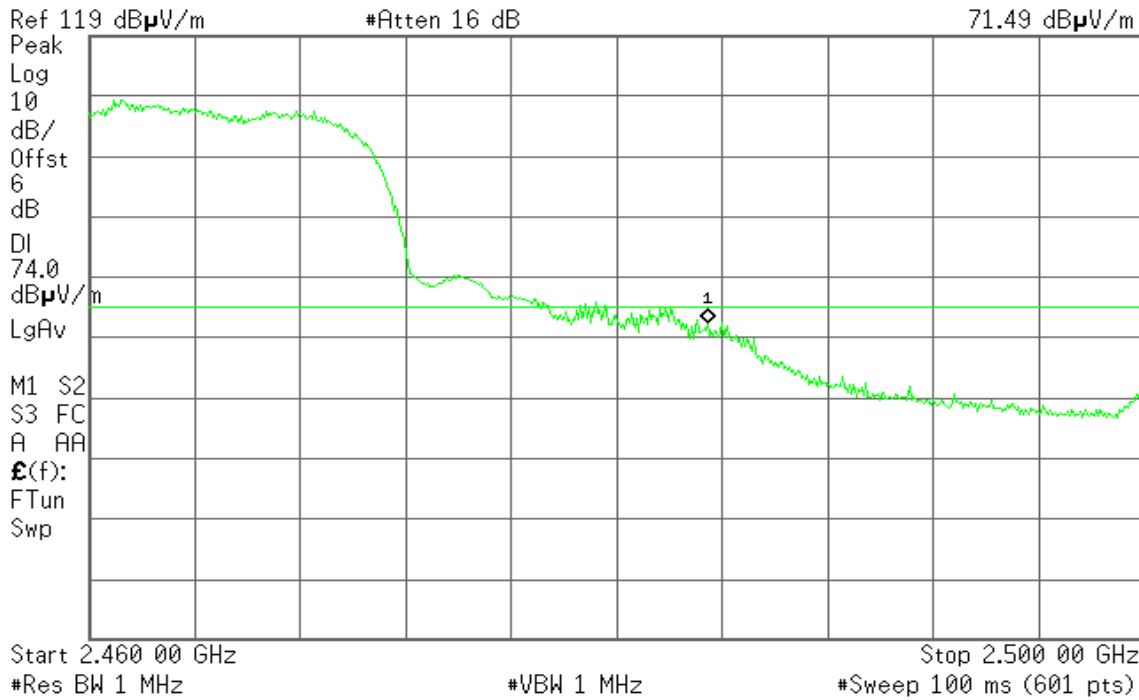


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 09:21:34 2 Sep 2011

T

Mkr1 2.483 50 GHz  
53.73 dB $\mu$ V/m

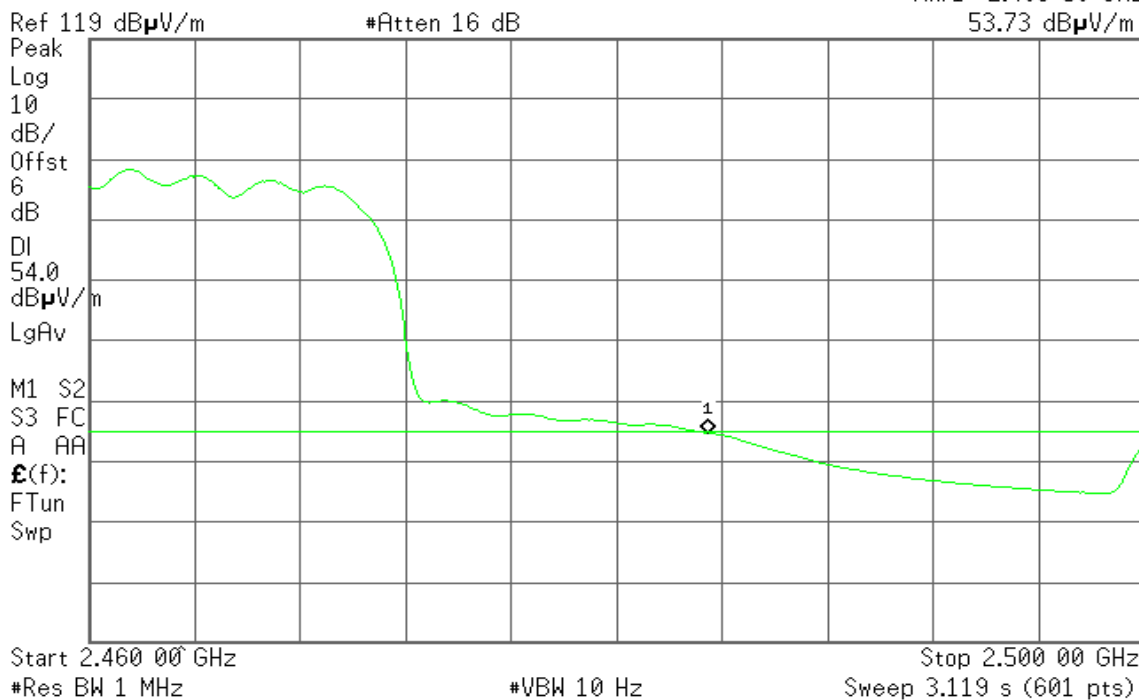



**Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)**


**Detector mode: Peak**

**Polarity: Vertical**

Agilent 10:02:13 6 Sep 2011

R T

Mkr3 2.428 8 GHz  
98.52 dBμV/m

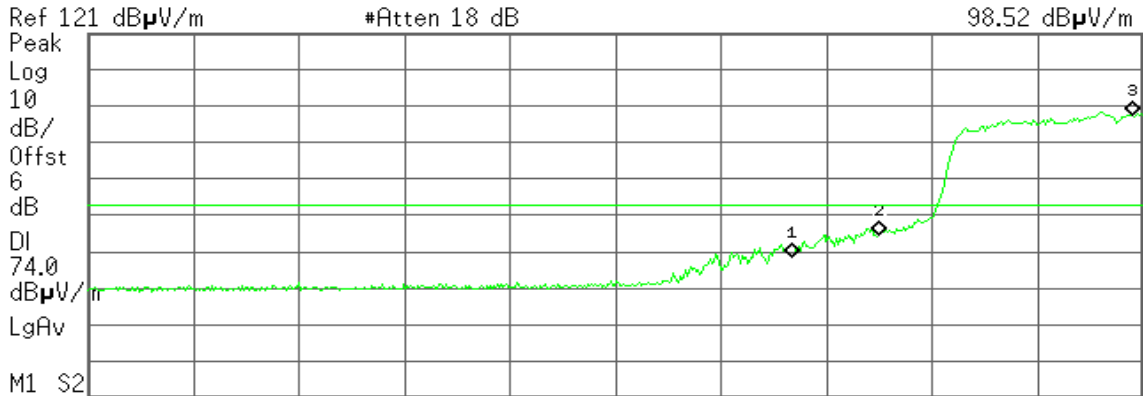

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	59.49 dBμV/m
2	(1)	Freq	2.400 0 GHz	65.45 dBμV/m
3	(1)	Freq	2.428 8 GHz	98.52 dBμV/m


**Detector mode: Average**

**Polarity: Vertical**

Agilent 10:02:47 6 Sep 2011

R T

Mkr3 2.428 8 GHz  
87.24 dBμV/m

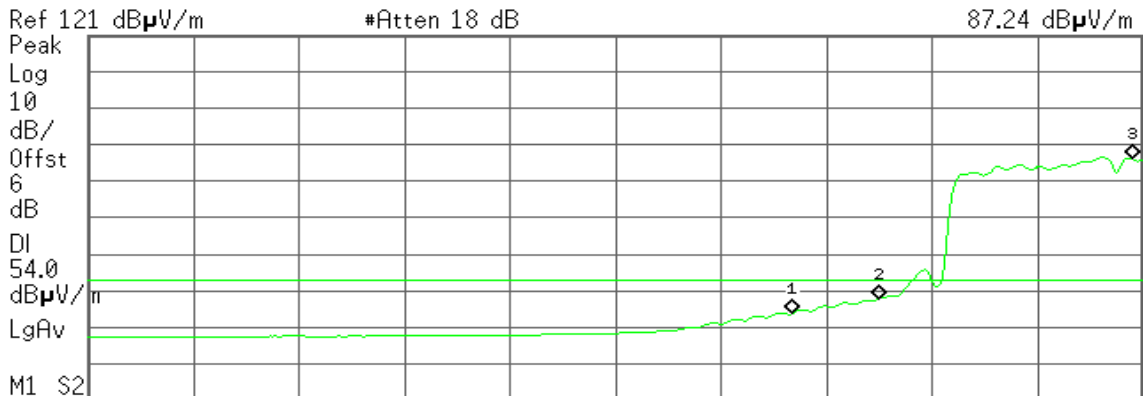

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	44.73 dBμV/m
2	(1)	Freq	2.400 0 GHz	48.87 dBμV/m
3	(1)	Freq	2.428 8 GHz	87.24 dBμV/m




Detector mode: Peak

Polarity: Horizontal

Agilent 10:08:14 6 Sep 2011

R T

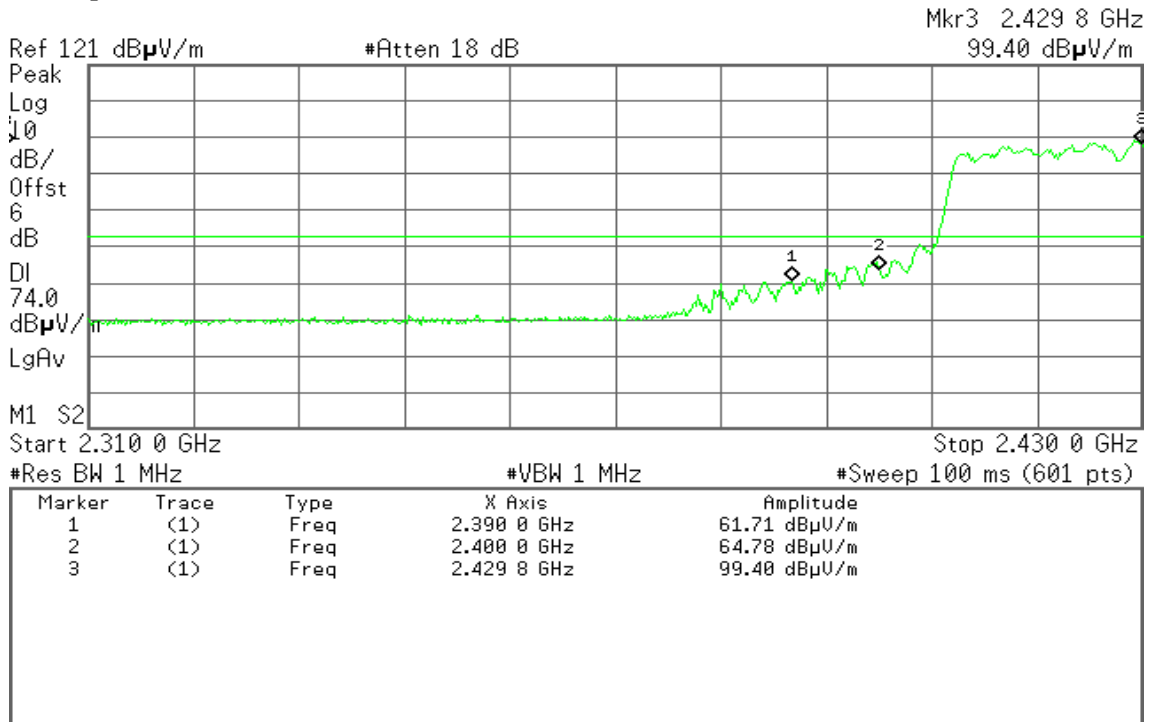


Detector mode: Average

Polarity: Horizontal

Agilent 10:08:58 6 Sep 2011

R T

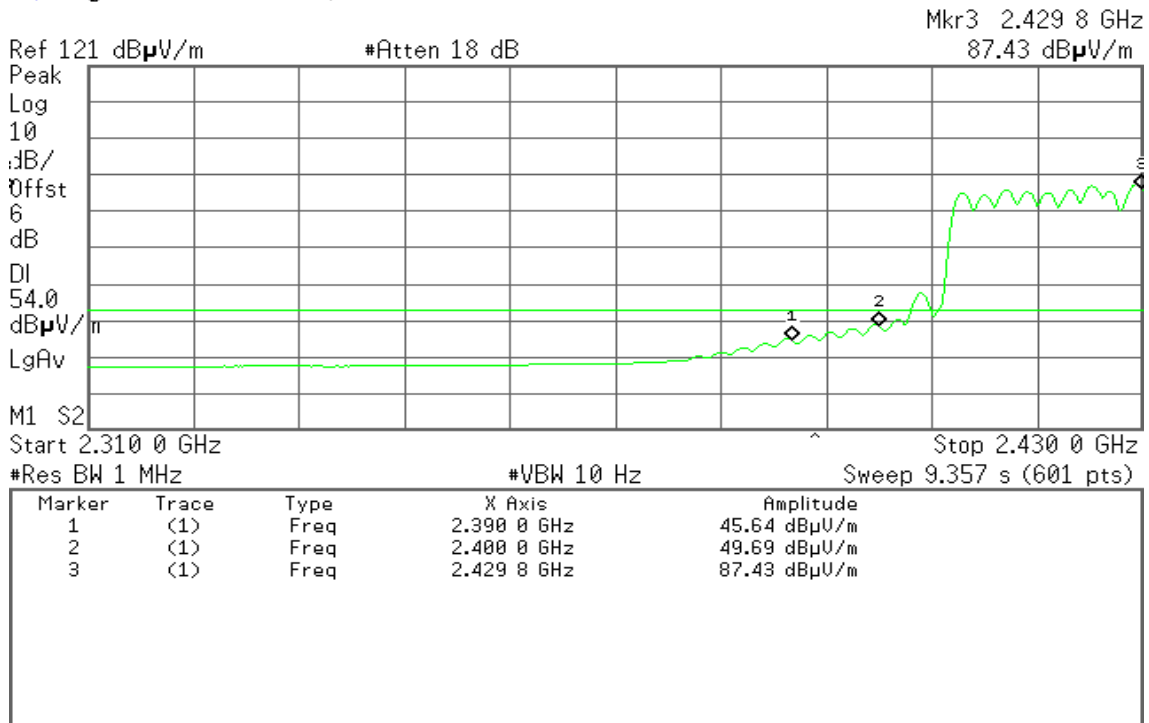



**Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)**


**Detector mode: Peak**

**Polarity: Vertical**

Agilent 10:20:38 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
62.04 dB $\mu$ V/m

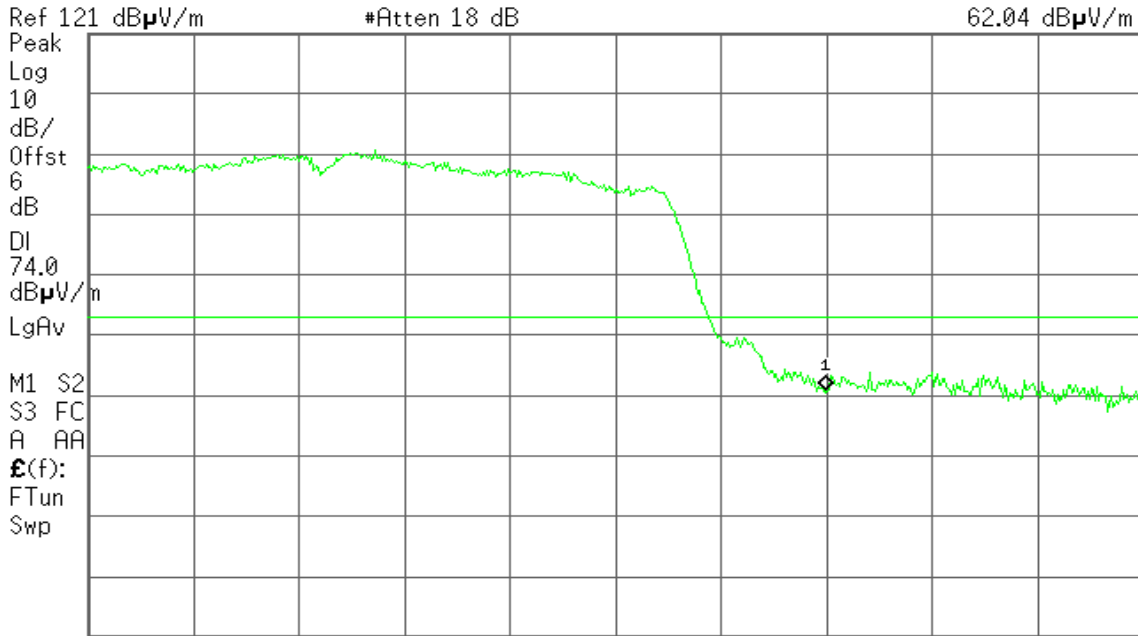

Start 2.445 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


**Detector mode: Average**

**Polarity: Vertical**

Agilent 10:21:00 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
46.34 dB $\mu$ V/m

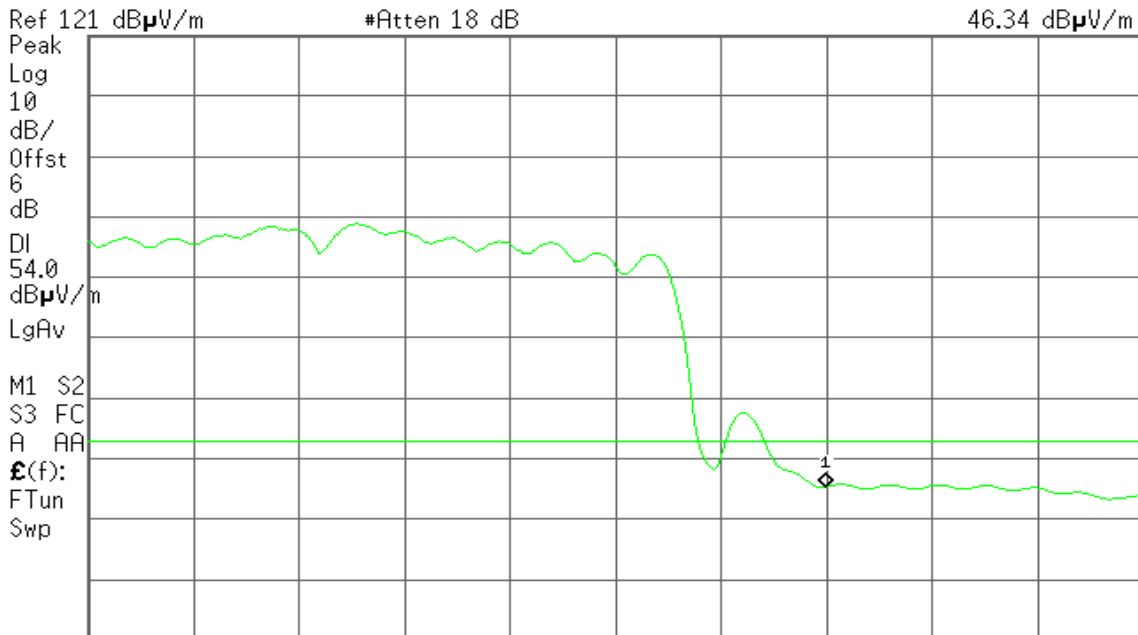

Start 2.445 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 4.289 s (601 pts)




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 10:27:35 6 Sep 2011

T

Mkr1 2.483 50 GHz  
65.75 dB $\mu$ V/m

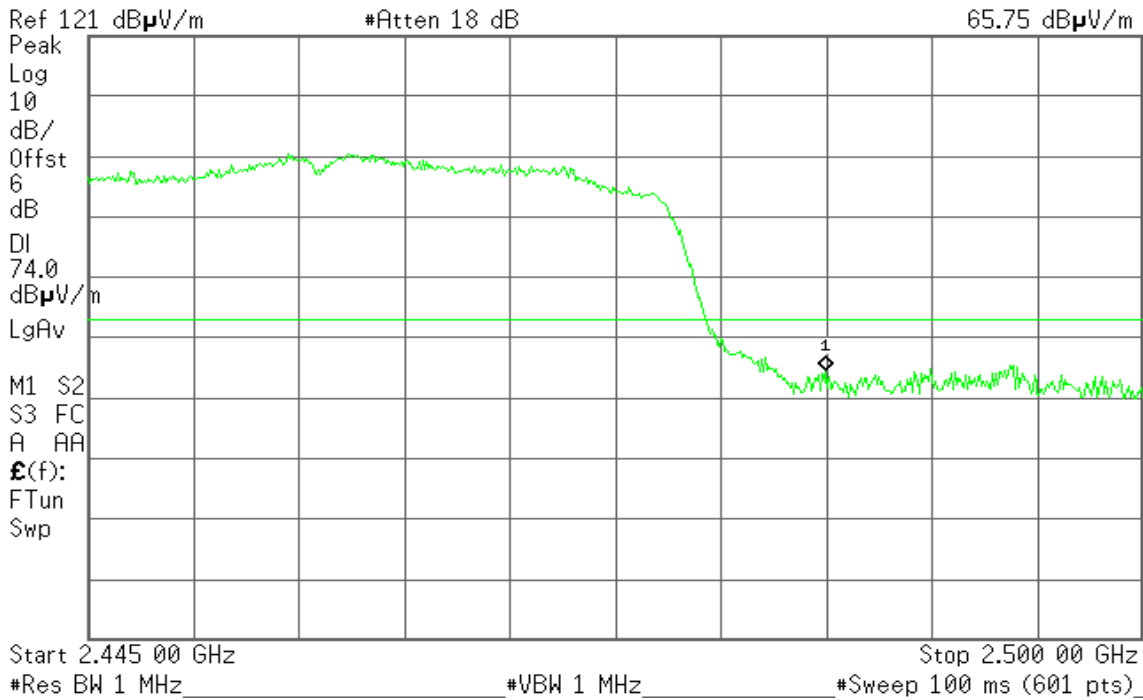


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 10:27:57 6 Sep 2011

T

Mkr1 2.483 50 GHz  
47.57 dB $\mu$ V/m

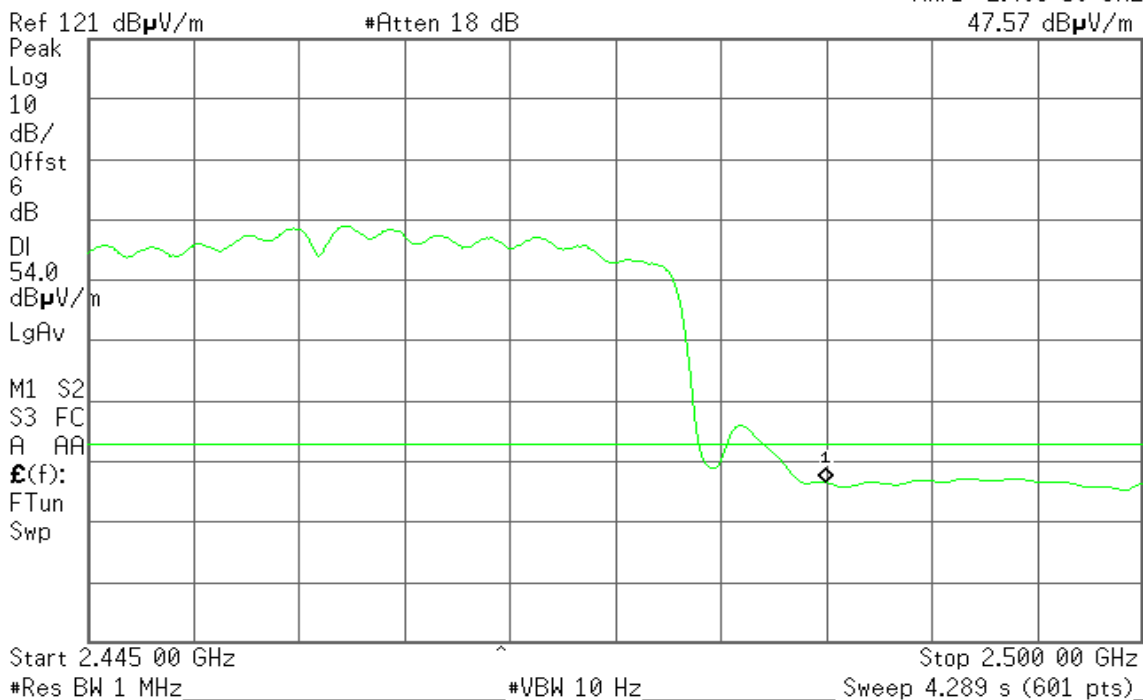



**For Dipole Antenna**


**Band Edges (IEEE 802.11b mode / CH Low)**

**Detector mode: Peak**

**Polarity: Vertical**

Agilent 10:02:03 7 Sep 2011

R T

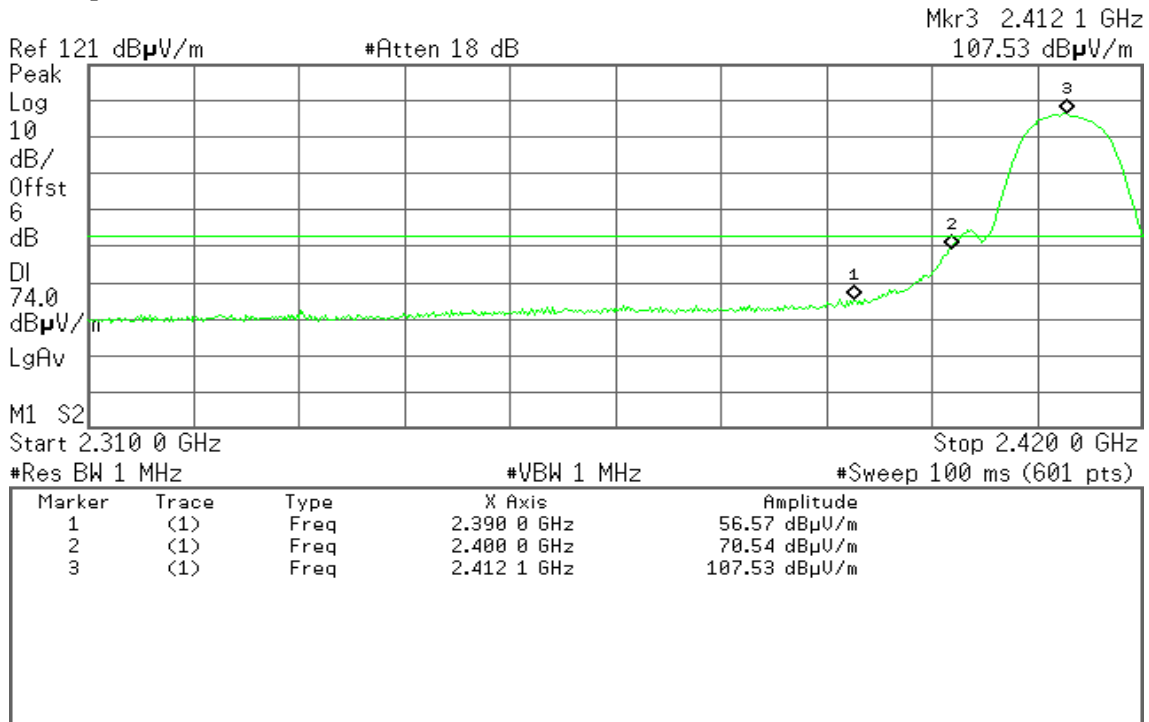


**Detector mode: Average**

**Polarity: Vertical**

Agilent 10:02:41 7 Sep 2011

R T

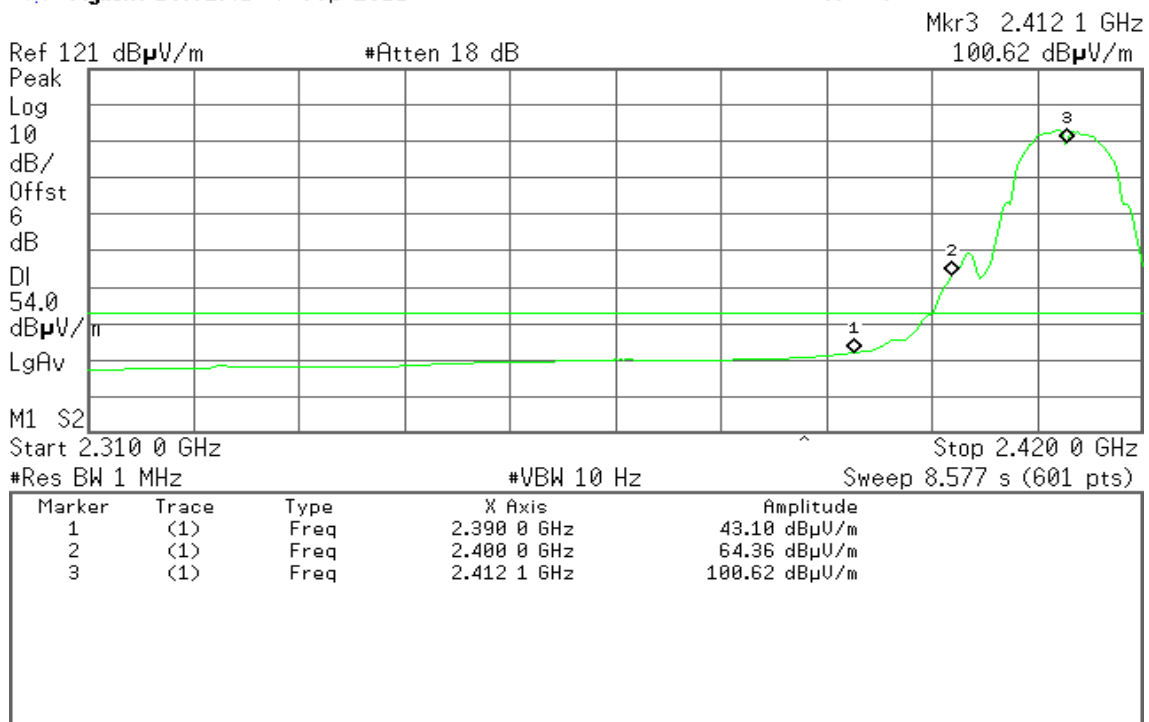




Detector mode: Peak

Polarity: Horizontal

Agilent 10:07:18 7 Sep 2011

R T

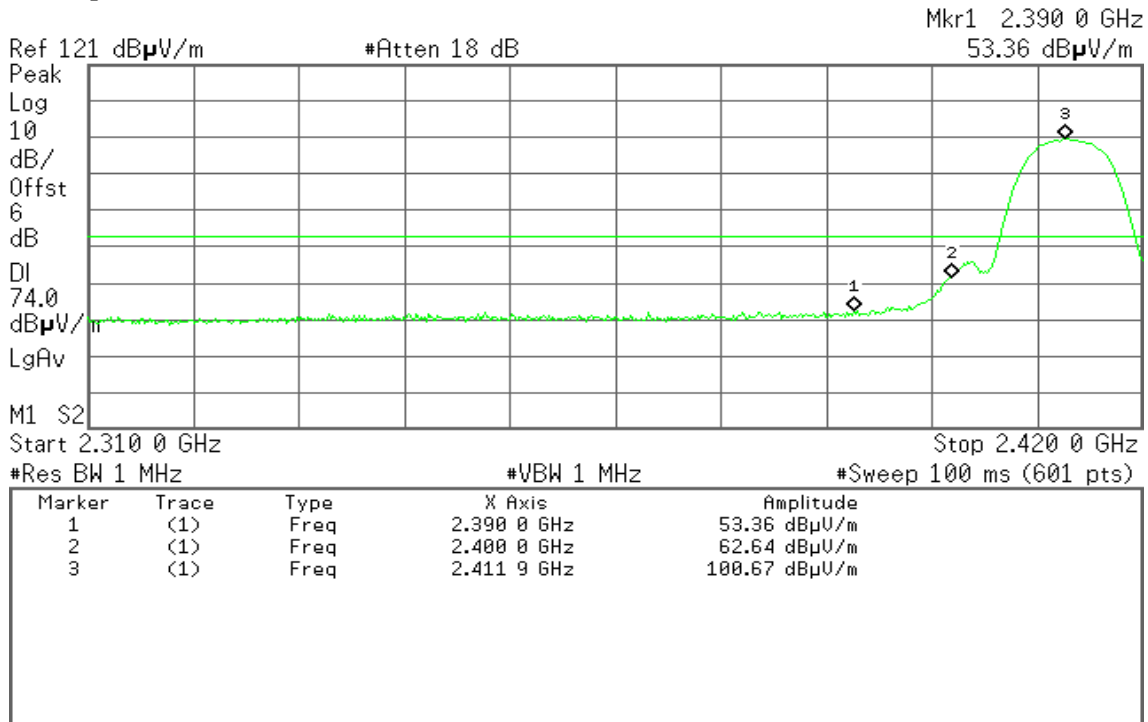


Detector mode: Average

Polarity: Horizontal

Agilent 10:07:52 7 Sep 2011

R T

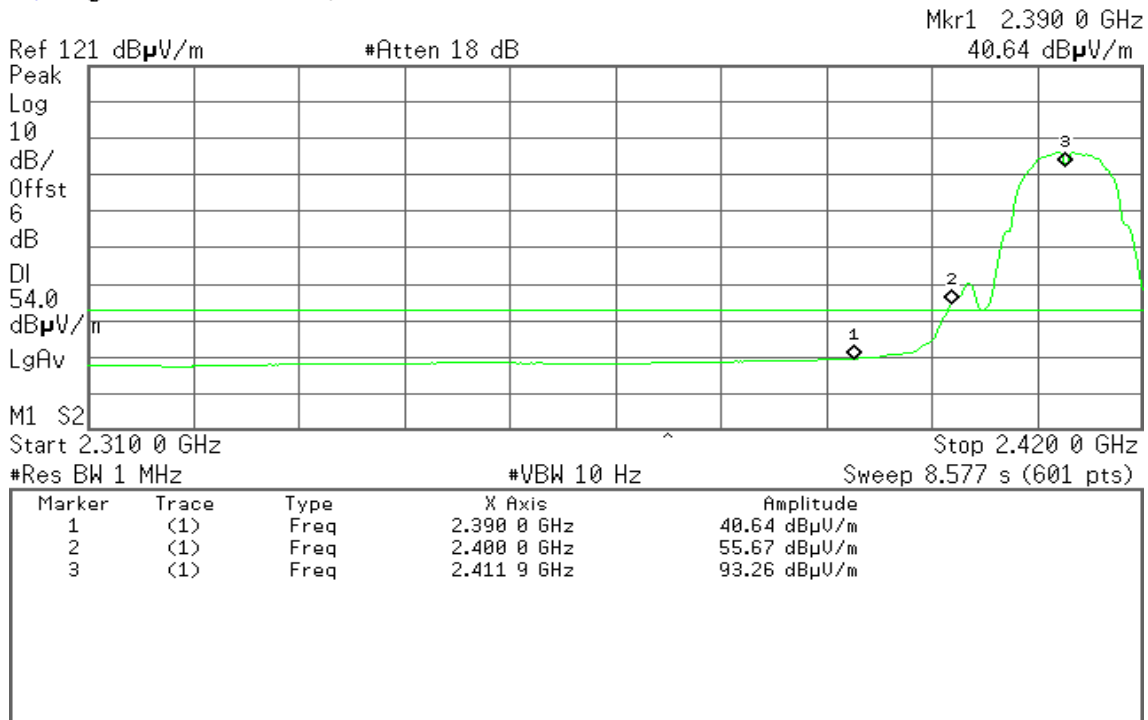





### Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 10:39:59 7 Sep 2011

R L

Mkr1 2.483 50 GHz  
54.86 dB $\mu$ V/m

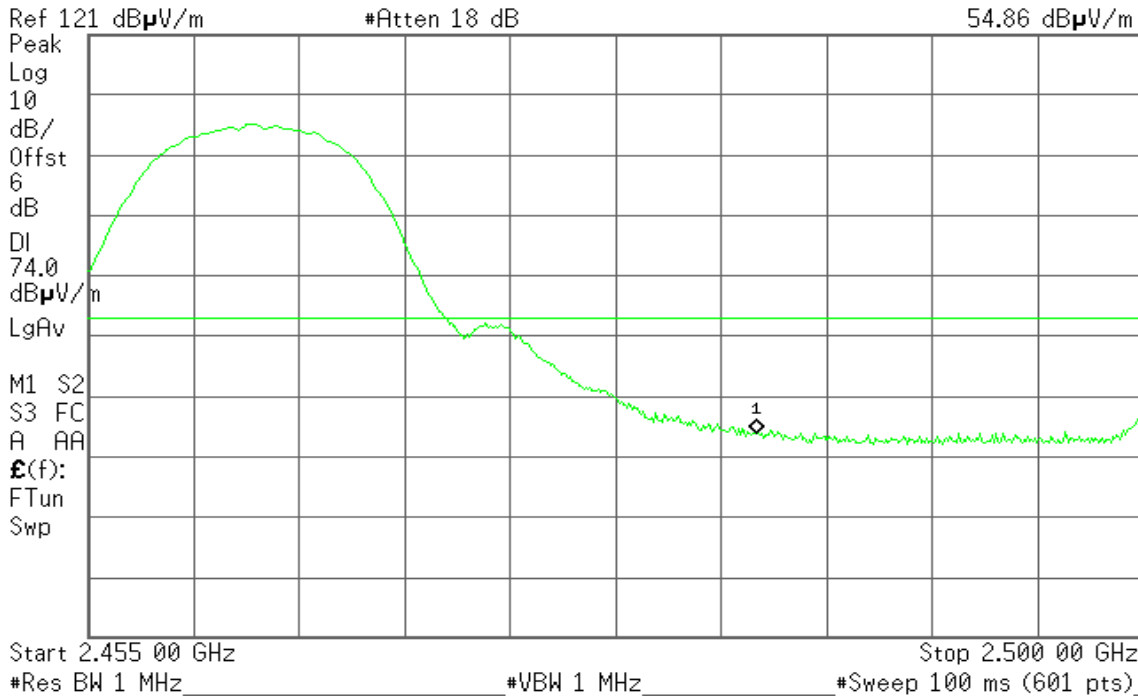


Detector mode: Average

Polarity: Vertical

Agilent 10:40:30 7 Sep 2011

R T

Mkr1 2.483 50 GHz  
42.08 dB $\mu$ V/m

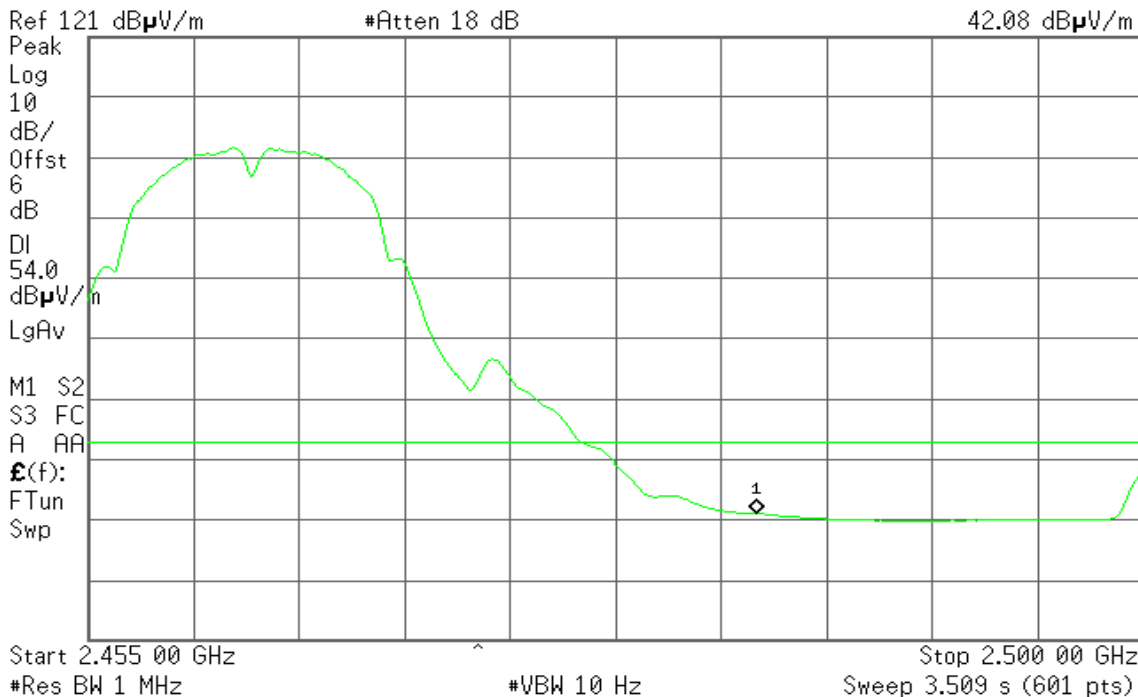




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 10:45:23 7 Sep 2011

R T

Mkr1 2.483 50 GHz  
52.47 dB $\mu$ V/m

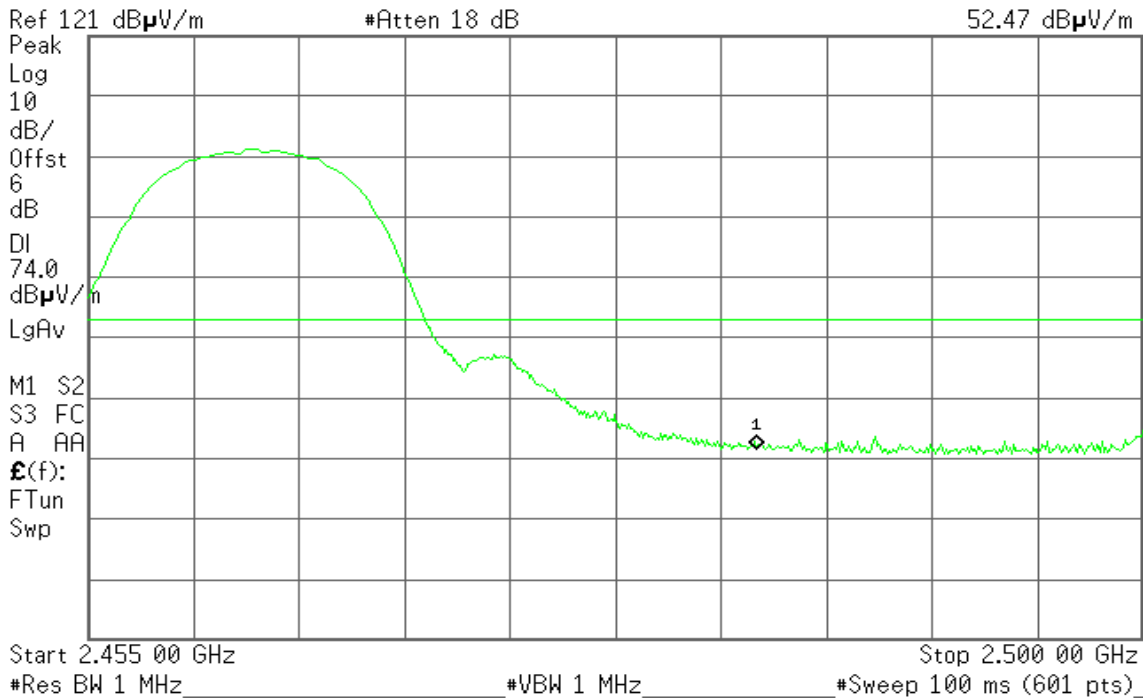


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 10:45:58 7 Sep 2011

R T

Mkr1 2.483 50 GHz  
41.01 dB $\mu$ V/m

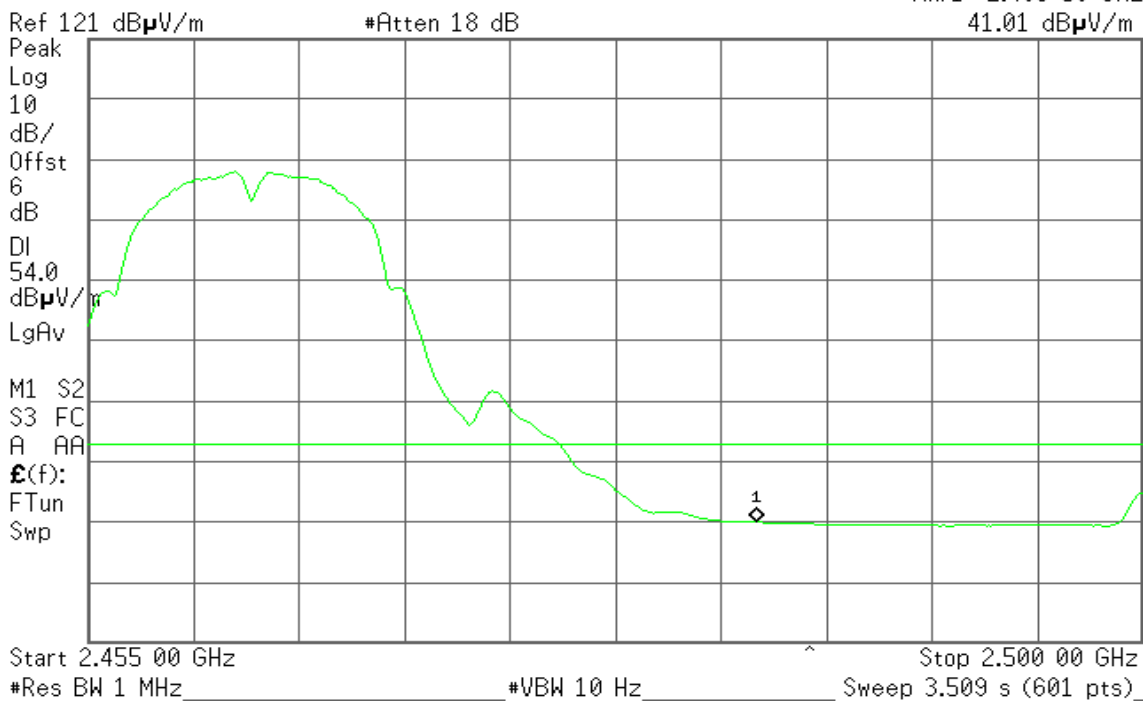




### Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 13:58:35 6 Sep 2011

T

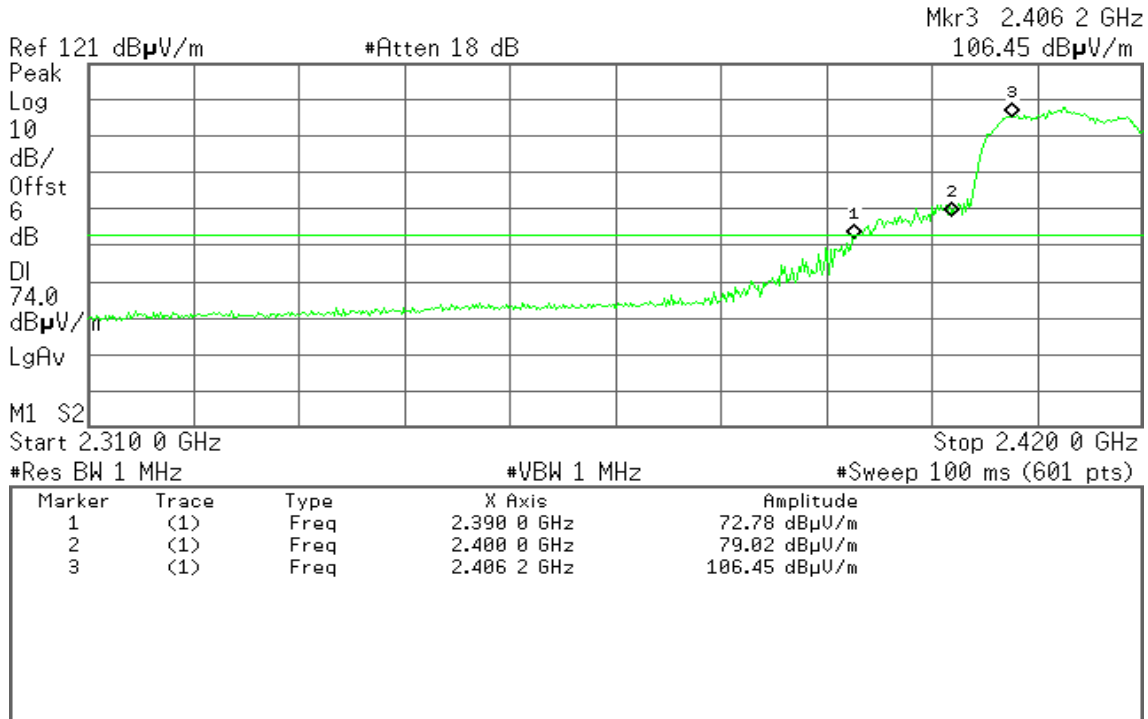


Detector mode: Average

Polarity: Vertical

Agilent 13:59:12 6 Sep 2011

T

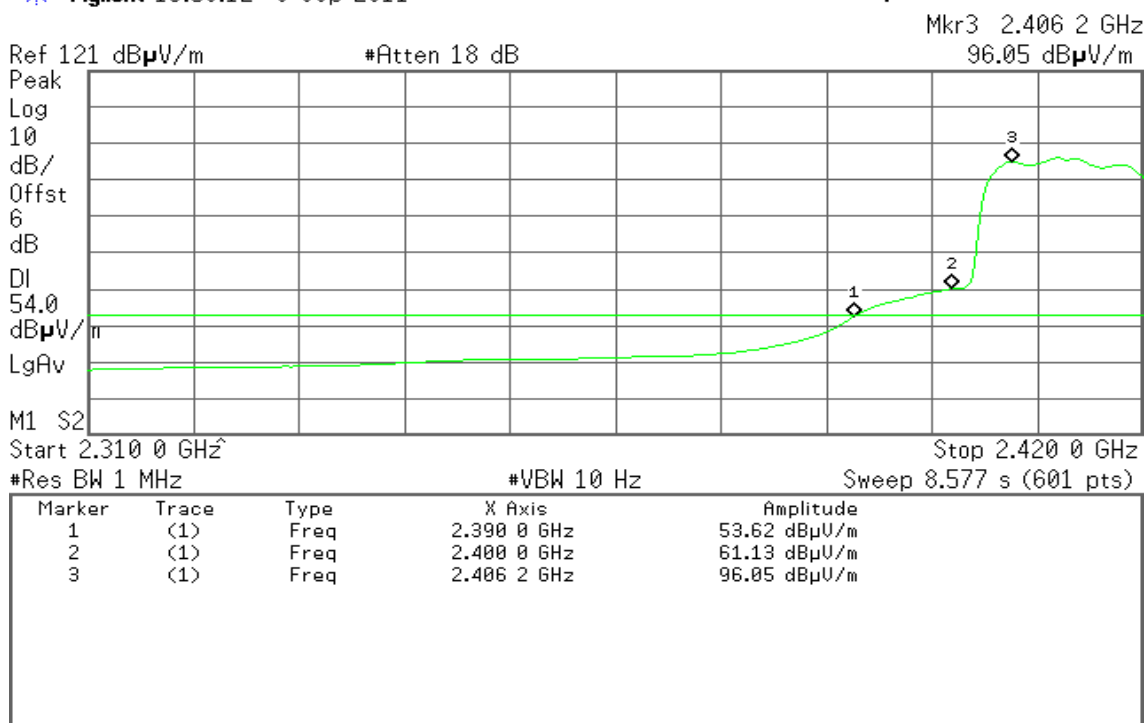




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 14:03:12 6 Sep 2011

R T

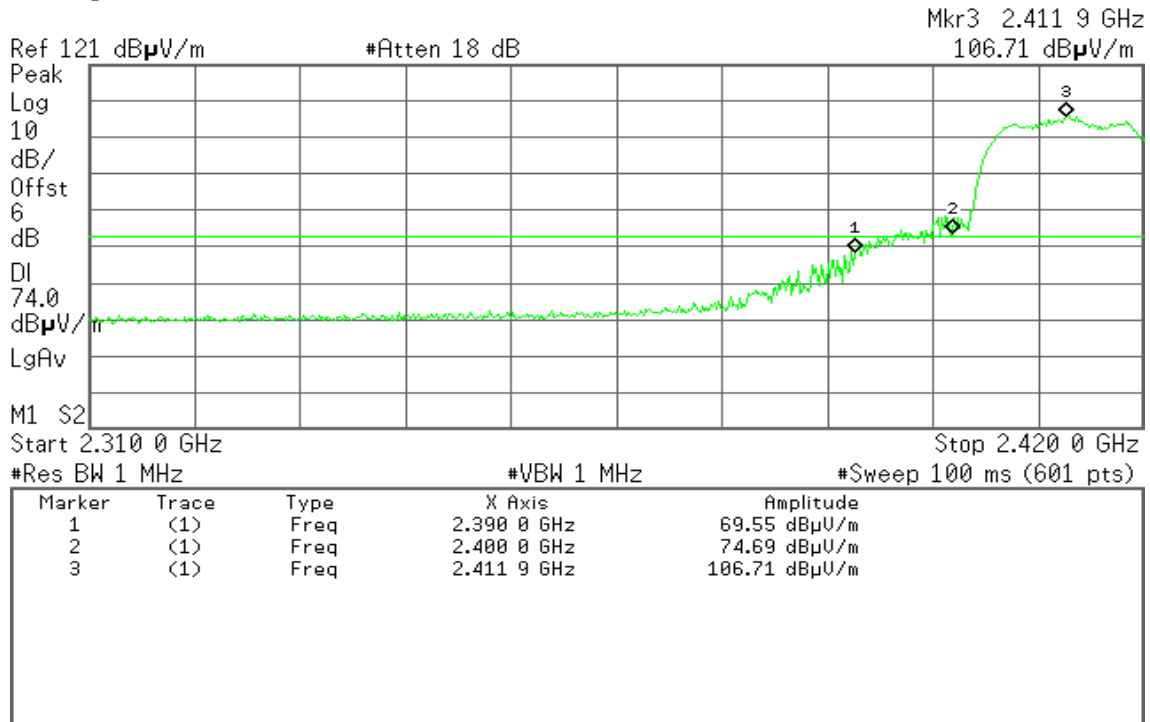


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 14:04:19 6 Sep 2011

R T

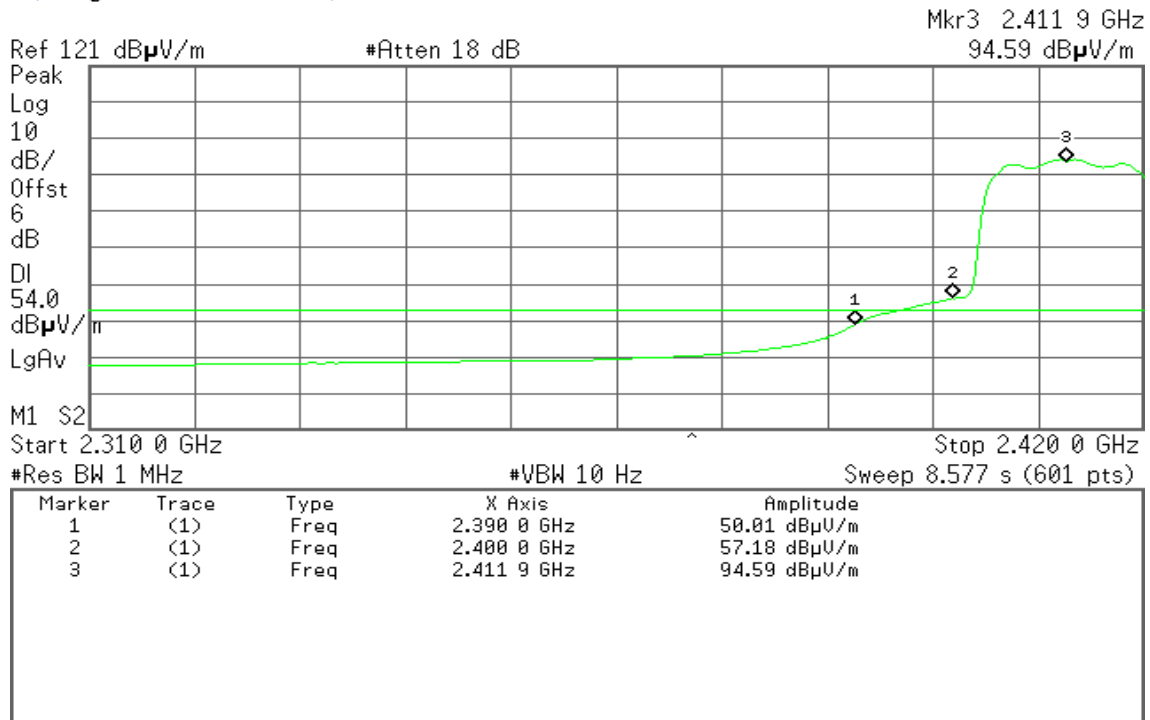



### Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 14:22:15 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
71.77 dB $\mu$ V/m

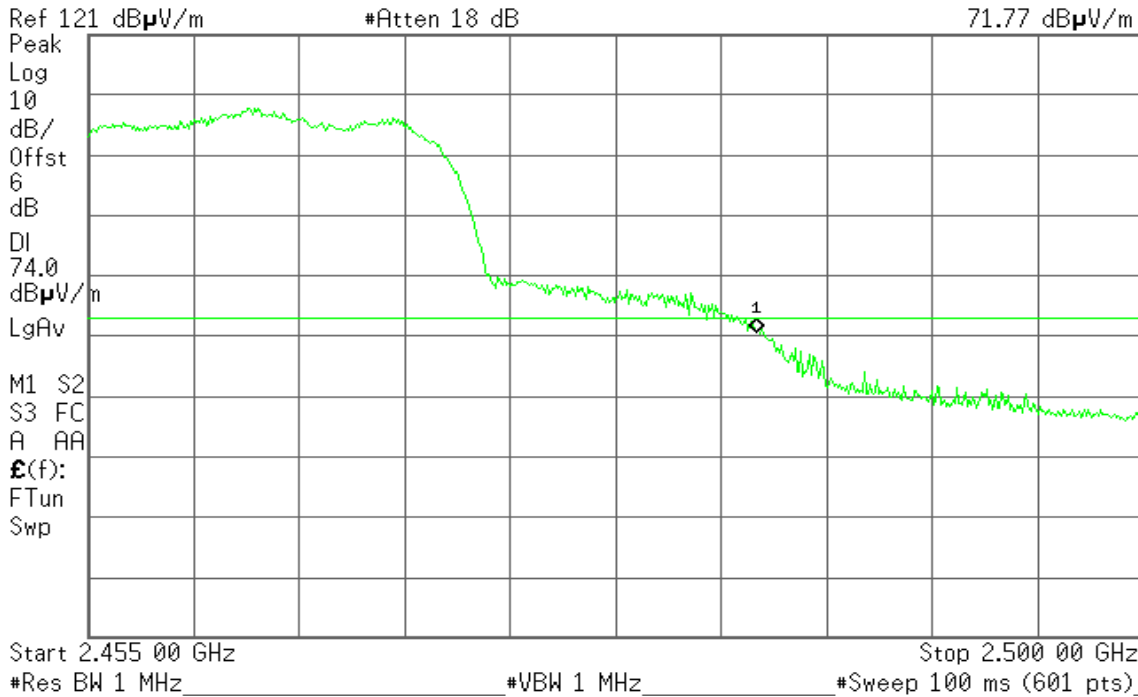


Detector mode: Average

Polarity: Vertical

Agilent 14:26:00 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
53.82 dB $\mu$ V/m

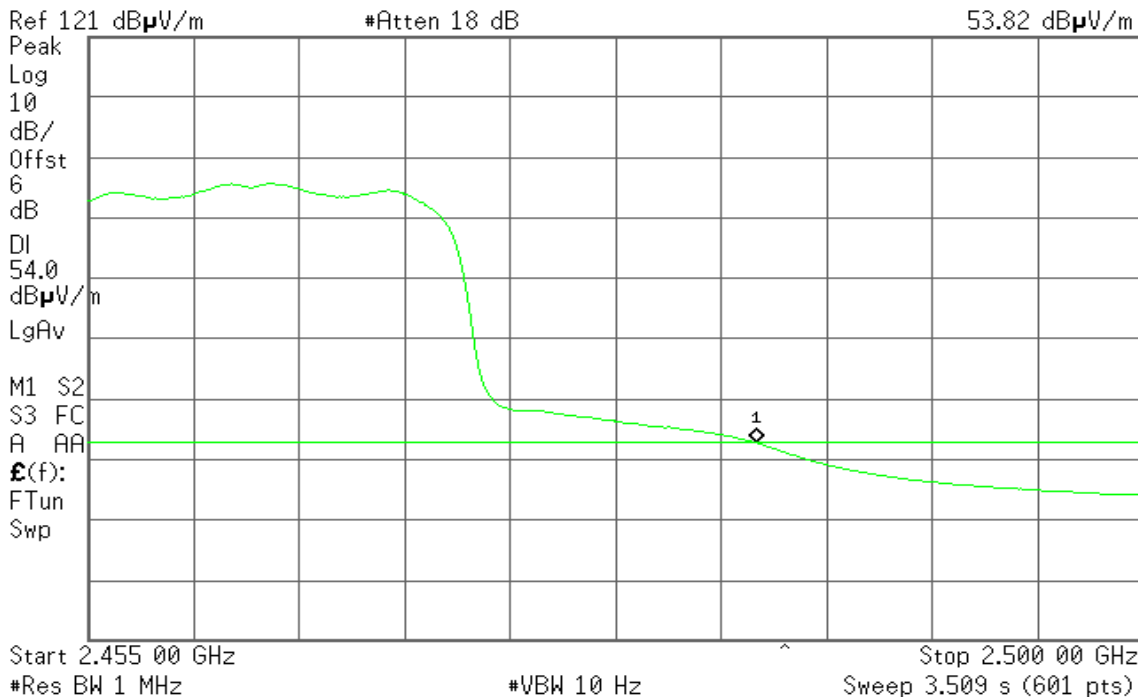




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 14:30:35 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
67.52 dB $\mu$ V/m

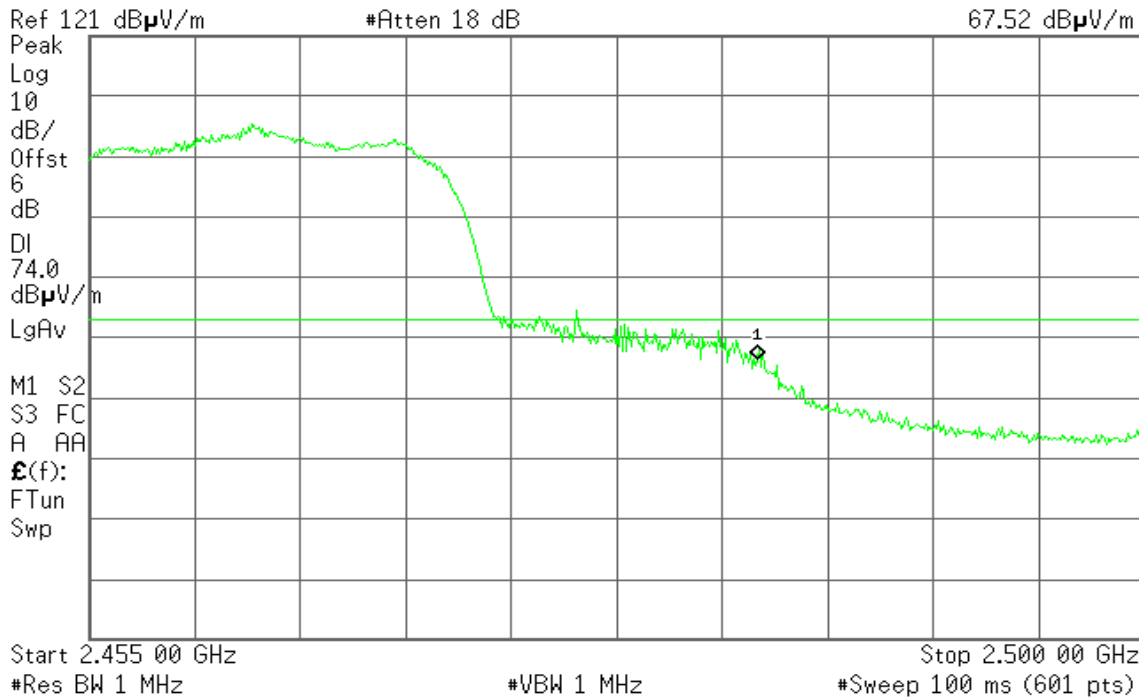


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 14:31:02 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
50.36 dB $\mu$ V/m

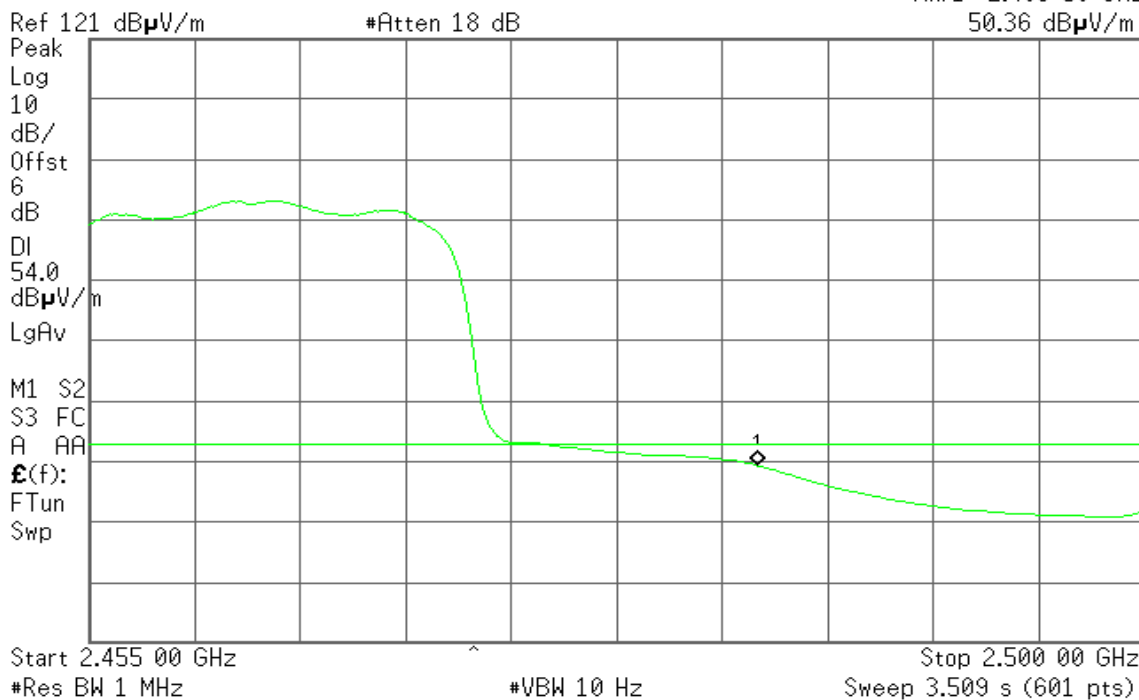




**Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)**

**Detector mode: Peak**

**Polarity: Vertical**

Agilent 13:36:27 6 Sep 2011

R T

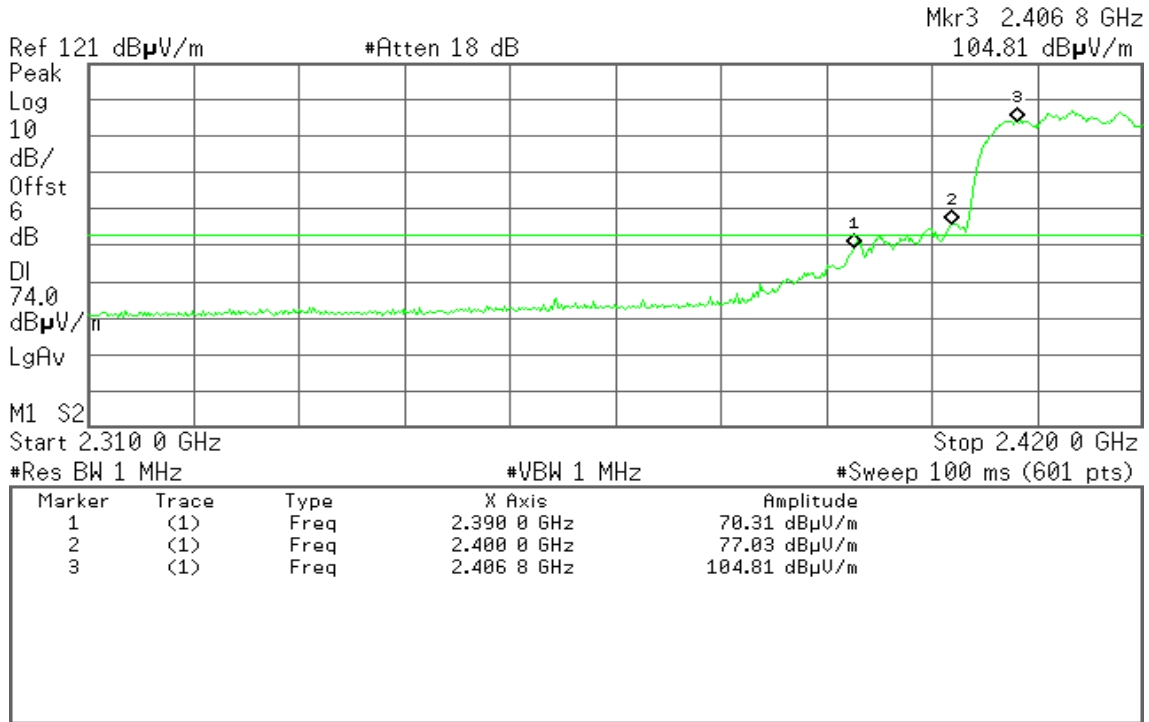


**Detector mode: Average**

**Polarity: Vertical**

Agilent 13:36:55 6 Sep 2011

R T

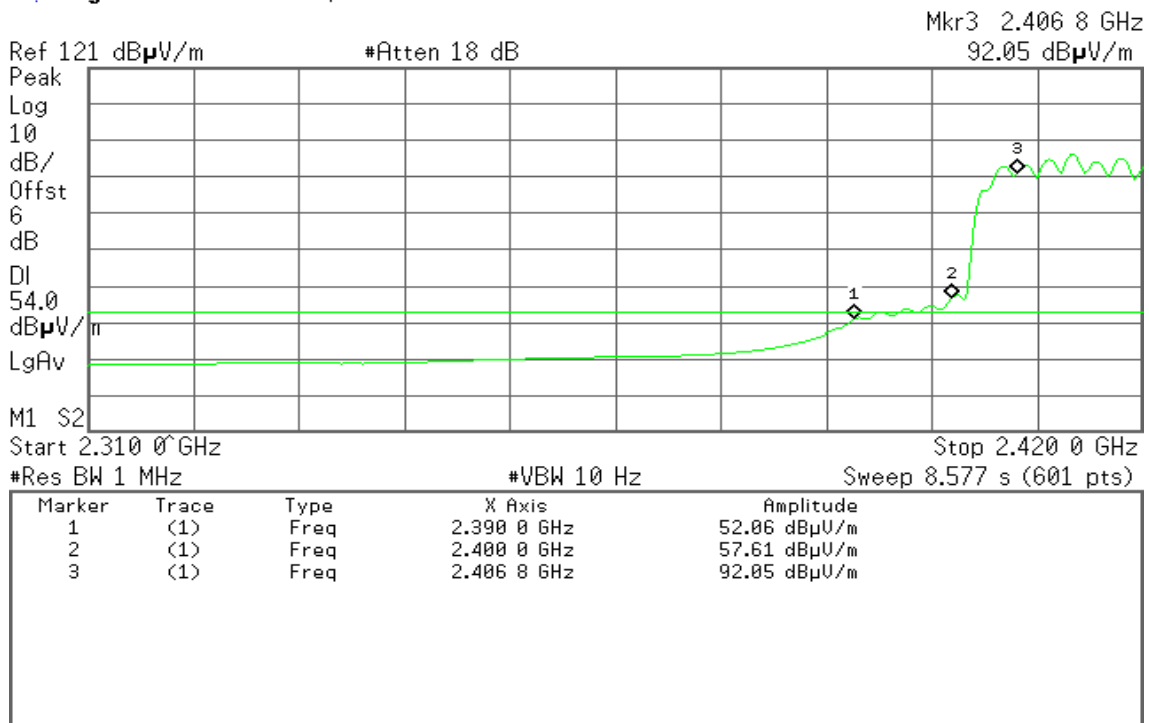




Detector mode: Peak

Polarity: Horizontal

Agilent 19:58:17 31 Aug 2011

T

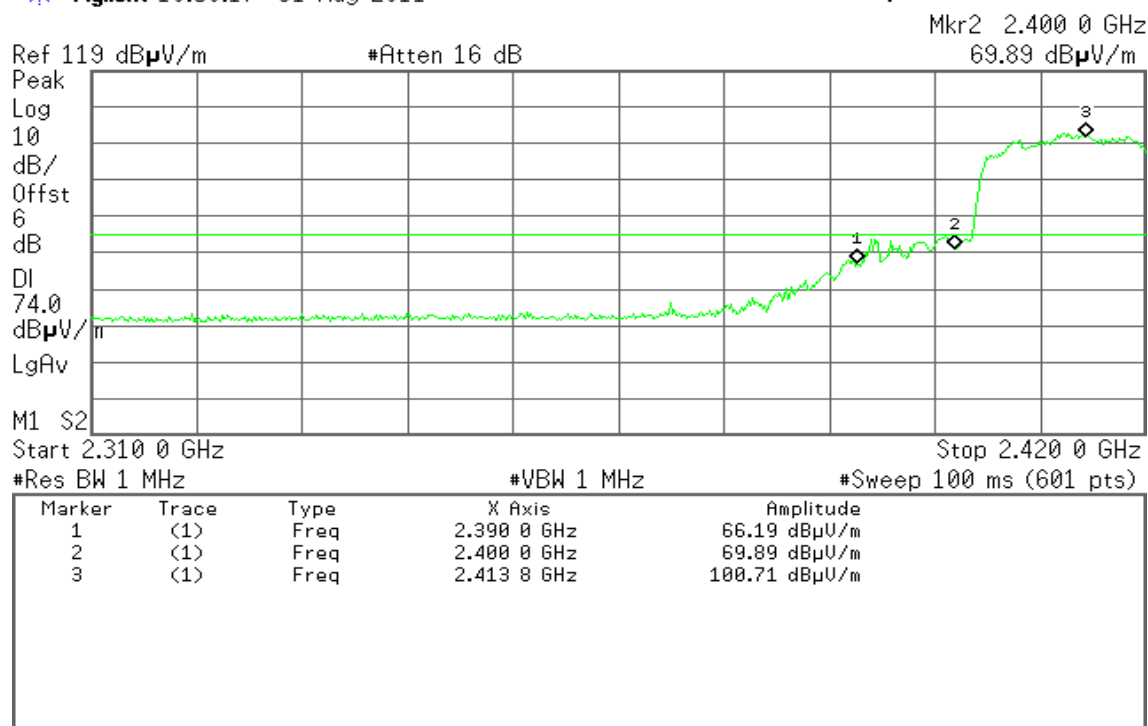


Detector mode: Average

Polarity: Horizontal

Agilent 19:58:47 31 Aug 2011

T

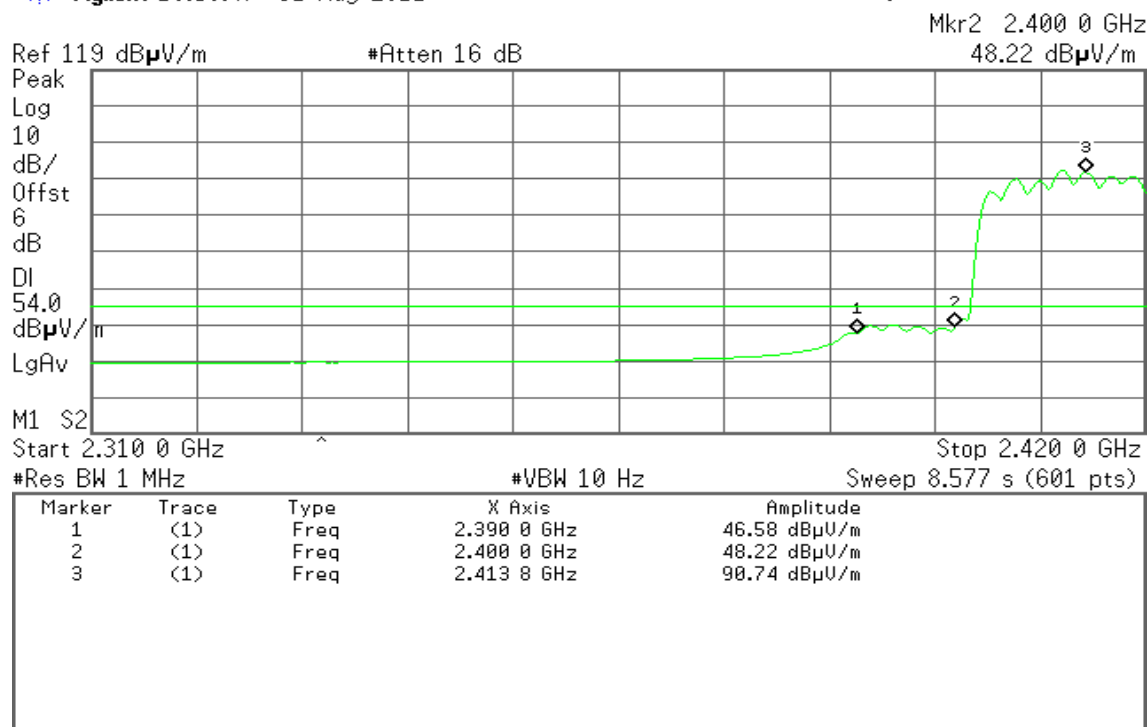





**Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)**


**Detector mode: Peak**

**Polarity: Vertical**

Agilent 13:46:00 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
67.53 dB $\mu$ V/m

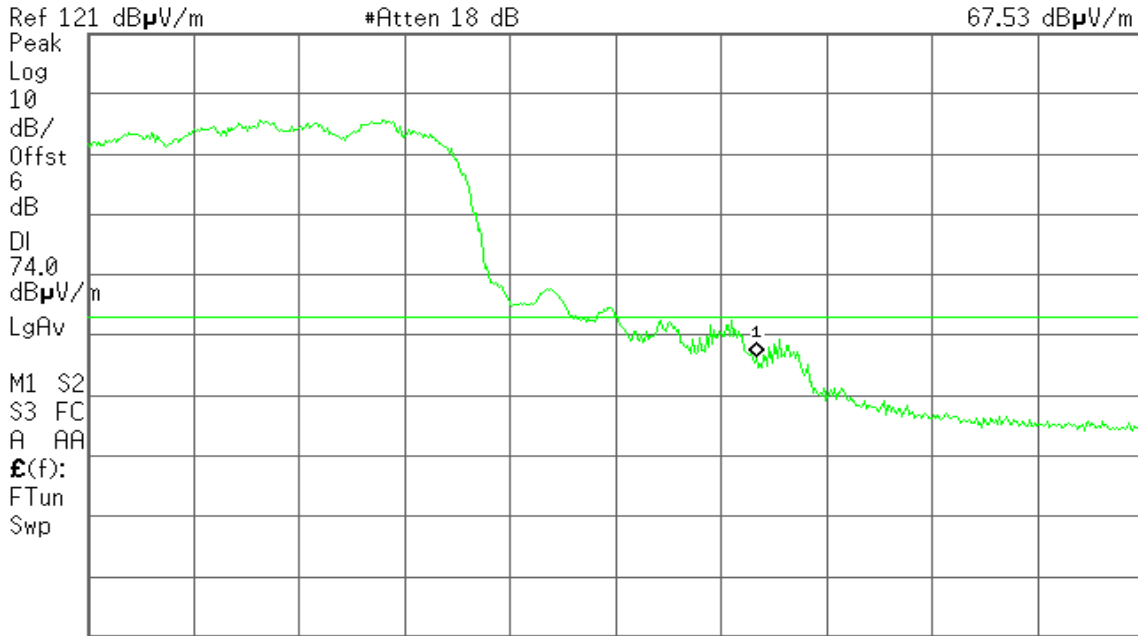

Start 2.455 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


**Detector mode: Average**

**Polarity: Vertical**

Agilent 13:46:44 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
51.52 dB $\mu$ V/m

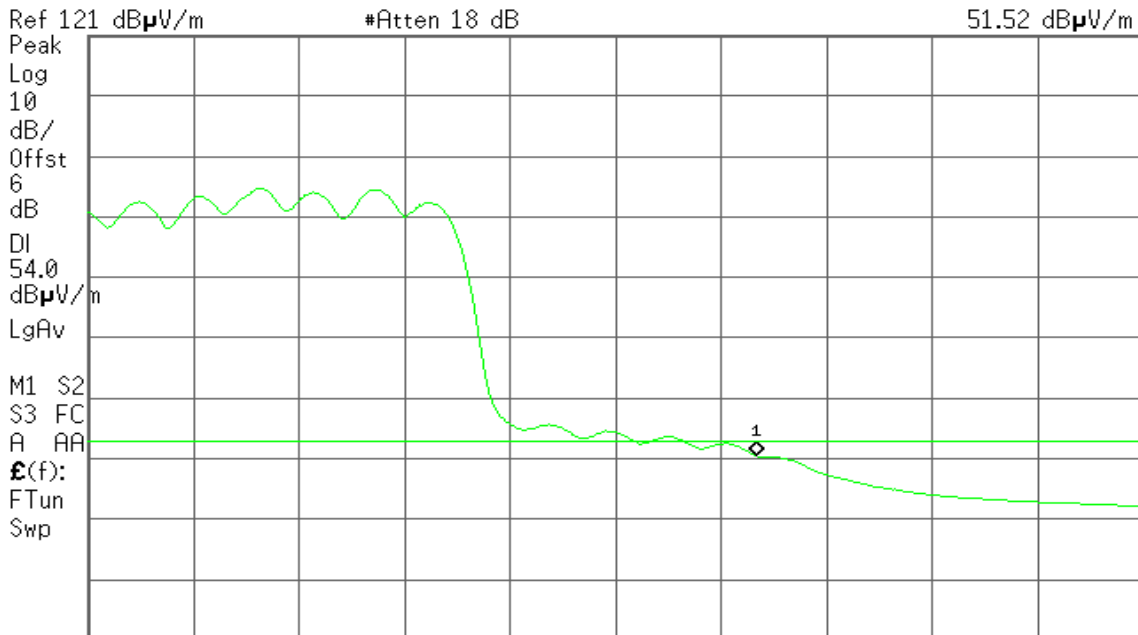

Start 2.455 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 3.509 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 19:41:49 31 Aug 2011

R T

Mkr1 2.483 50 GHz  
65.34 dB $\mu$ V/m

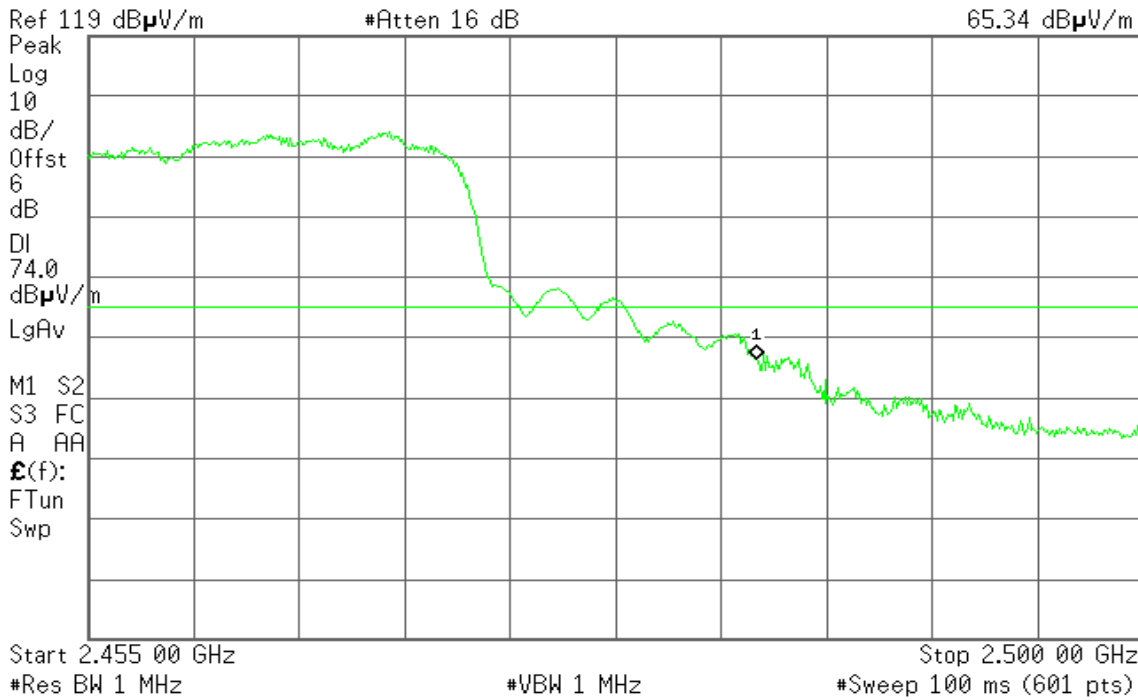


Detector mode: Average

Polarity: Horizontal

Agilent 19:42:11 31 Aug 2011

R T

Mkr1 2.483 50 GHz  
48.49 dB $\mu$ V/m

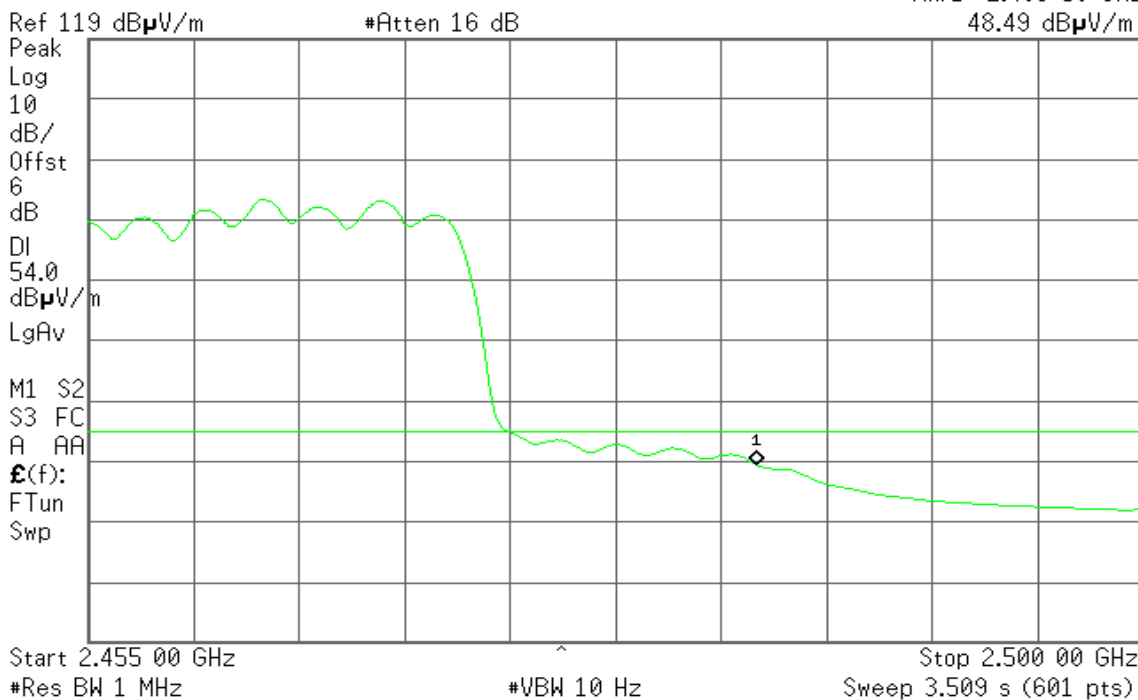




**Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)**

**Detector mode: Peak**

**Polarity: Vertical**

Agilent 11:25:24 6 Sep 2011

T

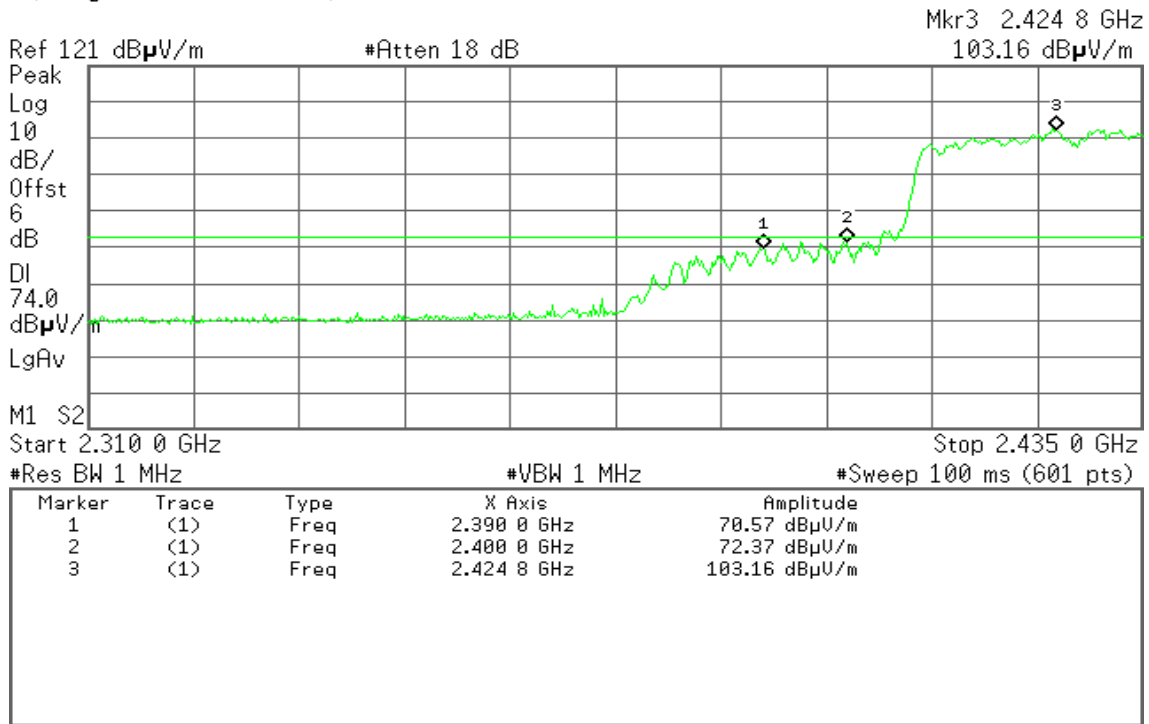


**Detector mode: Average**

**Polarity: Vertical**

Agilent 11:26:02 6 Sep 2011

T

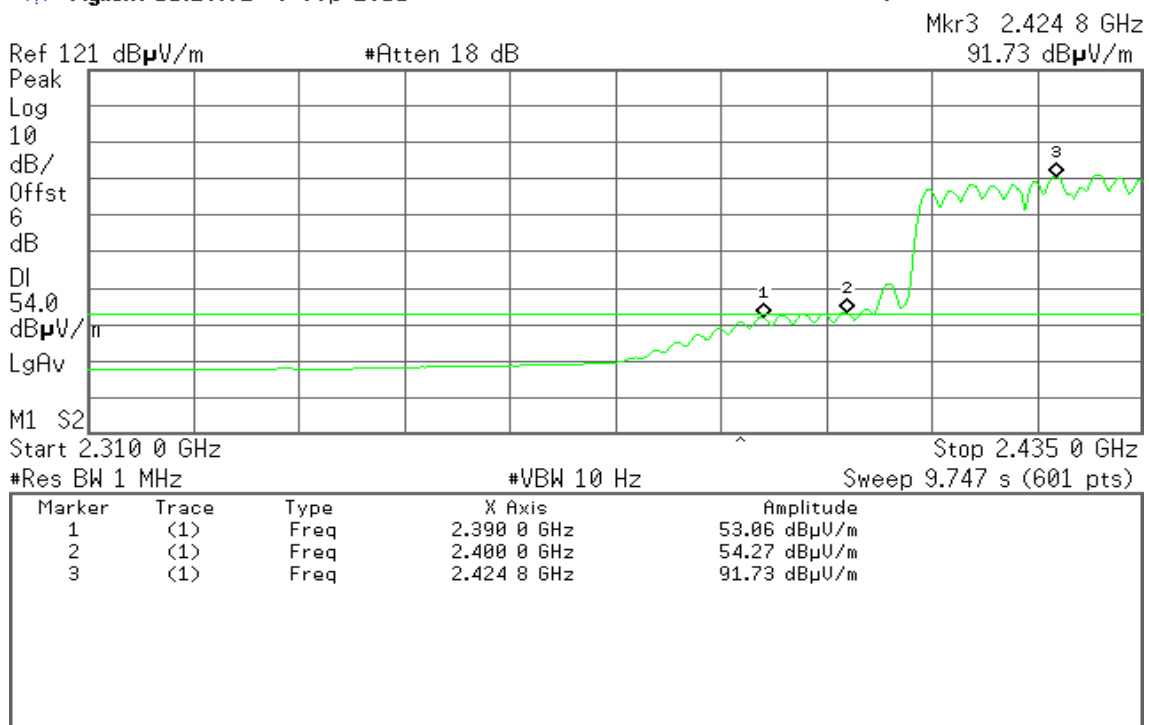




Detector mode: Peak

Polarity: Horizontal

Agilent 11:12:54 6 Sep 2011

R T

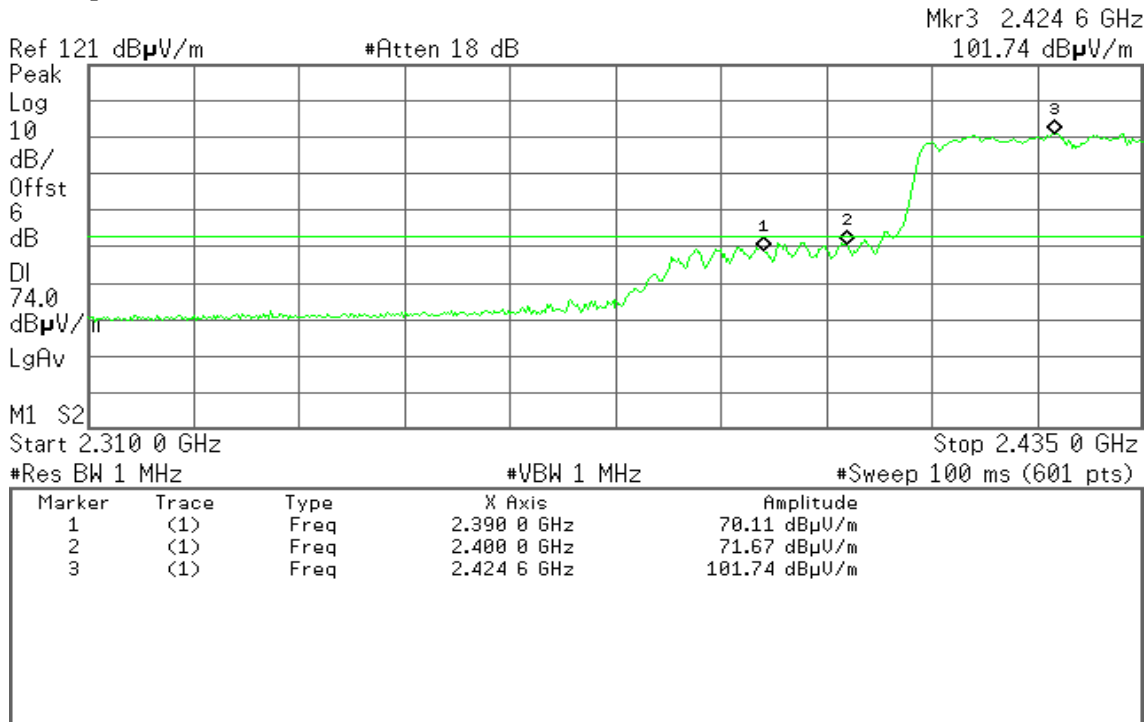


Detector mode: Average

Polarity: Horizontal

Agilent 11:10:37 6 Sep 2011

R T

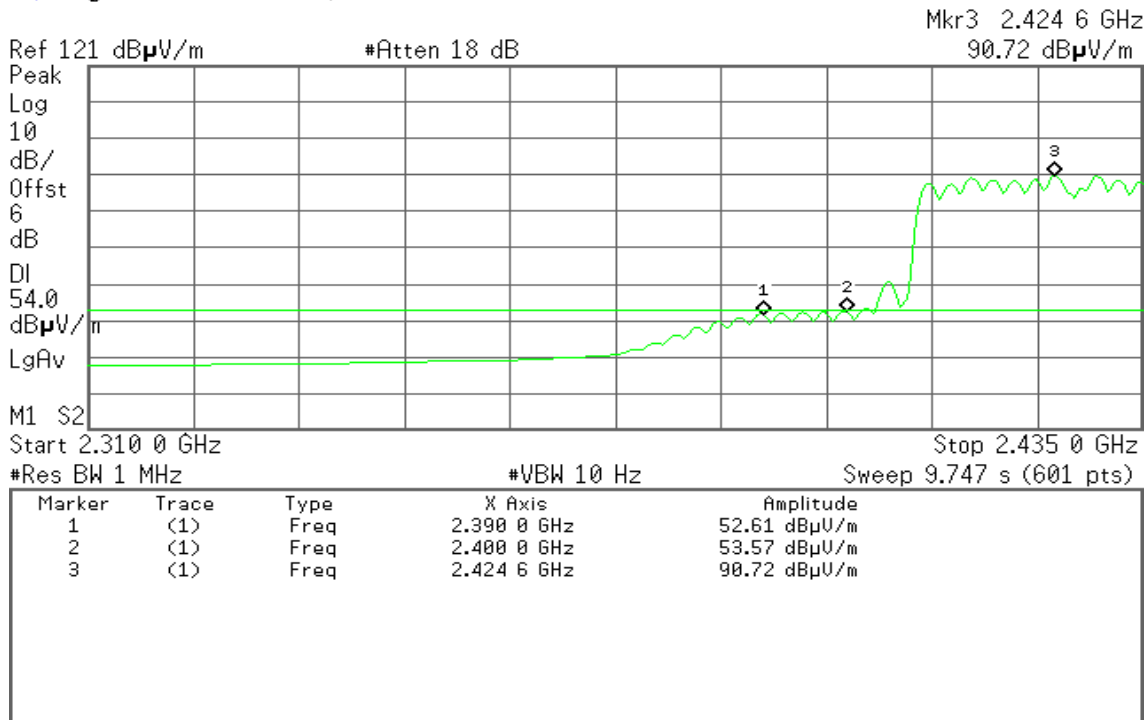



### Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 11:54:10 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
66.02 dB $\mu$ V/m

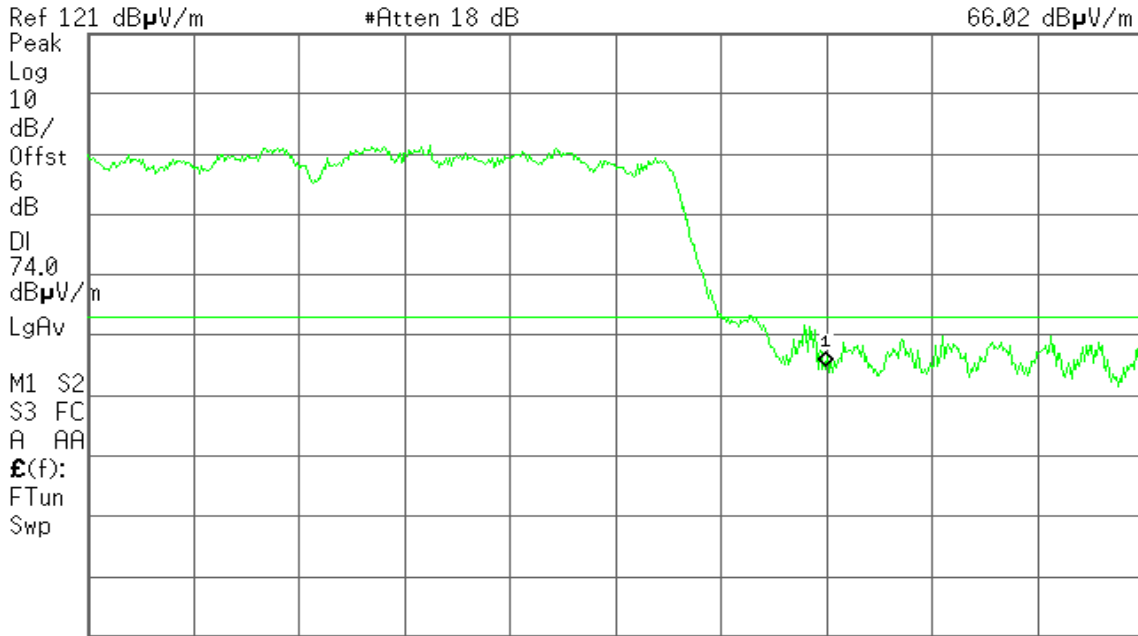

Start 2.445 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 11:53:42 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
51.18 dB $\mu$ V/m

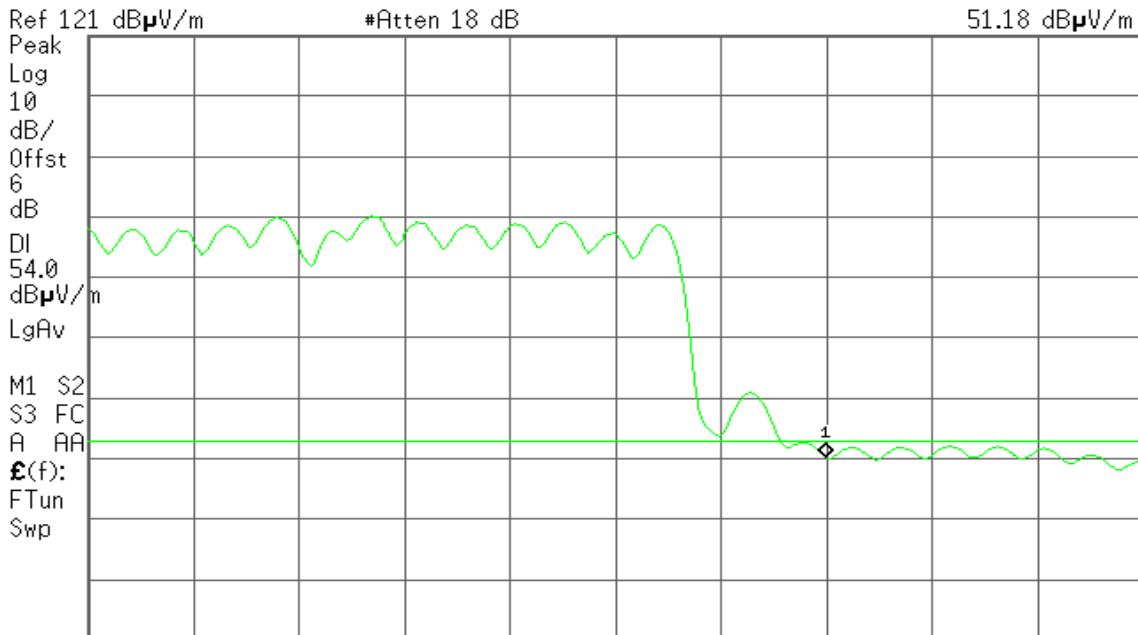

Start 2.445 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 4.289 s (601 pts)




**Detector mode: Peak**

**Polarity: Horizontal**

Agilent 11:41:06 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
63.65 dB $\mu$ V/m

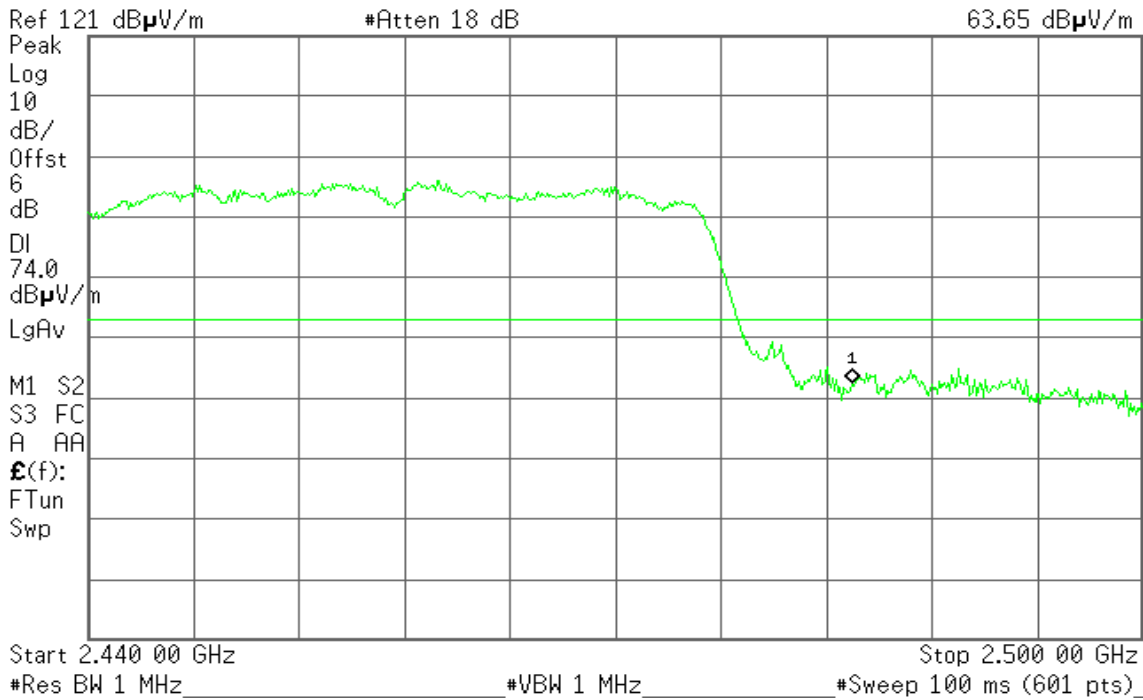


**Detector mode: Average**

**Polarity: Horizontal**

Agilent 11:41:29 6 Sep 2011

R T

Mkr1 2.483 50 GHz  
46.01 dB $\mu$ V/m

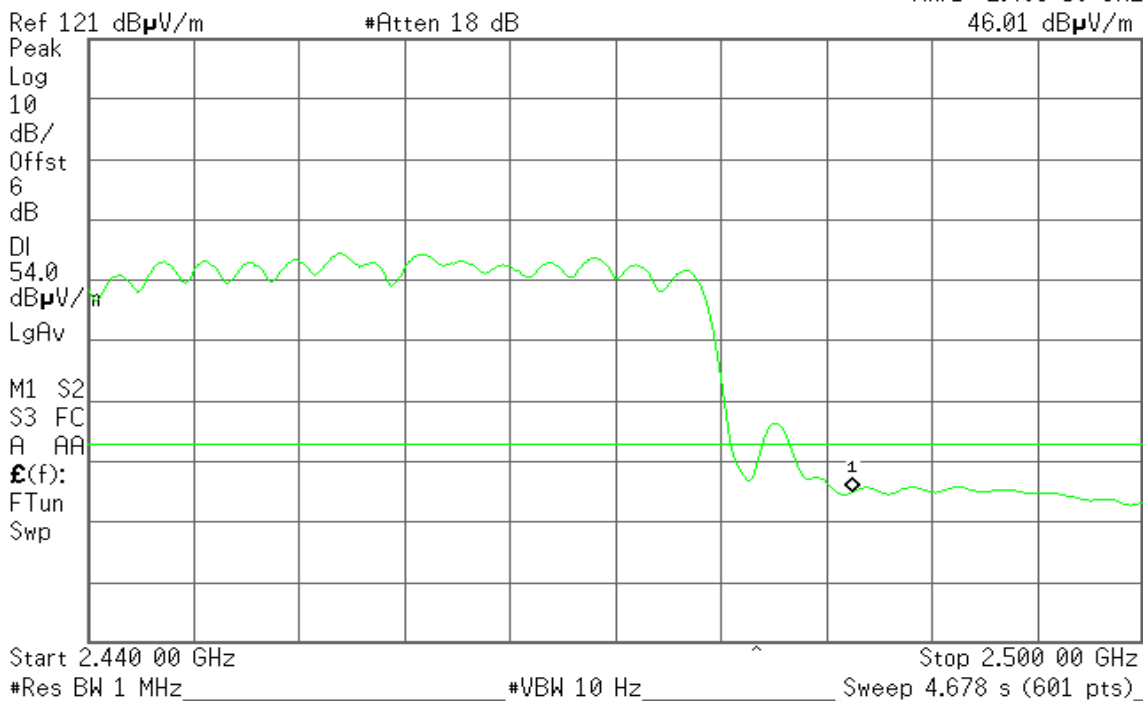




## 7.5 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration

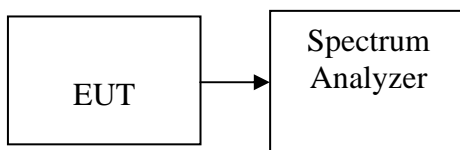

### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.



## TEST RESULTS

*No non-compliance noted*

### Test Data

#### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-2.76	8.00	PASS
Mid	2442	-5.47		PASS
High	2462	-6.39		PASS

#### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-8.02	8.00	PASS
Mid	2442	-6.09		PASS
High	2462	-12.16		PASS

#### Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-10.76	-11.30	-8.01	8.00	PASS
Mid	2442	-10.69	-10.44	-7.55		PASS
High	2462	-11.11	-11.25	-8.17		PASS

#### Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-14.32	-13.42	-10.84	8.00	PASS
Mid	2442	-14.29	-13.16	-10.68		PASS
High	2452	-15.74	-16.66	-13.17		PASS

**Remark:** Total PPSD (dBm) =  $10 * \text{LOG}(10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 1 PPSD} / 10})$






**Test Plot**

IEEE 802.11b mode


PPSD (CH Low)

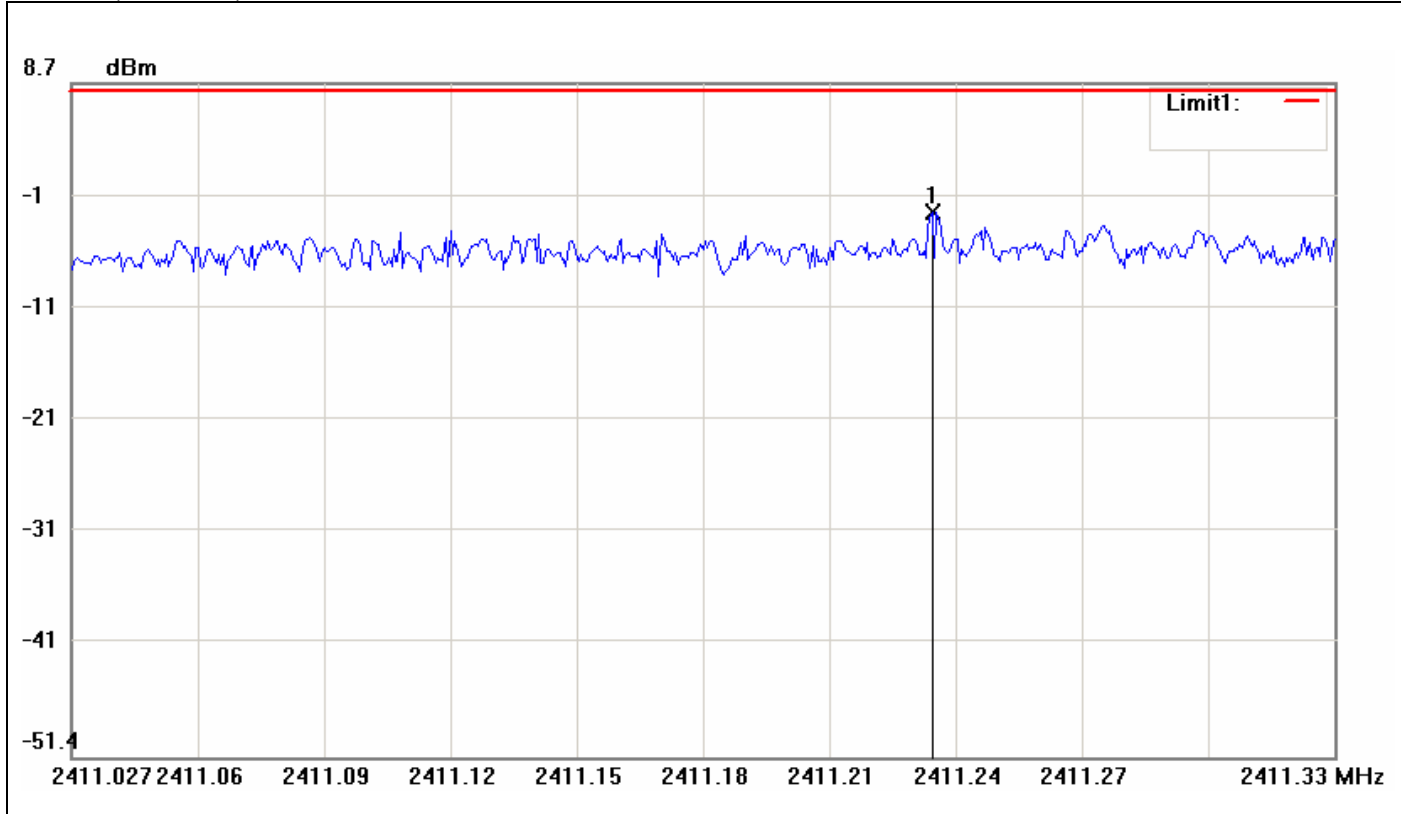

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2411.2313	-2.76	8.00	-10.76




PPSD (CH Mid)

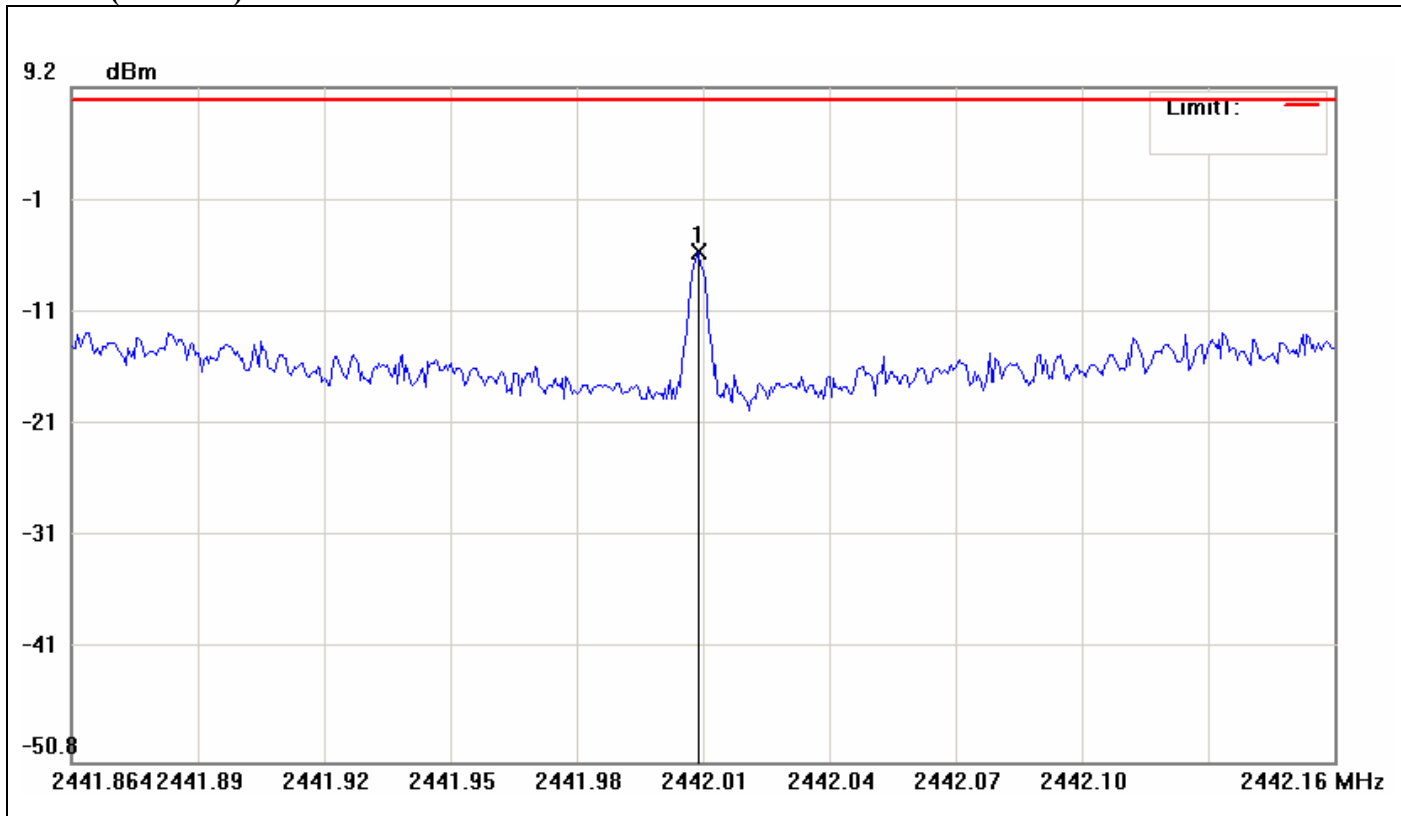

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2442.0132	-5.47	8.00	-13.47



PPSD (CH High)

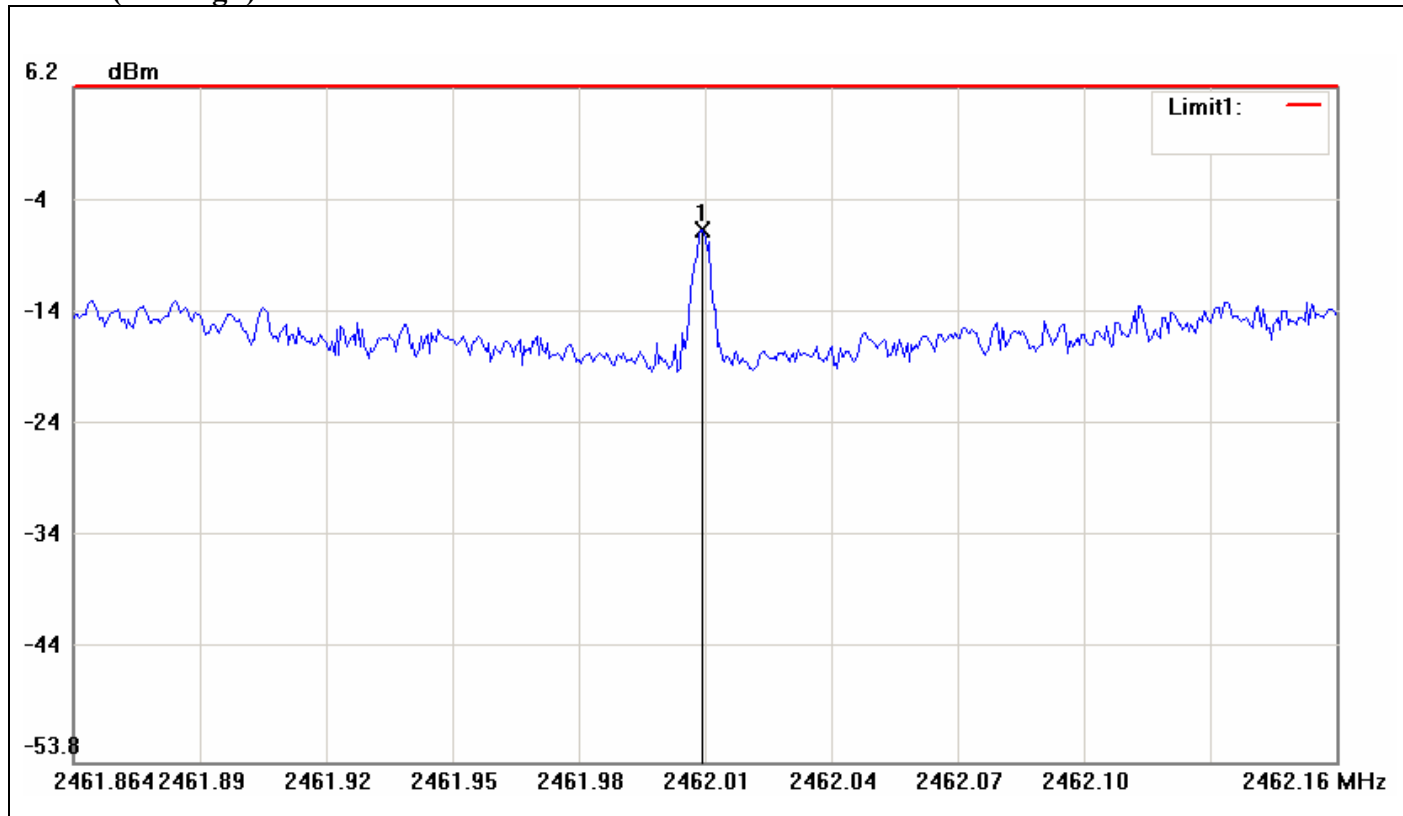


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2462.0136	-6.39	8.00	-14.39



IEEE 802.11g mode


PPSD (CH Low)

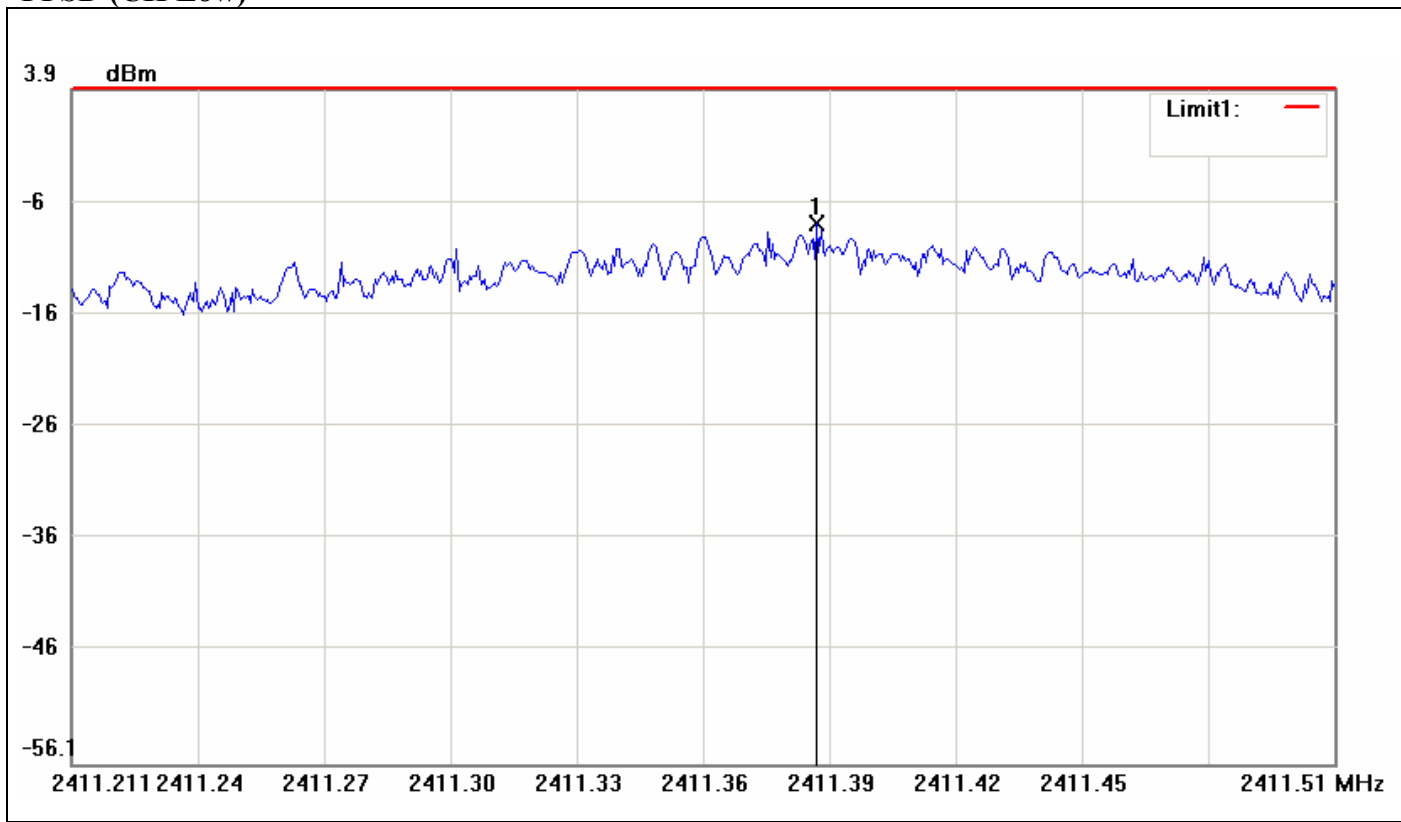

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2411.3881	-8.02	8.00	-16.02




PPSD (CH Mid)

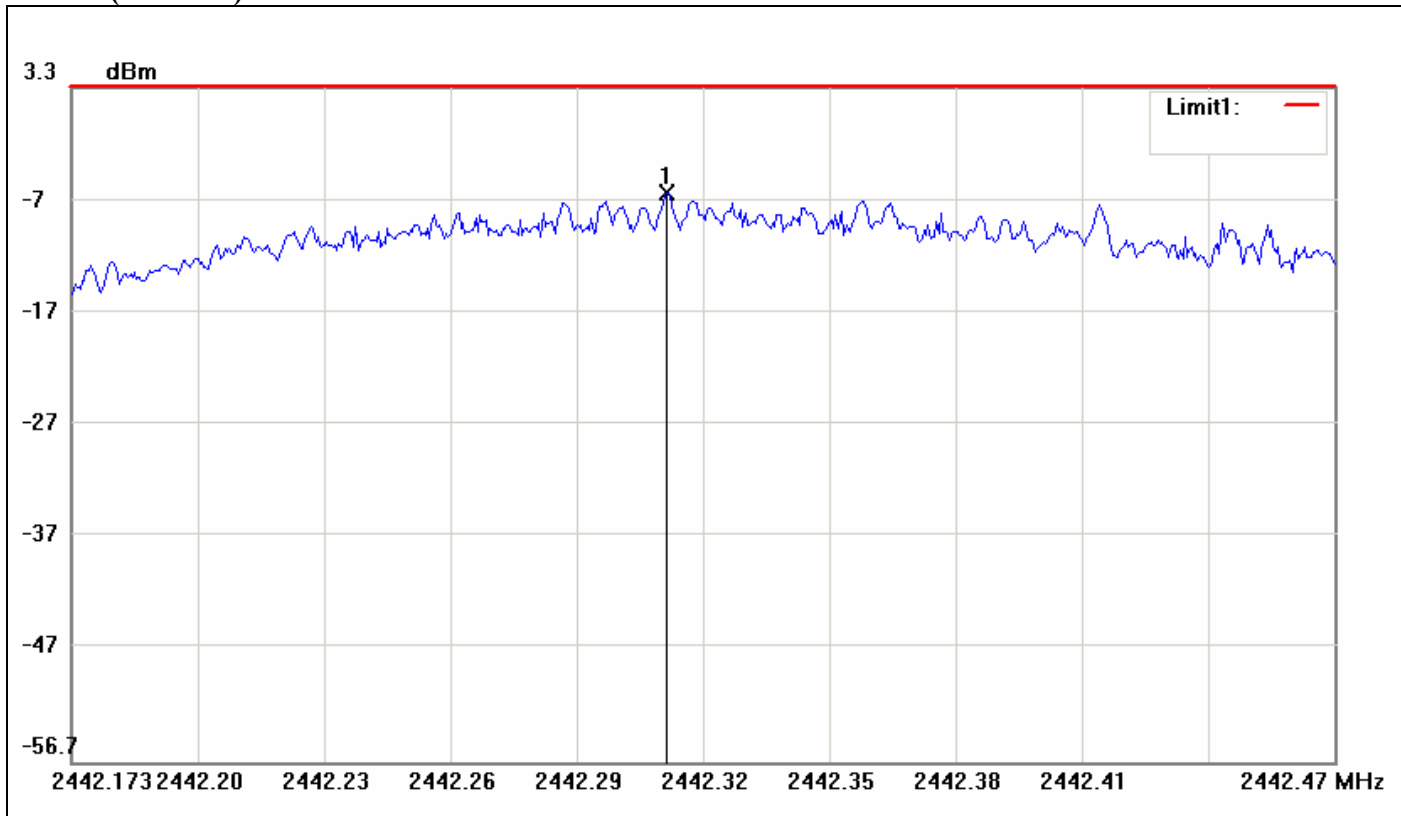

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2442.3141	-6.09	8.00	-14.09



**PPSD (CH High)**

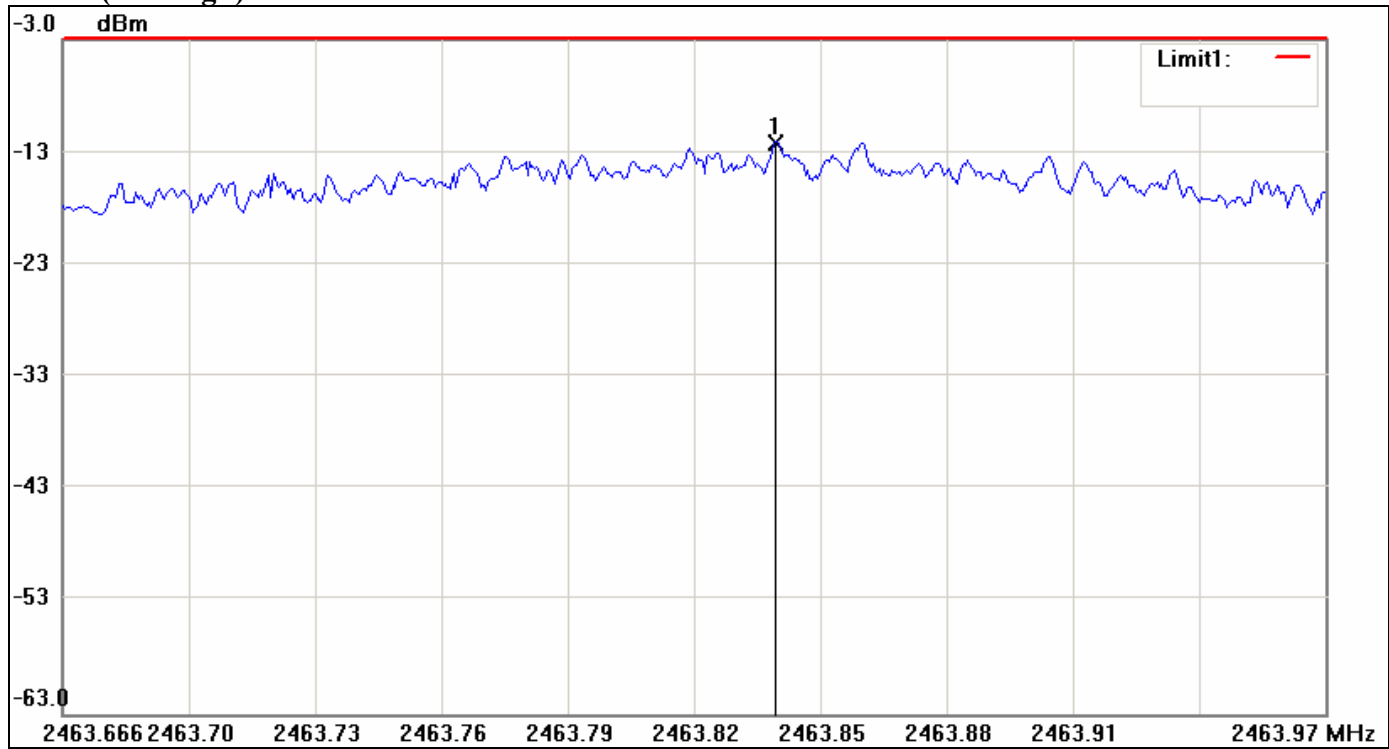


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2463.836	-12.16	8.00	-20.16



IEEE 802.11n HT 20 MHz mode / Chain 0


PPSD (CH Low)

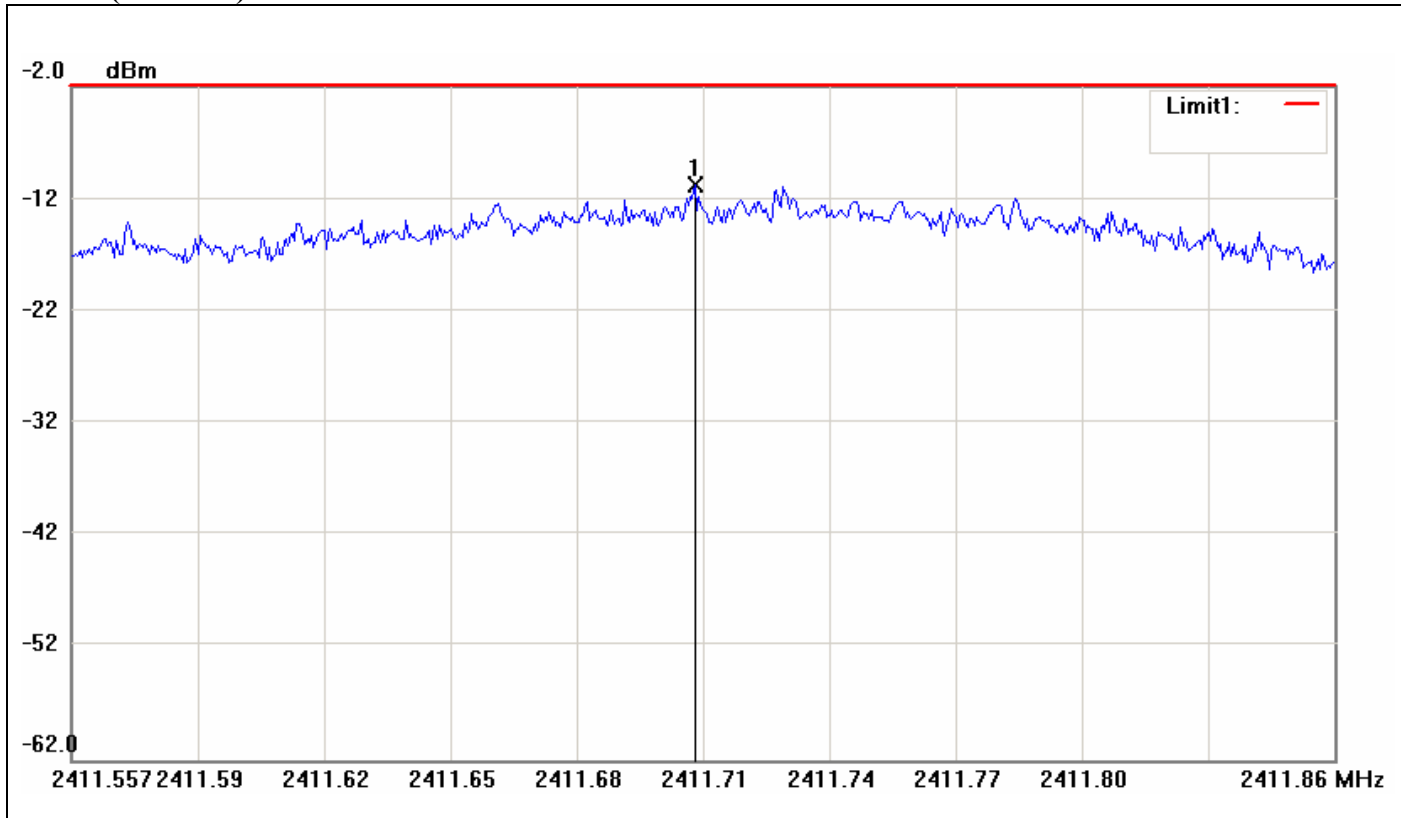

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2411.7050	-10.76	8.00	-18.76



PPSD (CH Mid)

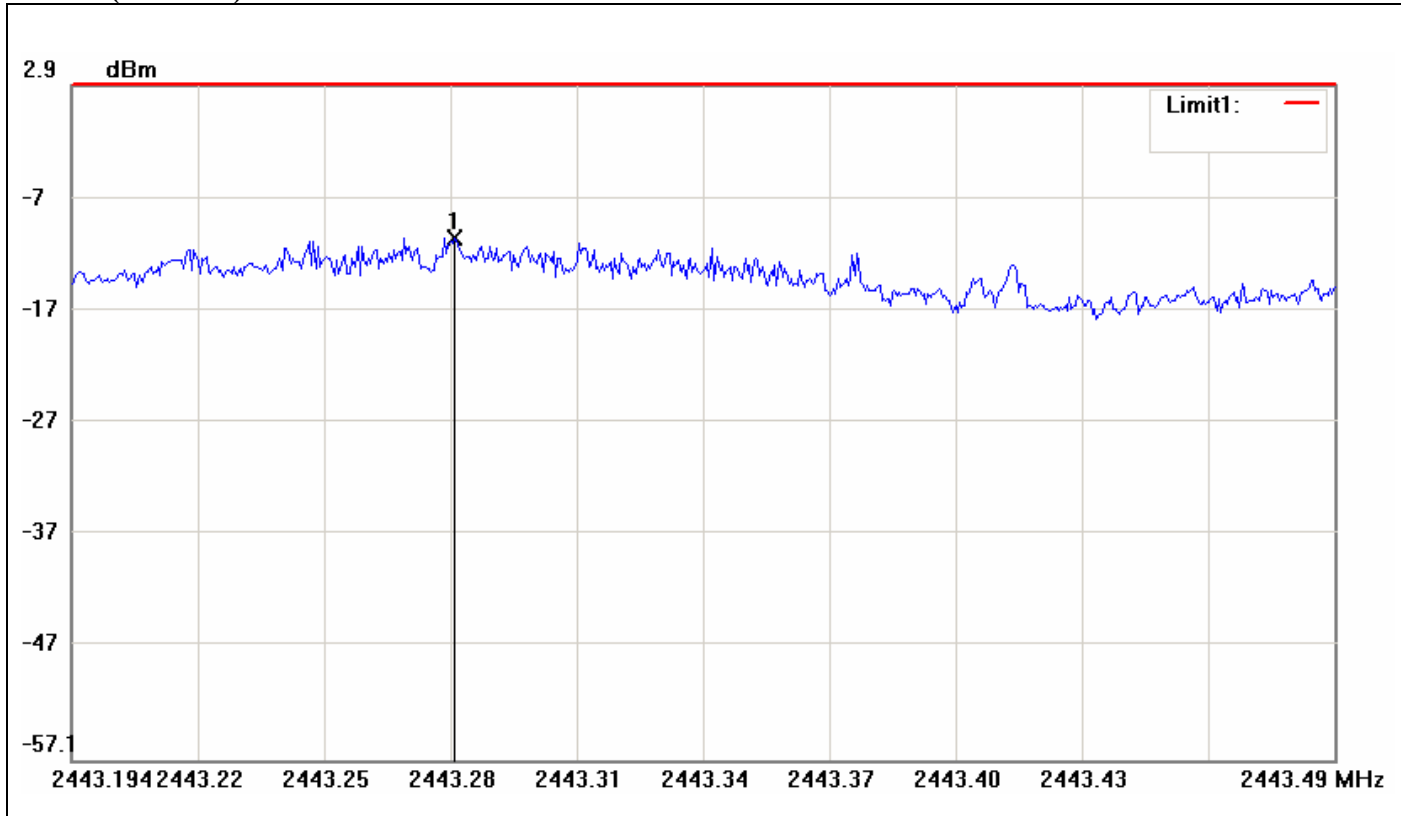


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2443.2852	-10.69	8.00	-18.69





PPSD (CH High)

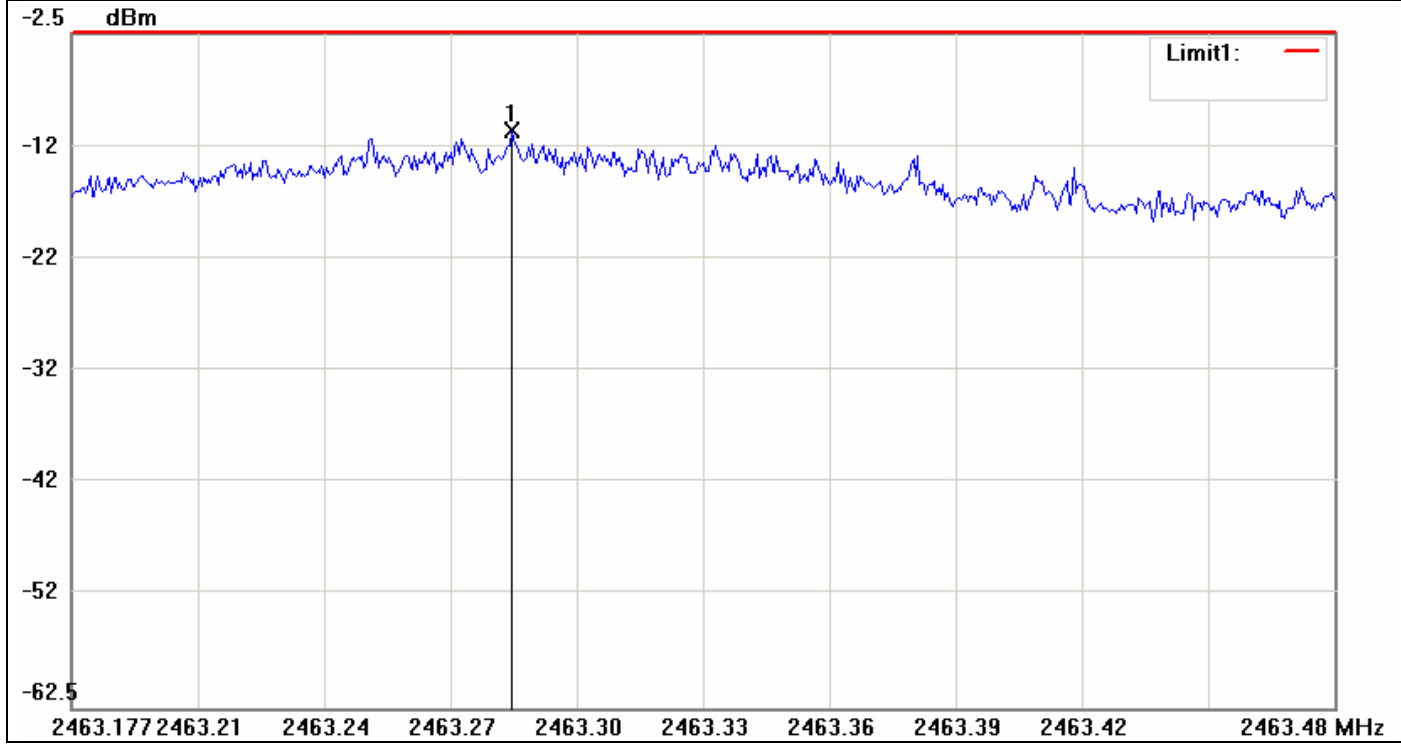


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2463.2818	-11.11	8.00	-19.11



IEEE 802.11n HT 20 MHz mode / Chain 1


PPSD (CH Low)

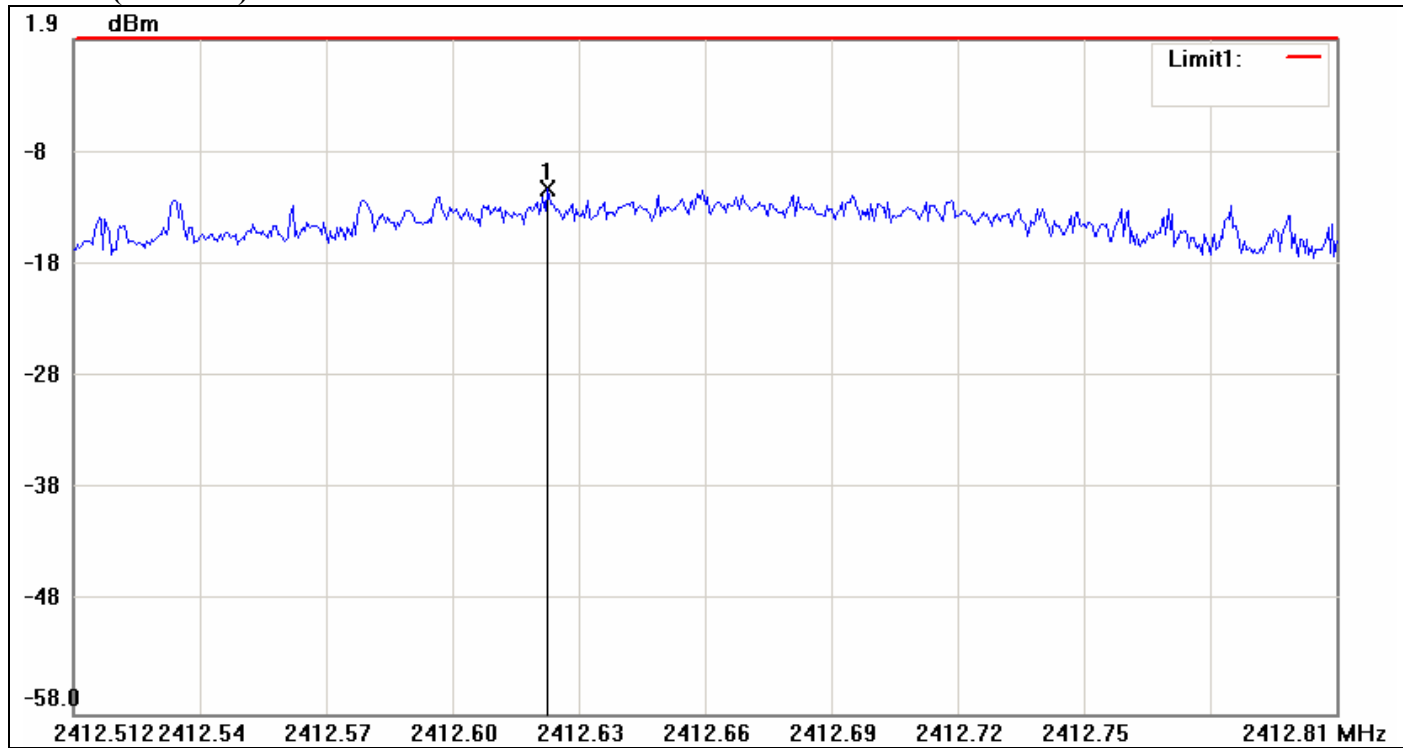

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2412.6243	-11.30	8.00	-19.30




PPSD (CH Mid)

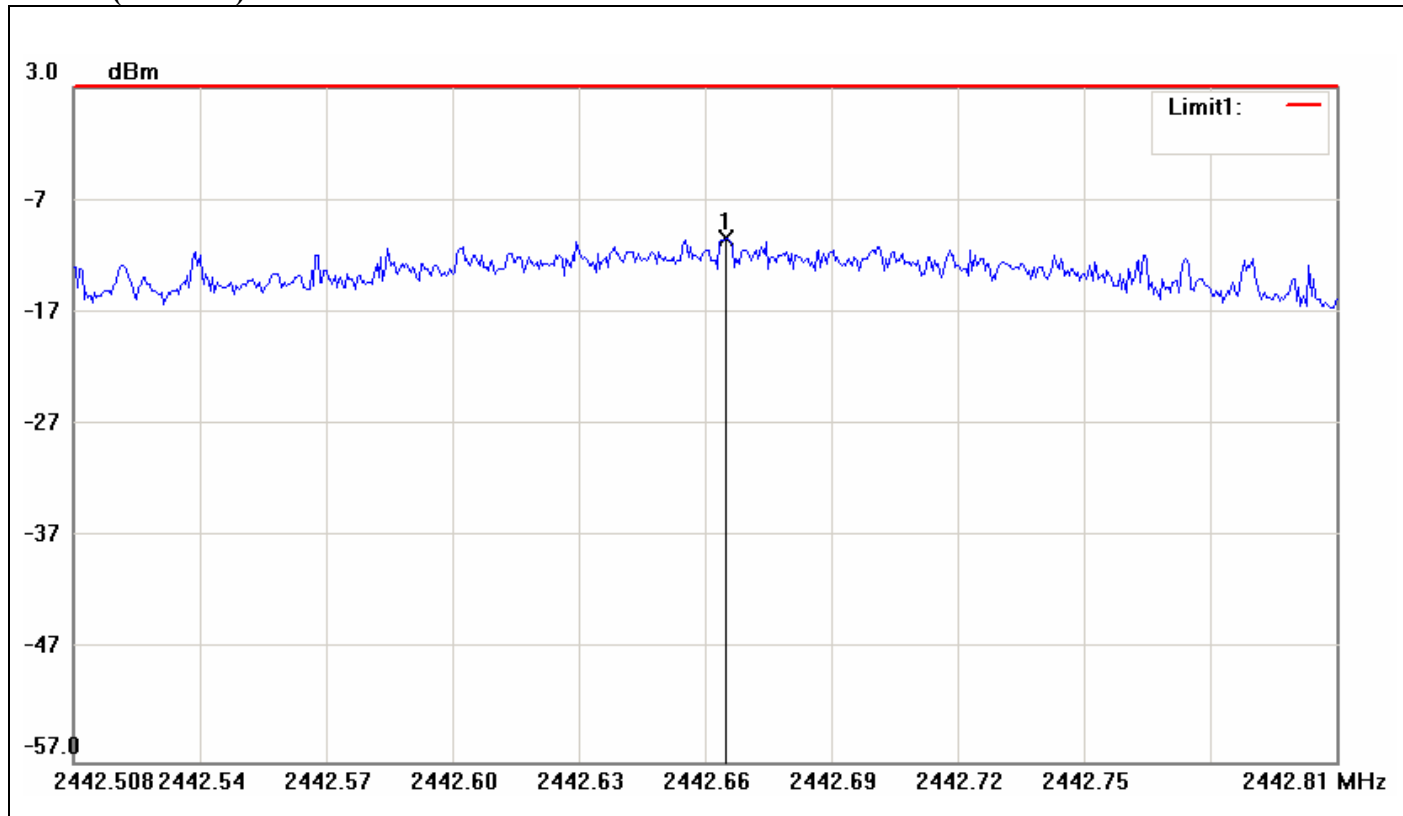

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2442.6633	-10.44	8.00	-18.44



PPSD (CH High)

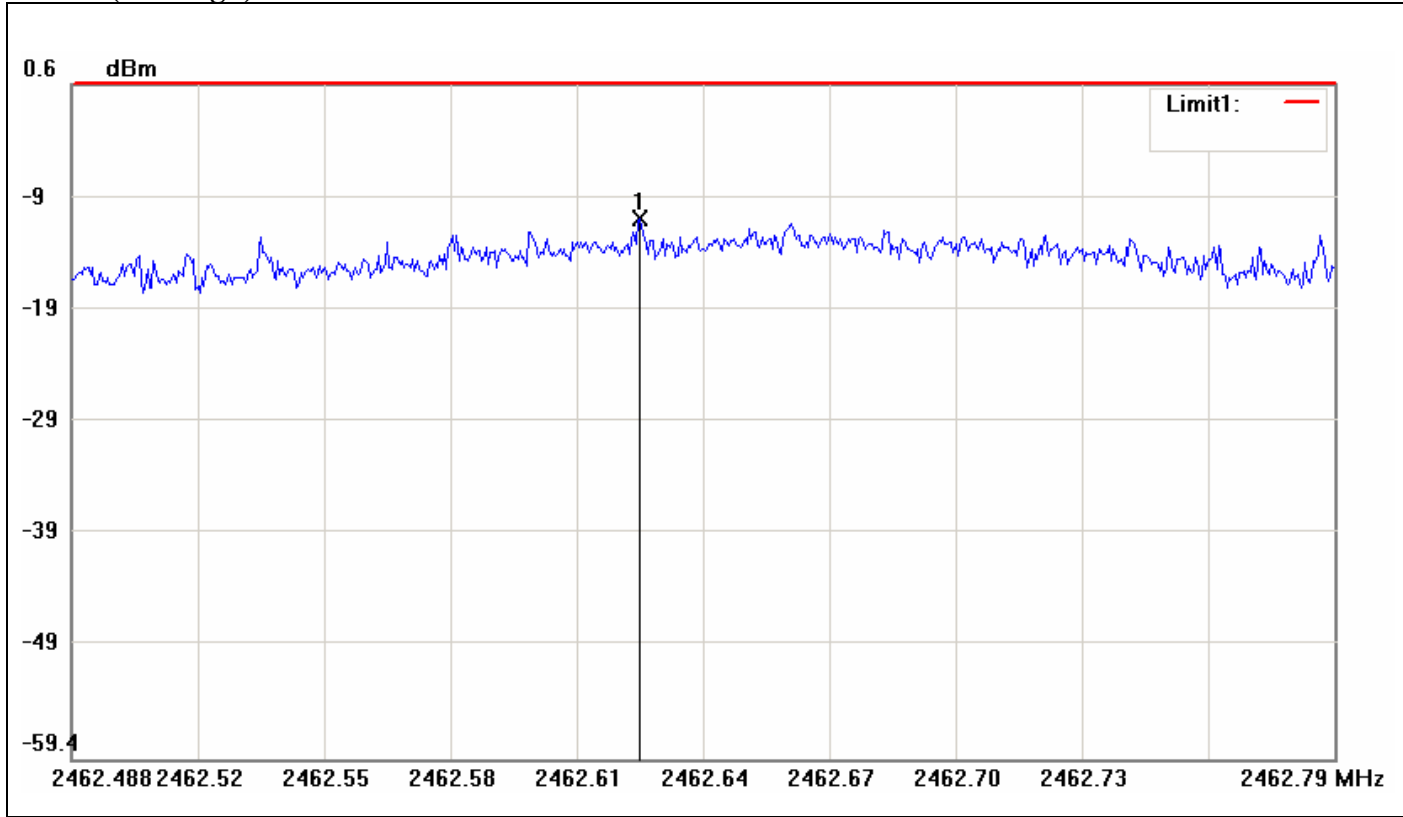


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2462.6227	-11.25	8.00	-19.25



IEEE 802.11n HT 40 MHz mode / Chain 0


PPSD (CH Low)

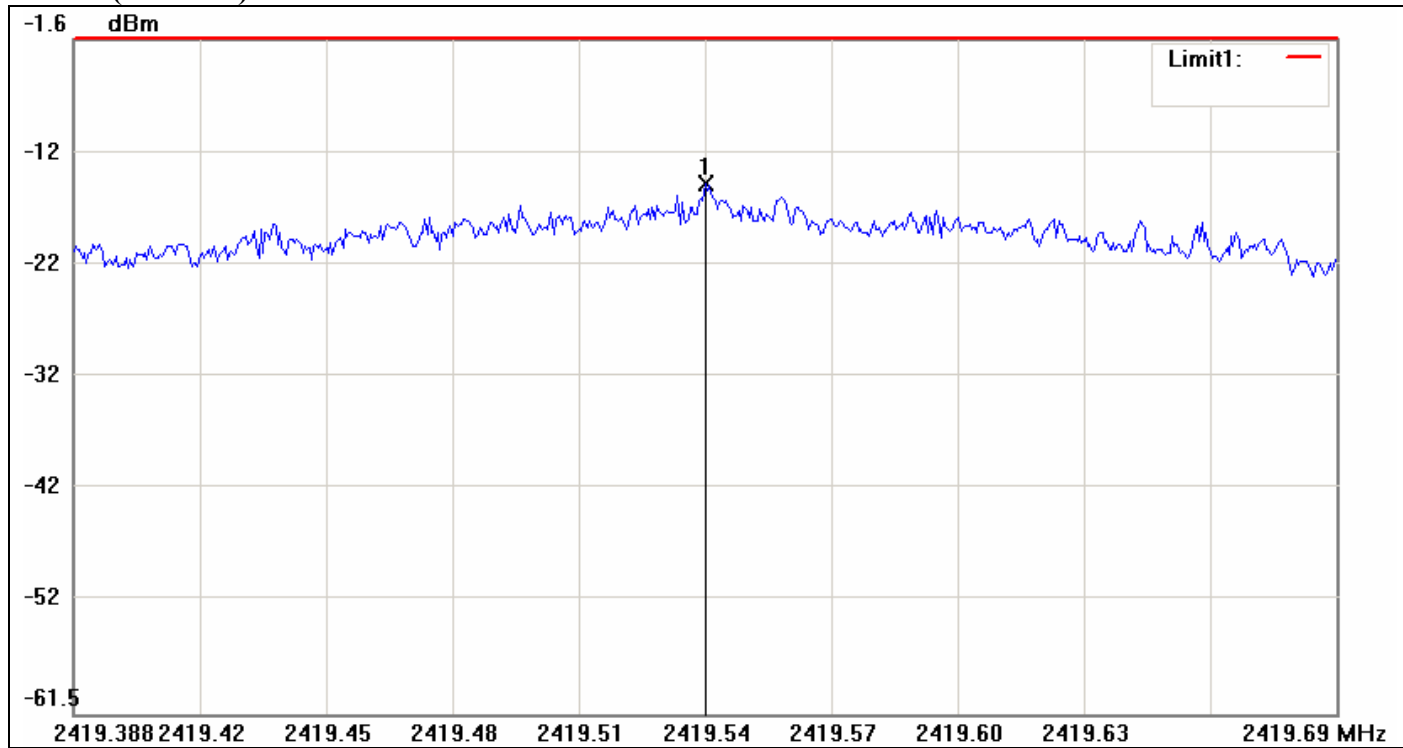

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2419.5382	-14.32	8.00	-22.32




PPSD (CH Mid)

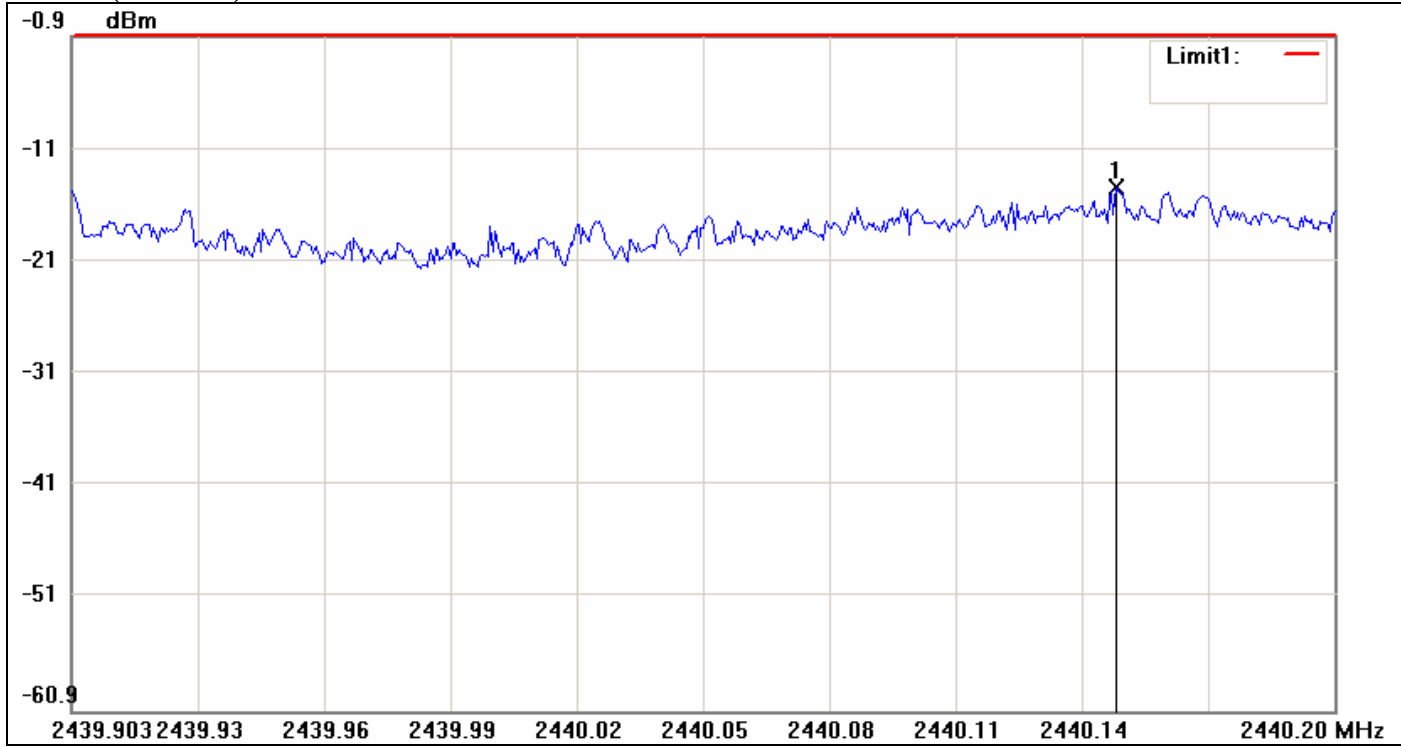

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2440.1505	-14.29	8.00	-22.29



PPSD (CH High)

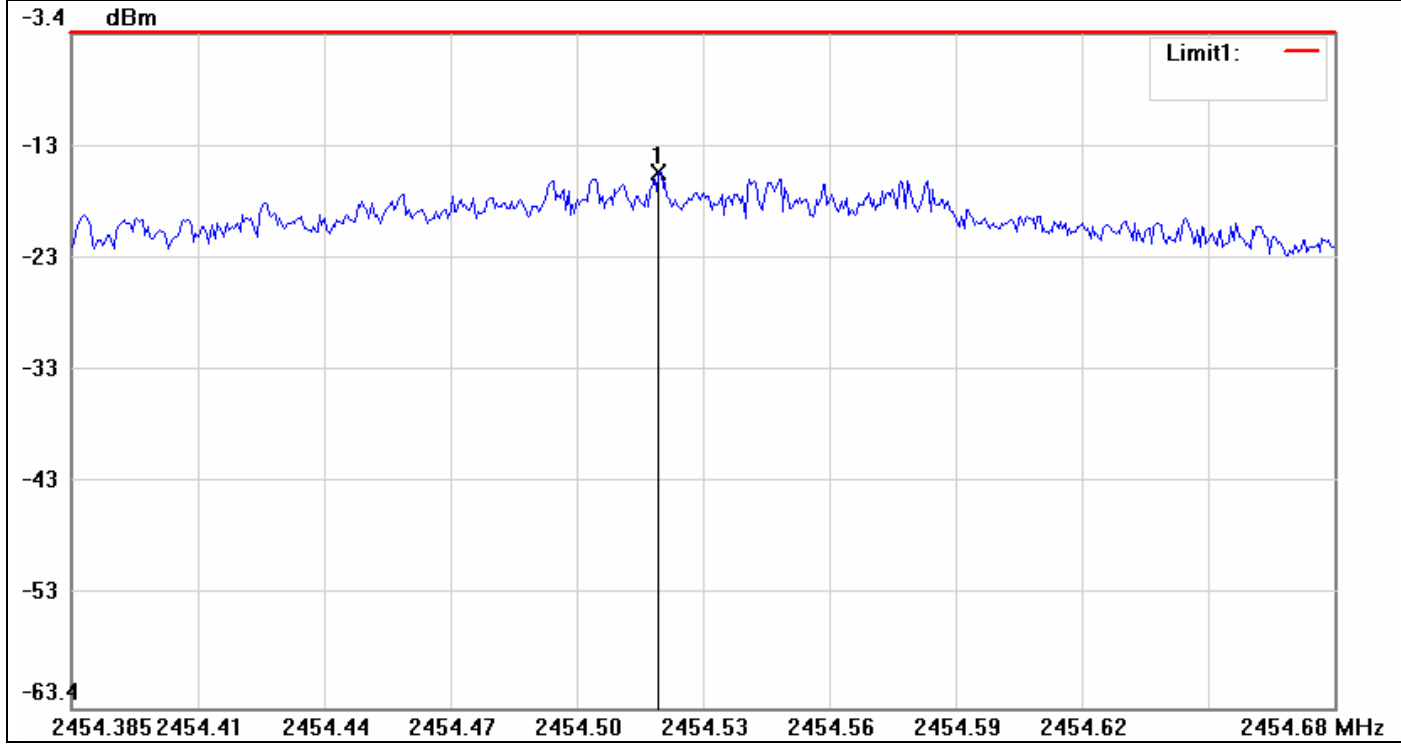


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2454.5244	-15.74	8.00	-23.74



IEEE 802.11n HT 40 MHz mode / Chain 1

PPSD (CH Low)

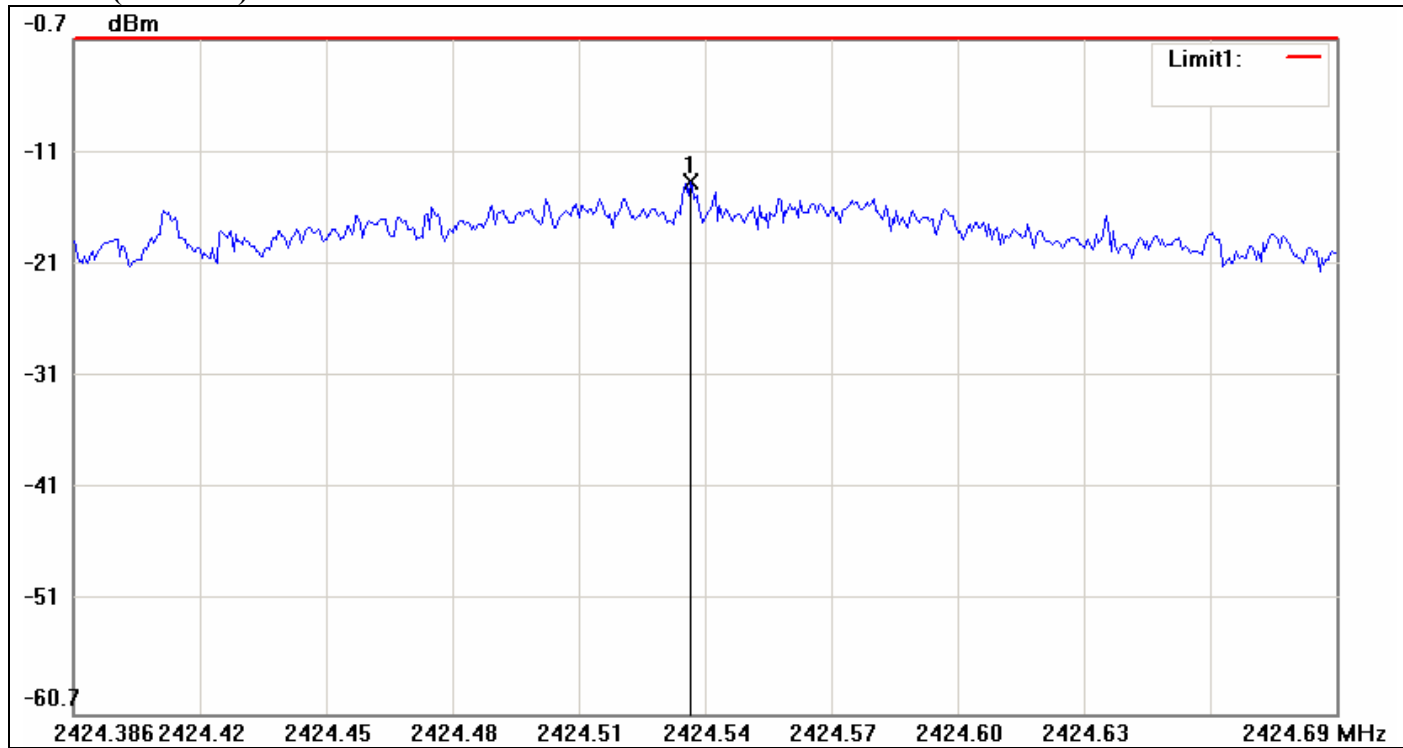


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2424.5328	-13.42	8.00	-21.42






PPSD (CH Mid)

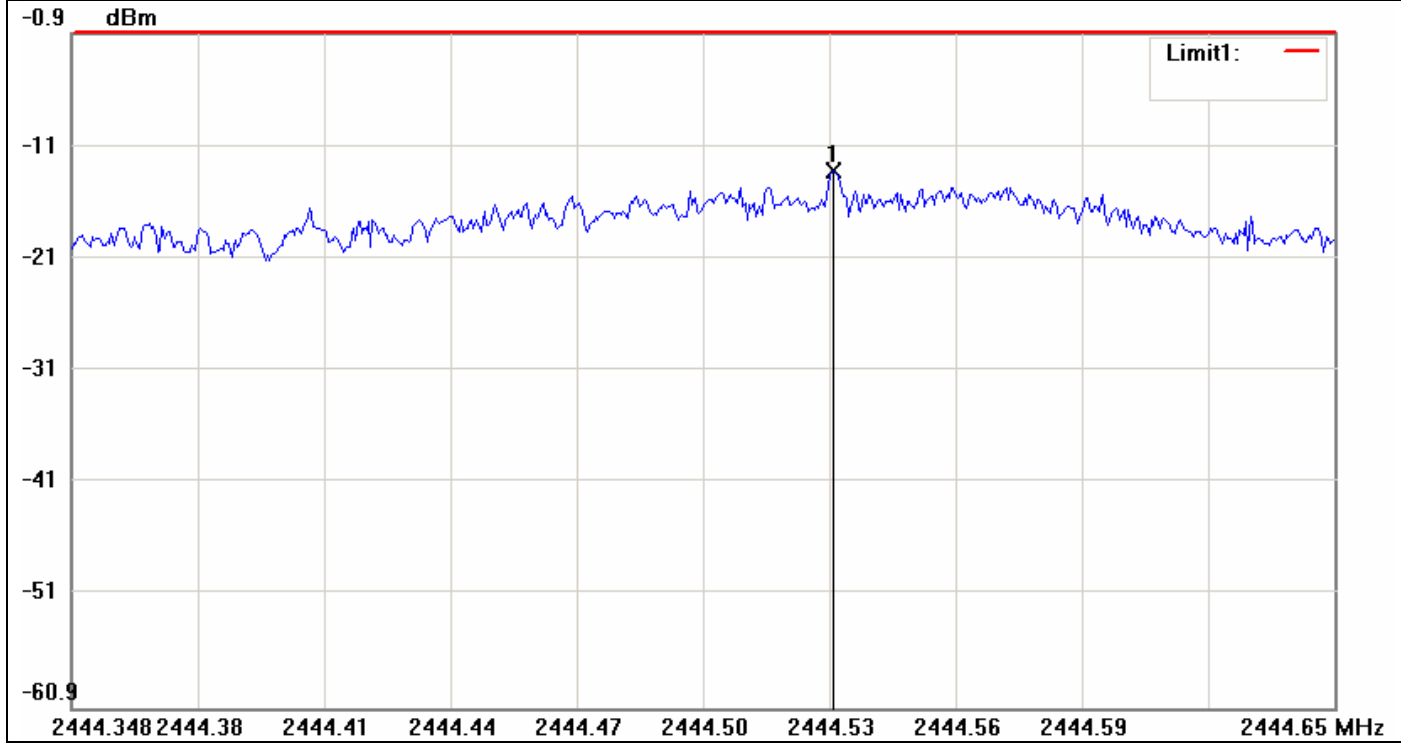

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2444.5289	-13.16	8.00	-21.16



PPSD (CH High)

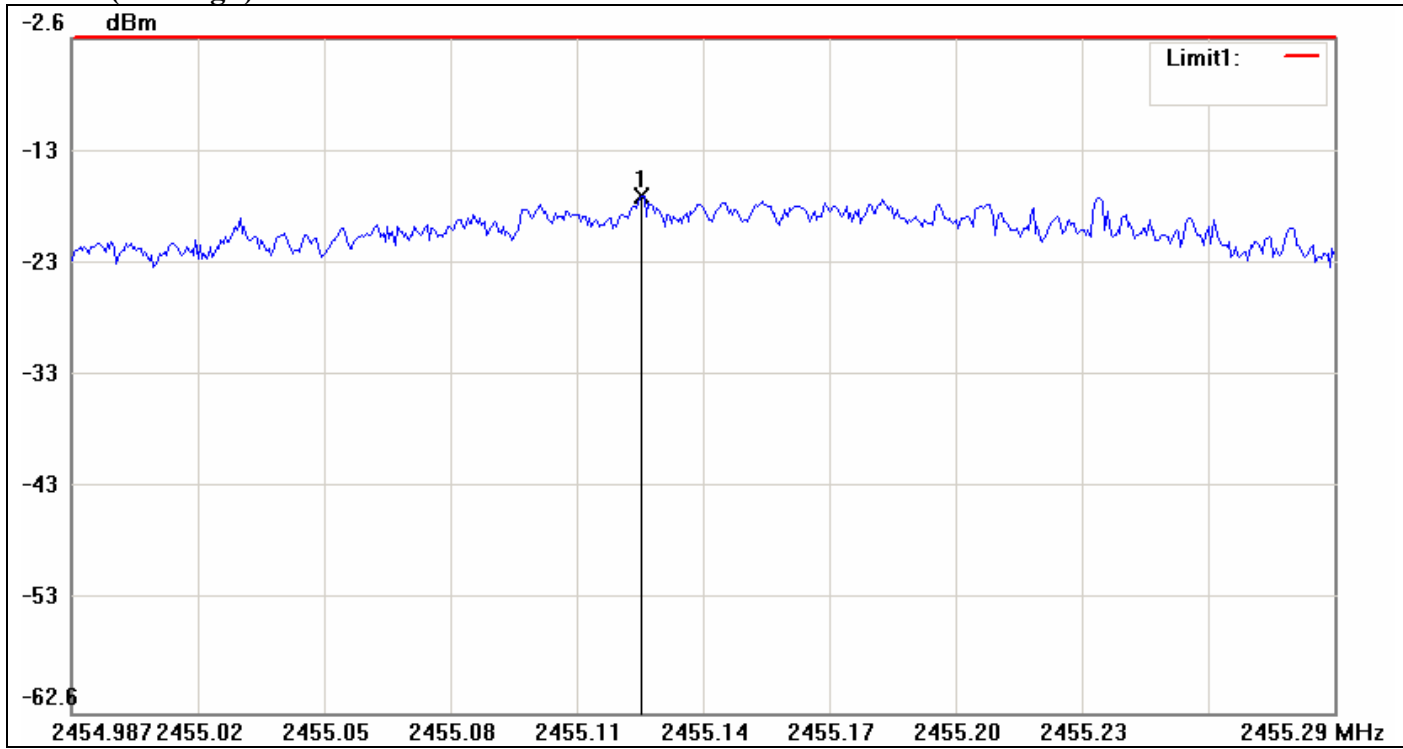

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2455.1222	-16.66	8.00	-24.66



## 7.6 RADIATED EMISSIONS

### LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




**Test Configuration**

**9kHz ~ 30MHz**

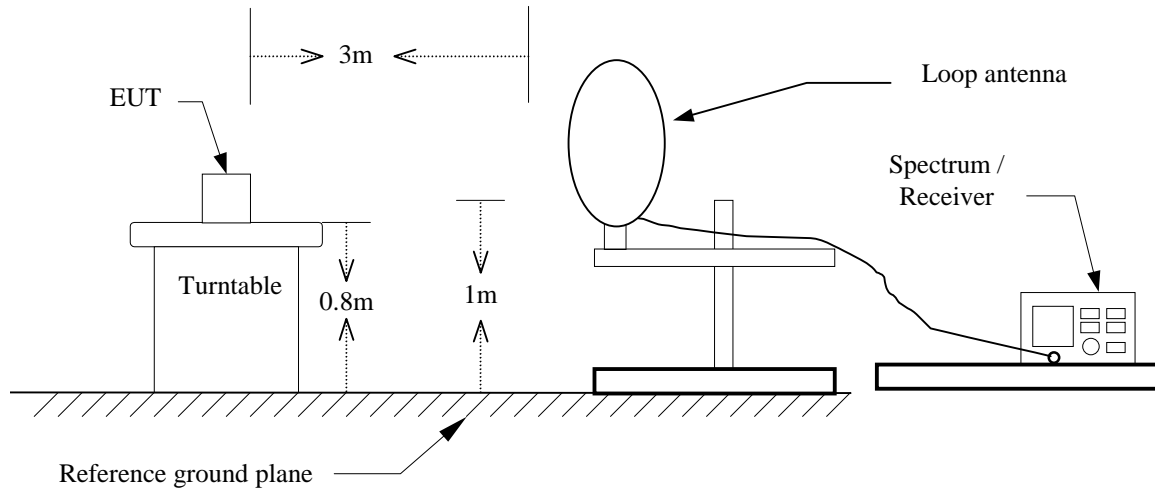


**30MHz ~ 1GHz**

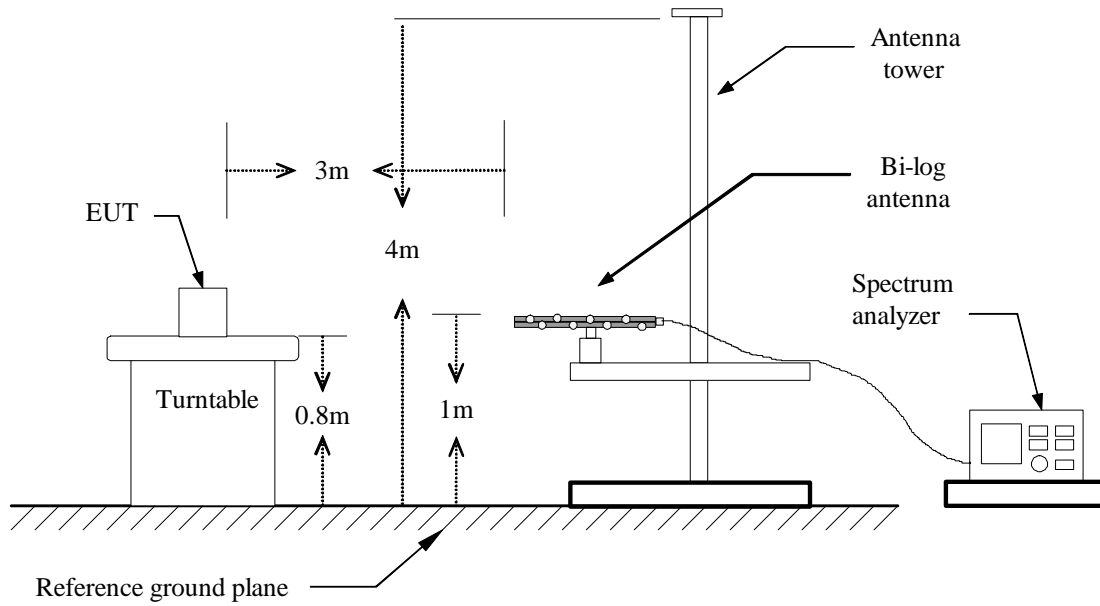



Above 1 GHz

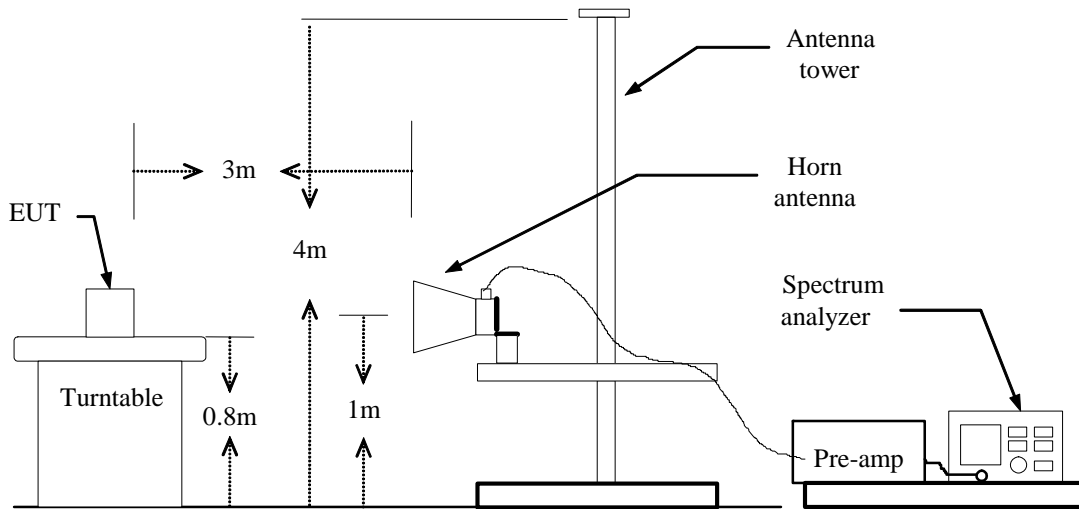



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:  
Below 1GHz:  
RBW=100kHz / VBW=300kHz / Sweep=AUTO  
Above 1GHz:  
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1GHz****Operation Mode:** Normal Link**Test Date:** September 7, 2011**Temperature:** 25°C**Tested by:** Sehni Hu**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
39.70	48.45	-9.01	39.44	40.00	-0.56	QP	V
57.48	42.40	-15.73	26.67	40.00	-13.33	QP	V
91.43	53.92	-15.14	38.78	43.50	-4.72	Peak	V
193.28	46.80	-10.49	36.31	43.50	-7.19	QP	V
217.53	52.11	-11.28	40.83	46.00	-5.17	Peak	V
500.45	49.20	-5.14	44.06	46.00	-1.94	QP	V
191.67	50.70	-10.63	40.07	43.50	-3.43	QP	H
204.60	49.55	-10.28	39.27	43.50	-4.23	QP	H
233.70	50.80	-11.21	39.59	46.00	-6.41	QP	H
287.05	47.75	-9.38	38.37	46.00	-7.63	QP	H
301.60	49.54	-9.20	40.34	46.00	-5.66	QP	H
749.42	43.51	-1.83	41.68	46.00	-4.32	Peak	H

**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5.  $Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)$ .



**Above 1 GHz**

**For PIFA Antenna**

**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** September 7, 2011

**Temperature:** 24°C

**Tested by:** Ali Shu

**Humidity:** 45 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2000.00	56.72	---	-5.47	51.25	---	74.00	54.00	-2.75	Peak	V
4825.00	47.79	---	2.61	50.40	---	74.00	54.00	-3.60	Peak	V
N/A										
2000.00	59.57	54.86	-5.47	54.10	49.39	74.00	54.00	-4.61	AVG	H
4825.00	48.19	---	2.61	50.80	---	74.00	54.00	-3.20	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: September 7, 2011

Temperature: 24°C

Tested by: Ali Shu

Humidity: 45 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2000.00	57.01	---	-5.47	51.54	---	74.00	54.00	-2.46	Peak	V
N/A										
2000.00	59.31	55.53	-5.47	53.84	50.06	74.00	54.00	-3.94	AVG	H
2606.67	58.64	50.19	-3.51	55.13	46.68	74.00	54.00	-7.32	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: September 7, 2011

Temperature: 25°C

Tested by: Ali Shu

Humidity: 45 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1630.00	56.31	---	-9.23	47.08	---	74.00	54.00	-6.92	Peak	V
4925.00	48.64	---	2.81	51.45	---	74.00	54.00	-2.55	Peak	V
N/A										
2000.00	59.13	55.35	-5.47	53.66	49.88	74.00	54.00	-4.12	AVG	H
2623.33	59.16	47.82	-3.45	55.71	44.37	74.00	54.00	-9.63	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: September 7, 2011

Temperature: 25°C

Tested by: Ali Shu

Humidity: 45 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1380.00	57.72	---	-10.67	47.05	---	74.00	54.00	-6.95	Peak	V
4925.00	47.94	---	2.81	50.75	---	74.00	54.00	-3.25	Peak	V
N/A										
2000.00	59.80	54.79	-5.47	54.33	49.32	74.00	54.00	-4.68	AVG	H
2573.33	58.27	46.20	-3.62	54.65	42.58	74.00	54.00	-11.42	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: September 7, 2011

Temperature: 20°C

Tested by: Ali Shu

Humidity: 45 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1493.33	57.35	---	-10.56	46.79	---	74.00	54.00	-7.21	Peak	V
7325.00	48.32	33.10	7.23	55.54	40.33	74.00	54.00	-13.67	AVG	V
N/A										
1900.00	57.76	---	-6.49	51.27	---	74.00	54.00	-2.73	Peak	H
2000.00	59.47	55.29	-5.47	54.00	49.82	74.00	54.00	-4.18	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: September 7, 2011

Temperature: 25°C

Tested by: Ali Shu

Humidity: 45 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2000.00	57.60	54.21	-5.47	52.13	48.74	74.00	54.00	-5.26	AVG	V
7391.67	47.19	39.46	7.20	54.39	46.66	74.00	54.00	-7.34	AVG	V
N/A										
1900.00	57.29	---	-6.49	50.80	---	74.00	54.00	-3.20	Peak	H
2000.00	58.58	54.63	-5.47	53.11	49.16	74.00	54.00	-4.84	AVG	H
2623.33	57.52	44.94	-3.45	54.07	41.49	74.00	54.00	-12.51	AVG	H
7391.67	47.96	33.14	7.20	55.16	40.34	74.00	54.00	-13.66	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low Test Date: September 7, 2011

Temperature: 25°C

Tested by: Ali Shu

Humidity: 45 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1493.33	56.71	---	-10.56	46.16	---	74.00	54.00	-7.84	Peak	V
N/A										
2000.00	59.49	55.54	-5.47	54.02	50.07	74.00	54.00	-3.93	AVG	H
2566.67	58.19	48.01	-3.64	54.55	44.37	74.00	54.00	-9.63	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Mid Test Date: September 7, 2011

Temperature: 25°C

Tested by: Ali Shu

Humidity: 45 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1366.67	57.34	---	-10.69	46.65	---	74.00	54.00	-7.35	Peak	V
N/A										
2000.00	60.16	55.87	-5.47	54.69	50.40	74.00	54.00	-3.60	AVG	H
2600.00	58.65	42.00	-3.53	55.12	38.47	74.00	54.00	-15.53	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH High Test Date: September 7, 2011

Temperature: 20°C

Tested by: Ali Shu

Humidity: 45 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1866.67	56.73	---	-6.82	49.91	---	74.00	54.00	-4.09	Peak	V
4908.33	48.07	---	2.78	50.85	---	74.00	54.00	-3.15	Peak	V
N/A										
2000.00	57.75	53.45	-5.47	52.28	47.98	74.00	54.00	-6.02	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / CH Low

Test Date: September 7, 2011

Temperature: 25°C

Tested by: Ali Shu

Humidity: 45 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1923.33	56.38	---	-6.25	50.13	---	74.00	54.00	-3.87	Peak	V
N/A										
1770.00	56.20	---	-7.81	48.39	---	74.00	54.00	-5.61	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH Mid

**Temperature:** 25°C

**Humidity:** 45 % RH

**Test Date:** September 7, 2011

**Tested by:** Ali Shu

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1856.67	55.84	---	-6.93	48.92	---	74.00	54.00	-5.08	Peak	V
N/A										
1793.33	56.28	---	-7.57	48.71	---	74.00	54.00	-5.29	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / CH High

Test Date: September 7, 2011

Temperature: 20°C

Tested by: Ali Shu

Humidity: 45 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1990.00	57.08	---	-5.57	51.51	---	74.00	54.00	-2.49	Peak	V
N/A										
2000.00	58.33	54.37	-5.47	52.86	48.90	74.00	54.00	-5.1	AVG	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**For Dipole Antenna**

**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** September 6, 2011

**Temperature:** 25°C

**Tested by:** Sehni Hu

**Humidity:** 50 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2500.00	60.83	57.28	-3.87	56.96	53.41	74.00	54.00	-0.59	AVG	V
2573.33	61.68	56.65	-3.62	58.06	53.03	74.00	54.00	-0.97	AVG	V
2726.67	58.50	46.40	-3.10	55.40	43.30	74.00	54.00	-10.70	AVG	V
N/A										
1896.67	55.36	---	-6.52	48.84	---	74.00	54.00	-5.16	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: September 6, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2500.00	60.37	56.61	-3.87	56.50	52.74	74.00	54.00	-1.26	AVG	V
2603.33	63.28	57.22	-3.52	59.76	53.70	74.00	54.00	-0.30	AVG	V
3258.33	50.39	---	-1.49	48.90	---	74.00	54.00	-5.10	Peak	V
4891.67	48.95	---	2.74	51.69	---	74.00	54.00	-2.31	Peak	V
N/A										
4875.00	48.45	---	2.71	51.16	---	74.00	54.00	-2.84	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: September 6, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2500.00	59.83	52.55	-3.87	55.96	48.68	74.00	54.00	-5.32	AVG	V
2623.33	61.16	51.45	-3.45	57.71	48.00	74.00	54.00	-6.00	AVG	V
N/A										
1793.33	55.89	---	-7.57	48.32	---	74.00	54.00	-5.68	Peak	H
4050.00	49.95	---	0.63	50.58	---	74.00	54.00	-3.42	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: September 6, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2580.00	62.36	55.15	-3.60	58.76	51.55	74.00	54.00	-2.45	AVG	V
2726.67	59.26	48.97	-3.10	56.16	45.87	74.00	54.00	-8.13	AVG	V
4825.00	48.54	---	2.61	51.15	---	74.00	54.00	-2.85	Peak	V
N/A										
2100.00	56.07	---	-5.21	50.86	---	74.00	54.00	-3.14	Peak	H
4891.67	47.81	---	2.74	50.55	---	74.00	54.00	-3.45	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: September 6, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2606.67	65.11	57.33	-3.51	61.60	53.82	74.00	54.00	-0.18	AVG	V
N/A										
2606.67	58.19	50.20	-3.51	54.69	46.69	74.00	54.00	-7.31	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / IEEE 802.11g / CH High

Test Date: September 6, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2623.33	61.11	51.22	-3.45	57.66	47.77	74.00	54.00	-6.23	AVG	V
N/A										
2226.67	56.40	---	-4.88	51.52	---	74.00	54.00	-2.48	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low Test Date: September 6, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2566.67	65.08	56.70	-3.64	61.44	53.06	74.00	54.00	-0.94	AVG	V
N/A										
2566.67	58.18	47.39	-3.64	54.53	43.75	74.00	54.00	-10.25	AVG	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Mid Test Date: September 6, 2011

Temperature: 25°C Tested by: Sehni Hu

Humidity: 50 % RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2603.33	64.06	54.78	-3.52	60.54	51.26	74.00	54.00	-2.74	AVG	V
N/A										
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH High Test Date: September 6, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2620.00	62.80	52.88	-3.46	59.34	49.42	74.00	54.00	-4.58	AVG	V
N/A										
1773.33	55.87	---	-7.77	48.10	---	74.00	54.00	-5.90	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH Low

**Temperature:** 25°C

**Humidity:** 50 % RH

**Test Date:** September 6, 2011

**Tested by:** Sehni Hu

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2586.67	61.79	53.09	-3.58	58.22	49.51	74.00	54.00	-4.49	AVG	V
N/A										
1586.67	56.38	---	-9.67	46.72	---	74.00	54.00	-7.28	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH Mid

**Temperature:** 25°C

**Humidity:** 50 % RH

**Test Date:** September 6, 2011

**Tested by:** Sehni Hu

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2606.67	61.08	52.98	-3.51	57.57	49.47	74.00	54.00	-4.53	AVG	V
N/A										
1496.67	57.66	---	-10.55	47.10	---	74.00	54.00	-6.90	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT 40 MHz mode / CH High

Test Date: September 6, 2011

Temperature: 25°C

Tested by: Sehni Hu

Humidity: 50 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2630.00	61.09	52.47	-3.43	57.66	49.04	74.00	54.00	-4.96	AVG	V
N/A										
2100.00	57.14	---	-5.21	51.93	---	74.00	54.00	-2.07	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.





## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

**Operation Mode:** Normal Link                      **Test Date:** September 16, 2011  
**Temperature:** 26°C                                      **Tested by:** David Lee  
**Humidity:** 60% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1512	42.06	28.21	0.17	42.23	28.38	65.93	55.93	-23.70	-27.55	L1
0.2236	32.62	17.22	0.16	32.78	17.38	62.68	52.68	-29.90	-35.30	L1
2.3584	25.14	16.66	0.21	25.35	16.87	56.00	46.00	-30.65	-29.13	L1
3.6162	33.06	27.15	0.26	33.32	27.41	56.00	46.00	-22.68	-18.59	L1
8.2122	32.18	26.23	0.42	32.60	26.65	60.00	50.00	-27.40	-23.35	L1
10.8577	30.92	24.79	0.50	31.42	25.29	60.00	50.00	-28.58	-24.71	L1
0.1555	41.53	28.50	0.26	41.79	28.76	65.70	55.70	-23.91	-26.94	L2
0.2516	31.53	16.38	0.25	31.78	16.63	61.70	51.70	-29.92	-35.07	L2
2.2752	27.47	20.07	0.28	27.75	20.35	56.00	46.00	-28.25	-25.65	L2
3.6273	33.02	26.45	0.30	33.32	26.75	56.00	46.00	-22.68	-19.25	L2
8.5922	33.20	27.43	0.42	33.62	27.85	60.00	50.00	-26.38	-22.15	L2
10.8619	32.77	26.75	0.47	33.24	27.22	60.00	50.00	-26.76	-22.78	L2


### **Remark:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



**Test Plots**

*Conducted emissions (Line 1)*

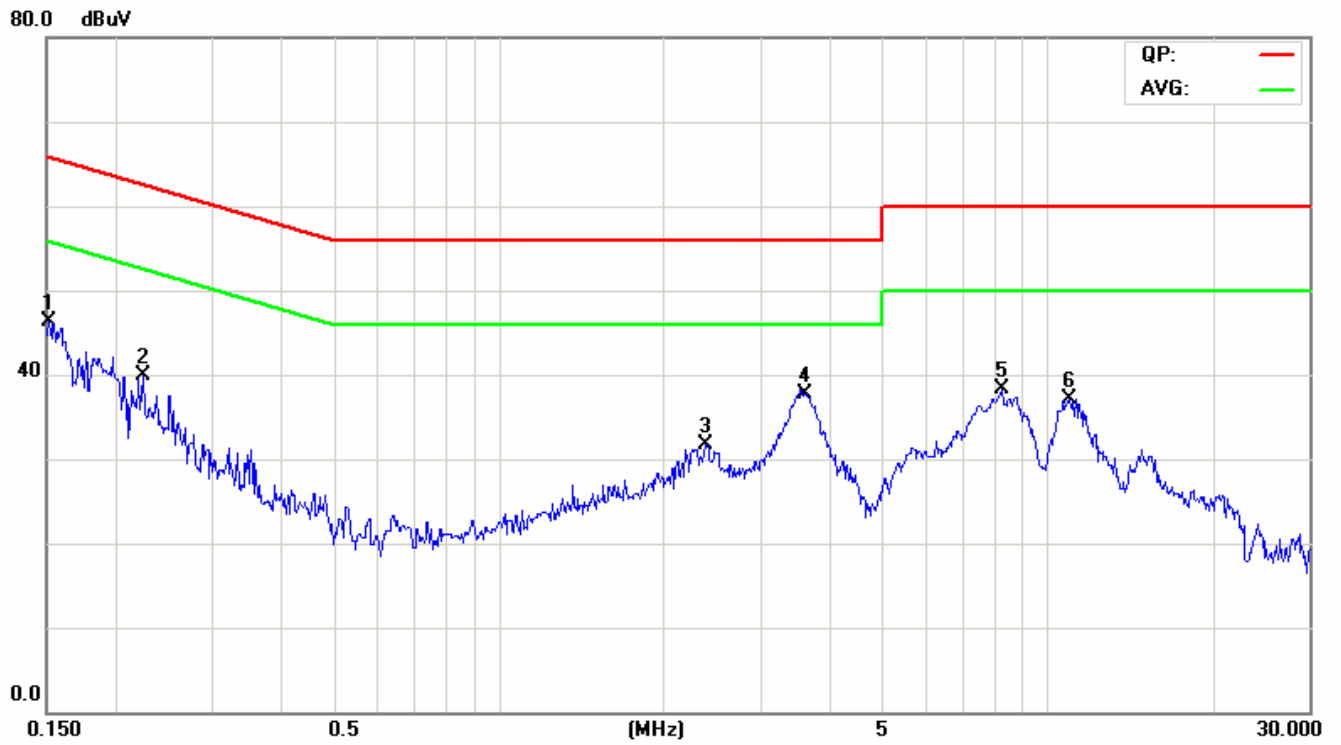

*Conducted emissions (Line 2)*

