


5.1.4 Test Data:


Power Line Conducted Emissions (Hot) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.15084	0.10	0.02	47.56	65.98	-18.42	26.50	55.98	-29.48
0.19175	0.10	0.02	41.52	64.81	-23.29	22.33	54.81	-32.48
0.19208	0.10	0.02	41.31	64.80	-23.49	24.07	54.80	-30.73
0.19331	0.10	0.02	41.48	64.76	-23.28	23.36	54.76	-31.40
0.20343	0.10	0.02	40.31	64.47	-24.16	18.73	54.47	-35.75
1.25052	0.42	0.08	29.46	56.00	-26.54	21.01	46.00	-24.99
1.56628	0.33	0.09	26.45	56.00	-29.55	18.65	46.00	-27.35
1.78968	0.26	0.09	27.28	56.00	-28.72	19.27	46.00	-26.73
2.96936	0.25	0.11	25.90	56.00	-30.10	18.50	46.00	-27.50
3.50297	0.28	0.12	24.98	56.00	-31.02	16.68	46.00	-29.32

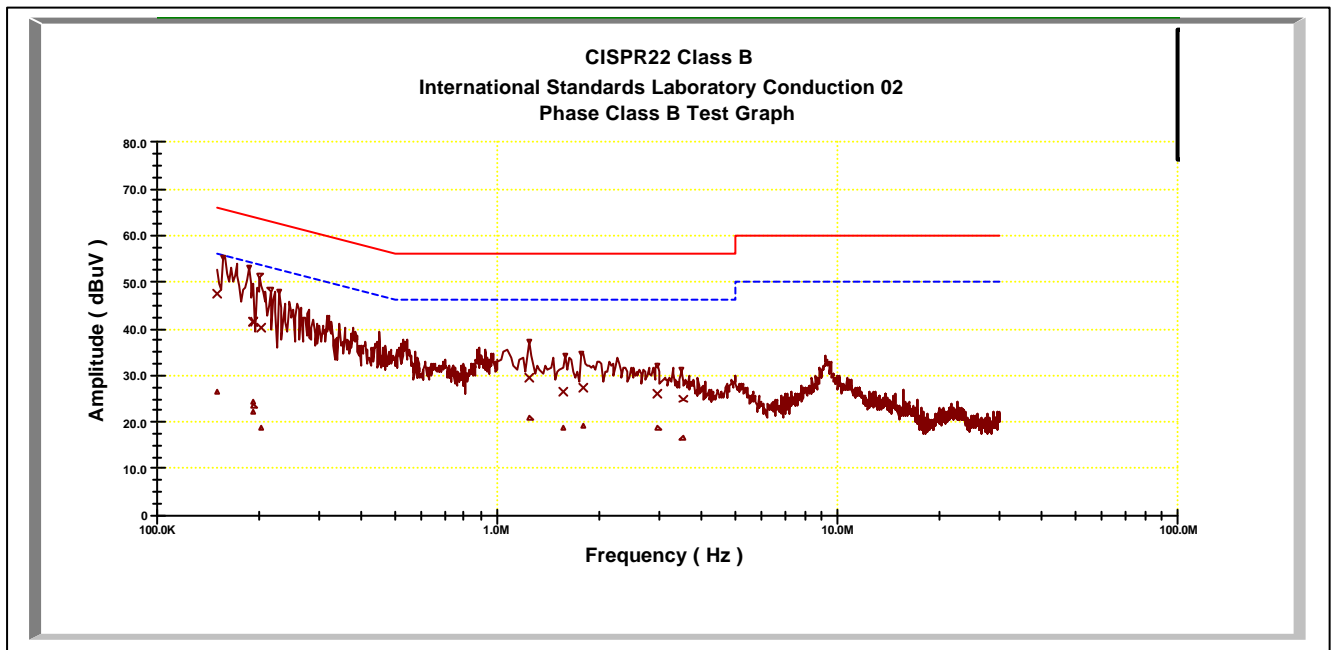

Power Line Conducted Emissions (Neutral) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.15717	0.10	0.02	43.83	65.80	-21.97	23.99	55.80	-31.81
0.1593	0.10	0.02	43.46	65.73	-22.27	25.27	55.73	-30.47
0.1995	0.10	0.02	37.37	64.59	-27.22	11.22	54.59	-43.37
0.20143	0.10	0.02	37.29	64.53	-27.24	10.07	54.53	-44.46
0.26911	0.10	0.02	32.35	62.60	-30.25	8.48	52.60	-44.12
2.17321	0.20	0.10	24.75	56.00	-31.25	15.14	46.00	-30.86
2.88971	0.20	0.11	23.69	56.00	-32.31	15.86	46.00	-30.14
4.00928	0.20	0.12	19.82	56.00	-36.18	12.71	46.00	-33.29
4.96139	0.22	0.13	22.98	56.00	-33.02	16.06	46.00	-29.94
9.39244	0.30	0.17	25.08	60.00	-34.92	17.93	50.00	-32.07

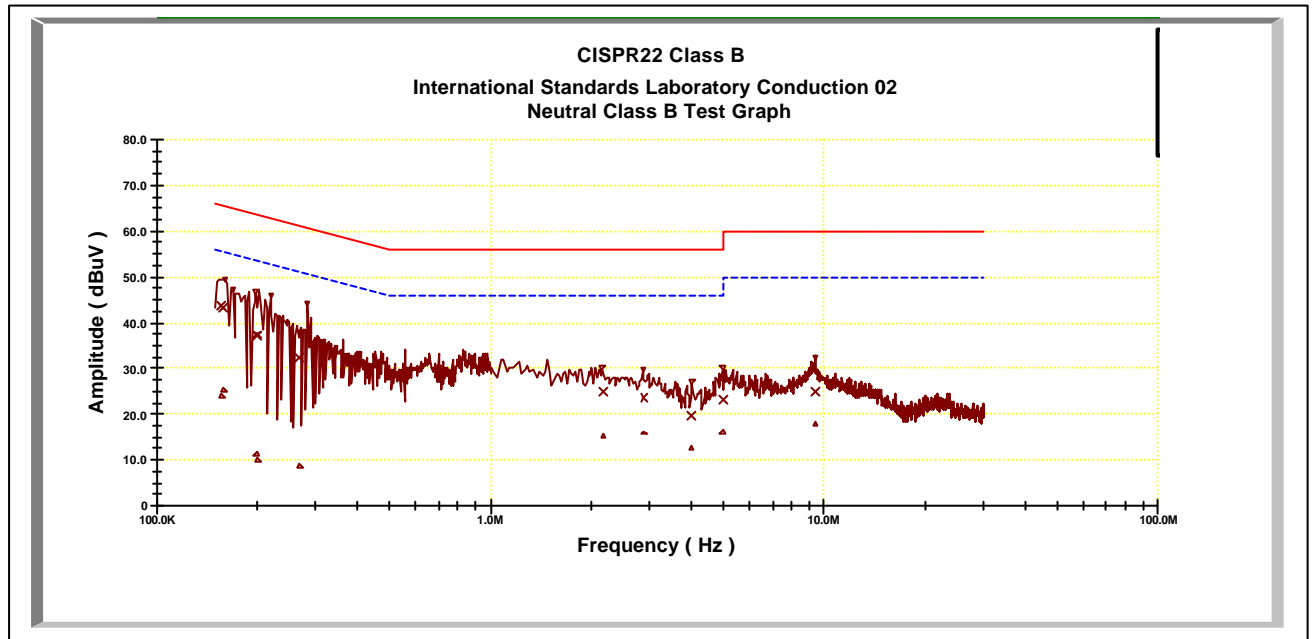

* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels.
 Two type of antennas have been test, and the worse data show above.
 Margin = Amplitude + Insertion Loss- Limit
 A margin of -8dB means that the emission is 8dB below the limit

5.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

5.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode: Spectrum analyzer
Detector function: Peak mode
RBW: 100KHz
VBW: 100KHz



5.2.2 Test Setup



5.2.3 Test Data:

Table 6dB Bandwidth

Chennel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	16.48	0.5	Pass
6	2437	16.44	0.5	Pass
11	2462	16.44	0.5	Pass

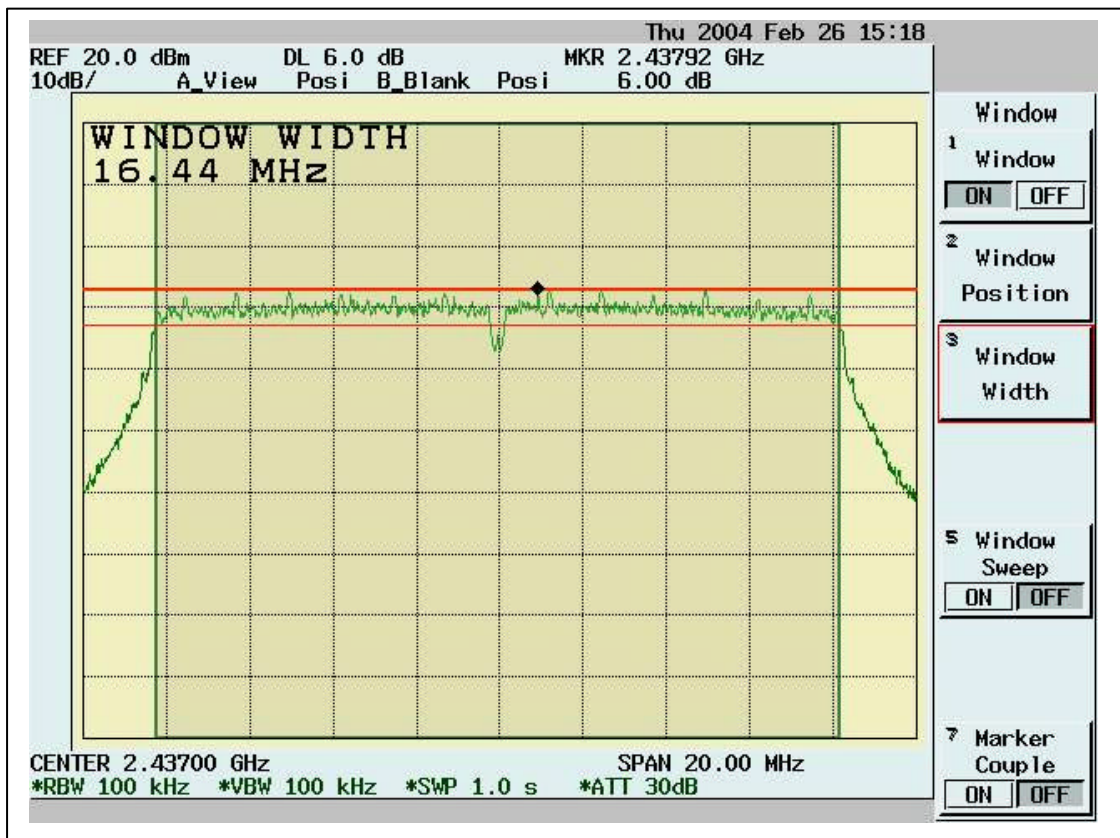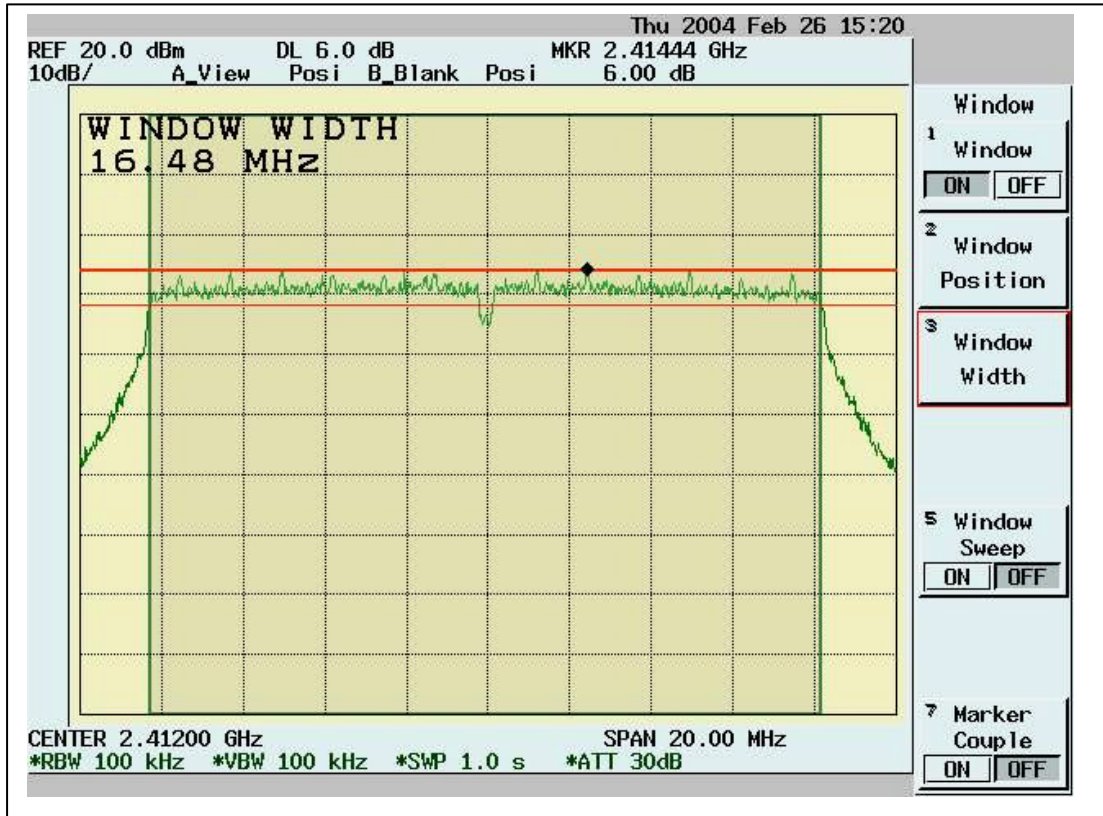




5.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

5.3.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer .

5.3.2 Test Setup

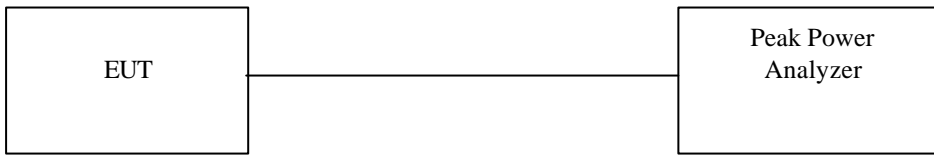

5.3.3 Test Data:

Channel	Frequency (MHz)	Analyzer Reading (dBm)	Cable Loss (dB)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	17.312	1.1	69.37	18.412	30	Pass
6	2437	17.093	1.1	65.96	18.193	30	Pass
11	2462	16.624	1.1	59.21	17.724	30	Pass

5.4 Radiated Emission Measurement [Section [15.247(c)(4)]

5.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

5.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies, the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

5.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

5.4.4 Test Data (30MHz – 1GHz) :

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
199.75	18.50	8.89	3.78	0.00	31.17	43.50	-12.33	150.00	124.00
399.57	15.90	15.99	5.21	0.00	37.09	46.00	-8.91	200.00	287.00
499.48	12.99	17.69	5.79	0.00	36.47	46.00	-9.53	100.00	287.00
599.39	10.16	18.90	6.32	0.00	35.38	46.00	-10.62	200.00	352.00
699.3	6.79	19.00	6.79	0.00	32.58	46.00	-13.42	100.00	189.00
749.74	5.36	20.09	6.99	0.00	32.44	46.00	-13.56	100.00	72.00
799.21	12.79	20.00	7.27	0.00	40.06	46.00	-5.94	100.00	105.00
849.65	6.55	20.60	7.44	0.00	34.58	46.00	-11.42	150.00	222.00
900.09	8.25	20.40	7.67	0.00	36.32	46.00	-9.68	100.00	124.00
949.56	5.99	21.19	7.85	0.00	35.03	46.00	-10.97	200.00	238.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
114.39	17.50	11.68	2.85	0.00	32.03	43.50	-11.47	150.00	104.00
199.75	14.12	8.89	3.78	0.00	26.79	43.50	-16.71	100.00	336.00
399.57	8.90	15.99	5.21	0.00	30.09	46.00	-15.91	100.00	189.00
499.48	5.98	17.69	5.79	0.00	29.45	46.00	-16.55	200.00	43.00
599.39	7.52	18.90	6.32	0.00	32.73	46.00	-13.27	100.00	237.00
699.3	5.65	19.00	6.79	0.00	31.44	46.00	-14.56	100.00	140.00
799.21	8.32	20.00	7.27	0.00	35.59	46.00	-10.41	100.00	287.00
849.65	2.52	20.60	7.44	0.00	30.56	46.00	-15.44	100.00	156.00
900.09	3.51	20.40	7.67	0.00	31.58	46.00	-14.42	100.00	156.00
949.56	4.46	21.19	7.85	0.00	33.50	46.00	-12.50	150.00	271.00

* NOTE:

During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

5.4.5 Test Data (1GHz – 25 GHz, Transmitting from Main antenna) .

1GHz~ 25 GHz(Horizontal), Channel 1 : 2412 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
2900.60	38.22	30.74	2.82	46.51	25.27	54.00	-28.73	105	298
3212.79	40.60	31.06	2.50	46.61	27.55	54.00	-26.45	100	175
4867.13	40.59	34.94	1.94	46.92	30.55	54.00	-23.45	101	174
6996.50	36.63	39.98	2.32	46.31	32.62	54.00	-21.38	100	276
7899.10	40.23	40.84	2.48	44.22	39.32	54.00	-14.68	104	118
8822.18	38.55	40.61	2.65	42.71	39.10	54.00	-14.90	101	299

'pk' ---- peak, 'av' ----average

1GHz~ 25 GHz (Vertical), Channel 1 : 2412 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
2853.15	38.37	30.71	2.82	46.47	25.43	54.00	-28.57	100	89
3277.72	39.74	31.13	2.40	46.62	26.66	54.00	-27.34	100	359
4818.18	41.97	34.74	1.93	46.88	31.75	54.00	-22.25	100	158
6968.53	38.14	39.82	2.31	46.33	33.95	54.00	-20.05	101	222
7953.05	40.07	41.03	2.49	43.97	39.62	54.00	-14.38	102	208
9247.75	40.73	39.81	2.72	42.65	40.60	54.00	-13.40	101	321

'pk' ---- peak, 'av' ----average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz(Horizontal), Channel 6 : 2437 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Am pl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3155.34	40.28	30.99	2.59	46.60	27.25	54.00	-26.75	101	126
3452.55	39.08	31.34	2.14	46.64	25.92	54.00	-28.08	101	248
4891.61	40.55	35.04	1.94	46.94	30.60	54.00	-23.40	100	284
6972.03	37.27	39.84	2.31	46.32	33.10	54.00	-20.90	102	118
7893.11	40.61	40.82	2.48	44.25	39.65	54.00	-14.35	101	276
8390.61	38.84	41.04	2.57	42.75	39.70	54.00	-14.30	100	131

'pk' ---- peak, 'av' ----average

1GHz~ 25 GHz(Vertical), Channel 6 : 2437 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3265.23	40.13	31.12	2.42	46.62	27.06	54.00	-26.94	101	266
3370.13	38.70	31.24	2.26	46.63	25.58	54.00	-28.42	101	203
5181.82	40.99	35.75	1.99	47.16	31.58	54.00	-22.42	100	293
6965.04	36.58	39.80	2.31	46.33	32.36	54.00	-21.64	100	291
8024.97	40.13	41.19	2.50	43.69	40.13	54.00	-13.87	100	230
9247.75	41.98	39.81	2.72	42.65	41.85	54.00	-12.15	106	359

'pk' ---- peak, 'av' ----average

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3262.74	40.53	31.12	2.43	46.62	27.46	54.00	-26.54	102	110
3455.04	38.50	31.35	2.14	46.64	25.34	54.00	-28.66	101	347
4800.70	40.73	34.66	1.93	46.86	30.46	54.00	-23.54	100	18
6965.04	37.34	39.80	2.31	46.33	33.12	54.00	-20.88	102	191
8666.33	39.43	40.80	2.62	42.60	40.25	54.00	-13.75	101	345
9247.75	39.92	39.81	2.72	42.65	39.80	54.00	-14.20	106	339

'pk' ---- peak, 'av' ----average

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz (RBW=1MHz VBW=1MHz)

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV) (pk)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m) (av)	Margin (dB)	Height (cm)	Position (°)
3157.84	40.48	30.99	2.58	46.60	27.45	54.00	-26.55	100	284
3232.77	40.96	31.08	2.47	46.61	27.90	54.00	-26.10	100	186
5181.82	40.07	35.75	1.99	47.16	30.66	54.00	-23.34	100	167
6972.03	36.23	39.84	2.31	46.32	32.06	54.00	-21.94	100	109
8090.91	39.64	41.16	2.52	43.52	39.80	54.00	-14.20	107	133
9247.75	41.83	39.81	2.72	42.65	41.70	54.00	-12.30	102	239

'pk' ---- peak, 'av' ----averag

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit


All frequencies from 1GHz to 25 GHz have been tested.

5.5 Band Edge Measurement

5.5.1 Test Procedure (Conducted)

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 100MHz
 RBW: 100KHz
 VBW: 100KHz
 Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.

5.5.2 Test Setup (Conducted)

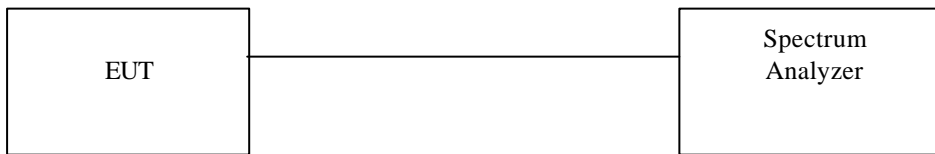

5.5.3 Test Data:

Band Edge measurement (Conducted)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: >20dB (dB)	Pass/Fail
1	2414.9	102.38	---	---
Outside band	2400	69.37	33.01	Pass
11	2456.9	99.72	---	---
Outside band	2473.7	66.14	33.58	Pass

Band Edge Conducted measurement



Band Edge Conducted Measurement



5.5.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48 GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz ,
VBW: 10Hz,
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

5.5.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

5.5.6 Test Data:

Table Band Edge measurement (Radiated)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit: > 20dB (dBC)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
1(peak mode)	2408.3	70.65	31.67	102.32	---	-----	1MHz	-----
Outside band	2399.7	42.82	31.67	74.49	27.83	-----	1MHz	Pass
1(average mode)	2404.8	57.44	31.67	89.11	---	-----	10Hz	-----
Restricted band	2376.3	7.36	31.67	39.03	-----	54	10Hz	Pass
11(peak mode)	2458.9	68.94	31.64	100.58	----	-----	1MHz	-----
Outside band	2473.5	38.79	31.64	70.43	30.15	-----	1MHz	Pass
11(average mode)	2464.5	55.54	31.64	87.18	----	-----	10Hz	-----
Restricted band	2483.6	8.91	31.64	40.55	-----	54	10Hz	Pass

Note: The Spectrum plot of emission level measurement in Restricted band is attached.

Emission Level = Spectrum Reading + Correction Factor

Correction Factor = Antenna Factor + cable loss – amplifier gain

Both Horizontal and Vertical polarization have been tested and the worst data is listed above.

Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 1)




Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 11)



Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 11)

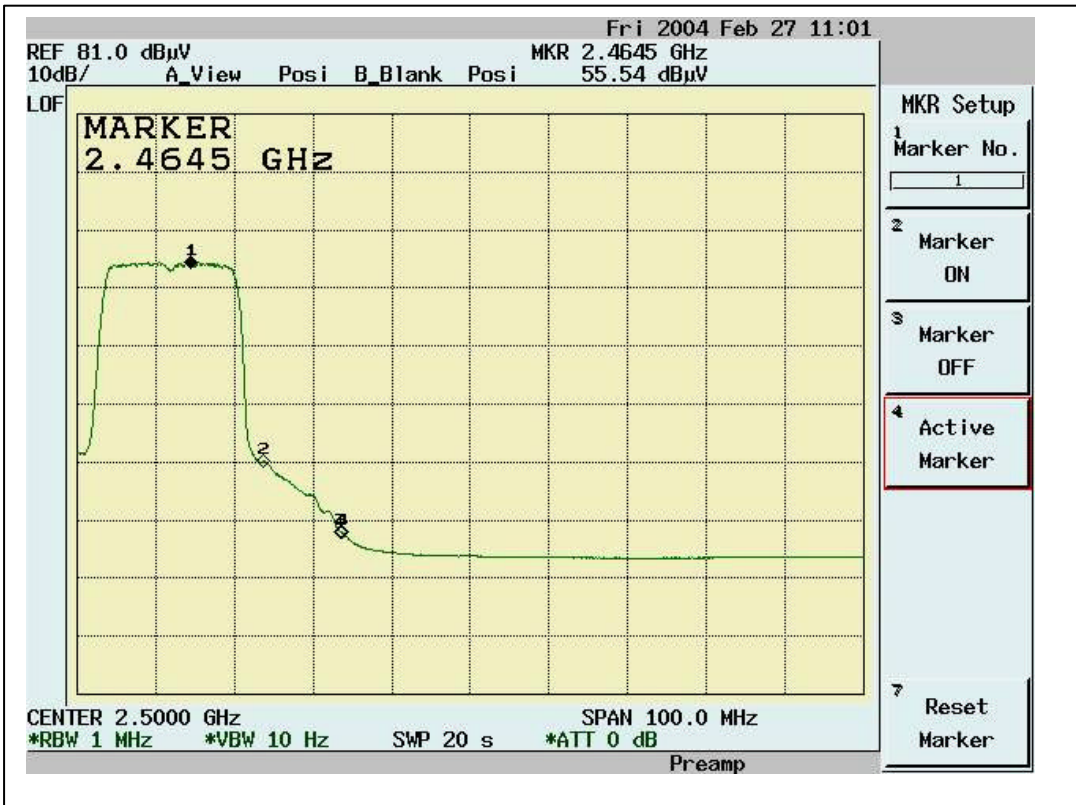

5.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]

See the MPE report

5.7 DSSS Peak Power Spectral Density [Section 15.247(d)]

5.7.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN:1.5MHz
 RBW: 3KHz
 VBW: 30KHz
 Center frequency: fundamental frequency tested.
 Sweep time= 500 sec.

2. Using Peak Search to read the peak power after Maximum Hold function is completed.



5.7.2 Test Setup



5.7.3 Test Data:

Table Maximum Peak Output Power Density

Chennel	Spectrum Reading (dBm/3KHz)	Cable Loss (dB)	Peak Power Output (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
1	-18.39	1.1	-17.29	8	Pass
6	-19.52	1.1	-18.42	8	Pass
11	-20.32	1.1	-19.22	8	Pass

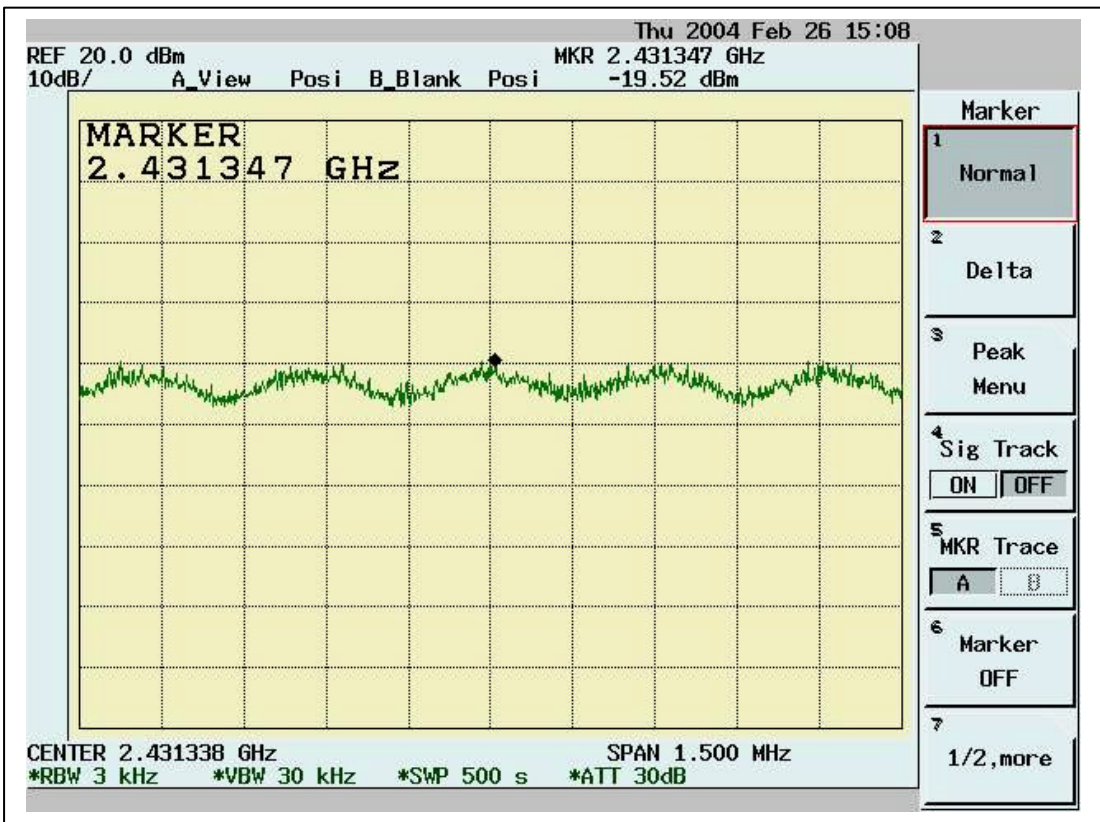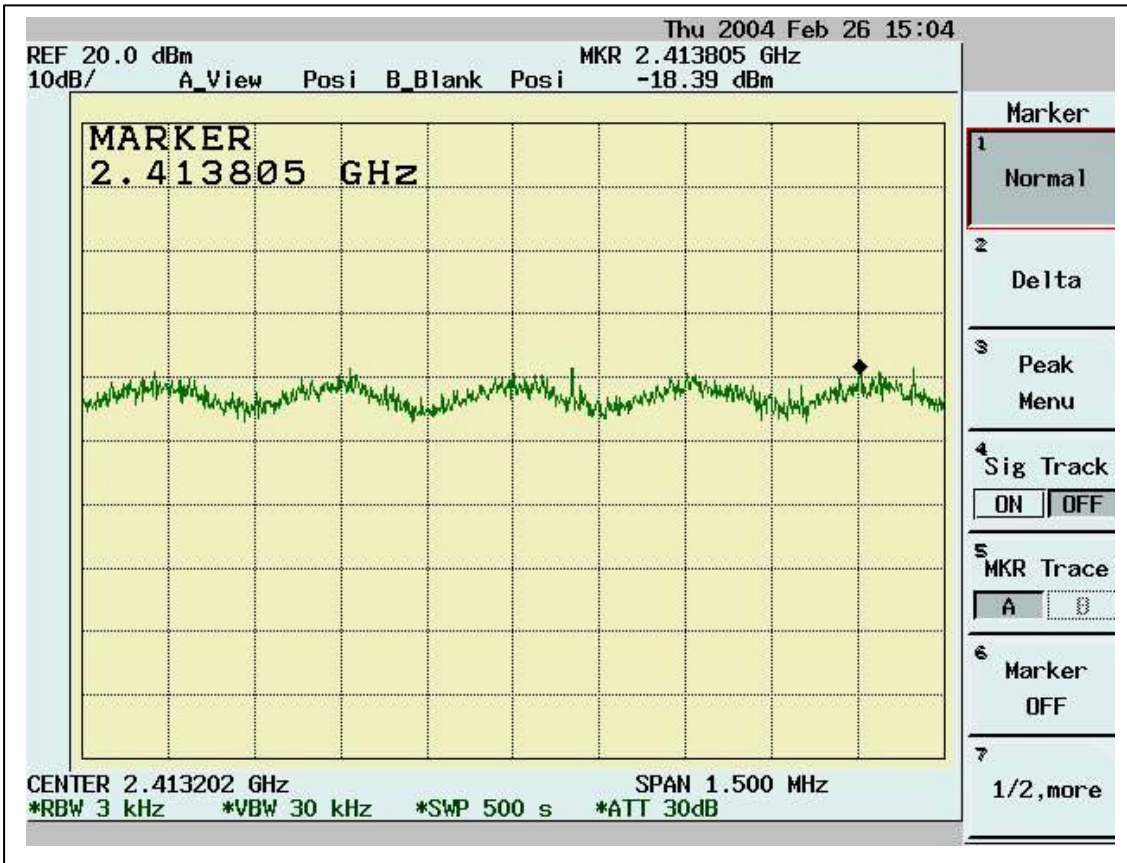



6. Appendix

6.1 Appendix A: Measurement Procedure for Powerline Conducted Emissions

The EUT is set up in accordance with the suggested configuration given in ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the Figure 1 of the ANSI C63.4-2001 or CISPR16. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. Both the line of power cord, hot and neutral, were measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

6.2 Appendix B: Test Procedure for Radiated Emissions

Preliminary Measurements in the Anechoic Chamber

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUT are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360°C. The antenna height is varied from 1-2.5m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be pre-selected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.

Measurements on the Open Site or 10m EMC Chamber

The radiated emissions test will then be repeated on the open site or 10m EMC chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of the 3 or 10 meter open field sites. Desktop EUT are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both reading are recorded with the quasi-peak detector with 120KHz bandwidth. For frequency between 30 MHz and 1000MHz, the reading is recorded with peak detector or quasi-peak detector. For frequency above 1 GHz, the reading is recorded with peak detector or average detector with 1 MHz bandwidth.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

6.3 Appendix C: Test Equipment

6.3.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	50 Ohms Load Conduction 02	EMCO	N/A	ISL-50ohms conduction 02	11/21/2003	11/21/2004
Conduction	Coaxial Cable 1F-C2	Harbourindustries	RG400	1F-C2	06/03/2003	06/03/2004
Conduction	Digital Hygro-Thermometer Conduct	MicroLife	HT-2126G	ISL-Conduction02	12/16/2003	12/16/2004
Conduction	EMI Receiver 02	HP	85460A	3448A00183	08/21/2003	08/21/2004
Conduction	ISN T4	Schaffner	ISN T400	16593	08/20/2002	08/20/2004
Conduction	LISN 01	R&S	ESH2-Z5	890485/013	05/07/2003	05/07/2004
Conduction	LISN 03	R&S	ESH3-Z5 831.5518.52	828874/D10	10/31/2003	10/31/2004
Radiation	Spectrum Analyzer 06	Advantest	R3162	91700295	09/25/2003	09/24/2004
Radiation	EMI Receiver 05	AFJ	ER 55CR	55390143234	11/07/2003	11/07/2004
Radiation	BILOG Antenna 08	Schaffner	CBL6112B	2756	06/04/2003	06/04/2004
Radiation	Microwave Cable Chmb 02 3M	HUBER+SUHNER AG.	Sucoflex 103	42731/3 & 42729/3	03/21/2003	03/21/2004
Radiation	Coaxial Cable Chmb 02-10M	Belden	RG-8/U	Chmb 02-10M	01/14/2004	01/14/2005
Radiation	Digital Hygro-Thermometer Chmb 02	MicroLife	HT-2126G	Chmb 02	02/07/2004	02/07/2005
Rad. Above 1Ghz	Horn Antenna 02	Com-Power	AH-118	10088	02/25/2004	02/25/2005
Rad. Above 1Ghz	Horn Antenna 04	Com-Power	AH-826	081-001	10/17/2003	10/17/2004
Rad. above 1Ghz	Horn Antenna 05	Com-Power	AH-640	100A	09/13/2003	09/13/2004
Rad. above 1Ghz	Microwave Cable Chmb 05	HUBER+SUHNER AG.	Sucoflex 103	42726/3 & 42727/3	09/11/2003	09/11/2004
Rad. Above 1Ghz	Preamplifier 02	MITEQ	AFS44-00102 650-40-10P-44	728229	05/07/2003	05/07/2004
Rad. Above 1Ghz	Preamplifier 09	MITEQ	AFS44-00102 650-40-10P-44	858687	02/28/2003	02/28/2004

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
RF	Peak Power Analyzer	HP	8990A	3621A01269	09/12/2003	09/12/2004
Rad. Above 1Ghz	Preamplifier 10	MITEQ	JS-26004000-27-5A	818471	02/28/2003	02/28/2004
Rad. Above 1Ghz	Signal Generator 03	Anritsu	MG3642A	6200162550	02/05/2004	02/05/2005
Rad. Above 1Ghz	Signal Generator 04	Anritsu	MG3692A	020311	02/06/2004	02/06/2005
Rad. Above 1Ghz	Spectrum Analyzer 07	Advantest	R3182	110600649	10/17/2003	10/17/2004
Rad. Above 1Ghz	Power Meter	HP	438A	3513U06187	01/07/2004	01/07/2005
Rad. Above 1Ghz	Power Sensor	HP	8481H	MY41091048	06/17/2004	06/17/2005


Note: Calibration traceable to NIST or national or international standards.

6.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data


Radiation/Conduction	Filename	Version	Issued Date
Conduction	Tile.exe	1.12E	7/7/2000
Radiation	Tile.exe	1.12C	6/16/2000

6.4 Appendix D: Layout of EUT and Support Equipment


6.4.1 General Conducted Test Configuration

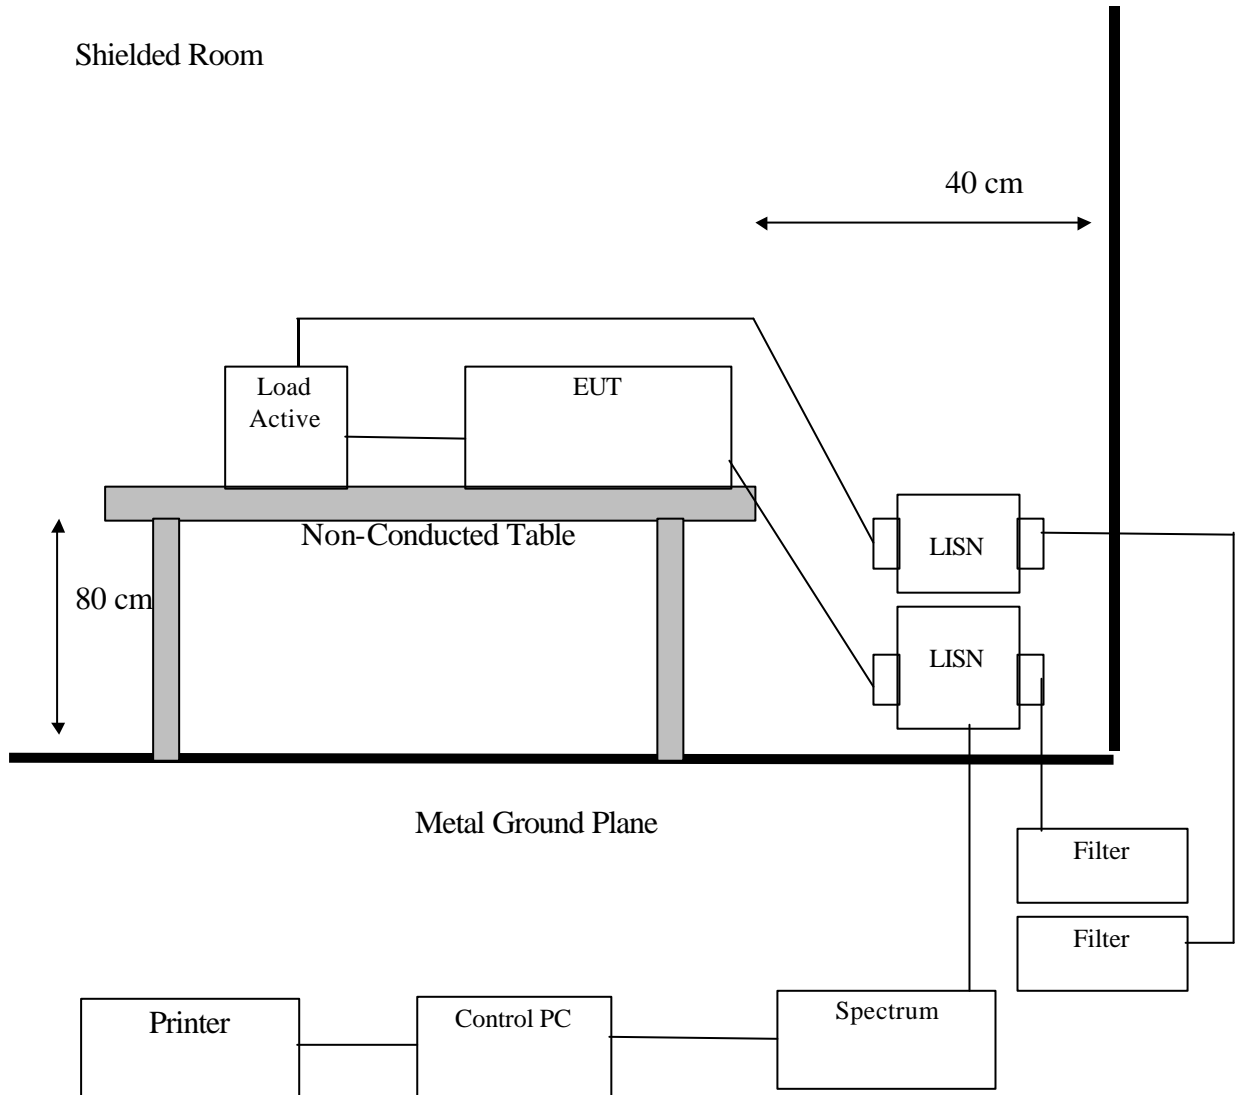

6.4.2 General Radiation Test Configuration

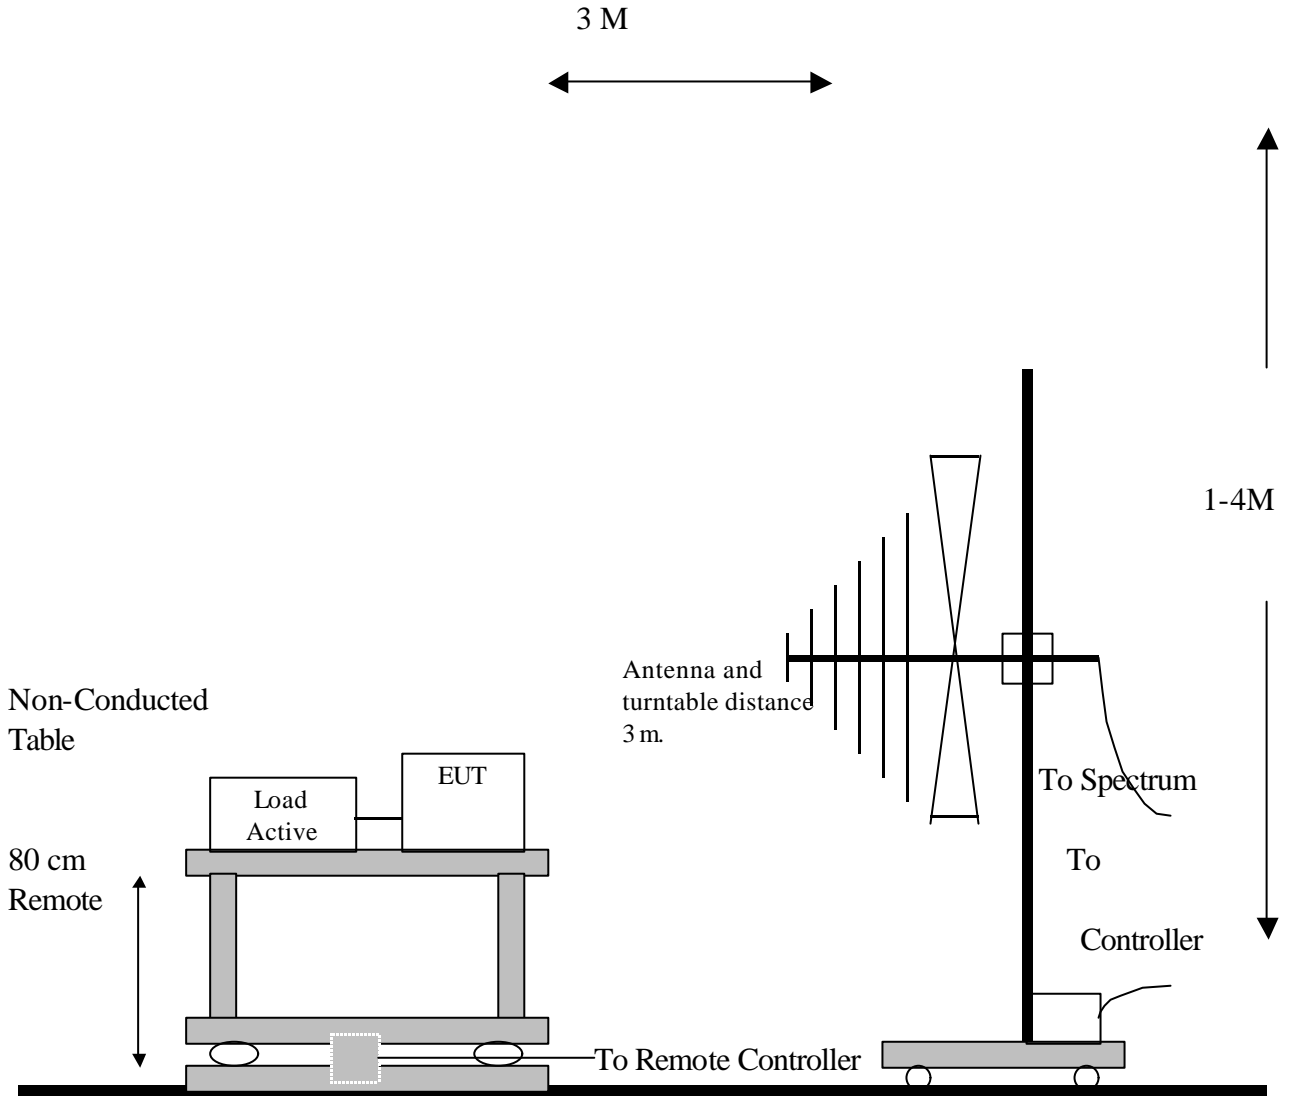

Metal Full Soldered Ground Plane

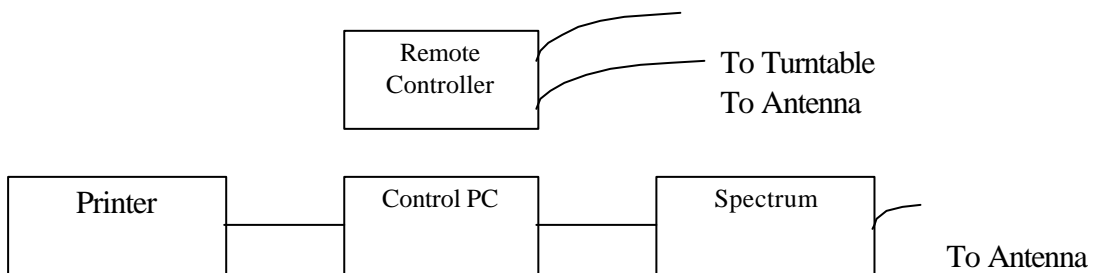

6.5 Appendix E: Description of Support Equipment

6.5.1 Description of Support Equipment

None

6.5.2 Software for Controlling Support Unit

A test program which generates a complete line of continuously repeating "H" pattern is used as the software test program. The program was executed as follows:

- A. Read and write to the disk drives.
- B. Send H pattern to the video port device (Monitor).
- C. Repeat the above steps.

	Filename	Issued Date
Monitor	HH.bat	8/20/1991

6.5.3 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to AC Power Cord Inlet (3-pin)	1.8M	Nonshielded, Detachable	Plastic Head

6.6 Appendix F: Accuracy of Measurement

Test Site: Conduction 02

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.104	k=1	0.052
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.330	k=1	0.165
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	LISN Factor Calibration	Normal	k=2	1.200	k=1	0.600
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	0.850
7	Total Uncertainty @95% mim. Confidence Level	Normal	k=2	1.701		

Measurement Uncertainty Calculations:

$$Uc(y) = \text{square root} (u_1 (y)^2 + u_2 (y)^2 + \dots + u_n (y)^2)$$

$$U = 2 * Uc (y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS : The treatment of Uncertainty in EMC Measurement.

Test Site: Chamber 02-3M

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.067	k=1	0.034
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.103	k=1	0.052
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	Antenna Factor Calibration	Normal	k=2	1.700	k=1	0.850
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	1.029
7	Total Uncertainty @95% mim. Confidence Level	Normal	k=2	2.059		

Measurement Uncertainty Calculations:


$$Uc(y) = \text{square root} (u_1 (y)^2 + u_2 (y)^2 + \dots + u_n (y)^2)$$

$$U = 2 * Uc (y)$$


Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS :
The treatment of Uncertainty in EMC Measurement.

6.7 Appendix G: Photographs of EUT Configuration Test Set Up

The Front View of Highest Conducted Set-up For EUT

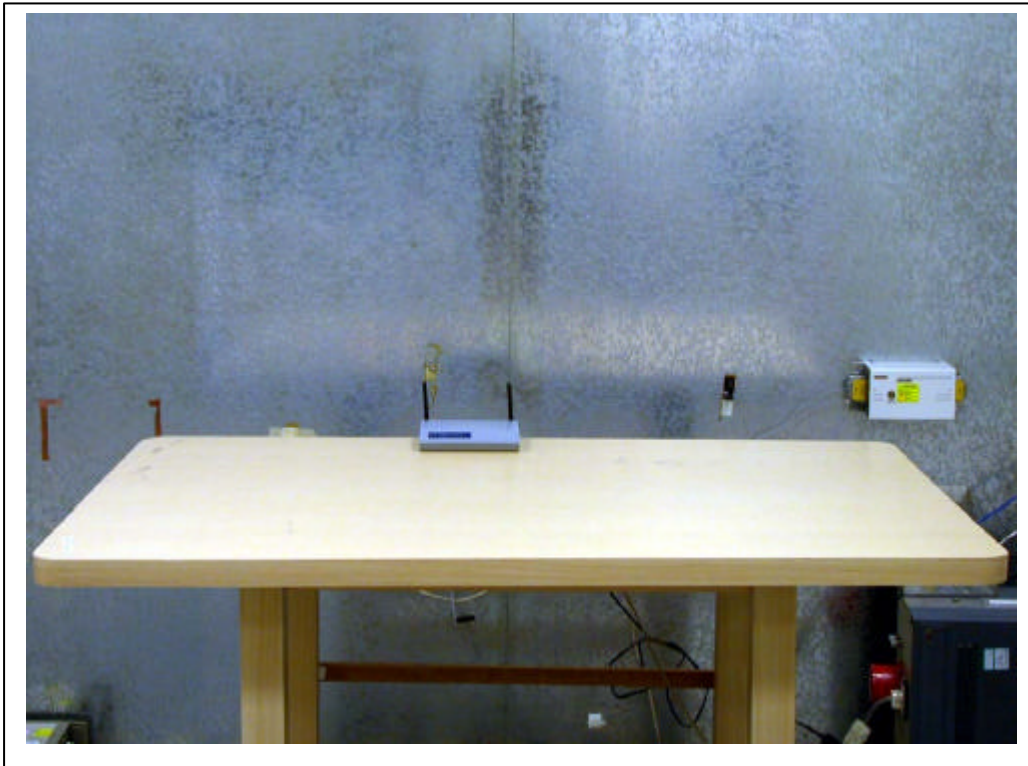


The Back View of Highest Conducted Set-up For EUT

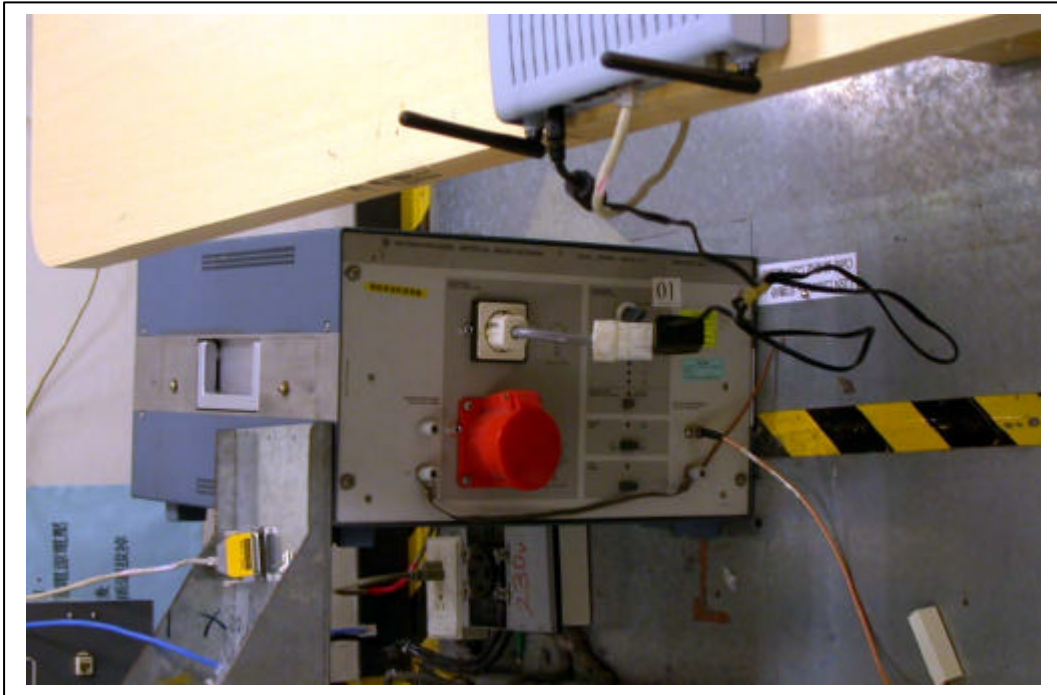

The Front View of Highest Radiated Set-up For EUT



The Back View of Highest Radiated Set-up For EUT

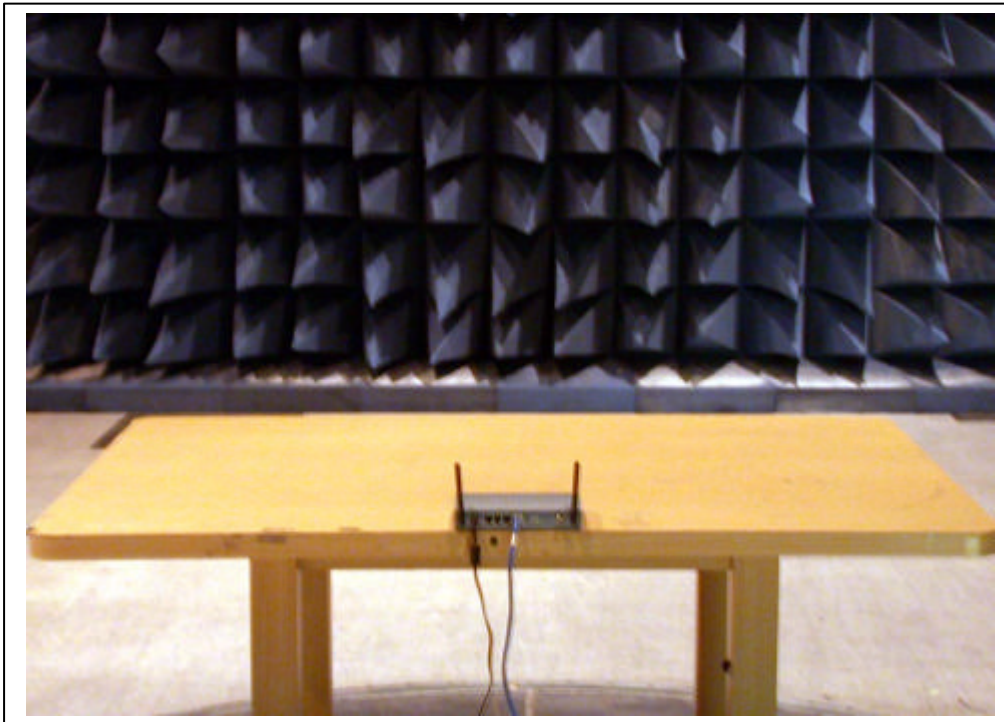

6.8 Appendix H: Antenna Spec.

Please refer to the attached file.